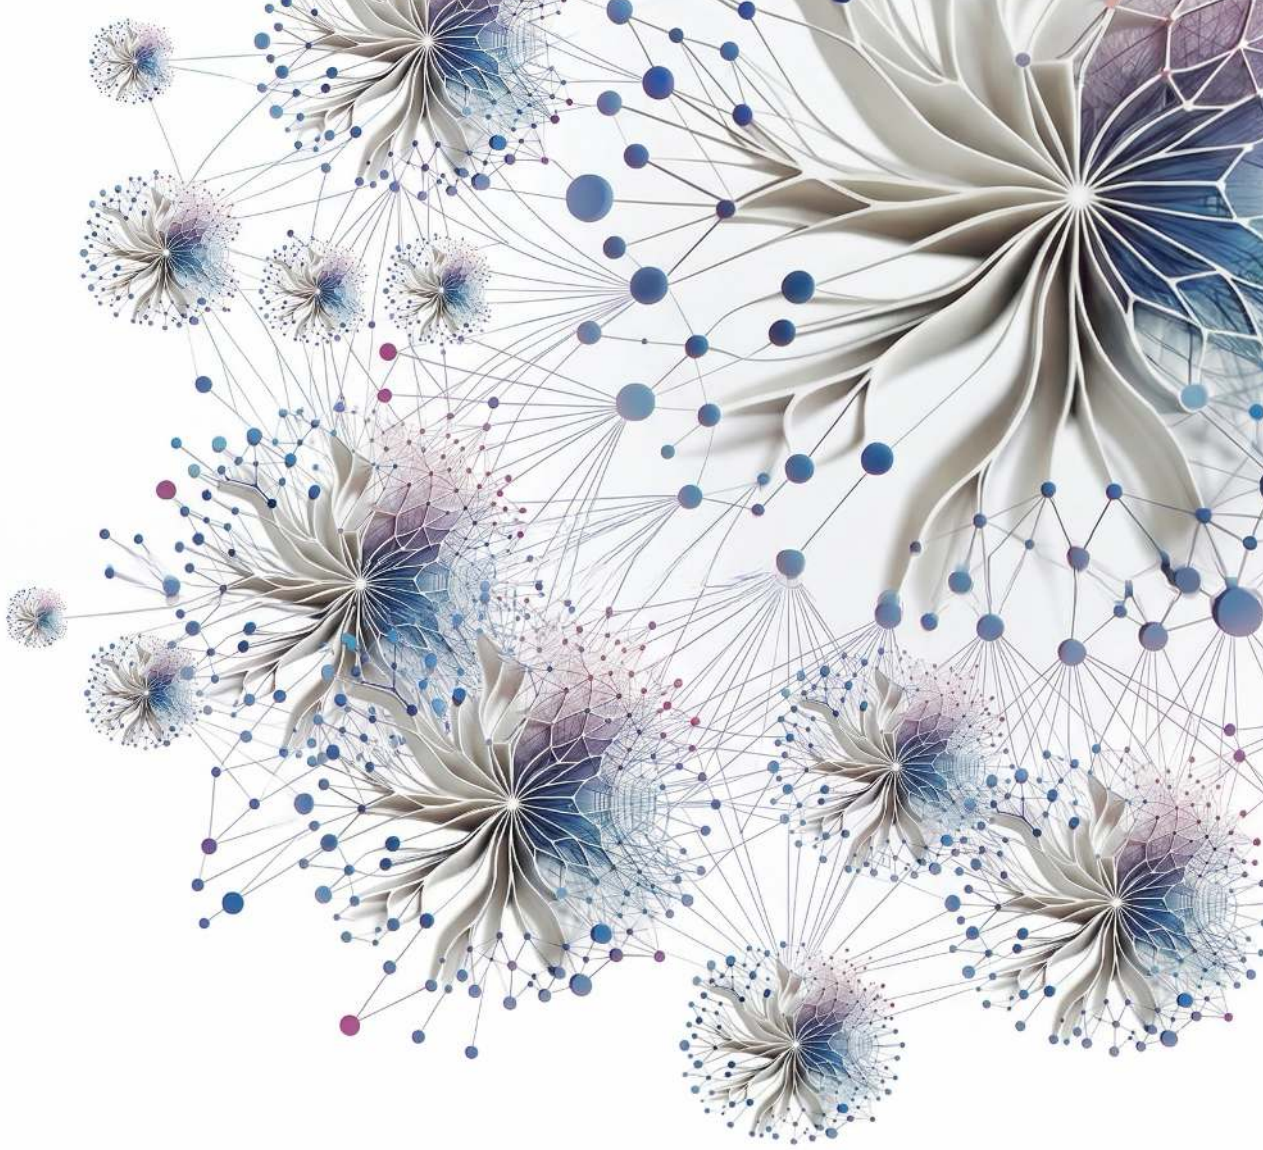


Scaling

Machine Learning Systems

Vijay Janapa Reddi

Machine Learning Systems at Scale

From Nodes to Fleets: The Engineering of Distributed Scale

Machine Learning Systems at Scale

From Nodes to Fleets: The Engineering of Distributed Scale

Vijay Janapa Reddi
Harvard University

The MIT Press
Cambridge, Massachusetts
London, England

Table of contents

Dedication **xiii**

Author's Note **xv**

Preface **xvii**
- Who This Book Is For . . . xvii
- Why a Fleet-Level Textbook . . . xvii
- What This Book Covers . . . xviii
- Suggested Reading Paths . . . xxi
- Companion Resources . . . xxiv
- Prerequisites . . . xxiv
- Beyond This Book . . . xxiv
- Using This Book in a Course . . . xxiv
- Copyright and Licensing . . . xxv

Acknowledgments **xxvii**
- Origins . . . xxvii
- Collaborators and Colleagues . . . xxvii
- Support . . . xxvii

A Note on AI Assistance **xxix**

Notation **xxxi**
- Network Communication Models and Collectives . . . xxxv
- Parallelism Dimensions and Scaling Efficiency . . . xxxvii
- Cluster Reliability, Fault Tolerance, and Checkpointing . . . xxxviii
- Distributed Memory Hierarchy and Serving at Scale . . . xli
- Privacy, Robustness, Governance, and Distributed Constants . . . xlvi
- Units, Precision, and Disambiguation . . . xlix

Main Matter

Introduction **3**
- The Scale Moment . . . 4
- From Single Node to Fleet . . . 10
- AI Scaling Laws . . . 12
- Constraints of Scale . . . 19
- The C^3 Taxonomy and Foundations of Scale . . . 22
- Foundational Concepts . . . 28
- The Structure of This Textbook . . . 31
- Fallacies and Pitfalls . . . 32
- Summary . . . 33

Part I: The Fleet

Fleet Principles **37**

Compute Infrastructure **41**
The Infrastructure Walls . . . 42
The Accelerator . . . 43
The Memory Wall . . . 51
Sustained Compute and Precision . . . 62
The Node . . . 66
The Rack . . . 77
The Pod . . . 85
Accelerator Selection for Fleet Workloads . . . 89
Infrastructure Technologies That Move the Walls . . . 94
Fallacies and Pitfalls . . . 97
Summary . . . 99

Network Fabrics **103**
The Synchronization Backbone . . . 104
How ML Networking Inverts Data-Center Assumptions . . . 108
Level 1 Wire and Link . . . 111
Level 2 Transport and the Performance Model . . . 113
Level 3 Switch and Topology . . . 119
Level 4 Fabric Behavior, Congestion, and Routing . . . 128
Level 5 Cluster Design and Case Studies . . . 135
Network Virtualization . . . 136
Monitoring and Debugging . . . 137
Network Technologies That Move the Ceiling . . . 139
Fallacies and Pitfalls . . . 141
Summary . . . 142

Data Storage **145**
The Fuel Line . . . 146
How ML Workloads Invert Storage Assumptions . . . 147
The ML Storage Hierarchy . . . 152
The Data Pipeline Equation . . . 169
GPUDirect Storage and the CPU Data-Copy Bypass . . . 178
Checkpoint Storage . . . 182
Storage Economics . . . 187
Storage for Inference Workloads . . . 191
Retrieval Infrastructure and Vector Indexes . . . 192
The Synthetic Fuel Line . . . 193
Storage Technologies That Move Tiers . . . 193
Fallacies and Pitfalls . . . 194
Summary . . . 196

Part II: Distributed ML

Distributed ML Principles **201**

Distributed Training **205**
Why Distribution Is Necessary . . . 206
The Physics of the Cluster . . . 206
Multi-Machine Training Requirements . . . 207
Distributed Training Complexity Trade-offs . . . 208
Single-Machine to Distributed Transition . . . 209
Parallelism Strategy Selection and Engineering Trade-offs . . . 210
Data Parallelism . . . 211

Scaling Efficiency and Convergence . . . 224
Model Parallelism . . . 238
Hybrid Parallelism . . . 251
Multi-Model Training for Alignment and RLHF . . . 257
Parallelism Strategy Comparison . . . 262
From Principles to Systems . . . 264
Fallacies and Pitfalls . . . 264
Summary . . . 266

Collective Communication **269**
From Parallelism to Communication Patterns . . . 270
The Physics of Data Movement . . . 271
The Gradient's Travel Manifest . . . 273
Network Performance Modeling . . . 275
Collective Operation Primitives . . . 279
AllReduce Algorithms and Topologies . . . 283
Hierarchical Communication . . . 293
AllToAll Exchanges at Scale . . . 299
Gradient Compression Under Bandwidth Scarcity . . . 302
Communication-Computation Overlap . . . 308
Communication Libraries and Runtimes . . . 310
Fallacies and Pitfalls . . . 313
Summary . . . 315

Fault Tolerance **317**
Failure Analysis at Scale . . . 318
The Mathematics of Inevitable Failure . . . 319
Quantitative Reliability Analysis . . . 320
Cluster MTBF Calculation . . . 322
Failure Taxonomy . . . 323
The Bathtub Curve and Hardware Lifecycle . . . 329
Model-Type Diversity in Failure Impact . . . 330
Economic Framework for Fault Tolerance Investment . . . 331
Hardware Faults at Fleet Scale . . . 332
Check-and-Verify Defenses Against Silent Data Corruption . . . 335
Software Faults . . . 338
Fault Injection Tools and Frameworks . . . 340
Checkpointing and Progress Preservation . . . 342
Failure Detection and Recovery . . . 351
Elastic Recovery . . . 358
Serving Fault Tolerance . . . 362
Graceful Degradation . . . 368
Distributed Debugging and Observability . . . 371
Case Studies . . . 377
Fallacies and Pitfalls . . . 378
Summary . . . 381

Fleet Orchestration **385**
The Scheduling Problem . . . 386
Distributed Scheduling Complexity . . . 388
Failure Rates at Scale . . . 389
Scheduling Objectives and Their Conflicts . . . 390
Core Allocation Constraints . . . 392
Orchestration Paradigms . . . 398
Topology-Aware Scheduling . . . 407
Elastic Scheduling . . . 414

Cost Optimization . . . 418
Custom ML Schedulers . . . 424
Serving Capacity in the Shared Fleet . . . 427
Multi-Tenancy and Quotas . . . 431
Debugging Cluster Utilization . . . 436
Fallacies and Pitfalls . . . 439
Summary . . . 441

Part III: Deployment at Scale

Deployment-at-Scale Principles **445**

Performance Engineering **449**
The Memory Wall and Roofline Diagnosis . . . 450
The Single-Machine Iron Law . . . 451
The Efficiency Frontier . . . 452
The Memory Wall . . . 454
Serving Regimes, Batch Size, and Prefill-Decode . . . 457
System Profiling . . . 461
Measurement at Scale . . . 467
Operator Fusion and Kernel Engineering . . . 471
Precision Engineering . . . 477
Graph Compilation . . . 482
Algorithmic Performance Transformations . . . 489
Overlap on the Device: Streams, Contention, and Tensor-Parallel Collectives . . . 491
Optimization Playbook for Large Language Models . . . 493
Fallacies and Pitfalls . . . 497
Summary . . . 499

Inference at Scale **501**
The Economics and Architecture of Inference . . . 502
Limits of Single-Machine Serving . . . 503
Training Versus Inference Fundamental Inversion . . . 504
The Serving Tax of Distributed Execution . . . 505
Serving Cost Dominance in Production . . . 506
Inference Beyond LLMs . . . 507
The Serving Hierarchy . . . 508
Serving Architecture Dimensions . . . 510
Batching Strategies at Scale . . . 513
Memory and Decode-Time Management . . . 536
Weight Quantization for Serving . . . 548
Model Sharding for Inference . . . 554
Load Balancing and Request Routing . . . 565
Multi-Tenancy and Isolation . . . 572
Autoscaling and Capacity Control . . . 576
Global Inference Infrastructure . . . 580
Case Studies . . . 585
Fallacies and Pitfalls . . . 591
Summary . . . 592

Edge Intelligence **595**
The Edge Learning Paradigm . . . 596
Motivations and Benefits . . . 599
Alternative Approaches and Decision Criteria . . . 600
Knowledge Transfer as the Adaptation Foundation . . . 601
Real-World Application Domains . . . 601

Architectural Trade-Offs Between Centralized and Decentralized Training 602
Design Constraints 603
Model Adaptation 614
Data Efficiency 623
Federated Learning Algorithms 628
Federated Learning Systems at Scale 634
Continual Adaptation Under Edge Budgets 643
Integrating the Edge Intelligence Pillars 644
Production Integration 647
Engineering Challenges and Mitigations 651
Fallacies and Pitfalls 655
Summary 656

ML Operations at Scale **659**
Why a Model Fleet Needs a Control Plane 660
The N-Models Problem 661
Governance of State and Change 672
Feature Store Operations 677
CI/CD for ML at Scale 686
Monitoring at Scale 708
Production Debugging and Incident Response 717
Platform Engineering 722
Fleet Economics and Utilization 727
Organizational Operation and Learning 750
Case Studies 752
Fallacies and Pitfalls 755
Summary 756

Part IV: The Responsible Fleet

Responsible Fleet Principles **761**

Security & Privacy **765**
The Expanded Attack Surface 766
Security Defined 767
Privacy Defined 768
Security vs. Privacy 769
Learning from Security Breaches 770
Systematic Threat Analysis and Risk Assessment 772
Model-Specific Attack Vectors 776
Fleet-Internal Trust Boundaries 791
Hardware-Level Security Vulnerabilities 793
Machine Learning Systems as Attack Tools 800
Comprehensive Defense Architectures 802
Differential Privacy 821
Selecting and Sequencing Defenses 831
Fallacies and Pitfalls 834
Summary 835

Robust AI **837**
The Silent Failure Problem 838
Real-World Robustness Failures 840
A Unified Framework for Robust AI 844
Environmental Shifts 850
Input-Level Attacks: Adversarial Examples and Poisoning 860
Adversarial Defenses 869

Data Poisoning Defenses . . . 875
System-Level Faults and Masquerading . . . 879
Fallacies and Pitfalls . . . 880
Summary . . . 881

Sustainable AI **885**
The Energy Ceiling . . . 886
The Scale of Environmental Impact . . . 888
Exponential Growth vs. Physical Constraints . . . 890
Power Envelopes and the Energy Wall . . . 891
Data Center Grid Dynamics . . . 891
Training-Scale Energy Concentration . . . 893
Architectures That Avoid Unneeded Work . . . 893
Energy Measurement and Modeling . . . 895
Carbon Footprint Calculation . . . 905
Data Center Energy and Resource Consumption . . . 913
Training vs. Inference Energy Analysis . . . 922
Hardware Lifecycle and E-Waste . . . 929
Mitigation Strategies . . . 935
Policy, Regulation, and the Path Forward . . . 944
Fallacies and Pitfalls . . . 946
Summary . . . 948

Responsible AI **951**
The Governance Imperative . . . 952
The Governance and Assurance Lifecycle . . . 953
Core Principles and the ML Lifecycle . . . 955
Architectural Trade-Offs . . . 957
Fairness and Bias Mitigation . . . 960
Privacy and Data Governance . . . 976
Explainability and Transparency . . . 984
AI Safety, Robustness, and Generative Controls . . . 990
Accountability, Governance, and Sociotechnical Dynamics . . . 998
Operationalizing Responsible AI at Fleet Scale . . . 1010
Fallacies and Pitfalls . . . 1018
Summary . . . 1019

Synthesis

Conclusion **1025**
Synthesizing Distributed ML Systems . . . 1026
Six Principles of Distributed ML Systems . . . 1026
The Complete Production System . . . 1031
Competencies Mastered . . . 1034
Where the Binding Constraint Moves Next . . . 1034
Fallacies and Pitfalls . . . 1037
Summary . . . 1038

References

References **1043**

Appendices **1069**

Single-Machine Foundations **1069**

The C^3 Taxonomy **1077**

Fleet Foundations **1089**

Communication Foundations **1101**

Reliability Foundations **1111**

Inference Foundations **1123**

System Assumptions **1131**

Glossary **1143**

Index **1155**

Dedication

For Kari,
who gave me the time this book required
and never asked for it back.

And for Nora and Maya,
the reason any of it matters.

Author's Note

When a new model is announced, the world looks at the model. It almost never looks at the fleet. Behind many frontier models, however, stand thousands of accelerators held in lockstep across a network where one slow link can stall the whole run, cooled by systems that move megawatts of heat, kept alive by protocols that treat failure not as an exception but as a scheduled event. None of this fits in the announcement. The model gets the paper. The fleet gets a footnote, if that.

This book is an argument that the fleet deserves more than a footnote. We have built vast distributed systems before, but none quite like this one, because none of the others had to be right about two things at once. The telephone network had to stay available; it never had to converge. The internet had to deliver the packet; it never had to preserve the gradient inside it. A fleet has to do both. It must move data the way any distributed system does, and it must keep the mathematics of learning intact while it moves. A node that drops out does not only cost capacity; it can break the synchronization a training step depends on and force a rollback that wastes work since the most recent checkpoint. That double obligation, computational and statistical, sustained at the scale of a small campus, is the engineering this book makes visible.

The obligation does not end when training does. A model that cannot be trained is an idea, not a system. A model that cannot be served is a research result, not a product. A model that cannot be governed is a liability, not an asset. At every stage, from the first allocated node to the last served request, the fleet decides what is possible and what remains imagined.

The problem under every chapter is easy to state and hard to solve: what it takes to build not one machine learning system but a thousand, make them work as one, and run them responsibly. I believe that is a defining engineering problem of this generation, and that the people who take it on, the ones who rarely get the headline, deserve a book that treats it as one.

— Vijay Janapa Reddi
Cambridge, Massachusetts
2026

Preface

Who This Book Is For

This book is for anyone who understands machine learning on a single machine and now faces the challenge of making it work at scale. The problems of scale are not the problems of a single node, only bigger. They are qualitatively different: networks partition, hardware fails as a statistical certainty, and the societal impact of every design decision is amplified by millions of users.

The assumed foundation is what an introductory ML systems course or equivalent experience supplies, namely local training and inference, accelerator execution, memory hierarchy, and basic performance reasoning. No particular prior textbook is required. The advanced scope here is the transition from that single node to a coordinated fleet. For readers who want a refresher, Appendix 5 restates the single-machine foundation this book builds on, including the iron law, arithmetic intensity and the roofline, the accelerator memory hierarchy, the memory cost of mixed-precision training, and transformer arithmetic. The remaining appendices collect the diagnostic tables, the communication, reliability, and serving models, and the reference numbers the chapters use.

The scope ranges from designing the physical substrate of an AI data center, to scaling training beyond the limits of a single accelerator, to reasoning about what happens when a production fleet serves a global user base. Throughout, the focus is on the physics of distribution, the invariants that govern every fleet-scale ML system regardless of the framework, the model, or the era.

Why a Fleet-Level Textbook

In 2012, training AlexNet took five to six days on two GPUs (Krizhevsky et al. 2012). By 2023, public GPT-4-class estimates placed frontier training at roughly 25,000 GPUs running for about three months (Patel and Wong 2023); OpenAI did not disclose the actual hardware configuration (OpenAI et al. 2023). This is not the same engineering problem at a larger scale. It is a categorically different engineering problem.

On a single machine, performance is governed by the memory wall, the gap between processor speed and memory bandwidth. In a distributed cluster, a new wall emerges: the bisection bandwidth wall, where the minimum network bandwidth that bisects the cluster can cap throughput for traffic that must cross that cut. Data no longer moves through local hierarchies alone; it traverses optical fabrics governed by the speed of light between racks and across continents. Hardware failures, rare enough on a single machine to be treated as exceptions, become routine statistical events at fleet scale. Long training runs must plan for interruptions rather than rely on every component remaining available until completion.

These are not operational annoyances. They are physical constraints, as fundamental and as permanent as the memory wall, Amdahl's Law, or the energy cost of data movement. They require their own engineering discipline, with its own invariants:

- **The Universal Scaling Law**: Within empirically validated regimes, model loss falls as a power law in training compute, data, or parameters, so each further improvement demands multiplicatively more resources. This is the pressure that moves machine learning from single machines onto fleets.
- **The Bisection Bandwidth Theorem**: For communication patterns that must cross the minimum bisection, throughput is bounded by that bisection bandwidth.

- **The Fleet Law**: Under fixed-work scaling, reduced per-node computation competes with communication and coordination costs, so adding workers does not guarantee proportional speedup.
- **The Young-Daly Checkpoint Law**: The optimal checkpoint interval balances the cost of writing state against the expected cost of lost work due to failure.
- **The Serving Cost Dominance Law**: For high-traffic production models, cumulative inference operational expenditure can exceed the one-time training cost, making serving efficiency a lifecycle optimization target.
- **The Fairness Impossibility Law**: With unequal group base rates and imperfect prediction, risk scores cannot satisfy groupwise calibration and equal mean scores across groups within both outcome classes simultaneously. Thresholded error-rate parity and demographic parity are distinct requirements with their own trade-offs.

If single-machine ML systems engineering asks *"what can one machine build?"*, then fleet-scale ML systems engineering asks *"what can a thousand machines build together, and at what cost to reliability, efficiency, and society?"*

That final clause is what sets fleet-scale engineering apart. A single machine affects its user; a fleet affects everyone its outputs touch, across millions of decisions per second. At that scale, reliability, efficiency, and fairness stop being features and become engineering constraints as binding as bandwidth or power. A system that scales but cannot be trusted has not been engineered. It has only been enlarged.

This book provides that foundation. It follows the Hennessy and Patterson pedagogical model, extending the quantitative, principles-first approach to the distributed scale (Hennessy and Patterson 2011; Hennessy and Patterson 2019, 2017). Just as their work taught a generation to reason about processor performance from first principles, this book teaches the reader to reason about fleet performance, replacing intuition about distributed systems with measurement, and ad hoc scaling with engineering.

The architectural priorities and operational failure modes explored in these chapters did not originate in an academic vacuum. They were gathered directly from practitioners in industry, through technical exchanges at conferences, engineering meetups, and conversations with colleagues who generously made the time to explain what breaks when scaling models across thousands of accelerators and what practicing systems engineers must understand.

The assumed single-node foundations supply the bricks: tensors, kernels, memory hierarchies, and optimization loops. A fleet is not built from more bricks. It is an orchestra. A single musician can produce music of remarkable beauty, but an orchestra is not simply many musicians playing at once. It requires a conductor, a score, precise synchronization, and the ability to recover gracefully when a player drops out. The acoustics of the concert hall shape the sound in ways that no individual instrument can control. The principles that govern orchestral performance (coordination, communication latency, fault tolerance, and the physics of the performance space) are categorically different from those that govern a solo performer. ML fleets work the same way. A training cluster, a serving fleet, and an edge deployment are vastly different systems, but beneath them sit the same building blocks: parallelism strategies, collective communication primitives, checkpoint protocols, scheduling algorithms, and the trade-offs between throughput, latency, fault tolerance, and cost.

What This Book Covers

This book focuses on the **Machine Learning Fleet**: coordinated machines that jointly train, serve, or maintain ML models. Warehouse-scale training clusters are one form; geographically distributed serving replicas and heterogeneous edge devices are others. Across these forms, communication and coordination couple local execution to fleet behavior, while reliability, resource budgets, and governance constrain the design.

The content is organized into four parts:

- **Part I: The Fleet** builds the physical substrate of the AI data center from the ground up: the silicon and cooling of compute infrastructure, the network fabrics that connect thousands of accelerators, and the scalable data storage that feeds training pipelines.

- **Part II: Distributed ML** establishes the logic of distribution beyond a single machine: the parallelism strategies (data, tensor, and pipeline) for training models too large for single devices, the collective communication primitives that synchronize gradients, the fault tolerance mechanisms that ensure reliability when failure is routine, and the orchestration systems that manage the fleet.
- **Part III: Deployment at Scale** takes the trained model from the cluster to the world: performance engineering that connects runtime efficiency to fleet capacity, inference serving at massive scale, edge intelligence across heterogeneous and federated devices, and the operational lifecycle required to manage production fleets.
- **Part IV: The Responsible Fleet** confronts the forces that determine whether the fleet serves its users or harms them: security and privacy, robust system design, environmental sustainability, and responsible engineering as constraints as fundamental as power density or bisection bandwidth.

These four parts trace a path through the **Fleet Stack**, a layered abstraction that organizes an ML system at distributed scale, from the physical facility up to its governance. The stack has eight rows grouped into four bands, and each band is one part of the book. The Infrastructure band (Part I) holds **Facility & Accelerators** and **Fabric & Storage**, the physical substrate. The Distribution band (Part II) holds **Distributed Execution** and **Reliability & Control**, which manage parallel work, communication, scheduling, and recovery. The Serving band (Part III) holds **Runtime & Serving** and **Operations**, which take models to users and manage the production lifecycle. The Governance band (Part IV) holds **Assurance** (security, privacy, and robustness) and **Governance & Sustainability**, which together turn trust, risk, policy, and environmental cost into engineering constraints. Each row provides an abstraction to the row above and consumes the row below. Engineering decisions in the Infrastructure band constrain what is possible in the bands above it, while governance requirements constrain choices throughout the stack. Privacy, acceptable risk, and environmental budgets enter the design from the beginning; Part IV develops their enforcement mechanisms after the infrastructure and operational dependencies are available.


Where the Fleet Stack locates responsibility, a second framework diagnoses cost. The C^3 taxonomy divides the wall-clock time of distributed execution into Compute, Communication, and Coordination, and the Fleet Law turns that division into an equation for distributed step time. Every chapter applies this lens to its own layer of the stack. Three recurring workloads, the archetypes, keep the analysis concrete: a large dense language model (Archetype A), a recommendation model with very large embedding tables (Archetype B), and a model trained by federated learning across phone-class devices (Archetype C). Each stresses a different part of the fleet, and the chapters return to whichever one exposes their central constraint.

Throughout the book, a margin figure highlights which rows of the stack each chapter addresses, providing a navigation cue at every chapter opening:




The full stack above shows each row with its scope, grouped into the four parts of the book. The Roman numerals (I–IV) mark those parts; the row intensity marks emphasis. The stack uses one accent color throughout so that shade, not hue, carries the chapter-focus signal.

In the margin figures throughout the book, the intensity of each row reflects how strongly the chapter engages it. Brighter (higher intensity) marks the chapter's primary focus; dimmer (lower intensity) marks contextual relevance as constraints propagate upward. Consider three chapters that illustrate how the emphasis shifts:

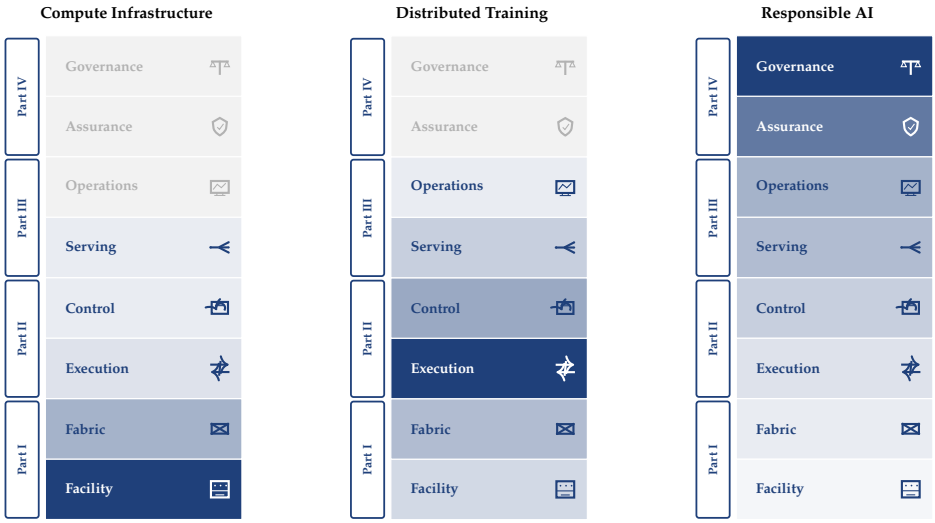

In Compute Infrastructure, the bottom row dominates because the chapter is about silicon, power, cooling, and physical deployment. In Distributed Training, **Distributed Execution** is brightest while **Reliability & Control** remains visibly relevant because large training runs depend on scheduling and recovery. In Responsible AI, **Governance & Sustainability** is primary while **Assurance** stays strong because accountability depends on measurable trust and risk controls. The same stack tells three different stories, and in each one a decision made in one row ripples through the rows above and below it.

Small visual notes sit in the margins wherever a relationship is fastest to grasp by eye. They are reading aids, not figures to cite later. At fleet scale, this visual grammar makes bandwidth gaps, failure blast radius, checkpoint ratios, and edge-energy trade-offs visible without interrupting the argument. When a miniature uses a log scale, it says so inside the image.

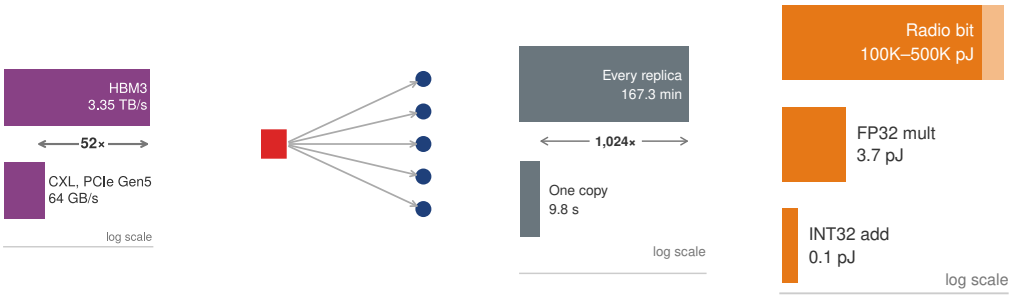

Alongside these visual miniatures, the margins carry unnumbered **marginal navigation pointers** that trace architectural dependencies across the fleet without interrupting the reading flow of the prose:

- ↩ **Backward pointer:** Directs the reader back to the earlier chapter where a physical limit, hardware contract, or analytical model was established.
- ↪ **Forward pointer:** Directs the reader ahead to the later chapter, or to the appendix, where the current idea is developed, measured, or enforced.
- ⇄ **Contrast:** Marks a place where two chapters treat the same problem differently, so the comparison is visible at a glance.

A pointer only orients. When a sentence depends on another chapter, the reference stays in the text.

Each part builds on the previous one, so sequential reading is recommended. The reading paths below offer alternatives for readers with specific goals.

Suggested Reading Paths

The chapters are ordered so that each can draw on everything before it, but not every chapter consumes the one immediately before it. Figure 0.1 draws the direct dependencies, derived from the chapters' own cross-references: an arrow means the later chapter uses a model, mechanism, or constraint that the earlier one establishes. Two features of the map guide the choice of path. First, every chapter lies on a route to chapter 33, whose six principles cite every chapter of Parts I through IV, so no chapter is a dead end. Second, several dependencies cross part boundaries: fleet orchestration builds on both chapter 8 and chapter 12, and serving builds on orchestration. Consecutive chapters without an arrow mark a change of thread rather than a gap. Chapter 17, for example, returns to the cost of a single distributed job and builds on the communication model, while chapter 24 feeds the serving chapter that follows it.

Each path below begins with the introduction, assumes the single-machine prerequisites listed later in this preface, and keeps every chapter that its destination depends on in the map:

- **The Complete Path** (all chapters, in sequence): Follows the causal chain of constraints that governs the ML fleet from first principles of distribution. After the introduction, progress through Parts I, II, III, and IV.
- **The Infrastructure Path** (physical fleet and orchestration): Focuses on Part I (chapter 11, chapter 11, chapter 13), then chapter 24. Before orchestration, use the workload partitioning in chapter 15, the collective traffic patterns in chapter 8, and the checkpoint/recovery model in chapter 12 to establish what the scheduler must place, connect, and preserve.
- **The Scaling Path** (distributed training depth): Establishes the memory-capacity, network-bandwidth, and storage-throughput models in Part I before focusing on chapter 15, chapter 8, chapter 12, and chapter 17. Readers already comfortable estimating those limits can use Part I as a reference.
- **The Production Path** (deployment and operations): Uses Part I for fleet capacity and network constraints, then establishes model partitioning in chapter 15, collective communication in chapter 8, failure and recovery in chapter 12, and placement and isolation in chapter 24.

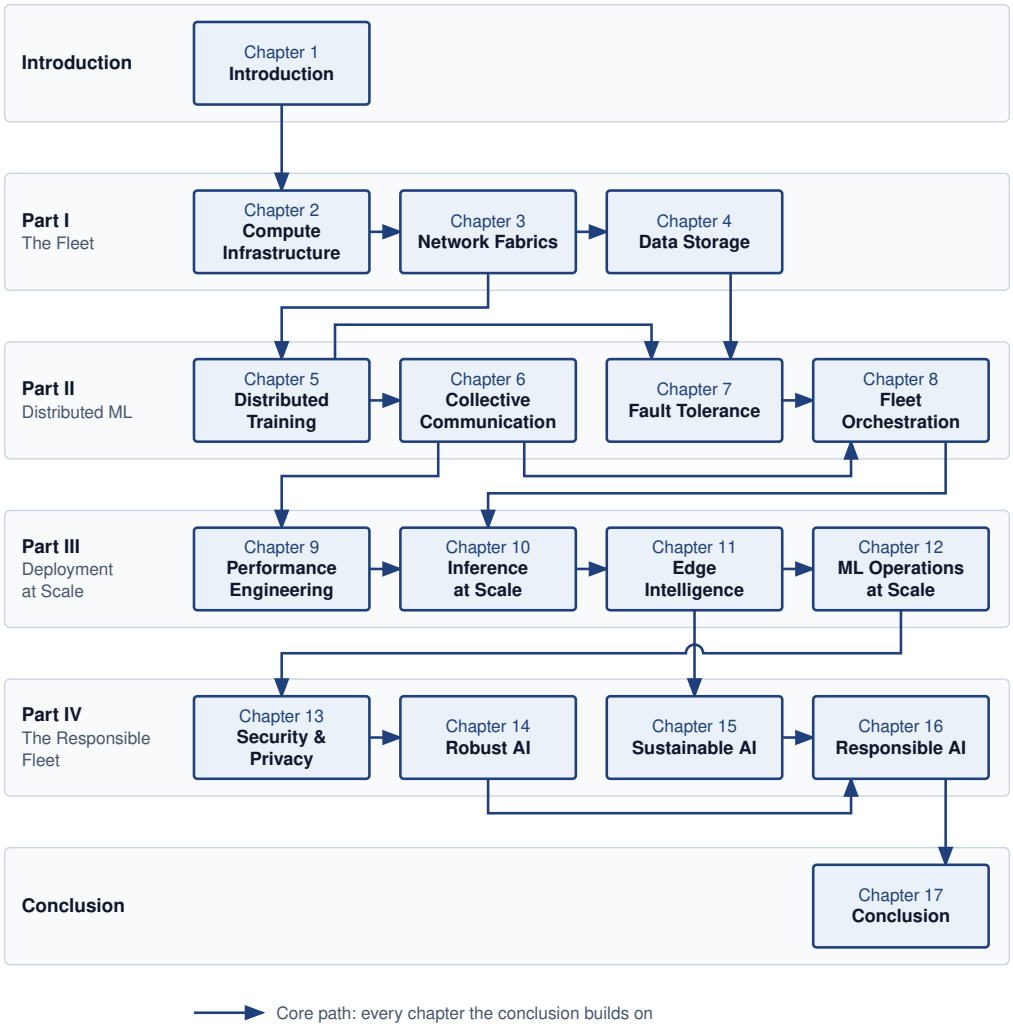


Figure 0.1: Chapter Dependency Map: Each arrow points from a chapter to a later chapter that consumes its results, derived from the book's cross-references with transitive links omitted. Every chapter lies on the core path the conclusion builds on, so the map draws no optional branch. Book order is one valid reading order; a missing arrow between consecutive chapters means the later chapter does not directly consume the earlier one's results.

Read chapter 17 before chapter 6 so runtime costs and memory behavior are available for serving analysis. Continue through chapter 16, chapter 23, and Part IV (chapter 20, chapter 26, chapter 20, and chapter 40).

Conventions

This book uses a small set of typographic conventions to mark what each piece of prose is doing.

Bold marks first definitions

A term in **bold** within body prose is its formal first introduction in the book. Each term receives this treatment exactly once. Subsequent appearances are unbolded; by then the term is part of the working vocabulary the chapter carries forward.

The **Fleet Law** decomposes the time of one distributed step into local computation, exposed communication, and synchronization.

The bold is a contract: register this term because it will recur. A matching index entry in the back of the book points to the defining occurrence (under the `definition` subentry), providing a way to return to it. Key technical terms are also compiled in the glossary.

Bold also appears in a second, structural role: as a functional label at the start of an item inside a callout box or a summary bullet, for example **Recommendation**, **Trade-off**, or **Result**. In that context, the bold is scaffolding rather than a first definition.

Italics carry specific rhetorical jobs

Italics are not used for general emphasis. Every italic span in this book performs one of a small number of specific jobs:

- **Direct opposition**: *training* vs. *inference*, *allocated* vs. *productive* accelerator time.
- **Impossibility, stated as physical, mathematical, or logical law**: "a synchronous step *cannot* finish before its slowest worker does."
- **Word used as word**: "the term *gradient* refers to a vector of partial derivatives."
- **Titles of works**: *Computer Architecture: A Quantitative Approach*.
- **Thesis punchline**: A single italicized sentence that captures the controlling insight of a section, for example, *At scale, failure is the normal operating condition*.

An italicized word is performing one of these jobs. A word that is not italicized carries no implicit emphasis.

Callouts have visual identities that match their job

Callout boxes are not decoration. Each type signals a specific kind of content, so the visual identity announces what the box contains before the reader engages with it.

Callout	Contains
Definition	Formal definition of a key term, with its significance, distinction from the nearest neighbor concept, and a common pitfall
Example	Historical case or concrete scenario, structured as context, insight, and systems lesson
Systems Perspective	Analytical observation or mathematical nuance that enriches the surrounding argument
Napkin Math	Worked calculation walked through step by step, with values computed inline from the book's constants; intermediate tables and equations are the math itself
Checkpoint	Self-check questions to verify understanding of the preceding section
War Story	Documented engineering incident with a sourced failure mode, structured as context, failure, consequence, and lesson
Lighthouse	Recurring workloads characterized by a profile (parameters, FLOPs, dominant constraint), used as anchored case studies across multiple chapters
Principle	Canonical book principle or invariant referenced from later chapters
Theorem	Formal, equation-backed result or bound, stated with its conditions and applied in later quantitative analysis
Key Takeaways	Four to seven most important results from a chapter, in summary form
Learning Objectives	Skills and concepts that readers should be able to explain or apply after completing the chapter
What's Next	Bridge from the chapter just ended to the chapter beginning, naming the open question the next chapter addresses

When a callout contains a table, figure, or equation, that artifact is part of the callout's pedagogical unit, not decoration. A lighthouse's profile *is* its characterization. A napkin math box's intermediate tables *are* the worked math. Reading these as separated artifacts loses the teaching arc. Standalone reference tables, by contrast, sit between paragraphs as numbered artifacts the reader returns to through cross-references. Both forms are valid; the visual marker (callout vs. standalone) tells the reader which one they are looking at.

Companion Resources

Whichever path readers choose, this book is part of a broader learning ecosystem. The complete text, interactive notebooks, lecture slides, exercises, hands-on labs, and supplementary materials for every chapter are available online at **mlsysbook.ai**.

This book is built in the open. Its full text, figures, and build system are public, and contributions from readers worldwide have sharpened every chapter. Visit **mlsysbook.ai/git** to report an issue, suggest an improvement, or contribute directly.

Prerequisites

Readers should bring the following background:

- **Single-machine ML systems**: Understanding of ML workflows, neural network training, model optimization, and deployment on a single machine. Readers should be comfortable reasoning about memory hierarchies, computational graphs, accelerator execution, and hardware-software interactions. Appendix 5 recaps the single-machine performance model (the iron law, arithmetic intensity, and the roofline), the memory hierarchy, training memory per parameter, and transformer compute that later chapters assume.
- **Programming**: Fluency in Python, including functions, classes, and data manipulation with NumPy. Familiarity with at least one ML framework (PyTorch, TensorFlow, or JAX).
- **Mathematics**: Comfort with linear algebra, basic calculus, and probability at the undergraduate level. Section 4 restates the probability results that the failure analysis uses, and section 4 develops the queuing results that serving analysis uses.

The following background is helpful but not required:

- **Distributed systems**: Familiarity with networking concepts (TCP/IP, bandwidth, latency), parallelism, and basic distributed computing deepens understanding of the fleet infrastructure and training chapters.
- **Cloud infrastructure**: Experience with containerization and orchestration (Docker and Kubernetes) or cluster schedulers (Slurm) provides useful operational context.
- **Production engineering**: Understanding of monitoring, observability, and site reliability practices will enrich the deployment and operations chapters.

Beyond This Book

This book covers the Machine Learning Fleet as it exists today: warehouse-scale training clusters, global serving infrastructure, heterogeneous edge deployments, and the governance challenges of operating at scale. Topics at the research frontier (including fully autonomous fleet management, next-generation interconnects, neuromorphic computing at scale, and formal verification of fleet-level safety properties) extend beyond this scope but represent active areas of investigation.

Using This Book in a Course

This book grew out of CS249r at Harvard University and the TinyML edX professional certificate program. That teaching reinforced an insight that carries to fleet scale: the same physics governs every level of the hierarchy. Bandwidth, energy, and failure set the limits on a microcontroller and on a data center alike. What changes with scale is not the physics but which limit binds, and a new binding limit is a new engineering problem. On one machine, the memory wall dominates. Across a fleet, bisection bandwidth and routine hardware failure take over, and what was once a rare exception becomes the constraint the entire system is designed around. The physics is continuous; the engineering is not.

The book is designed to support a one-semester advanced course covering the full distributed ML systems stack. Instructors may also select individual parts for shorter modules:

- **Parts I–II** (The Fleet and Distributed ML) suit an advanced half-semester on distributed training infrastructure.

- **Parts III–IV** (Deployment at Scale and The Responsible Fleet) suit an applied half-semester on production ML at scale. As figure 0.1 shows, such a module should first review chapter 8 and chapter 24, which performance engineering and serving build on.

For survey courses or executive programs, the four part introductions provide a condensed map of the constraints that govern fleet-scale ML systems. Their principle statements are previews; the chapters supply the assumptions, worked reasoning, and mechanisms needed to apply them.

Slides, assignments, and instructor materials for courses that use this book are available at **mlsysbook.ai**.

Copyright and Licensing

© Vijay Janapa Reddi and MIT Press. This work is distributed under the Creative Commons Attribution-NonCommercial-NoDerivatives 4.0 International License (CC BY-NC-ND 4.0). The source is available at **mlsysbook.ai/git**.

Acknowledgments

Origins

Earlier teaching on TinyML grew out of the realization that the constraints governing milliwatt devices are the same constraints governing data-center accelerators. This book grew out of a different realization, one that came from working on ML Fleet Efficiency as a visiting researcher at Google. Peter Mattson, who had been a collaborator on MLPerf, made that opportunity possible. What I encountered there changed how I think about ML systems: the engineering required to coordinate thousands of accelerators into a single coherent system is a discipline unto itself, and that discipline had no textbook.

That work introduced me to the ML Productivity Goodput (MPG) metric, fleet-level heterogeneity at a scale I had not seen before, and the daily reality of failure as a statistical certainty rather than an exception. The gap between what practitioners knew and what was written down was enormous. The researchers who built these systems published individual results, but the connective tissue between those results, the principles that made them cohere into a discipline, existed only in the heads of the people doing the work. This book is an attempt to document that connective tissue.

Collaborators and Colleagues

I learned most of what I know about fleet-scale systems from the ML Fleet Efficiency team at Google: Arissa Wongpanich, Tayo Oguntebi, Jose Baiocchi Paredes, Yu Emma Wang, Phitchaya Mangpo Phothilimthana, Ritwika Mitra, and Zongwei Zhou. Naveen Kumar led that effort, and the way he thought about fleet-level optimization shaped how I think about it still. Robert Hundt pushed my understanding of performance engineering at scale. Together, Naveen and Robert showed me what fleet-level efficiency looks like from the inside. David Kanter continued the MLPerf collaboration, and our discussions on benchmarking distributed systems sharpened the quantitative methodology that runs through every chapter. Greg Diamos provided invaluable perspective on scaling laws and their origins at Baidu, where some of the earliest work on large-scale distributed training took shape.

The researchers whose papers fill the bibliography of this book deserve particular acknowledgment. Practitioners and researchers who built the systems, measured the failures, and published what they learned discovered the principles taught here, rather than inventing them for this textbook. This book synthesizes their work into a coherent narrative. The debt is to them.

Support

The Harvard Data Science Initiative, Harvard Extension School, and the National Science Foundation supported this work; the Edge AI Foundation and ICTP supported educational outreach and scholarships; and our industry partners provided infrastructure and tooling that enabled practical experimentation.

At MIT Press, Susan Hartman believed in this project from the beginning and guided it from an open-source experiment to a published textbook. Her editorial judgment and support made this book real. I am equally grateful to MIT Press for agreeing to keep this book available as open access. A textbook about a discipline shaped by the open-source community should be accessible to everyone in it.

For the complete and most up-to-date list of all GitHub contributors, please visit the online version at mlsysbook.ai. For those interested in contributing, please consult our GitHub repository.

Every GitHub star is a signal that someone cares about this material, is learning from it, and believes the work matters. The online community of learners, with their questions, their curiosity, and their willingness to engage with an unfinished textbook, kept this project moving when the scope felt overwhelming.

Finally, I thank my wife and my children. I wrote this book in the hours that belonged to them: weekends that disappeared into revisions, evenings that stretched past midnight, mornings when I was present but not quite there. They never complained. They asked how the writing was going, brought me coffee, and gave me the space to finish. Whatever merit this book has, their patience and their support made it possible.

A Note on AI Assistance

Every chapter of this book was researched, written, and rewritten by me. I also used artificial intelligence tools throughout the process. What follows is more than the disclosure MIT Press requires of authors who use AI. It is an honest statement of how AI assisted in navigating fleet-scale systems engineering, and the rigorous human verification standard applied to the result.

In an era of generative AI, defining what authorship really means has become genuinely difficult. When tools can draft prose, crunch cluster arithmetic, unearth research papers, and generate visual sketches, where does the machine end and the author begin?

In developing this text, AI tools served as an accelerator across computation, literature review, and drafting. On the infrastructure side, this involved extending the MLSysIM infrastructure modeling engine from single-node execution to the fleet level: modeling 3D parallelism (tensor, pipeline, and data parallel strategies), collective communication fabrics, cluster network topologies, and fault-tolerance protocols. AI helped formulate complex cluster-level equations, write executable Python cells, and implement automated pre-commit checks.

AI proved especially valuable in digging into the vast literature of distributed systems, unearthing seminal, classical papers and historical foundations that modern AI literature often overlooks. In the writing itself, I used AI to draft initial chapter outlines, generate preliminary explanations, and synthesize dense research papers into first-pass text, which I then evaluated, restructured, and substantially rewrote to ensure conceptual rigor.

Beyond code and prose, AI fundamentally shifted how I developed the book's visual language. In previous work, sketching architectural diagrams was a slow, manual bottleneck. For this book, I used generative AI to produce initial conceptual drafts and rough schematics of cluster topologies. While these AI-generated sketches were far from publication-ready, they served as an effective conceptual boilerplate, helping clarify and communicate the architectural concepts and communication patterns for the ongoing illustration and refinement process.

Yet mechanical computation, literature synthesis, and AI-assisted drafting are only the starting point. The most critical and time-intensive phase of writing this book was human validation. To ensure that the analytical models reflect the reality of warehouse-scale computing rather than idealized abstractions, I conducted extensive one-on-one review meetings with domain experts: distributed systems researchers, ML fleet operators, and hardware architects. In these sessions, we walked through chapters, stress-tested assumptions, scrutinized performance equations, and debated design trade-offs. This human feedback loop is the longest and most demanding part of the authoring process, but it is indispensable. Without that expert review, a systems book risks teaching clean abstractions that fail on real silicon.

Writing a textbook is an act of synthesis, not a claim of personal invention. The fundamental breakthroughs in distributed systems and hardware architecture belong to the researchers and engineers cited throughout these chapters. My name appears on the cover not out of ego, but because authorship is the assumption of human responsibility. It is the demanding process of vetting these ideas against real-world hardware, and it means providing a single human being whom readers, students, and engineers can hold accountable, someone to reach out to for clarifications, debates, and corrections.

Machine learning systems cannot be certified the way deterministic logic can. That verification gap applies to AI-assisted authoring with equal force. The standard held here is the standard we must demand of every fleet we build: **the tool can propose, but only the human engineer can ratify and take responsibility.**

Notation

Machine learning at scale sits at the convergence of three disciplines: machine learning, distributed systems, and high-performance data center networking. Training and serving modern foundation models requires orchestrating workloads across thousands of accelerators interconnected by high-speed networks. Each contributing field developed its mathematical conventions independently, creating severe symbol collisions when their concepts appear in the same system equation.

To a machine learning researcher, B denotes batch size, while to a network engineer, B denotes bandwidth. In distributed systems, N represents the count of worker accelerators, whereas in statistics, N denotes sample count. In high-performance computing, P is commonly used for processor count, but in deep learning, P is universally reserved for model parameter count. Similarly, in this book's communication models, α denotes per-message network latency and β denotes link bandwidth, whereas in statistical learning, α represents a power-law scaling exponent and β represents optimizer momentum.

This book establishes a rigorous, unified mathematical notation tailored specifically to distributed machine learning systems. The conventions defined below eliminate ambiguity across scaling laws, collective communication algorithms, parallel execution schedules, and cluster reliability models.

The Governing Laws of Distributed Performance

Performance modeling in distributed machine learning follows a natural two-tier hierarchy: the single-device execution foundation, and its fleet-wide composition.

The single-device foundation (the iron law of ML systems)

Every distributed training step or inference pass is fundamentally composed of local execution on individual accelerators. For serialized execution phases on a single accelerator, the **iron law of ML Systems** decomposes execution time into memory access, arithmetic computation, and latency overhead:

$$T = \underbrace{\frac{D_{\text{vol}}}{\text{BW}}}_{\text{Memory Time}} + \underbrace{\frac{O}{R_{\text{peak}} \cdot \eta_{\text{hw}}}}_{\text{Compute Time}} + \underbrace{L_{\text{lat}}}_{\text{Latency Overhead}}$$

Each symbol was chosen deliberately to preserve machine learning conventions while maintaining architectural precision:

Symbol	Definition	Unit	Notes
T	**Execution Time**	seconds	Total serialized execution time in the iron-law performance decomposition.
BW	**Bandwidth**	bytes/s	**Avoids collision with B (Batch Size)**. Systems literature often uses B for bandwidth, while ML literature often uses B for batch size. The notation preserves the ML convention.
D_{vol}	**Data Volume**	bytes	**Avoids collision with D (Dataset Size)**. In scaling laws, D means training tokens. Here we need bytes moved through memory. The subscript disambiguates.
η_{hw}	**Efficiency**	—	Hardware utilization ($0 \leq \eta_{\text{hw}} \leq 1$). Avoids collision with learning rate (η).

Symbol	Definition	Unit	Notes
L_{lat}	**Latency**	seconds	**Avoids collision with L (Loss)**. Fixed overhead time (kernel launch, network RTT). The subscript distinguishes from the loss function.
O	**Operations**	FLOPs	Total floating-point operations. Clean in equations (vs. "Ops").
R_{peak}	**Peak Rate**	FLOP/s	**Avoids collision with P (Parameters)**. Roofline presentations often use P for performance, while ML literature commonly uses P for parameter count. The notation preserves the ML convention.
Θ	**Asymptotic Tight Bound**	Operator	Asymptotic tight bound: grows at the same rate as its argument, up to constant factors.
$D_{\text{vol}}^{(\text{batch})}$	**Batch Data Volume**	bytes	Bytes of input data one batch carries to the accelerator.
f	**Clock Frequency**	hertz	Rate at which a processor's clock ticks, setting how many switching cycles occur per second.
Δ	**Finite Change**	Operator	Finite change in the quantity it prefixes, between two states, configurations or points in time.
µ	**Micro Unit Prefix**	Operator	SI unit prefix micro, one millionth, written before a unit such as seconds.
b	**Numeric Bit Width**	Integer	Number of bits used to represent one numeric value, such as an arithmetic operand or a quantized weight or activation.
$T_{\text{pipelined}}$	**Pipelined Execution Time**	seconds	Execution time of a workload whose data movement and computation overlap, set by the slower of the two plus fixed latency.
$T_{\text{sequential}}$	**Sequential Execution Time**	seconds	Execution time when data movement, computation and fixed overhead run one after another with no overlap, the sum of the iron-law terms.
T_{IO}	**Step Io Time**	seconds	Time the input pipeline needs to read, decompress, decode and stage the data for one training step.
$\text{BW}_{\text{storage}}$	**Storage Bandwidth**	bytes/s	Sustained rate at which the storage system delivers bytes to the input pipeline.
T_{step}	**Training Step Time**	seconds	Wall-clock time of one training step, bounded below by the slower of compute and input I/O.
k	**Unit Alias Multiplier**	Dimensionless	Number of base units in one unit alias, the conversion multiplier of a unit-conventions table row.

Why these choices matter

Without careful notation, statements about distributed systems become ambiguous:

> *"Reducing D improves performance."*

In distributed machine learning, this could mean reducing the dataset size (fewer training samples), shrinking the data-parallel degree N_{DP}, or reducing the data volume D_{vol} moved across the memory bus through quantization. With our notation, we distinguish them precisely:

> *"Reducing D_{vol} through FP8 quantization cuts memory traffic across the interconnect while D (training tokens) and N_{DP} remain unchanged."*

Subscripted variants

The root symbol names the fundamental physical quantity, while an upright subscript specifies the precise domain or measurement point:

- $\text{BW}_{\text{memory}}$, $\text{BW}_{\text{network}}$, $\text{BW}_{\text{interconnect}}$: bandwidth across distinct tiers of the distributed memory and fabric hierarchy.
- D_{vol}, R_{peak}, L_{lat}, η_{hw}: single-node iron-law terms, held clear of shared ML symbols.
- E_{move}, E_{compute}, E_{total}: energy budget components across distributed compute nodes.

The subscript therefore carries part of the claim. Memory and network bandwidth differ by orders of magnitude, so a figure is reproducible only when the subscript says where it was measured.

The Fleet Law (distributed step time)

When scaling a model across a fleet of $N = N_{\text{GPU}}$ accelerators, single-device compute time is distributed across workers, while communication and synchronization overheads are introduced. Under partitioned execution of fixed work, the governing equation is the **Fleet Law** (the distributed step time law, equation 0.3):

$$T_{\text{step}}(N) = \frac{T_{\text{compute}}}{N} + T_{\text{comm}}(N) + T_{\text{sync}}(N) - T_{\text{overlap}}$$

Symbol	Definition	Unit	Notes
N, N_{GPU}	**Number of Devices**	Integer	Accelerator count in a distributed job, the core's N_{GPU} ($N = N_{\text{GPU}}$); also the rank count of a collective. *(Not parameters, use P.)*
G_{node}, N_{nodes}	**Accelerators per Node, Node Count**	Integer	Hierarchical collectives split the fleet as $N = G_{\text{node}} N_{\text{nodes}}$. *(Bare G is the LogGP gap per byte.)*
$T_{\text{step}}(N)$	**Distributed Step Time**	seconds	Wall-clock time for one training step at scale N.
T_{compute}	**Single-Device Compute Time**	seconds	The core's compute term for one training step (forward + backward pass) on one device.
$T_{\text{comm}}(N)$	**Communication Time**	seconds	Time for collective operations (AllReduce, AllGather); depends on payload, topology, and N.
T_{overlap}	**Overlapped Time**	seconds	Communication hidden behind computation. Reduces effective overhead.
$T_{\text{sync}}(N)$	**Synchronization Time**	seconds	Total nonoverlapped synchronization or coordination cost per step at scale N.
ρ	**Communication-Computation Ratio**	Dimensionless	$\rho = T_{\text{comm}}(N)/(T_{\text{compute}}/N)$. Values near or above 1 indicate communication-bound scaling.
CI	**Communication Intensity**	bytes/FLOP	Network bytes moved per local FLOP, CI $= M/O$; the fleet analogue of arithmetic intensity I.
C_2	**Communication Axis**	Set	Communication axis of the C³ taxonomy, data movement across the network fabric, viewed as the set of techniques it covers so that axis intersections name zones of the taxonomy.
C_1	**Compute Axis**	Set	Compute axis of the C³ taxonomy, local arithmetic and memory within a node, viewed as the set of techniques it covers so that axis intersections name zones of the taxonomy.
C_3	**Coordination Axis**	Set	Coordination axis of the C³ taxonomy, synchronization, failure recovery and scheduling across the fleet, viewed as the set of techniques it covers so that axis intersections name zones of the taxonomy.
C	**Operational Dimension**	Record	One of the three operational dimensions of the C-cubed taxonomy, indexed 1 to 3 as compute, communication and coordination.

Scaling laws of foundation models

Scaling laws anchor the book's account of why machine learning moved onto fleets. The single-resource power law and the dense-transformer compute rule are:

$$\mathcal{L}(X) = A_{\mathcal{L}} X^{-\alpha_{\text{scale}}} + C_{\mathcal{L}}, \qquad O_{\text{train}} \approx 6PD$$

Symbol	Definition	Unit	Notes
X	**Scaled Resource**	varies	Training compute, parameter count P, or training tokens D, depending on the fitted law.
α_{scale}	**Scaling Exponent**	Dimensionless	Fitted power-law exponent; valid only within the regime in which it was measured. *(Not network latency α.)*

Symbol	Definition	Unit	Notes
$A_{\mathcal{L}}$	**Scale Coefficient**	loss units	Task-dependent fitted constant.
$C_{\mathcal{L}}$	**Irreducible Loss**	loss units	Loss floor that added resources do not remove within the fitted regime.
O_{train}	**Training Compute**	FLOPs	About $6PD$ for a dense transformer: $2P$ per token forward and $4P$ backward.
B_{base}	**Base Batch Size**	Integer	Reference batch size at which the base learning rate was tuned.
η_{base}	**Base Learning Rate**	Dimensionless	Learning rate tuned at the reference batch size before linear scaling.
N_{epochs}	**Epoch Count**	Integer	Number of full passes a training run makes over its dataset.
B_{new}	**Scaled Batch Size**	Integer	Batch size a training recipe is scaled to under the linear scaling rule.
η_{new}	**Scaled Learning Rate**	Dimensionless	Learning rate used at a new batch size under the linear scaling rule.
$\mathcal{L}$	**Scaling Law Loss**	Function	Loss a trained model reaches as a function of the resource scaled, such as parameters, training tokens or compute, in an empirical power-law scaling law.

The distributed energy corollary

At data center scale, energy and power delivery are primary system constraints. For N devices that each move the same D_{vol} bytes and execute the same O FLOPs over a workload interval, effective per-byte data-movement costs and per-operation compute costs give the following fleet energy model. Here the work and traffic terms are per-device quantities, so multiplying by N sums the device contributions:

$$E_{\text{total}} \approx N \times \left(D_{\text{vol}} \times E_{\text{move}} + O \times E_{\text{compute}} \right)$$

Symbol	Definition	Unit	Notes
E_{move}	**Energy per Byte Moved**	joules/byte	Effective movement cost; total energy also depends on bytes moved and operations executed.
E_{compute}	**Energy per Operation**	joules/FLOP	Energy cost of a single arithmetic operation.
E_{total}	**Total Energy**	joules	Total energy consumed by an ML workload, decomposed into data-movement and compute terms.
i	**Accelerator Supply Current**	amperes	Electrical current an accelerator draws from its power supply.
P_{active}	**Active Inference Power**	watts	Average power an accelerator draws while actively running inference.
P_{avg}	**Average Power**	watts	Power drawn averaged over a stated period.
E_{transmit}	**Cloud Offload Energy**	joules	Energy a device spends transmitting an input to the cloud for remote inference.
P_{thermal}	**Coolant Heat Load**	watts	Heat per unit time that a liquid cooling loop must carry away from a rack, the load that sets its coolant mass flow.
$\dot{m}$	**Coolant Mass Flow Rate**	kg/s	Mass of coolant, liquid or air, passing through a cooling loop per second.
T	**Coolant Temperature**	kelvin	Temperature of the liquid or air coolant in a cooling loop, whose finite change is its rise from inlet to outlet.
P_{device}	**Device Power**	watts	Electrical power one device draws.
P_{dynamic}	**Dynamic Power**	watts	Power a chip draws switching its transistors, proportional to switched capacitance, supply voltage squared and clock frequency.
R	**Electrical Resistance**	ohms	Electrical resistance of a circuit or winding.

Symbol	Definition	Unit	Notes
$\dot{Q}_{\text{remove,max}}$	**Facility Heat Removal Capacity**	watts	Largest rate at which an installed facility and cooling configuration can remove heat.
P_{facility}	**Facility Power**	watts	Total electrical power a data center facility draws from the grid, its IT load plus cooling, power conversion, lighting and other overhead.
$\rho_{\text{energy,general}}$	**General Purpose Energy Productivity**	FLOP/J	Useful floating-point operations general-purpose silicon delivers per joule on a given workload.
α_{duty}	**Inference Duty Cycle**	Dimensionless	Fraction of time an accelerator actively runs inference rather than waiting in standby.
$\dot{Q}_{\text{IT}}$	**IT Heat Load**	watts	Rate at which a facility's information technology equipment (servers, accelerators, network gear) produces heat.
P_{IT}	**IT Power**	watts	Electrical power delivered to a data center's IT equipment: servers, accelerators, storage and networking.
I_{leak}	**Leakage Current**	amperes	Current that leaks through a chip's transistors when they are not switching.
P_{leakage}	**Leakage Power**	watts	Static power a chip dissipates through leakage current regardless of switching.
E_{local}	**Local Inference Energy**	joules	Energy a device spends running one inference on its own hardware.
E_{network}	**Network Energy**	joules	Energy the network fabric, its switches, links and adapters, consumes over a stated interval.
$L_{\text{parasitic}}$	**Parasitic Loop Inductance**	henries	Unintended inductance of the current loop that feeds an accelerator's core rail, which turns current slew into voltage droop.
$\rho_{\text{energy,specific}}$	**Specialized Energy Productivity**	FLOP/J	Useful floating-point operations specialized, domain-specific silicon delivers per joule on a workload suited to its design.
c_p	**Specific Heat Capacity**	J/(kg K)	Heat needed to raise one kilogram of a coolant by one kelvin at constant pressure.
P_{idle}	**Standby Power**	watts	Power a device draws in standby, when it is not running inference.
V	**Supply Voltage**	volts	Supply voltage that powers a digital circuit, the quantity dynamic voltage and frequency scaling lowers.
C	**Switched Capacitance**	farads	Capacitance of the wires and gates a circuit charges when it switches.
α	**Switching Activity Factor**	Dimensionless	Average fraction of a chip's gate capacitance that switches each clock cycle.
P_{total}	**Total Chip Power**	watts	Total power a chip dissipates, the sum of dynamic switching power and static leakage power.

Network Communication Models and Collectives

Collective communications (AllReduce, AllGather, ReduceScatter, AllToAll) transfer payloads across network fabrics structured as rings, trees, or fat-tree fabrics.

The α-β communication model

Network communication time decomposes into fixed message startup latency and bandwidth-dependent transfer:

$$T(n) = \alpha + \frac{n}{\beta}$$

The model keeps its literature's letters as aliases of core concepts: α is the per-message L_{lat} and β is a link's BW, written in α-β form. Inside α-β formulas, write α and β; elsewhere, write L_{lat} and a subscripted BW.

Symbol	Definition	Unit	Notes
$T(n)$	**Point-to-Point Transfer Time**	seconds	Wall-clock time to transmit one message of size n across one link.
n	**Point-to-Point Message Size**	bytes	Size of one message in $T(n)$.
α	**Per-Message Latency**	seconds	The core's L_{lat} for one message, in α-β form: the fixed startup cost. *(Not significance level or Rényi order, which carry subscripts.)*
β	**Link Bandwidth**	bytes/s	The core's BW for one link (BW_{link}), in α-β form: effective throughput per link.
n^*	**Crossover Point**	bytes	$n^* = \alpha \cdot \beta$. Below n^*: latency-bound. Above: bandwidth-bound.
M	**Collective Payload Size**	bytes	Per-rank gradient, model-state, activation, or compressed payload that a collective moves. Not a memory footprint (those are M_{total}, M_{weights}, and so on) and not the core's GEMM dimension M, which appears only in GEMM shape statements.
M_{coll}	**Collective Tensor Size**	bytes	Full tensor acted on by Broadcast, Reduce, or AllReduce, reconstructed by AllGather, or partitioned by ReduceScatter. An equally sharded AllGather starts with M_{coll}/N bytes per rank; AllToAll uses the per-rank payload M.
T_{ring}, T_{tree}	**Collective Completion Time**	seconds	AllReduce time under the ring or tree algorithm in α-β form, for example $T_{\text{ring}} = 2(N-1)\alpha + 2\frac{N-1}{N}\frac{M}{\beta}$. $T_{\text{allreduce}}$ names an AllReduce whose algorithm the text leaves open.
$M_{\text{crossover}}$	**Ring-Tree Crossover Payload**	bytes	Payload at which $T_{\text{ring}} = T_{\text{tree}}$; approximately $N\alpha\beta/\log_2 N$ for large N.
$T_{\text{allreduce}}$	**AllReduce Completion Time**	seconds	Time to complete one AllReduce collective over a group of devices, whatever algorithm implements it.
T_{alltoall}	**AllToAll Completion Time**	seconds	Time to complete one AllToAll collective, in which every device exchanges a distinct share of its payload with every other device.
$\text{BW}_{\text{bisect}}$	**Bisection Bandwidth**	bytes/s	Total bandwidth across the narrowest cut that divides a network's nodes into two equal halves.
i	**Local Rank Index**	Integer	Position of an accelerator within its node, its local rank, which in a rail-optimized fabric also names the rail it attaches to.
$\text{BW}_{\text{network}}$	**Network Bandwidth**	bytes/s	Sustained rate at which a network path delivers bytes between machines.
M	**Network Traffic Volume**	bytes	Bytes one worker moves across the network over a stated interval, such as one training step.
m	**Rank Count Binary Exponent**	Dimensionless	Integer exponent for which the rank count equals two raised to it, the condition algorithms such as butterfly AllReduce require.
i	**Rank Index**	Integer	Position of one rank, a device or worker, within a collective communication group, counted from zero.
BW_{link}	**Single Link Bandwidth**	bytes/s	Bandwidth of one network link in one direction, written in the core bandwidth notation outside alpha-beta formulas.
k	**Switch Radix**	Integer	Number of ports on one network switch, its radix.
N	**Topology Endpoint Count**	Integer	Number of endpoints, accelerators or hosts, that one network topology connects, the size variable of its scaling laws.

The LogGP extension

LogGP refines the α-β model by separating network transit latency, processor initiation overhead, and long-message injection gaps. The book uses descriptive subscripts for the highest-collision terms; the bare letters g and G keep their LogGP meanings inside this model only.

Symbol	Definition	Unit	Notes
$T_{\text{long}}(n)$	**LogGP Long-Message Time**	seconds	Transfer time for an n-byte long message. Reuses n from the α-β model.
L_{LogGP}	**LogP/LogGP Network Latency**	seconds	Network transit time of one message, the part of the core's L_{lat} that excludes processor overhead, so $\alpha \approx o_{\text{send}} + L_{\text{LogGP}} + o_{\text{recv}}$. The subscript avoids bare L collisions.
o_{send}	**Sender Overhead**	seconds	Processor/NIC overhead to initiate a message.
o_{recv}	**Receiver Overhead**	seconds	Processor/NIC overhead to complete a message. Symmetric LogP writes $o = o_{\text{send}} = o_{\text{recv}}$, so one message costs $2o$.
g	**Message Injection Gap**	seconds	Minimum interval between consecutive message injections. *(Gradients are bold, $\mathbf{g}$.)*
G	**Long-Message Gap per Byte**	seconds/byte	Per-byte long-message gap; distinct from β link bandwidth. *(Accelerators per node are G_{node}.)*
o	**Symmetric Message Overhead**	seconds	Processor time spent initiating or completing one message in the symmetric LogP model, where sender and receiver overheads are equal, during which the processor cannot compute.

Compression economics

Compression models compare codec overhead against the communication time saved by reducing payload size:

Symbol	Definition	Unit	Notes
T_{transfer}	**Transfer Time for Payload**	seconds	Communication time for an x-byte payload: $T(x)$ for one link, or the relevant collective time.
$T_{\text{compressed}}$	**Compressed Communication Time**	seconds	Total time after encode, transfer of M/r_{comp}, and decode.
T_{encode}	**Codec Encode Time**	seconds	Local compression overhead before transfer.
T_{decode}	**Codec Decode Time**	seconds	Local decompression overhead after transfer.
b_{block}	**Quantization Block Size**	Integer	Number of tensor elements in one block of block-wise quantization, all sharing one scale.
s	**Quantization Scale**	Varies	Real-valued step between adjacent integer levels of a uniform quantizer.
K_{top}	**Retained Gradient Element Count**	Integer	Number of largest-magnitude gradient elements top-k sparsification keeps and transmits.

Parallelism Dimensions and Scaling Efficiency

Scaling large foundation models requires combining multiple parallelism strategies across device dimensions.

Parallelism dimensions

3D parallelism partitions the training workload across three orthogonal dimensions:

$$N = N_{\text{DP}} \times N_{\text{PP}} \times N_{\text{TP}}$$

Symbol	Definition	Unit	Notes
N_{DP}	**Data-Parallel Degree**	Integer	Number of model replicas. *(Bare d stays the core's hidden dimension.)*
N_{PP}	**Pipeline-Parallel Degree**	Integer	Number of physical pipeline stages in model-depth partitioning.

Symbol	Definition	Unit	Notes
N_{TP}	**Tensor-Parallel Degree**	Integer	Degree of intra-layer partitioning (model width). *(Bare t stays time or a step index.)*
m	**Microbatch Count**	Integer	Number of microbatches used to fill and drain the pipeline.
b_{pipe}	**Pipeline Bubble Fraction**	Dimensionless	Fraction of pipeline GPU-time spent idle, $b_{\text{pipe}} = (N_{\text{PP}} - 1)/(N_{\text{PP}} - 1 + m)$; avoids bare b.
V	**Virtual Pipeline Stages per Device**	Integer	Number of interleaved virtual chunks assigned to each physical pipeline stage. *(The attention value matrix is bold, $\mathbf{V}$.)*
τ_{stale}	**Gradient Staleness**	steps	Number of parameter updates between the parameters a gradient was computed on and the parameters it updates; $\tau_{\text{stale}} = 0$ is synchronous training.
k	**Accumulation Step Count**	Integer	Number of micro-batches whose gradients are accumulated before one optimizer update.
k	**Client Index**	Integer	Position of one client among the clients of a federated round or secure aggregation.
C_{cap}	**Expert Capacity Factor**	Dimensionless	Multiplier on an expert's uniform share of token assignments that sets how many assignments it may accept per step.
N_{experts}	**Expert Count**	Integer	Number of expert subnetworks in one mixture-of-experts layer.
R	**Federated Round Count**	Integer	Number of communication rounds a federated training run performs, or needs to reach a quality target.
B_{global}	**Global Batch Size**	Integer	Number of examples one synchronous optimizer update averages over across all data-parallel workers.
$\mathbf{g}$	**Local Gradient**	Vector	Gradient vector one data-parallel worker computes from its local batch in one step, its contribution to the gradient collective.
B_{micro}	**Microbatch Size**	Integer	Number of examples in one micro-batch, the unit run through a single forward and backward pass.
N_{clients}	**Participating Client Count**	Integer	Number of clients whose updates one federated round aggregates.
k_{experts}	**Routed Expert Count**	Integer	Number of experts a mixture-of-experts router sends each token to.
p_{gate}	**Router Gate Probability**	Dimensionless	Probability a mixture-of-experts router assigns to the expert it selects for a token.

Scaling efficiency

Scaling efficiency measures realized speedup relative to ideal linear scaling:

$$\eta_{\text{scaling}} = \frac{T_1}{N \times T_N}$$

Symbol	Definition	Unit	Notes
η_{scaling}	**Scaling Efficiency**	Dimensionless	Ratio of measured speedup to ideal linear speedup. 1.0 is the ideal linear baseline, not a hard upper bound.
T_1	**Single-Device Time**	seconds	Baseline wall-clock time for the same productive work on one device.
T_N	**N-Device Time**	seconds	Wall-clock time for the same productive work on N devices; excludes operational downtime counted by η_{goodput}.
r	**Serial Fraction**	Dimensionless	Share of a fixed workload's single-device execution time that does not shrink when the work is spread across devices, the serial term of Amdahl's law.

Cluster Reliability, Fault Tolerance, and Checkpointing

At cluster scale, hardware component failures are standard operating conditions rather than rare anomalies.

Fault tolerance and reliability

Assuming independent components with exponential failure distributions, system reliability across N components is:

$$R_{\text{system}}(t) = e^{-N\lambda t}$$

The aggregate exponent uses the system-level rate $N\lambda$, where λ is the per-component failure rate under the independent, identical-component assumption. The exponent $N\lambda t$ is dimensionless, so the elapsed time t must use the same time unit as λ (hours, when λ comes from the FIT-derived rates below).

The optimal checkpoint interval balances I/O overhead against recomputation rework:

$$T^*_{\text{ckpt}} = \sqrt{2 \cdot T_{\text{write}} \cdot \text{MTBF}_{\text{system}}}$$

The formula uses the *system-wide* mean time between failures (the failure interval for the whole job), not a *component* lifetime; substituting the per-component value would overestimate T^*_{ckpt} by $\sqrt{N}$. For dimensional consistency, T_{write} and $\text{MTBF}_{\text{system}}$ must be in the same time unit. Industry-standard MTBF is reported in hours; to combine it with seconds-scale write times, multiply the hour value by 3600. The result T^*_{ckpt} then carries the time unit chosen for the inputs.

Symbol	Definition	Unit	Notes
$R_{\text{system}}(t)$	**Reliability Function**	Probability	Probability of no failure across the whole system before time t. One component has $R_{\text{single}}(t) = e^{-\lambda t}$.
λ	**Per-Component Failure Rate**	failures/hour	Per-component failure rate, written λ_{fail} wherever another rate shares the passage; the system-wide rate is $N\lambda$ under independent, identical components. The industry-standard reporting unit is FIT (failures per 10^9 device-hours): $\lambda_{\text{hour}} = \text{FIT} \times 10^{-9}$. *(Other rates carry subscripts, such as the core's arrival rate λ_{arr}.)*
$A_{\text{component}}$	**Component Availability**	Probability	Probability that one component is up at a given instant. A job that needs all N components at once has availability $(A_{\text{component}})^N$ under independent, identical components.
N	**Required Component Count**	Integer	Components (accelerators, hosts, NICs, switches) the job needs up at the same time. Not N, which counts accelerators only.
MTBF	**Mean Time Between Failures**	hours	Average time between consecutive failures of a repairable, composed system. $\text{MTBF}_{\text{system}} = 1/(N\lambda) = \text{MTTF}_{\text{component}}/N$.
$\text{MTBF}_{\text{system}}$	**System MTBF**	hours	Mean time between failures that interrupt the whole job, equal to the per-component MTTF divided by N under independent, identical components. It is the input to the Young-Daly interval. Same time unit as T_{write} when combined with it.
MTTF	**Mean Time To Failure**	hours	Per-component lifetime constant derived from FIT rates, $\text{MTTF}_{\text{component}} = 1/\lambda$. Distinct from system-level MTBF when repair/replacement cycles are modeled.
MTTR	**Mean Time To Repair**	hours	Average recovery time after a failure.
T_{ckpt}	**Checkpoint Interval**	seconds	Useful compute time between consecutive checkpoints.
T^*_{ckpt}	**Optimal Checkpoint Interval**	seconds	The T_{ckpt} that minimizes total wasted time; Young-Daly formula.
T_{write}	**Checkpoint Write Time**	seconds	Time to persist model state to storage.
T_{load}	**Checkpoint Load Time**	seconds	Time to read the latest checkpoint state from storage back into accelerator memory during recovery.
$\text{MTTF}_{\text{component}}$	**Component Mean Time to Failure**	hours	Mean time to failure of one component, the reciprocal of its constant failure rate.
R_{single}	**Component Reliability**	Dimensionless	Probability that one component of a system runs without failure up to a given time, its survival function.

Symbol	Definition	Unit	Notes
d	**Erasure Data Fragment Count**	Integer	Number of data fragments an erasure code splits an object into, any that many of the stored fragments recovering the original.
m	**Erasure Parity Fragment Count**	Integer	Number of parity fragments an erasure code adds to the data fragments of an object.
T_{detect}	**Failure Detection Time**	seconds	Time from a hardware or process fault until the system classifies it as a failure.
T_{recovery}	**Failure Recovery Time**	seconds	Time from a failure until useful training work resumes: detection, restart, checkpoint load and warmup.
MTTF_{GPU}	**GPU Mean Time to Failure**	hours	Mean time to failure of one GPU, its average operating time before it fails.
A_{all}	**Job Availability**	Dimensionless	Probability that every component a job needs is up at the same instant.
T_{restart}	**Job Restart Time**	seconds	Time for the scheduler to allocate resources and launch replacement processes after a failure.
T_{replay}	**Lost Work Replay Time**	seconds	Time to recompute the training steps lost since the last checkpoint after a restart.
k	**Redundant Replica Count**	Integer	Number of independent replicas of a service in a redundancy availability calculation, any one of which can serve the load.
A_{system}	**Redundant Service Availability**	Dimensionless	Probability that at least one of a service's independent replicas is up at a randomly chosen instant.
A_{single}	**Replica Availability**	Dimensionless	Probability that one serving replica is up at a randomly chosen instant.
n_{psu}	**Series Power Supply Count**	Integer	Number of power supply units in one node whose failure alone stops the node.
A	**Steady State Availability**	Dimensionless	Probability that a component, replica or repairable system is up at a randomly chosen instant, its long-run fraction of up time.

Fleet capacity factors and goodput

Fleet capacity metrics compound model arithmetic efficiency, scaling efficiency, and operational goodput:

Symbol	Definition	Unit	Notes
f_{compute}	**Useful Compute-Time Fraction**	Dimensionless	$(T_{\text{compute}}/N)/T_{\text{step}}(N)$. Measures how much step time is useful local arithmetic after distribution.
f_{overhead}	**Operational Overhead Fraction**	Dimensionless	Fraction of allocated wall time lost outside the productive steps measured by T_N, such as checkpoint pauses, failure recovery, scheduler preemption, or maintenance.
η_{goodput}	**Goodput Ratio**	Dimensionless	Fraction of allocated wall time remaining after the out-of-step losses in f_{overhead}; often $\eta_{\text{goodput}} = 1 - f_{\text{overhead}}$.
R_{eff}	**Effective Fleet Throughput**	FLOP/s	$R_{\text{eff}} = (NR_{\text{peak}}) \times \text{MFU} \times \eta_{\text{scaling}} \times \eta_{\text{goodput}}$, where MFU is the single-device baseline, η_{scaling} captures all in-step scaling loss, and η_{goodput} captures only out-of-step operational loss excluded from T_N.
O_{useful}	**Useful Model FLOPs**	FLOPs	Model FLOPs that advance training, excluding recomputation and padding; $\text{MFU} = O_{\text{useful}}/(NR_{\text{peak}}T_{\text{step}})$ measures fleet MFU and already includes in-step scaling loss. The throughput factorization uses single-device baseline MFU instead.
η_{program}, η_{runtime}, $\eta_{\text{scheduling}}$	**ML Productivity Goodput Factors**	Dimensionless	Program, runtime, and scheduling goodput, with $\text{MPG} = \eta_{\text{scheduling}} \times \eta_{\text{runtime}} \times \eta_{\text{program}}$. A complementary lifecycle decomposition, not a factorization of R_{eff}.

Symbol	Definition	Unit	Notes
ρ_{energy}	**Fleet Energy Productivity**	FLOP/J	Useful computation per unit energy, O_{useful} divided by the energy drawn inside the stated boundary.
C_{train}, C_{infer}	**Dollar Cost**	dollars	The subscript names the cost component. Carbon quantities use $\text{CO}_{2,\ldots}$, never C.
T_{wall}	**Allocated Wall Time**	seconds	Total wall-clock time for which a training job holds its allocated resources, productive or not.
T_{job}	**Job Duration**	seconds	Wall-clock time one job or run spends executing, from start to finish.
T_{useful}	**Useful Training Time**	seconds	Wall-clock time a training job spends on committed, productive steps that contribute to the final model.

Distributed Memory Hierarchy and Serving at Scale

Managing distributed memory requires partitioning weights, activations, optimizer states, and KV-cache tensors across nodes and tiers.

Distributed memory and serving metrics

Reusable performance and serving quantities follow the same collision-avoidance rule as the iron law. Rates use R or descriptive Greek symbols; request counts use Q_{req} rather than overloading N; queue utilization uses a subscripted ρ so bare ρ remains available for other ratio models.

Symbol	Definition	Unit	Notes
$M_{\text{activations}}$	**Activation Memory**	bytes	Retained activations for the backward pass or serving intermediates.
λ_{arr}	**Arrival Rate**	requests/s	Request arrival rate. The subscript keeps bare λ free for fitted sensitivities.
R_{attain}	**Attainable Compute Rate**	FLOP/s	Roofline bound: $R_{\text{attain}} \leq \min(R_{\text{peak}}, I \times \text{BW})$. Uses R, not T, because this quantity is a rate.
$T_{\text{svc}}(B)$	**Batch Service Time**	seconds	Time to serve a batch of size B.
r_{comp}	**Compression Ratio**	Dimensionless	Uncompressed size divided by compressed size. A compressed payload has $1/r_{\text{comp}}$ of the uncompressed size; the subscript avoids bare C collisions.
$\mu_{\text{eff}}(B)$	**Effective Service Rate**	requests/s	Batched service rate, typically $\mu_{\text{eff}}(B) = B/T_{\text{svc}}(B)$. The unbatched service rate is $\mu = \mu_{\text{eff}}(1)$.
s_{elem}	**Element Storage Size**	bytes/element	Bytes per stored tensor element.
$M_{\text{gradients}}$	**Gradient Memory**	bytes	Memory occupied by stored gradients.
MFU	**Model FLOPs Utilization**	Dimensionless	Useful model FLOP/s divided by available peak FLOP/s. Text acronym avoids overloading η.
$M_{\text{optimizer}}$	**Optimizer-State Memory**	bytes	Momentum, variance, master weights, and related optimizer buffers.
R	**Replica Count**	Integer	Serving replicas among which a router chooses (for example, probing two of R and sending to the less loaded). Distinct from N, the devices in one job.
Q_{req}	**Request Concurrency**	requests	Average in-flight requests in a stable serving system ($Q_{\text{req}} = \lambda_{\text{arr}} \cdot T_{\text{lat}}$ via Little's Law). Avoids overloading N, which counts devices, elements, or samples elsewhere.
T_{lat}	**Request Time in System**	seconds	End-to-end queueing/serving latency for Little's Law. Distinct from L_{lat}, the fixed-latency term in the iron law.
I	**Arithmetic Intensity**	FLOP/byte	Workload FLOPs per byte moved. The roofline model uses I as the independent variable.
I_{ridge}	**Roofline Ridge Point**	FLOP/byte	$I_{\text{ridge}} = R_{\text{peak}}/\text{BW}$. Prefer this explicit form over starred shorthand so the meaning remains clear in prose.
ρ_{serv}	**Serving Utilization**	Dimensionless	Queue/server utilization. The subscript keeps bare ρ free for other ratio models.
M_{total}	**Total Memory Footprint**	bytes	Sum of explicit memory components; avoids bare M ambiguity; the core's quantity.
M_{weights}	**Weight Memory**	bytes	Memory occupied by model weights ($P \times$ bytes-per-parameter); the core's quantity.

Symbol	Definition	Unit	Notes
$\mathbf{BW_{mem}}$	**Sustained Memory Bandwidth**	bytes/s	Empirically achievable memory bandwidth under target access patterns.
$R_{\text{consumption}}$	**Accelerator Data Consumption Rate**	bytes/s	Rate at which one accelerator consumes training input data while computing at full speed.
λ_{batch}	**Batch Arrival Rate**	batches/s	Rate at which batches arrive at a server when each batch is treated as one super-request, the request arrival rate divided by the batch size.
k	**Batch Fill Arrival Count**	Integer	Number of arrivals after a batch's triggering request needed to fill the batch, one less than the maximum batch size.
T_{fixed}	**Batch Fixed Overhead Time**	seconds	Part of a batch's service time paid once per batch whatever its size, such as weight loading and kernel launch.
$L_{\text{lat,form}}$	**Batch Formation Delay**	seconds	Time a request waits for its batch to fill before the batch is dispatched.
k	**Batch Index**	Integer	Position of one batch in the sequence of batches a data loader or runtime delivers.
T_{window}	**Batching Window**	seconds	Length of the batching window, the longest a dynamic batcher holds requests before dispatching a batch.
Q_{day}	**Daily Query Volume**	queries/day	Number of queries, requests or transactions a deployed model serves per day.
I_{decode}	**Decode Arithmetic Intensity**	FLOP/byte	Arithmetic intensity of the weight-dominated part of an LLM decode step, operations per byte of weights and activations moved, as a function of batch size.
M_{device}	**Device Memory Capacity**	bytes	Total memory a device provides for a model's weights and activations.
α_{acc}	**Draft Token Acceptance Probability**	Dimensionless	Probability that the target model accepts one drafted token in speculative decoding, taken as independent across draft positions.
$L_{\text{lat,total}}$	**End-to-End Request Latency**	seconds	Time from a request leaving the client to its response returning, summed over every stage on the request path.
B	**Error Budget Consumption**	Dimensionless	Share of one reliability target's error budget a service has used: the fraction of eligible observations that violate the target divided by the violating fraction the target allows.
$L_{\text{lat,infer}}$	**Inference Latency**	seconds	Time the model takes to compute a request's output.
$L_{\text{lat,SLO}}$	**Latency Service-Level Objective**	seconds	Latency target a serving system's service-level objective sets for a request.
t_{req}	**Marginal Request Service Time**	seconds	Additional batch service time that one more request in the batch adds.
B_{max}	**Max Batch Size**	Integer	Largest batch a dynamic batcher forms, the size at which it dispatches without waiting for the window to close.
B_{min}	**Minimum Stable Batch Size**	Integer	Batch size at which a batched server's effective service rate equals the arrival rate, the boundary that stable batch sizes must exceed.
$L_{\text{lat,network}}$	**Network Latency**	seconds	Time a request and its response spend crossing the network, including propagation, routing and protocol handling.
N_{prefetch}	**Prefetch Buffer Count**	Integer	Number of buffers holding batches loaded ahead of use.
c	**Queue Server Count**	Integer	Number of identical servers in a multi-server queue with random arrivals and service.
K	**Queue System Capacity**	Integer	Largest number of requests a queueing system can hold at once, waiting plus in service, beyond which arrivals are rejected.
W_q	**Queue Wait Time**	seconds	Mean time a request waits in a queue before its service begins, excluding service time.
$L_{\text{lat,queue}}$	**Queueing Latency**	seconds	Time a request waits in queues before it is served.
n	**Realized Arrival Count**	Integer	One possible value of the number of requests that arrive after the trigger in a batching window, used as a summation variable.
i	**Reliability Target Index**	Integer	Position of one reliability target, such as availability, latency, freshness, or model quality, among the targets an evaluation contract budgets.
t	**Request Response Time**	seconds	Time one request spends in a serving system, the random variable whose distribution gives tail latency.
σ_t	**Response Time Standard Deviation**	seconds	Standard deviation of the time a request spends in a serving system.

Symbol	Definition	Unit	Notes
μ	**Service Rate**	items/s	Rate at which one server, such as a worker, consumer, or model endpoint, completes items or calls.
K	**Speculative Draft Length**	Integer	Number of tokens a draft model proposes for the target model to verify in one speculative-decoding round.
τ	**Subsequent Arrival Time**	seconds	Time from the request that opened a batching window until a later arrival, indexed by arrival order.
$T_{\text{lat,p99}}$	**Tail Request Latency (99th Percentile)**	seconds	99th-percentile time a request spends in a serving system.
ρ_{target}	**Target Serving Utilization**	Dimensionless	Serving utilization a system is sized not to exceed, chosen below one to keep latency headroom.
B_{util}	**Target Utilization Batch Size**	Integer	Smallest batch size whose serving utilization stays at or below the target utilization, under the linear batch service model.
Q_{arr}	**Triggered Window Arrival Count**	Integer	Number of requests that arrive after the request that opened a batching window and before the window closes.

Serving memory and data storage

At scale, serving is bounded by the memory its key-value cache occupies, and the data behind training is bounded by what it costs to keep. These symbols size both.

Symbol	Definition	Unit	Notes
M_{KV}	**KV-Cache Memory**	bytes	Total key-value cache footprint for autoregressive serving, $M_{\text{KV}} = B \cdot S \cdot m_{\text{token}}$.
m_{token}	**KV-Cache Bytes per Token**	bytes/token	$m_{\text{token}} = 2N_L H_{\text{KV}} d_{\text{head}} s_{\text{elem}}$ (keys and values across all layers).
C_{store}	**Data Storage Cost**	dollars	Cost of keeping a training dataset in storage over its retention period.
N_{entities}	**Entity Count**	Integer	Number of entities, such as users or items, a recommendation table or feature store holds rows for.
T_{months}	**Storage Retention Time**	months	Length of time a dataset is kept in storage.
$D_{\text{vol,store}}$	**Stored Data Volume**	bytes	Bytes a retained dataset occupies in storage.
C_{total}	**Total Data Cost**	dollars	Total cost of a training dataset over its lifecycle: acquisition, labeling, storage and processing.

Deep Learning Foundations in Distributed Contexts

Distributed algorithms partition neural architectures defined by standard deep learning conventions (Goodfellow et al. 2016):

Symbol	Definition	Unit	Notes
d	**Hidden Dimension**	Integer	Size of the hidden state vector. *(Parallelism degrees carry subscripts, such as N_{DP}.)*
d_{head}	**Attention Head Dimension**	Integer	Per-head hidden dimension in attention layers.
d_{in}	**Layer Input Width**	Integer	Number of input features in a layer.
d_{out}	**Layer Output Width**	Integer	Number of output features in a layer.
θ	**Model Parameters**	Vector	Trainable model weight and bias parameter vector θ.
π_θ	**Policy**	Function	Target neural network policy $\pi_\theta(a \mid s)$.
S	**Sequence Length**	Integer	Input context or sequence length S in tokens.
ℓ	**Layer Index**	Integer	Index for a layer. Use instead of bare L when indexing layers, since L collides with loss and latency. A numeric subscript marks a norm instead (ℓ_1, ℓ_2).
$\mathcal{L}$	**Loss Function**	Scalar	The objective function minimized during training.

Symbol	Definition	Unit	Notes
$N_{\text{heads}}, H_{\text{KV}}$	**Number of Attention Heads**	Integer	Number of attention heads in a multi-head attention layer, and key-value heads H_{KV} (in GQA/MQA).
N_L	**Number of Layers**	Integer	Total number of layers in a network.
$p(x)$	**Distribution**	Probability mass/density	Use lowercase $p(\cdot)$ for generic distributions to avoid collision with P (parameter count).
$p(y \mid x)$	**Conditional Distribution**	Conditional probability/density	Use this form for generic label relationships.
$\Pr(\cdot)$	**Event Probability**	Probability	Probability of an event E, as in $\Pr(\text{batch} = 0)$; use $p(x)$ and $p(y \mid x)$ for distributions.
m	**Adam First Moment**	Varies	Per-parameter exponential moving average of gradients that Adam keeps, its first moment.
v	**Adam Second Moment**	Varies	Per-parameter exponential moving average of squared gradients that Adam keeps, its second moment.
$\mathbf{A}$	**Adapter Down Projection Matrix**	Matrix	First low-rank adapter matrix, which projects a layer's input down to the adapter rank, the LoRA down-projection.
r	**Adapter Rank**	Integer	Rank of a low-rank adapter update, equivalently the bottleneck width of a residual adapter, which sets its trainable parameter count.
$\mathbf{B}$	**Adapter Up Projection Matrix**	Matrix	Second low-rank adapter matrix, which projects the rank-sized intermediate up to the layer's output width, the LoRA up-projection.
$\mathbf{K}$	**Attention Key Matrix**	Matrix	Matrix of key vectors, one row per token, in an attention layer.
$\mathbf{Q}$	**Attention Query Matrix**	Matrix	Matrix of query vectors, one row per token, in an attention layer.
S_{ij}	**Attention Score Entry**	Dimensionless	Attention score of query i against key j, one entry of the score matrix.
$\mathbf{S}$	**Attention Score Matrix**	Matrix	Matrix of attention scores, the scaled dot products of every query with every key before the softmax.
$\mathbf{S}_{ij}$	**Attention Score Tile**	Matrix	Block of attention scores between query tile i and key tile j, computed on chip in tiled attention.
$\mathbf{V}$	**Attention Values Matrix**	Matrix	Matrix of value vectors, one row per token, that attention weights combine into the output.
$\mathbf{b}$	**Bias Vector**	Vector	Vector of learned biases one layer adds to its weighted sums, one per neuron or output channel.
K	**Class Count**	Integer	Number of classes a classifier distinguishes, or vocabulary entries it scores, the length of its softmax output.
j	**Class Index**	Integer	Index of an output class.
$\mathbf{z}$	**Encoder Latent Representation**	Vector	Intermediate representation a shared encoder computes from an input, consumed by the heads that sit on top of it.
i	**Example Index**	Integer	Index of an example within a batch.
$\mathbf{z}$	**Factored Intermediate Activation**	Vector	Intermediate activation vector produced by the first factor of a low-rank layer and consumed by the second.
$\mathbf{X}$	**Fusion Input Tensor**	Matrix	Input tensor of a chain of elementwise operators that kernel fusion combines.
$\mathbf{Y}$	**Fusion Output Tensor**	Matrix	Output tensor of a chain of elementwise operators that kernel fusion combines.
$\mathcal{N}$	**Gaussian Distribution**	Distribution	Gaussian (normal) distribution with the mean and covariance given as its arguments.
$\mathbf{A}$	**GEMM Left Operand**	Matrix	Left input matrix of a general matrix multiply, whose rows match the output and whose columns match the right operand's rows.

Symbol	Definition	Unit	Notes
C	**GEMM Output Matrix**	Matrix	Output matrix of a general matrix multiply, with the left operand's row count and the right operand's column count, which the operation updates in place.
B	**GEMM Right Operand**	Matrix	Right input matrix of a general matrix multiply, whose rows match the left operand's columns.
M	**GEMM Row Dimension**	Integer	Number of rows of the left operand and of the output in a matrix multiply.
h	**Hidden Activation**	Vector	Activation vector a hidden layer outputs and passes to the next layer.
h	**Hidden Unit Output**	Dimensionless	Output of one hidden unit of a small network.
I	**Identity Matrix**	Matrix	Square matrix with ones on the diagonal and zeros elsewhere.
k	**Key Vector**	Vector	Key vector of one token, one row of the key matrix.
j	**Key-Value Tile Index**	Integer	Index of one key-value tile in tiled attention.
i	**Label Category Index**	Integer	Position of one label category among a classifier's output classes.
ℓ	**Layer Index**	Integer	Position of one layer within a network, counted from the input.
X	**Layer Input Matrix**	Matrix	Input to a layer in matrix form, one row per example or token, or a single-channel image.
x	**Layer Input Vector**	Vector	Vector of activations one layer receives as input.
Y	**Layer Output Matrix**	Matrix	Output matrix of a layer's matrix multiplication of the input matrix by the weight matrix, one row per example.
y	**Layer Output Vector**	Vector	Vector of activations one layer produces.
g	**Gradient**	Varies	Gradient of the training loss with respect to one model parameter, as an optimizer update uses it.
H	**Loss Hessian**	Matrix	Matrix of second derivatives of the loss with respect to every pair of model parameters.
U	**Low Rank Left Factor**	Matrix	Tall factor of a low-rank weight factorization, with one row per weight-matrix row and one column per retained rank.
V	**Low Rank Right Factor**	Matrix	Second factor of a low-rank weight factorization, with one row per weight-matrix column and one column per retained rank.
D	**Multiply-Accumulate Destination**	Matrix	Destination matrix of a matrix multiply-accumulate instruction, which receives the product plus the accumulator input.
i	**Matrix Row Index**	Integer	Position of a row within a matrix.
f	**Model Predictor**	Function	Trained model viewed as a function that maps an input to its prediction.
s	**Model Score**	Dimensionless	Score a classifier assigns to one individual, read as the predicted probability of the positive outcome.
w	**Model Weight**	Dimensionless	Value of one learnable weight of a model, such as the weight on one input of a neuron.
y	**Network Output**	Dimensionless	Scalar output of a neuron or of a small network.
θ^*	**Optimal Model Parameters**	Vector	Model parameters that minimize the training loss for a given architecture.
t	**Optimizer Step Index**	Integer	Position of one optimizer update in the sequence of training steps.
p	**Predicted Class Probability**	Dimensionless	Probability a classifier assigns to one label category for a given input.
$\hat{\mathbf{y}}$	**Predicted Output**	Vector	Model output for one example, such as its vector of class probabilities.

Symbol	Definition	Unit	Notes
q_{im}	**Query Component**	Dimensionless	One component of one token's query vector.
$\mathbf{q}$	**Query Vector**	Vector	Query vector of one token, one row of the query matrix.
x	**Raw Pipeline Input**	Record	Raw input record before feature transformation, as received by the training or serving pipeline.
f_{serve}	**Serving Transform**	Function	Transformation the serving pipeline applies to a raw input to produce model features.
m	**Softmax Row Maximum**	Dimensionless	Largest score in a softmax row or block, subtracted before exponentiation to prevent overflow.
N	**Square GEMM Dimension**	Integer	Side length of the square matrices in a matrix multiply, the shared row, column and inner dimension.
Φ	**Standard Normal Cumulative Distribution**	Function	Cumulative distribution function of the standard normal distribution.
k	**Top Class Count**	Integer	Number of highest-scoring classes a top-k prediction returns or checks for the correct label.
f_{train}	**Training Transform**	Function	Transformation the training pipeline applies to a raw input to produce model features.
$\mathbf{W}$	**Weight Matrix**	Matrix	Matrix of learned weights one layer multiplies its input by, or the kernel tensor of a convolution layer.
n	**Weight Matrix Column Count**	Integer	Number of columns of a layer's weight matrix.
m	**Weight Matrix Row Count**	Integer	Number of rows of a layer's weight matrix.
λ_{reg}	**Weight Penalty Strength**	Dimensionless	Coefficient that scales an absolute-value or squared penalty on weight magnitude added to the training loss, equivalent to weight decay under plain gradient descent.
$\mathbf{0}$	**Zero Vector**	Vector	Vector whose entries are all zero, such as the mean of zero-centered Gaussian noise.

Latin matrices and vectors are set in bold ($\mathbf{W}$, $\mathbf{x}$); scalars, dimensions, indices, and individual matrix entries stay italic (N, d, i, W_{ij}). The generic parameter symbol θ is the conventional exception and stays italic. Matrix operands in general matrix multiply (GEMM) are bold ($\mathbf{C} = \alpha\mathbf{AB} + \beta\mathbf{C}$), distinct from the scalar batch size B. GEMM dimensions are M, N, and K. Asymptotic complexity is written $\mathcal{O}(\cdot)$, distinct from total operations O.

Privacy, Robustness, Governance, and Distributed Constants

Federated systems, distributed coordination, and cluster operations rely on standardized metrics:

Privacy, robustness, and statistical testing

Part IV uses the standard symbols of differential privacy and adversarial robustness, and the operations and robustness chapters use those of hypothesis testing. The same Greek letters appear in several of these fields, so every use other than the one named below carries a subscript.

Symbol	Definition	Unit	Notes
(ϵ, δ)	**Differential Privacy Budget**	Dimensionless	ϵ bounds the privacy loss from adding or removing one protected record; δ is the allowed failure probability.
ϵ_{adv}	**Adversarial Perturbation Budget**	input units	Radius of the allowed input perturbation under a stated norm. *(Not the privacy budget ϵ.)*
K_{PGD}	**Attack Steps**	Integer	Inner iterations of a projected gradient descent (PGD) attack; adversarial training costs about $K_{\text{PGD}} + 1$ passes per batch.

Symbol	Definition	Unit	Notes
α_{sig}, β_{stat}	**Type I and Type II Error Rates**	Probability	Significance level and miss rate of a hypothesis test; statistical power is $1-\beta_{\text{stat}}$.
$\mathbb{E}[\cdot]$	**Expectation**	—	Expected value. Blackboard bold keeps it distinct from an event E and the energy terms such as E_{total}.
x_{adv}	**Adversarial Example**	Record	Adversarial example, an input an attacker forms by adding a bounded perturbation to a clean input so the model mispredicts.
δ_{adv}	**Adversarial Perturbation**	Vector	Perturbation an adversary adds to an input to change a model's prediction.
k_{anon}	**Anonymity Set Size**	Integer	Smallest number of records that share every quasi-identifier value in an anonymized release.
n_{feat}	**Attribution Feature Count**	Integer	Number of input features a feature-attribution method assigns contributions to.
γ_{cls}	**Classification Threshold**	Dimensionless	Score threshold above which a classifier outputs the positive class.
$z_{\alpha/2}$	**Confidence Critical Quantile**	Dimensionless	Positive standard-Normal critical value for a two-sided test at the chosen confidence level.
ϵ	**Conformal Miscoverage Rate**	Dimensionless	Allowed probability that the conformal prediction set misses the true referent.
$\mathcal{C}$	**Conformal Prediction Set**	Set	Calibrated set of referent candidates that cannot be excluded at the miscoverage rate.
A	**Current Bin Proportion**	Dimensionless	Proportion of current production observations falling in one bin of the population stability index.
P_t	**Current Distribution**	Distribution	Data distribution a deployed model sees in service at time t.
n	**Drift Test Sample Size**	Integer	Number of observations in one of the two samples a two-sample drift test compares.
g	**Environment Response Function**	Function	Response of the environment to a deployed model, mapping the current data distribution and the model's decisions to the next data distribution.
ϵ_{fair}	**Fairness Gap Tolerance**	Dimensionless	Largest allowed gap between protected groups in the fairness metric a release gate or monitor enforces.
t	**Feature Record Time**	seconds	Time at which a feature record became available, which a point-in-time join requires to be no later than the observation timestamp.
a	**First Compared Group Label**	Record	First of two group labels compared in a group-fairness condition, one value of the protected group attribute.
$\mathcal{D}_{\text{JS}}$	**Jensen Shannon Divergence**	Function	Jensen-Shannon divergence between two probability distributions, a symmetric bounded measure of how far they differ.
$\bar{P}$	**Jensen Shannon Mixture Distribution**	Distribution	Equal-weight average of the current and training distributions, the reference against which Jensen-Shannon divergence measures each.
$\mathcal{D}_{\text{KL}}$	**KL Divergence**	Function	Kullback-Leibler divergence, the expected extra code length from encoding one distribution with a code built for another.
$\mathcal{D}_{\text{KS}}$	**Kolmogorov Smirnov Statistic**	Dimensionless	Two-sample Kolmogorov-Smirnov statistic, the largest absolute difference between two empirical cumulative distribution functions.
χ^2	**McNemar Test Statistic**	Dimensionless	McNemar test statistic, the squared difference of the two discordant counts divided by their sum.
$\mathcal{S}$	**Mechanism Output Set**	Set	Set of possible outputs of a randomized mechanism over which a differential privacy bound must hold.
δ_{MDE}	**Minimum Detectable Effect**	Dimensionless	Smallest absolute difference in the outcome metric that an A/B test is designed to detect.
x_{feat}	**Monitored Feature Level**	Varies	One value of a monitored feature, the argument at which its distribution or empirical cumulative distribution function is evaluated.
I	**Mutual Information**	Function	Mutual information between two random variables, how much observing one reduces uncertainty about the other.

Symbol	Definition	Unit	Notes
X	**Neighboring Dataset**	Record	Dataset input to a randomized mechanism in the differential privacy definition, compared against a copy that differs in one record.
O	**Observable Model Output**	Record	Model output an adversary can observe, such as a prediction, score or generated text.
$p_{\mathbf{val}}$	**Observed Significance Level**	Dimensionless	P-value of a hypothesis test, the probability under the null hypothesis of a result at least as extreme as the one observed.
$\mathbf{s}$	**Pairwise Mask Secret**	Vector	Shared random mask vector two clients derive from a common secret, which one adds and the other subtracts so that it cancels in the secure-aggregation sum.
$n_{\mathbf{bins}}$	**Population Stability Bin Count**	Integer	Number of fixed bins over which the population stability index sums.
z_β	**Power Critical Quantile**	Dimensionless	Positive standard-Normal critical value corresponding to the chosen statistical power of a test.
$\hat{Y}$	**Predicted Decision**	Dimensionless	Binary decision a classifier outputs for a randomly drawn individual, one for a positive prediction.
σ	**Privacy Noise Multiplier**	Dimensionless	Ratio of the Gaussian noise standard deviation to the gradient clipping norm in differentially private training.
z	**Proportion Test Statistic**	Dimensionless	Test statistic of a two-proportion z-test, the difference of two sample proportions divided by its pooled standard error.
G	**Protected Group Membership**	Record	Protected group a randomly drawn individual belongs to, as a random variable over group labels.
R	**Protected Training Record**	Record	Training record of one protected individual, the unit whose leakage a privacy claim bounds.
$\mathcal{M}$	**Randomized Mechanism**	Function	Randomized algorithm that maps a dataset to a released output, the object a differential privacy guarantee constrains.
b	**Reference Bin Index**	Integer	Position of one reference bin among the bins a continuous feature is discretized into for the population stability index.
E	**Reference Bin Proportion**	Dimensionless	Proportion of reference (training-time) observations falling in one bin of the population stability index.
$\alpha_{\mathbf{R}}$	**Renyi Order**	Dimensionless	Order of the Renyi divergence at which a Renyi differential privacy guarantee is stated, a number greater than one.
n	**Required Users Per Variant**	Integer	Number of users each variant of an A/B test needs to detect the minimum detectable effect at the chosen confidence and power.
b	**Second Compared Group Label**	Record	Second of two group labels compared in a group-fairness condition, one value of the protected group attribute.
H	**Statistical Hypothesis**	Record	A statistical hypothesis about a population, such as the null hypothesis or the alternative hypothesis.
g	**Subgroup Index**	Integer	Label of one population subgroup whose outcomes are compared against a reference group.
P_0	**Training Distribution**	Distribution	Data distribution the model was trained on, the baseline that drift is measured against.
Y	**True Outcome**	Dimensionless	True binary outcome of a randomly drawn individual, such as whether an applicant repays, one for the positive class.
v	**True Outcome Level**	Integer	One value of a binary true outcome, zero or one, on which a fairness condition is evaluated.

Distributed governance, reliability, and safety constants

A few thresholds and limits recur across the governance and reliability chapters, from classifier decision thresholds to failure-detection timeouts and sequential test statistics.

Symbol	Definition	Unit	Notes
$h(x)$	**Classifier**	Function	Binary classifier $h(x)$ whose positive-prediction rates the fairness criteria constrain.
C	**Gradient Clipping Norm**	Scalar	Per-example gradient clipping bound C in differentially private training; not a C^3 axis.
T_{deadline}	**Deadline**	seconds	Target latency deadline for batch or phase completion.
T_{timeout}	**Failure-Detection Timeout**	seconds	Interval without a heartbeat after which the coordinator declares a rank failed.
τ	**Response Threshold**	Scalar	Decision or classification threshold τ.
Λ_m	**Sequential Likelihood Ratio**	Scalar	Likelihood ratio Λ_m after m observations in sequential probability ratio testing (SPRT), compared against Wald stopping boundaries.

Units, Precision, and Disambiguation

Standardized measurement units, numerical representation formats, and collision-avoidance conventions ensure clarity across distributed systems analysis.

Units and precision

- Physical units: This book uses SI (metric) units throughout, including meters, kilograms, seconds, watts, and °C, consistent with standard engineering and scientific practice. Where source data was originally reported in imperial units, the book converts to SI and notes the original values parenthetically. A space always separates the number from the unit (for example, 100 ms, 2 TB/s).
- Data and memory: This book uses **decimal SI prefixes only**: KB = 10^3 bytes, MB = 10^6, GB = 10^9, TB = 10^{12}. Binary-prefixed units do not appear in prose; model sizes, activation footprints, throughputs, and transfer volumes are reported in decimal units (for example, 2 TB/s, 102 MB). Hardware memory capacities retain the vendor's nameplate figure and label. A modeled capacity of 80×2^{30} bytes follows the registered device assumption, not a guarantee implied by an 80 GB label. Where a worked example subtracts a computed footprint from a device capacity, the registered capacity in bytes and the footprint are both converted to decimal; Appendix 4 states this exception in full.
- Compute: The notation distinguishes operation counts from rates. Total work uses FLOPs (for example, GFLOPs, TFLOPs), while throughput uses FLOP/s with decimal prefixes (for example, GFLOP/s, TFLOP/s).
  - 1 TFLOP = 10^{12} FLOPs
  - 1 TFLOP/s = 10^{12} FLOPs per second
  - Arithmetic intensity conventionally uses FLOP/byte as a unit ratio (floating-point operations per byte moved).
- Network throughput: Reported in bytes/s (GB/s, TB/s) or bits/s (Gbps) depending on convention. InfiniBand and Ethernet specifications use Gbps; application-level throughput uses GB/s. The text states the convention on first use.
- Power: Power carries a subscript (P_{avg}, P_{device}, P_{cluster}, P_{IT}); bare P remains parameter count.
- Latency percentiles: Written p50, p95, and p99 in upright type, inside math as well as in prose.
- Currency: Dollar amounts use the dollar sign (\$); unless otherwise noted, dollar-denominated costs are U.S. dollars (USD).
- Precision:
  - **FP64**: Double precision (8 bytes)
  - **FP32**: Single precision (4 bytes)
  - **TF32**: TensorFloat-32 (19-bit Tensor Core compute mode; inputs and storage remain FP32)
  - **FP16**: Half precision (2 bytes, standard range)

- **BF16**: Brain float (2 bytes, wide dynamic range)
- **FP8**: Quarter precision (1 byte, E4M3 or E5M2 format)
- **FP4**: 4-bit floating-point format
- **INT8**: 8-bit integer (1 byte)
- **INT4**: 4-bit integer; lower integer precisions follow the same uppercase `INTn` pattern (for example, INT3, INT2)

Quick reference: Resolving collisions

Common collision points in distributed ML Systems literature include:

Symbol	ML Meaning	Systems Meaning	Book Convention
B	**Batch Size**	Bandwidth	**Batch Size**. Use BW for bandwidth.
D	**Dataset Size**	Data Volume	**Dataset Size**. Use D_{vol} for bytes moved.
η	**Learning Rate**	Efficiency	**Learning Rate**. Use η_{hw} for efficiency.
P	**Parameters**	Peak FLOP/s	**Parameters**. Use R_{peak} for peak rate.

As a general principle, ML conventions take precedence for single letters, while systems concepts get subscripts or multi-letter symbols. This reflects the primary audience (ML practitioners learning systems) and preserves compatibility with the ML literature.


Additional collision points in distributed execution

The distributed context introduces further symbol collisions beyond single-device notation:

Symbol	ML Meaning	Distributed Meaning	Our Convention
N	(none)	Number of Devices	**Device Count** in distributed context (accelerators, not host nodes); $N = N_{\text{GPU}}$.
M	GEMM dimension; memory root (M_{total})	Collective Payload	**Payload** when bare, outside GEMM shape statements. Memory footprints always carry a subscript.
λ	Regularization weight	Failure Rate	**Subscript every other use**. Bare λ is the per-component failure rate; arrival rate is λ_{arr}.
d, t, p	Hidden dimension; time; distribution $p(\cdot)$	Data-, tensor-, and pipeline-parallel degree	**Core meanings**. Parallelism degrees are N_{DP}, N_{TP}, and N_{PP}.
τ	Temperature or threshold	Checkpoint Interval or Delay	**Subscript every distributed use**. Checkpoint intervals are T_{ckpt} and T^*_{ckpt}; gradient staleness is τ_{stale}.
α	Significance Level	Network Latency	**Subscript every other use**. Bare α is α-β per-message latency; α_{scale} is the scaling exponent, α_{sig} the significance level, and α_{R} the Rényi order.
ρ	Correlation	Utilization or Ratio	**Subscript every other use**. Bare ρ is the communication-computation ratio; ρ_{serv} is serving or queue utilization.
ϵ	Small Constant	Privacy Budget	**Subscript every other use**. Bare ϵ is the privacy budget; ϵ_{adv} is the adversarial radius, and stabilizing constants carry their own subscripts.
g, G	Gradient $\mathbf{g}$	LogGP gaps; GPUs per node	**LogGP only** when bare. Gradients are bold $\mathbf{g}$; accelerators per node are G_{node}.
K	Top-K, key matrix $\mathbf{K}$	Attack Steps	**Local when bare**. PGD attack steps are K_{PGD}; other counts are defined at use or subscripted (K_{top}).

MAIN MATTER

Introduction

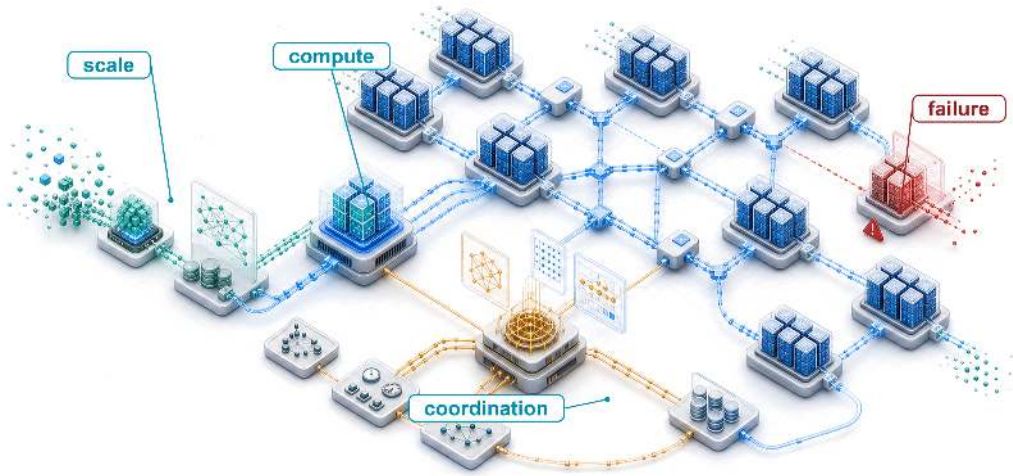

Purpose

Why are single-machine engineering principles insufficient for machine learning at fleet scale?

Machine learning at scale has a physics of its own. On one node, performance is often governed by the memory wall: data must reach the accelerator fast enough to keep the math busy. Scaling laws explain why one node stops being enough, because model quality improves predictably but sublinearly with compute, data, and parameters, so each further gain demands a larger fleet. In a distributed cluster, the memory problem stretches across machines. Data must move through network links between racks, and the slowest shared crossing can limit the entire job. Hardware failures also change character. A failure that stops one local training run can stall a whole distributed job when thousands of workers must advance together. This discontinuity explains why mastery of single-machine ML is no longer sufficient. A faster device may finish its local work sooner yet spend the saved time waiting for other machines. Adding devices can increase capacity while creating more shared work to coordinate and more components to recover. Serving introduces another consequence: spare capacity is useful only if requests can reach it within their deadlines. The engineering decision must therefore account for the behavior of the whole fleet. That wider boundary also amplifies societal impact because these systems may serve billions of users. Bias in any model can cause harm, but bias in a widely reused foundation model can propagate across many downstream systems. In C^3 terms, the discipline this book builds is the physics of distribution, in which compute, communication, and coordination turn algorithmic choices into questions of physical topology, fault tolerance, security, and governance.

Part IV
Governance
Assurance
Part III
Operations
Serving
Part II
Control
Execution
Part I
Fabric
Facility

Learning Objectives

- Explain how empirical scaling laws drive fleet growth and where breakdown conditions bound compute-optimal allocation
- Diagnose fleet-scale distribution risks using reliability gaps, consistency-availability trade-offs, communication intensity, and routine failure rates
- Explain how Compute, Communication, and Coordination extend the Data-Algorithm-Machine lens for production fleets
- Apply the Fleet Law to separate a training budget's useful compute from its communication and coordination overhead
- Explain how the fleet stack connects infrastructure decisions to deployment and governance constraints

The Scale Moment

MACHINE learning on a single accelerator is governed by local memory hierarchy and arithmetic intensity: the physics of silicon. The boundary of single-machine systems appears when that local machine is no longer the system. As models move from research prototypes to global services, the binding constraints move outward into racks, networks, power delivery, and recovery machinery. That change is not a smooth extrapolation; it is the **scale moment**.

A synchronous distributed training step gives this change a concrete form. Each worker computes part of the update, exchanges model information with other workers, and waits until the required participants can advance together. These activities give the book its C^3 lens: Compute is local execution, Communication moves data between workers, and Coordination keeps their progress and state consistent, including after failures. The Fleet Law expresses the corresponding time budget. Dividing a fixed workload across more devices can shorten local computation, but the step also pays for communication and coordination, less whatever work can overlap. Faster accelerators help only when the remaining costs allow the saved compute time to shorten the whole step.

This book assumes familiarity with single-machine training, inference, and accelerator memory. Readers who want to refresh that foundation should begin with Appendix 5, which restates it in reference form: the Data · Algorithm · Machine (D·A·M) lens that organizes single-machine diagnosis, the iron law, the roofline and its arithmetic-intensity boundary, the accelerator memory hierarchy, the memory cost of training state per parameter, and the arithmetic of transformer layers. The book's aim is to develop engineering judgment across infrastructure, distributed execution, deployment, and governance, so that a local improvement can be evaluated against the behavior of the whole fleet. This chapter builds that judgment in the order a fleet engineer meets the problem. It first traces how far training compute and cluster size have grown and what changes when a job leaves one machine. It then turns to the empirical scaling laws that keep driving that growth, the physical, logical, and societal constraints that distribution imposes, and the C^3 taxonomy and Fleet Law that diagnose where a distributed step loses time. It closes with the fleet stack, an eight-row layered map of the fleet that locates each cost in the architecture, and three recurring workloads that test how the dominant cost changes. Parallelism, communication, and recovery techniques appear here only by name. The task in this chapter is to identify the constraint each one must address, and later chapters develop the mechanisms.

The scale moment is the physical and operational transformation that occurs when models encounter three recurring walls: memory, network, and energy. They describe resource limits that the C^3 lens helps diagnose. On one accelerator the memory wall often binds; after distributing a communication-intensive workload across thousands of nodes, the network wall can replace local memory as the primary performance bottleneck. Its hard limits include bisection bandwidth,[1] the aggregate bandwidth across the narrowest cut that splits the fleet, and speed-of-light latency. Serving billions of users can then encounter the energy wall, making thermodynamic efficiency a first-order engineering requirement. Crossing those walls also opens a reliability gap, making hardware failure a routine event rather than a rare exception.

[1] **Bisection bandwidth** (from graph theory): The minimum aggregate bandwidth of all links that, if cut, would partition the network into two equal-sized sets of nodes. In distributed ML, this "worst-case" cut bounds any collective whose traffic must cross it, such as a gradient exchange among all workers, and adding workers on either side does not raise that bound.

Between 2012 and the mid-2020s, public and third-party estimates place training compute growth from roughly 10^{18} FLOPs for AlexNet to approaching 10^{25} FLOPs for leading large models, seven to eight orders of magnitude. The difference is qualitative, not merely quantitative. A workload that once fit on two GPUs now spans tens of thousands of accelerators. Recent capability leaps have repeatedly come from applying computation at previously impractical scales, and the empirical scaling laws examined in section 6 explain why organizations keep paying for each further order of magnitude.

This growth unfolded across a sequence of landmark models. AlexNet trained on two GTX 580 GPUs for approximately 5–6 days (Krizhevsky et al. 2012). BERT required 64 Tensor Processing Unit (TPU)[2] chips for 4 days, roughly 6,144 chip hours (Devlin et al. 2019).

GPT-3 consumed an estimated 3.14×10^{23} FLOPs during training (Brown et al. 2020). A single A100, a generation newer than the V100 GPUs that trained it, would need about 32 years to perform that work even at its full 312 TFLOP/s peak, which is the plainest answer to why one node is no longer enough. A later carbon accounting instead pairs the budget with 10,000 V100 GPUs sustaining about 24.6 TFLOP/s each (roughly 20 percent of the V100's peak arithmetic rate) for roughly 15 days of training (Patterson et al. 2021). The gap between that delivered rate and the datasheet peak raises a question this book keeps returning to, namely how much of each accelerator a fleet actually puts to use. PaLM trained on 6,144 TPU v4 chips for roughly 60 days, consuming approximately 10^{24} FLOPs (Chowdhery et al. 2022). OpenAI's GPT-4 report did not disclose model size, training hardware, or training compute, so the GPT-4-class scenario in this section should be read as illustrative rather than a published configuration (OpenAI et al. 2023). These examples sit within the rapid training-compute growth trend documented by earlier compute-trend studies (Amodei and Hernandez 2018; Sevilla et al. 2022). Collected in table 0.1, they show training budgets moving from single-machine experiments into distributed systems where hardware count, wall-clock time, and operational coordination are part of the model design.

[2] **Tensor processing unit (TPU)**: Google's custom application-specific integrated circuit (ASIC) for machine learning, whose matrix units are systolic arrays, grids of multiply-accumulate cells that pass data between neighboring cells (Jouppi et al. 2017). At fleet scale, the inter-chip network matters as much as the array: TPU v4 joins its chips with an optically reconfigurable interconnect, so the topology of the network, not only the speed of each chip, determines how well many accelerators cooperate (Jouppi et al. 2023).

Table 0.1: Training compute evolution: Growth in hardware scale and training duration across published landmarks and an illustrative GPT-4-class scenario, showing why distributed systems become central as training budgets move from 10^{18}-scale to the largest training runs.

Model	Year	GPUs/TPUs	Training Time	Estimated FLOPs
AlexNet	2012	2 GPUs	5–6 days	~10^{18}
BERT-Large	2018	64 TPUs	4 days	~10^{20}
GPT-3	2020	10,000 V100 GPUs (run est.)	~15 days	3.14×10^{23} FLOPs
PaLM	2022	6,144 TPUs	~60 days	~10^{24}
GPT-4-class scenario	2023	~25,000 GPUs (illustrative)	~100 days (illustrative)	~10^{25} scenario

Plotted run by run from AlexNet to Llama 3 405B, the climb is steady on a logarithmic scale, and it separates early single-node vision models from multi-node transformer training (figure 0.2).

The language-model points pull away from the vision points because compute demands escalated sharply as transformer architectures replaced convolutional pipelines. Raw arithmetic volume is only one dimension of scale, however. The number of accelerators allocated to a single run has roughly doubled every year over the same period (figure 0.3), a rate that quickly outpaced what any single node could host.

Across the four-order-of-magnitude climb charted in figure 0.3, accelerator counts rise from two GPUs for AlexNet to 16,384 H100 GPUs for Llama 3 along an annual doubling trajectory ($\sim 2\times$ per year). The one estimated point is GPT-3's, placed at the size of the Microsoft supercomputer built for OpenAI in 2020, more than 10,000 GPUs (Langston 2020). This empirical trajectory is the foundation of the scale moment, because leading models have required far larger accelerator fleets than earlier deep-learning landmarks. The curve alone, however, does not explain which constraint breaks first. Large language-model training, recommendation serving, and federated mobile learning all encounter fleet scale, but each stresses a different part of the system.

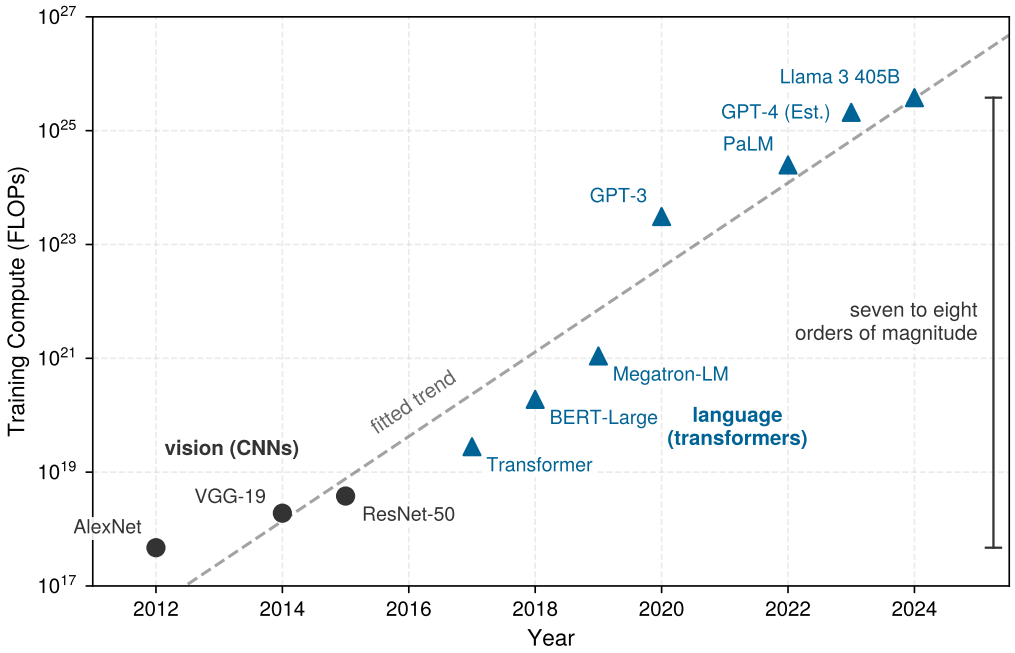


Figure 0.2: Training compute trends (2012–2024): The exponential growth of training compute for landmark ML models. The training compute (measured in FLOPs) has grown by roughly seven to eight orders of magnitude, highlighting the shift from single-node experimentation to massive-scale distributed fleets.

Lighthouse 1.1: Lighthouse archetypes at scale

Lighthouse archetypes are the canonical workloads that keep the scale moment concrete throughout this book. At this point, their role is to show that "more machines" is not one engineering problem: the dominant constraint depends on what must cross the fleet boundary. The full roster with the C^3 taxonomy mapping and binding-constraint analysis appears at section 11.

- **Archetype A (GPT-4/Llama-3)**: Very large language models move from memory bounds on one device to multi-node model parallelism, which splits one model across devices, either within each layer (tensor parallelism) or by assigning consecutive groups of layers to different devices as pipeline stages (pipeline parallelism), so communication can become the bottleneck for communication-intensive partitions.
- **Archetype B (DLRM at Scale)**: Deep learning recommendation model (DLRM) workloads move from fitting embedding tables in local memory to **embedding sharding** across hundreds of nodes, so coordinating sparse feature routing, shard placement, and request scheduling can become the bottleneck.
- **Archetype C (Federated MobileNet)**: Mobile inference and on-device adaptation move from one smartphone-class device to federated learning across millions of devices, so local work must respect per-device compute and power budgets, while communication and participation can limit the federated round.

These archetypes turn the growth curve into an engineering question. The same increase in accelerator count can produce a network wall, a sparse-routing coordination bottleneck, or a per-device compute ceiling. The fleet stack, the layered map of the fleet developed at the end of this chapter, locates those constraints in the architecture, while C^3 identifies the execution cost they impose. That diversity of constraint regimes, which federated learning extends beyond the data

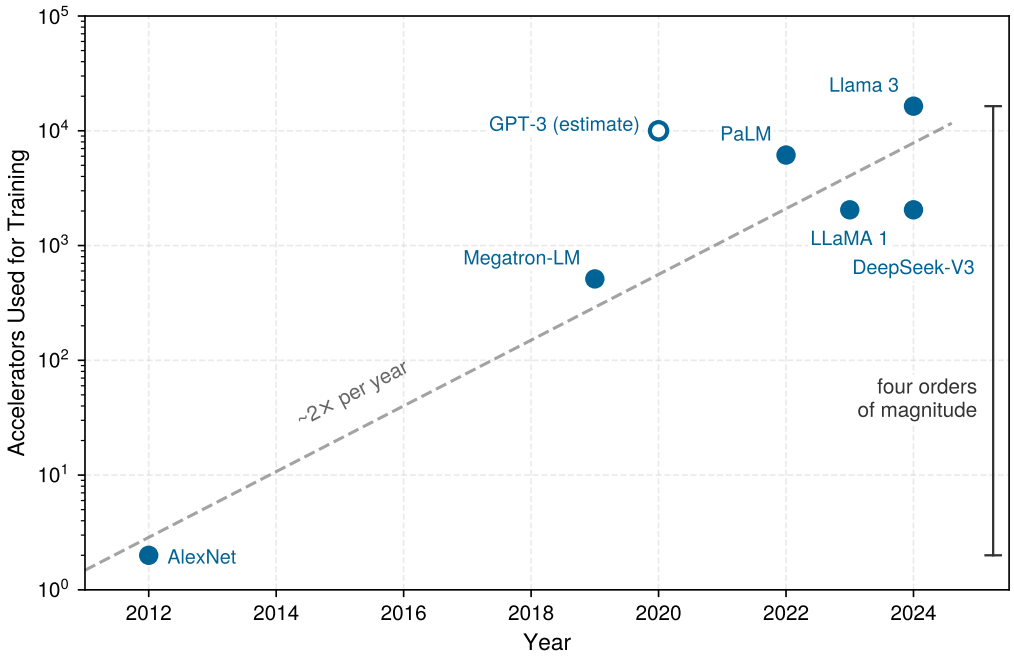


Figure 0.3: The cluster size explosion: Number of accelerators used to train landmark models, 2012–2024. Verified counts from published papers are shown as filled circles; the GPT-3 estimate (hollow marker) reflects approximate cluster size from Microsoft infrastructure announcements rather than a precise published count. The dashed trend line indicates approximately 2× annual growth in cluster size, a rate that outpaces Moore's Law and motivates the infrastructure challenges developed throughout the book.

center, has made systems engineering central to ML at scale. A sophisticated algorithm that cannot scale often provides less practical value than a simpler algorithm deployed efficiently across scalable infrastructure.

Moving from one machine to many changes the governing physics of the system, not merely its device count. A single node is bound locally by the memory wall between its accelerators and their high-bandwidth memory, and it has no peers to wait for. A fleet executes across a shared network fabric under a scheduler that places and recovers the job, which exposes the workload to the network wall, to stragglers, and to routine node failures (figure 0.4).

At fleet scale, the binding constraint may shift from local silicon to the network fabric, while resilience joins optimization as a primary concern. The unit of compute is no longer a single server but a **machine learning fleet**, an interconnected distributed system designed to act as a coherent engine.

↪ Data, tensor, and pipeline parallelism, and the traffic each places on the fabric, are developed in chapter 15.

↪ Federated rounds across millions of devices, where dropouts, stragglers, and per-device budgets bind, are developed in section 14.

Definition 1.1: Machine learning fleet

Machine learning fleet is a distributed collection of compute devices, storage, and networks managed together to train or serve machine learning models.

1. **Significance**: In tightly coupled synchronous training, the total time T can be governed by the slowest worker (straggler). Sustaining that workload requires balancing bisection bandwidth ($\text{BW}_{\text{bisect}}$) against aggregate compute capacity (R_{peak}). Serving fleets and heterogeneous edge fleets impose different communication and coordination requirements.
2. **Distinction**: The fleet is the unit of engineering, but its workers need not all advance together. Synchronous tight coupling makes a training job depend on a shared step barrier;

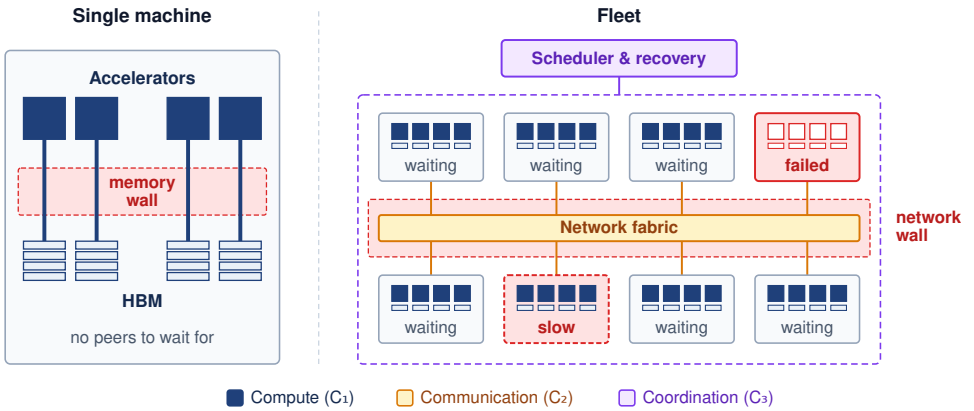


Figure 0.4: The scale discontinuity: On a single machine (left), the usual binding constraint is the memory wall between the accelerators and their high-bandwidth memory, and there are no peers to wait for. In a fleet (right), nodes exchange state over a shared network fabric under a scheduler that places the job and recovers it, so the three C^3 roles appear as separate components. The fabric can become the binding network wall, and failed and slow nodes become routine events that hold back the whole job.

serving replicas can process separate requests, and federated devices can participate intermittently. The workload determines the required coupling and recovery behavior.


3. **Common pitfall**: Treating an ML fleet as "just more servers" overlooks shared network, placement, and recovery constraints. A tightly coupled data-center fleet behaves as one machine, the warehouse-scale computer of section 5; an edge fleet extends the engineering boundary to devices outside that managed facility.

For a tightly coupled job, the network wall of the scale moment is set by the fleet's bisection bandwidth, which limits how fast data can cross the network midpoint; adding workers does not raise it. That bound is the **bisection bandwidth wall**, and at fleet scale it often determines model throughput more than compute does.

At the scale of thousands of GPUs, failure modes appear that a single GPU never exhibits. A network partition can leave a synchronous job hung at a collective (an operation, such as a gradient exchange, that every worker must join) until a timeout aborts it, and in loosely synchronized designs it can let groups of workers drift apart. Stragglers (workers that process data slower than peers due to hardware variation or thermal throttling) can bottleneck entire training runs. Even infrequent component failures accumulate across a large fleet, so long training jobs must expect interruptions.[3] Systems must preserve recoverable state frequently enough to bound the work lost at each interruption.

The interruption cadence follows from simple arithmetic. Consider a GPT-4-class training scenario using a hypothetical A100-class cluster of 25,000 GPUs running for 100 days. These values follow a third-party estimate (Patel and Wong 2023) rather than an OpenAI disclosure (OpenAI et al. 2023). In a cluster of this size, the probability of at least one failure over an interval t becomes a binding constraint. With independent, exponentially distributed failures and system mean time between failures (MTBF) $\text{MTBF}_{\text{system}}$, that probability is $\Pr(\text{failure before } t) = 1 - e^{-t/\text{MTBF}_{\text{system}}}$. The worked example in notebook 1.1 establishes the arithmetic for one cluster, and that arithmetic, the MTBF cascade, predicts the interruption cadence for any fleet size.

[3] **Hardware failure rates at scale**: Notebook 1.1 uses an assumed per-GPU mean time between failures and independent failures to illustrate how interruption frequency grows with fleet size. Production job interruptions include software, networking, and maintenance as well as accelerator faults. Meta's Llama 3 report provides an observed example of this broader interruption category (Dubey et al. 2024); it does not establish a universal annual GPU failure rate.



A 25,000-GPU job fails 25,000 times as often as one GPU.

↪ The MTBF cascade, which sums component failure rates into node and cluster MTBF for multi-thousand-GPU fleets, is developed in section 4.

Napkin Math 1.1: Scale and reliability

Problem: A training run for a GPT-4-class model uses 25,000 GPUs. If each individual GPU has an MTBF of 50,000 hours (the modeling assumption used in this example, not a measured fleet-wide failure rate), how often will the training job be interrupted by hardware failure?

Math:

1. System MTBF: The system MTBF is the component MTBF divided by the number of independent GPUs. With this scenario's values, 50,000 hours divided by 25,000 GPUs is about 2 hours.
2. Daily failure rate: 24 hours divided by 2 hours is about 12 failures per day.
3. Failures over the run: 100 days at about 12 failures per day is about 1,200 interruptions before the run completes.
4. Uninterrupted stretches: with $\Pr(\text{no failure in } t) = e^{-t/\text{MTBF}_{\text{system}}}$, a stretch of 1 hour completes without failure with probability of about 61 percent, and a stretch of 4 hours only about 14 percent of the time.

Systems insight: In this regime, component failures recur throughout a long run, and a job that saved its state only every few hours would usually be interrupted before reaching the next save. Manual restart does not scale; the system must be architected for fault tolerance from the outset. Hardware can no longer be treated as an infallible abstraction, so automated state preservation and recovery become operational requirements.

Meta's published Llama 3 training run illustrates the operational consequence in a real large-scale system, where interruptions have several causes.

War Story 1.1: The training run that failed every few hours (2024)

Context: Meta reports training Llama 3 405B on 16,384 H100 GPUs during a 54-day snapshot of pretraining (Dubey et al. 2024).

Mechanism: The cluster experienced 419 unexpected interruptions during that snapshot. GPU faults and memory errors were major contributors; the report also records software, network, and host issues. These job interruptions are not equivalent to permanent GPU failures.

Impact: Meta nevertheless reported more than 90 percent effective training time, measured as useful training time divided by elapsed time. Significant manual intervention was required only three times.

Fix: Meta reduced job startup and checkpointing time and developed automated diagnosis and recovery tools. Communication traces helped locate stalled collectives and slow workers before restarting useful work.

Systems lesson: The scale moment turns reliability from a hardware specification into a distributed-systems design requirement. A fleet-scale model is trained by the recovery machinery as much as by the optimizer.

Organizations answered these challenges with purpose-built fleets whose defining component is the network as much as the accelerator. Meta's Research SuperCluster, announced in 2022, was designed to reach 16,000 NVIDIA A100 GPUs connected by 200 Gb/s InfiniBand[4] links (AI 2022), and Google's TPU v4 pods join 4,096 chips delivering 1.1 EFLOP/s of aggregate peak compute (Zu et al. 2024). Later Azure AI data center announcements describe training fabrics of tens of thousands of GPUs (Microsoft 2025). Each accelerator's share of that aggregate compute must exchange its results through links of a few hundred gigabits per second.

The scale moment establishes why exponential growth in compute demand forces some ML systems beyond any single machine, making the network fabric a potential bottleneck and component failure routine over long runs. The next question is how to organize the engineering response. Established distributed-systems techniques remain essential, but global barriers and large shared

[4] **InfiniBand**: A data-center interconnect whose defining feature for ML is remote direct memory access (RDMA), which bypasses the OS kernel to move data directly between application memory on different machines at microsecond-scale latency. HDR InfiniBand provides about 25 GB/s line-rate bandwidth per link and NDR about 50 GB/s; that per-link bandwidth, relative to the computation each worker performs between exchanges, decides whether large-model training is compute-bound or communication-bound. RDMA-capable Ethernet (RoCE) now offers comparable line rates.

model state change their costs and determine which recovery and consistency mechanisms apply. Tracing how the layers of one machine map onto a fleet, starting with how sharply the links between servers fall below the bandwidth inside one, makes those dependencies explicit.

From Single Node to Fleet

Inside one H100 server, NVLink moves tensors between accelerators at 450 GB/s in each direction per accelerator. Once a training job spans racks, the same tensors leave through an InfiniBand NDR port at 400 Gb/s (50 GB/s) in each direction, a bandwidth step down of roughly 9× for an accelerator served by one such port. That step illustrates a general pattern. The layered structure of an ML system persists across scale, while the physics at each layer changes. The fleet stack names the fleet's layers by grouping them into four bands, Infrastructure at the bottom, then Distribution, Serving, and Governance at the top, with two rows in each (figure 0.15). At the bottom, the hardware substrate of one node becomes the Infrastructure band, an RDMA fabric spanning racks, and the binding constraint can shift from the memory wall to the bisection bandwidth wall as network congestion and message-passing latency consume a growing share of step time. One layer up, system software (a single CUDA runtime managing PCIe direct memory access (DMA)) becomes the Distribution band, which holds the NVIDIA Collective Communications Library (NCCL) and RDMA libraries that coordinate thousands of processes across the fabric, together with the schedulers that place distributed jobs and the recovery machinery that restarts them. Efficient data movement inside each node remains a prerequisite, because a fleet of underutilized nodes only multiplies the waste.

The upper bands add responsibilities rather than replace the familiar software layers. The ML framework (PyTorch or JAX executing a training loop on one node) remains part of model execution. The Serving band adds request handling and deployment pipelines that manage rolling releases across the fleet. Applications also remain, while the Governance band sets security, robustness, sustainability, and responsible AI requirements for their operation. Section 11 returns to the full stack and the eight rows within it as the map that organizes the rest of this book. The stack identifies where a design decision belongs; C^3 identifies how that decision affects execution time.

A map of layers does not by itself explain why the same decision behaves differently once it spans a fleet. Three changes separate a fleet from a larger server: synchronous coupling turns independent tasks into a shared step, the facility itself becomes the computer, and communication can dominate the step. A fourth change, routine failure, was quantified at the scale moment; its availability model returns with the other constraints of scale in section 10. Archetype A (GPT-4/Llama-3), the large-language-model workload of the book's canonical roster (section 11), runs on a reference cluster of NVIDIA H100 accelerators and makes each change concrete where a chapter needs it.

Independent tasks vs. synchronous fleet dynamics

Many distributed systems isolate work into tasks or requests so that one failure need not stop unrelated work. **MapReduce** (Dean and Ghemawat 2004) partitions an input into tasks and can re-execute failed or slow work, Apache Spark (Zaharia et al. 2016) processes data-parallel tasks with explicit shuffle boundaries, and a web microservice handles requests whose failures can be isolated. Search engines and banking databases use other forms of replication, partitioning, and coordination; they are not uniformly independent or asynchronous. The useful contrast is therefore between failure domains and coupling patterns, not between "traditional" and ML systems.

Large synchronous training jobs operate under **synchronous tight coupling**. Parameter-server architectures (Li et al. 2014) and collective runtimes manage distributed state, but synchronous optimization updates a large shared model state across thousands of accelerators every few hundred milliseconds rather than completing independent one-shot tasks. At each synchronization point, progress can depend on the slowest participating worker, so a persistent 10 percent slowdown on one worker can approach a 10 percent step-time penalty when that worker lies on the critical path. Communication-heavy partitions can also become bisection-bandwidth bound because large gradient or activation tensors cross the network every step. These properties do not invalidate established recovery techniques; they increase recovery cost and restrict which replication, re-execution, and consistency strategies preserve useful training progress.

The two execution pathways differ at the point of failure (figure 0.5). In MapReduce, a failed map task is retried on its own while its peers complete. In synchronous data-parallel training,

where every worker holds a full copy of the model and processes a different slice of each batch, every worker must contribute its gradient to an AllReduce, a collective operation that combines the gradients of all workers and returns the result to each of them, before the shared parameter update can occur. A slow map task can delay downstream reduction and job completion, but other map tasks finish without waiting; in synchronous training, by contrast, healthy workers sit idle whenever a straggler delays the collective.

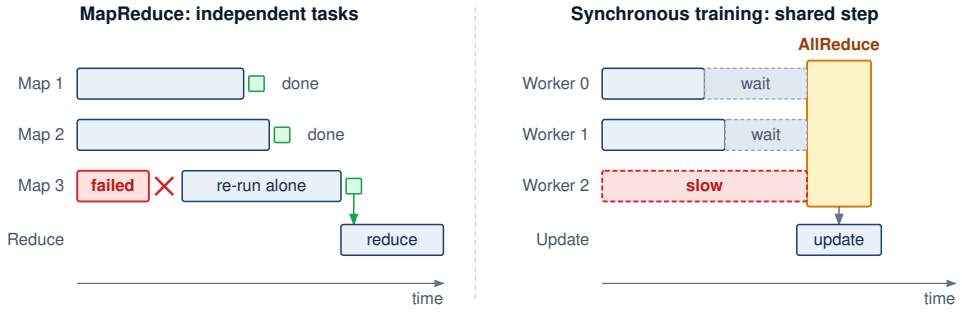


Figure 0.5: Retryable tasks vs. shared training steps: Map tasks (left) deliver their outputs independently, so a failed task is re-run on its own while the others finish; its missing output delays only the reducers that need it. In synchronous data-parallel training (right), the AllReduce needs every worker's gradient before the shared update can proceed, so a slow worker on the critical path holds the whole step and the healthy workers wait. How much the step stretches depends on overlap and the other costs of the step.

The collective barrier dependency diagrammed in figure 0.5 explains why MapReduce-style localized task re-execution cannot be transferred directly to tightly coupled training: when all workers advance a single shared parameter step, recovery must restore mutually consistent model, optimizer, and input state across every participating node before coordinated execution can resume.

> Checkpoint 1.1: The fleet mindset
>
> These questions check whether the fleet mindset is clear:
>
> - ☐ **Straggler impact**: compare how a slow map task can delay job completion with how a persistent straggler can delay repeated synchronous training steps.
> - ☐ **Bisection bottleneck**: explain when frequent cross-rack tensor exchanges would make synchronous training more bandwidth-sensitive than a service handling mostly independent requests.
> - ☐ **Tight coupling**: explain synchronous tight coupling and connect it to the need for all participating contributions before a shared training update completes.
> - ☐ **Linear speedup myth**: using the barrier argument above, explain why doubling the GPUs in a synchronous training job need not halve its step time.

The shift to the warehouse-scale computer

A tightly coupled data-center fleet demands the **warehouse-scale computer (WSC)**[5] perspective. A machine-centric view treats the data center as a building that houses many computers; the warehouse-scale view treats the data center itself as the computer. In this paradigm, single-node abstractions map directly onto distributed infrastructure: the network fabric functions as the system bus, distributed storage serves as the local disk, and the fleet orchestrator acts as the operating system.


For this data-center regime, the engineering boundary extends from local execution to the shared power, network, and recovery systems that sustain the entire facility. The warehouse-scale computer is a common paradigm for large models, while alternative architectures like **wafer-scale engines**, single processors built from an entire silicon wafer rather than one reticle-sized die, attempt to

[5] **Warehouse-scale computer (WSC)**: Barroso and Hölzle, later with Clidaras, framed the data center itself as the computer. For ML fleets, power delivery, cooling topology, optical network layout, and bisection bandwidth become first-order constraints; a 100 MW facility can limit training throughput more than any single accelerator's TFLOP/s.

collapse this entire hierarchy back into a single piece of silicon, trading the modularity of a distributed cluster for the extreme bandwidth of on-chip communication. Both designs answer the same constraint, the cost of moving data between chips, from opposite directions.

Communication dominance and the network wall

Distributing these workloads beyond one machine can make communication the dominant cost, the network wall of the scale moment. On one GPU, a dense training workload may spend most of its time performing matrix multiplications and incur no inter-node communication. Distribution introduces communication whose share depends on the model, partitioning strategy, collective algorithm, topology, precision, and overlap with computation.



Ring AllReduce moves about twice the gradient per step; 16-bit gradients halve it.

At large scale, communication can dominate communication-intensive partitions. Distributed data-parallel training synchronizes gradients across workers after each batch. For a model with 175B parameters, FP32 gradients occupy about 700 GB before any collective algorithm is applied. Ring AllReduce arranges the AllReduce exchange among neighbors in a logical ring; with N workers, each worker sends roughly $2(N-1)/N$ times the gradient tensor size and receives the same amount across the reduction and distribution phases (section 8 derives this factor). For large N the factor approaches two, so each worker moves about twice the FP32 gradient per step, and half that when mixed-precision training exchanges 16-bit gradients. Network traffic therefore depends on precision, worker count, collective implementation, and partitioning. On slower interconnects or partitions with little computation per communicated byte, it can consume a large fraction of each iteration rather than a negligible one; notebook 1.2 later converts the 16-bit volume into seconds of exposed transfer per step.

↪ The α-β communication model, with the per-interconnect latency and bandwidth parameters that turn a link's specifications into a predicted transfer cost, is developed in section 4.

This exposed transfer cost explains why distributed training systems optimize communication so aggressively, and their many mechanisms answer one problem. Distributing work also distributes state that must move or be kept consistent. Horovod, for example, runs Ring AllReduce and fuses many small gradient tensors into fewer large transfers, so that the fixed cost of starting each exchange is paid fewer times (Sergeev and Balso 2018). Splitting each layer across devices, as Megatron-LM does with tensor parallelism (Shoeybi et al. 2019), and sharding optimizer state across workers, as ZeRO does (Rajbhandari et al. 2020), trade per-device memory for different traffic patterns; chapter 15 develops both. The design decision at this stage is which cost prevents progress; selecting a particular mechanism requires the workload and fabric models developed later.

Routine failure, the other consequence of distribution, was already quantified at the scale moment. Under that example's assumptions the job meets a hardware failure every few hours, so checkpointing, replacement capacity, and automated recovery must keep each interruption short; section 10 develops the availability model behind that cadence. Communication and recovery costs describe how a fleet executes work. Neither explains what drives the relentless growth in fleet size, or how much work a model should receive. Both answers lie in empirical relationships between model quality and resource investment, relationships that have made warehouse-scale infrastructure an economic necessity rather than an engineering luxury.

AI Scaling Laws

The seven to eight orders of magnitude of training compute traced at the scale moment, from AlexNet to GPT-4-class estimates near 10^{25} FLOPs, were not an accident of ambition. Each order-of-magnitude increase in compute demanded a corresponding expansion of the machine learning fleet, and organizations paid for those expansions because the return on them had become predictable. Predictable is not the same as free. Measured learning curves estimate the quality a training budget buys, while device throughput, execution efficiency, and the completion deadline determine how much fleet capacity that budget requires.

Rich Sutton's "bitter lesson" articulated the underlying principle: performance in machine learning is primarily driven by applying general methods at massive scale rather than encoding human knowledge into algorithms (Sutton 2019). Scaling laws formalize this observation quantitatively: model loss improves sublinearly as a power-law function of compute, dataset size, and parameters, $\mathcal{L}(X) \propto X^{-\alpha_{\text{scale}}}$ for a resource X (stated in full, with its irreducible floor, in theorem 1.1) (Kaplan et al. 2020; Hoffmann et al. 2022). Each equal-sized loss improvement therefore requires disproportionately more resources, a systems consequence this book later names as the universal scaling law.

Each scaling dimension (parameters, data, and compute) interacts with infrastructure constraints differently, making multi-dimensional efficiency optimization essential at production scale.

Empirical evidence for scaling laws

The growth trajectory establishes demand for larger fleets; empirical scaling laws guide how that demand should be allocated. At the budgets traced at the scale moment, estimating the return on additional resources is an engineering necessity rather than a research curiosity. Over the longer history of AI, the fitted growth rate of training compute itself changed around 2010, from about 1.4× per year, close to Moore's Law, to about 4× per year in the deep learning era (Sevilla et al. 2022) (figure 0.6). A fourfold annual rise is two doublings a year, while accelerators per run doubled about once a year over the period traced at the scale moment. Training compute is the product of accelerator count, per-accelerator throughput, and run duration, so faster accelerators and longer runs supply the other doubling. A demand curve that steep makes misallocation expensive, which is why the model-loss measurements that follow matter.

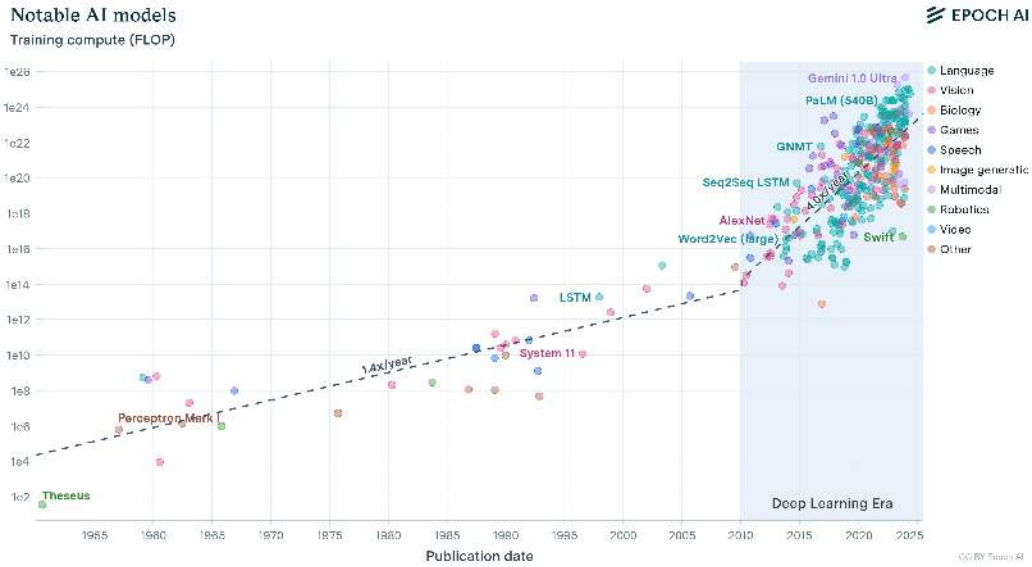


Figure 0.6: Model training compute trends: Training compute has grown exponentially, accelerating dramatically in the deep learning era. The fitted trends shift from roughly 1.4× per year before 2010, close to Moore's Law (a doubling about every 2 years), to roughly 4× per year inside the deep learning era, far steeper than Moore's Law. The fastest stretch was steeper still. Within the 2012–2019 frontier subset measured by an earlier study (Amodei and Hernandez 2018), compute doubled approximately every 3.4 months. This trajectory explains why efficiency has become a strategic imperative rather than an optional optimization.

Because each equal loss improvement costs disproportionately more, allocation grows more consequential as budgets grow. The question is how to divide a budget between the size of the model and the training data it consumes.

Compute-optimal resource allocation

Empirical studies of large language models (LLMs) show that, for a fixed computational budget and within the studied scaling regime, balancing model size and dataset size (measured in tokens[6]) can minimize training loss.

Figure 0.7 decomposes this compute-optimal allocation across three empirical views. In the left panel, U-shaped IsoFLOP contours plot training loss against parameter counts for fixed compute budgets, with each curve's valley minimum identifying the optimal model capacity for that FLOP ceiling. The center and right panels track how optimal parameters and training tokens scale along coordinated power-law trajectories as compute expands, confirming that compute-optimal training requires advancing model size and token volume in tandem. The highlighted projection markers

6 **Tokens**: Subword units produced by algorithms like byte-pair encoding, which iteratively merges the most frequent character pairs in a corpus. Token vocabulary size creates a direct systems trade-off: larger vocabularies can reduce sequence length for some languages and domains, but they expand the embedding table roughly in proportion to vocabulary size. GPT-3 used a 50,257-token vocabulary; moving to 100K+ tokens in newer models therefore trades tokenization efficiency against additional embedding memory.

extrapolate these fits to larger budgets, for example 63B parameters trained on 1.4T tokens for a total of a little over 5×10^{23} FLOPs,[7] illustrating how compute-optimal frontiers guide resource allocation before cluster execution begins.

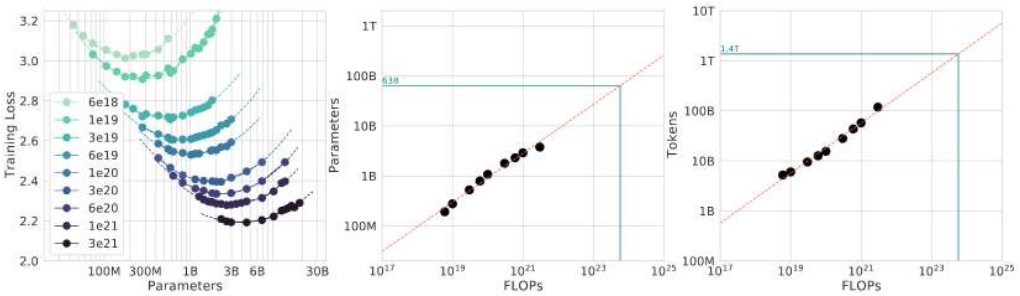


Figure 0.7: Optimal compute allocation: For fixed computational budgets, language model performance depends on balancing model size and training data size; the left panel maps training loss across parameter counts, identifying an efficiency sweet spot for each FLOP level. The center and right panels quantify how optimal parameter counts and token requirements scale predictably as compute increases, demonstrating the need to scale model size and data together to use large training budgets efficiently.

Kaplan et al. (2020) demonstrated that transformer-based language-model loss follows predictable power-law relationships with model parameters, dataset size (measured in tokens), and total computational budget. The result was not a license to increase every dimension blindly; it showed that model quality depends on coordinated allocation across those resources, a point later sharpened by Chinchilla's compute-optimal scaling analysis (Hoffmann et al. 2022).

Two further results appear in Kaplan's measurements across parameter scales from 10^3 to 10^9 (figure 0.8). Larger models are more sample-efficient, reaching a target loss with substantially fewer training tokens. Compute-efficient training therefore stops far short of full convergence, because an early-stopped larger model attains the target loss with less total compute than a smaller model trained to its plateau.

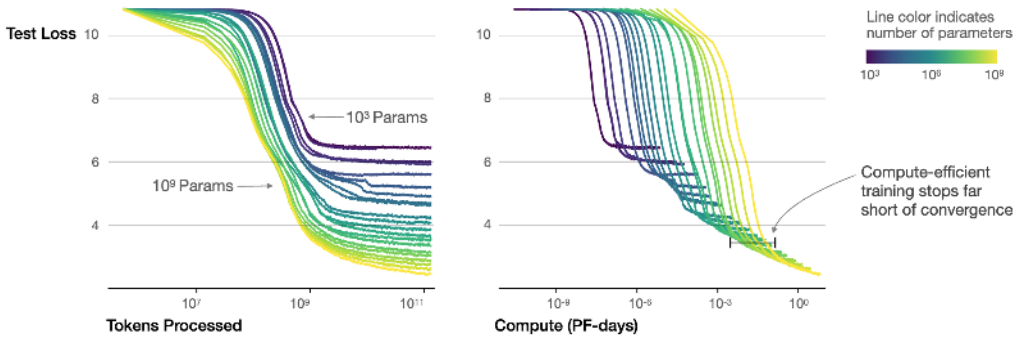


Figure 0.8: Scaling laws and compute optimality: Larger models consistently achieve better performance with increased training data and compute, but diminishing returns necessitate careful resource allocation during training. Optimal model size and training duration depend on the available compute budget, as evidenced by the convergence of loss curves at different parameter scales and training token counts.

Within the studied regime, the Chinchilla result indicates that model size and training tokens should scale approximately proportionally for compute-optimal training, with a ratio on the order of 20 training tokens per parameter (Hoffmann et al. 2022). The projection marker of figure 0.7, 1.4T tokens for 63B parameters, sits at that ratio. This corrected earlier guidance that favored making models larger while training them on comparatively fewer tokens. The objective is loss at a fixed training-compute budget. A deployment that serves the model repeatedly must also account for inference cost; its preferred allocation need not minimize training compute alone.

[7] **FLOPs vs. FLOP/s**: A critical distinction: FLOPs denotes total computational work (operations performed), while FLOP/s denotes hardware throughput (operations per second); confusing the two leads to incorrect cost estimates. GPT-3 required 3.14×10^{23} FLOPs of work; an A100 delivers 312 TFLOP/s of throughput. Dividing work by peak throughput gives ideal wall-clock time, the roughly 32 years on one A100 computed at the scale moment. Actual time is approximately work$/(\eta_{\text{hw}} R_{\text{peak}})$, where the hardware utilization η_{hw} is the achieved fraction of peak throughput, so utilization below one multiplies ideal time by $1/\eta_{\text{hw}}$.

A compute-optimal allocation specifies useful computational work; converting that work into elapsed time requires a separate systems model. Communication can grow relative to per-worker computation as a fixed workload is split more finely, creating bandwidth bottlenecks that reduce effective utilization. At multi-thousand-GPU scale, utilization depends on partitioning and interconnect: Narayanan et al. (2021) report Megatron-LM runs on 3,072 A100 GPUs at 52 percent of peak device throughput and note that slower interconnects or communication-heavy partitions hinder scaling.

Mathematical foundations and operational regimes

The power-law proportionality stated with the bitter lesson has a full form that includes an irreducible floor. That form explains why the same fleet can enter different operational regimes, and the following analysis takes three cuts through them, each with its own fleet consequence: how compute and data are allocated (which resource to buy next), where diminishing returns set in with dataset size (when storage and data pipelines matter more than accelerators), and when in the model's lifecycle computation is spent (which part of the fleet, training or serving, carries the load).

Theorem 1.1: Power-law scaling formulation

Scaling laws are expressed formally as power-law relationships. The general formulation is:

$$\mathcal{L}(X) = A_{\mathcal{L}} X^{-\alpha_{\text{scale}}} + C_{\mathcal{L}}$$

where loss $\mathcal{L}$ decreases as resource quantity X increases, following a power-law decay with rate α_{scale}, plus a baseline constant $C_{\mathcal{L}}$, the irreducible loss (a constant of the fit, not one of the C^3 labels). Here, $\mathcal{L}(X)$ represents the loss achieved with a resource quantity such as parameters, tokens, or compute; $A_{\mathcal{L}}$ and $C_{\mathcal{L}}$ are task-dependent constants; and α_{scale} is the scaling exponent that characterizes the rate of performance improvement. A larger value of α_{scale} signifies more efficient performance improvements with respect to scaling.

For a fleet, the exponent is the price list. Halving the reducible term $A_{\mathcal{L}} X^{-\alpha_{\text{scale}}}$ requires multiplying the resource X by $2^{1/\alpha_{\text{scale}}}$, so the smaller the exponent, the larger the multiple of accelerators, tokens, or training time that each further step in quality demands.

These power-law predictions find empirical validation in the family of learning curves plotted in figure 0.9: across six model scales spanning from 393.2K to 708M parameters, test loss descends predictably as dataset size grows from 10^7 toward 3×10^{10} tokens, with smaller architectures flattening into parameter-capacity plateaus while larger models sustain power-law error reduction.

Resource-constrained scaling regimes

Applying scaling laws in practice is a scarcity diagnosis: the useful question is which resource prevents balanced growth first. Compute budget, data availability, and model size create three regimes with different optimal responses.

In a compute-limited regime, compute scarcity restricts scaling potential despite abundant training data; measured learning curves guide the allocation between model size and training tokens within that budget. In a data-limited regime, computational resources exceed what the available dataset can support, meaning that increasing model size is useful only if validation measurements show that the available data can support additional capacity. Between these extremes lies the optimal regime, where compute and data grow in balance following compute-optimal scaling laws, as DeepMind demonstrated with Chinchilla by outperforming much larger models through proportional scaling of model size and training data (Hoffmann et al. 2022). Recognizing which regime governs a given project prevents common inefficiencies: over-parameterized models with insufficient training data, or under-parameterized models that waste available compute. For the fleet, the diagnosis decides where the next investment goes. A compute-limited project needs accelerator-hours, while a data-limited one gains more from the storage and data pipelines of chapter 13 than from additional accelerators.

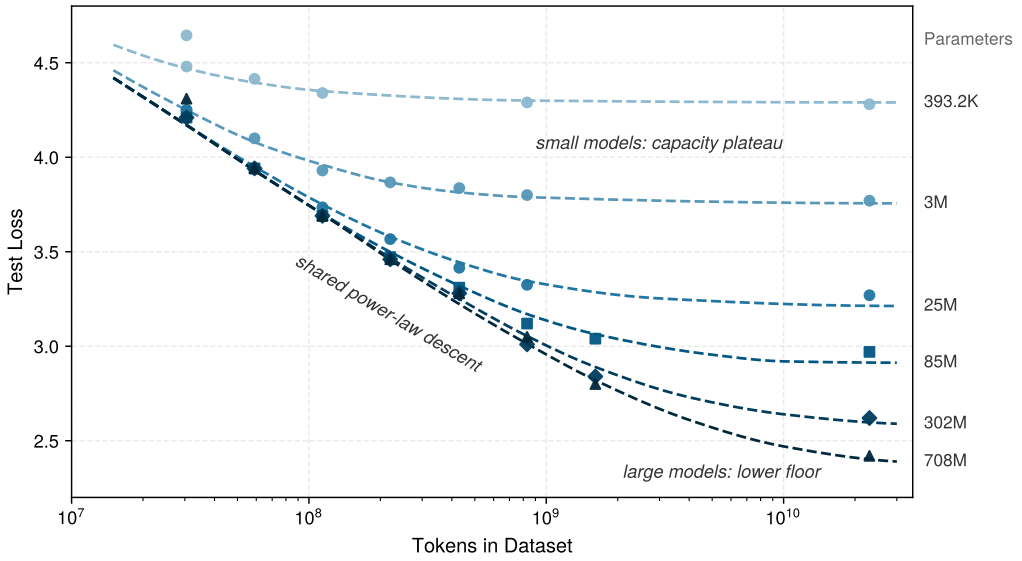


Figure 0.9: Loss vs. dataset size across model scales: Test loss curves show how models of different sizes (393.2K to 708M parameters) benefit from increased training data. Larger models achieve lower loss, but all curves exhibit diminishing returns at high token counts.

The second cut follows the return on additional data as a dataset grows, which decides when buying data stops paying. The third follows lifecycle stage, because additional compute can be spent on the foundation run, on adapting the model afterward, or on each request in deployment.

Figure 0.10 partitions dataset scaling into three distinct empirical regimes on log-log coordinates. In the initial Small Data Region, generalization error lingers near the upper Best Guess Error ceiling; as data volume expands into the central Power-Law Region, error drops sharply along a constant slope where data investment yields predictable returns; finally, in the Irreducible Error Region, the curve flattens asymptotically against the Bayes noise floor where further dataset expansion provides negligible gain. The systems consequence is that finite high-quality data, not compute, becomes the binding constraint once a model enters the saturation regime, which is why data efficiency complements brute-force scaling. An observed plateau does not by itself establish that the irreducible floor has been reached, however. Limited coverage, insufficient model capacity, and incomplete optimization can also flatten a learning curve, so the engineering task is to rule out these remediable limits before purchasing more data or compute.

↪ The data wall, and the storage traffic a fleet incurs when it generates, filters, and versions synthetic training data, are developed in section 15.

Figure 0.11 distinguishes three points in the lifecycle where additional computation can change model behavior. Pretraining scaling (orange curve) increases the resource investment in the foundation run. Posttraining scaling (blue curve) adapts an existing model through fine-tuning or preference optimization. Test-time scaling (green curve, "long thinking") spends additional computation on a particular request through intermediate generation, search, or sampling, trading serving latency and throughput for a possible quality gain. Each phase stresses a different part of the fleet. Pretraining is one long, failure-sensitive foundation run whose scaling-law gains must be realized in wall-clock time; posttraining replaces that single massive job with many smaller, coordination-heavy runs; test-time scaling moves computation into the serving path, where it competes with latency targets. The schematic curves do not establish a universal efficiency ranking among these choices, so the full treatments belong with their workloads; test-time compute at serving is treated in section 6. A resource plan must compare measured task improvements and costs before choosing where to spend the next increment of compute.

↪ The multi-model coordination that posttraining alignment runs require is developed in section 8.

Practical applications in system design

When sizing GPT-3, the authors used scaling-law extrapolations to choose model size and training data (Brown et al. 2020; Kaplan et al. 2020). They trained an established transformer architecture

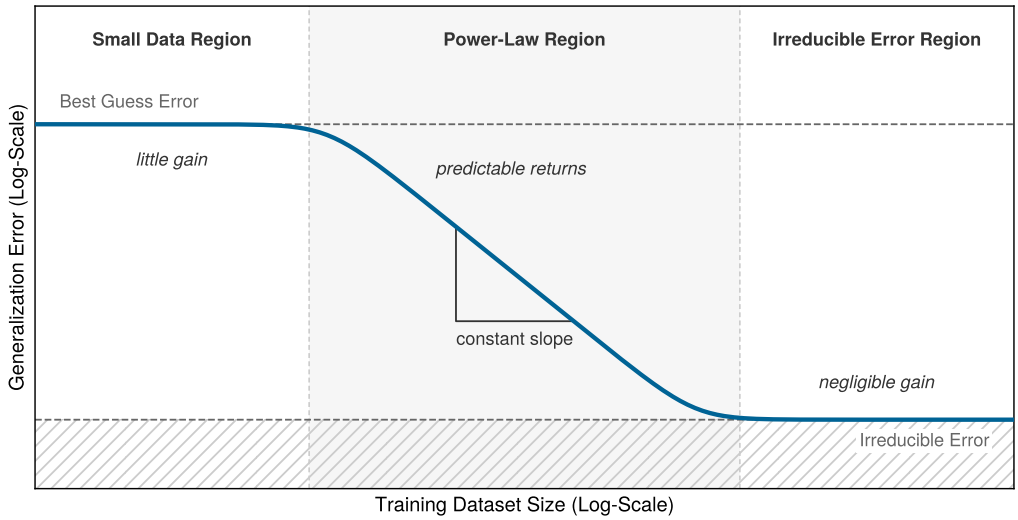


Figure 0.10: Data scaling regimes: Generalization error as a function of dataset size exhibits three distinct phases. In the small-data regime, error stays near the best-guess ceiling; the power-law regime demonstrates predictable error reduction; the irreducible-error regime represents the fundamental noise floor.

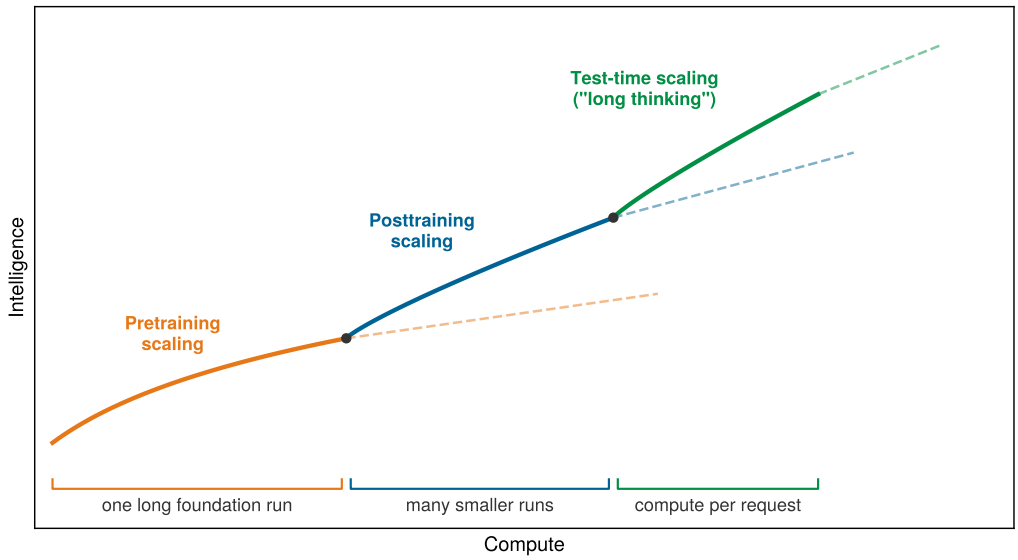


Figure 0.11: The three scaling phases: Intelligence (capability) improves through successive scaling regimes. Pretraining scales with compute and data. Posttraining (reinforcement learning from human feedback, instruction tuning) refines behavior. Test-time scaling (chain-of-thought, search) extracts additional capability at inference.

with 175B parameters and approximately 300 billion tokens, about 1.7 tokens per parameter. Against the roughly 20 tokens per parameter of the later Chinchilla results, that point was undertrained relative to compute-optimal token allocation (Hoffmann et al. 2022).

The practical decision is how to divide a fixed budget among model size, data, and training duration. Empirical curves estimate the quality attainable with that allocation; measurements of the chosen workload and fleet establish its execution cost. A plan needs both estimates before it can connect a target capability to a completion deadline or operating budget.

Sustainability and cost implications

Scaling laws reveal performance pathways while exposing rapidly escalating resource demands. As models expand, training and deployment costs grow disproportionately, creating tension between performance gains and system efficiency. GPT-3's run alone occupied about 148,000 GPU-days and drew an estimated 1,287 MWh of electricity (Patterson et al. 2021), and later frontier runs use more accelerators for longer.

The sharpest of these costs is environmental, and it turns on a decision the fleet operator controls, the siting of the cluster. The same training run can differ by roughly 41× in CO_2 emissions depending on grid location, with grid carbon intensity ranging from about 20 g/kWh of CO_2 for Quebec hydropower to about 820 g/kWh for Poland coal.[8] That single placement choice, together with job scheduling that shifts workloads to low-carbon hours, makes data-center siting a first-order infrastructure decision rather than an afterthought. Financial cost scales with the same accelerator-days and megawatt-hours, which limits who can do large-scale research at all.

Scaling laws do not guarantee unbounded improvement. Each incremental performance gain must be weighed against its resource cost. As systems approach practical scaling limits, the emphasis shifts from scaling alone to efficient scaling: balancing performance, cost, energy consumption, and environmental impact.[9]

[8] **Carbon intensity of training**: GPT-3 training emitted an estimated 552 t of CO_2, and published estimates place large-language-model training in the 10^2 to 10^3 ton range, though figures vary widely with hardware, utilization, and electricity mix (Patterson et al. 2021).

↪ How site selection and grid carbon intensity set the emissions of the same training run is developed in section 2.

[9] **Scaling law saturation**: Power-law relationships with a baseline loss term approach that floor rather than predict unbounded loss reduction. Downstream utility may also improve little even while the fitted loss decreases, which this book calls **semantic saturation**. That distinction motivates testing data efficiency or model compression against task utility and resource cost; neither technique guarantees that a genuine information limit can be overcome.

Scaling law breakdown conditions

A resource plan must also identify where its empirical fit ceases to apply, because scaling laws are fitted within the regimes in which they were measured and need not hold beyond them. Most breakdowns at those boundaries share one root cause, growth in one dimension that outpaces the others. Hoffmann et al. (2022) show that many large language models were undertrained because model size grew faster than training-token budgets, and that compute-optimal training requires scaling parameters and tokens together. Hardware ceilings belong to the same family, because memory bandwidth, interconnect capacity, and I/O throughput cap how far a larger model can be distributed at all. Each imbalance requires different evidence. Training measurements can reveal an unsuitable optimization schedule; held-out evaluation can distinguish improved generalization from memorization; and execution traces can reveal whether bandwidth or I/O prevents the fleet from completing the planned work. A lower benchmark loss also does not establish robustness to adversarial or out-of-distribution inputs. Table 0.2 organizes these possible failure modes, mapping each breakdown type to a candidate cause and a representative scenario. The table guides investigation rather than inferring a cause from a plateau alone.

Table 0.2: Possible scaling breakdowns: The rows describe risks and representative scenarios, not inevitable consequences of increasing one resource. Training and validation measurements establish which failure mode, if any, applies to a particular allocation.

Dimension Scaled	Type of Breakdown	Underlying Cause	Example Scenario
Model Size	Overfitting	Model capacity exceeds available data	Billion-parameter model on limited dataset
Training Data Size	Diminishing Returns	Saturation of new or diverse information	Scaling web text beyond useful threshold
Compute Budget	Underutilized Resources	Insufficient training steps or inefficient use	Large model with truncated training duration
Imbalanced Scaling	Inefficiency	Uncoordinated increase in model/data/compute	Doubling model size without more data or time
All Dimensions	Semantic Saturation	Exhaustion of learnable patterns in the domain	No further gains despite scaling all inputs

Checkpoint 1.2: Applying scaling laws

These questions check whether scaling laws are being used as resource-allocation tools:

- ☐ **Compute vs. data regime**: identify the learning-curve evidence needed to choose between a larger model trained for fewer steps and a smaller model trained for more steps under fixed compute and limited data.
- ☐ **Scaling breakdown**: explain the risks of doubling model parameters at fixed dataset size, and what training and validation evidence would distinguish undertraining from overfitting.
- ☐ **Chinchilla optimality**: explain why Chinchilla optimality serves as a resource-allocation target and identify the minimized quantity.
- ☐ **Compute vs. capability**: classify the claim as true or false: scaling laws predict that doubling compute always yields a doubling of model capability.

Integrating efficiency with scaling

Scaling laws reveal the walls; efficiency engineering builds the paths around them. Data saturation, infrastructure bottlenecks, and diminishing returns set hard limits on what brute-force scaling can achieve. The same constraints, however, point toward solutions along three interconnected dimensions. Algorithmic efficiency relies on techniques such as sparsity and distillation to extract more capability per FLOP. Data efficiency uses curriculum learning and active selection to extract more information per training example. Systems efficiency uses communication hiding and pipeline overlap to extract more utilization per accelerator. Each dimension addresses a different breakdown condition from table 0.2, so identifying the limiting resource determines whether efficiency work should target the algorithm, the data, or the execution system. Systems efficiency is the subject of chapter 15 and chapter 8, algorithmic levers such as reduced precision and sparse mixture-of-experts execution appear in chapter 17, and data efficiency under device budgets returns in section 13.

Scaling laws and efficiency techniques determine how much computation large models require and how well the fleet uses it. They do not, however, address the physical and logical constraints that the fleet itself imposes. Hardware fails, bandwidth saturates, distributed systems face fundamental impossibility results, and societal impact at scale demands governance. These constraints cannot be optimized away; they must be engineered around.

Constraints of Scale

Scaling laws set how much work the fleet must perform; the three walls of the scale moment describe where performing it binds. The constraints behind those walls are broader. The machine learning fleet operates under three categories of irreducible constraint: physical (the memory, network, and energy walls themselves, plus the reliability gap that opens as fleet size grows), logical (distributed systems face impossibility results like the CAP theorem), and societal (scale amplifies the impact of every technical decision). For an initial C^3 diagnosis, the distinctions matter because a slow step may reflect a communication limit or coordination loss, while an otherwise fast design may exceed its energy or governance budget. The formal time decomposition follows after these examples establish what it must account for.

The reliability gap

High individual-component availability does not guarantee high availability for a tightly coupled fleet. This distinction opens the **reliability gap**: high component reliability in isolation does not ensure that every component required by an unreplicated job will be available simultaneously. Notebook 1.1 measured the gap as a rate, how often the job is interrupted; availability measures it as a probability, how likely it is that every required component is up at a given instant. Both views rest on the same independence assumption and degrade the same way as the job grows. For a 25,000-GPU job that can make progress only while every GPU is available, equation 0.1 multiplies the component availabilities under an independence assumption to give the probability that all required components are available at the same instant (A_{all}):

$$A_{\text{all}} = (A_{\text{component}})^N \tag{0.1}$$

Here, N is the number of independent components that the job requires simultaneously, and $A_{\text{component}}$ is the availability of one component. The engineering implication is the exponent: every added required component lowers the probability that the full set is available, so reliability engineering becomes a scaling problem rather than a cleanup task.

For a single component, 99.99 percent availability corresponds to 52.56 minutes of unavailability per 365-day year. This is a time fraction, not a count of failures.

If each node has an illustrative 99.9 percent availability and an unreplicated job requires every node, the probability that all 1,000 required nodes are available simultaneously is only 36.8 percent. Scale that job to 10,000 required nodes, and this probability drops to 0.0045 percent. Adding a nine to every node only postpones the collapse, because the exponent N eventually overwhelms any per-node availability below one (figure 0.12).

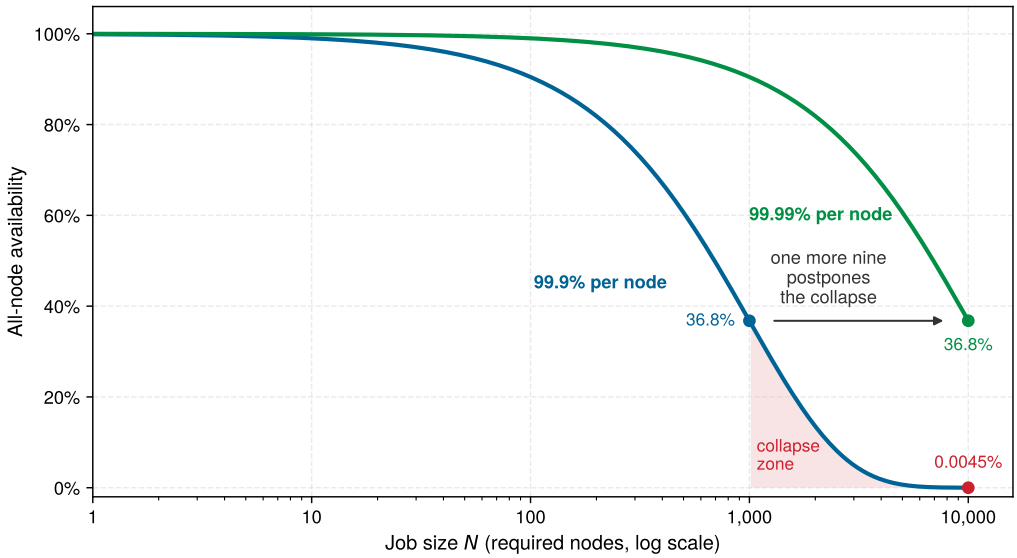


Figure 0.12: The reliability collapse: The simultaneous availability of every node required by an unreplicated job, shown as a function of job size for two per-node availability levels under an independence assumption. At 99.9 percent per-node availability (blue), all-node availability is only 36.8 percent for a 1,000-node job and approaches zero for a 10,000-node job. Even 99.99 percent per-node availability (green) yields 36.8 percent at 10,000-node scale.

The collapse zone isolated in figure 0.12 makes the architectural consequence clear: because simultaneous all-node availability drops precipitously toward zero as job size expands into the thousands, an unreplicated synchronous workload cannot rely on unbroken component uptime. Section 4 replaces this single per-node availability figure with the full failure-probability model, from component failure rates to the chance that a job fails before it finishes. The engineering lesson is that failure is the common case. At scale, resilience replaces prevention as the governing objective: the system trades absolute uptime for recovery speed, checkpoint quality, and automated repair.

↪ The shift from keeping every component running to a fleet that recovers automatically when components fail is developed in chapter 12.

Communication intensity (the CI ratio)


If arithmetic intensity governs where a single accelerator stalls, **communication intensity (CI)** governs where a fleet stalls. On a single accelerator, the roofline model determines whether a kernel is compute-bound or memory-bound. At fleet scale, this analysis elevates to the network.

Equation 0.2 defines communication intensity as the ratio of data moved across the network to the operations performed locally. The numerator counts bytes and the denominator counts operations for the same worker and interval, such as one training step; the ratio therefore has units of bytes per operation. A comparison must also state whether it counts sent bytes, received bytes, or both:

$$\text{CI} = \frac{M}{O} \tag{0.2}$$

where M is the number of bytes the worker moves across the network and O is the number of operations it performs locally in the same interval.

Low communication intensity describes compute-heavy workloads whose accelerators spend most of their time doing math, so scaling is comparatively easy. High communication intensity describes workloads whose network demand approaches the available fabric balance; in that regime, bisection bandwidth can bind and adding more accelerators can slow training rather than speed it up. The boundary is configuration-specific because it depends on both local compute throughput and effective network bandwidth.



Past the fabric balance point, step time grows with communication intensity.

Communication and scaling optimizations, from gradient sparsification (sending fewer gradient bytes) to 3D parallelism (partitioning data, tensor, and pipeline dimensions across different fabric tiers), change how much data moves and where it moves. Overlapping a transfer with independent computation can instead reduce exposed waiting time without changing bytes per operation. The ratio describes workload demand; the fabric and execution schedule determine how much of that demand delays progress.

↪ The communication-computation ratio, and the threshold beyond which communication can no longer hide behind computation, are developed in section 4.

Checkpoint 1.3: The scale mandate

These questions check whether the scale mindset has shifted from local execution to distributed constraints:

- ☐ **Communication intensity**: explain in CI-ratio terms why adding more nodes (N_{nodes}) to a high-CI workload can slow training rather than speed it up.
- ☐ **Reliability gap**: explain the reliability gap that prevents a 10,000-GPU cluster from remaining "perfectly healthy."
- ☐ **Arithmetic vs. communication**: distinguish arithmetic intensity (local memory) from communication intensity (global network).

Distribution complexity and physical boundaries

Scale forces distribution: no single machine provides the compute required for the largest models, and no centralized system can collect every data source that global user bases generate. Coordinating computation across physically separated machines connected by finite-bandwidth networks, however, creates constraints that no engineering can eliminate.

The first stressor appears inside data centers, where synchronous training must choose how much consistency to preserve under partitions and failures. The second appears at the edge, where the devices themselves are unreliable, power-limited, and policy-constrained.

The CAP theorem reality

The **CAP theorem**[10] establishes that an asynchronous distributed system subject to a network partition cannot guarantee both atomic **consistency** and **availability**. **Partition tolerance** describes the network condition under which that trade-off applies, not a third interchangeable property that a system can simply discard.

Training is not a replicated database, and gradient freshness is not the theorem's atomic consistency, yet training faces the same forced choice when a worker becomes unreachable, whether to wait for it or proceed without it. Synchronous training favors a shared current model state but can halt when a required worker becomes unreachable. Asynchronous training can continue through stragglers or unavailable workers but may use stale model versions. Federated learning similarly accepts temporarily divergent local models so that intermittent edge devices can participate without continuous connectivity.

Edge distribution complexity

The coordination challenges discussed so far assume data-center distribution, where machines run in managed facilities. At the network edge, these challenges intensify along every dimension.

Billions of smartphones and IoT devices operate in uncontrolled environments with unreliable connectivity and limited power. Privacy, consent, or policy constraints may prevent raw data

[10] **CAP (Consistency, Availability, Partition Tolerance) Theorem** (Brewer's Theorem): Brewer formulated the conjecture (Brewer 2000), and Gilbert and Lynch proved that an asynchronous system cannot guarantee both atomic consistency and availability when the network may partition (Gilbert and Lynch 2002). Synchronous and asynchronous training provide a useful analogy for this trade-off, but gradient freshness is not the atomic consistency property in the theorem.

from leaving the device, making federated learning a natural architecture (McMahan et al. 2017). Intermittent connectivity requires a participation policy, which may select currently available devices for a round or admit delayed updates under stated rules. Keeping raw data local does not by itself protect information exposed through model updates. Device budgets and the threat model determine whether additional compression, privacy mechanisms, or local execution are appropriate.

Governance and systemic risk at scale

Scale and distribution amplify impact beyond engineering. When a system serves billions of users, a technical bug becomes a societal risk. This amplification increases the reach of governance failures; smaller deployments still require controls appropriate to their uses and potential harms. Governance functions as the **control plane** of the machine learning fleet, not as a set of external rules.

That control plane first has to defend the fleet. ML systems face unique security threats that intensify at production scale. Model extraction attacks steal proprietary intellectual property through API queries. Data poisoning manipulates training data to alter learned behavior; one objective is a backdoor that activates on a chosen input. At fleet scale, these threats become economically attractive targets for sophisticated attackers. Defending the fleet requires systematic approaches: access controls, differential privacy (calibrated noise that bounds how much any single training record can influence what the model reveals), and continuous behavioral monitoring that go far beyond traditional perimeter security.

↪ Defenses against data poisoning, model extraction, and gradient inversion across distributed fabrics are developed in chapter 20.

The same control plane must make the fleet auditable. Systems operating at scale attract regulatory attention. Regimes such as the EU AI Act and local privacy laws make **auditability**, the ability to reconstruct after the fact which data, code, and decisions produced a model's behavior, an architectural requirement for many deployments. Auditing whether a model trained on 10,000 GPUs ingested prohibited data requires end-to-end data lineage tracking, supported by controls that capture ingestion and subsequent transformations. A lineage record cannot establish the absence of inputs that were never recorded. Generating a human-interpretable explanation for a recommendation served within a tail-latency budget of tens of milliseconds demands techniques designed into the serving architecture. Meeting these requirements calls for technical capabilities (audit trails, bias testing, and consent management) built into the infrastructure from day one.

Beyond legal compliance, the machine learning fleet carries ethical obligations. Recommendation algorithms shape public discourse; hiring algorithms affect livelihoods. These systems rarely fail loudly; harm accumulates silently through bias and polarization, without a crash log. Responsible AI turns fairness, transparency, and accountability requirements into operational invariants with defined evidence, owners, and responses. A violation may require withholding a release, routing affected decisions to review, or suspending an unsafe operation; the response must contain the relevant harm. Together, these physical, logical, and societal constraints define the operating envelope of the fleet. Turning them into actionable systems decisions requires a diagnostic taxonomy that can isolate whether execution time is lost to local arithmetic, wire transit, or orchestration overhead.

The C^3 Taxonomy and Foundations of Scale

An idle accelerator does not identify its own bottleneck. It may be waiting for local operands, a gradient transfer, or a failed peer. The C^3 lens introduced at the scale moment separates these explanations and gives the preceding examples a common diagnostic language. On a single machine, diagnosing performance follows the **Data · Algorithm · Machine (D·A·M) taxonomy**. In that framework, Data governs what information the model learns from; the Algorithm defines the mathematical operations to execute; and the Machine supplies the silicon and memory hierarchy executing those operations.

↪ The D·A·M taxonomy as a complete single-node framework, with its diagnostic summary, roofline bound, and scorecard, is developed in Appendix 5.

When workloads stretch across thousands of interconnected nodes, the execution bottleneck shifts. Data-center hardware is procured and cabled around three physical pillars: Compute, Network, and Storage. At runtime, however, distributed execution spends wall-clock time in three distinct operational dimensions: Compute (C_1), Communication (C_2), and Coordination (C_3). Together, they form the C^3 taxonomy.

Storage is not absent from this runtime model; rather, storage serves as the persistent physical substrate spanning all three dimensions. It acts as an extension of the node memory hierarchy in

Compute (C_1), a high-throughput streaming pipeline across Communication (C_2), and the durable checkpointing engine required for fault-tolerant Coordination (C_3).

Each dimension leaves different evidence. Suppose a training job's step time grows by half after its cluster doubles. If time inside each node's kernels grew while their **model FLOPs utilization (MFU)**, the fraction of peak arithmetic throughput spent on the model's own operations, fell and memory-bandwidth counters saturated, local execution is responsible; if link utilization and collective timing rose, transfers are; if barrier waiting and recovery records grew, coordination is. The three diagnoses call for different interventions, and optimizing the wrong mechanism leaves the end-to-end bottleneck in place.

As in single-machine systems, the governing limit is the *binding constraint*: the bottleneck whose relaxation yields an end-to-end reduction in training time or serving latency. The C^3 taxonomy is therefore an operational diagnostic loop: identify the binding axis, apply the appropriate systems intervention, and remeasure, because relaxing one limit frequently shifts the bottleneck to another.

Definition 1.2: The C^3 taxonomy

C^3 taxonomy is a diagnostic framework that classifies distributed machine learning execution time and system bottlenecks along three operational dimensions: Compute (C_1, the math), Communication (C_2, the wire), and Coordination (C_3, the logic). The goal is to identify which dimension binds fleet-scale performance.

1. **Significance**: The diagnostic power is concrete even before inspecting complex distributed traces. If accelerators are computing at low MFU because tensor cores starve for local operands or un-fused kernels, the binding axis is Compute (C_1). If accelerators sit idle waiting for AllReduce gradient transfers or activation tensors across the network fabric, the binding axis is Communication (C_2). If progress halts due to straggler-induced barrier waiting, node recovery rollbacks, or gang scheduling preemptions, the binding axis is Coordination (C_3).
2. **Distinction**: Unlike data center procurement categories (Compute, Network, Storage), which classify physical hardware assets, the C^3 taxonomy classifies runtime execution cost. Storage does not execute model arithmetic; rather, it serves as the persistent physical substrate across all three dimensions (local NVMe in C_1, remote dataset streaming in C_2, and durable checkpointing in C_3).
3. **Common pitfall**: Treating the three dimensions as independent variables. Upgrading to faster accelerators (C_1) often converts a compute-bound job into a communication-bound job (C_2). Sharding model states to eliminate memory redundancy (C_1) increases collective communication volume (C_2) and state coordination complexity (C_3). The dimensions move together.

The three dimensions specify what to measure before selecting an intervention. Their descriptions below locate familiar local costs alongside the new costs of distribution.

The three dimensions of the fleet

Node compute substrate (C_1)

Compute (C_1, the math) captures execution within the server node, including arithmetic units, memory, and local Non-Volatile Memory Express (NVMe) storage.

The memory wall binds this axis when operands cannot reach arithmetic units fast enough. Improving MFU then requires reducing local data movement, for example through operator fusion, rather than merely increasing peak arithmetic throughput.

↪ The memory wall, from high-bandwidth memory (HBM) bandwidth to the roofline model that locates it for one accelerator, is developed in section 3.

Network communication backbone (C_2)


Communication (C_2, the wire) captures data movement between worker devices, both within and across nodes. It includes scale-up fabrics inside a server and scale-out networks between servers.

This traffic includes gradients, activations, and dataset shards. Finite bisection bandwidth can expose a communication tax (T_{comm}) that leaves accelerators waiting for remote data. Reducing bytes transferred or overlapping transfers with useful work can reduce that tax.

Orchestration coordination layer (C_3)

Coordination (C_3, the logic) captures the orchestration software (schedulers, synchronization protocols, and state-management mechanisms) that binds thousands of separate, failing machines into a coherent distributed computer.

Thread synchronization and kernel launches already impose local coordination costs; distribution adds network and failure boundaries. Schedulers, barriers, and checkpointing must manage reliability collapse (equation 0.1) and **straggler amplification**, where a synchronous job waits for its slowest required participant. The objective is **goodput**, the rate of useful training progress after wasted and repeated work are accounted for. Overlap where dependencies permit and bounded recovery rollback improve that rate.



One straggler holds every synchronous peer.

Projection from D·A·M to C^3

The single-machine D·A·M taxonomy and the fleet-scale C^3 taxonomy operate in tandem. D·A·M describes the workload: the *nouns* of the system (the training data, the executed algorithm, the hardware substrate). The C^3 taxonomy describes the execution tax: the *verbs* of the fleet (computing the math, communicating the results, coordinating the state). The C^3 taxonomy projects that workload onto a distributed fleet.

Stretching an algorithm across nodes creates communication (C_2), such as the activation and gradient exchanges that tensor and pipeline parallelism add between partitions of one model. Stretching data across nodes also moves shards and gradients over the fabric (C_2), as when AllReduce synchronizes data-parallel replicas, and it requires coordination (C_3) through distributed samplers, gradient-aggregation barriers, and non-blocking checkpointing. Finally, managing hardware faults across a warehouse-scale machine requires orchestration and dynamic node recovery (C_3). Fleet-scale ML systems engineering requires solving the cross-products of D·A·M and C^3 rather than addressing each dimension in isolation.

The C^3 intersection landscape

The dimensions interact at their pairwise intersections, where an intervention along one axis alters costs across another. At the intersection of compute and communication ($C_1 \cap C_2$), overlapping transfers with arithmetic can hide network latency, but only while independent computation remains available. Between compute and coordination ($C_1 \cap C_3$), checkpointing preserves progress against failure to maximize fleet goodput, yet it consumes execution resources; its frequency and placement trade present overhead against future recovery loss. Across communication and coordination ($C_2 \cap C_3$), collective synchronization depends jointly on transfer completion and participant readiness, so faster physical links alone cannot eliminate straggler waiting.

At the center ($C_1 \cap C_2 \cap C_3$), all three constraints converge simultaneously. Partitioning a model determines both which device computes each operation and what information must cross the network; recovering a failed partition requires restoring the corresponding shared state. These dependencies explain why parallelism, state sharding, and serving policies must be designed together.

Each dimension contributes one term to the distributed step time, and each pairwise overlap names an interface where the dimensions trade costs: hiding latency, preserving goodput, and synchronizing collectives (figure 0.13).

The diagram organizes competing explanations for the same observed delay. A diagnosis may begin with one dimension or with a coupled mechanism, such as checkpoint traffic delaying a collective. The evidence determines which interaction to investigate; the diagram does not prescribe an order in which the dimensions must be optimized.

Surrounding these three operational dimensions are the non-negotiable operating invariants developed across Part IV: the thermodynamic energy and cooling limits that constrain data centers, the adversarial security and differential privacy guarantees required of distributed pipelines, the robustness against silent corruption and distribution shift, and the systemic governance, auditing,

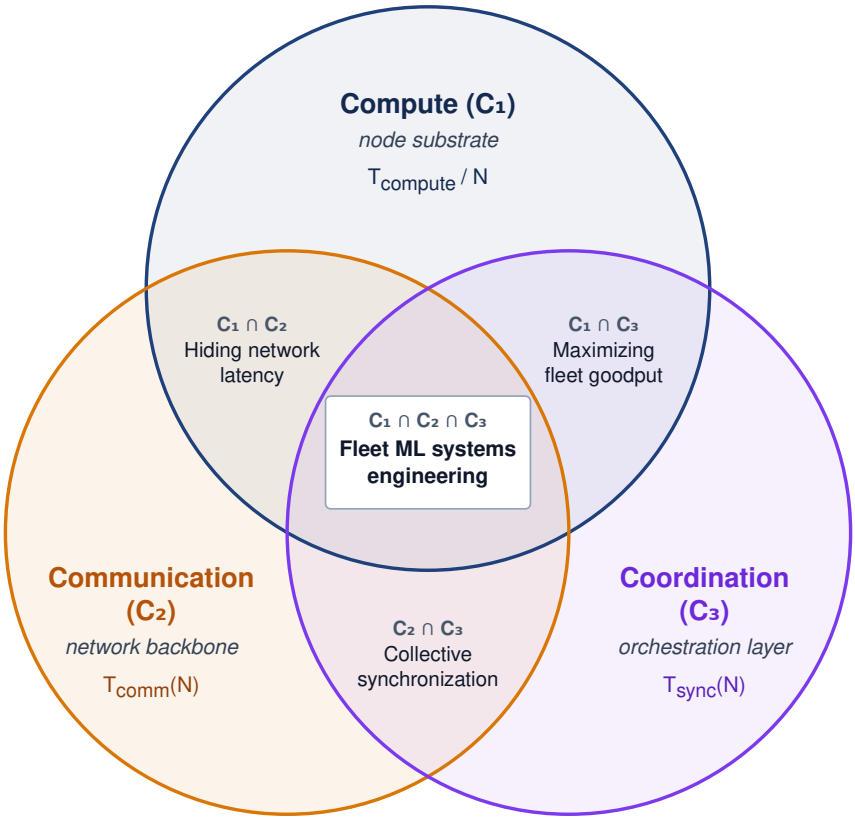


Figure 0.13: The C^3 Intersection Landscape: Each circle is one operational dimension (Compute, C_1, the node substrate; Communication, C_2, the network backbone; Coordination, C_3, the orchestration layer), labeled with the Fleet Law term it contributes to step time. Each pairwise lens names the interaction between two dimensions: hiding network latency behind computation, maximizing fleet goodput against failure, and synchronizing collectives. At the center, where all three meet, is fleet ML systems engineering. Table .244 lists the techniques and chapters for each region.

and safety invariants essential when operating at societal scale. Every chapter ahead uses the C^3 figure the same way, diagnosing which intersection binds before intervening.

The Fleet Law

The C^3 intersection landscape defines *where* distributed execution spends time and where trade-offs bite. The Fleet Law turns that diagnostic map into a first estimate of distributed step time. Its terms are a simplified accounting model, so a prediction must state how work is divided and which costs overlap. On a single machine, execution time is governed by the iron law of performance, $T = D_{\text{vol}}/\text{BW} + O/(R_{\text{peak}} \cdot \eta_{\text{hw}}) + L_{\text{lat}}$, decomposing into data movement, computation, and overhead. At fleet scale, that single-machine view no longer suffices. Equation 0.3 establishes the **Fleet Law**, which decomposes the idealized distributed training step into the terms of the C^3 engine:

$$T_{\text{step}}(N) = \frac{T_{\text{compute}}}{N} + T_{\text{comm}}(N) + T_{\text{sync}}(N) - T_{\text{overlap}} \tag{0.3}$$

The arithmetic idealization used below assumes that local memory can supply operands fast enough to sustain the modeled compute rate. A measured local-execution reference can instead include local memory stalls and dispatch costs in the Compute term, provided those costs divide with the work as assumed. The interpretation of the compute-time fraction follows that convention,

measuring local execution time for the measured reference and useful math for the arithmetic idealization. Each term in the Fleet Law maps directly onto a region of the C^3 landscape in figure 0.13:

- $\frac{T_{\text{compute}}}{N}$ is the Compute (C_1) term, assuming ideally divisible local arithmetic for a fixed workload distributed across N devices.
- $T_{\text{comm}}(N)$ is the Communication (C_2) term, capturing the wire transit time moving gradients, activations, and parameter shards across the network fabric.
- $T_{\text{sync}}(N)$ is the Coordination (C_3) term, capturing time consumed by barrier semantics, straggler waiting, cluster scheduling decisions, and failure recovery.
- T_{overlap} is the Co-Design ($C_1 \cap C_2$, $C_1 \cap C_3$, $C_2 \cap C_3$) term, representing communication or coordination hidden behind useful compute via techniques such as interleaving forward and backward work across pipeline stages, running transfers on separate execution streams, and writing checkpoints asynchronously.

Doubling the device count shows why the subtraction matters. The local compute term falls to $T_{\text{compute}}/(2N)$, but communication and barrier synchronization persist, and the shorter compute window leaves less room to hide transfers, so T_{overlap} shrinks as well. The step on $2N$ devices therefore takes well over half as long as the step on N (figure 0.14).

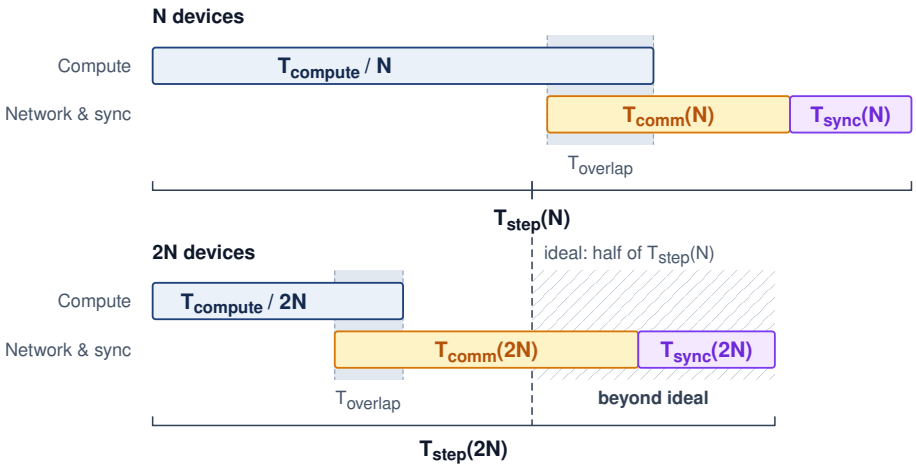


Figure 0.14: Anatomy of a Fleet Law step: Each row is one training step for the same workload, with local computation on the upper lane and communication and synchronization on the lower lane. Read the step length from the bracket, not from any single bar: overlap (gray band) removes only the transfer time that runs beneath compute, so doubling the devices halves T_{compute}/N yet leaves $T_{\text{step}}(2N)$ well past the ideal half-length step (dashed line), by the hatched span. Bar lengths are illustrative, not measured.

Weak scaling, load imbalance, memory-capacity changes, and algorithmic changes require modifying these terms rather than treating T_{compute}/N as invariant. Measurements must also separate transfer from coordination time: a barrier interval that includes an unfinished transfer cannot be charged in full to both terms. Subtract only overlap supported by the execution timeline. Equation 0.4 rewrites this decomposition as the compute-time fraction. It measures useful arithmetic under the arithmetic idealization and local execution under the measured-reference convention:

$$f_{\text{compute}} = \frac{T_{\text{compute}}/N}{T_{\text{step}}(N)} \tag{0.4}$$

This decomposition is a diagnostic instrument. When f_{compute} drops below 0.5, more than half the step lies outside the modeled Compute term; under the arithmetic idealization, that means outside useful local arithmetic. The C^3 taxonomy identifies where the time goes: if $T_{\text{comm}}(N)$ dominates, upgrade interconnects or overlap communication with computation; if $T_{\text{sync}}(N)$ dominates, consider

asynchronous methods or reduce barrier frequency; if T_{compute}/N dominates, the modeled local execution sets the step time. The **displacement of overhead** is a diagnostic heuristic: reducing one overhead can relocate cost among the three dimensions. Asynchronous training removes some coordination barriers but introduces gradient staleness, in which workers apply updates computed from an older copy of the model; pipeline parallelism can reduce some communication exposure but adds bubble time, the intervals in which pipeline stages sit idle waiting for work.

The compute-time fraction describes one configuration. A production team also needs a scalar that says whether extra devices are shortening the training step or merely increasing coordination overhead. The scaling efficiency (η_{scaling}) of the fleet is the ratio of ideal parallel step time to actual step time:

$$\eta_{\text{scaling}} = \frac{T_1}{N \times T_N}$$

where T_1 is the single-device time for the same work and $T_N = T_{\text{step}}(N)$ is the step time on N devices.

↪ The component decomposition that maps each term of $T_{\text{step}}(N)$ to measurable activities is developed in section 4.

> **Systems Perspective 1.1: Amdahl's distributed pitfall**
>
> The Fleet Law applies Amdahl's reasoning (Amdahl 1967) to a strong-scaling experiment: a fixed amount of useful work is divided across more devices while communication and coordination terms are measured for that configuration. A common shortcut reads a measured 20 percent network share as a 5× speedup ceiling, but Amdahl's bound applies only if that 20 percent of the original workload remains irreducibly serial as compute is accelerated. A network share measured at one device count is not automatically invariant; changing the partition, topology, collective algorithm, or overlap can change both its absolute time and its fraction of the step. The Fleet Law therefore diagnoses the scaling limit of a stated workload and configuration rather than asserting a universal network fraction.

Several efficiency measures have now appeared, and each answers a different question. Percent of peak, and its model-specific form MFU, compares achieved arithmetic throughput with peak throughput over a stated measurement interval; GPT-3's roughly 20 percent and Megatron-LM's 52 percent are measures of this kind. GPT-3's estimate averages over the training run, so it includes idle time within that interval; a measurement restricted to active kernels uses a different denominator. The compute-time fraction asks how much of one step belongs to the modeled local-execution term, and scaling efficiency asks how close N devices come to an N-fold speedup over one. Goodput widens the window from one step to the whole run by discounting work lost to failures and repeated after restarts; Meta's report of more than 90 percent effective training time for Llama 3 is a measure of this last kind. A fleet can score well on one measure and poorly on another, so a claim about fleet efficiency must name the measure and measurement interval it uses.

Google's ML Productivity Goodput provides a complementary view of fleet efficiency (Wongpanich et al. 2025). Despite the shared name, ML Productivity Goodput is a normalized productivity measure composed of three multiplicative factors, rather than the useful-progress rate defined with the Coordination dimension. **Program goodput** (η_{program}) measures execution efficiency during productive work; **runtime goodput** (η_{runtime}) measures productive progress retained from allocated resources after runtime overhead and lost work; and **scheduling goodput** ($\eta_{\text{scheduling}}$) measures whether a workload has its required resources available together. These factors cut across C^3 rather than extending the Fleet Law. Communication overlap can improve program goodput, while checkpointing and recovery affect runtime goodput but belong to Coordination in the Fleet Law. Productivity factors locate losses across the execution lifecycle; C^3 identifies the mechanisms responsible for them.

The Fleet Law, the compute-time fraction, and scaling efficiency together describe the time side of fleet efficiency. They separate modeled local execution from exposed communication and synchronization costs and compare the resulting step time with the single-device baseline. Fleet efficiency also has an energy side, because every exposed transfer and every idle accelerator still draws power.

The energy-scale invariant

While the Fleet Law accounts for time, the **energy-scale invariant** requires a consistent energy-accounting boundary when comparing fleet designs. What the invariant holds fixed is the accounting boundary, not any particular efficiency value. Equation 0.5 defines **fleet energy productivity** (ρ_{energy}), measured in FLOP/J, within a simplified operational boundary:

$$\rho_{\text{energy}} = \frac{O_{\text{useful}}}{E_{\text{device}} + E_{\text{cooling}} + E_{\text{network}}} \tag{0.5}$$

where O_{useful} is useful work in FLOPs. The three energy terms cover compute devices, attributable cooling, and the network fabric, without counting the same consumption twice. Host, storage, and other facility loads must be added explicitly for a complete operational estimate; embodied impacts lie outside this boundary. Comparisons must use the same boundary and useful-work definition. The resulting Pareto frontier balances minimizing T_{step} with maximizing ρ_{energy}.

↪ Power usage effectiveness, the ratio of total facility energy (including cooling and power conversion) to IT energy, is developed across data-center generations and cooling technologies in section 4.

An illustrative, communication-heavy GPT-3-class synchronization scenario connects the time and energy accounts: exposed Ring AllReduce traffic delays computation and consumes network energy.



Over InfiniBand, exposed communication fills 96 percent of this illustrative step.

> Napkin Math 1.2: The communication and energy tax
>
> **Problem**: What compute-time fraction and endpoint network-energy cost result in an illustrative GPT-3 synchronization scenario using 100 Gb/s Ethernet versus 200 Gb/s InfiniBand? Assume 1.2 seconds of local computation per worker per iteration, with no communication overlap. This chosen input defines the scenario; it is not a measured GPT-3 training-step time.
>
> **Physics**: To synchronize 175B parameters (FP16), a Ring AllReduce with many workers transmits approximately 700 GB of data per participating accelerator endpoint per iteration, using the large-worker-count approximation of twice the FP16 gradient size. This is the 16-bit case of the ring traffic described in section 6, so it is half the ring traffic of FP32 gradients and numerically equal to the FP32 gradient size quoted there.
>
> **Analysis**: The Fleet Law exposes the communication tax across interconnect choices. Over 200 Gb/s InfiniBand, an optimistic line-rate transfer of that volume takes about 28 seconds, against 1.2 seconds of computation, which yields a compute-time fraction of only 4.1 percent, meaning accelerators compute for 4.1 seconds out of every 100 seconds while the remainder is exposed communication time. Across 100 Gb/s Ethernet, the transfer stretches to about 56 seconds and the compute-time fraction falls further to 2.1 percent, leaving the devices productive for roughly 2.1 seconds out of every 100 seconds.
>
> **Energy**: The energy wall is the thermodynamic cost of the same synchronization. Charging each transmitted bit once at the InfiniBand fabric energy cost, each endpoint's gradient synchronization consumes approximately 196 J across the network fabric (at 35 pJ/bit). In a training run of 1,000,000 steps, the endpoint network movement alone accounts for about 196 MJ of energy before multiplying by the number of participating accelerators.
>
> **Systems insight**: Advertised line rate gives an optimistic transfer estimate that excludes latency, software overhead, and contention. Conversely, omitting overlap exposes all communication, so the summed step time is not a lower bound for an implementation that hides transfers. The compute-time fraction changes with local workload, partitioning, and overlap; the small fraction here diagnoses the chosen scenario, not every large fleet.

Foundational Concepts

Three architectural maps organize this book: the fleet stack locates system responsibility, C^3 and the Fleet Law diagnose execution cost, and the lighthouse archetypes test those costs across representative production workloads. The **fleet stack** arranges the fleet into eight rows grouped into four ascending bands (figure 0.15). Capabilities fixed in the lower rows, from facility cooling and RDMA fabrics up through distributed execution, constrain the serving runtimes and governance mechanisms above them.

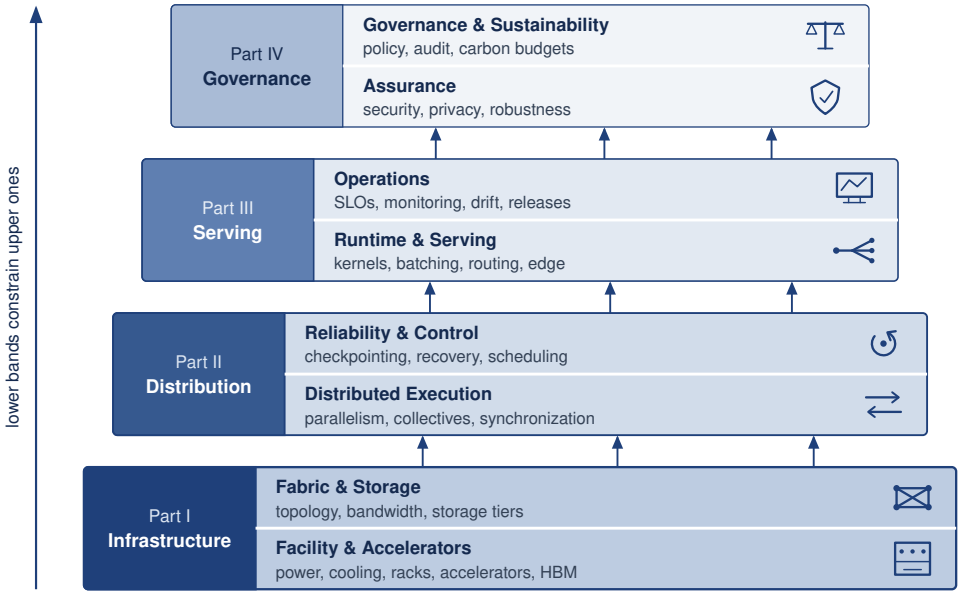


Figure 0.15: The Fleet Stack: The organizing framework for this book, eight rows grouped into four bands, one band per part. Each band is labeled with its part number and a short functional name for that part, and each row lists what it holds beside the icon that marks it in the chapter margin stacks; the Reliability & Control row, for example, is where orchestration, scheduling, and recovery live. Capabilities decided in a lower band constrain the choices available in the bands above it. The same stack, shaded to show each chapter's focus, appears beside the Purpose of every chapter.

The four bands correspond to the book's four parts: the physical substrate, distribution, deployment, and the responsible fleet. The chapter map at section 11 follows that dependency order.

Six **engineering practices** guide decisions at every band of the stack: instrument first, reserve headroom for recovery and tail latency, expect bottlenecks to migrate, treat failure as steady state, compound small efficiency gains across the fleet, and co-design hardware with algorithms. For example, faster accelerators can expose a network bottleneck; instrumentation identifies that migration, and hardware co-design aligns the fabric with the workload. The practices describe how a fleet engineer works. The principles of distributed ML systems describe what the physics of the fleet makes true, whatever the practice. Each part of this book establishes its share of those principles; section 33 gathers them into six, one or two for each part, and pairs each with the practice it demands.

Three systems archetypes

Abstract frameworks become concrete through specific workloads. Three lighthouse archetypes at scale recur where they illuminate a chapter's central constraint; no chapter must force all three into its argument. Together they sample distinct C^3 regimes by stressing communication, coordination, or compute in different ways.

Archetype A (GPT-4/Llama-3)

GPT-4 and Llama-3 are autoregressive transformer architectures that generate text one token at a time. At single-accelerator scale, autoregressive language models are memory-bandwidth probes; at the scale of hundreds of billions of parameters, and in some proprietary systems potentially more, training demands ExaFLOP/s of sustained compute distributed across thousands to tens of thousands of accelerators, while serving requires memory bandwidth sufficient to load billions of weights for every generated token. The fleet challenge is partitioning very large models across accelerator fleets using 3D parallelism (data, tensor, and pipeline) without exposing enough gradient or activation traffic to make the network the binding bottleneck. Archetype A therefore probes

the communication dimension of C^3, although its actual dominant term depends on the model, partition, topology, and degree of overlap.

Where a chapter needs a concrete instance, Archetype A is a 175B-parameter dense transformer of the GPT-3 class, chosen because its configuration is published while GPT-4's is not, trained with mixed precision and the Adaptive Moment Estimation (Adam) optimizer. Its training state occupies 16 bytes per parameter (BF16 weights and gradients, FP32 master weights, and two FP32 Adam moments), or 2.8 TB; a resumable checkpoint omits the gradients and needs 14 bytes per parameter, or 2.45 TB. The reference cluster is 1,024 H100 GPUs, arranged as 128 nodes of 8 accelerators each. A chapter that studies a larger cluster or a different model says explicitly how it varies this reference.

Archetype B (DLRM at Scale)

DLRM is the deep learning recommendation model that Meta published as a reference architecture for personalized content ranking. Unlike LLMs, which are dominated by dense matrix multiplications, recommendation models derive their capacity from massive embedding tables, sparse lookup structures that map billions of user and item features into dense vectors. A single production DLRM-style model may hold 10 TB or more of embedding-table parameters, far exceeding any single accelerator's memory. The fleet challenge is sharding these embedding tables across hundreds of nodes while processing on the order of 10 million queries per second (QPS) with <100 ms tail latency, all while coordinating all-to-all exchanges between embedding shards and dense layers. There are $\mathcal{O}(N^2)$ potential communicating pairs, but byte volume and contention depend on the request batch, partitioning, and network topology. In the C^3 taxonomy, Archetype B stresses coordination: sparse feature routing, shard placement, request scheduling, and embedding-update consistency determine whether the all-to-all traffic can be served within tail-latency limits.

Archetype C (Federated MobileNet)

MobileNet is a family of efficient convolutional neural networks designed for on-device inference under tight power and memory budgets. In a federated learning setting, MobileNet instances train locally on millions of heterogeneous smartphone-class devices, whose power budgets span roughly 2 W to 10 W (a few watts sustained, with brief bursts toward 10 W), while raw training data remains on the device. Microcontroller-class sensors that run on hundreds of kilobytes of memory and milliwatts of power lie at an extreme below this archetype. The constraint regime is qualitatively different from the data-center archetypes: power budgets are measured in watts rather than megawatts, and privacy or policy constraints can prohibit centralized data aggregation. In the C^3 taxonomy, Archetype C probes the per-device compute envelope: local execution must fit within the device's power, memory, and thermal limits. That local constraint does not determine the bottleneck of a federated round. Uploading updates can expose communication limits, while selecting available participants and waiting for their results can expose coordination limits. The fleet challenge is coordinating model updates across millions of such compute-constrained, unreliable devices using federated averaging, which periodically averages device updates at a coordinator. Data distributions that are not independent and identically distributed (i.i.d.) and intermittent participation affect the resulting learning process; convergence claims must state the assumptions under which they hold.

Read the three archetypes as constraint probes, not as a catalog of model families. The LLM case asks whether dense synchronization can keep thousands of accelerators useful, the DLRM case asks whether sparse feature routing can meet tail-latency budgets, and the federated MobileNet case asks whether local device constraints can be coordinated into a statistically coherent update. Table 0.3 summarizes the three canonical workloads tracked throughout this book.

Table 0.3: Lighthouse archetypes at scale: The three canonical workloads in representative diagnostic regimes, with the fleet-scale challenge each raises. These are constraint probes, not invariant bottleneck assignments; workload, partitioning, topology, and overlap determine the binding cost. The MobileNet row describes the local device envelope, not the bottleneck of a complete federated round.

Archetype	C^3 Diagnostic Regime	Fleet Challenge
Archetype A (GPT-4/Llama-3)	Communication (fleet-wide)	Partition hundreds of billions of parameters, and potentially larger proprietary models, across thousands to tens of thousands of GPUs using 3D parallelism without the network becoming the bottleneck.
Archetype B (DLRM at Scale)	Coordination (routing and placement)	Shard 10 TB+ embedding tables across hundreds of nodes; process millions of QPS with <100 ms tail latency while managing sparse feature routing, shard placement, and exchanges among $\mathcal{O}(N^2)$ potential pairs.
Archetype C (Federated MobileNet)	Compute (per-device envelope)	Coordinate learning across millions of compute-constrained, unreliable edge devices using federated updates; raw data cannot leave the device.

The Structure of This Textbook

This textbook organizes around the fleet stack, progressing from the physical substrate through the logic of distribution to societal governance. The chapter sequence is a dependency map rather than a topic inventory. Silicon, cooling, and network limits constrain training partitioning; partitioned algorithms create fault-tolerance and orchestration obligations; and those mechanisms support production operation. Requirements also flow in the other direction: security, governance, and service targets constrain which lower-layer designs are acceptable. Part I builds the physical cluster substrate, Part II coordinates distributed execution and fault recovery, Part III optimizes deployment and inference at scale, and Part IV enforces governance, security, and sustainability invariants (figure 0.16).

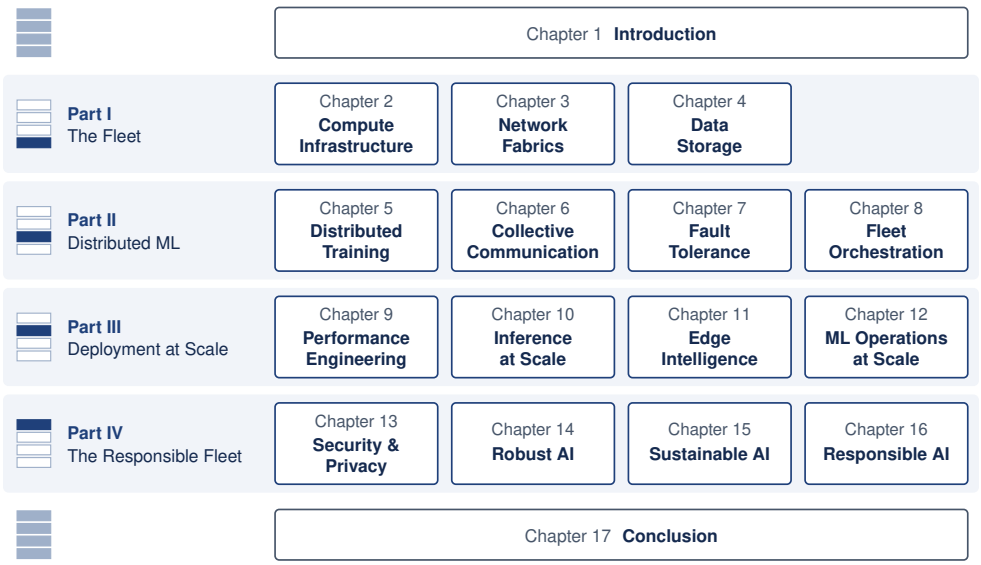


Figure 0.16: The chapter roadmap: The chapters in reading order, top to bottom. The introduction frames the book; the four parts then climb the fleet stack of figure 0.15 from physical infrastructure through distribution and deployment to governance, as the small stack beside each part shows by lighting that part's band; the conclusion gathers the principles of all four parts.

The infrastructure arc begins with the impediment no algorithm can ignore: no single server has enough memory, power, cooling, or I/O to train the largest models. Chapter 11 therefore starts with high-density silicon and facility physics, chapter 11 turns isolated machines into a cluster-scale gradient bus, and chapter 13 completes the substrate by keeping accelerators fed without letting storage become the hidden bottleneck.

The distribution arc begins once the physical fleet exists and the coordination tax becomes unavoidable. Splitting math across machines creates two new problems: replicas must exchange state fast enough to behave like one optimizer, and failures become routine rather than exceptional. Chapter 15 develops partitioning strategies for models with hundreds of billions to trillions of parameters, chapter 8 explains the communication primitives that bind independent nodes into a coherent computer, chapter 12 treats recovery speed as more important than individual-node uptime, and chapter 24 manages the multi-tenant cluster where those jobs must be placed, isolated, and rescheduled.

The deployment arc shifts from training a model to serving it economically. Once a model reaches production, the binding question is no longer only time-to-train; it is whether latency, utilization, and lifetime serving cost stay inside the operating envelope. Chapter 17 measures which execution term limits a replica before applying fusion, precision, and compilation, chapter 6 turns that measured envelope into admission, batching, and routing policy for millions of users, chapter 16 moves learning onto phone-class devices whose memory, battery, and thermal budgets decide what adaptation they can afford, and chapter 23 develops the shared controls (registries, release gates, monitoring, and cost ledgers) that govern hundreds of models as one fleet.

The governance arc treats responsibility as an engineering layer rather than an afterword. At global scale, technical bugs become societal hazards: adversaries can poison data or extract weights, open-world inputs can break brittle models, energy use becomes a fleet constraint, and governance failures can turn technical capability into social harm. Chapter 20, chapter 26, chapter 20, and chapter 40 develop those obligations as system properties that must be designed, measured, and operated.

Fallacies and Pitfalls

The following fallacies and pitfalls capture architectural mistakes that waste development resources, miss performance targets, or deploy systems critically mismatched to their operating constraints. Each represents a pattern observed repeatedly in the transition from single-machine ML to the machine learning fleet.

Fallacy: *Faster accelerators always shorten the training step.*

An accelerator upgrade that changes only arithmetic throughput shrinks the T_{compute}/N term of the Fleet Law while leaving the other costs unchanged. In the no-overlap scenario of notebook 1.2, local computation takes 1.2 seconds per iteration while the exposed Ring AllReduce over 200 Gb/s InfiniBand takes about 28 seconds. Accelerators 2× faster shorten that step by only 2.1 percent. The scenario is deliberately communication-heavy, but the direction of the effect is general: relieving the Compute axis tends to expose Communication or Coordination as the binding cost, the displacement of overhead described with the Fleet Law. A real upgrade may also change memory capacity, transfer rates, or available overlap. An accelerator purchase must therefore be judged against the fleet's measured step decomposition, not against the datasheet ratio.

Pitfall: *Assuming that reliable components make a reliable job.*

A per-GPU MTBF of 50,000 hours describes a part that rarely fails. A synchronous job, however, needs all of its parts at once. Notebook 1.1 shows that a job spanning 25,000 GPUs has an MTBF of about 2 hours, or roughly 12 interruptions per day. Component reliability characterizes one part; the reliability gap (section 10) characterizes the job, whose availability decays exponentially with the number of parts it requires simultaneously. Recovery practices that suit a single machine, such as manual restart and infrequent checkpoints, fail at fleet scale even though no individual part has become less reliable.

Fallacy: *Edge deployment efficiency requirements are simply scaled-down versions of cloud requirements.*

This **"Cloud-Lite" fallacy** treats edge systems as resource-constrained cloud systems. Edge devices face qualitatively different constraints. For example, an autonomous vehicle traveling at 120 km/h covers 3.33 m during every 100 ms of processing delay, adding that distance to its reaction distance. While cloud deployments scale to kilowatts, a phone-class device of the kind Archetype C models sustains only a few watts. A cloud-optimized model with 95 percent accuracy and 50 ms latency might be unusable on an edge device where thermal throttling increases latency to 200 ms and drains the battery in under an hour.

Pitfall: *Treating a compute budget as a wall-clock performance prediction.*

This pitfall, sometimes called the linear scaling fallacy, confuses useful computational work with the time required to execute it. The empirical loss relation $\mathcal{L}(X) = A_{\mathcal{L}} X^{-\alpha_{\text{scale}}} + C_{\mathcal{L}}$ estimates model quality within a validated regime; the Fleet Law separately estimates the time needed to perform that work. A team distributing a fixed training workload might predict a 3× improvement but achieve only 1.8× if coordination and communication overhead consumes 40 percent of the scaled step time. This shortfall does not by itself invalidate a loss scaling law. It shows why a resource plan needs both a model-quality estimate and a measured execution-cost estimate.

Summary

Fleet planning now separates two questions that single-machine practice could merge. Scaling laws answer how much model size, data, and useful computation a quality target requires; the Fleet Law answers how long a fleet takes to execute that work. Single-machine diagnostic skills remain necessary at that scale, but the engineering boundary expands, because a fleet can lose useful progress to network transfers, inconsistent shared state, or failed participants even when its local kernels are efficient. C^3 distinguishes compute, communication, and coordination costs, while the fleet stack locates the decisions that shape them. With these tools, a resource plan can be traced through to execution behavior, subject to the reliability, energy, and governance constraints of the mission.

Key Takeaways: Scale makes a new machine

- **More devices change the engineering boundary**: Distributing work introduces shared network and failure dependencies. Local performance remains necessary, but fleet decisions must also account for synchronization, recovery, power delivery, and governance across that wider boundary.
- **Communication can consume the speedup**: Dividing fixed work across accelerators shortens ideal local compute time while exposing communication and coordination costs. A 175B-parameter model can move hundreds of gigabytes of gradients per step, so scaling gains depend on the workload, fabric, and overlap.
- **Failure becomes steady state**: In the modeled 25,000-GPU job, independent component failures interrupt tightly coupled training every few hours despite long per-GPU lifetimes. Checkpointing, recovery, and observability must therefore be designed into normal operation.
- **Scaling laws set the demand; the Fleet Law sets the price**: Within a validated regime, loss falls as a power law in compute, data, and parameters, so each equal quality gain needs disproportionately more resources, and compute-optimal plans grow parameters and tokens together. Those laws say how much work is worth buying; the Fleet Law says how long the fleet takes to deliver it. Task-level evaluation, not loss alone, establishes whether the predicted gain justifies the resources, and training-compute optimality alone does not establish the lowest lifetime serving cost.
- **C^3 extends local intuition**: The Data, Algorithm, Machine lens describes the workload and substrate; Compute, Communication, and Coordination expose the costs of fleet execution. The Fleet Law connects useful local work to transfer, synchronization, and overlap costs as device count changes.

- **Impact needs a control plane**: Foundation-scale systems amplify security, privacy, fairness, and policy failures across large user populations. Governance is not an appendix to infrastructure; it is the mechanism that decides what the fleet is permitted to optimize and deploy.

The premise of this book is that scale can move the binding constraint outside the node. A local speedup is therefore evidence about one component, not yet evidence that the fleet makes more useful progress. Engineering judgment requires tracing that change through communication, coordination, and the mission's operating constraints before accepting it as an improvement.



What's Next: From requirements to silicon

The scaling laws set how much work a frontier model demands, the walls of the scale moment mark where that demand meets physical limits, and the Fleet Law prices each distributed step. Those requirements say what the fleet must sustain, not what hardware can sustain it. Chapter 11 turns to that hardware. It begins where the scaling laws leave a growing model, too large for one accelerator's memory, and climbs from the accelerator through the node and rack to the pod, asking at each scale which physical resource runs out first: memory bandwidth, power and cooling, communication bandwidth, or failure exposure. Those limits form the Facility and Accelerators row at the base of the fleet stack, the substrate on which every later chapter builds.

I

THE FLEET

Part I

Fleet Principles

Part I studies the warehouse-scale form of the machine learning fleet, where the network is the bus, power density limits deployment, and component failures are routine at scale. The broader fleet also includes geographically distributed serving systems and heterogeneous edge devices, whose constraints appear later in the book. The demand that this part must meet is already set. The scaling laws of section 6 reward more parameters, more training tokens, and more compute together, so each further gain in quality asks the fleet for more memory, more arithmetic, more bytes moved between machines, and more data stored and read. Part I builds the physics of supply: the silicon, the wires, the cooling systems, and the storage hierarchies that make distributed ML possible. The focus shifts from the single accelerator to the data-center-scale machine, where the engineering question is no longer how to compute on one device but how to move energy and information at a scale that challenges the limits of the physical infrastructure.

At this scale the individual accelerator becomes one component of a larger, tightly coupled system. The principles of the fleet are therefore not best practices for cluster management. They are constraints, most of them physical, that dictate what kind of models can be trained and how they can be served. From the efficiency of specialized silicon and the heat a rack can shed to the bisection bandwidth of the network fabric, these constraints define the boundaries of the Infrastructure band of the fleet stack, the two rows (Facility and Accelerators, Fabric and Storage) on which every other part of the book rests. The C^3 taxonomy tracks costs across Compute, Communication, and Coordination. An optimization can reduce total execution time while shifting which cost dominates; reducing local compute, for example, can expose communication that was previously hidden. The engineering obligation is to measure the complete path rather than assume that a local saving yields the same fleet-wide gain.

The principles below preview the constraints that Part I makes concrete through compute infrastructure, network fabrics, and storage, in the order those chapters develop them. Their implications name some mechanisms developed later in the book; those names are signposts, not prerequisites for reading this part. The first constraint applies before any machine is assembled, because the choice of accelerator decides how much of its silicon and power go to useful arithmetic.



Principle 1: The generality tax

Invariant: For workloads with stable computation patterns, specialization can improve performance per watt by reducing general-purpose overhead, while also reducing programmability and workload flexibility.

$$\rho_{\text{energy,specific}} \gg \rho_{\text{energy,general}} \quad \text{for a fixed power budget}$$

Here, ρ_{energy} denotes useful computation per unit energy; the comparison illustrates the potential advantage for a workload suited to the specialized design.

Implication: The trajectory from CPU to GPU to Tensor Processing Unit (TPU) to fixed-function ASIC is a workload-dependent architecture trade-off, not a universal physical law. Each step can trade programmability for efficiency, and the fleet architect must choose the right point on this curve for each workload.

A specialized accelerator still holds only as much model state as its memory allows, and that capacity gives the first reason to divide a model.

Principle 2: The memory capacity gap

Invariant: Frontier model memory requirements have grown faster and more irregularly than single-accelerator HBM capacity.

Implication: When a model and its training state exceed one device's memory, the system must divide that state across devices. Part II develops the parallelism strategies for doing so: tensor parallelism divides individual operations, and pipeline parallelism assigns groups of layers to different devices. Complementary data parallelism distributes training examples across model replicas. Part I establishes the capacity and communication constraints those strategies must respect.

Dividing a model across more accelerators packs more of them into each node and rack, and every operation they perform eventually becomes heat that the facility must remove.

Principle 3: The thermodynamic limit

Invariant: Irreversible computation and data movement dissipate electrical energy as heat; at data-center scale, the practical limit is the rate at which that heat can be removed.

$$\dot{Q}_{\text{IT}} \leq \dot{Q}_{\text{remove,max}}(\text{facility}, \text{cooling configuration})$$

where $\dot{Q}_{\text{IT}}$ is the heat produced by IT equipment and $\dot{Q}_{\text{remove,max}}$ is the maximum heat-removal rate of the installed facility and cooling configuration.

Implication: A rack can operate only while its heat output remains within the installed cooling system's capacity. As rack power density rises, facilities may need to reduce rack density, augment air cooling, or adopt liquid cooling to keep heat removal within that configuration-specific limit.

At the rack level, the same heat budget becomes a density constraint.

Principle 4: The power density wall

Invariant: Cluster scaling is constrained by thermal dissipation limits (watts per rack) and cooling capacity, not just silicon area or floor space.

Implication: Cooling must support the rack's sustained heat output and heat flux. Engineered air cooling remains viable for configurations designed for its airflow requirements; denser configurations may require liquid cooling. The requirement follows from the server and facility design, not cluster size alone.

Once a model is divided across devices, the network becomes part of the execution path. The time to move a single message has a structure of its own, which determines whether a transfer is limited by fixed startup cost or by bandwidth.

Principle 5: The bandwidth-latency trade-off (α-β model)

Invariant: In the latency-bandwidth model, communication time combines fixed startup latency (α) with the transfer time for a message of size n at effective bandwidth β.

$$T(n) = \alpha + \frac{n}{\beta}$$

Implication: Small messages (for example, routing metadata or control signals) are latency-bound; large messages (for example, gradients) are bandwidth-bound. Optimization strategies must match the regime: fuse small messages to amortize α, compress large messages to reduce n.

The α-β model prices one message on one path. When every worker communicates at once, those messages compete for the links that join one half of the cluster to the other, and the capacity of that cut bounds their aggregate rate.

Principle 6: The bisection bandwidth theorem

Invariant: Communication that crosses a network cut is limited by the aggregate bandwidth of that cut. For traffic that must cross between two halves of a cluster, the minimum bisection bandwidth bounds the achievable transfer rate.

Implication: Synchronized training requires bisection bandwidth commensurate with the traffic crossing the fabric. A collective operation coordinates communication among a group of workers; AllReduce, for example, combines their contributions and returns the result to every worker. Part I explains how network topology limits this traffic; Part II develops the collective algorithms that generate it.

A fabric that carries every exchange on time still helps only if the training pipeline can keep the accelerators fed.

Principle 7: The I/O wall

Invariant: When storage throughput cannot deliver training data as fast as accelerators consume it, GPUs idle regardless of their computational power.

$$\text{Utilization} = \min\left(1,\ \frac{\text{BW}_{\text{storage}}}{N_{\text{GPU}} \times R_{\text{consumption}}}\right)$$

where $\text{BW}_{\text{storage}}$ is aggregate storage bandwidth, N_{GPU} is the number of accelerators, and $R_{\text{consumption}}$ is each accelerator's data-consumption rate.

Implication: A storage system that was adequate for 8 GPUs can become the bottleneck at 64 if its provisioned throughput cannot meet the higher aggregate demand. The I/O wall scales with the number of accelerators: at a fixed per-device consumption rate, every GPU added raises the throughput floor that storage must sustain. Without matching capacity, the data pipeline can become the limiting factor.

Meeting that demand requires a hierarchy rather than a single undifferentiated storage pool.

Principle 8: The storage hierarchy principle


Invariant: Storage hierarchies are designed so that tiers farther from the accelerator typically trade higher access latency and lower per-stream bandwidth for greater capacity and lower cost per byte; aggregate throughput still depends on provisioning and parallelism.

Implication: The systems engineer's task is to ensure that the right data is on the right tier at the right time. Data format choices, caching strategies, prefetch buffer sizing, and tiering policies all exist to manage movement upward through the hierarchy so that accelerators do not starve.

These constraints make the fleet a first-class engineering object. Following the introduction's account of why single machines no longer suffice, Part I builds the physical machine from the ground

up: the silicon, power, and cooling systems of the AI data center, the network fabrics that connect the fleet, and the storage hierarchy that feeds the training pipeline and preserves its checkpoints. Each chapter sets one or more terms of the Fleet Law (equation 0.3). Compute infrastructure sets the per-device rate behind T_{compute}/N and the failure exposure that later surfaces in $T_{\text{sync}}(N)$, network fabrics set $T_{\text{comm}}(N)$ and the barrier tail, and storage adds the input stalls and checkpoint pauses that the step pays whenever prefetching and asynchronous writes cannot hide them. Together, these chapters fix the physical rates within which the partitioning, communication, and recovery mechanisms of Part II must work, for each of the lighthouse archetypes (section 11) traced across this book.

Compute Infrastructure

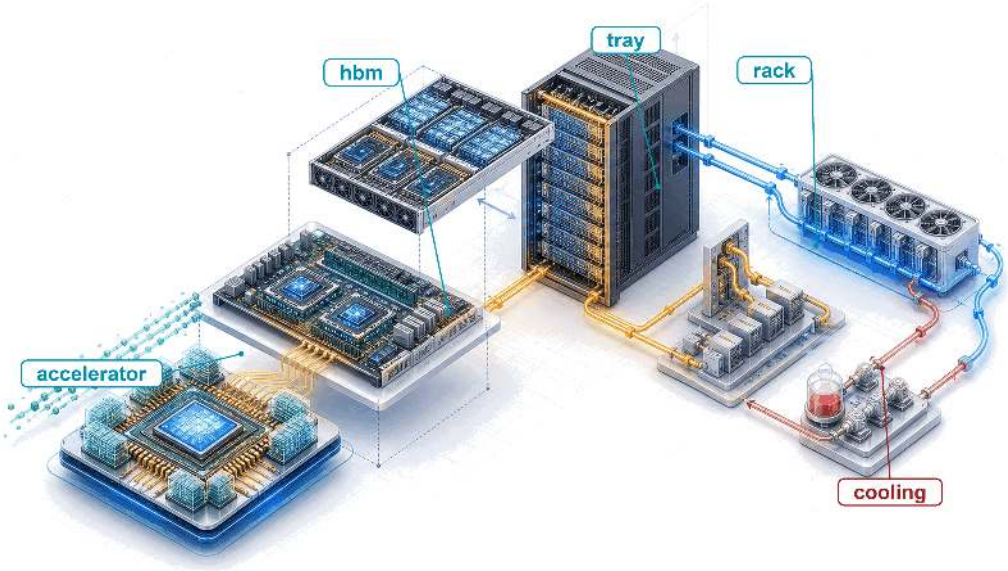

Purpose

Why does infrastructure, not algorithms alone, determine who can participate in advancing machine learning at scale?

Machine learning systems have a physical reality beyond their code. Public algorithms do not make large-scale training equally accessible: executing them requires power, cooling, memory, and communication capacity that organizations must build and sustain. A model that outgrows one machine turns a local resource problem into a shared infrastructure commitment. Buying more accelerators adds arithmetic capacity, but it also adds data transfers, heat, and components whose failures can interrupt collective work. The useful capacity of the fleet depends on whether those demands can be met together. Hardware that appears attractive in isolation may spend much of its deployment waiting for data or operating below its advertised speed. A facility that can house equipment may lack the electrical or cooling capacity to run it at the intended density. These mismatches consume both capital and operating budgets while reducing the experiments that can finish on schedule. Infrastructure decisions also outlast individual models, so an organization must weigh the efficiency of specialization against the flexibility needed for future workloads. Single-machine performance remains part of that judgment, but multiplying it by the number of machines cannot establish what the complete installation will deliver. Participation at scale therefore depends on turning purchased hardware into sustained, usable capacity within physical and financial limits. In C^3 terms, the physical substrate sets the compute and communication bounds within which the fleet must coordinate useful work.

Learning Objectives

- Compare GPU, TPU, and ASIC dataflows to explain specialization across the accelerator spectrum
- Apply roofline analysis to distinguish compute-bound from memory-bandwidth-bound phases of training and inference
- Calculate token latency or memory budgets from accelerator memory capacity, bandwidth, precision, and model state size
- Match tensor, pipeline, and data parallelism to the available interconnect bandwidth hierarchy
- Evaluate rack and pod designs using power density, cooling limits, topology, and facility reliability constraints
- Select accelerator infrastructure using sustained throughput, power constraints, workload fit, and deployment cost

The Infrastructure Walls

The scaling laws of section 6 are why demand outruns any single device. Loss falls predictably as parameters, training tokens, and compute grow together, so each step up in capability multiplies both the memory a model occupies and the arithmetic its training consumes; a GPT-3-class model already needs several accelerators merely to store its FP16 weights. A model that exceeds one accelerator's memory capacity forces a hardware decision before training begins. Adding accelerators supplies capacity, but also creates transfers between devices, increases power demand, and couples progress to more components that can fail. The familiar single-node compute and memory limits therefore become inputs to fleet design. Figure 0.17 maps these four recurring physical constraints across escalating physical scales, from an eight-GPU node to a 25K-accelerator fleet. Memory bandwidth, rack power, pod communication, and fleet failure exposure provide the examples; the workload and configuration determine which constraint binds at each scale. These are the memory, energy, and network walls of the scale moment and the fleet's reliability gap, seen from the hardware that imposes them. Because this chapter studies the hardware, it names each constraint by the physical resource that runs out, and it uses these four names from here on: the memory wall, the power wall (the energy wall as power delivery and heat removal), the communication wall (the network wall as link bandwidth), and the reliability wall (the reliability gap as a failure interval).

The reliability wall starts from a per-GPU failure figure that section calls an MTBF. A failed GPU is replaced rather than repaired, so this chapter calls the per-device figure a mean time to failure (MTTF) and reserves mean time between failures (MTBF) for nodes and fleets, which keep running through repeated failures and replacements. The number is the same; only the label records what is being counted.

↩ The memory, network, and energy walls of the scale moment are established in section .

The 175B model anchors this progression. It is the chapter's running instance of Archetype A (GPT-4/Llama-3), a GPT-3-class dense transformer trained with mixed precision and the Adaptive Moment Estimation (Adam) optimizer, whose reference training cluster is 1,024 H100 GPUs in 128 eight-GPU nodes. Accelerator selection establishes the compute rate, memory capacity, and power envelope that a fleet can buy. The node must connect enough of those accelerators to hold and execute the workload; the rack must power and cool them; the pod must sustain communication and survive component failures. This is the hardware contribution to C^3: useful fleet compute depends on the communication and coordination costs created at each physical boundary.

↩ The three fleet workload archetypes are established in section 11.

↪ The running model's parameters and reference cluster are developed in section 4.

The chapter climbs the same scale ladder, so the four walls arrive in the order the figure reads, though not one wall per section. The memory wall begins at the accelerator and is developed in section 3. The communication wall first appears inside the node, where section 7 measures the cliff between local and inter-node links, and returns at pod scale in section 11. The power wall binds at the rack (section 8), and the reliability wall accumulates from node health (section 8) through facility controls to the fleet-scale failure interval of section 11.

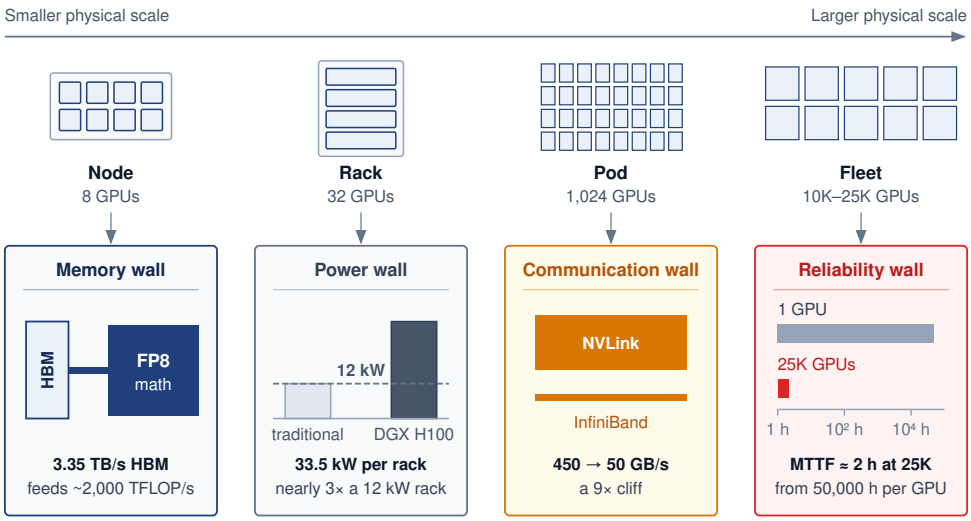


Figure 0.17: The four infrastructure walls: Read left to right, the examples illustrate four constraints at increasing physical scales; the workload and configuration determine which one binds. The node compares 3.35 TB/s of HBM3 with about 2,000 TFLOP/s of FP8 arithmetic; the four-node DGX H100 rack draws 33.5 kW; the pod compares per-direction NVLink bandwidth with one InfiniBand port, a ninefold budget gap; and the fleet assumes independent GPU failures, reducing a 50,000-hour per-GPU mean time to failure (MTTF) to about 2 hours between failures at 25K GPUs.

The Accelerator

The progression begins with the accelerator, because every wall above it is measured against the rates one device can compute, store, and draw. An accelerator purchase commits the fleet to a workload and software stack for longer than one experiment. A research group changing model operations frequently needs programmability; a service executing a stable computation at sustained volume can justify more specialization. The familiar trade-off between control flexibility and arithmetic efficiency matters here because an architectural mismatch is replicated across the fleet. Comparing programmable and specialized accelerators therefore starts with how much of the workload and compiler stack can remain stable over the deployment's lifetime.

Systems Perspective 2.1: The generality tax

General-purpose CPUs allocate silicon to caches and control logic as well as arithmetic. Branch predictors, reorder buffers, and instruction decoders support code with irregular control flow and data access. Matrix multiplication has a more regular schedule, so some of that flexibility contributes little to its dominant computation. The generality tax (principle 1) is the area and energy devoted to capabilities outside the dominant workload.

Specialized accelerators reduce this tax by replacing general-purpose control with a dataflow matched to the workload. In the approximate shares of figure 0.18, the arithmetic fraction of the die rises from roughly 5–10 percent on a CPU to 50–60 percent on a GPU, 70–80 percent on a Tensor Processing Unit (TPU), and over 90 percent on a custom application-specific integrated circuit (ASIC). The shares mark a direction rather than measured proportions for any product. The selection question is how much of the complete workload can use the specialized hardware.

The transition from general-purpose to specialized silicon follows a logical progression. At one end of the spectrum, GPUs retain substantial programmability while providing 10–100× the matrix throughput of CPUs. At the other end, custom ASICs hardwire a specific dataflow for maximum efficiency at the cost of flexibility.

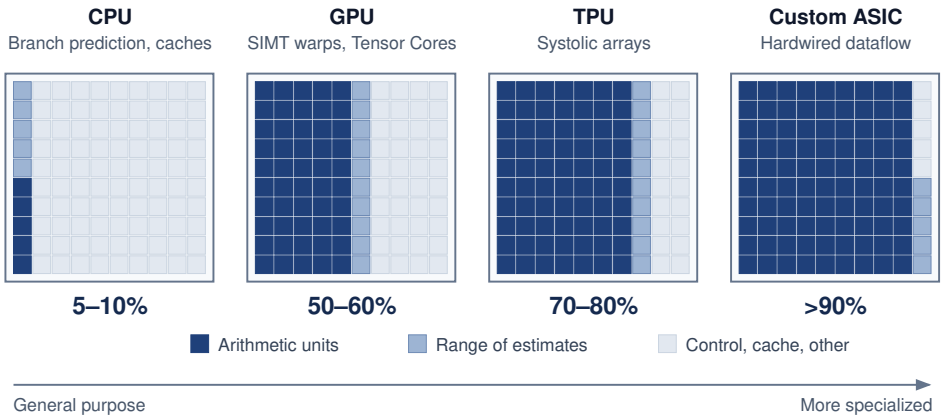


Figure 0.18: The accelerator spectrum: Each die is drawn as a grid of 100 cells divided between arithmetic units (dark) and control, cache, and other logic (light), with the medium cells marking the spread of each approximate, illustrative share. Read left to right, the arithmetic share grows from 5 to 10 percent on a CPU to over 90 percent on a custom ASIC, because hardwired dataflow replaces instruction fetch, decode, and scheduling; each step buys throughput per watt by narrowing the range of model architectures the silicon runs well.

Understanding *where* each architecture falls on this spectrum, and *why*, is essential for selecting hardware that matches a given workload. The spectrum is not a ranking from "bad" (general-purpose CPU) to "good" (custom ASIC), but a continuum of trade-offs where each position offers the best match for a different combination of workload characteristics and deployment constraints.

GPUs represent the first major step away from general-purpose computing toward massive parallelism while retaining programmability. An NVIDIA H100, for example, contains 16,896 CUDA cores organized into 132 streaming multiprocessors (SMs). Each SM can keep many threads resident under the **single instruction, multiple threads (SIMT)**[1] execution model, but only a subset issues instructions in a given cycle. Unlike a CPU, which optimizes for single-thread latency, a GPU hides memory latency by maintaining thousands of threads in flight and switching between them when one stalls on a memory access.

The programmer writes a single function (a *kernel*), and the hardware maps it across a massive grid of threads. This model is flexible enough to run any mathematical kernel, from convolutions to attention mechanisms to custom loss functions, while providing orders of magnitude more throughput than a CPU for data-parallel computation.

The trade-off is that irregular, branch-heavy code runs poorly because divergent threads within a warp (a group of 32 threads that execute in lockstep) must execute serially. When threads in the same warp take different branches of an if-else statement, the hardware must execute both branches sequentially, disabling the threads that took the other path during each branch. For ML workloads, this divergence penalty is usually small because neural network operations have highly uniform control flow: every element in a matrix multiplication follows the same computation path.

TPUs specialize the matrix dataflow while retaining other units for operations that do not map onto it. Google's Tensor Processing Units use a **systolic array**[2] architecture: a fixed grid of multiply-accumulate (MAC) units where data flows between neighboring cells in a regular, wave-like pattern. Instead of fetching and decoding a separate instruction for each MAC, the array passes operands and partial results between cells on a regular schedule. Local reuse reduces instruction and memory traffic within the matrix computation. The complete accelerator still needs control, data movement, and execution of nonmatrix operations.

The cost of this efficiency is reduced programmability. Models must be compiled through Accelerated Linear Algebra (XLA), which maps high-level operations onto the fixed dataflow. Workloads with irregular control flow or dynamic shapes may not map well to this architecture, and the compilation process itself can be time-consuming (minutes to hours for complex models), which slows the iteration cycle during model development.

[1] **SIMT (single instruction, multiple threads)**: NVIDIA coined the term to distinguish its model from classical single instruction, multiple data (SIMD): each thread keeps its own registers and may branch independently, and the hardware, not the programmer, masks lanes when a warp diverges. That convenience has a price on irregular ML operations such as sparse attention or dynamic expert routing, where masked lanes sit idle while the other path executes.

[2] **Systolic array**: From Greek *systole* (contraction), the name describes data pulsing through a grid of processing elements in a heart-like rhythm. Kung and Leiserson (1979) proposed the design for VLSI chips whose limiting resource was memory access rather than logic (Kung 1982): each operand fetched once is reused by every cell it passes. That ratio of computation to memory traffic is exactly what matrix multiplication at ML scale rewards.

The programming model distinction between GPUs and TPUs has practical implications for organizational decisions. A research team that frequently adds custom operations, such as new attention patterns or activation functions, needs a path to implement them as kernels without waiting for compiler support, and must check how each platform expresses and optimizes those operations. A team running a stable computation at scale can place more weight on sustained utilization and compilation cost amortized over many runs. CUDA kernel support and XLA graph compilation offer different development paths, but neither establishes a utilization advantage without evaluating the workload and implementation. Software fit belongs in the hardware comparison because unsupported or poorly mapped work can leave specialized arithmetic idle.

Example 2.1: The TPU origin story

Scenario: In 2013, Google projected that if users spoke to Android phones for 3 minutes per day using voice search, handling the inference load on general-purpose CPUs would require doubling data center compute capacity at prohibitive cost (Jouppi et al. 2017).

Diagnosis: Standard CPU architectures paid a heavy generality tax, spending significant silicon area and power on out-of-order execution, branch prediction, and complex caches rather than matrix multiplication throughput.

Systems lesson: Hardware specialization is economically justified when a workload is massive, stable, and dominated by a single mathematical kernel (MatMul). The TPU v1 hardwired a 256×256 systolic array to deliver 92 TOPS (INT8) within a 75 W footprint, establishing custom ASIC accelerators in production serving infrastructure.

Custom ASICs occupy the specialized end of the spectrum, where the economics of silicon can justify giving up much of the general-purpose programmability. When an organization runs a stable workload at enormous scale, designing a chip specifically for that workload may become economically rational. A custom ASIC can improve energy per operation and sustained utilization on its target workload by removing features that computation does not require.

Tesla's Dojo D1 chip, for example, is optimized for the spatial and temporal structure of video-based vision models. Its hundreds of tightly coupled processing nodes are designed around the dataflow needs of Tesla's vision pipeline, with on-chip SRAM sized to keep spatial tiles close to the compute units. This reduces the repeated round-trips to off-chip memory that a general-purpose GPU would require for the same computation.

AWS Trainium takes a different approach, targeting the broad category of Transformer training rather than a single model. Trainium systems combine compiler-managed memory scheduling with hardware-assisted collective communication, so common training patterns such as tensor-parallel synchronization and data-parallel reductions can be optimized in the accelerator fabric rather than handled entirely by host software.

The risk of custom silicon follows from the same specialization. A change in the dominant model architecture can reduce the value of a fixed dataflow if the new operators, tensor shapes, or memory demands map poorly onto it. Sharing matrix operations across model families can preserve some of that investment, so a change from convolutional neural networks (CNNs) to Transformers does not by itself make an accelerator unusable. The forecasting window is long: a new ASIC typically takes 2–3 years from conception to deployment and then serves for several more, so the design decision must anticipate which operations will remain useful years after the workload was profiled, and how much flexibility is needed for the rest. In 2015, few would have predicted that attention-based Transformers would replace CNNs as the dominant architecture within five years, a span of only about two ASIC design cycles.

Custom silicon is therefore a bet on workload stability, and the organizations that make this bet are typically those with enough scale to justify the $50–$200 million development cost and enough workload volume to amortize the per-chip NRE (nonrecurring engineering) cost across millions of chips. Google can justify the TPU's development cost because high-volume services such as Search, YouTube recommendations, and Gmail spam filtering can amortize a shared accelerator platform. A research lab running a few hundred GPUs cannot justify the same investment.

The bet can pay off when workloads are stable: a purpose-built ASIC can deliver 5–10× the energy efficiency of a general-purpose GPU for its target operation. A workload shift can strand that advantage because the chip's fixed dataflow may not accommodate a substantially different computational pattern. Pushing the locality argument further raises a question of physical scale: whether the compute fabric can expand to the size of an entire wafer.

Wafer-scale engines

Wafer-scale engines (WSE) pursue data locality across most of a silicon wafer. Unlike architectures built from chiplets or discrete dies connected by package- or board-level links, a wafer-scale engine such as the Cerebras WSE-3 uses a continuous compute fabric the size of a dinner plate. It can maintain an on-wafer interconnect across that surface because the wafer is not diced into individual chips.

For its 2024 WSE-3 configuration, Cerebras reported 900,000 AI-optimized cores, 44 GB of distributed on-chip SRAM, and 21 PB/s of aggregate memory bandwidth in its registration filing (Cerebras Systems 2024). These specifications are not directly comparable to GPU-cluster peak FLOP/s or high-bandwidth memory (HBM) bandwidth because the architectures expose different dataflows, memory organizations, precisions, and workload mappings. The durable comparison is topological: on-wafer links avoid package-, board-, and rack-level transfers for work that maps onto the fabric.

Figure 0.19 contrasts the package and board boundaries of a multi-GPU chassis with wafer-scale integration. The eight GPUs exchange state within the chassis through NVSwitch; transfers to other nodes cross the external network. A wafer-scale engine instead routes between 900,000 on-wafer cores on the 300 mm wafer. Defect-aware routing lets the fabric use working regions despite local manufacturing flaws. In the documented CS-2 configuration, twelve power supplies in a 9+3 redundant arrangement could deliver up to 23 kW to the WSE-2 (Systems 2021). That configuration-specific design illustrates why wafer-scale power delivery and cooling require system-level liquid-cooling hardware rather than a conventional accelerator heatsink.

Wafer-scale engines specialize the *physical* architecture while retaining flexibility in the *computational* model through programmable cores. Their scale-up approach replaces some package- and board-level transfers with on-wafer movement. Capacity and data injection still constrain which parts of a workload can benefit from that locality.

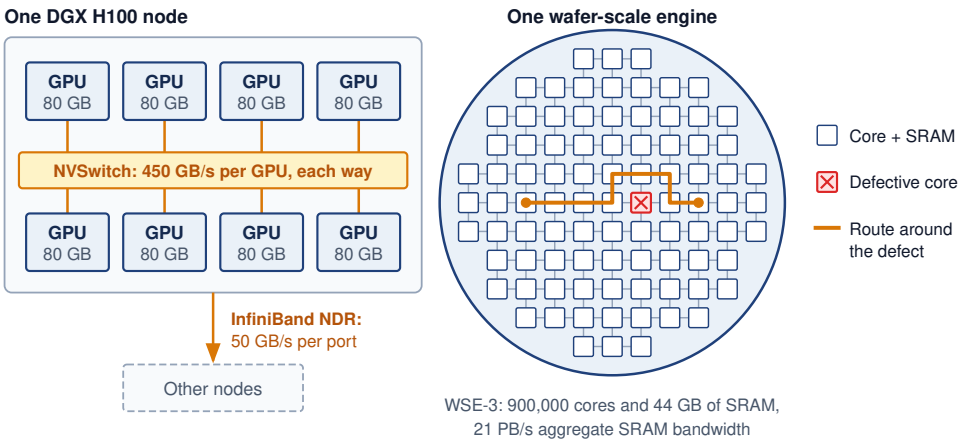


Figure 0.19: Wafer-scale engine (WSE) architecture: A DGX H100 node (left) joins eight separately packaged GPUs through an NVSwitch fabric and must leave the chassis over InfiniBand to reach other nodes, so every exchange crosses a package, board, or network boundary. A WSE (right) instead uses most of a 300 mm wafer as one routed mesh of cores, each with local SRAM; defect-aware routing steers traffic around unusable cores, and the on-wafer mesh replaces off-package transfers for mapped operations. The WSE-3 figures are the vendor's reported totals and are not directly comparable to GPU HBM bandwidth.

The wafer-scale trade-off exchanges manufacturing complexity and defect-aware routing for an on-wafer fabric that avoids package- and board-level communication between its 900,000 cores. Where the wafer-scale engine removes the package boundary by never dicing the wafer, chiplet designs keep the package and change what goes inside it.

Chiplet-based accelerators

A major accelerator design pattern is the chiplet architecture, exemplified by NVIDIA's Blackwell and AMD's Instinct MI300 series. Rather than fabricating a single monolithic die, chiplet-based designs partition the processor into multiple smaller dies connected by a high-bandwidth die-to-die interconnect on a common package substrate. This approach addresses two physical limitations that constrain monolithic designs.

First, the maximum die size is capped by the photolithographic reticle limit, the largest area that a lithography scanner can pattern in a single exposure. The limit comes from the optics of photolithography, because the lens system of an extreme-ultraviolet (EUV) scanner projects a pattern onto a field of only about 26×33 mm (858 mm^2). A larger die would need multiple exposures stitched together, which is technically possible but sharply raises cost and lowers yield. The limit caps the number of Tensor Cores, SMs, and HBM stacks a monolithic GPU can integrate. Chiplet designs bypass this limit by placing multiple dies on a single package, with the B200's two reticle-limited dies effectively creating a processor of about 1,700 mm^2.

Second, manufacturing yield depends on die area and defect density. Under the standard Poisson defect model, the fraction of defect-free dies falls exponentially with die area at a fixed defect density, because a single killer defect anywhere on the die can render it unusable. Smaller dies expose less area to each defect, and testing can select known-good chiplets before package assembly, so one defect discards a small die rather than a reticle-sized one. The resulting yield advantage must be weighed against the cost and yield of the package, its interconnects, and the additional testing. Chiplets change the manufacturing trade-off; they do not guarantee a lower cost per unit of compute.

The trade-off is the die-to-die interconnect. Communication between chiplets within a package is faster than communication between packages (NVLink) but slower than communication within a single monolithic die (the on-die mesh network). Workloads that generate frequent, fine-grained communication between processing elements (such as operations that share data between nonadjacent SMs) may experience a latency penalty when those SMs reside on different chiplets. GPU vendors mitigate this by making the die-to-die link transparent to the programmer, so the software sees a single logical GPU regardless of the underlying chiplet topology.

Evolution of GPU architectures

The rapid evolution of NVIDIA's GPU architectures over the past decade illustrates how accelerator design has adapted to the changing demands of ML workloads. Each generation has introduced architectural innovations targeted at the specific bottlenecks revealed by production ML workloads, rather than simply increasing transistor counts.

The Volta architecture (2017) introduced the first-generation Tensor Core, a unit that executes a small matrix multiply-accumulate as a single instruction, recognizing that neural network training spends the majority of its time in matrix multiplications. Adding dedicated matrix-multiply-accumulate hardware alongside the existing CUDA cores allowed Volta to accelerate the dominant workload pattern without sacrificing the general-purpose programmability that made GPUs attractive for research. The V100, Volta's flagship, delivered 125 TFLOP/s of FP16 Tensor Core throughput at 300 W.

The Ampere architecture (2020) expanded Tensor Core support to TF32 and BF16, after Turing had introduced INT8 and INT4 Tensor Core modes for quantized inference. The A100 also introduced Multi-Instance GPU (MIG), which partitions a single GPU into up to seven isolated instances, enabling efficient sharing of expensive hardware across multiple inference workloads. The most consequential change for infrastructure was Ampere's third-generation NVLink, which doubled bidirectional bandwidth to 600 GB/s per GPU from Volta's 300 GB/s, directly addressing the communication wall for tensor parallelism, which splits each layer's matrices across GPUs.

The Hopper architecture (2022) added the Transformer Engine, whose FP8 recipes and autocast integration run supported Transformer operations in FP8 with managed scaling while retaining

higher precision where the configured recipe or implementation requires it. Hopper also introduced NVLink 4.0 at 900 GB/s per GPU and the NVLink Switch, enabling NVLink connectivity beyond the 8-GPU boundary.

The H100's 1,979 TFLOP/s of FP8 Tensor Core throughput at 700 W represents roughly 6.8× the V100's peak FP16 throughput per watt of thermal design power (TDP). A factor of two of that gain comes from comparing FP8 with FP16; at equal FP16 precision the gain is 3.4×, which process technology (TSMC 4N) and architecture account for.

The Blackwell architecture (2024) continued this trajectory with the B200, which pairs two GPU dies in a single package via a high-bandwidth chip-to-chip link, effectively creating a "dual-die GPU" that delivers about 4,500 TFLOP/s of dense FP8 Tensor Core throughput at 1000 W. FP16/BF16 comparisons should use the lower precision-specific vendor figure rather than the FP8 peak.

The dual-die approach acknowledges that single-die GPU sizes have reached the 858 mm² reticle limit introduced with chiplets in section 3, so further scaling of one package requires the chiplet route rather than a larger die.

Blackwell also introduced fifth-generation NVLink at 1800 GB/s per GPU, doubling the intra-node bandwidth again. The die-to-die link within the B200 package operates at 10 TB/s, fast enough that the two dies can appear as a single logical GPU to the software for many operations.

The progression reveals a consistent pattern: each generation addresses a bottleneck exposed by the previous generation. Volta added dedicated matrix hardware for the compute bottleneck. Ampere expanded mixed-precision support. Hopper targeted Transformer-specific precision with FP8. Blackwell pushed against the die-size limit with multi-die packaging.

At each step, the accelerator's design reflects an important workload of its era, illustrating *how* the physics of the workload drives the physics of the silicon. This co-evolution between workloads and hardware is not accidental: accelerator architects profile ML workloads to identify bottlenecks, and then design subsequent generations to address them. The result is a hardware evolution that is tightly coupled to model architecture evolution, which is *why* Transformer workloads have strongly shaped accelerator design since 2017.

The evolution also reveals a sobering procurement pattern for infrastructure planners: high-end accelerator generations can turn over faster than the facility that houses them. The V100 remained the flagship training GPU for approximately three years (2017–2020). The A100 held that position for roughly two years (2020–2022). Hopper and Blackwell continued that short-cadence pattern in the mid-2020s.

The planning implication is that a data center built for accelerators must anticipate refresh cycles before the first rack arrives. Table 0.4 connects those generations to changes in interconnect capacity and power. From V100 to B200, dense FP16 throughput rose 18×, memory bandwidth 8.9×, and TDP 3.3× (figure 0.20). These are growth multiples over the whole span, not annual rates, and their ratios carry the planning lesson. Each byte delivered from memory must now feed about twice as many operations, and each watt of the power allowance supplies more than five times as many peak operations. The first ratio changes which workloads can approach peak throughput; the second, multiplied by device count, sets the proposed rack load. A facility refreshed only for compute density therefore outruns both its memory delivery and its cooling envelope.

Table 0.4: NVIDIA GPU architecture evolution: Each generation introduces architectural features targeted at the dominant ML workload pattern of its era. Efficiency rises substantially but unevenly across generations, while NVLink bandwidth increases from 300 GB/s on V100 to 1,800 GB/s on B200, with a smaller 1.5× A100-to-H100 step between the larger doubling jumps.

Architecture	Year	Key innovation	Peak tensor	TDP	NVLink BW
Volta (V100)	2017	First Tensor Core	125 TFLOP/s FP16	300 W	300 GB/s
Ampere (A100)	2020	Multi-precision, MIG	312 TFLOP/s FP16	400 W	600 GB/s
Hopper (H100)	2022	Transformer Engine, FP8	1,979 TFLOP/s FP8	700 W	900 GB/s

Architecture	Year	Key innovation	Peak tensor	TDP	NVLink BW
Blackwell (B200)	2024	Dual-die, NVLink 5	4,500 TFLOP/s FP8	1000 W	1,800 GB/s

Because table 0.4 mixes FP16 and FP8 peaks, its per-watt efficiency must be read at fixed precision. At dense FP16, dividing each generation's peak throughput by its TDP gives a V100-to-B200 gain of 5.4× in peak throughput per watt, the more-than-fivefold figure above, against 18× in raw throughput; the rest of the raw gain came from a power allowance that itself rose 3.3×. Facilities must therefore accommodate higher device power as well as greater arithmetic capacity, which connects this trend to the power wall in section 8.

Evolution of TPU architectures

Google's TPU trajectory follows a different path, focusing on distributed efficiency and XLA compiler integration. While GPUs emphasize peak per-chip throughput and software flexibility (CUDA), the TPU line has treated the pod as its unit of design since its second generation. From TPU v2 onward, every TPU chip is designed as part of a larger cluster, with dedicated inter-chip interconnect (ICI) links that bypass the host CPU entirely.

The generation sequence shows how that pod-first design moved from inference to training. The TPU v1 (2015) was a dedicated inference chip with a 256×256 systolic array, delivering 92 TOPS (INT8) for the matrix operations that dominated Google's production inference workloads. TPU v2 (2017) and TPU v3 (2018) then shifted the architecture toward training by adding bfloat16 (BF16), avoiding the dynamic range problems of standard FP16, and scaling the pod concept until a TPU v3 pod joined 1,024 chips with about 126 PFLOP/s of aggregate BF16 peak. TPU v4 (2021) extended the same logic into the network itself, adding an optical circuit switch so the physical topology could be reconfigured for different workloads, added SparseCore units that accelerate embedding lookups, and raised per-chip BF16 throughput to 275 TFLOP/s.

The TPU v5p (2023) continued this pod-scale design for high-end training. It features 459 TFLOP/s of BF16 compute, 95 GB of HBM2e with 2,760 GB/s memory bandwidth, and 1,200 GB/s bidirectional ICI bandwidth per chip. AllReduce combines values contributed by a group of accelerators, such as gradient sums, and returns the combined result to every participant. Its cost depends on the links connecting that group, which makes it a hardware-selection concern before the collective algorithms are studied. Table 0.5 shows how that pod-first design evolved across TPU generations. Section 4 develops the complexity model and algorithm choices needed to determine when those exchanges limit training throughput.

Table 0.5: Google TPU architecture evolution: The TPU's development highlights a "pod-first" design philosophy where inter-chip interconnect bandwidth and compiler-level optimization (XLA) are as important as peak per-chip arithmetic. Note: TPU v1 was INT8 only.

Generation	Year	Key innovation	Peak BF16	HBM	ICI BW (aggregate, one direction)
TPU v1	2015	Systolic array (inference)	92 TOPS*	—	—
TPU v2	2017	High-bandwidth memory	46 TFLOP/s	16 GB	248 GB/s
TPU v3	2018	Liquid cooling, pod scale	123 TFLOP/s	32 GB	280 GB/s
TPU v4	2021	Optical switch, SparseCore	275 TFLOP/s	32 GB	300 GB/s
TPU v5p	2023	Larger pods, HBM2e	459 TFLOP/s	95 GB	600 GB/s

Set side by side, table 0.4 and table 0.5 show two design philosophies. GPU evolution packs more arithmetic, in ever lower-precision Tensor Core formats, onto one package, and turns to chiplets once

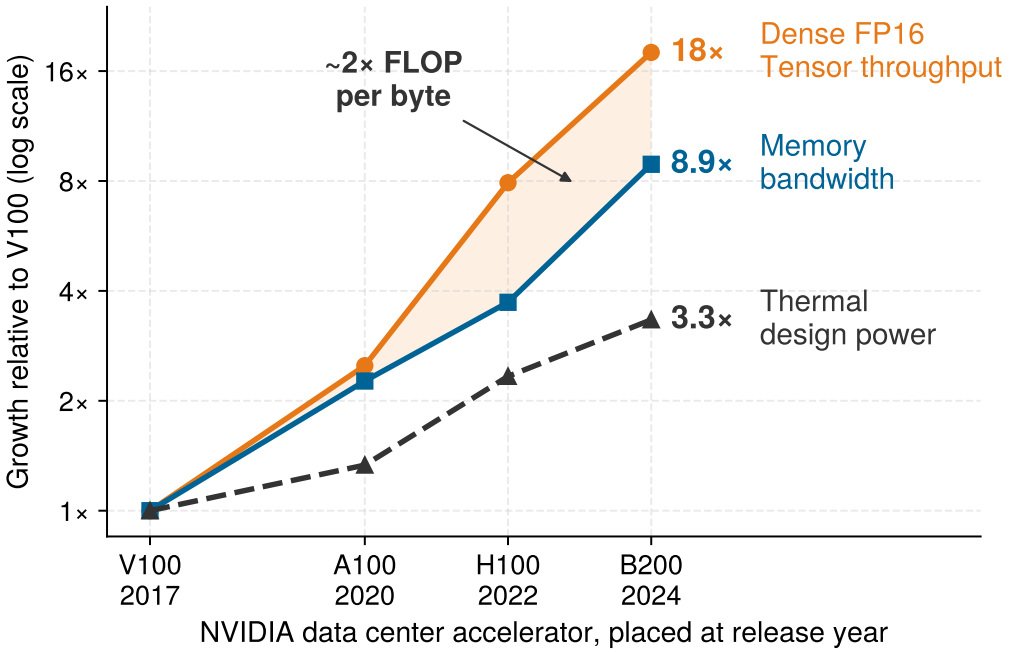


Figure 0.20: Compute, bandwidth, and power scale at three different rates: Dense FP16 Tensor throughput, memory bandwidth, and thermal design power for NVIDIA data center accelerators, normalized to the V100 on a log scale, where the shaded gap between the compute and bandwidth lines is the growth in arithmetic intensity a kernel needs to stay compute-bound. Compute rises 18×, bandwidth 8.9×, and TDP 3.3×, so the endpoint gains in arithmetic exceed the gains in memory bandwidth and power allowance. These are peak specifications, not measured application throughput. Specifications come from the MLSysIM hardware registry.

a single die reaches its size limit. TPU evolution treats the pod as the product. Per-chip arithmetic matters, but inter-chip bandwidth and reconfigurability decide how much of it a large training job can use. Both lines combine local computation with memory and interconnect improvements; they place those resources differently. The warehouse-scale perspective of section 5 treats chip throughput, collective bandwidth, and reconfigurability as parts of one system (Barroso et al. 2019), so the useful comparison is how each candidate sustains the intended workload across that complete system. Table 0.6 collects the whole spectrum surveyed in this section, from CPU to custom ASIC, by its arithmetic core, execution model, and memory control.

Table 0.6: The accelerator spectrum: The architectures place arithmetic, control, and memory differently. Specialization can improve throughput per watt when the workload and software stack use its dataflow; the table does not rank measured efficiency. Wafer-scale engines replace package and board boundaries with an on-wafer fabric of programmable cores.

Feature	CPU	GPU (H100)	TPU (v5p)	Wafer-scale	Custom ASIC
Arithmetic core	Scalar/vector	Tensor Core	Systolic array	RISC-style core	Fixed dataflow
Execution	Instruction	SIMT	Data-driven	Dataflow	Hardwired
Memory control	Cache	L1/L2 + HBM	Scratchpad	On-chip SRAM	Compiler-managed
Flexibility	Extreme	High	Moderate	High	Low

For the 175B running model, the choice among these columns is not purely about peak FLOP/s. A research lab experimenting with novel architectures weekly can justify the GPU's generality tax by its flexibility. An organization deploying a fixed Transformer at scale for years may find that the TPU's dataflow efficiency or a custom ASIC's power advantage dominates total cost. The accelerator

spectrum is ultimately an economic question of *how much flexibility can be surrendered, given the stability of the workload*.

The H100's arithmetic engine can reach 1,979 TFLOP/s in its advertised low-precision mode, but eligible operations approach that throughput only when data reaches the compute units fast enough. Accelerator selection therefore requires a second comparison, between the workload's data demand and the memory system that feeds the arithmetic.

The Memory Wall

As arithmetic throughput grows faster than data-access speed, compute units can spend more time waiting for operands. This divergence is known as the memory wall (Wulf and McKee 1995). While transistor scaling has increased logic performance by orders of magnitude, the interconnects that feed data to those cores have not kept pace. Neural networks can require large weight and activation streams, making bandwidth rather than compute the governing constraint for some inference and training regimes.

The implications are concrete in our running example. Our 175B model's weights occupy 350 GB in FP16. In dense autoregressive decode at batch size 1, each generated token uses all of those weights, whose footprint far exceeds on-chip storage, so every token must stream them in from memory. Suppose, hypothetically, that one H100 could hold them. Streaming the whole 350 GB through that device's HBM at about 3.35 TB/s takes over 100 ms per token, long enough to be a perceptible pause between generated words. No real H100 holds the model, so the figure is a floor on bandwidth demand rather than a prediction of deployed latency, but it shows that the memory wall is a delay a user can notice, not an abstract architectural ratio.

↪ The diagnostic table that maps memory-bound, compute-bound, and latency-bound symptoms to the optimizations that help is developed in section 3.

Three levers lower that floor, and the rest of this section develops each. Sharding spreads the weights across more memory paths, so each path streams fewer bytes. Quantization shrinks the bytes themselves. Reuse lets each fetched byte feed more arithmetic, which HBM's bandwidth and on-chip tiling make possible. The roofline model, recapped for one machine in section 3, tests whether the resulting data supply can feed the arithmetic units. Its ridge point, peak arithmetic divided by memory bandwidth, is the number of operations a kernel must perform per byte fetched before arithmetic rather than memory becomes the limit. This section uses the ridge point from here on and formalizes it for the H100 in section 6. Where each architecture places its bytes sets how much bandwidth those levers can draw on (figure 0.21), because moving the active working set closer to arithmetic increases available bandwidth while reducing the capacity that can reside there.

Figure 0.21 does not rank accelerators along a single performance axis; it maps the structural clusters where different architectures choose to place bytes. Edge devices in the lower band keep memory cheap and compact, but their bandwidth remains constrained.

The devices of Archetype C (Federated MobileNet) sit in that corner. On each device, the binding limit is the power envelope that bounds compute. A phone-class device sustains only 2 W to 3 W, while one H100's thermal envelope is about 233× larger. A federated fleet therefore grows by adding devices rather than by moving up the memory tiers, and at fleet scale, as section 11 noted, communication and which devices participate in each round limit progress as well.

↪ The power, thermal, and memory limits of phone-class edge devices are developed in section 5.

Within the data center tiers, HBM moves memory onto the accelerator package, buying enough capacity and enough bandwidth for active model state. Local-SRAM designs push the working set still closer to arithmetic, buying extraordinary bandwidth at the cost of much smaller resident capacity. That tier map explains why HBM is the next engineering response: it is not the fastest memory in the system, but it is the highest-bandwidth tier that can hold tens to hundreds of gigabytes next to the compute die.

HBM and the memory wall

An H100 can execute 1,979 TFLOP/s of low-precision matrix arithmetic, but the batch-1 weight-streaming example for our 175B model supplies too little reuse to approach that peak. In a bandwidth-floor model its arithmetic units would use well under 1 percent of the matrix peak while the weights stream in. The limiting resource is the speed of *delivery* relative to *multiplication*. Once weights fit through sharding or compression, the serving path must still deliver the active shards at the required rate. Additional arithmetic capacity alone does not raise a binding bandwidth ceiling. HBM increases that data supply within the package.[3]

[3] **HBM origin**: Standardized by JEDEC in 2013 as a joint development between AMD and SK Hynix, originally for graphics cards. ML accelerators adopted HBM because neural networks exhibit the same bandwidth-hungry, capacity-moderate access pattern as high-end rendering. Each HBM generation has roughly doubled bandwidth (128 GB/s in HBM1 to 1.2 TB/s per stack in HBM3e), yet the gap between memory bandwidth and arithmetic throughput continues to widen, which makes HBM a necessary but never sufficient response to the memory wall.

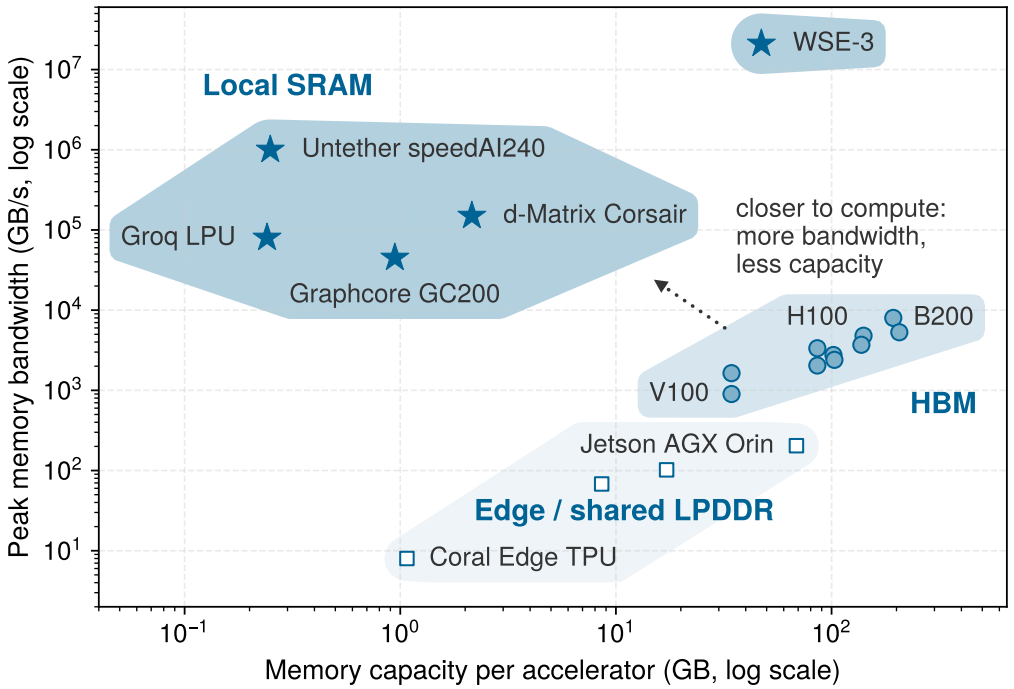


Figure 0.21: Accelerator memory tiers: Peak memory bandwidth and capacity separate local-SRAM designs (solid stars), HBM accelerators (half-tone filled circles), and edge and shared-LPDDR devices (hollow squares); all three are memory, so they share one hue and differ by marker. The dotted arrow marks the design trade-off: moving data closer to compute raises bandwidth but reduces capacity.

The memory hierarchy within a single accelerator spans orders of magnitude in both capacity and bandwidth. At the top sits the register file (256 KB per SM, about 33 MB across all 132 SMs), with hundreds of TB/s of aggregate bandwidth but minuscule capacity per thread. Below this lies the L1 cache and shared memory (SRAM),[4] offering up to 228 KB per SM (about 29 MB total) with tens of terabytes per second of aggregate bandwidth. Further down sits the 50 MB L2 cache (~12 TB/s), and finally the 80 GB of HBM3 at 3.35 TB/s.

The bandwidth gap between registers and HBM is approximately 100×, but that ratio alone does not specify stalled time. Utilization depends on **arithmetic intensity**, the number of floating-point operations performed per byte moved from memory (FLOP/byte). An operand fetched from HBM to feed a single operation leaves the arithmetic unit waiting for most of each cycle; an operand reused across hundreds of operations amortizes its fetch. Tiling increases that reuse by breaking matrices into blocks that fit within shared memory and registers, then performing multiple multiply-accumulate operations before replacing the operands. Higher intensity in turn raises model FLOPs utilization (MFU), the useful model computation per second divided by the selected hardware peak. The three-tier staging pipeline in figure 0.22 shows where the reuse comes from. Matching slices of **A** and **B** stream from HBM into on-chip shared memory and feed repeated matrix-multiply-accumulate (MMA) instructions while partial sums stay in registers, and the finished **C** tile returns to HBM only after accumulating across the entire inner dimension.

For our 175B model, each kernel must fit its live tiles and partial results within the resources available to its executing SMs. The aggregate 33 MB of register space is distributed across those SMs, not a single pool for the entire model's working set. HBM supplies bulk capacity, while tile shape and scheduling determine how efficiently operands are reused near the arithmetic.

[4] **SRAM energy (pJ/bit)**: Accessing a bit in SRAM (shared memory) consumes approximately 0.1–0.5 pJ, while fetching from HBM consumes 2–5 pJ. This 10× energy difference is the physical driver behind kernel fusion: every intermediate result kept in SRAM instead of written to HBM saves both time and significant power and thermal headroom.

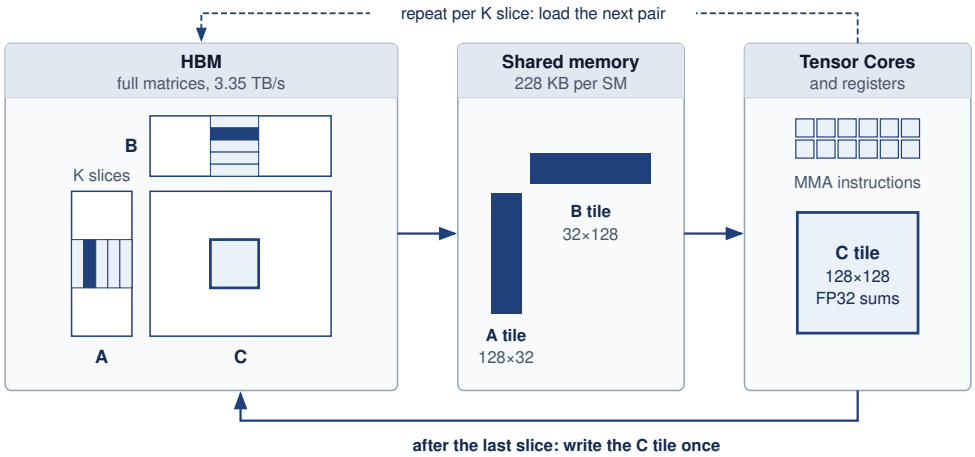


Figure 0.22: Tensor Core tiling strategy: Read left to right. To compute one tile of the output matrix **C**, the kernel streams matching slices of **A** and **B** from HBM (left) into the SM's shared memory (center), where Tensor Core instructions (right) multiply them many times over while the FP32 partial sums for that **C** tile stay in registers. Only after every slice along the shared K dimension has been accumulated is the finished **C** tile written back to HBM once, so each byte fetched from HBM feeds many multiply-accumulate operations. The tile shapes shown (128×32 slices, a 128×128 output tile) are one typical choice; kernels tune them to the chip.



Definition 2.1: HBM

HBM is a 3D-stacked DRAM architecture used by ML accelerators, with through-silicon vias (TSVs) connecting memory dies vertically within each stack and a wide interface across the package interposer connecting the stack to the processor.

1. **Significance**: HBM3 in the H100 delivers approximately 3.35 TB/s of memory bandwidth (roughly 17× DDR5's ~200 GB/s) at roughly 2–5 pJ/bit vs. DDR5's ~20 pJ/bit. This bandwidth sets the BW term of the single-machine iron law given in section 2, and the H100's FP16 ridge point is approximately $989\,\text{TFLOP/s}/3.35\,\text{TB/s} \approx 295$ FLOP/byte, so any operator with arithmetic intensity below 295 FLOP/byte (for example, single-request decode, which performs two FLOPs for every two-byte FP16 weight it reads) remains memory-bound even with HBM.
2. **Distinction**: Unlike socketed DDR memory, which communicates across centimeters of printed circuit board (PCB) trace, an HBM stack sits beside the processor on the package. Its micrometer-scale vertical connections can be 1,000× shorter than board traces, but the complete processor-to-memory path also crosses the interposer. The wide, short on-package interface raises bandwidth without relying on a proportionate increase in per-pin signaling rate.
3. **Common pitfall**: A frequent misconception is that HBM solves the memory wall. HBM moves the wall rather than eliminates it: Tensor Core throughput (R_{peak}) has scaled faster than HBM bandwidth across generations (from 900 GB/s with 125 TFLOP/s FP16 in V100 to 3.35 TB/s with 989 TFLOP/s FP16 in H100), so the ridge point continues rising and more operations remain memory-bound despite HBM improvements.

Traditional DDR memory connects to the processor through pins on the edge of a printed circuit board. Each DIMM communicates over a 64-bit bus, and even with multiple channels (8 channels is typical for a high-end server CPU), a modern server tops out at roughly 200 GB/s of aggregate memory bandwidth.

The physical distance from the DIMM slot to the processor die is measured in centimeters, and every centimeter of copper trace introduces capacitance, signal attenuation, and energy loss. At DDR5 data rates (4,800–6,400 MT/s per pin), the signal conditioning circuits must compensate for significant channel impairment, consuming substantial power per bit transferred. Increasing the data rate on these long traces requires progressively more power for signal conditioning, creating a diminishing-returns curve that DDR5 is already approaching.

HBM sidesteps that board-level degradation through 2.5D integration (figure 0.23). Instead of driving signals horizontally across centimeters of motherboard trace over a narrow 64-bit bus, it stacks DRAM dies vertically and places the stack beside the processor on a silicon interposer.

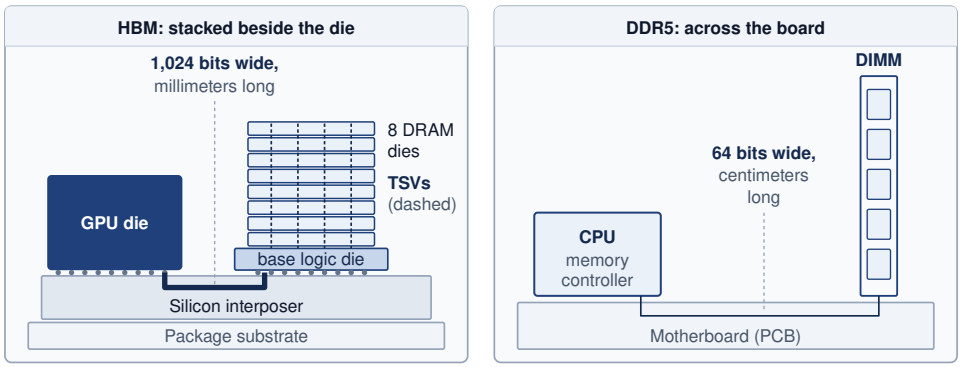


Figure 0.23: HBM 3D-stacked architecture: Left: high-bandwidth memory stacks DRAM dies on a base logic die, links them vertically with through-silicon vias (TSVs), and places the stack on a silicon interposer beside the GPU die, so each stack reaches the GPU over a 1,024-bit interface only millimeters long. Right: DDR5 instead sits on a DIMM across the motherboard, reached over a 64-bit channel through centimeters of board trace. The wider, shorter path raises bandwidth and lowers energy per bit, but HBM bandwidth and capacity remain finite, so the memory wall moves rather than disappears.

The vertical stacking changes how bandwidth scales. Rather than pushing signals faster through long copper traces (the DDR approach, which has diminishing returns), HBM multiplies the number of parallel signal paths. A single HBM stack bonds 8–12 DRAM dies, threading thousands of through-silicon vias (TSVs),[5] copper pillars etched through each die, to form a 1024-bit-wide interface per stack, compared to 64 bits for a DDR5 channel. This 16× wider interface is the main source of HBM's bandwidth advantage; HBM need not exceed DDR's per-pin signaling rate. The processor and HBM stacks share a package and communicate across the silicon interposer, shortening the electrical path relative to socketed DIMMs. This packaging primarily improves bandwidth and energy per transferred bit; it does not by itself imply that complete HBM load latency is only a few nanoseconds.

This shortened physical distance confers three direct electrical advantages. Transfer energy per bit drops by roughly 4–10×, falling from approximately 20 pJ/bit for DDR5 to roughly 2–5 pJ/bit for HBM because microscopic interconnects present substantially lower capacitance and require less driving current. Signal propagation delay also shrinks, although only by a fraction of a nanosecond, which is small next to the DRAM array and controller delays that dominate end-to-end access latency. In addition, reduced capacitive loading relaxes per-pin signaling demands, enabling the wide 1024-bit interface to deliver massive aggregate throughput without pushing clock rates into inefficient, high-power regimes. Together, these physical mechanisms explain why modern accelerators widen the memory interface across an interposer rather than driving off-package pins faster.

[5] **TSV (through-silicon via)**: A vertical copper pillar, 5–10 micrometers in diameter, etched through a silicon die to connect stacked layers. Originally developed for CMOS image sensors in smartphone cameras, TSVs enabled HBM by replacing centimeters of PCB trace with tens of micrometers of vertical silicon, roughly a 1,000× shorter signal path, which is what lets a stack expose a 1024-bit interface within an accelerator's power budget.

Checkpoint 2.1: HBM and the memory wall

These questions check whether the physical benefits of 3D-stacked memory are clear:

- ☐ **HBM vs. DDR5**: explain why HBM achieves higher bandwidth than DDR5 despite having a lower clock frequency.

- ☐ **Off-package signaling cost**: explain why off-package DDR memory has higher energy per bit and how vertical stacking (TSVs) reduces that cost.
- ☐ **Capacity overflow**: locate where the remaining 60 GB must reside when an H100 has 80 GB of HBM and a 70B parameter model requires 140 GB for FP16 weights.
- ☐ **Bandwidth not capacity**: classify the claim as true or false: HBM's primary benefit is increasing the total memory capacity available to the GPU.

Set side by side in table 0.7, the bandwidth, interface-width, and energy differences all trace to placement and width rather than to faster signaling.

Table 0.7: HBM vs. standard DRAM comparison: HBM achieves its bandwidth advantage through three simultaneous innovations: 3D die stacking (more bits per package), TSV interconnects (shorter signal paths), and on-package placement (proximity to the processor). The bandwidth figures describe each memory's local requester path: CPU to host DDR5 and H100 GPU to its own HBM3. A GPU request to host DRAM must also traverse the node interconnect and is not represented by the DDR5 channel figure.

Metric	CPU-local host DRAM (DDR5)	GPU-local accelerator HBM (H100 HBM3)	Scaling factor
Mechanism	2D PCB traces	3D die stacking	-
Placement	Socketed DIMMs	On-package (substrate)	Physical proximity
Bandwidth	~200 GB/s	~3.35 TB/s	~17× faster
Interface width	64-bit	1024-bit per stack	16× wider
Energy	~20 pJ/bit	~2–5 pJ/bit	4–10× efficiency

This bandwidth advantage comes at a price. HBM costs approximately $10–$15 per GB, compared to roughly $3 per GB for DDR5 server memory. For an H100 with 80 GB of HBM3, the memory alone represents approximately $800–$1,200 of the accelerator's manufacturing cost. For a B200 with 180 GB of HBM3e, the memory cost rises to $1,800–$2,700 per accelerator, making HBM one of the most expensive components in the system.

Packaging adds manufacturing stages beyond fabricating the memory dies. The stacking process includes thinning, alignment, bonding, and vertical interconnection, so usable stack yield depends on both the dies and their assembly. Those yields compound: a 12-high HBM3e stack is usable only if every die and every bonding step succeeds, so even small per-step losses multiply into a complete-stack yield below that of a single DRAM die. The silicon interposer must also accommodate the processor and multiple HBM stacks. With each stack occupying roughly 100 mm^2, an illustrative large package that pairs a reticle-sized processor with several stacks needs an interposer exceeding 1,000 mm^2. Testing, repair provisions, and assembly yield all affect cost; die count alone does not determine how many complete stacks remain usable.

The supply chain dynamics of HBM production further affect its cost and availability. The HBM supply chain is highly concentrated among a small number of manufacturers, and the production processes (die thinning, TSV etching, die-to-die bonding) require specialized capital equipment that is fundamentally different from standard DRAM manufacturing. Expanding HBM production capacity requires 12–18 months of equipment procurement and qualification, so production cannot rapidly scale in response to demand surges. When demand outpaces supply, as it did following the explosion of interest in large language models in 2023, component lead times stretch across a similar horizon and prices can double.

For infrastructure planners, HBM availability can constrain accelerator delivery even when the memory specifications meet the workload's needs. The procurement schedule must compare confirmed lead times for complete systems with those for networking, power, and cooling. The longest unresolved dependency sets the commissioning date; HBM is one candidate rather than the universal pacing component.

For our 175B model, the HBM alone in the 1,024-accelerator reference cluster represents roughly $0.8–1.2 million at 80 GB per accelerator (or $2.0–2.9 million at the MI300X's 192 GB per accelerator) under the $10–$15/GB cost model introduced earlier. This cost-capacity trade-off explains why accelerators typically offer 80 GB to 192 GB of HBM while the host server provides 512 GB to 2 TB of DDR: the *fast* memory holds state touched every step (weight shards, activations, gradients, and usually the sharded optimizer state), while the *cheap* memory holds staging buffers, data loading queues, and colder state that capacity pressure forces out, such as offloaded optimizer shards.

The boundary between what resides in HBM and what resides in DDR is a critical design parameter for training frameworks, and managing this boundary efficiently is one of the key challenges addressed by ZeRO (Zero Redundancy Optimizer) sharding and offloading strategies. Sharding divides optimizer, gradient, and parameter state across workers; offloading places colder state in host DRAM or Non-Volatile Memory Express (NVMe) when HBM capacity is the binding limit. Getting this boundary wrong in either direction is costly: placing too much data in HBM wastes expensive capacity, while placing too much in DDR creates bandwidth stalls that idle the arithmetic units.

↪ Memory-efficient sharding of optimizer, gradient, and parameter state is developed in section 4.



Lighthouse 2.1: Archetype B (DLRM at Scale): The capacity wall

Archetype A (GPT-4/Llama-3) has so far exposed the bandwidth side of the memory wall. Archetype B (DLRM at Scale) exposes the capacity side, the boundary between fast and cheap memory just examined. An embedding table of 10 TB or more cannot fit into the 80 GB HBM of a single H100, nor can it fit into the aggregate HBM of a single 8-GPU node (640 GB nameplate, about 687 GB in decimal bytes). Capacity alone requires at least 15 such nodes before accounting for replication, hot-table headroom, and bandwidth balance. Sharding makes lookup routing and result exchange part of the request path. An AllToAll exchange sends distinct portions to different participants; its traffic depends on the batch and placement. Clearing the capacity limit therefore creates a second question about bandwidth and latency.

HBM generations and the scaling boundary

HBM has grown alongside model sizes, but far more slowly than parameter counts, which is why capacity pressure keeps pushing models across devices. Each generation increases the number of stacked dies, the signaling rate per pin, and the total capacity per stack, driven by the relentless growth in model parameters. Table 0.8 shows the scaling boundary: HBM4 must widen the interface because pin-rate increases alone are no longer enough.

Table 0.8: Evolution of high-bandwidth memory: Each generation increases aggregate accelerator memory bandwidth, tracking the growth of large model sizes. The jump to HBM4 doubles the interface width for the first time since HBM's introduction, signaling that pin-rate increases alone can no longer sustain the required bandwidth growth.

Metric	HBM2e (A100)	HBM3 (H100)	HBM3e (B200)	HBM4 (future)
Peak bandwidth	~2.04 TB/s	~3.35 TB/s	~8 TB/s	12–16 TB/s (projected)
Typical capacity	40–80 GB	80–96 GB	180 GB	288 GB+
Interface width	1024-bit	1024-bit	1024-bit	2048-bit
Stack height	8 dies	8–12 dies	12 dies	16 dies

As table 0.8 shows, the transition from HBM3 to HBM3e is particularly significant for our running example. Using decimal bytes consistently, an A100 with 85.9 GB of HBM2e can hold 24.5 percent of our 175B model's weights (at FP16). An H100 with 85.9 GB of HBM3 can hold the same fraction but deliver the data 64 percent faster. A B200 with 193.3 GB of HBM3e can hold 55.2 percent of the weights and deliver them at about 8 TB/s. None of them can hold the full model, which is why multiple accelerators are needed in a node (section 7).

Quantization changes the capacity story for inference. Storing weights in INT8 or INT4 halves or quarters the footprint, and section 11 works through how many accelerators the running model then needs. The capacity constraints that drive the need for multi-accelerator nodes for training (where FP16 or BF16 precision is typically required) are substantially relaxed for inference (where INT8 or INT4 quantization is often acceptable). This is another reason why training and inference infrastructure have different optimal configurations.

The projected jump to HBM4 doubles the interface width from 1024 bits to 2048 bits for the first time since HBM's introduction. This signals that per-pin signaling rate increases alone cannot sustain bandwidth growth indefinitely, and the bus must widen. The doubling of interface width requires a correspondingly larger interposer area for routing, which is one reason accelerator packages have tended to grow as bandwidth targets rise.

The projected 12–16 TB/s HBM4-class package range shows the limit of bandwidth gains alone, using the same weight-streaming floor as the running model's preview at the start of this section. A dense 1T-parameter model requires roughly 2 TB of FP16 weight storage. Streaming those weights through one B200-class path at about 8 TB/s gives 2000 GB/8 TB/s = 250 ms for one batch-1 weight load. At the assumed 16 TB/s, that floor becomes roughly 125 ms. Neither path has been shown to hold the full model, and even the faster floor limits a single path to about eight tokens per second for one request. A responsive trillion-parameter service must therefore split its weights across many memory paths, shrink them with reduced precision, or both; which combination depends on the latency target and the quality the reduced precision preserves.

An important architectural consideration is the number of HBM stacks per accelerator and how they connect to the processor. The H100 has 5 HBM3 stacks, each providing approximately 670 GB/s, for a total of 3.35 TB/s aggregate bandwidth. A B200-class Blackwell GPU package uses 8 HBM3e stacks for an aggregate of about 8 TB/s. The number of stacks is constrained by the interposer area available for HBM placement: each HBM stack occupies approximately 100 mm² of interposer area, and the total interposer must accommodate both the processor die(s) and all HBM stacks. Larger interposers allow more HBM stacks (and therefore higher bandwidth and capacity) but are more expensive and harder to manufacture.

The interposer area constraint creates a concrete design tension. Making the processor die larger (more Tensor Cores, more SMs) leaves less interposer area for HBM stacks, potentially reducing bandwidth. Making the processor die smaller (fewer Tensor Cores) frees interposer area for more HBM but reduces peak compute throughput. The optimal balance depends on the target workload's position relative to the ridge point. Compute-bound workloads, whose arithmetic intensity sits above it, benefit from a larger processor die (more Tensor Cores), while bandwidth-bound workloads below it benefit from more HBM stacks, so a workload's arithmetic intensity predicts which side of the balance it falls on before any silicon is committed.

Memory bandwidth and token latency

The distinction between memory *capacity* (how many gigabytes the HBM can store) and memory *bandwidth* (how many terabytes per second it can deliver) separates two infrastructure questions. Capacity determines whether a model's weights *fit*, with headroom for the remaining live state. Bandwidth limits how fast the model can *run* when data movement sets the critical path. Dense autoregressive decode at batch size 1 supplies a useful example because each weight serves only one token before the next weight load. The next three calculations step down from the running model to Llama-3 70B. Its FP16 weights span two H100s rather than the running model's five, and the H200 comparison that follows needs a model whose serving behavior a real memory upgrade can change; the arithmetic carries over to the 175B model by scaling the bytes.



Napkin Math 2.1: The physics of token latency

Problem: A weight-only model of batch-1 decode for Llama-3 70B uses 141.2 GB of FP16 weights. To isolate the two resource demands, assume hypothetical capacity sufficient to hold them while retaining one H100-equivalent compute rate and HBM path. Which term gives the larger time estimate: arithmetic or weight transfer?

1. **Compute time**: Each token requires $2 \times 70 \times 10^9 = 1.4 \times 10^{11}$ floating-point operations. At 989 TFLOP/s of FP16/BF16 Tensor Core peak throughput, the arithmetic takes $T_{\text{compute}} \approx$ **0.14** ms.
2. **Memory time**: Loading 141.2 GB of weights from HBM at 3.35 TB/s takes $T_{\text{memory}} \approx$ **42.1** ms.

Systems insight: The memory term accounts for 99.7 percent of the sum of these two idealized times. That ratio identifies a bandwidth-dominated estimate; it is not a measurement of cycles spent idle. Raising compute throughput alone barely changes this estimate. A faster memory path reduces the weight-transfer floor, while actual token latency also includes the other memory traffic, communication, and execution costs omitted here.

Holding that weight load fixed and changing only the memory system shows how directly each HBM generation moves the floor. For the same 70.6B FP16 model, with 141 GB of weights, the single-path streaming floor is roughly 141 GB/2.04 TB/s = 69.2 ms at A100-class bandwidth, 141 GB/3.35 TB/s = 42.1 ms at H100-class bandwidth (the notebook's memory term), and 141 GB/8 TB/s = 17.7 ms at B200-class bandwidth, falling nearly in proportion to each bandwidth gain. As in the notebook, each case isolates one accelerator-equivalent HBM path even though the full FP16 model does not fit on one A100 or H100. These bounds screen memory bandwidth against a latency target; whether token latency improves by the same ratio depends on the other work on the request's critical path. The cleanest test of that dependence compares two accelerators that differ only in their memory system.

Napkin Math 2.2: The memory wall: H100 vs. H200

Comparing the NVIDIA H100 against the H200 isolates a memory-system upgrade for large language models (LLMs). While both chips share the same compute cores (same peak TFLOP/s), the H200 provides 1.4× higher memory bandwidth and 1.6× more HBM capacity.

This comparison uses a Llama 3 model with 70.6B parameters, sequence length 2,048, and batch size 1. Both cases retain FP16 weights and the hypothetical capacity convention of notebook 2.1: each streams the complete payload through one accelerator-equivalent HBM path, even though it cannot fit on one H100. The comparison isolates path latency rather than establishing two feasible single-device deployments.

The reported speedup comes from a serving-latency model whose inter-token latency adds two terms to the weight-streaming time, the key-value cache reads for the request's context and a fixed per-layer kernel-launch overhead, so it is not a raw bandwidth ratio alone. The weight-only estimate provides a comparison. Its memory term accounts for 99.7 percent of the summed compute and transfer times, so reducing that term suggests a gain near the HBM bandwidth ratio, 4.8 TB/s ÷ 3.35 TB/s ≈ 1.4×.

Systems insight: For the modeled configuration, the latency model predicts an H200 speedup of 1.4× over the H100 despite equal peak arithmetic throughput. Its agreement with the bandwidth ratio supports the memory-bound diagnosis for this case. Changing batch size, context length, or partitioning requires evaluating the new configuration; the estimate does not establish one bottleneck for all autoregressive models.

The modeled memory-time share, 99.7 percent in this example, indicates the memory-boundedness of this workload under the stated assumptions. A workload this memory-bound gains almost nothing from more TFLOP/s and nearly proportionally from more TB/s, which is what the H200 comparison shows, so bandwidth per dollar rather than peak arithmetic is the useful procurement metric for this regime. A measured execution timeline is still needed to determine how much transfer overlaps computation and which delays remain exposed, which keeps a hardware-screening calculation separate from a performance forecast.

The generational trend of figure 0.20 widens this regime with every refresh. Because peak arithmetic outgrew HBM bandwidth from V100 to B200 (18× against 8.9×), the arithmetic intensity

required to reach the compute ceiling rose about 2×, so workloads without commensurate reuse remain bound by data movement on each newer device.

For training workloads, reusing weights across more tokens can shift the constraint toward arithmetic throughput. The relevant reuse is the number of tokens that share each weight read on one accelerator, so a large global training batch does not by itself establish high local arithmetic intensity; it must arrive at each device as a large local token count. The Roofline Model tests the compute and bandwidth ceilings for the actual operation and batch shape before either specification becomes a procurement metric.

Roofline model

The token latency calculation in notebook 2.1 makes memory bandwidth the relevant procurement metric for the batch-1 workload. The roofline model of Williams, Waterman, and Patterson (Williams et al. 2009) tests whether that diagnosis survives a change in batch shape, precision, or accelerator by relating the workload's arithmetic intensity to the candidate accelerator's compute and bandwidth ceilings.


For an H100 (989 TFLOP/s FP16, 3.35 TB/s HBM), the ridge point that this section has relied on since its opening is about 295 FLOP/byte; most LLM inference operators fall well below this threshold, which is why the roofline remains the first diagnostic tool for identifying whether more compute or more bandwidth will improve performance. The quantity that places a workload on the plot is the arithmetic intensity introduced with tiling above, written I in FLOP/byte.

The roofline model expresses the maximum achievable performance of a workload as the lesser of two ceilings:

$$\text{Achievable FLOP/s} = \min\left(R_{\text{peak}},\ \text{BW} \times I\right) \tag{0.6}$$

Equation 0.6 defines a performance ceiling. At low arithmetic intensity, memory bandwidth supplies the lower of the two ceilings, which grows linearly with I along the sloped line. At high intensity, peak arithmetic supplies the lower ceiling, which no longer rises with I. A kernel's measured rate can remain below either roof because the model does not include every dependency, scheduling limit, or execution overhead.

↪ Placing measured kernels on the roofline by arithmetic intensity is developed in section 17.



Decode sits deep in the memory-bound regime, far below the ridge.

> **Definition 2.2: Ridge point**
>
> ***Ridge point*** is the ML accelerator arithmetic intensity where the memory bandwidth ceiling meets the compute ceiling ($I_{\text{ridge}} = \frac{R_{\text{peak}}}{\text{BW}}$).
>
> 1. **Significance**: It defines the Hardware Efficiency Threshold. Below the ridge point, bandwidth supplies the lower modeled ceiling (BW); above it, arithmetic supplies the lower ceiling (R_{peak}).
> 2. **Distinction**: Unlike Peak FLOP/s (which only describes the horizontal ceiling), the ridge point describes the Balance of the architecture. A rising ridge point over hardware generations indicates that compute is growing faster than bandwidth, making utilization harder.
> 3. **Common pitfall**: A frequent misconception is that all GPUs have the same ridge point. In reality, it varies by Precision: because R_{peak} is higher for INT8 than FP32 while BW is constant, the ridge point for INT8 is much higher, requiring more data reuse to saturate the hardware.

Machine learning workloads land in different regions of the roofline plot depending on the operation and the batch configuration, not on the model family. Single-request autoregressive decode streams the full weight tensor (two bytes per parameter in FP16) from HBM to perform two floating-point operations per parameter, an arithmetic intensity of about 1 FLOP/byte, far below the H100's ridge point of 295 FLOP/byte. The token-latency calculation in notebook 2.1 showed that the arithmetic finishes in microseconds while the weight movement takes milliseconds. Every other regime in table 0.9 comes from reusing each byte fetched from HBM across more operations.

Decode also reads the key-value (KV) cache, the stored attention keys and values of earlier tokens, and because each request has its own cache, batching does not amortize that traffic.

Table 0.9: Roofline placement by workload phase: Language-model intensities count only weight traffic at the HBM level, the same idealization used for figure 0.24, against an H100 FP16 ridge point of 295 FLOP/byte; the convolution value is a representative scenario figure rather than a derived count. Attention is not plotted in the figure because its placement depends on shape. Measured placement must also count activation, key-value cache, and optimizer traffic.

Workload phase	Source of reuse	Idealized intensity	What moves it
Decode, batch 1	None; each weight serves one token	1 FLOP/byte	Batching requests, lower-precision weights
Decode, batch 32	Each weight read serves every request in the batch	32 FLOP/byte	Batch size, until key-value cache traffic dominates
Prefill, 512-token prompt	Each weight read serves every prompt token	512 FLOP/byte	Prompt length and batch size
Convolution training (ResNet-50)	Filters reused across spatial positions and the batch	200 FLOP/byte	Channel depth, tensor layout, operator fusion
LLM training, 2048 local tokens	Each weight read serves every token on the device	2,048 FLOP/byte	Local microbatch size and sequence length
Attention	Keys and values reused across queries	Shape-dependent, on either side of the ridge	Sequence length, head dimension, SRAM tiling

The table's numbers are idealized reuse counts, so they mark directions rather than measurements. Channel depth, tensor layout, fusion, precision, and cache residency determine where a convolutional layer lands. Attention also resists a fixed label. Full-sequence attention can reuse keys and values across many queries, whereas single-token decode reads the cache for one query per head. The resulting placement depends on shape and implementation. The analytical objective is to classify each execution phase and batch configuration rather than assign a permanent regime to a model family.

A measured workload point below its roofline ceiling needs further diagnosis. Dependencies, insufficient parallel work, irregular accesses, synchronization, and power limits can all prevent a kernel from approaching that ceiling. The gap identifies a question for profiling; it does not establish that software optimization can recover the entire difference.

The Roofline's diagnostic power extends beyond individual kernels to entire training runs. For our 175B model, the computation graph contains thousands of distinct operations with different arithmetic intensities. The dense feed-forward network layers are dominated by large general matrix multiplications (GEMMs) with high arithmetic intensity, placing them firmly in the compute-bound regime where Tensor Core utilization is the bottleneck. Conversely, operations like layer normalization and element-wise activations possess low arithmetic intensity, sitting deep in the memory-bound region where the compute units idle while waiting for data. Attention kernels can land on either side of the ridge, depending on the shapes and reuse examined above, and long decode contexts add key-value traffic without comparable reuse. This diagnostic distinction dictates the optimization strategy: memory-bound layers benefit from kernel fusion (reducing HBM round-trips), while compute-bound layers benefit from precision reduction (moving from FP16 to FP8, which effectively raises the hardware's compute ceiling).

Whole phases spread even wider than individual operators. The idealized intensities of decode and training differ by 2,048×, which is why the same hardware shows very different utilization across them. Batch-1 decode sits near 1 FLOP/byte, far left of the ridge and deeply bound by memory bandwidth, while large-batch training near 2,048 FLOP/byte crosses the ridge and reaches the compute roof (figure 0.24). The training point assumes that 2048 tokens on one accelerator share each weight read, the local reuse that a large global batch alone does not guarantee, so it counts tokens rather than sequences and local rather than global batch. It is a contrast case, not a universal

intensity for training. Actual placement requires counting bytes at the memory level being modeled and accounting for tensor shapes, fusion, and reuse.

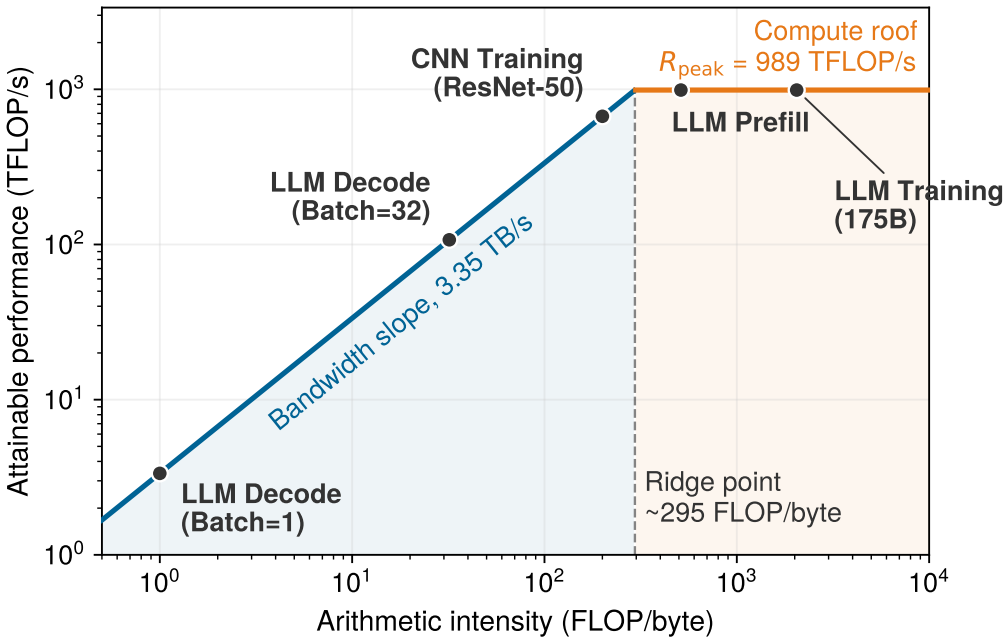


Figure 0.24: The H100 roofline landscape: Attainable FP16 throughput is the lower of two ceilings, the memory-bandwidth slope (blue) and the compute roof (orange), which meet at the dashed ridge point. Each dot places a representative workload by its arithmetic intensity; workloads left of the ridge stay capped by bandwidth however much compute the chip offers, and only those to its right can approach peak throughput.

The table's batching rows can be turned into a utilization bound. For inference serving, batching multiple requests together moves the workload point rightward on the plot, because each weight read is multiplied against more activations. Under the weight-traffic-only bound, batch-1 decode on an H100 can use at most 0.34 percent of the FP16 peak. At batch size 64, each weight read from HBM serves every request in the batch, the intensity rises to 64 FLOP/byte, and the bound climbs to about 22 percent of peak, a 64× gain that still leaves the workload below the ridge. The linear growth holds only in this approximation; key-value cache traffic, which batching does not amortize, activation traffic, and capacity limits lower both figures in practice. The gain has a cost. Waiting to assemble a batch can introduce queuing latency, although a serving policy can instead dispatch a smaller batch when a latency deadline approaches. Serving systems must carefully balance this trade-off between throughput (larger batches, higher utilization) and latency (smaller batches, faster response per request).

For training, batch size affects both statistical convergence and hardware efficiency. A larger local batch can increase reuse and parallel work, but only while capacity and other bottlenecks permit. Changing the global batch can also require learning-rate and schedule adjustments to preserve training quality. The relevant comparison is time and resources to reach the target quality, rather than utilization in isolation.

For fleet procurement, the roofline is a screening test rather than a throughput forecast. It rules out upgrades that raise a nonbinding ceiling, while the gap below the relevant ceiling identifies work still needed in software or communication. A candidate that fits the local workload must also fit the node's memory budget, the interconnect, and the facility power envelope.

The Roofline Model also helps distinguish two kinds of kernel optimization. If a workload is 10× below the compute ceiling but already touching the bandwidth ceiling, increasing arithmetic throughput alone does not improve that bound. Reducing memory traffic or increasing reuse can move the bound through batching, kernel fusion, or quantization. These changes still require

checking numerical quality, capacity, and latency before treating the predicted gain as usable performance.

Collected into a single procurement comparison for the running model, the two ends of the landscape give opposite hardware answers.

Example 2.2: Roofline analysis: Training vs. inference

Scenario: An engineering team evaluates hardware choices for serving (decode batch size 1) vs. training (batch size 2048) a 175B parameter model on an H100 GPU (ridge point 295.2 FLOP/byte).

Diagnosis: The weight-traffic model gives single-token decode arithmetic intensity $I = 1$ FLOP/byte $\ll$ 295.2 FLOP/byte, bounding throughput to 0.34 percent of the selected peak FLOP/s. The assumed training reuse raises intensity to $I = 2{,}048$ FLOP/byte $\gg$ 295.2 FLOP/byte, making arithmetic the lower roofline ceiling. This placement identifies the relevant bound without establishing achieved throughput.

Systems lesson: Hardware selection starts with the phase's arithmetic intensity and memory footprint. The modeled training phase benefits from arithmetic capacity, while batch-1 decode benefits from bandwidth. Sustained throughput at the required quality and latency determines whether either advantage justifies its cost.

That same diagnostic becomes most valuable when a proposed upgrade changes the wrong ceiling.

Checkpoint 2.2: Roofline diagnosis

A team is serving a 13B-parameter model at batch size 1 on an H100 and observing 25 ms per token. The profile shows low tensor-core utilization during decode.

- ☐ **Arithmetic intensity**: estimate the arithmetic intensity of the workload.
- ☐ **Peak-throughput upgrade**: explain what the roofline estimate can establish about a higher peak-TFLOP/s accelerator and what requires measured execution.
- ☐ **Binding constraint**: identify the profile measurements needed to distinguish exposed HBM transfers from communication, launch overhead, or insufficient parallel work before selecting an improvement.

Memory capacity and bandwidth screen out infeasible accelerator choices. For the candidates that remain, fleet sizing also needs a sustained compute rate at a precision the workload can use.

Sustained Compute and Precision

A fleet sized from advertised matrix throughput can miss its training deadline when operations cannot use the advertised precision or keep the arithmetic units busy. The relevant hardware contract includes both the eligible matrix operations and their sustained contribution to the complete workload. That contract begins with the specialized arithmetic units: Tensor Cores[6] on NVIDIA GPUs and Matrix Multiply Units (MXUs) on Google TPUs.

A Tensor Core executes matrix-multiply-accumulate instructions of the form $\mathbf{D} = \mathbf{A} \times \mathbf{B} + \mathbf{C}$ on small tile matrices in specialized hardware. On the H100, these tile operations are distributed across the Tensor Core array in each SM, producing hundreds of accumulated results per instruction while keeping operands in registers and shared memory. This concentrates the dominant neural-network operation in dedicated matrix hardware that supplies most of the chip's peak arithmetic.

With 528 Tensor Cores across the chip (4 per SM, 132 SMs), the H100 reaches the 989 TFLOP/s FP16/BF16 peak used in the roofline analysis. The important systems point is not the exact per-cycle instruction accounting, but the architectural specialization: the die dedicates a large fraction of its arithmetic area to dense tiled matrix operations rather than general-purpose scalar execution.

[6] **Tensor Core**: Introduced with NVIDIA Volta (2017) as 4×4×4 FP16 fused matrix-multiply-accumulate units. Later generations widened format support: Turing (2018) added INT8, Ampere (2020) added TF32/BF16, and Hopper (2022) added FP8. A lower-precision mode can raise the arithmetic ceiling, as in Hopper's 2× FP8-versus-FP16 peak, but the gain depends on the specific format and hardware. It is not a rule that every added format doubles throughput.

Google's MXUs organize multiply-accumulate units into a systolic array. In the MXU's weight-stationary dataflow, one matrix tile is loaded into the array's weight registers while the other matrix streams through the array one row at a time. Each cell multiplies the incoming activation by its stored weight, adds the product to the partial sum arriving from the cell above, and passes the activation rightward and the updated partial sum downward. Every operand fetched from memory is therefore reused by an entire row or column of cells without a register-file round-trip, which is the reuse that the Tensor Core obtains through tiling in shared memory and registers. Each TPU v5p chip contains two TPU cores (which Google calls TensorCores, a name unrelated to NVIDIA's Tensor Cores) with four 128×128 MXUs each, together providing 459 TFLOP/s of BF16 throughput. Approaching that peak requires compatible tile shapes and a sustained operand supply; pipeline fill, partial tiles, and dependencies can leave cells idle. Vector and scalar units handle other operations, so complete-workload efficiency depends on how computation maps across the accelerator.

For our 175B model, compiler and kernel support determine how much work reaches the specialized arithmetic units. CUDA kernels can combine matrix operations with thread-level work, while XLA maps the computation graph onto the TPU dataflow. In either stack, fusion keeps intermediate results in registers or shared memory instead of repeatedly writing them to HBM. Sustained throughput therefore depends on operation coverage and data reuse as well as the matrix units themselves.



Definition 2.3: Tensor core

Tensor Core is a specialized ML accelerator hardware unit that performs a fused matrix-multiply-accumulate operation $\mathbf{D} = \mathbf{A} \times \mathbf{B} + \mathbf{C}$ on small tiles (for example, $16\times8\times16$ in BF16) as a single hardware instruction, delivering dramatically higher throughput than general-purpose CUDA cores by trading programmability for fixed-function matrix arithmetic.

1. **Significance**: Tensor Cores provide the bulk of the H100's 989 TFLOP/s FP16/BF16 peak (and ~1,979 TFLOP/s at FP8), roughly 14.8× the ~67 TFLOP/s delivered by CUDA (vector) cores alone. This comparison changes both the execution unit and precision. Reductions and element-wise operations in layer normalization or softmax require a different performance model; their throughput is not a fixed fraction of the matrix peak.
2. **Distinction**: A Tensor Core is a fixed-function matrix-multiply-accumulate unit, not a faster general-purpose core. CUDA cores execute arbitrary scalar and vector work; Tensor Cores execute only the tiled $\mathbf{D} = \mathbf{A} \times \mathbf{B} + \mathbf{C}$ primitive, which is why peak throughput and delivered throughput diverge so sharply by workload.
3. **Common pitfall**: A frequent misconception is that all GPU operations benefit from Tensor Cores. Operations must map to the $\mathbf{D} = \mathbf{A} \times \mathbf{B} + \mathbf{C}$ tile computation to use those units. Element-wise activations, normalization, and embedding lookups have different execution and data-access demands. A fixed 10–30$\times$ penalty per FLOP is not a workload-independent model for their runtime.

The precision support of Tensor Cores has expanded with each generation, driven by the discovery that neural network training and inference can tolerate lower numerical precision than was previously assumed. Volta Tensor Cores accepted FP16 multiplicands and supported FP16 or FP32 accumulation. Turing added INT8 and INT4 modes for inference, Ampere added BF16 and TF32, and Hopper added FP8 (both E4M3 and E5M2 formats) with per-tensor scaling through the Transformer Engine.

Transformer Engine recipes and FP8 autocast determine which supported operations run in FP8. The scaling machinery records tensor ranges and applies scale factors so values fit the selected FP8 format; it does not independently determine that a layer is numerically safe for FP8 and switch it to FP16 when it is not. Precision policy therefore remains a software configuration and validation decision.

Understanding the distinction between the two FP8 formats clarifies why this matters for practitioners. The E4M3 format (4 exponent bits, 3 mantissa bits) can represent values up to approximately 4.48×10^2, with 3 bits of mantissa providing about 1 part in 8 relative precision. This range and

precision are adequate for many neural network weights and activations after per-tensor scaling brings their observed range into the FP8 window.

The E5M2 format (5 exponent bits, 2 mantissa bits) provides a wider dynamic range, with maximum finite values around 5.73×10^4, at the cost of reduced precision (only 2 mantissa bits, or about 1 part in 4 relative precision). This wider range is important for gradients during the backward pass, which can span more orders of magnitude than forward-pass activations, particularly in the early and late layers of deep networks.

The configured Transformer Engine recipe determines how these formats are used; a common hybrid recipe uses E4M3 for forward tensors and E5M2 for backward tensors. Scaling factors and tensor-range metadata are maintained by the implementation, with the update rule determined by the selected scaling recipe.

The relationship between numerical precision and hardware throughput matters for infrastructure planning because it directly affects how much useful work each accelerator can perform per second. Lower precision representations use fewer bits per number, which has two compounding benefits: more numbers fit in the same HBM capacity (reducing memory pressure), and the arithmetic units can process more operations per cycle (increasing throughput).

Table 0.10 collects the formats an H100-class accelerator supports, with the dense peak rate each one unlocks and its usual role in training or inference.

Table 0.10: Precision formats and hardware throughput on H100: The table uses dense peak throughput where Tensor Core support exists; structured sparsity can roughly double several of these advertised peaks. The choice of precision affects both the training dynamics (convergence, numerical stability) and the infrastructure requirements (memory capacity, bandwidth utilization). TF32 preserves the FP32 exponent width but reduces mantissa precision so Tensor Cores can accelerate common FP32 training workloads.

Format	Bits	Exponent	Mantissa	H100 dense peak	Typical use
FP32	32	8	23	~67 TFLOP/s	Master weights, loss computation
TF32	19	8	10	494 TFLOP/s	Training (NVIDIA default)
BF16	16	8	7	989 TFLOP/s	Training, fine-tuning
FP16	16	5	10	989 TFLOP/s	Training with loss scaling
FP8 (E4M3)	8	4	3	1,979 TFLOP/s	Forward pass, weights
FP8 (E5M2)	8	5	2	1,979 TFLOP/s	Backward pass, gradients
INT8	8	N/A	N/A	1,979 TOPS	Post-training quantization

For training, many workloads use mixed-precision training, a strategy that decouples storage precision from arithmetic precision. A "master copy" of weights remains in FP32 for numerical stability, while the computationally intensive forward and backward passes are cast to BF16 or FP16 to exploit the full throughput of Tensor Cores. Accumulating gradients in FP32 reduces rounding and underflow risk before the optimizer updates the master weights. The node memory examples in section 8 assume retained FP16 gradients; implementations that retain a full FP32 accumulation buffer must add that buffer to their peak budget. The FP8 recipes described earlier extend the same decoupling one step further, running eligible matrix operations in eight bits while the master weights stay in FP32.

The practical implication for fleet design is that peak TFLOP/s specifications are precision-dependent. The H100 delivers 989 TFLOP/s in FP16 but twice that (1,979 TFLOP/s) in FP8. FP8 therefore doubles the advertised arithmetic ceiling for supported operations on the same hardware. The complete training run gains less when communication, memory traffic, or higher-precision operations remain on the critical path. Precision engineering is therefore a primary optimization lever for infrastructure planners, alongside its effect on model accuracy.

Approaching peak throughput requires pipeline balance. Operand staging and reuse must supply the arithmetic units at the rate the operation requires. Kernel fusion can improve that balance by combining operations so intermediate values stay on chip instead of making separate HBM round-trips. A naive attention implementation, for example, writes the $S \times S$ score matrix to HBM and reads it again for softmax, consuming the 3.35 TB/s memory path. FlashAttention, a hardware-aware exact attention algorithm, computes with SRAM-sized tiles and avoids materializing that full matrix in HBM. It does not require the complete matrix to fit on chip or guarantee peak Tensor Core utilization. For our 175B model, the fleet-level gain depends on how much step time the affected kernels consume. A faster attention kernel shortens the step only in proportion to attention's share of it, the same Amdahl accounting that bounds every partial speedup.

Peak vs. sustained throughput

A critical distinction for infrastructure planning is the difference between *peak* throughput (the maximum rate for the vendor-specified operation and precision) and *sustained* throughput (what the complete workload delivers). Peak TFLOP/s assumes that eligible arithmetic units remain fed under the stated sparsity, precision, and clock conditions; it does not include memory stalls, ineligible operations, communication, or software overhead. Sustained fractions therefore vary with model shape, batch size, precision, implementation, and scale. The gap arises from several sources, each representing a different physical or software limitation.

Memory stalls occur when the Tensor Cores complete their current tile multiplication before the next tile has been loaded from HBM. Even with the H100's 3.35 TB/s HBM bandwidth, the Tensor Cores can consume data faster than HBM can deliver it for certain matrix dimensions, creating idle cycles while the arithmetic units wait for data.

Dependency stalls arise when one operation must complete before the next can begin, leaving some processing elements idle. In a Transformer layer, the attention computation must complete before the feed-forward network can begin, and the feed-forward computation must complete before the next layer's attention can start. These sequential dependencies create brief periods where some hardware resources are unused, even within one accelerator. When the model is split into sequential stages on different accelerators (pipeline parallelism), the same dependencies become pipeline bubbles, idle slots in which a whole stage waits for its predecessor; splitting each batch into microbatches reduces the waste by feeding later microbatches into stages that would otherwise wait. The term pipeline bubble refers only to this cross-device case, whose scheduling chapter 15 develops. At the infrastructure level, the lesson is that peak throughput assumes every unit stays busy, while real training includes dependency gaps that lower sustained utilization.

AllReduce operations used in tensor parallelism and gradient synchronization used in data parallelism can delay computations that depend on their results. Even when communication is overlapped with computation (using separate communication and compute streams), there are typically operations that cannot be overlapped because they depend on the result of the communication.

Kernel submission, memory allocation, and framework control also consume time. A single kernel launch costs on the order of 5–10 microseconds of host-side work, and an unfused Transformer layer can issue a few dozen launches. Their exposed cost depends on the implementation and on whether device work overlaps host activity: when each kernel itself completes in microseconds, launch latency becomes a comparable share of the step. Small microbatches and short kernels leave less work over which to amortize submission, making a host-and-device execution trace necessary to distinguish launch gaps from slow arithmetic or memory access.

Kernel fusion partially addresses this gap by combining multiple operations (matrix multiply, bias add, activation function, dropout) into a single GPU kernel, eliminating the intermediate memory reads and writes that would otherwise stall the Tensor Cores between operations. The art of achieving high sustained utilization is largely the art of minimizing the time Tensor Cores spend idle, which is why specialized kernel libraries like FlashAttention and the Transformer Engine exist.

The last source of the gap is the device itself, and no kernel change removes it. Device variation, sometimes called the silicon lottery, means that nominally identical accelerators sustain different clocks. Clock behavior also depends on the configured power limit, temperature, and workload, so a slow participant should not be diagnosed from its product label or frequency alone. In synchronous training, a participant that finishes dependent work late delays its whole process group. One device

sustaining a clock about 2.5 percent below its peers can slow every synchronous step it joins by up to that fraction, because the other participants wait for it at each collective. Fleet management systems therefore track per-device sustained throughput and can move persistent underperformers to pools, such as inference serving, where they do not gate a synchronized group. Profiling must determine whether local arithmetic, memory, communication, or a power limit caused that delay before changing placement or replacing hardware.

Capacity planning must use a measured or conservatively modeled sustained rate, not the peak specification. A run estimated at 1,000 GPU-hours from peak FLOP/s requires $1/\eta_{\text{hw}}$ times that estimate when its measured utilization fraction is η_{hw}. Infrastructure teams track MFU, introduced with tiling in section 3, as the standard measure of η_{hw}, but comparisons remain meaningful only when model-FLOP conventions, precision, hardware peak, and system scale match.

↪ MFU as a fleet efficiency metric, and how its losses compound across nodes, is developed in section 2.

The accelerator's physics establish a concrete problem: our 175B model requires 350 GB of memory for its weights alone in FP16, and Adam-style training state raises the requirement to multiple terabytes once optimizer moments, gradients, and activations are included. A single H100 provides 80 GB of HBM. No single accelerator can hold this model, an instance of the memory capacity gap (principle 2), in which frontier memory requirements outgrow single-accelerator HBM. The system must expand to the next physical level: the node.

The Node

The running model needs more memory than one accelerator provides. A node supplies several accelerators in one chassis, but each retains its own memory; dividing the work creates communication that the local fabric must sustain. Tensor parallelism divides an operation across accelerators, pipeline parallelism assigns successive model stages to different groups, and data parallelism assigns different training examples to model replicas whose updates must be combined. These strategies impose different traffic patterns. The node design determines whether that traffic crosses a slow ring, a dense mesh, or a switch-backed crossbar. Figure 0.25 diagrams these three intra-node wiring options for an eight-GPU chassis, contrasting the link scaling and network diameter of a two-link ring (up to four hops) and a 28-link full mesh against a single-hop NVSwitch crossbar.

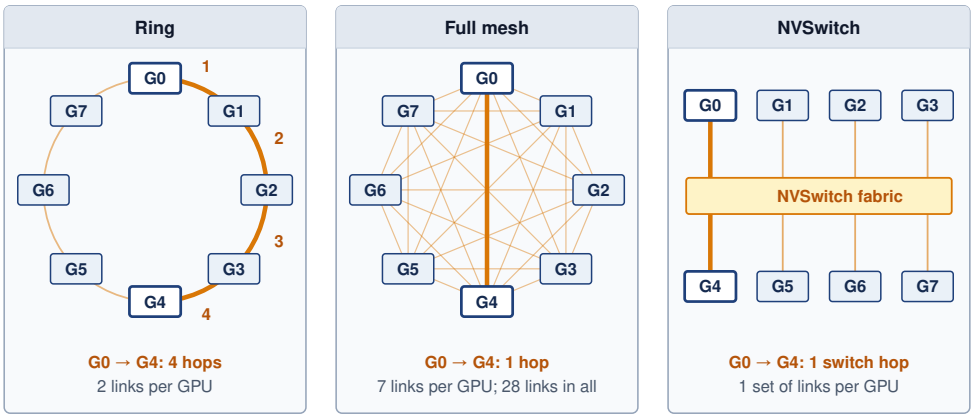


Figure 0.25: Intra-node GPU topology comparison: Three ways to wire eight GPUs inside one node. Left: a ring gives each GPU only two links, so traffic between distant GPUs passes through up to four hops. Center: a full mesh reaches every peer in one hop but needs $G_{\text{node}} - 1$ links per GPU and $G_{\text{node}}(G_{\text{node}} - 1)/2$ links in total, which becomes impractical to route beyond about eight GPUs. Right: an NVSwitch fabric gives each GPU one set of links to the switch and puts every pair one switch hop apart, with up to 450 GB/s per direction per H100 SXM GPU (900 GB/s bidirectional); that per-GPU injection bandwidth is not the aggregate bisection bandwidth of the switch fabric.

Aggregating accelerators solves the capacity problem only if the interconnect between them is fast enough that the group behaves as one machine rather than as several machines passing messages. The 175B model's weights span at least five accelerators, and the full training state spans an entire 8-H100 node and more, so some model state must live on different chips. Depending on the partition,

execution exchanges partial results, activations, gradients, or parameter shards. Whether those exchanges are cheap or ruinous depends on the local fabric, which is why the node is the first scale level where the accelerator's specifications matter less than the wires between accelerators. The training system can combine tensor parallelism, optimizer sharding, and memory offload as needed to meet its capacity budget, and each strategy places a different demand on the interconnect.

Definition 2.4: Node

Node is the ML training cluster's physical server chassis that aggregates multiple accelerators (typically 8) through a high-speed intra-node interconnect (NVLink or ICI), providing a physical packaging and failure boundary. The fast communication domain can coincide with one chassis or extend across several, depending on the fabric.

1. **Significance**: The NVLink bandwidth within a DGX H100 node reaches 900 GB/s bidirectional, or 450 GB/s per direction, while inter-node InfiniBand NDR provides 50 GB/s, a 9× per-direction gap that constrains where each parallelism strategy can run. For this DGX H100 topology, frequent tensor-parallel collectives favor the intra-node NVLink domain; pipeline parallelism can span nodes when the network sustains stage-boundary activation traffic. The node is also the primary failure domain: a single node failure in a bulk synchronous parallel training job, where workers advance in lockstep at step barriers, idles the entire cluster until recovery.
2. **Distinction**: Unlike a single accelerator (which provides fast HBM bandwidth but limited capacity), a node aggregates 8× the HBM capacity and 8× the compute of a single chip, enough to place large FP16 weight shards (8×80 GB = 640 GB on DGX H100), but not enough to keep the full Adam training state in HBM.
3. **Common pitfall**: A frequent misconception is that nodes in a distributed training job operate independently. In bulk synchronous parallel training, all nodes are synchronously coupled at every step barrier: a performance degradation on one node (from thermal throttling, a faulty NIC, or a slow storage read) stalls the entire cluster and drops overall MFU for the duration of that step.

The node exists because of a gap in the memory hierarchy. HBM provides enough bandwidth to feed the accelerator's arithmetic units, but not enough capacity to hold the full 175B-parameter running example. Host DRAM provides capacity (512 GB to 2 TB per server) but not enough bandwidth.

The node bridges this gap by aggregating the HBM of multiple accelerators into distributed capacity connected by a fast interconnect. Each accelerator's HBM remains private to that device: software must shard or replicate tensors explicitly and use collectives or peer transfers when an operation crosses device boundaries. Placing 8 accelerators in one chassis therefore provides 8× aggregate capacity and 8× aggregate compute, but it does not create a single shared-memory accelerator; performance depends on how well the partitioning limits traffic over the fabric.

The capacity arithmetic also explains the appeal of multiple packages. Holding a 175B model's 350 GB of FP16 weights on one accelerator, at the example 17–24 GB per HBM stack, would require 350 GB spread across roughly 15–21 stacks. That exceeds the 5-stack H100 and 8-stack B200-class configurations used here. Such a package would need its own area, yield, power, and cooling analysis. Distributing capacity across 8 accelerators instead uses available packages and pays for communication between their private memories.

Bandwidth hierarchy

The defining characteristic of multi-accelerator systems is not the *number of chips* but the *speed at which they can exchange data*. Data movement speed drops by orders of magnitude as it crosses physical boundaries. Each boundary represents a different physical medium, a different connector technology, and a different set of engineering constraints. This physical ordering of data transfer rates, from on-chip SRAM at the fast end to the wide-area network at the slow end, is the bandwidth hierarchy; this ordering dictates where in the hierarchy each type of parallelism can operate efficiently.

The hierarchy reflects the physical cost of distance: shorter signal paths over denser wiring achieve higher throughput at lower energy per bit, so at each boundary the effective bandwidth (BW) drops by roughly an order of magnitude while latency (L_{lat}) rises. The exact size of each gap depends on link count, signaling, and the measurement boundary, but the gradient itself sets a scaling ceiling for distributed training. The common mistake is to treat all cluster communication as equal. Parallelism placement must be hierarchy-aware, because putting high-frequency synchronization such as tensor parallelism on a slow tier leaves the arithmetic units (R_{peak}) waiting and collapses scaling efficiency (η_{scaling}).

The bandwidth hierarchy can be read as concentric zones around each accelerator. The innermost zone is the HBM on the same package, with terabytes per second of bandwidth and sub-microsecond access latency. The next zone holds the other accelerators in the node's NVLink domain, reachable at hundreds of gigabytes per second per GPU with microsecond-scale transfer latency. The outermost zone spans the other nodes in the cluster, reached through InfiniBand ports that each supply tens of gigabytes per second per direction, with point-to-point latency measured in single-digit microseconds. Latency figures are comparable only when they measure the same thing (a memory access, a link transfer, or a complete collective), and bandwidth ratios only when they compare matching endpoints and directions. Table 0.11 lists representative paths on that basis.

Table 0.11: The bandwidth hierarchy: These representative paths have different bandwidth budgets. Link bandwidths are per direction; link count, signaling, and system configuration determine the gap between tiers. These example bandwidth gaps favor placing frequent tensor-parallel collectives within the fast communication domain, which need not coincide with a server boundary.

Domain	Interconnect	Bandwidth	Latency	Scaling limit
Intra-package	Silicon interposer	~3.35 TB/s	$<$ 100 ns	Single chip
Intra-node	NVLink/ICI	~450 GB/s	~0.5 µs	Node (8–16 chips)
Intra-node (I/O)	PCIe Gen5 x16	~64 GB/s	~1 µs	CPU-GPU, NIC-GPU
Inter-node	InfiniBand NDR	~50 GB/s	~5 µs	Pod (thousands)

Drawn as concentric domains around on-package HBM3, the hierarchy loses 7.4× to 9× of bandwidth at each physical boundary on the way out through NVLink, InfiniBand, and remote storage (figure 0.26).

Parallelism strategies must respect these physical boundaries; a simple synchronization calculation makes the bandwidth gaps concrete.

Napkin Math 2.3: The physics of the staircase

Problem: A 10 GB buffer must move one hop at each tier of the hierarchy, with a local HBM read as the reference point. How much does the tier it crosses change the transfer time?

Math: Transfer time is $T_{\text{transfer}} = D_{\text{vol}}/\text{BW}$.

1. **HBM (local read, the reference point)**: 10 GB / 3,350 GB/s $\approx$ 3.0 ms.
2. **NVLink (intra-node)**: 10 GB / 450 GB/s $\approx$ 22.2 ms.
3. **InfiniBand (inter-node)**: 10 GB / 50 GB/s $\approx$ 200 ms.

Systems insight: For the same payload, the example inter-node path has a transfer-time lower bound 9× larger than the example intra-node path. Size alone does not decide which traffic may cross that cliff; frequency and overlap do. Tensor parallelism exchanges activations inside every layer, on the critical path, so it favors the fast local NVLink domain in this configuration. Data parallelism moves the largest buffer, the full gradient, but only once per step and overlapped with the backward pass, so it can cross the scarce InfiniBand tier. A partition that fits in memory

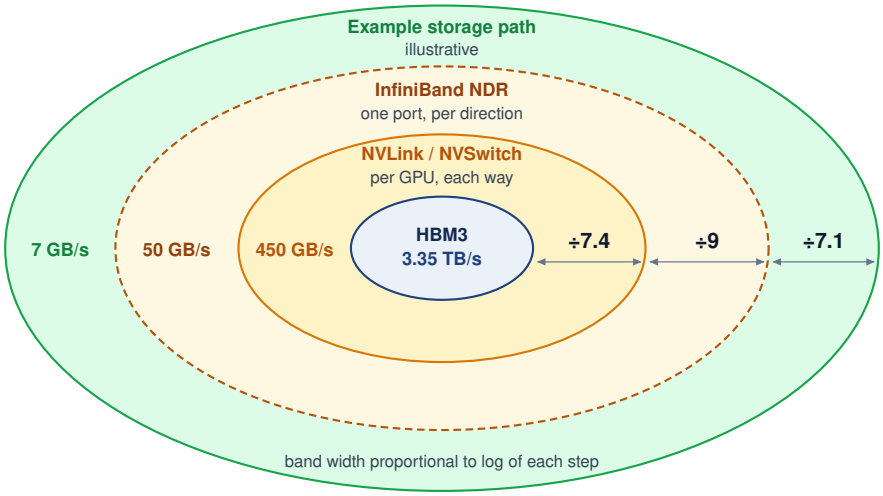


Figure 0.26: The infrastructure bandwidth hierarchy: Concentric zones place each tier an ML workload crosses farther from the accelerator's own memory. HBM (3.35 TB/s) sits at the center; the outward tiers are NVLink/NVSwitch (450 GB/s per direction per GPU), one InfiniBand NDR port (50 GB/s per direction), and an illustrative 7 GB/s storage path. Each step outward cuts bandwidth by roughly 7.4, 9, and 7.1 times, not by a universal tenfold law. Exploiting this hierarchy through tiered algorithms is the primary task of distributed systems engineering.

> can still spend much of a step waiting if its exposed exchanges exceed the communication budget.

Each cliff in the bandwidth staircase has a physical cause at its distance scale. Millimeter-long traces on a silicon interposer can carry a very wide, slow-clocked parallel interface without serializer/deserializer (SerDes) transceivers. NVLink crosses tens of centimeters of board copper, which requires SerDes transceivers with equalization to recover the signal at high per-lane rates. PCIe pays for universal compatibility with protocol overhead (packet headers, flow-control credits, and error checking). InfiniBand crosses meters of cable between racks, adding optical conversion on longer runs, forward error correction, and switch hops. Section 4 develops the signaling physics behind these cliffs. For node design, link count and sustained bandwidth must be evaluated together with the power and cooling load of the components that provide them.

The practical consequence for model partitioning is that tensor parallelism (TP), which splits individual matrix multiplications across accelerators and requires collective exchanges within layers, generates communication volume proportional to the model's hidden dimension hundreds of times per second. Over NVLink, each of these exchanges takes under a millisecond for the running model (section 7 computes the idealized lower bound). At the reference InfiniBand port rate, the bandwidth-only lower bound for the same exchange is 9× as large; the step-time effect also depends on startup, routing, and overlap. For this topology TP therefore stays within a node, although a system whose fast scale-up fabric spans several chassis can place a tensor-parallel group across them; communication cost, rather than the server enclosure, determines the useful partition.

The hierarchy also explains why pipeline parallelism occupies an intermediate position in the bandwidth requirements. In pipeline parallelism, the model is divided into sequential stages, with each stage assigned to a different group of accelerators. The communication between stages consists of activations flowing forward during the forward pass and gradients flowing backward during the backward pass, with a volume proportional to the batch size times the hidden dimension.

For our 175B model with hidden dimension 12,288 and a microbatch of 4 sequences at 2,048, the activation tensor at each stage boundary is approximately $4 \times 2,048 \times 12,288 \times 2B$ bytes (FP16) $\approx$

201 MB. This is far smaller than the 350 GB gradient AllReduce required by data parallelism, which is why pipeline parallelism places less demanding requirements on the inter-node network.

Activation transfers occur once per microbatch per stage boundary. That is far less often than tensor parallelism's AllReduce inside every layer, yet more often than data parallelism's gradient exchange, which happens once per step. Small messages at an intermediate frequency let pipeline parallelism tolerate the lower bandwidth of inter-node links, which makes it the natural way to split a model whose layers do not fit in one node.

Both pipeline and data parallelism therefore cross node boundaries, for different reasons (table 0.12). Pipeline traffic is small per message and sits between the other two in frequency; the data-parallel gradient exchange is the largest transfer, but it occurs once per step and can overlap the backward pass, which makes it the most latency-tolerant of the three, although any unfinished exchange still delays the update. For the example topology, the resulting mapping places tensor parallelism within the node, pipeline stages across nodes, and data-parallel groups across the cluster. This *de facto* pattern is a starting point for the capacity and timing calculation; a different scale-up domain, message size, or overlap opportunity can justify a different placement.

Table 0.12: Traffic shape by parallelism strategy: The placement rule follows from size and frequency together. Frequent exchanges on the critical path need the fastest tier, while the largest exchange can cross the slowest tier because it happens once per step and overlaps the backward pass.

Strategy	Size per exchange	Frequency	Overlap with computation	Placement on this topology
Tensor parallelism	Activation-sized partial results	Inside every layer, forward and backward	Little; later operations depend on the result	Within the NVLink domain
Pipeline parallelism	One microbatch's activations at a stage boundary	Once per microbatch per boundary	Partial, through microbatch scheduling	Across nodes, adjacent stages close together
Data parallelism	The full gradient	Once per step	Substantial, during the backward pass	Across the cluster

The mapping constrains how the scheduler assigns devices and nodes. Members of a tensor-parallel group belong inside one fast domain (on this topology, one chassis joined by NVLink), because their dependent exchanges recur inside every layer. Adjacent pipeline stages belong in the same rack or neighboring racks, where their activation and gradient traffic crosses the fewest InfiniBand switch hops. Data-parallel groups can span the whole cluster. Physical adjacency helps only when it corresponds to better connectivity. The node's PCIe hierarchy adds another placement constraint by connecting accelerators to host CPUs, network interface cards (NICs), and storage, including the path used to reach host DRAM.

The PCIe hierarchy within a node

While NVLink carries GPU-to-GPU traffic, PCIe Gen5 connects accelerators, host CPUs, network adapters, and storage through the node's peripheral hierarchy. Host DRAM attaches to the CPU's memory controllers; a GPU transfer to that memory also traverses its host-facing PCIe path. PCIe bandwidth, approximately 64 GB/s per direction (128 GB/s bidirectional) per x16 link, can therefore constrain data loading, checkpointing, or GPU-to-network transfers. Which traffic competes depends on the actual links and switches those paths share.

A standard DGX H100 node features two host CPUs, each managing a PCIe root complex, with PCIe switches fanning those lanes out so that each of the 8 GPUs and each of the 8 InfiniBand host channel adapters (HCAs, the network interface cards of an InfiniBand fabric) has its own x16 link. This configuration provides an aggregate theoretical bandwidth of about 2 TB/s within the chassis. However, this bandwidth is shared among competing traffic streams. During a single training step, the PCIe bus simultaneously carries host-to-GPU data batches, GPU-to-HCA gradient shards for inter-node AllReduce (via GPUDirect remote direct memory access (RDMA)), and periodic CPU-to-NVMe checkpoint writes. Contention between these streams can cause unexpected pipeline stalls, particularly when gradient synchronization saturates the links typically used for data loading.

The dual-CPU architecture introduces significant non-uniform memory access (NUMA) effects. The 8 GPUs are physically partitioned, with 4 connected to CPU 0's root complex and 4 to CPU 1's. A GPU connected to CPU 0 can reach CPU 0's DRAM through its local PCIe root complex, whereas access to CPU 1's DRAM also traverses the inter-socket link. The latency and bandwidth penalty depends on the processor, socket interconnect, PCIe topology, transfer size, and concurrent traffic, so no fixed percentage applies across nodes. Data-loading pipelines should measure this topology and place worker processes, pinned buffers, NICs, and target GPUs within the same NUMA domain when the local path improves sustained ingestion.

The practical consequence is that placement is part of the parallelism strategy: a scheduler that ignores PCIe roots, NIC locality, and NUMA domains can turn an otherwise valid tensor- or pipeline-parallel plan into a host-bound bottleneck.

Dense node designs

↪ Mapping data, tensor, and pipeline parallelism onto intra-node and inter-node bandwidth tiers is developed in section 8.

Given the bandwidth hierarchy, the node must connect 8 accelerators with enough bandwidth for tensor-parallel operations across their private memories. A switched fabric can provide full bisection bandwidth, enough capacity across any equal division of the endpoints to carry their full injection rate. Comparing a ring, a mesh, and a switched design shows what connectivity costs and which communication patterns it supports.

The simplest approach would be to connect the 8 GPUs in a ring, where each GPU has links to its two neighbors. A ring is inexpensive (requiring only G_{node} links for G_{node} GPUs) and works well for ring-AllReduce, where data flows sequentially around the ring in a circular pattern. The ring-AllReduce algorithm achieves optimal bandwidth utilization for gradient synchronization because each GPU simultaneously sends data to its right neighbor and receives data from its left neighbor, keeping all links busy throughout the operation.

However, tensor parallelism requires frequent collectives after sharded matrix operations. Besides AllReduce, common operations include ReduceScatter, which combines contributed values but leaves each participant with only a shard of the result, and AllGather, which assembles distributed shards at every participant. A physical ring can execute ring-AllReduce efficiently, but its fixed multi-hop paths constrain other simultaneous traffic patterns and make topology-aware scheduling important. A fully connected mesh, where every GPU has a direct link to every other GPU, eliminates the multi-hop constraint but requires $G_{\text{node}}(G_{\text{node}}-1)/2 = 28$ links for 8 GPUs, a wiring challenge that becomes impractical as the link count grows quadratically. The NVSwitch crossbar provides full-bisection switched connectivity with a manageable number of switch chips.

Consider the NVIDIA DGX H100 architecture. Eight H100 GPUs sit on a single baseboard, each connected to four NVSwitch chips via 18 NVLink 4.0 lanes. The NVSwitch chips form a non-blocking crossbar[7] through which any GPU can reach any other GPU. Each GPU's port budget is 900 GB/s bidirectional, or 450 GB/s in one direction, shared across that GPU's simultaneous transfers; it is not a separate full-bandwidth link for every GPU pair.

The result is a node with 640 GB of aggregate HBM capacity and a combined peak compute throughput of 8 × 1,979 TFLOP/s, while each GPU retains private HBM. Training frameworks partition tensors explicitly across those devices, and NVSwitch reduces the communication cost between shards without making placement or collective synchronization transparent.

The NVSwitch chips themselves consume approximately 200 W each (800 W total for the NVSwitch fabric), a nontrivial power overhead justified by the bisection bandwidth it provides. In physical terms, the NVSwitch fabric alone consumes more power than an entire previous-generation GPU (the V100 drew 300 W). Without NVSwitch, achieving full all-to-all connectivity would require 28 direct GPU-to-GPU links, a wiring nightmare that would also consume more total NVLink lane capacity.

This node-budget example assumes one activation-sized AllReduce per layer in each forward and backward pass. The partition and collective schedule are scenario inputs, not a universal Transformer schedule. During the modeled tensor-parallel forward pass, each GPU holds one shard of each weight matrix and computes its portion of the matrix multiplication. For a Transformer layer with hidden dimension 12,288 (typical for a 175B model), each of the 8 GPUs holds a $12{,}288 \times 1{,}536$ slice of the weight matrix. After each GPU computes its partial result, an AllReduce operation sums the partial results across all 8 GPUs over NVLink.

7 **Crossbar switch**: A topology providing a dedicated path between every input-output pair simultaneously. An $k \times k$ crossbar needs k^2 crosspoints, so its cost grows quadratically with port count; that growth is why a full crossbar stays inside a node and larger systems switch to multi-stage fabrics. Within that bound, the crossbar buys the all-to-all bandwidth that tensor parallelism demands.

The logical output tensor for one AllReduce contains $4 \times 2{,}048 \times 12{,}288 \times 2$ bytes (FP16). For a microbatch of 4 sequences at 2,048 tokens, that payload is roughly 201 MB. An ideal ring AllReduce with 8 participants moves $2(N-1)/N = 1.75$ times the payload per GPU, or about 352 MB. At 450 GB/s of one-direction bandwidth, the transfer-time lower bound is approximately 0.783 ms.

Across 96 forward layers and 96 backward layers, the 192 transfers sum to about 150.3 ms per step before overlap. NVSwitch provides the paths needed for the collective, but this value remains an ideal bandwidth-only lower bound that excludes startup latency, software overhead, and competing traffic.

↪ The α-β model, which adds the fixed per-message startup latency this bound omits to the bytes-over-bandwidth transfer time, is developed in section 4.

Judging that bound needs a compute time to compare it with. This scenario assumes 200 ms of computation per step for the tensor-parallel group, a stated input rather than a derived value; the fractions below scale with it, so a longer compute time makes the same communication matter less. Against that assumption, the unoverlapped NVLink lower bound leaves computation at 57.1 percent of combined compute-plus-communication time. Actual tensor-parallel efficiency can be higher when collectives overlap useful computation or lower when latency, contention, load imbalance, and nonparallel work add delay, so it must be measured rather than inferred from peak link bandwidth alone.

Example 2.3: The NVLink bandwidth surprise

Scenario: A team evaluates tensor parallelism over a hypothetical PCIe Gen5 path with 64 GB/s bandwidth, using the payload and the assumed 200 ms per-step compute time stated with the NVLink estimate above.

Diagnosis: The modeled tensor-parallel schedule executes 192 AllReduce events per step across 96 layers. Its PCIe bandwidth-only transfer times sum to 1057 ms per step. Without overlap, communication accounts for 84.1 percent of the combined compute and transfer estimate; this is not a measured stall fraction.

Systems lesson: Under the same assumptions, NVLink lowers the transfer bound to 0.783 ms per AllReduce and raises computation to 57.1 percent of the combined time. The comparison explains why this partition favors a fast local fabric. Real collective performance must also include startup, topology, contention, and overlap.

The DGX H100 pairs each GPU with its own InfiniBand ConnectX-7 HCA, which reads and writes GPU memory directly over PCIe through GPUDirect RDMA, so inter-node gradient exchange avoids staging copies in host DRAM while still consuming PCIe and network bandwidth.

↪ The RDMA and GPUDirect data path that bypasses host memory is developed in section 4.

The host CPU prepares and loads batches, submits kernels, and coordinates the training framework. Sufficient CPU capacity and I/O bandwidth let that work overlap the accelerator fabric's computation and communication. Otherwise, slow preprocessing or submission can starve the GPUs even when their local memory and interconnect are fast enough.

As the "data center tax" on host CPUs has grown, with a substantial share of CPU cycles consumed by network protocol processing, storage virtualization, and security functions, ML nodes can incorporate data processing units (DPUs) or SmartNICs. Devices like the NVIDIA BlueField DPU offload these infrastructure tasks to dedicated ARM cores and hardware accelerators integrated into the network adapter itself. Moving the control plane for RDMA, firewall rules, and storage protocols to the DPU recovers cycles for the ML pipeline: data loading, tokenization, and kernel orchestration on the host CPU. The DPU also acts as an isolated security domain, allowing cloud providers to maintain control over the network and storage layer via the DPU while granting customers full access to the host CPU and GPUs. For our 175B model training, DPU offload can keep RDMA protocol processing outside the host CPU critical path for gradient synchronization, which flows from GPU HBM toward the network fabric without host CPU involvement.

Alternative node architectures

These alternatives are accelerator-system designs, not interchangeable product names. An AMD MI300X is a GPU-class accelerator whose package emphasizes very large HBM capacity, while Intel/Habana Gaudi designs emphasize Ethernet/RDMA attachment as a first-class communication

path. Comparing them against a DGX H100 node reveals where each architecture spends its scarce budget.

The DGX H100 answers a general node-design problem by making local accelerator exchange cheap. A switch-rich design spends power, board area, and cost on universal any-to-any exchange. That choice is easy to justify when tensor parallelism is the critical path, because each Transformer layer turns local accelerator communication into part of the model's inner loop. The 900 GB/s H100 NVLink fabric therefore buys a software abstraction: the training framework can treat eight accelerators as one tightly coupled tensor-parallel group for the layers that must be split across chips.

Other systems move that boundary. TPU pods use the inter-chip interconnect and a mesh-oriented topology instead of making a central switch the defining component of the node; a TPU v5p chip's vendor-specified ICI bandwidth is 1,200 GB/s. The mesh can reduce switch cost and expose a regular structure to the compiler, but it also makes placement more visible: the runtime must respect neighbor relationships rather than assuming that every chip pair has the same communication path. That is a reasonable trade when the workload is regular enough for the compiler and collective libraries to map communication onto the topology.

The MI300X shifts the pressure point from local switching toward memory capacity. Its package exposes 192 GB of HBM at 5.3 TB/s, compared with 80 GB on an H100-class accelerator. An eight-accelerator MI300X node would therefore provide 1,536 GB of aggregate HBM, enough to hold the 350 GB FP16 weight tensor for our 175B running model. That does not eliminate the optimizer, gradient, activation, and fragmentation problem that section 8 quantifies, but it changes how often the system must spill state into slower memory tiers and how much microbatch headroom remains before offload becomes mandatory.

Gaudi takes a different route by integrating RDMA-capable Ethernet into the accelerator and using a more network-centric design for communication. A Gaudi 2 accelerator's 24 integrated 100 GbE ports supply 300 GB/s of aggregate RDMA over Converged Ethernet (RoCE) bandwidth, against the 900 GB/s of local exchange per GPU in an H100-class NVLink node. The newer Gaudi 3 keeps that Ethernet-centric design while carrying 128 GB of HBM per accelerator, so capacity is not the trade being made. The question is whether simplifying the fabric and using Ethernet consistently across node and pod is worth giving up the very high local exchange bandwidth of a switch-rich NVLink design. That trade can be attractive when data parallelism, inference serving, or cluster cost dominates, and less attractive when tensor-parallel collectives sit inside every layer.

These alternatives are not a ranking of vendors. They are different placements of scarce resources: switching bandwidth in the node, regular topology in the pod, HBM capacity in the package, or network attachment on the accelerator. For the 175B model used throughout this chapter, the tensor-parallel portion of training makes local accelerator communication unusually important, so the DGX-style answer is natural. In other regimes, especially memory-heavy recommenders, topology-regular training, or cost-sensitive serving fleets, a different boundary can become the one that matters most. Software ecosystem maturity, supply availability, and total cost of ownership then decide whether the theoretical architectural fit becomes a deployable system.

Node memory partitioning

The node's aggregate HBM must hold far more than the weights, and how that state divides across the node's memory tiers decides which parallelism strategies are possible. Consider the memory budget for training our 175B model. The model weights in FP16 require 350 GB. The Adam optimizer maintains two additional values for every parameter (first and second moments) in FP32 precision, adding $175 \times 10^9 \times 2 \times 4$ bytes = 1,400 GB. Gradients require another 350 GB. This subtotal is approximately 2.1 TB, far exceeding both a single accelerator's 80 GB HBM and an 8-H100 node's 640 GB aggregate HBM, and it still omits two terms. Activations are the intermediate results the backward pass needs. The FP32 master weights are a full-precision copy of the parameters that the optimizer updates, kept because an update far smaller than a weight would be lost to FP16 rounding; this is the mixed-precision copy introduced with the precision formats in section 6.

A common misconception is that a model's memory footprint equals its weight storage. With those two terms included, the FP32 master weights, optimizer moments, gradients, and activa-

tions collectively consume about 7–8× more memory than the FP16 parameters alone, and these components reside in different tiers of the node's memory hierarchy.

For our 175B model, training memory partitions across six distinct components (table 0.13).

Table 0.13: Training memory breakdown for a 175B-parameter frontier model: The optimizer state alone (first and second moments in FP32) consumes 4× the memory of the model weights, making optimizer memory the dominant component of training memory. This is why memory optimization techniques focus heavily on optimizer state sharding and offloading.

Component	Precision	Memory per parameter	Total for 175B model
Model weights	FP16	2 bytes	350 GB
Gradients	FP16	2 bytes	350 GB
Master weights	FP32	4 bytes	700 GB
Optimizer (Adam m)	FP32	4 bytes	700 GB
Optimizer (Adam v)	FP32	4 bytes	700 GB
Activations	Mixed	Variable	100–400 GB
Total			**2.9–3.2 TB**

The 2.9–3.2 TB budget of table 0.13 extends the earlier subtotal with the master weights and activations. Its five persistent rows sum to 16 bytes per parameter, or 2.8 TB, the training state given for Archetype A in section 11, and activations add the rest. The Adam optimizer state in FP32, not the FP16 weights, is the dominant term, and the activation peak, which scales with batch size and sequence length, is the most variable. The lesson for parallelism selection is that the FP16 weights are among the smaller pieces of what the node must hold, so a strategy that only shards weights leaves the largest consumers, the FP32 optimizer moments and master weights, untouched.

A DGX H100 node provides 640 GB of aggregate HBM across its 8 GPUs, plus 2 TB of host DDR5 DRAM. The HBM capacity alone is insufficient for the full training state. The memory arithmetic for different parallelism strategies shows why. With pure data parallelism, each GPU must hold replicated state, and even the 2,100 GB subtotal of weights, gradients, and optimizer moments, before master weights and activations, is physically impossible on an 80 GB device. Even ZeRO stage 3, which shards all three components across only 8 GPUs, yields 2,100 GB / 8 ≈ 262.5 GB per GPU, still more than triple the available HBM. The solution is to combine tensor parallelism (which splits tensors and operations within layers across GPUs, reducing per-GPU weights to 350 GB / 8 = 43.75 GB) with data-parallel sharding across many replicas. In a configuration with TP-8 within each node and 128-way data parallelism across the cluster, each GPU holds 43.75 GB of weight shards. The optimizer state is likewise partitioned, first by the 8-way tensor split and then across the 128 data-parallel replicas, so each GPU holds approximately 1,400 GB / (1024) ≈ 1.4 GB of optimizer state, or 10.9 GB per 8-GPU tensor-parallel group, before gradients, activations, buffers, and fragmentation. The weight-plus-optimizer subtotal of roughly 45.1 GB is only the starting point; the memory-budget exercise in section 8 examines a node without this cross-node sharding and shows why optimizer offload alone is insufficient there. This arithmetic is why tensor parallelism, optimizer sharding, activation checkpointing, and memory tiering are used together for large-model training. The node is therefore a high-bandwidth compute and communication unit, not a standalone container for the entire training state.

Because even full ZeRO-3 sharding within one node leaves each GPU above its HBM capacity, sharding must be combined with other techniques. Activation checkpointing stores only a subset of intermediate activations for the backward pass and recomputes the remaining activations from the nearest checkpoint. It trades roughly 33 percent more FLOPs for up to 10× lower activation memory.

CPU offloading stores state in host DDR5 DRAM and may also move optimizer computation to the CPU. The implementation determines which gradients, weights, or optimizer buffers traverse the PCIe Gen5 path at 64 GB/s. Its cost depends on those bytes, host computation, and the time available to overlap transfers; a short GPU update does not establish cheap offload. NVMe offloading extends storage to SSDs, with the illustrative 5–7 GB/s sequential read rate introducing a further bandwidth constraint that prefetching can hide only when consumption leaves enough time.

An offloaded configuration uses the node's memory hierarchy as a tiered system, sorted by how often each piece of state is touched. HBM holds the active computation: the weight shards needed for the current layer's matrix multiplications, the current microbatch's activations, and the gradients accumulating during the backward pass. Host DDR5 holds state touched once per step, typically the optimizer moments and master weights read and written only during the parameter update. NVMe extends capacity for the largest models, holding seldom-accessed shards that are prefetched during computation when the transfer schedule fits the step budget. A configuration with sufficient distributed HBM can instead retain optimizer shards on accelerators. The placement follows the capacity and transfer-time calculation, rather than a fixed assignment of every state type to one tier.

The training framework's memory manager orchestrates the flow of data between these tiers, operating much like a hardware cache controller but at a coarser granularity. The analogy to hardware caching is instructive: just as a CPU's cache controller uses prefetching to hide memory latency by loading data before the processor needs it, the training framework's memory manager uses software-level prefetching to hide the PCIe transfer latency by loading weights before the GPU needs them. During the forward pass of layer ℓ, the manager simultaneously prefetches the weights for layer $\ell+1$ from DDR5 to HBM (if they have been offloaded) and evicts the weights for layer $\ell-2$ from HBM back to DDR5 (if memory is tight).

When transfer throughput can keep pace with consumption, pipelining allows each layer's computation to proceed without waiting for data transfers, at the cost of increased software complexity and careful tuning of the prefetch depth. If the prefetch is too shallow, the computation stalls waiting for data. If the prefetch is too aggressive, HBM fills up with data that will not be used for several layers, crowding out the activations and gradients needed for the current computation. The capacity-bandwidth trade-off across these tiers determines which data a training framework can keep "hot" and which it must prefetch; table 0.14 quantifies the gaps the memory manager must bridge, more than two orders of magnitude in bandwidth between HBM and an NVMe drive.

Table 0.14: Node memory hierarchy: Each tier trades capacity for bandwidth. Latencies are seen from the GPU, so host DRAM includes the PCIe crossing, and a GPU's own share of host bandwidth is limited by its PCIe link rather than by the aggregate DDR5 figure. The training framework's memory manager must orchestrate data flow across these tiers to fit models whose total state exceeds the aggregate HBM capacity.

Memory tier	Capacity	Bandwidth	Latency	Role
GPU HBM3	80 GB × 8 = 640 GB	3.35 TB/s per GPU	< 1 µs	Active computation
Host DDR5	2 TB	hundreds of GB/s aggregate	~1 µs over PCIe	Optimizer state
NVMe SSD	8–30 TB	up to 7 GB/s per drive	~100 µs	Overflow, checkpoints

For our 175B model, a capacity plan must choose among additional sharding, offload, and reductions in live state. The next budget tests whether a proposed combination actually fits within one node.

Node-level memory budget

To solidify the memory planning concepts, consider a concrete sizing exercise for our 175B model on a DGX H100 node.

Example 2.4: Memory budget for 175B training on DGX H100

Scenario: An engineering team calculates the memory budget for training a 175B parameter model using 8-way tensor parallelism on an 8-GPU DGX H100 node (80 GB HBM per GPU).

Diagnosis: Without ZeRO sharding, each GPU's TP-8 slice of the optimizer state alone requires 175 GB per GPU, which is more than the weights and gradients combined (88 GB). A separate FP32 master-weight shard adds 87.5 GB. Together with retained FP16 gradients, the assumed activations, and workspace, these components bring the per-GPU budget to 375 GB, well past the 80 GB HBM limit. That budget already assumes activation checkpointing; its activation

peak is a scenario input that must be replaced by measurements for the chosen microbatch and sequence length.

Systems lesson: Sizing training memory requires managing weights, gradients, optimizer states, activations, and buffers holistically, because relieving one component does not necessarily clear the envelope. Offloading the optimizer moments and master weights to host DDR5 removes those FP32 components and still leaves 113 GB per GPU, because 8-way tensor parallelism keeps a full weight and gradient shard resident on every GPU. Further reductions require offloading or shrinking another live component. Alternatively, adding devices creates an additional data-parallel group across which ZeRO can shard state. The same eight GPUs already assigned to TP-8 do not provide an independent eight-way data-parallel sharding axis; parallel degrees multiply to the allocated device count.

The example illustrates why memory planning for large models is a careful engineering exercise rather than a simple capacity calculation. Memory, however, is only one of the node's supply lines; the accelerators also need a continuous stream of training data from outside the chassis.

Data loading and I/O pipeline

If the data loading pipeline cannot keep pace with the accelerators' consumption rate, the most expensive component in the node sits idle; this is the I/O bottleneck. For pre-tokenized language-model training, the raw demand is small. At 500,000 tokens/s stored as 4-byte token IDs, ingestion is only 2 MB/s. The pressure falls instead on the host CPU cores that read, decode, shuffle, and batch examples, on the PCIe paths that data shares with gradient and checkpoint traffic (section 7), and on shared storage that every node reads at once. GPUDirect Storage can remove the host-memory bounce copy for data that needs no host-side preprocessing, and staging data on local NVMe can absorb synchronized bursts that would otherwise hit a shared filesystem.

For node design, the hardware contract is end-to-end sustained bandwidth at the intended concurrency: storage servers, network paths, host preprocessing, host memory, and accelerator transfer must all keep pace, because a local benchmark that satisfies one node says little about a shared path serving the fleet.

↪ Sizing the input pipeline end to end, with every stage from storage read to host-to-device transfer held at or above the required bandwidth, is developed in section 11.

Node health and reliability

Capacity, bandwidth, and data supply describe a node that works; the last node-level question is how often it stops working. The node is the fundamental failure domain in the fleet hierarchy. For an eight-way tensor-parallel group within a node, a single GPU failure typically makes the group unusable for the training job because its collectives require all eight participants. A single missing GPU breaks the collective communication, stalling all other GPUs in the node. The node's effective MTBF depends on the combined failure exposure of every component whose loss stops the job, as well as shared power and cooling failures. The node's figure is therefore an MTBF, the expected interval between successive failures of a unit that keeps running through replacements, while each GPU contributes an MTTF, the distinction drawn with the reliability wall in section 11.

Failure exposure spans memory, interconnects, and the electrical and mechanical systems that support them. An uncorrectable error-correcting code (ECC) fault in an HBM stack forces the accelerator out of service and aborts the active training step. High-speed links degrade as repeated thermal cycles stress connectors and cables, which shows up as link retraining or a fatal communication drop. Power-supply components and the pumps and fans of the cooling path wear out under sustained load, and a loss of power or cooling can take several accelerators down together. The accelerator itself usually dominates the count: in Meta's report on the Llama 3 405B pretraining run, faulty GPUs and HBM3 memory errors together caused nearly half of the unexpected interruptions, ahead of software bugs and network switches and cables (Dubey et al. 2024). The ordering in a given fleet still depends on its equipment and operating conditions, so local incident data should confirm it before it guides spare capacity or preventive maintenance.

Health monitoring can identify nodes that need investigation before another long job is assigned. The most useful early signals are a rising rate of corrected ECC errors, which often precedes uncorrectable errors; rising junction temperature at constant workload, which points to degraded cooling

or thermal contact; and intermittent link retraining, which points to a failing cable or connector. These signals are evidence, but no one signal establishes a cause or a fixed time to failure. A maintenance policy should combine that history with diagnostics and the cost of removing a node, then check whether its interventions reduce unplanned interruptions.

Node-level health monitoring is therefore a critical operational practice. Modern fleet management systems continuously collect telemetry from each GPU (temperature, power draw, ECC error counts, NVLink error rates) and from the host BMC (baseboard management controller). Automated health checkers run short diagnostic workloads on idle nodes to verify that all GPUs, NVLinks, and InfiniBand connections are functioning correctly before the job scheduler assigns training work to that node. Without this proactive monitoring, a silently degraded node can corrupt training gradients (if the error is in the arithmetic path) or slow the entire job (if the error causes NVLink retraining, which temporarily reduces bandwidth).

↪ Layered fault detection, from ECC and error-rate monitoring to known-answer stress tests on nodes pulled from production, is developed in section 10.

For our 175B model training across 128 nodes, the probability of at least one node experiencing a hardware issue during a two-week training run is substantial. Under a composite node-level MTBF assumption of 1,000 hours, which includes GPUs, host components, power, cooling, and network links, the expected number of node failures during a run of 336 hours is approximately 43. This means the training run will experience, on average, roughly 3.1 failures/day. A GPU-only lower bound from the canonical per-GPU MTTF of 50,000 hours would predict only 6.9 GPU-driven node outages over the same run, before adding host, power, cooling, and network failure terms. Each failure requires detecting the degraded node, draining its workload, substituting a spare node, and resuming from the last checkpoint, a process that takes 10 minutes–30 minutes with automated tooling. With automated recovery, the direct restart overhead is roughly 2.1 percent–6.4 percent of the run; without spare nodes and automated recovery, multi-hour interventions can push overhead into the 20–30 percent range, consuming millions of dollars in wasted GPU-hours. The same accounting, applied to every component of a facility and then to every GPU of a fleet, reappears at larger scope in the facility reliability controls of the rack and the hours-scale fleet failure interval of section 11.

For our 175B model, a single DGX H100 node provides 640 GB of aggregate HBM, enough to hold the FP16 model weights but not the full Adam training state without sharding and offload. Training also requires processing hundreds of billions of tokens, and a single node would need more than a year of compute to do so (section 11 works through the numbers), so completing training in weeks requires tens to hundreds of nodes. Stacking those nodes into a physical enclosure defines the next level of infrastructure, where the constraints shift from bandwidth and capacity to raw power and heat.

The Rack

A standard 42U server rack in a traditional data center draws about 12 kW and can be cooled by room-temperature air pushed through perforated floor tiles. The chapter's four-node DGX H100 rack scenario draws 33.5 kW at the modeled IT boundary. At this density, the engineering constraints shift from silicon and signal integrity to power delivery and thermodynamics. The rack is where the power wall and the laws of heat transfer become dominant design forces.

For our 175B model, training across 1,024 GPUs requires 32 racks (4 nodes of 8 GPUs each per rack). Across the cluster, the modeled rack IT power sums to approximately 1.1 MW, before facility cooling overhead. Delivering this power reliably and removing the resulting heat without allowing any component to exceed its thermal limit is a multidisciplinary engineering challenge spanning electrical, mechanical, and civil engineering. A failure at any point in the power delivery chain, from the utility substation to the individual GPU voltage regulator, can halt the entire training run, wasting hours of computation and potentially corrupting the training state.


Definition 2.5: Rack

Rack is the physical infrastructure unit, a standardized 42U enclosure, that houses multiple compute nodes, a top-of-rack (ToR) switch (the first network aggregation point connecting all nodes in the rack to the broader cluster fabric), power distribution units, and cooling

distribution manifolds, defining the granularity at which power and cooling capacity must be provisioned.

1. **Significance**: AI rack power density has grown dramatically. The chapter's four-node DGX H100 scenario contains 32 GPUs at 700 W each and draws 33.5 kW at the modeled IT boundary. This exceeds the roughly 12 kW typical of general-purpose data center racks and requires purpose-designed electrical distribution and cooling capacity. Whether that cooling is engineered air or liquid depends on the system configuration and facility design.
2. **Distinction**: A node packages compute; a rack integrates shared power, cooling, and network distribution. Components and nodes remain individually serviceable, but their maintenance and replacement must respect the capacity and failure boundaries of those shared systems.
3. **Common pitfall**: A frequent misconception is that rack placement is a logistical afterthought. Nodes within the same rack share a ToR switch and have single-hop connectivity; nodes in different racks cross at least two switch hops. Placing pipeline stages within a rack can reduce inter-rack traffic when the actual paths and available capacity support the stage-boundary exchanges.

Heat transfer explains why density reshapes the rack. Air carries far less heat per unit volume than liquid, so an air-cooled rack needs enough airflow, pressure, and temperature rise to carry away its heat, and how much a hall can supply depends on the server and facility design rather than on one rack-power threshold. The rule that results has two anchors. The chapter's 33.5 kW scenario can use engineered air cooling in a suitable facility, while racks in the 100 kW class of high-density training racks need liquid. Direct-to-chip liquid cooling raises heat-removal capacity and can reduce fan energy; between the two anchors, the facility's airflow capacity decides.



Engineered air can still cool the DGX rack; the 100 kW class needs liquid.

Power and thermal envelopes

The rack's cooling choice is the visible end of a longer chain. Sustaining the compute rate that HBM and Tensor Cores make possible requires a power-delivery and cooling system sized for the workload. Delivery itself adds heat before any computation does, because each of the five voltage-conversion stages between the medium-voltage utility grid and the sub-volt GPU die loses part of the power it passes on (figure 0.27).

The illustrative conversion losses in figure 0.27 require roughly 1.3 MW upstream to deliver 1 MW to the dies, before heat removal is counted. That die-level boundary differs from the IT-equipment boundary used in PUE. Equation 0.7 relates total facility power to IT-equipment power, so conversion losses already included in that ratio must not be added a second time:

$$\text{PUE} = \frac{P_{\text{facility}}}{P_{\text{IT}}} \tag{0.7}$$

Here P_{facility} is total power drawn by the data center and P_{IT} is the power consumed by servers, accelerators, storage, and networking equipment. A PUE of 1.5 means the facility draws 1.5 watts from the grid for every 1 watt delivered to IT equipment; the extra 0.5 watts powers cooling, power conversion, lighting, and other overhead.

Every floating-point operation dissipates energy as heat. Dense Tensor Core activity during large matrix multiplications drives heat proportional to the switching activity of billions of transistors. Accelerator vendors publish TDP, total graphics power (TGP), board power, or a configurable power limit, depending on the product; these values are vendor-specific sustained design envelopes rather than interchangeable physical definitions.[8] Fleet design must pair the applicable sustained envelope with any documented transient excursion requirement. At dense fleet scale, this produces the power wall, the point at which facility power delivery and heat removal, rather than available arithmetic units, determine how much compute can be installed and sustained.

The thermodynamic limit (principle 3), which holds that every joule a computation draws ends as heat and that a facility can run only as fast as it removes that heat, makes heat removal part of usable

↪ Direct-to-chip liquid cooling and facility power usage effectiveness (PUE) trade-offs are developed in section 21.

8 **Power envelopes**: TDP, TGP, board-power ratings, and configurable power limits follow vendor-specific conventions. They provide sustained thermal and electrical design targets, not universal measurements of instantaneous consumption. Power-delivery components must also tolerate the product's documented transient excursions, while cooling design uses the applicable sustained thermal envelope and operating conditions.

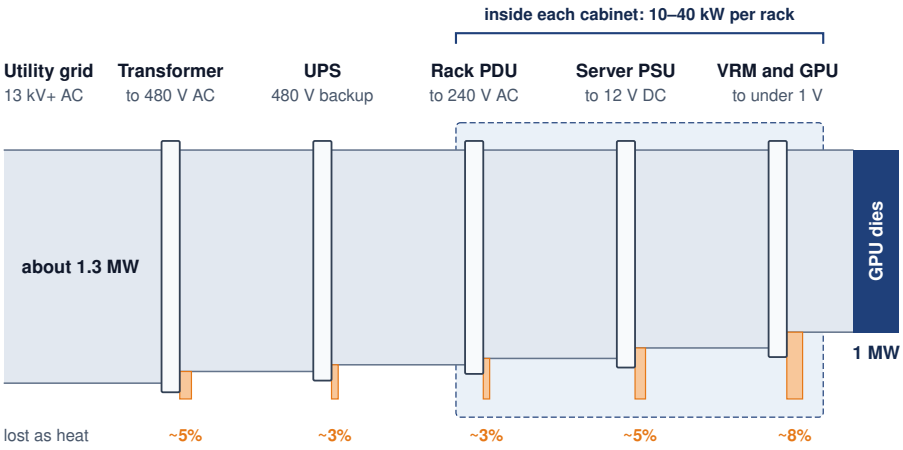


Figure 0.27: The power delivery path: Energy passes through five conversion stages between the medium-voltage grid and the sub-volt supply at the GPU die, and each stage loses a few percent as heat; the band's height is drawn proportional to the power it carries. The per-stage losses shown are illustrative round values, not measurements of a particular facility; compounded, they lose about a fifth of the power, so delivering 1 MW to the dies draws about 1.3 MW before cooling. PUE uses an IT-equipment boundary and includes facility conversion losses as well as cooling; these losses must not be counted twice. The critical engineering challenge is the rack power distribution unit (PDU) to voltage regulator module (VRM) transition, where 10–40 kW of power must be delivered within a single cabinet.

compute capacity. A facility can reach its power or cooling envelope while arithmetic capacity is still available to purchase, so the scarce quantity becomes watts per unit of floor area rather than FLOP/s. The power density wall (principle 4) adds that spatial constraint, bounding cluster scaling by the watts each rack can dissipate rather than only by silicon area or floor space. If a proposed rack exceeds the engineered airflow's heat-removal capability, the design must lower its density or move to liquid, which at the 100 kW class of high-density training racks is part of the rack design rather than an option.

Definition 2.6: Thermal design power (TDP)

Thermal design power (TDP) is a vendor-defined sustained thermal design target in watts for a specified product configuration and operating condition.

1. **Significance**: The H100 SXM5 configuration used in this chapter carries a 700 W design target. Sustaining the intended operating point requires a thermal path and facility loop qualified for that target under the vendor's inlet and coolant conditions.
2. **Distinction**: TDP does not denote one universal instantaneous-power maximum. TGP, board power, configurable limits, and transient specifications describe related electrical constraints under conventions that differ by vendor and product.
3. **Common pitfall**: A frequent misconception is that the advertised wattage alone specifies rack power and cooling. Fleet design must combine the sustained thermal target, configured power limit, workload behavior, component overhead, and transient-power requirement.

The trajectory of TDP tells the story of a scaling regime reaching its limits. For three decades, Dennard scaling[9] allowed chip designers to shrink transistors while maintaining approximately constant power density: smaller transistors required lower voltage, so packing more transistors into the same area did not increase heat output per unit area. As voltage scaling and leakage limits ended that regime, architects had to treat energy, cooling, and parallelism as first-order constraints rather than free byproducts of process shrinks (Dennard et al. 1974; Hennessy and Patterson 2019).

[9] **Dennard scaling**: Named after Dennard et al. (1974) at IBM, who showed how MOSFET dimensions, voltage, and current could scale so that power density stayed roughly constant. Later voltage-scaling limits and leakage effects ended that constant-power-density regime; Hennessy and Patterson (2019) describe the resulting post-Dennard power wall as one reason modern architecture turned toward parallelism and specialization. For ML infrastructure, the V100-to-B200 TDP trajectory (300 W to 1,000 W) is an illustration of the post-Dennard planning problem: cooling and power delivery are now co-equal design constraints with the silicon itself.

Since then, each generation of accelerator has had to trade performance against power and heat. The era of "free" performance improvements through process shrinks is over; every gain in throughput now has to be paid for in watts, cooling capacity, or specialization.

The numbers are stark: the V100 (2017) operated at 300 W TDP, the A100 (2020) increased to 400 W, the H100 (2022) reached 700 W, and the B200 (2024) draws 1000 W. In seven years, TDP has more than tripled, growing at approximately 19 percent per year.

If this growth rate continued as a planning scenario on a two-year product cadence, a generation after Blackwell would approach 1,400 W per accelerator, and the generation after that would reach about 2,000 W. At that level, a single 8-GPU node would consume 16 kW of GPU power alone, requiring liquid cooling[10] infrastructure that can remove heat at rates approaching those of industrial process cooling equipment.

> Systems Perspective 2.2: The end of Dennard scaling
>
> The end of constant-power-density scaling makes the facility envelope part of accelerator selection. Future refreshes must fit the installed power-delivery and cooling capacity, even when they improve arithmetic efficiency. A gain in performance per watt does not establish that a denser rack will draw less power.

The applicable sustained power envelope is not merely a specification on a data sheet; it propagates through every level of the infrastructure stack. The power-delivery chain, cooling system, rack design, and facility electrical infrastructure must accommodate deployed accelerators, their documented transients, and the plausible envelope of future refresh cycles.

Accelerators implement sophisticated power management to operate within their TDP envelope. When the workload does not fully use all SMs (for example, during the communication phase of a training step when the GPUs are waiting for AllReduce to complete), the GPU firmware can disable the clock signal to idle circuitry through **clock gating**, eliminating dynamic switching power and freeing thermal headroom for the active SMs. A separate mechanism, dynamic voltage and frequency scaling (DVFS), adjusts the chip's clock frequency and supply voltage to stay within power and thermal limits; during a large matrix multiplication that activates all SMs simultaneously, DVFS reduces the clock frequency to keep total power within TDP. When some SMs are idle, the active SMs can boost frequency because total chip power is below TDP, so the actual clock, and therefore the actual throughput, varies throughout a training step.

Dynamic power management means that the actual power draw of a GPU varies continuously during training. A typical training step might see power swing from 400 W (during communication phases when most SMs are idle) to 700 W (during the forward and backward pass when all Tensor Cores are active) and back, with each transition occurring in microseconds. The voltage regulator modules (VRMs) on the baseboard, which convert the board supply to the sub-volt core voltage, must respond to these transitions fast enough to maintain a stable supply voltage despite the rapidly changing current draw.

DVFS also couples software optimization to the power envelope. A kernel that achieves high SM occupancy (many active warps per SM) draws more power, potentially triggering a frequency reduction that partially offsets the occupancy benefit. Conversely, a kernel with moderate occupancy may run at a higher clock frequency, achieving comparable throughput at lower power. Power-normalized throughput (TFLOP/s per watt) is therefore a more robust comparison metric than raw TFLOP/s, and it explains why the same GPU can show different sustained clock frequencies depending on the workload and the cooling solution.

At fleet scale, DVFS also affects power planning. Average workload draw can fall below the configured limit because communication phases and incomplete occupancy leave circuitry idle, but averages do not replace sustained and transient design cases. Some operators deliberately lower accelerator power caps to fit more devices within a fixed facility budget, accepting workload-dependent throughput loss in exchange for lower per-device draw. Power capping is a form of the compute-efficiency trade-off at the operational level.

To appreciate the physical challenge, consider what 700 W means in terms of heat flux. An H100 die measures approximately 814 mm² (roughly 29×28 mm). Dissipating 700 W from this area

[10] **Liquid cooling flow rate**: If the modeled rack load of 120 kW is removed through water that warms by 10 °C, the required mass flow is $P_{\text{thermal}}/(c_p \Delta T)$, about 170 liters per minute; a smaller temperature rise needs proportionally more flow. A real design must use the heat fraction captured by the liquid loop and account for residual air cooling. Flow capacity, pressure, leak containment, and loss-of-flow response are separate requirements.

produces a heat flux of approximately 86 W/cm². For comparison, the surface of an electric stovetop burner at high heat produces approximately 10 W/cm². An H100 die generates 8.6× the heat flux of a stove burner, concentrated on an area the size of a large postage stamp.

The B200's 1,000 W envelope spans a dual-die package. In this comparison, the average heat flux remains comparable while the package heat-removal rate increases by 43 percent. Cooling must keep junction temperature and memory temperature within the applicable product limits under the specified inlet and load conditions. A single temperature threshold cannot stand in for those separate requirements.

The thermal interface material (TIM) between the package and its cooling assembly is one part of that heat-transfer path, and it is the part that ages. Training alternates compute-dense phases with communication phases, so the die heats and cools many times per minute; under that cycling, a phase-change or paste TIM can pump out (migrate away from the contact surface) or crack. Increased thermal resistance can raise temperature at the same load, but the performance effect depends on the remaining thermal margin and the device's control policy. A temperature trend alone does not identify the cause; inlet conditions, flow, contact, and workload also require inspection. When thermal limits reduce clocks without stopping execution, the result is a gray failure, a performance degradation that monitoring must distinguish from an application or network bottleneck.

Arithmetic per watt offsets only part of rising TDP. The fixed-precision gain of 5.4× from V100 to B200 (section 3) is the like-for-like figure; FP8 ratings such as 4.50 TFLOP/s/W for B200 look larger only because they change precision as well. Translating a peak-efficiency gain into fewer devices or lower energy requires a workload that preserves quality at the selected precision and sustains enough of the new rate. A larger capability target can also increase total work despite improved efficiency. Facility planning must therefore compare the proposed device count, power envelope, and completion time together.

Packing accelerators close together shortens communication paths but concentrates heat. A four-node DGX H100 rack already draws 33.5 kW at the modeled IT boundary, several times the load of a conventional server rack, and the accelerators of a 10,000-GPU cluster, the round fleet size this chapter uses for warehouse-scale examples, alone draw 7 MW before hosts, network, and cooling are counted. Rack and pod designs must reconcile that proximity with enough space and infrastructure to deliver power and remove heat across all participating nodes.

Power-envelope implications recur throughout the infrastructure hierarchy. At the node level, configured limits constrain how many accelerators can share a chassis (section 7). At the rack level, aggregate sustained load and heat flux help determine whether engineered air or liquid cooling can meet the design point (section 11). At the pod level, coincident demand and transient behavior shape megawatt-scale power delivery (section 11). Every level above the die must therefore manage both sustained heat and electrical variation. Accelerator selection must compare useful workload throughput within that facility envelope, rather than treating power as a cost added after the compute decision.

Rack design considerations

The physical design of an ML rack differs substantially from a traditional server rack in ways that go beyond power and cooling. In a conventional 42U rack, servers are installed as independent 1U or 2U pizza-box units, each with its own fans, power supplies, and cable connections. ML racks use a fundamentally different form factor. A DGX H100 occupies 8U and contains 8 GPUs, the NVSwitch fabric, multiple power supplies, and (in liquid-cooled configurations) coolant manifolds with quick-connect fittings. Four DGX units in a 42U rack leave only 10U for networking switches, cable management, and PDUs.

The transition from traditional server form factors to ML-optimized designs is driven by the same power density challenge that motivates engineered airflow or liquid cooling. A traditional 1U server dissipates 300–500 W and requires only modest airflow for cooling. A DGX H100 node dissipates approximately 8.4 kW across its 8 GPUs, NVSwitches, and supporting components, requiring either massive airflow (in air-cooled configurations) or liquid cooling plumbing (in liquid-cooled configurations). The form factor must accommodate both the compute hardware and the thermal management infrastructure, which is why ML nodes are substantially taller (8U vs. 1U) than traditional servers.

Cable management is a nontrivial engineering challenge. Each DGX H100 node has eight InfiniBand cables (one per GPU), two Ethernet management cables, power cables, and, for liquid-cooled units, coolant hoses. A fully populated rack contains over 40 high-speed cables whose layout is governed by three strict physical constraints: airflow clearance, minimum bend radius, and electromagnetic interference. In air-cooled designs, cables must not obstruct intake or exhaust airflow, because even a localized blockage creates hot spots that trigger thermal throttling. High-speed cables simultaneously enforce a minimum bend radius (typically 10–15$\times$ the outer diameter for active optical cables), below which optical fibers suffer attenuation and induce bit errors or complete link drops. Densely bundling high-speed copper cables can also induce electromagnetic crosstalk that degrades signal quality. In large installations, the cable plant alone can take weeks to install and test, and cable routing errors are one of the most common causes of post-installation debugging delays.

As rack power densities climb toward 100 kW for liquid-cooled clusters, power conversion and chassis volume become important design budgets. Traditional designs dedicate volume in every chassis to redundant AC power supply units (PSUs), while many dense-rack designs use rack-level DC power distribution. In this architecture, a centralized power shelf converts mains AC to a 48V DC busbar that runs the height of the rack, replacing individual server AC supplies. Power reaches the server backplane through the 48V bus, and local DC-to-DC converters supply the lower voltages required by the components. Consolidation can recover chassis volume for cooling loops and high-bandwidth interconnects, but it does not by itself establish fewer conversion stages or a fixed efficiency gain. The comparison must account for each design's actual stages and conversion efficiency across the intended load range. Shared power shelves and busbars also create a rack-level failure boundary whose redundancy and serviceability must be qualified.

The rack's network attachment needs the same density-driven rethinking, starting with the top-of-rack (ToR) switch. In traditional data centers, a ToR switch provides 1–10 Gb/s Ethernet connectivity to each server, aggregated into uplinks to higher-level switches. In an ML rack, the ToR switch is an InfiniBand or high-speed Ethernet switch providing 400 Gb/s per port, and it must handle the bursty, synchronized traffic patterns of distributed training.

The placement and configuration of ToR switches affects which exchanges remain local. In a conventional design, all 8 GPUs in a node connect to the same ToR switch, so when every GPU sends its share of a data-parallel AllReduce at once, the traffic of all eight converges on one switch and its uplinks. A rail-optimized design instead assigns each GPU position to its own "rail": GPU 0 in every node connects to leaf switch 0, GPU 1 to leaf switch 1, and so on. Data-parallel collectives typically run among GPUs with the same index on different nodes, so a rail-aligned group's traffic stays within a single switch when all its endpoints attach there. Larger rail groups can span switches and still use the fabric above them; the benefit depends on how the job's process groups map onto those paths.

The rail-optimized design spends additional switches, ports, and cabling to align communication paths with accelerator rails. Its benefit depends on the collective traffic matrix, routing, oversubscription (a switch tier with less uplink than downlink capacity, so traffic leaving it competes for fewer links), and job placement rather than a fixed efficiency gain.

↪ How rail-optimized topologies align cabling with collective traffic is developed in section 8.

Power delivery networks and transient dynamics

A training step makes each accelerator's current draw jump. When a collective barrier releases a node's GPUs from a communication phase into dense arithmetic, each one steps from a few hundred watts toward its full power envelope within microseconds, and the barrier correlates those steps across the node. The power delivery network (PDN) must hold the supply voltage steady through that step, and the difficulty grows as the voltage falls from the 48V busbar to the sub-1V rail at the die.

At a fixed power, current scales inversely with voltage, so the core rail carries far more current than the busbar; the voltage regulators transform voltage and current between those boundaries. What disturbs the supply is the rate of change of that current, its slew rate di/dt. Every conductor loop has inductance, a property that resists changes in current, so a fast current step produces a momentary voltage dip, or droop, even when average power remains within the facility budget.

Definition 2.7: Power delivery network (PDN) and transient dynamics

Power delivery network (PDN) is the electrical distribution hierarchy that supplies the processor through regulators, interconnects, and decoupling capacitors. Parasitic loop inductance contributes to voltage fluctuations during changes in current.

1. **Significance**: Synchronized workload transitions can correlate accelerator demand. Supply excursions outside the device's specified limits can cause timing errors, protective throttling, or resets.
2. **Distinction**: Local electrical transients require a faster response than facility power-control loops can provide. Regulators and nearby charge storage address different timescales within the same hierarchy.
3. **Common pitfall**: Applying the full core-current slew to a single inductance summed from rack to die. Regulation and decoupling change the current waveform at each stage; the relevant inductance and current must belong to the same path.

For a particular inductive path, the voltage excursion contributed by its inductance follows equation 0.8:

$$\Delta V = L_{\text{parasitic}} \frac{di}{dt} \tag{0.8}$$

Here $L_{\text{parasitic}}$ is the loop inductance of that path, and di/dt is the current slew through it. Local capacitors initially supply part of a load-current increase, so the current slew seen upstream need not equal the slew at the core. A complete rail model also accounts for resistance, capacitance, and regulator response.

A worked estimate for one accelerator shows why the hierarchy matters. When an H100 moves from its communication-phase draw of about 400 W to its 700 W envelope on a 0.8 V core rail, its core current rises by about 375 A. Suppose the board loop between the voltage regulator and the package has 50 pH of inductance. If package capacitors supply the fast edge so that this loop sees the step over 1 µs, equation 0.8 gives a droop of about 19 mV, or 2.3 percent of the rail. If the same step reached that loop in 100 ns, the droop would be about 190 mV, roughly 23 percent of the rail and far outside a 5 percent operating band. The inputs are scenario assumptions, but the tenfold sensitivity to rise time is physical. The same current step stays inside tolerance or corrupts timing depending on which charge store answers it first.

The collective barrier that aligns transitions from communication to arithmetic raises the correlation of demand across a rack, but it does not imply that every accelerator switches on the same nanosecond or that their core currents flow through one shared low-voltage loop. Engineers must evaluate both each device's local voltage excursion and the aggregate demand seen by upstream supplies.

A rising load can produce voltage droop; an abrupt load reduction can produce overshoot. Droop below the specified operating minimum can invalidate timing margins. Overshoot must remain within the device's specified limits as well. Neither the magnitude nor the resulting failure mode follows from workload synchronization alone.

The mitigation is a hierarchy of charge storage and control, in which each tier answers the transients too fast for the tier above it (table 0.15). Placement and parasitic impedance determine which frequencies each tier can address.

Table 0.15: Decoupling tiers in the power delivery network: Each tier supplies charge on a timescale the slower tier above it cannot reach, so a fast edge that bypasses a tier lands on a larger inductance.

Tier	Charge store or control	Response timescale	Transients it absorbs
On-die	On-die capacitance	Sub-nanosecond	Switching activity within a kernel
Package	Package and interposer capacitors	Nanoseconds	Kernel launches and streaming-multiprocessor activation edges

Tier	Charge store or control	Response timescale	Transients it absorbs
Board	Bulk capacitors, regulator control loop	Microseconds	Communication-to-compute phase changes of one accelerator
Facility	Uninterruptible power supply (UPS), utility	Milliseconds to seconds	Synchronized power swings across racks and the cluster

Workload-level controls complement these hardware tiers. Power ramping can reduce abrupt demand changes where the hardware and firmware support it, but a design must verify those controls rather than assume that every kernel launch receives automatic smoothing. The fleet-level lesson is that average power capacity and transient voltage integrity require separate checks.

Facility reliability and environmental controls

Rack design also defines physical failure domains. Data centers housing ML infrastructure implement multiple layers of physical security and environmental monitoring both for regulatory compliance and because a single rack of DGX H100 nodes ($1.4 million in hardware alone) concentrates enough value, heat, and liquid-cooling risk to justify controls that would be excessive for traditional server equipment.

Environmental monitoring is therefore part of the compute design rather than a facilities afterthought. Water detection sensors beneath raised floor tiles and around liquid cooling piping can identify leaks within seconds and trigger automatic coolant isolation valves. Aspirating smoke detection systems continuously sample air from inside racks, detecting combustion byproducts at concentrations far below what sprinkler-activating detectors can sense. Vibration sensors on the building structure and rack frames catch seismic events or construction-induced vibration that could damage disk drives or loosen cable connections. Humidity control keeps relative humidity between 40–60 percent to prevent both static discharge and condensation.

These environmental controls are not afterthoughts but integral parts of the infrastructure design that affect reliability and uptime. A water leak that reaches a DGX H100 baseboard can cause millions of dollars in damage and weeks of downtime. A fire in a single rack can shut down an entire data center hall for days while the fire suppression system is recharged and the affected area is decontaminated. The 2021 OVHcloud fire in Strasbourg shows how a single-building incident, absent the right compartmentalization, escalates into a site-wide failure domain.

War Story 2.1: The data center that became the failure domain (2021)

Context: OVHcloud operated four data centers at its Strasbourg site, serving customers whose systems depended on the site's physical power, fire, and recovery design (OVHcloud 2021).

Mechanism: On March 10, 2021, a fire broke out in building SBG2. Uncontained fire spread and shared power pathways destroyed building SBG2, damaged adjacent SBG1, and forced emergency shutdown of SBG3 and SBG4.

Impact: Thousands of servers were physically destroyed, taking over 3.6 million websites offline worldwide and destroying unbacked-up customer data.

Fix: OVHcloud rebuilt the site with independent physical fire barriers, isolated power distribution per building, and mandatory free off-site backup storage.

Systems lesson: Compute infrastructure extends beyond GPUs and network topology. Fire compartments, power isolation, backup geography, and disaster-recovery assumptions determine whether a rack-scale incident becomes a site-scale outage. Multi-node ML training clusters inherit this physical dependency: a single data-center power or cooling domain failure halts active training runs and destroys un-replicated checkpoint states unless recovery paths cross physical facility boundaries.

Once rack-level controls are in place, the reliability question moves up to facility redundancy. The same failure-domain logic that isolates a leaking rack also decides how much duplicate power, cooling, and recovery capacity the site should buy.

Data center reliability is commonly classified using the Uptime Institute Tier system, with Tier III and Tier IV representing common options for mission-critical compute (Uptime Institute 2026). A Tier III facility is concurrently maintainable: redundant capacity components and distribution paths let operators maintain or replace equipment without shutting down IT operations. Tier IV adds fault tolerance through independent, physically isolated systems, so a single equipment failure or distribution-path interruption should not affect IT operations. The practical difference is not a magic availability number; it is how much failure prevention the building buys in electrical and mechanical infrastructure before software-level resilience takes over.

For ML training, the calculus differs from traditional enterprise computing. A training run is a long-running batch process, not a real-time transaction system, so a facility outage during a two-week run usually costs a restart from the last checkpoint rather than permanent data loss, provided a valid checkpoint survives in an accessible failure domain and usable compute becomes available. The restart still incurs lost work, recovery time, and potentially a missed deadline. Many training deployments therefore pair concurrently maintainable (Tier III) facilities with aggressive application-level fault tolerance: rather than buying every layer of building-level redundancy, they invest in checkpointing, job restart, and storage that can absorb rare facility interruptions, and redirect the avoided resiliency spend toward accelerators, networking, or storage. Facility redundancy and application-level recovery address different parts of the same risk. A design can trade some preventive infrastructure for checkpointing and recovery capacity only after checking which failures the recovery path survives and whether the resulting completion-time risk is acceptable.

Checkpoint 2.3: Infrastructure physics

A team is planning to deploy 256 H100 GPUs (32 nodes, each drawing about 8.4 kW as computed in the rack design section) in an existing air-cooled data center with 250 kW of available facility power, a PUE of 1.5, and a cooling plant that can reject 200 kW of IT heat.

- ☐ **Facility power**: calculate the total power draw, including cooling overhead.
- ☐ **Binding capacity**: identify whether power capacity or cooling capacity is the binding constraint.
- ☐ **Required modifications**: specify what modifications would be needed to support the full deployment.

The rack concentrates power and heat into a physical volume where thermodynamics, not software, sets the limits. A single rack of 32 GPUs, however, is far from sufficient for our 175B model, which needs tens to hundreds of nodes, many racks' worth, to train on a practical schedule. The next level of infrastructure aggregates tens to hundreds of racks into a unified computing system: the pod, whose physical interconnect fabric must be engineered around the communication patterns and failure domains the workload creates.

The Pod

Training our 175B model on a single DGX H100 node (8 GPUs, 15,832 TFLOP/s of aggregate FP8 peak) would take about 1.4 years at the efficiency assumed below, even if the model state could fit. Roughly 37 nodes bring the compute-only time down to two weeks, and about 512 nodes bring it to a single day, before any communication or recovery overhead. A pod is the cluster-scale unit that makes this possible: many racks under one high-speed fabric, power envelope, and cooling design. Pod design is the first point where topology, power, and failure domains become shared infrastructure rather than per-rack concerns. Figure 0.28 contrasts two dominant pod-scale fabrics: a two-tier leaf-and-spine fat tree providing full bisection bandwidth across all node uplinks, and a 2D torus wiring each node to its immediate neighbors with $\mathcal{O}(\sqrt{N_{\text{nodes}}})$ bisection scaling to reduce switch count and exploit traffic locality.

The engineering challenge of the pod is wiring those nodes together into a network fast enough to keep gradient synchronization from becoming the bottleneck. The pod aggregates tens to hundreds of racks into a single, coordinated computing system where the network fabric serves the same role that the system bus serves within a single machine.

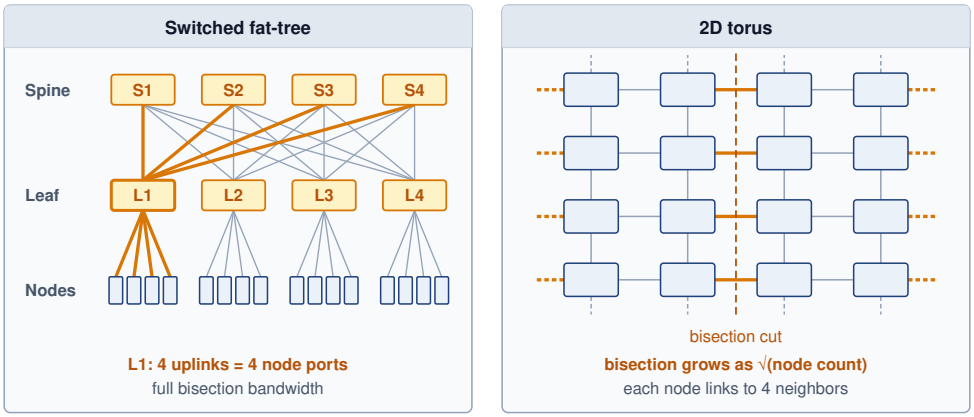


Figure 0.28: Pod-scale network topologies: Two dominant ways to wire a pod. Left: a switched fat-tree, drawn here as a two-tier leaf and spine fabric in which every leaf switch connects to every spine switch and has as many uplinks as node ports, so any half of the nodes can talk to the other half at full rate (full bisection bandwidth). InfiniBand clusters such as DGX SuperPOD use this design, and larger pods add a third, core tier above the spines. Right: a 2D torus wires each node directly to its four neighbors, and the dashed stubs wrap each row and column around to its opposite edge; bisection bandwidth grows only as $\mathcal{O}(\sqrt{N_{\text{nodes}}})$, so the torus is cheaper at scale but rewards workloads with strong locality, as in Google TPU pods. The choice shapes which parallelism strategies run efficiently.

The scale of this challenge is worth appreciating concretely, and the pod-scale examples that follow deliberately step up to eight times the 1,024-GPU reference cluster. A 1,024-node DGX H100 cluster contains 8,192 GPUs, 4,096 NVSwitch chips, 8,192 InfiniBand HCAs, several hundred InfiniBand switches, tens of thousands of cables, and draws approximately 8.6 MW at the modeled rack IT boundary. It occupies 256 four-node racks across one or more data center halls.

The physical weight of such a cluster is also substantial. Each DGX H100 node weighs approximately 130 kg (288 lb), so 1,024 nodes weigh over 133 metric tons. Combined with racks, switches, cables, and cooling infrastructure, the total weight can exceed 300 metric tons. The data center floor must be structurally engineered to support this concentrated load, with typical floor loading requirements of 1,500–2,500 kg per square meter for ML clusters, compared to 500–1,000 kg per square meter for traditional server installations. This structural requirement is often overlooked during facility planning and can be a blocking constraint for retrofitting existing buildings.

The physical layout of the data center hall reflects these density constraints. The extreme power density of ML training racks necessitates rigid hot aisle/cold aisle containment in air-cooled sections, where cold air is forced into the enclosed front of the rack and waste heat is captured immediately at the rear exhaust. The "spine" of the hall, the central cable corridor connecting all racks to the aggregation switches, must accommodate thousands of fiber optic cables and power feeds. Overhead cable trays are preferred over under-floor routing to improve airflow and accessibility, carrying the heavy copper power feeds and fragile fiber interconnects that form the nervous system of the cluster. The layout must also accommodate the liquid cooling infrastructure: coolant distribution unit placement, coolant piping runs, and isolation valves that allow individual racks to be serviced without draining the entire cooling loop. These physical layout decisions, made during facility design, constrain the network topology options available to the training team years later.

Training a 175B model on this cluster requires about six floating-point operations per parameter per training token, two in the forward pass and four in the backward pass, or $6 \times 175 \times 10^9 \times 300 \times 10^9$ in total (assuming 300 billion training tokens). The token count is where the scaling laws of section 6 enter the hardware plan, because a compute-optimal allocation would give a model of this size many times more tokens than GPT-3 saw, multiplying this budget, and the pod-hours it consumes, by the same factor. Assuming local compute efficiency of 45 percent before communication and pipeline losses, the aggregate compute rate is $8,192 \times 1979 \times 10^{12} \times 0.45$ FLOP/s, or about 7.30 EFLOP/s, yielding a compute-only baseline of approximately 12 hours. On the 1,024-GPU reference

cluster itself, the same budget at the same efficiency would take about 4 days. This assumed local efficiency is not measured distributed MFU, because MFU over a distributed step already includes its communication and pipeline losses. In the terms of the Fleet Law (equation 0.3), this baseline is the T_{compute}/N term alone.

In practice, communication overhead, pipeline bubbles, checkpoint I/O, hardware failures, and maintenance windows compound to extend the actual wall-clock time beyond that baseline. The first two are the Fleet Law's exposed $T_{\text{comm}}(N)$ and $T_{\text{sync}}(N)$ terms, and the rest are operational losses around the step. Notebook 2.4 chains these factors into a scenario estimate of wall-clock time; production schedules can stretch further once queueing, data readiness, debugging, reruns, and site-specific operational margins enter the plan. The central theme is unchanged: at pod scale, the schedule depends on both local execution and fleet overhead. Recovering this lost time is the central challenge of distributed systems engineering, and the solutions span hardware (better networks), software (overlapped communication), and operations (proactive maintenance to minimize downtime).

Napkin Math 2.4: Training time for 175B

The training time for our 175B model derives from first principles.

1. **Total FLOPs**: Using the same $6 \times P \times D$ approximation, where $P = 175 \times 10^9$ and $D = 300 \times 10^9$ tokens: 3.15×10^{23} FLOPs
2. **Cluster throughput**: 8,192 H100 GPUs at 1,979 TFLOP/s peak, assuming 45 percent local compute efficiency before distributed overhead: $8,192 \times 1979 \times 10^{12} \times 0.45$ FLOP/s before distributed overhead $\approx$ 7.30 EFLOP/s
3. **Compute-only training baseline**: $(3.15 \times 10^{23}$ FLOPs$)/(8,192 \times 1979 \times 10^{12} \times 0.45$ FLOP/s$) \div 3600 \approx$ 12.0 hours
4. **Illustrative overhead chain**: The scaling factor already includes pipeline fill and drain, so no separate bubble step follows. Each subsequent percentage adds time relative to the preceding subtotal, not to final wall time; the factors are scenario assumptions, not independent measured losses:
   - Distributed-step losses (scaling efficiency 0.56, the modeled tier for 8,192 GPUs, covering communication and pipeline bubbles): $\div$ 0.56 $\rightarrow$ 21.4 hours
   - Checkpoint overhead ($\approx 3\%$): $\times 1.03 \rightarrow$ 22.1 hours
   - Hardware failures and restarts ($\approx 10\%$ of the checkpoint-adjusted subtotal): $\times 1.10 \rightarrow$ 24.3 hours
   - Maintenance windows ($\approx 5\%$): $\times 1.05 \rightarrow$ 25.5 hours

The total training time is 25.5 hours in this simplified scenario chain, or about 1.1 days. Real production calendars may still stretch to weeks after queueing, debugging, reruns, and site-specific operational margins are included. Recovering this lost time is the domain of distributed systems engineering.

The pod as a warehouse-scale computer

At this scale, the warehouse-scale computer (WSC) described in *The Datacenter as a Computer* (Barroso et al. 2019) requires a matched budget for arithmetic and communication. Rounding the pod up to 10,000 H100 GPUs, about ten times the reference cluster, keeps the warehouse-scale arithmetic easy to follow, and the chapter's other fleet-scale power, cost, and failure examples use the same round figure. Such a WSC supplies approximately 9.89 EFLOP/s of FP16 peak and 19.8 EFLOP/s at FP8. Non-blocking InfiniBand at 50 GB/s per GPU, the injection bandwidth each endpoint can push into the fabric, provides 500 TB/s of aggregate injection bandwidth and 250 TB/s across the bisection, the cut that splits the cluster into two equal halves. With 4:1 oversubscription at that boundary, meaning the switch tier above it has one quarter as much uplink as downlink capacity, the modeled crossing capacity falls to 62.5 TB/s. The effect on a collective depends on how much traffic crosses

the constrained paths, its schedule, and competing transfers. The bandwidth ratio alone is not a collective-time multiplier.


↩ The warehouse-scale computer as the unit of fleet design is established in section 5.

Treating the building as one computer, rather than as a room full of computers, changes how engineers approach its physical design. In a traditional data center, each server is an independent unit with its own operating system, storage, and network identity. The facility simply provides power, cooling, and physical security. Servers can be added, removed, or replaced independently, and the workloads running on different servers are unrelated to each other.

In a WSC, a server assigned to a distributed training job contributes to a shared completion time. Its standalone throughput is useful only if the other participants, network, and storage can sustain that rate. For the running model, a node must obtain additional memory capacity or offload state, and a practical training schedule also requires more compute. The network fabric, distributed storage, and fleet orchestrator make those resources available as one training system.

Coupling distinguishes a WSC from a general-purpose cluster. A synchronous training job couples the workers in its own process groups, so a failed worker can stall that job while other tenants continue, unless a shared power, cooling, or network failure reaches them as well. Designing such a machine is building-level computer architecture. Rack placement, the power delivery chain, and the network topology must be co-designed, because a mistake at any layer propagates through the others.

The first physical consequence concerns communication. The network can set the scaling ceiling: within a single node NVLink supplies enough bandwidth for tensor parallelism, but across nodes the fabric must carry gradient tensors, activation checkpoints, and pipeline stage outputs, so a building-scale machine is only as fast as the wires that bind its cores. The WSC reframing makes the interconnect a first-class architectural component rather than a peripheral.



Mean time between GPU failures falls inversely with GPU count.

The second consequence is that *failure is a physical certainty, not an exceptional event*. The arithmetic is the one behind figure 0.17. Under the scenario assumption of independent failures and a per-GPU MTTF of approximately 50,000 hours, a cluster of 10,000 GPUs has a mean interval of roughly five hours between GPU failures, and the 25K-GPU fleet of that figure about two. That is an expectation, not a periodic schedule, and shared power or cooling faults add correlated exposure. The node failure estimate of section 8 and the facility controls of section 11 are the same exposure at smaller scope. Redundant infrastructure, such as dual-path power feeds and redundant switch fabrics, can prevent some interruptions; checkpoint storage and recovery capacity limit lost progress when a running job must stop. Both belong in the physical design. Redundancy keeps many component failures from halting the job, and checkpoints bound the work lost when one does.

The third consequence is that the building blocks combine differently depending on the workload they must carry. A pod is not assembled from a single canonical part list; the interconnect, the switching, and the memory placement are each chosen against the communication and capacity pattern the dominant workload imposes. Table 0.16 contrasts three pod designs. An NVIDIA SuperPOD wires GPUs through an InfiniBand fat-tree for any-to-any flexibility, a Google TPU pod hard-wires chips into a torus for dataflow throughput, and a recommendation pod built for Archetype B arranges the same class of accelerators around embedding memory rather than raw compute.

Table 0.16: Pod architecture by workload: Each pod's interconnect, switching, and memory emphasis reflects the communication and capacity pattern of its dominant workload, not a single best design.

System	NVIDIA SuperPOD	Google TPU Pod	Recommendation pod
Interconnect	InfiniBand Fat-Tree	3D Torus ICI	RoCE (RDMA over Ethernet)
Switching	External Switches	Direct Chip-to-Chip	Leaf/Spine Ethernet
Topology	Any-to-any	Nearest-Neighbor Mesh	Rail-optimized
Optimization	Flexibility	Dataflow Throughput	Embedding Memory
Dominant workload	Diverse Research	LLM Training	Recommendation

The recommendation pod is the clearest case of memory placement, not compute, driving the layout, and it is the physical form of Archetype B (DLRM at Scale). Its embedding tables reach 10

TB or more, which lighthouse 2.1 showed would need at least 15 DGX H100 nodes of HBM merely to hold, while the dense neural-network layers that operate on those embeddings are comparatively small. A recommendation-first design splits the two across the memory hierarchy. The terabyte-scale embedding tables reside in host CPU DRAM (roughly $3–$5/GB), and the dense layers execute on GPUs, where the compute density justifies the $10–$15/GB cost of HBM. Embedding tables create a capacity requirement, but small random lookups can also saturate aggregate memory bandwidth or expose access latency at high concurrency. Host placement trades capacity cost against lookup throughput and host-to-accelerator transfer, so the workload must validate both budgets. The systems lesson is that optimal infrastructure is workload-specific, not specification-maximizing. Deploying compute-optimized nodes for a memory-capacity-bound workload would strand most of the accelerator's throughput on a problem its silicon was never the bottleneck for.

The physical design supplies constraints, not an operating policy; later chapters turn its power, capacity, topology, reliability, and sustained-throughput measurements into placement, recovery, monitoring, and ownership decisions. One hardware decision remains for this chapter. With every level from the accelerator to the warehouse-scale computer in view, the choice of accelerator can now be judged against the whole hierarchy rather than against its data sheet.

Accelerator Selection for Fleet Workloads

↪ The ownership decision, in which sustained fleet utilization sets the build-versus-buy threshold, is developed in section 20.

An accelerator's compute throughput, memory bandwidth, memory capacity, and power consumption are meaningful only in relation to a specific workload. The same H100 that sustains 30–50 percent of peak during well-tuned large-batch training may achieve less than 5 percent utilization during single-request inference, because the binding constraint shifts from arithmetic to memory bandwidth. Selecting the right accelerator therefore requires mapping each workload archetype to its position on the Roofline plot and identifying which physical resource dominates its performance.

For the 175B running example, large local matrix operations can place substantial training work above the Roofline ridge point. Arithmetic throughput then matters alongside the capacity needed for sharded state and the interconnect needed by the partition. H100, B200, and TPU v5p configurations are candidates to evaluate under the same workload and quality target. The selected software stack must express the required operations efficiently enough for the hardware advantage to appear in sustained execution.

Serving the same language model changes the answer, for the reason the token-latency notebook 2.1 established. At batch size 1, the H100's 3.35 TB/s bandwidth determines decode throughput while much of the arithmetic silicon waits, so the key metric becomes memory bandwidth per dollar rather than peak TFLOP/s. Batching helps for the reason section 6 quantified, reusing each weight read across more requests, which is why serving systems work so hard to batch without violating tail-latency service-level objectives (SLOs). The workload did not change names, but the binding term of the single-machine iron law moved from arithmetic to data movement, and the accelerator choice changes with it.

Recommendation models split the decision across sparse lookup and dense computation. Each request retrieves many small vectors from terabyte-scale tables with poor locality, so the tables create a capacity requirement while lookup concurrency determines access latency and bandwidth demand. The dense neural network layers have a different reuse pattern. A hybrid CPU-GPU design can place tables in host DRAM and dense computation on accelerators, but its transfer and lookup costs must be compared with accelerator-resident sharding or caching. One headline TFLOP/s number cannot describe the complete request path.

Vision and diffusion workloads move back toward arithmetic throughput because convolutions, attention blocks, and denoising networks reuse data heavily. Diffusion inference makes this especially clear. A standard Stable Diffusion v1.5 configuration runs 50 denoising steps, so the service pays for a sequence of full model evaluations rather than one decode step per token. For these workloads, TFLOP/s per dollar often dominates bandwidth per dollar once model state fits in memory.

Mixture of experts (MoE) adds a routing constraint: the sparsely gated layer activates only part of a much larger parameter set for each token (Shazeer et al. 2017). Mixtral-8x7B (A. Q. Jiang et al. 2024), for example, has 46.7B total parameters but only 12.9B active parameters per token because the router chooses 2 experts from 8 experts. That compute saving introduces a many-to-many token exchange pattern, the AllToAll collective, and load-balance risk because tokens must be routed

to different expert placements. High-bisection fabrics and load-balancing mechanisms such as auxiliary losses, which penalize overloaded experts, or capacity factors, which cap how many tokens each expert accepts, determine whether the theoretical saving appears in the training trace (Fedus et al. 2022; Lepikhin et al. 2021).

↪ MoE AllToAll routing and expert load imbalance are developed in section 10.

Multi-modal models combine phases with different arithmetic intensity and batching behavior, such as vision encoding and text decode. Their relative cost and placement determine whether flexible scheduling, additional memory, or communication capacity changes the critical path. Modality count alone does not select an accelerator architecture; the planner must follow the data exchanged between the actual phases.

> **Systems Perspective 2.3: Matching hardware to workload**
>
> Workload diversity can justify a heterogeneous fleet, with each pool provisioned for its binding resource. The gain comes from matching hardware to the work assigned to it, while keeping each tightly synchronized training group balanced. The fleet-wide decision must account for that matching benefit together with the cost of supporting multiple platforms.

Precision and throughput trade-offs


The formats and peak rates of section 6 become fleet decisions once they are priced. The FP8 doubling has a capacity-equivalent dollar value, and quantization changes how many devices serving needs.

FP8 doubles the H100's advertised arithmetic ceiling for supported operations, from 989 TFLOP/s to 1,979 TFLOP/s per GPU; at fleet scale that doubling has a price tag. For a 10,000-GPU cluster priced at roughly $350,000 per 8-GPU node, the increase in advertised arithmetic capacity is equivalent to adding another 10,000 GPUs, or roughly $438 million in node hardware. This is a peak-capacity comparison; it is not a prediction of training speedup or a saving that can be booked before workload validation.

The E4M3 and E5M2 trade-offs described with the formats are why the doubling is not free. Scaling places a tensor within the format's range but does not restore the precision lost to rounding in only 3 mantissa bits. Values outside the representable range can saturate or become nonfinite, and sufficiently small values can round to zero. The selected recipe therefore needs workload-specific quality validation even when Transformer Engine supplies the scaling machinery. Infrastructure sizing must use the sustained rate of a validated precision policy.

For inference, quantization changes both weight storage and the possible hardware topology. Our 175B model at FP16 requires 350 GB, necessitating a minimum of five 80 GB H100 GPUs for the parameters alone. At INT8, the weight payload drops to 175 GB, fitting on three GPUs. At INT4, it shrinks to 87.5 GB, fitting on two GPUs. These are weight-only capacity bounds; quantization metadata, attention state, and workspace also need memory. Reading 4-bit rather than 16-bit weights quarters the raw payload, but it does not change physical bandwidth or guarantee a fourfold token-latency reduction. Kernel support, conversion work, other traffic, and any change in device count determine the realized gain, subject to validation of model quality.

Energy cost of data movement



Data movement dwarfs arithmetic in energy cost.

The Roofline Model and token latency analysis demonstrate that data movement limits performance. Data movement also dominates energy consumption, with direct implications for fleet economics. A useful normalization is one FP16 operand. Reading one 16-bit value from HBM at roughly 4 pJ/bit costs about 64 picojoules (pJ), while one FP16 multiply-accumulate operation costs roughly 1 pJ. The raw operand fetch can therefore cost about 64× the arithmetic operation, before tiling and reuse amortize that movement across many MACs.

This operand-level ratio explains why accelerator architects devote so much silicon area to data reuse. A Tensor Core's tile-based execution model loads a small matrix into local registers and reuses each element hundreds of times (once per element in the opposing matrix), amortizing the HBM access cost across hundreds of 1 pJ compute operations. Without this reuse, the energy budget would be dominated by memory access, and most of the chip's power would be spent heating wires rather than switching transistors.

At fleet scale, movement energy must be evaluated over the execution schedule. A 10,000-GPU cluster operating within a 700 W per-GPU envelope also powers control, interconnect, and other circuitry; the operand-level ratio does not determine the share of that envelope spent on memory. Kernel fusion and FlashAttention reduce particular transfers, while activation checkpointing trades saved activation storage for recomputation. The useful comparison is total energy to complete equivalent work at the required quality, including any change in execution time.

The energy perspective provides a physical foundation for understanding why different parallelism strategies have different efficiencies. Tensor parallelism requires data movement over NVLink (approximately 5 pJ per bit at the link level, plus the energy of the NVSwitch chips). Data parallelism requires data movement over InfiniBand (approximately 15–20 pJ per bit, including the energy of the HCA and switch). Pipeline parallelism moves less data but requires more complex scheduling. Each parallelism strategy represents a different point in the trade-off between communication energy and computation efficiency.



Napkin Math 2.5: The energy cost of data movement

At modern process nodes, moving data costs far more energy than computing on it. The energy hierarchy of a single operation at the 4 nm node makes the gap concrete.

Take the operand-level ratio above one tier further. One FP16 multiply-accumulate (MAC), the atomic unit of deep learning, costs about 1 pJ, and fetching its 16-bit operand from HBM costs about 64 pJ. Fetching the same operand from off-package DRAM at roughly 20 pJ per bit costs about 320 pJ, 320× the MAC itself, so standard DRAM multiplies the HBM penalty another fivefold.

The macro impact appears when serving our 175B model. Generating a single token requires loading the entire 350 GB weight tensor from HBM:

$$\text{Data Movement Energy} = 350 \text{ GB} \times 8 \text{ bits/byte} \times 4 \text{ pJ/bit} \approx \mathbf{11.2} \text{ Joules}$$

The computational cost for the associated ≈ 175 billion MACs (about 350 billion FLOPs) is trivial by comparison:

$$\text{Computation Energy} = 175 \times 10^9 \text{ MACs} \times 1 \text{ pJ/MAC} \approx \mathbf{0.175} \text{ Joules}$$

The whole-model ratio lands on the same 64× as the single-operand comparison above, because at batch size 1 each weight fetched feeds exactly one multiply-accumulate; only reuse separates the two. This energy penalty is why HBM is engineered for physical proximity to the GPU die; shorter traces mean less capacitance and lower energy per bit. It also explains why techniques that reduce data movement, such as quantization (moving fewer bits) and kernel fusion (preventing round-trips to memory), are the primary levers for improving both system performance and power efficiency.

Benchmarking accelerator performance

A procurement team comparing accelerators needs a published number that predicts the performance the organization will actually achieve. Peak TFLOP/s, memory bandwidth, and TDP describe *potential*, not *achieved* performance, so the decision turns on whose measured results to trust and under what rules they were produced. The industry-standard reference is MLPerf, maintained by MLCommons: MLPerf Training reports the time to train reference models to a target accuracy, and MLPerf Inference reports serving throughput and latency under realistic batching and streaming conditions. Both capture complete system performance, including software stack efficiency, communication overhead, and memory management, rather than raw silicon speed alone.

Closed-division MLPerf results constrain the workload and quality target to support comparisons across implementations. They still permit specified optimizations and benchmark-dependent tuning; the rules do not require identical hyperparameters or ordinary untuned framework configurations in every case. Open-division submissions allow broader changes and require closer inspection of what differs. Neither division predicts a deployment automatically. Compare the submission's

workload, software, precision, hardware count, and quality target with the intended system before using its result for procurement.

For our 175B model, training, fine-tuning, and serving need separate measurements. Batch shape, trainable state, sequence length, and partitioning can change both capacity demand and the critical path. Fine-tuning does not occupy a fixed point between training and decode merely because it updates an existing model. Evaluate the intended phases on candidate hardware with the actual model and data pipeline, using published MLPerf results as comparative evidence rather than deployment forecasts.

Systems Perspective 2.4: Beyond peak specifications

When evaluating accelerator options, the following metrics provide a more complete picture than peak TFLOP/s alone:

- **MFU**: The ratio of achieved FLOP/s during real training to peak hardware FLOP/s. An MFU of 50 percent means the model's useful computation averages half the chosen peak rate over the measurement interval; it does not distinguish partially occupied execution from completely idle time.
- **Time-to-train**: The wall-clock time to train a reference model to a target metric. This captures all system-level effects that a steady-state MFU measurement can omit, including I/O stalls, checkpointing overhead, and job restart delays outside its measurement window. Whole-run MFU includes those elapsed-time losses but still does not establish the model quality reached.
- **Cost per token**: For language model training, the total cost (hardware amortization plus electricity) divided by the number of tokens processed. This metric normalizes across different hardware generations, cluster sizes, and pricing models.
- **Tokens per dollar**: The inverse of cost per token. Divide tokens per second by dollars per second, converting an hourly rental price to the same time unit before comparing systems.

No single metric tells the whole story. A system with high MFU but high cost per GPU-hour may be less economical than a system with lower MFU but cheaper hardware. The right metric depends on whether the organization is optimizing for time (training must finish by a deadline), cost (minimize total expenditure), or throughput (maximize tokens processed per unit time).

Inference-specific infrastructure considerations

Serving trained models changes the planning objective. A large training run is one long job that occupies its allocation for days or weeks and is judged by sustained *throughput* and time to a target quality. Its steps repeat the same exchanges, so communication demand is easier to characterize than an arrival stream, and an individual operation can take milliseconds to seconds without harm, although failures, I/O, and changes in execution shape still affect the schedule. Serving must instead turn the same hardware into responses for many independent, short-lived requests arriving at irregular intervals, each under a latency target that for interactive use is measured in tens of milliseconds.

Serving infrastructure must meet *latency* targets at an acceptable *cost per query* under a variable request load. Independent requests can be assigned to separate replicas, but a replica that shards a model across devices still communicates within each request. Prompt processing, successive decode steps, and complete responses also have different latency budgets. Capacity planning must therefore specify the request mix, model placement, and service targets before concluding that serving needs less network capacity than training.

The differing requirements drive distinct hardware and architecture choices, summarized in table 0.17.

Table 0.17: Training vs. serving infrastructure: Training and serving optimize different hardware behaviors, so capacity planning must compare utilization, model placement, network traffic, and cost in the mode the fleet will actually run.

Dimension	Training infrastructure	Serving infrastructure
GPU utilization	Large local batches push dense layers into the compute-bound regime; well-tuned runs commonly sustain 30–50% MFU.	Batch-1 decode is deeply memory bound and can fall below 5% MFU; batching raises utilization at the cost of latency, within memory capacity.
Model placement	Tensor and pipeline parallelism distribute a single model across many GPUs.	Replicas of the model, or large shards of it, handle independent requests, so memory demand scales with concurrent serving capacity.
Network traffic	The partition determines gradient, activation, and parameter exchanges between workers.	Independent replicas can serve separate requests, but sharded replicas still require inter-device exchanges within each request.
Cost metric	Cost per completed run at a target quality includes the measured schedule and recovery overhead.	Cost per request or per 1,000 tokens depends on request shape, latency targets, utilization, and provisioned capacity.

The table shows why serving cannot be planned as training with smaller batches: the optimization target changes from synchronized throughput to latency-bounded, continuously billed requests.

The implication is that effective serving infrastructure often uses different hardware, different software, and different facility designs than the training infrastructure. Some organizations use previous-generation GPUs (A100s) for serving because the memory bandwidth per dollar can be competitive with newer GPUs, and the lower TDP (400 W vs. 700 W) allows higher rack density and lower cooling costs.

The inference workload itself bifurcates into two distinct phases with opposing bottlenecks. The prefill phase processes prompt tokens in parallel, increasing weight reuse and potentially approaching the compute ceiling when the prompt and batch shapes supply enough work. The decode phase generates tokens sequentially for each request and is deeply memory-bandwidth-bound at small batch sizes. To maximize hardware utilization, high-performance serving systems employ continuous batching, which schedules requests at the iteration level rather than the request level. Completed requests leave the active batch and waiting requests can enter at iteration boundaries. Scheduling prefill alongside decode also requires controlling how much prompt work delays the next decode iteration.

A napkin estimate shows how quickly serving capacity reaches training scale. One tensor-parallel replica of the running model on an eight-GPU node streams its FP16 weights once per decode step, which takes at least 13.1 ms at H100 HBM bandwidth. Batching 32 concurrent requests yields about 2,450 tokens/s per replica. A service handling 1,000 requests/s at 250 output tokens each must generate 250,000 tokens/s, which requires at least 103 replicas, or 824 GPUs, most of the 1,024-GPU training reference cluster. The estimate is a lower bound because it ignores key-value cache traffic, prefill work, and headroom for bursts and failures; section 5 replaces it with batching models that account for key-value cache capacity, variable request lengths, and latency targets.

Reliability objectives differ as well. A training job can absorb an occasional failure because checkpointing recovers the lost progress, whereas a stalled serving replica delays every request routed to it until traffic fails over.

The accelerator decision matrix

A practical decision framework starts with the workload's likely limiting resources and tests them against its execution shape. Table 0.18 supplies candidate configurations under representative assumptions, not fixed assignments of model families to bottlenecks or vendors. The selection rule is to diagnose the binding constraint, then compare sustained useful work within the capacity, quality, latency, and facility budgets. The table's constraint column is the per-device one, what a single accelerator must supply. The introduction's archetype roster answers a different question, which constraint binds the fleet as a whole, so a workload can be compute-bound on each device and still communication-bound across the cluster, as Archetype A is.

Table 0.18: The accelerator decision matrix: The optimal accelerator depends not on peak specifications but on which physical resource (compute, bandwidth, or capacity) is the binding constraint for the target workload. The roofline model screens the compute and bandwidth ceilings at the intended precision and shape. Among candidates that clear capacity and facility constraints, measured sustained useful work at the required quality and latency determines value.

Workload	Binding constraint	Key metric	Recommended class
LLM training (>100B)	Compute (high batch size)	Sustained useful throughput at validated precision, interconnect BW	H100/B200, TPU v5p
LLM inference (batch=1)	Memory bandwidth	GB/s per dollar	A100, H100 (bandwidth/$)
LLM inference (batched)	Compute + bandwidth	Sustained token throughput within latency and capacity limits	H100, B200
Vision model training	Compute (large spatial dims)	Sustained useful throughput at validated precision	H100/B200 configurations to evaluate
Recommendation (embeddings)	Memory capacity	GB per dollar	CPU DRAM + GPU hybrid
Fine-tuning (<13B)	Memory capacity (state near HBM limit)	HBM capacity	A100-class capacity candidate
Research/prototyping	Flexibility	Software ecosystem	GPU or accelerator with required operator support

For our 175B running example, table 0.18 separates the training purchase from the serving purchase. The workload constraint comes first; software support, deployment lifetime, and measured sustained throughput are compared only among candidates that clear it. A cheaper accelerator-hour is useful only if it supplies the required throughput within the capacity, latency, and facility budgets.

Checkpoint 2.4: Accelerator selection

An engineering team needs to deploy a 70B-parameter model for both training and inference. Training will use batch size 2048 across 256 GPUs for 3 months. Inference will serve 10,000 requests per second at batch size 1 for 2 years.

- ☐ **Training intensity**: identify the local microbatch, sequence length, and partitioning information needed to estimate training intensity; compare it with batch-1 decode under the chapter's weight-traffic approximation.
- ☐ **Hardware split**: identify which measurements are needed to determine whether training and inference should use the same hardware or different hardware.
- ☐ **Two-year cost**: formulate the 2-year inference-cost comparison between H100s ($4/GPU-hour) and A100s ($2/GPU-hour), and identify the prompt and output lengths, replica placement, sustained throughput, and capacity assumptions required to evaluate it.

Each of these selections assumes the walls stay where they are. New technologies do not remove the walls; they move them. The technologies in section 11 matter because they change where the memory, communication, or power constraint binds.

Infrastructure Technologies That Move the Walls

A new data center will host three or four generations of accelerators over its 15-year structural lifetime, so future-facing technologies matter only when they change a durable planning constraint. The useful test is not whether a technology is novel, but which wall it moves, what new wall appears after the move, and which fleet-design decision changes as a result. Compute Express Link (CXL) moves the memory-capacity boundary. Wafer-scale integration moves the chip-to-chip communication boundary. Advanced packaging moves the die boundary inside the accelerator package. Optical circuit switching moves the fabric topology and power boundary. None of them repeals the physics of data movement; each relocates the place where infrastructure teams must spend power, cooling, cost, and software complexity.

Compute express link (CXL)


CXL builds on the PCIe physical layer with protocols for I/O, caching, and memory access. Supported device types and platform configurations determine which of those capabilities are available. Memory expanders and pooled memory can make host capacity less rigid, but accelerator access also requires a supported data path and software placement. Fleet planning must establish those capabilities before treating a pool as available training memory.

For ML training, the natural target is cold or phase-local state rather than the active matrix-multiply working set. The Adam optimizer state for our 175B model occupies 1,400 GB, and it is touched during parameter updates rather than streamed through every Tensor Core operation. A shared CXL pool could therefore reduce per-node memory pressure by holding optimizer shards, embedding-table spillover, or local data-cache buffers outside the accelerator HBM tier. The training framework still has to schedule this state carefully, but the placement problem becomes less binary than "fits in this node" or "spills to storage."

The new wall is bandwidth. A representative CXL memory path over PCIe Gen5 x16 provides 64 GB/s, while H100 HBM provides 3.35 TB/s. That 52× gap means weights and activations for the forward and backward passes still belong in HBM. CXL is a capacity tier, not an HBM replacement. The fleet-design implication is concrete: planners should ask whether server platforms, rack layouts, and orchestration software can absorb CXL memory pooling, not whether CXL removes the need for high-bandwidth accelerator memory.

Wafer-scale planning constraint

At the opposite extreme from CXL sits the wafer-scale engine introduced in section 3. Its on-wafer fabric removes package- and board-level transfers for mapped operations, but it does not make communication free. Infrastructure planning instead shifts toward capacity, placement, and injection bandwidth.



HBM remains 52× faster, so CXL is capacity only.

Our 175B running model needs 350 GB for FP16 weights alone, far beyond the 44 GB of on-wafer SRAM. Cerebras addresses this through weight streaming: external MemoryX units feed weights to the wafer over a 1.2 TB/s path while the wafer executes each layer, decoupling model capacity from the on-wafer memory. Weight streaming was designed for training. Activations stay on the wafer while weights stream in layer by layer and gradients stream back to MemoryX, which performs the optimizer update. The approach works when each layer's computation is large enough to hide the streaming time. The wafer trades the communication wall for a streaming-bandwidth wall.

The lesson for infrastructure planners is not that wafer-scale systems replace GPU fleets. It is that memory proximity and memory capacity trade against each other. WSE-style designs buy extraordinary local bandwidth by putting the working set near the arithmetic, while CXL buys flexible capacity by moving memory farther away. HBM sits between those extremes: off-chip but on-package, smaller than host memory but fast enough for the active computation. The right architecture is the one whose memory tier matches the workload's reuse pattern.

Advanced packaging

Underpinning both directions is the evolution of advanced packaging. Packaging moves the boundary inside the accelerator package rather than all the way out to the rack or all the way in to a single wafer, and it matters because the reticle limit is only about 858 mm^2 for a single exposure. 2.5D interposers, such as TSMC's CoWoS, mount compute dies and HBM stacks on a shared silicon substrate, allowing chiplet-based accelerators to behave like a single device for most software. 3D stacking, with approaches such as SoIC, places SRAM caches or logic directly above one another and shortens data paths further. The H100-to-B200 transition shows the fleet consequence: the package can deliver far more local arithmetic and die-to-die bandwidth, but the rack must absorb higher power density, tighter cooling requirements, and less tolerance for power transients before the silicon advantage becomes useful infrastructure.

Reconfigurable topologies and optical circuit switching

While CXL and advanced packaging address memory and die boundaries, warehouse-scale computing increasingly encounters an interconnect power and topology constraint. In modern clusters

spanning tens of thousands of accelerators, conventional multi-tier Clos networks, the switched leaf-and-spine family of figure 0.28 whose full-bisection form is the fat tree, connect groups of endpoints through successive tiers of electrical packet switches. These switches inspect each packet and choose an outgoing link; the alternative considered here changes the physical connections between groups for a longer-lived workload allocation. Every network hop incurs an Optical-Electrical-Optical (OEO) conversion: incoming photons hit a photodiode, high-speed SerDes circuits deserialize the electrical signal, switch ASICs buffer and route packets across crossbars, and output SerDes drive lasers to re-transmit light over optical fiber.

At 800 Gb/s and 1.6 Tb/s per-port data rates, SerDes and transceiver electronics consume significant energy, and every additional switch tier repeats that conversion cost for each bit that crosses it. Fixed electrical Clos topologies are also cabled statically, locking the facility into a single oversubscription ratio and rigid bisection pattern regardless of whether the running workload is pipeline-dominated, data-parallel, or all-to-all expert-routed.

Definition 2.8: Optical circuit switching

Optical circuit switching (OCS) is a physical networking architecture that routes optical signals directly using Micro-Electro-Mechanical Systems (MEMS) mirror arrays without Optical-Electrical-Optical (OEO) conversion, enabling dynamic, software-defined topology reconfiguration and high energy efficiency at warehouse scale.

1. **Significance**: An optical circuit bypasses packet-by-packet electronic processing in the switching path. The complete system still consumes power for actuators, control, and transceivers. Its compatibility across line rates depends on optical loss, wavelengths, and endpoint budgets, so protocol transparency does not imply unrestricted upgrades.
2. **Distinction**: Unlike electrical packet switches (which inspect headers, buffer packets in SRAM, and make nanosecond routing decisions per packet), an OCS establishes semi-static physical optical circuits with millisecond-scale switching latency (10–30 ms), making it suitable for topology-level reconfiguration rather than dynamic packet routing.
3. **Common pitfall**: Assuming OCS replaces packet switching entirely. OCS operates at circuit granularity: it configures cluster-scale topologies (such as 3D tori or job-specific sub-clusters) and routes around hardware faults, while packet switching or accelerator-native interconnects handle fine-grained, intra-step message routing.

Google's TPU v4 supercomputer (Jouppi et al. 2023) demonstrated the architectural power of optical circuit switching in production. Instead of wiring 4,096 chips into an inflexible electrical fat-tree, the system groups accelerators into $4 \times 4 \times 4$ node cubes and routes the inter-cube links through an array of 3D MEMS optical circuit switches (codenamed Palomar).

This reconfigurable optical architecture delivers two fundamental operational capabilities: topology tailoring and dynamic fault recovery with boundary wrapping.

For workload adaptation, the physical interconnect can be reconfigured dynamically to match the communication structure of the running model. A training run using 1D pipeline parallelism can configure its slice as an elongated cylinder to streamline stage-to-stage transfers. Conversely, a 2D or 3D tensor-parallel partition can configure a compact cubic 3D torus that minimizes average hop count, while an MoE workload can maximize bisection bandwidth across specific expert groups.

Optical switching also supports fault isolation by changing connections around unavailable hardware where spare connectivity permits. The capability matters because in a statically cabled torus, a single failed link or node can break a ring along an entire dimension and degrade every job that spans it. With optical circuit switching, the mirrors can be redirected to bypass the failed cube or fiber and splice healthy cubes into a complete, smaller torus slice without manual recabling. The manager must first detect the fault, choose a feasible allocation, and establish the new circuits. Circuit-switching time is only one part of that process. A training job may also need to rebuild its process groups and restore state before computation resumes, so optical reconfiguration latency alone does not specify recovery time.

The trade-off is switching latency. Because MEMS mirrors physically rotate to steer collimated light beams, reconfiguration occurs on a mechanical timescale that is much longer than packet forwarding in an established electrical path. These are different operations: circuit setup changes connectivity, while packet forwarding uses connectivity already in place. Consequently, OCS moves the power and protocol wall while leaving reconfiguration latency as the binding discipline: it is deployed for job-level topology allocation and fault isolation, not for per-message dynamic routing.

The common theme is relocation rather than elimination. CXL moves capacity outward into a fabric and leaves bandwidth as the limiting discipline. Wafer-scale integration moves communication inward and leaves capacity and yield as the limiting disciplines. Advanced packaging compresses die-to-die distance and requires power density to be checked against the package and cooling budgets. Optical circuit switching removes the OEO conversion inside the switch and leaves reconfiguration latency as the limiting discipline. Infrastructure planning therefore still begins by identifying where the next byte moves, how quickly it must arrive, and what physical system must be built so that movement does not dominate the workload.

Fallacies and Pitfalls

Because the bottlenecks move rather than disappear, compute infrastructure teams often optimize the visible specification while missing the binding physical constraint. The fallacies and pitfalls in this section translate the chapter's node, rack, pod, and facility lessons into operational warnings.

Fallacy: *More GPUs always means faster training.*

Section 11 warned against reading a compute budget as a wall-clock prediction. The hardware form of the same error assumes that training time scales linearly with GPU count, so that doubling the GPUs halves the training time. In practice, communication overhead grows with cluster size, and this chapter's modeled scaling efficiencies show how fast.

Amdahl's Law bounds speedup when a fixed workload has a fixed serial fraction. Distributed training also incurs communication, pipeline, and I/O costs that can change with partitioning and scale; these are not all an invariant serial fraction. For a 175B-parameter model with 350 GB of gradients, the AllReduce at each training step must combine contributions across the participating group. It can do so through ring or tree exchanges; direct transfers between every pair are not required.

Even for a carefully engineered fabric, the modeled scaling efficiency of the running model falls from 0.87 at 256 GPUs to 0.83 at 1,024 GPUs and 0.56 at 8,192. Growing from the reference cluster to the 8,192-GPU scenario of section 11 therefore multiplies the hardware 8× but the speed only 5.4×, and 44 percent of the larger cluster's locally achievable throughput is lost to communication and pipeline bubbles. That run still finishes in days, so the scale is worth buying for a deadline, but each added GPU returns less than the one before it; without an engineered fabric and overlapped communication, the curve flattens far sooner.

The correct approach is to profile useful compute time, exposed communication time, and idle time at the current scale before buying the next pod. If the added GPUs mostly increase exposed communication, procurement is buying idle time rather than training progress. Section 5 turns this local ratio into a scaling-efficiency estimate before committing to procurement.

Pitfall: *Planning training throughput from peak FLOP/s alone.*

Peak FLOP/s describes only one roofline ceiling. At the H100 FP16 ridge point of approximately 295.2 FLOP/byte, the bandwidth and arithmetic ceilings meet; lower-intensity operations cannot reach the arithmetic peak through more compute alone. The chapter's batch-1 weight-streaming estimate illustrates that limitation: decode near 1 FLOP/byte uses well under 1 percent of the arithmetic peak. Prefill and training supply more reuse, yet even well-tuned large training runs commonly sustain only 30–50 percent of peak once memory-bound attention and normalization kernels, activation recomputation, dependencies, and communication are counted. Procurement needs those measurements for the intended execution phase.

Fallacy: *Power and cooling constraints can be handled after accelerator purchase.*

Teams plan GPU purchases based on compute requirements without verifying that the target facility can deliver the required power and cooling. These are hard physical limits with long lead times.

A single rack of four DGX H100 systems requires 33.5 kW of power. Upgrading a data center's electrical infrastructure (new transformers, switchgear, and UPS capacity) requires 12–18 months of lead time. Cooling plant upgrades (chillers, piping, pumps) require 6–12 months. Even seemingly simple changes, such as upgrading the PDU in a single rack from 20 kW to 60 kW, can require new cabling and circuit breaker panels.

Organizations that order hardware without confirming facility readiness risk having millions of dollars of GPUs sitting in shipping containers in the parking lot while the building is retrofitted. During the 2023–2024 accelerator buildout, GPU delivery times shortened faster than data center construction timelines, which made this mismatch a practical planning risk.

Pitfall: *Buying a newer accelerator without checking the workload's arithmetic intensity.*

A team deploys B200 GPUs (4,500 TFLOP/s FP8 peak) for an inference workload serving a 7B-parameter model at batch size 1. The arithmetic intensity is approximately 1 FLOP/byte, placing the workload deep in the memory-bound region.

The B200's memory bandwidth (8 TB/s) is 2.4× higher than the H100's (3.35 TB/s). Comparing B200 FP8 against H100 FP16/BF16-class throughput gives a peak arithmetic ratio of about 4.6×, but also changes the precision convention. At a fixed weight footprint, the bandwidth-only model instead predicts a gain of about 2.4×. The low intensity limits the fraction of arithmetic peak that this model can use, but it does not measure idle time. The comparison that matters is bandwidth per dollar at the measured serving rate; the larger arithmetic peak alone does not establish better value.

Fallacy: *Air cooling is sufficient for AI workloads.*

Operators of legacy facilities may assume that adding fans and chiller capacity is sufficient for any denser AI rack. In practice, the cooling choice depends on the system's heat-rejection design and the facility's available airflow, pressure, inlet temperature, and containment. Engineered air remains viable for some dense configurations, while higher rack densities can require direct liquid cooling to avoid thermal throttling or exceeding facility limits.

Fallacy: *All GPU-hours are equivalent in total cost of ownership (TCO) analysis.*

A common error in cost comparisons is to treat one GPU-hour on an H100 as interchangeable with one GPU-hour on an A100 or V100. Under the same dense FP16 peak convention, H100 offers 3.2× the arithmetic rate of A100 and 7.9× that of V100. If a workload sustained the same fraction of those peaks with the same operation count and target quality, 10,000 V100 GPU-hours would correspond to approximately 1,264 H100 GPU-hours. That is a conditional compute-only comparison, not a predicted training time: memory, communication, numerical recipes, and software can change sustained efficiency. Procurement must compare measured cost per useful computation or per completed run, rather than rental price or peak FLOP/s alone.

Pitfall: *Upgrading the network before identifying the training bottleneck.*

A network upgrade from 200 Gb/s to 400 Gb/s InfiniBand changes training time only through the communication it accelerates on the critical path, the mirror image of the faster-accelerator fallacy in section 11. In a no-overlap example with 20 seconds of computation and 2 seconds of communication, doubling transfer bandwidth reduces the estimated step from 22 to 21 seconds, an improvement of 4.5 percent. That result assumes the communication term scales with bandwidth and other terms remain fixed. Adding GPUs or optimizing kernels requires a separate estimate because either can change communication and overlap. The Fleet Law keeps those costs visible when comparing investments.

Fallacy: *Average power draw is sufficient for cooling design.*

Accelerator power draw varies across communication, memory, and compute phases. A workload average below the configured sustained envelope does not establish the cooling requirement because synchronized compute phases can raise many devices toward that envelope together. Thermal design must use the vendor's sustained design target under the intended inlet and cooling conditions, while

the electrical path must separately tolerate documented transients. Otherwise thermal throttling can reduce sustained throughput without producing a crash or explicit application error.

Pitfall: *Selecting accelerators by HBM capacity without checking bandwidth.*

Capacity and bandwidth answer separate feasibility questions, and a model that fits in HBM but cannot be served within its latency target is as unusable as one that does not fit. Consider two hypothetical options for a 70-billion-parameter model: (a) 192 GB of HBM2e at 2.04 TB/s, and (b) 80 GB of HBM3 at 3.35 TB/s. Option (a) holds the 141 GB FP16 weight payload, whose streaming floor is 141 GB/2.04 TB/s = 69.2 ms. Option (b) cannot hold 141 GB in its 80 GB capacity, but the 71 GB INT8 payload fits before other live state is counted. Its weight-transfer floor is 71 GB/3.35 TB/s = 21 ms, a 3.3× ratio between the two estimates. That ratio combines faster memory with fewer bytes; option (a) could also use a validated INT8 recipe. Selection must compare like-for-like quality, complete live-state capacity, and measured latency at the intended concurrency.

Fallacy: *Data loading can be fixed after deployment.*

Teams that optimize only GPU kernels and communication can still find their accelerators waiting for input. The data loading pipeline must sustain the cluster's consumption rate across storage, preprocessing, and host-to-GPU transfer. The chapter's pre-tokenized language-model example needs modest raw bandwidth, but tokenization, sequence packing, and shuffling can change the host-side demand. Size CPU workers, buffering, and storage concurrency from the actual pipeline. Local NVMe staging and prefetching are useful when they relieve the measured bottleneck; neither substitutes for testing the complete path at fleet concurrency.

Pitfall: *Buying homogeneous clusters without modeling workload diversity.*

Uniform hardware simplifies support and placement, but that benefit must be weighed against the useful work existing devices can still perform. For our 175B model, training and low-batch decode stress different resources. Separate pools can exploit that difference without placing mismatched devices in the same tightly synchronized group.

The A100's 2.04 TB/s and the H100's 3.35 TB/s supply different bandwidth ceilings. Retaining older devices for an inference pool can reduce cost when their measured throughput, power, and support costs compare favorably at the required latency. The distinction is between *job-level* balance within a synchronized group and *cluster-level* hardware uniformity. A heterogeneous fleet can preserve balanced groups, but its matching benefit must cover the added scheduling and operational complexity.

Pitfall: *Treating commissioning and burn-in as schedule slack.*

Commissioning is part of the system build, not a buffer that can be consumed when hardware delivery slips. Burn-in tests, cable validation, firmware qualification, thermal soak, and NCCL stress runs are the first time the node, rack, network, and facility layers operate as one machine. Compressing that phase turns installation defects into production failures, where each debugging cycle idles the full fleet rather than a small acceptance-test window.

Summary

Training our 175B-parameter model exposes a constraint cascade. Accelerator capacity and throughput shape the node; node power shapes rack cooling; rack density shapes pod layout; and pod topology and reliability determine how much useful work the fleet sustains.

The generality tax explains the trade between flexibility and workload-specific efficiency. The roofline in section 6 identifies the binding compute or memory ceiling, while the bandwidth hierarchy in section 7 guides where communicating work belongs. Together, these models connect software choices to the physical limits of the fleet.

Our 175B-parameter model connects the decisions at each level. Its low-batch decode estimate requires about 350 billion floating-point operations per token, but moving the 350 GB FP16 weight payload through one hypothetical 3.35 TB/s HBM path takes over 100 ms. A feasible partition changes that path budget as well as solving capacity. At the node level, training state exceeds 2 TB, requiring additional sharding or reductions in resident state. At the rack level, 32 accelerators at 700 W each, plus modeled host and network overhead, require 33.5 kW of qualified power and cooling

capacity. The reference cluster coordinates 1,024 GPUs, while the worked pod scenario uses eight times that number. Communication, failure recovery, and sustained utilization determine how much of the purchased capacity becomes completed work. The model's size exposes these interactions, but the same accounting applies whenever a workload crosses physical resource boundaries.

The method transfers beyond this model: identify the binding constraint at each level, quantify its effect, and propagate the consequence upward. A faster accelerator is counterproductive if cooling cannot remove its heat; a denser rack is futile if the grid cannot supply it; and a wider network is wasteful if the workload cannot use its bandwidth. Infrastructure engineering is thus a quantitative discipline for tracing chip-level choices into rack power, facility cooling, network topology, reliability, and ownership cost.

Key Takeaways: The data center is the computer


- **Specialization trades flexibility for throughput**: The chapter's GPU–CPU comparison shows 10–100× greater matrix throughput for suitable workloads, illustrating the generality tax (principle 1). Specialization pays when the workload and software stack can use the dedicated arithmetic efficiently over the deployment's lifetime.
- **Memory wall diagnosis starts with roofline**: For single-request LLM decode, weight traffic commonly sets the latency floor. The ridge point (I_{ridge} = peak FLOP/s divided by memory BW) separates bandwidth- from compute-bound operation, but batch shape, fusion, precision, reuse, and the modeled memory level determine where each training or inference phase lies.
- **Bandwidth hierarchy guides parallelism placement**: The 9× per-direction bandwidth gap in the NVLink–InfiniBand example favors keeping frequent tensor-parallel exchanges inside the fast interconnect domain. Pipeline and data parallelism can span slower links, but their traffic and synchronization still have to fit the workload's time budget.
- **Peak vs. sustained**: Capacity planning must use sustained throughput measured with a consistent model-FLOP convention, precision, system scale, and workload shape, not peak specifications.
- **Facility efficiency is part of the computer**: Cooling architecture changes rack-density limits and facility overhead; at pod scale, network topology, cooling, and power delivery must be co-designed for the dominant workload.
- **Failure exposure grows with fleet size**: With independent failures and a per-GPU MTTF of 50,000 hours, the 10,000-GPU example has a mean interval of about five hours between GPU failures. Recovery and checkpoint storage therefore belong in infrastructure planning from the start.
- **Price useful work, not hardware**: GPU-hours from different generations, an FP8 peak that doubles advertised capacity, and bandwidth per dollar for decode compare only through sustained throughput on the target workload. Power, cooling, facilities, and utilization then set the lifetime cost of that useful work, so hardware price alone cannot settle a purchase.

Applied through C^3, choosing liquid cooling for a dense accelerator rack changes more than heat removal. It raises the compute a rack can hold, which concentrates communication onto fewer top-of-rack links and adds coordination work for power capping, failure isolation, and maintenance. In the Fleet Law's accounting, the hardware in this chapter fixes the per-device rate behind T_{compute}/N and the link bandwidths behind $T_{\text{comm}}(N)$, while rack and pod reliability decide how often synchronization and recovery interrupt the step. Removing one physical ceiling therefore requires checking the rest of the fleet again; otherwise the investment creates capacity that the workload cannot use.

What's Next: From silicon to wires

Physical infrastructure spans from Tensor Core transistors to megawatt data-center substations. A fleet of disconnected nodes, however, is not yet a computer; it is a warehouse of expensive accelerators. The network fabric turns those nodes into a unified training system by carrying gradients, activations, and checkpoints between them. At every scale above the node, this chapter met the same limit in a new form. The bandwidth hierarchy showed a 9× cliff between NVLink and InfiniBand, and the pod showed why usable bandwidth depends on the communication pattern and where it is placed. Every training step of our 175B model ends by combining gradients across all 1,024 GPUs of the reference cluster, so the slowest required transfer sets when the next step can begin. Chapter 11 starts from that synchronization and climbs from signaling on a single link through transport protocols, switch topology, and congestion behavior to the integrated cluster, asking at each level whether the fabric lets those GPUs train as one coherent machine or leaves them waiting as isolated devices.

Network Fabrics

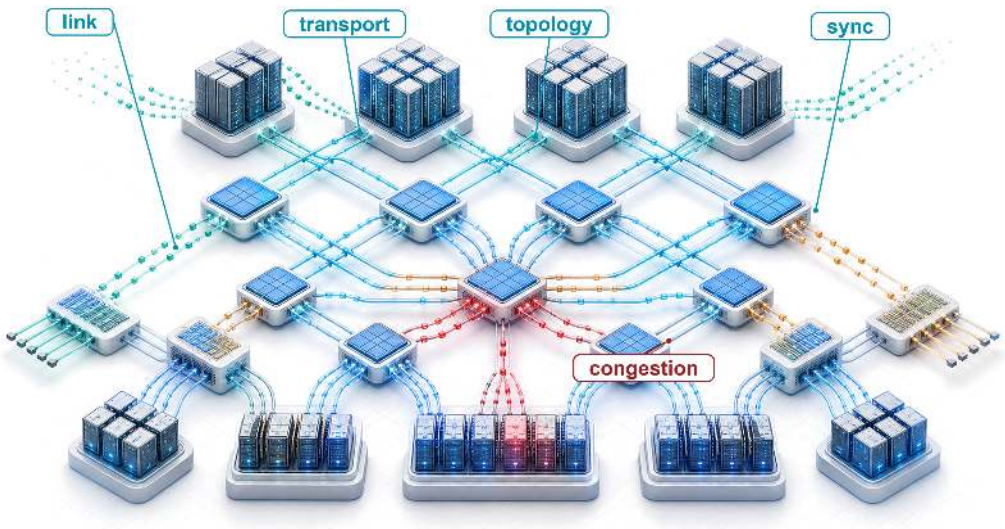

Purpose


Why can the network connecting accelerators matter more than the accelerators themselves at scale?

A single accelerator can perform trillions of operations per second, but distributed training requires devices to exchange results before dependent work can proceed. When network capacity cannot keep pace with computation, accelerators sit idle, and adding more devices can increase the waiting instead of shortening the run. The resulting cost extends beyond the network equipment: an inexpensive connection can leave expensive compute capacity unused throughout a long experiment. Single-node intuition is insufficient because data that once traveled through a local interconnect must now cross cables, switches, and shared paths. A fast connection between two machines does not establish that the same performance will hold when the entire fleet communicates at once. The arrangement of those paths determines which groups can exchange data together and where competing transfers accumulate. Large transfers need sustained bandwidth, while frequent dependent exchanges can remain limited by the time required to start and complete each message. A delayed participant can hold up others even when most links appear healthy. Network design therefore has to follow the workload's communication pattern, and validation must reflect the traffic that will actually run. Choices about placement, sharing, and failure recovery affect whether available bandwidth becomes useful progress or recurring delay. In C^3 terms, the fabric connects compute through communication, while coordination determines when the fleet must wait for that communication to finish.

Learning Objectives

- Model network communication cost using the α-β framework and identify bandwidth-dominated vs. latency-dominated regimes
- Compare high-performance transport protocols by latency, loss-recovery behavior, and operational complexity
- Compare network topologies using $\text{BW}_{\text{bisect}}$, hop count, and the workload's collective communication pattern
- Evaluate congestion-control mechanisms and their impact on tail latency during distributed training
- Compare network partitioning and traffic-isolation mechanisms for concurrent training and inference workloads
- Diagnose network performance bottlenecks using RDMA counters, link-level telemetry, and bandwidth testing tools

The Synchronization Backbone



One slow link stalls every peer that waits on it.

Chapter 11 ended at the node boundary, where each GPU's NVLink bandwidth narrows to a single external network port. How much that narrowing costs depends on what the training job must push through the port, and how often. Consider the running instance of Archetype A (GPT-4/Llama-3), a 175B-parameter GPT-3-class dense transformer partitioned across the 1,024 GPUs of the reference cluster. Each training step must combine gradient contributions so that corresponding model replicas apply the same update. This operation, called AllReduce, returns the combined result to every participating worker. The model has 350 GB of gradient data at two bytes per parameter, the 16-bit gradients of mixed-precision training that this chapter assumes throughout (FP32 gradients would double the figure). That model-wide figure is not what any one GPU sends. When a reduction partitions the gradient across all 1,024 ranks, each rank owns a 1/1,024 share, a few hundred megabytes, which is the gradient-shard size the transport examples below use; the job's tensor, pipeline, and data-parallel split (chapter 15) sets each GPU's actual payload. Worked examples that switch to another model, precision, or payload state their parameters explicitly. A delayed transfer on the step's critical path can leave the other 1023 GPUs waiting at a job-wide synchronization boundary. The fabric's contribution to training time therefore depends on which transfers the next computation needs and how much of their cost remains exposed. In that role the fabric is not auxiliary infrastructure; it is the synchronization backbone that decides whether the cluster trains as one machine.

WITHIN the multi-tier fleet hierarchy framed by figure 0.15, the fabric turns isolated accelerator nodes into a coherent training system. Accelerators, power delivery, cooling, racks, and pods define what each node can compute in isolation; the fabric determines whether the nodes can act together before communication cost overwhelms computation. This chapter organizes that design space as a **five-level model** of co-dependent tiers (figure 0.29), climbing from serializer/deserializer (SerDes) signaling and copper or optical reach at Level 1 to the integration of a production cluster at Level 5. Each level is developed at the point where its physical or protocol limit becomes the binding constraint.

At scale, communication cost can dominate computation cost. The fleet-law decomposition in section 11 makes this explicit: the nonoverlapped communication term $T_{\text{comm}}(N) - T_{\text{overlap}}$ determines how much of each training step is exposed to the network fabric. The fabric influences the layers above it by determining whether communication can run while independent computation continues, which collective algorithms are viable, and how network partitions interact with node failures. That concurrency, **communication-computation overlap**, is what the T_{overlap} term credits, because transfer time that proceeds behind useful arithmetic does not lengthen the step.

A collective is a communication operation performed by a group of workers. Its name specifies the result each worker receives, while an algorithm determines the messages that produce that result. The physical network fabric carries three recurring collective communication patterns:

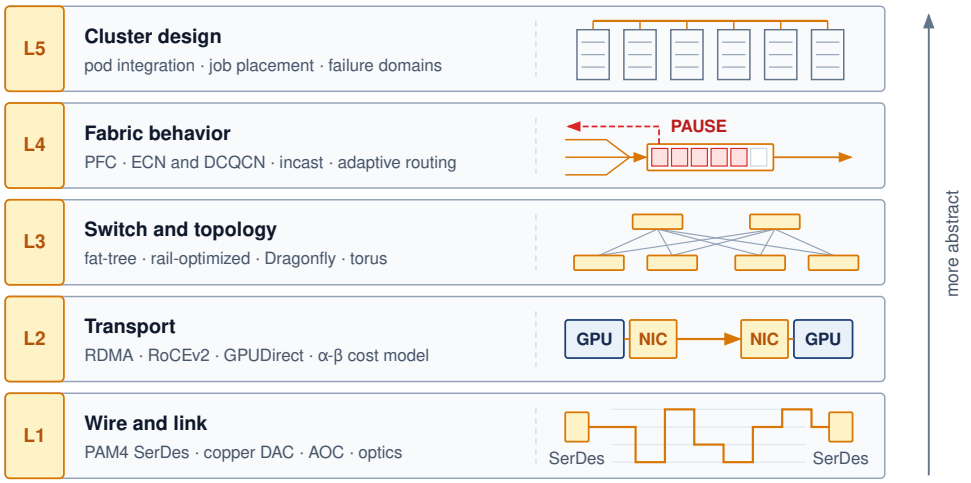


Figure 0.29: The five-level network model for ML training: Read from the bottom up, each level builds on the one below and becomes more abstract. Level 1 moves bits over wires and optics; Level 2 turns links into reliable, low-overhead transfers between accelerators; Level 3 arranges switches into a topology; Level 4 governs how the fabric behaves under load and congestion; and Level 5 integrates all of them into a production cluster.

- **AllReduce**: Combines corresponding values from all participants and returns the same result to each; synchronous training uses a sum, followed by normalization, to average gradient contributions across workers.
- **AllGather**: Collects a distinct portion from each participant and returns the concatenated collection to every participant, as required when reconstructing a sharded parameter tensor.
- **AllToAll**: Lets each participant send a distinct portion to every other participant, an exchange central to expert parallelism when workers host different expert subnetworks and must route tokens to their assigned destinations.

Collective communication algorithms orchestrate these patterns, while the fabric layer supplies the physical wires and switches that carry them. The distinction matters because the fabric's physical properties (bandwidth, latency, and topology) determine which patterns are efficient and which become bottlenecks.

↪ The full set of collective primitives, with the output contract each one guarantees, is developed in section 7.

Systems Perspective 3.1: The network as a gradient bus

In a single machine, the memory bus moves data between the processor and memory. In a distributed training cluster, the network fabric serves an analogous role as the gradient bus that carries contributions between workers. When those exchanges limit progress, the job encounters the network wall mapped across the pod tier in figure 0.17. Protocols, topologies, congestion control, and collective schedules determine how effectively the job uses the available paths. This bus has a narrow segment. Since NVLink appeared, the external ports that join machines have offered less bandwidth than the interconnect inside each machine in every generation (figure 0.30). How much of that gap a job actually feels depends on its message sizes, port provisioning, routing, and contention, so the link ratio bounds the problem rather than predicting a transfer time.

The reference hardware gives the gradient bus analogy a concrete scale. A single H100 has a precision-specific FP16 peak of 989 TFLOP/s and memory bandwidth of 3.35 TB/s. Each GPU's NVLink ports together provide 900 GB/s of bidirectional bandwidth to its peers within the node. The comparison that matters is per GPU and per direction. In the reference node each GPU has

↩ Communication dominance at scale, the network wall, is established in section 6.

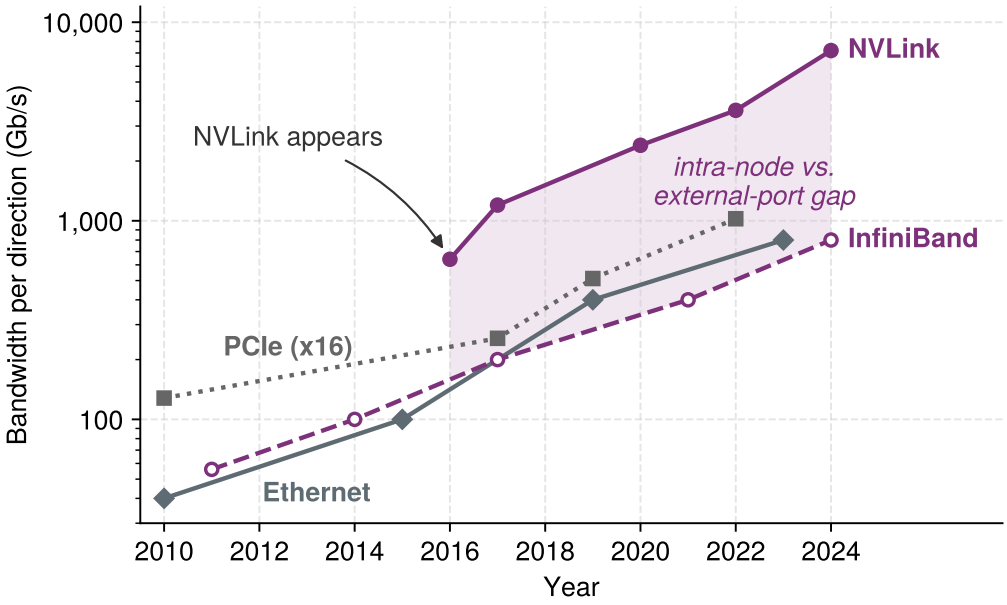


Figure 0.30: Historical network bandwidth scaling: Intra-node NVLink, inter-node InfiniBand and Ethernet, and the PCIe host bus, plotted per direction on a common log scale from 2010 to 2024. The aggregate NVLink budget exceeds the external-port budgets in these configurations; collective completion time also depends on payloads, provisioning, routing, and overlap.

its own network interface card (NIC) with one NDR InfiniBand port, so a tensor leaving the node through that GPU drops from 450 GB/s of NVLink bandwidth to 50 GB/s at the port, the 9× gap that the bandwidth hierarchy of section 7 already identified as the node boundary's cliff. The model-wide 350 GB gradient state does not all pass through every 50 GB/s port; partitioning and the collective schedule determine each port's traffic. Figure 0.31 compares these resource budgets across four GPU generations (V100 through B200). Converting the budgets into a step-time estimate requires the workload's local payloads and communication dependencies.

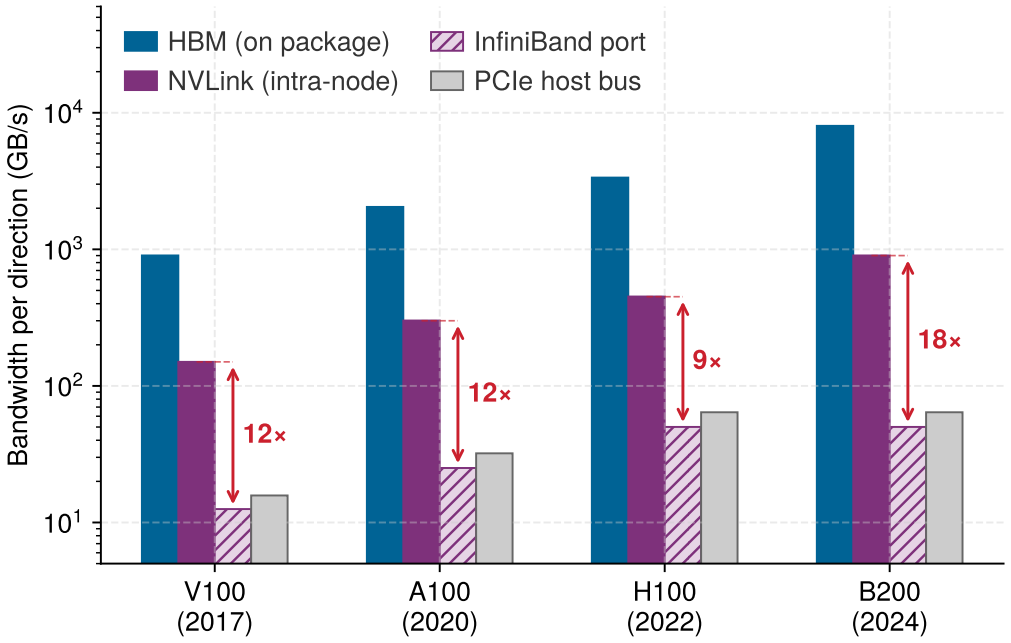


Figure 0.31: The bandwidth hierarchy: Bandwidth at four levels of the communication hierarchy across four GPU generations, on a logarithmic scale. While HBM and NVLink bandwidth have grown roughly 9× and 6× respectively from V100 to B200, InfiniBand has grown only 4×. All link rates are per direction. The annotations show the ratio of a GPU's NVLink bandwidth to one InfiniBand port (about 9× for the H100 with NDR), illustrating the budget gap for exchanges that cross the node boundary.

Across the four generations charted in figure 0.31, the per-direction bandwidth ratios are roughly 9× for the H100 generation and 12–18× in the others. Each compares one GPU's NVLink bandwidth with the one external network port that serves it. Intra-node NVLink connects accelerator packages through board-level links and, in switched systems, NVSwitch; it is not an on-package memory path. External fabrics must additionally satisfy cable reach, port-count, and multi-node routing constraints. The provisioned links determine the size of the gap, while the workload's transfers determine whether crossing it limits performance.

↪ The network hierarchy ratio between intra-node and inter-node bandwidth, with the reference NVLink and InfiniBand values behind it, is developed in section 4.

Which traffic must cross that gap depends on how the job is partitioned. The placement that follows from the same hierarchy keeps tensor parallelism, with its per-layer exchanges, inside the NVLink domain and lets pipeline stages and data-parallel replicas span nodes. The fabric adds one lever to that picture. Each data-parallel replica can sum gradients over several microbatches before an exchange (gradient accumulation), reducing how often it must cross the node boundary at the cost of changing the batch and update schedule. Pipeline and data parallelism can therefore cross slower node boundaries when their transfer sizes and computation leave enough time for the required exchanges. Combining these three strategies is called 3D parallelism; their execution schedules are developed in section 8, while their traffic requirements already constrain the fabric.

Exposed communication leaves gaps between dependent compute phases. Figure 0.32 illustrates that cost with two assumed training schedules on a common 230 ms axis, each containing 100 ms forward and backward compute phases. The 8-GPU intra-node case assumes a 1 ms AllReduce and spends 99.5 percent of the step in those compute phases; the 64-GPU inter-node case assumes a 30 ms AllReduce and spends 87 percent in computation. The two AllReduce durations are illustrative inputs chosen to show the effect, not values derived from the link rates above, and the percentages are shares of the schedule rather than measured arithmetic utilization.

In Fleet Law terms, the widened red block is the part of $T_{\text{comm}}(N)$ that no T_{overlap} has hidden. In the inter-node schedule it is 30 ms of every 230 ms step, about 13 percent, and that share applies to every accelerator-hour the cluster spends for the life of the run. Network fabric design therefore belongs at the center of distributed-training design rather than at its edge.

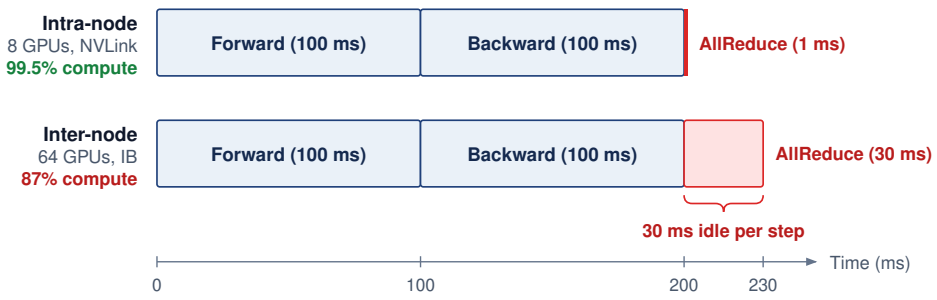


Figure 0.32: The bandwidth cliff in a training step: Illustrative timelines on a common millisecond axis for the same compute phases: an 8-GPU intra-node job (top) with an assumed 1 ms AllReduce, and a 64-GPU inter-node job (bottom) with an assumed 30 ms AllReduce. These durations illustrate an exposed communication cost rather than predict a particular fabric. The AllReduce phase (red) grows from a thin sliver to a larger share of the step. Without overlap, model computation waits during AllReduce. The compute phases occupy 99.5 percent and 87 percent of these illustrative schedules, a gap of 12.5 percentage points; these shares are not arithmetic utilization measurements.

How ML Networking Inverts Data-Center Assumptions

A network provisioned for many independent requests can encounter a different load when a training job releases gradient exchanges together. Statistical multiplexing relies on traffic peaks not all coinciding; synchronized workers can instead compete for the same paths at the same time. Web services also have dependency chains and tail-latency requirements, but a bulk-synchronous training job makes the participating workers' shared completion boundary explicit.

The ML networking inversion in table 0.19 concerns this change in traffic dependencies. Synchronous collective phases can generate correlated bursts and long-lived flows whose completion gates the next computation. Fabric validation must therefore measure collective completion under the expected load; average per-flow throughput alone does not establish that the job can meet its step-time budget.

Table 0.19: ML networking inverts traditional data-center assumptions: The comparison contrasts independent-request traffic with synchronized collective phases. Correlated demand and shared completion boundaries change the fabric's capacity and latency requirements.

Workload pattern	Traditional data-center assumption	ML reality
Traffic pattern	Independent requests can arrive asynchronously	Collective phases can release correlated bursts
Flow type	Many short transfers can share available paths	Large collective transfers can create persistent "elephant" flows
Performance metric	Per-request completion and throughput	Collective completion and exposed step time
Loss tolerance	Recovery delays affected requests	Recovery can delay dependent workers at a barrier
Congestion	Statistical multiplexing relies on noncoincident peaks	Shared paths and fan-in can concentrate synchronized traffic

[1] **BSP (bulk synchronous parallel)**: Proposed by Valiant (1990) as a bridging model between parallel hardware and software. Synchronous data-parallel training follows the same barrier structure (Goyal et al. 2017; S. Li et al. 2020).

The bulk synchronous parallel (BSP)[1] model, the lockstep at step barriers already met at the scale of one node (section 7), makes the dependency in table 0.19 explicit. In the synchronous training example, all 1,024 GPUs must complete the required gradient exchange before the next step can proceed. A 100 ms transfer delay adds 100 ms to that step only if it extends the critical path by the full interval; other computation or communication may hide part of it. At a barrier that waits for the last required result, **tail latency**, the slow end of the completion-time distribution (commonly reported as its 99th percentile, p99), decides when the step ends. *Tail latency is not an outlier; it is the bottleneck.*

Definition 3.1: Bulk synchronous parallel (BSP)

Bulk synchronous parallel (BSP) is a parallel execution model in which every worker completes a local computation phase, exchanges the data required by the next phase, and then waits at a global barrier before any worker begins the next phase, which makes the slowest participant the pacing constraint for the entire cluster.

1. **Significance**: The slowest required computation or communication determines when a superstep can complete. Faster workers wait at the barrier, so a localized delay can consume idle accelerator time across the entire participating group.
2. **Distinction**: BSP organizes execution into synchronized supersteps; it does not itself prescribe a learning algorithm or an all-to-all exchange. Synchronous data-parallel updates match a single-device reference only under compatible global batches, update rules, and numerical assumptions.
3. **Common pitfall**: Removing barriers does not by itself establish faster time-to-quality. Asynchronous training trades waiting against stale updates, and the convergence and wall-clock comparison depends on the workload and update schedule.

The flow inversion compounds this problem. Traditional networks are designed for fairness among millions of "mice flows,"[2] yet ML training is dominated by a few "elephant flows" corresponding to the gradient AllReduce. The full 175B model has 350 GB of gradient state at the assumed precision, but a sharded job distributes that state across workers. Each collective operates on its participating group and local payload; its algorithm determines how much each worker sends. Standard flow control and routing mechanisms like equal-cost multi-path (ECMP), which hash each flow onto one of several equal-cost paths, are poorly suited to this traffic pattern. A static hash cannot subdivide one elephant flow across all available links, and it can inadvertently map multiple elephant flows to the same link, creating massive congestion while other links sit idle.

The loss inversion completes the picture. TCP was designed to recover across an unreliable network, and an occasional retransmission delays only the request it belongs to. In a synchronous collective, a lost packet delays the transfer that every waiting worker needs, and some NICs that implement remote direct memory access (RDMA), called RDMA NICs or RNICs, recover by resending everything after the missing packet rather than only the lost region (Go-Back-N-style recovery). ML fabrics therefore aim to make loss rare and recovery bounded, either by preventing buffer overflow at the link layer or by building transports that recover quickly from it. Level 2 (section 6) develops both approaches.

[2] **Elephant and mice flows**: The model-wide gradient size is not the size of one network flow. A collective can split each worker's local gradient shard across channels and transport connections; the resulting long-lived flows can still collide under ECMP when their static hashes select the same path.

Correlated demand also makes **oversubscription**, provisioning less uplink capacity at a switch tier than the downlink capacity it serves (written as a downlink:uplink ratio such as 2:1), a workload decision. A fabric with spare capacity under independent requests can become saturated when a collective releases traffic across the same cut. Designing for that traffic requires tracing the constraint from the wire through transport, topology, and congestion control to the job's synchronization boundary.

The five-level model

Each of these inversions traces back to a specific physical or protocol constraint, and the five levels of figure 0.29 locate where each one is paid:

- **Level 1: wire and link** (section 3). Signal integrity (PAM4, SerDes) and the speed of light in fiber impose hard constraints on latency and cluster geometry.
- **Level 2: transport** (section 4). InfiniBand and RDMA over Converged Ethernet (RoCE) provide RDMA primitives; the α-β model quantifies the latency-vs.-bandwidth trade-off for different message sizes.
- **Level 3: switch and topology** (section 6). Fat-trees, rail-optimized designs, and dragonflies achieve the BW_{bisect} needed for global collectives through different structural trade-offs.
- **Level 4: fabric behavior** (section 9). Link-level flow control and end-to-end congestion control determine whether theoretical bandwidth translates to realized throughput; adaptive routing and incast behavior determine whether that throughput survives real collective traffic (Alizadeh et al. 2010; Zhu et al. 2015; Li et al. 2019; Gangidi et al. 2024).
- **Level 5: cluster design** (section 13). Production supercomputers like the NVIDIA SuperPOD and Meta Grand Teton integrate these layers into a unified gradient bus (NVIDIA 2023; Meta Engineering 2024).

The levels are not an inventory of networking topics; they are the causal chain that turns synchronous ML traffic into infrastructure requirements. Large gradient messages first stress the wire and transport, then force topology choices that preserve bisection bandwidth, then expose congestion behavior that ordinary enterprise networks can hide, and finally determine whether the whole cluster behaves like one training machine.

The traffic pattern determines which fabric metric matters. A global reduction stresses bisection bandwidth and the slowest path; a point-to-point pipeline transfer sits on the critical path, so its full transfer time and hop count matter; an expert exchange stresses path diversity and egress balance; and checkpoint or tenant traffic stresses isolation from the synchronization path. Table 0.20 provides the compact mapping that the remaining levels develop.

Table 0.20: Traffic patterns determine fabric metrics: Workload semantics translate into different physical bottlenecks, so no single link-rate benchmark predicts training performance. The table is a map of what follows; the mechanisms in its right two columns (transport offload, adaptive routing, virtual lanes, and the rest) are developed at Levels 2 through 5.

Traffic pattern	Fabric pressure	Metric that predicts performance	Primary design response
Global reduction	Sustained traffic across a cluster cut	delivered bisection bandwidth; slowest-path completion time	non-blocking capacity, rail alignment, topology-aware collectives
Pipeline point-to-point	Critical-path activation handoffs	startup latency plus size/bandwidth; hop count	short paths, direct placement, transport offload
Expert AllToAll	Many simultaneous worker pairs	path utilization; egress queue depth; tail latency	adaptive routing, path diversity, balanced expert placement
Checkpoint and multi-tenant traffic	Bursts competing with training flows	per-class bandwidth; pause duration; interference	traffic classes (virtual lanes, QoS), admission control

Mapping workload semantics to physical constraints shows why ML fabric design must proceed from the physical layer up. Before higher-level topologies or routing protocols can organize traffic, the physical layer must reliably deliver bits between endpoints without excessive signal attenuation

or prohibitive power consumption. Level 1 begins where all fabric architecture originates: at the physical wire.

Level 1 Wire and Link

At 400 Gb/s and beyond, the physics of signal transmission imposes hard limits on cable length, power consumption, and error rates. Signal attenuation in copper and chromatic dispersion in fiber dictate how far an accelerator can sit from its switches before communication fails. Every higher-level protocol and topology is ultimately constrained by what the physical wire can carry; these limits shape the geometry of the entire cluster. To meet throughput demands without raising the signaling rate into worse attenuation, link designs must carry more bits in each transmitted symbol.

Signal integrity and PAM4

Achieving 400 Gb/s and higher line rates requires balancing signaling speed against channel loss and detection errors. The **symbol rate** counts transmitted symbols per second; consecutive symbols need not produce a voltage transition. Raising the symbol rate raises the frequencies the channel must carry, and copper loses more signal at higher frequencies. Carrying more bits in each symbol, by using more than two signal levels, raises the bit rate without that penalty, and PAM4 is the scheme high-speed links use to do it.

Definition 3.2: PAM4 signaling

PAM4 signaling is a modulation scheme that represents two bits per symbol with four signal levels, doubling the raw bit rate relative to binary signaling at the same symbol rate.

1. **Significance**: PAM4 increases the raw BW available at a given symbol rate. The reduced separation between levels makes error-control design part of that gain. High-speed Ethernet uses forward error correction (FEC), including Reed-Solomon RS(544,514), with processing latency that depends on the physical-layer (PHY) design and implementation (Anslow 2016; Yin et al. 2022). FEC contributes to the fixed path budget modeled by the α term in section 6; it is one component alongside propagation, switching, and endpoint processing.
2. **Distinction**: At equal symbol rate and voltage swing, NRZ (Non-Return-to-Zero) binary signaling carries one bit per symbol with greater separation between levels. PAM4 carries two bits per symbol with smaller level spacing; the link must compensate through its signal-quality and error-correction design.
3. **Common pitfall**: Doubling bits per symbol does not guarantee twice the usable payload throughput or a fixed latency penalty. Coding overhead, channel quality, and the chosen PHY implementation determine delivered performance. FEC processing contributes to the startup budget, which matters most when messages are small or a collective pays startup repeatedly.

The price is noise margin. With four levels packed into the same voltage swing, the gap between adjacent levels in PAM4 shrinks to one third of the NRZ gap (figure 0.33), making the link highly susceptible to noise. Consequently, high-speed links operate near the physical limits of reliable detection and require **forward error correction (FEC)** at the physical layer, commonly using Reed-Solomon RS(544,514)-family codes in high-speed Ethernet designs (Anslow 2016; Ethernet Alliance 2025). FEC processing is an implementation-dependent latency term; IEEE 802.3df operator material treats roughly 100 ns of host-side FEC with the RS(544,514) code (called KP4 in the standard) and hundreds of nanoseconds of end-to-end module latency as meaningful at AI/HPC fabric timescales (Yin et al. 2022). Because each switch on a path decodes and re-encodes the signal, the FEC cost accumulates with the number of switches a packet traverses. This chapter counts a path's length as its **hop count**, distinguishing inter-switch links from switch traversals when the two differ. A packet that traverses three switches, the leaf-spine-leaf route of a two-tier fabric, incurs a scenario

budget of 300 ns–600 ns of one-way FEC latency, or 600 ns–1200 ns for a round trip. Against the 350 GB gradient of the 175B job, a few hundred nanoseconds are negligible, because bulk transfers are governed by bandwidth. The cost lands instead on small, latency-bound messages, such as the control handoffs that coordinate pipeline stages, and on collectives whose many sequential steps each pay it. This "physics tax" sets a floor on the fabric's fixed startup latency, formalized in section 6 as the α term, that no software optimization can remove.

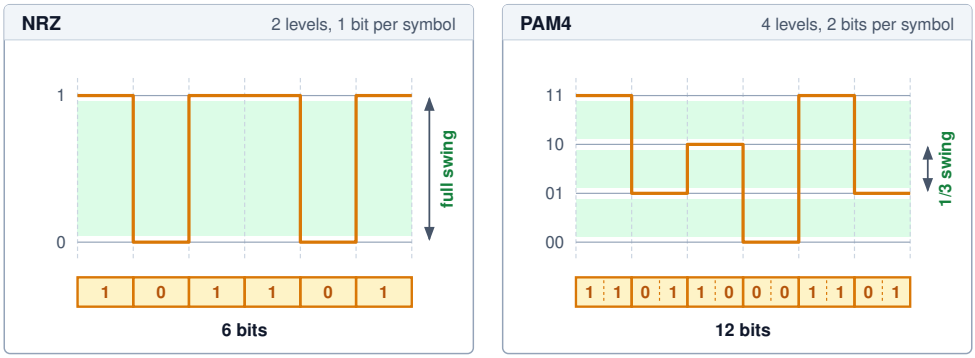


Figure 0.33: From NRZ to PAM4 signaling: Both panels send six symbols in the same time over the same total voltage swing. NRZ (left) uses two levels and carries one bit per symbol, 6 bits in all; PAM4 (right) uses four levels and carries two bits per symbol, 12 bits in all, doubling the data rate without raising the symbol rate. The cost is noise margin: adjacent PAM4 levels sit one third as far apart (arrows), so high-speed links need forward error correction (FEC), which adds to the fabric's fixed α latency.

This signaling shift highlights a key architectural rule: doubling line rate without doubling the symbol rate trades signal-to-noise ratio (SNR) for bandwidth, requiring forward error correction to operate near the channel limit.

Reach and medium for copper and optics

The choice of physical medium determines how far a link can reach before latency, power, and cost reshape the cluster geometry. Table 0.21 compares the recurring cable and optics options by the attributes that decide where each one belongs.

Table 0.21: Cable and optics placement trade-offs: Common interconnect media occupy different reach, latency, and cost points, so cluster designers use copper inside racks and optics as distance begins to dominate placement.

Medium	Reach	Cost profile	Latency impact	Typical placement
DAC (direct attach copper)	1 to 3 meters, shrinking as lane rate rises	Lowest cost (~$50) and no optical module power	Lowest media latency; no optical conversion, though high-speed lanes still pay FEC	Within a rack
AOC (active optical cable)	3 to 30 meters	Higher cost (~$500) from permanently attached transceivers (the modules that convert between electrical and optical signals)	Electrical/optical conversion adds latency on top of the forward error correction (FEC)	Rack-to-rack or row-scale links
Pluggable optics	More than 30 meters	Highest module and power cost, but replaceable optics and fiber cords	Optical conversion adds latency on top of FEC; distance enables topology reach	Network core and pod-scale links

[3] **FEC (forward error correction)**: At 400G and 800G speeds, signal integrity is fragile enough that Ethernet PHY designs rely on FEC to reconstruct corrupted bits (Anslow 2016; Ethernet Alliance 2025). The exact latency depends on the PHY and module architecture; for ML fabric modeling, treating FEC as a per-hop latency budget is the conservative point, because a multi-hop path accumulates that budget before software can hide it.

The high-speed copper and optical paths considered here both include FEC[3], so choosing optics does not by itself remove error-correction overhead. The ranges in table 0.21 describe representative

placements rather than fixed boundaries between media. Optical interconnects can extend the layout beyond a passive copper channel's budget, while pluggable optics also permit separate replacement of modules and fiber. Reach, delivered latency, power, and serviceability jointly determine the choice.

Systems Perspective 3.2: The cost of distance

In an ML fleet, distance is money. Assuming two spine-layer optical links per accelerator, a cluster of 10,000 GPUs requires ~20,000 optical links at the spine layer alone. At $500 per complete link, that represents $10 million in cabling. For power, count one selected spine-side pluggable module per link at 20 W per module, giving 400 kW for those endpoints alone. Each optical link also has a module at its opposite end; this subtotal excludes those modules, switch electronics, and cooling, so it is not the full fabric power budget. The cost dictates cluster geometry: architects pack accelerators as densely as possible (70–100 kW per rack) to maximize cheap copper and minimize expensive optics.

SerDes, link budget, and power

Every port depends on a **serializer/deserializer (SerDes)** circuit that converts parallel data from the switch application-specific integrated circuit (ASIC) into a serial stream. Its power cost accumulates across the provisioned ports. For the 1,024 GPUs reference cluster, assume a full-BW_{bisect} fabric with roughly 3,000 high-speed links across its host and switch tiers. Count one selected switch-side port per link in this power subtotal. Each counted 400 Gb/s port is assigned 25 W, more than the 20 W pluggable-module figure in the cost-of-distance estimate because it also counts the switch-side SerDes that drives the module. The model totals 75 kW, equivalent to 10.5 percent of the accelerators' combined thermal design power. This comparison isolates the assumed power of the selected switch-side ports, excluding the opposite endpoints and the rest of the switch chassis; it does not establish total fabric power or the fraction of measured cluster energy consumed by networking.

The **link budget** allocates the signal loss a path can tolerate while meeting its error target. Losses are counted in decibels (dB), a logarithmic power ratio in which every 10 dB is a further tenfold attenuation (3 dB is roughly a halving), so the losses of cables and connectors in series simply add. In this simplified accounting, a lane has a 30 dB allowance. A 3-meter DAC cable contributing 18 dB of loss and connectors contributing 2 dB leave 10 dB of margin. Higher signaling frequencies increase copper loss, so preserving reach can require more signal conditioning, a different cable, or optics. Aggregate port speed alone does not determine cable reach; lane rate, channel construction, and active components matter. The design must meet both the signal-quality target and the power budget before the transport layer can rely on the link.

Level 2 Transport and the Performance Model

Large-scale training requires sustained, synchronized bulk transfers. A single AllReduce across 1,024 GPUs forwards every worker's contribution through many links in lockstep. This pattern favors RDMA transport offload, reliable completion, and bounded loss-recovery time. A physically lossless fabric is one way to make that performance predictable, but it is not the only design.

RDMA and GPUDirect

Definition 3.3: Remote direct memory access (RDMA)

Remote direct memory access (RDMA) is a networking technology that offloads transport processing to network interface hardware, allowing access to registered remote memory without per-transfer kernel processing of the payload.

1. **Significance**: RDMA can reduce end-to-end message latency from tens of microseconds for a kernel TCP path to low-single-digit microseconds on a tuned fabric, shrinking the fixed startup cost that every message adds to the Fleet Law's communication term $T_{\text{comm}}(N)$.

2. **Distinction**: Unlike a conventional kernel TCP path, RDMA offloads transport processing to NIC hardware and permits user-space access to registered memory. The resulting CPU-core and memory-bandwidth savings depend on the host, NIC, I/O path, message size, and software configuration rather than on link rate alone.
3. **Common pitfall**: RDMA is an access and offload model, not one loss-recovery algorithm. Reliable InfiniBand and RoCE transports detect loss and retransmit (InfiniBand Trade Association 2000). Some RNIC generations use the Go-Back-N-style recovery noted with the loss inversion, which makes a drop expensive (section 6 quantifies the cost), while other designs support stronger selective recovery or tolerate lossy Ethernet without the link-layer pause mechanism (priority flow control) that many RoCE deployments rely on (Mittal et al. 2018). The requirement is reliable completion with a recovery tail that the synchronized workload can tolerate, not a physically lossless Ethernet fabric in every implementation.

A conventional kernel TCP path charges the host for every byte it moves. Interrupt processing, protocol work, and payload copies consume CPU cycles and memory bandwidth that the training process also needs for data loading and preprocessing, and the charge grows with aggregate I/O as many streams or NICs drive a host at 400 Gb/s link rates. Modern TCP stacks reduce the charge with segmentation offload, receive-side scaling, zero-copy interfaces, and careful non-uniform memory access (NUMA) placement, so a single stream need not exhaust a server's memory bandwidth. They do not remove it, and the contention becomes harder to provision predictably as nodes add NICs.

RDMA bypasses the kernel data path. Offloading transport logic to the NIC allows applications to read and write registered remote memory without per-message kernel intervention. For ML, GPUDirect RDMA,[4] the path that dense nodes pair with one NIC per GPU (section 7), extends this principle to accelerator memory (NVIDIA 2026a). In the sending-node data paths diagrammed in figure 0.34, GPUDirect RDMA routes an n-byte payload (what one participant sends, not the model-wide gradient state) along the solid green peer-to-peer path through the PCIe switch straight to the RDMA NIC, bypassing host memory entirely. Without this direct memory access (DMA) bypass, the dashed gray staging path must first copy n bytes from GPU memory into a registered host-memory buffer and subsequently read n bytes out to the NIC, generating roughly $2n$ bytes of redundant host-memory bus traffic. The network still transfers the payload, and the PCIe path may comprise multiple DMA transactions; the optimization removes staging copies rather than collapsing the transfer into one transaction.

[4] **GPUDirect RDMA**: Introduced by NVIDIA for Kepler-class GPUs and CUDA 5.0, GPUDirect RDMA enables a direct PCIe path between GPU memory and third-party peer devices such as network interfaces (NVIDIA 2026a). Before GPUDirect, every gradient transfer had to stage through host memory, consuming CPU memory bandwidth that competes with data loading. Eliminating this bounce path is one reason overlapping communication with backward-pass computation is feasible at scale.

InfiniBand and RoCE

GPU clusters commonly choose between two RDMA transport stacks, and the decision is a reliability-versus-operations trade-off. Both stacks must keep switch buffers from overflowing under synchronized bursts, and they do so in different places. InfiniBand uses **credit-based flow control**. Each receiver advertises its free buffer space to the sender at the other end of the link in units called credits, and the sender transmits only into space that has been advertised. A buffer therefore cannot overflow; congestion appears as senders waiting for credits rather than as dropped packets. Ethernet was designed to drop packets when buffers fill, so RoCE deployments that want the same behavior add two mechanisms. Priority flow control (PFC) lets a filling switch port send a PAUSE frame that stops its upstream neighbor for one traffic class, and explicit congestion notification (ECN) marks packets that pass through a filling queue so that their senders slow down before a pause is needed. Table 0.22 compares where each stack places the burden of losslessness and congestion control, and section 9 develops PFC's failure modes.

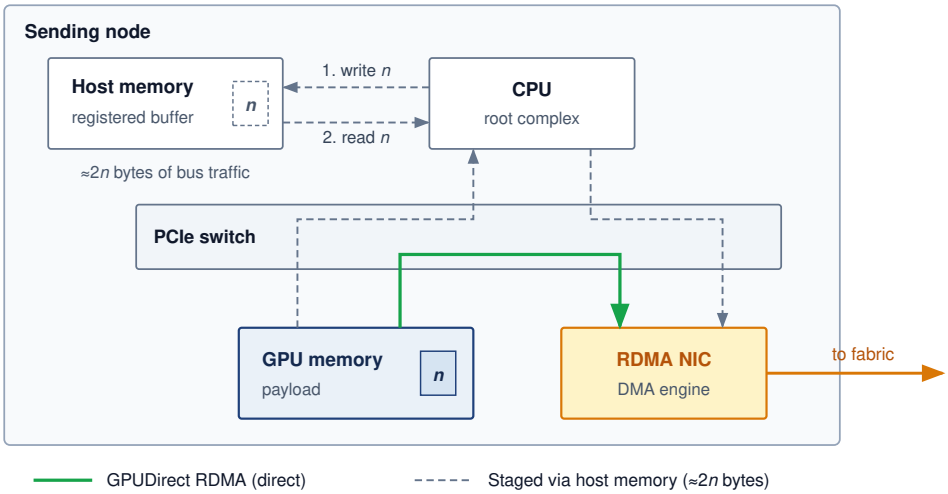


Figure 0.34: GPUDirect RDMA data path: Without GPUDirect (dashed), a sending node first writes the n-byte payload from GPU memory into a registered host-memory buffer and the NIC then reads it back out, about $2n$ bytes of host-memory traffic per payload. With GPUDirect RDMA (solid), the NIC reads GPU memory directly over the PCIe peer-to-peer path, so the host-memory bounce disappears.

Table 0.22: RDMA transport stack trade-offs: InfiniBand and RoCE expose RDMA semantics through different operational contracts, one built around native losslessness and the other around Ethernet compatibility.

Stack	Fabric behavior	Operational burden	Typical fit
InfiniBand (IB)	Purpose-built HPC switched fabric (InfiniBand Trade Association 2000) with credit-based flow control, so losslessness is native at the link layer	a central subnet manager computes routes, and virtual lanes (VLs), separate buffer and credit pools on one link, isolate traffic	Dedicated training clusters where predictable tail latency outweighs Ethernet ecosystem flexibility
RoCE (RDMA over Converged Ethernet)	RoCEv2 carries RDMA semantics by encapsulating InfiniBand transport headers in UDP/IP packets	PFC-based deployments suppress loss with PFC, ECN, and routing policy (Guo et al. 2016; Gangidi et al. 2024); PFC-free designs instead place more burden on end-to-end congestion control and loss recovery (Mittal et al. 2018)	Multi-vendor Ethernet fleets that can absorb more congestion-control tuning

The InfiniBand[5] row reflects a protocol heritage that favors hardware-managed losslessness over Ethernet compatibility.

This architectural choice is visible at the protocol boundary. Figure 0.35 partitions the protocol stack across user-space, kernel, and hardware bands, contrasting traditional socket overhead against direct verbs hardware offload. While the conventional copied TCP/IP path illustrated on the left uses two software copies across kernel buffer boundaries and software protocol execution, the RDMA stack (right) traces a single amber bypass arrow straight from the collective communication library (such as the NVIDIA Collective Communications Library, or NCCL) and the user-space **verbs API** to the RDMA NIC, keeping the operating system entirely off the active data path.

Reliable delivery and loss recovery

By routing the user-space verbs API directly to hardware as diagrammed in figure 0.35, the architecture decouples collective library calls from the operating system, leaving the transport hardware and fabric to arbitrate reliable delivery and packet loss. Reliable connected transports in both InfiniBand and RoCE detect loss and retransmit (InfiniBand Trade Association 2000); credits and PFC exist to make that retransmission rare (Guo et al. 2016; Gangidi et al. 2024). Losslessness is therefore a deployment contract rather than a property of RDMA as a family. Designs that operate over lossy Ethernet without PFC shift more responsibility to endpoint congestion control, packet reordering, and selective recovery (Mittal et al. 2018).

Recovery granularity therefore matters. On an RNIC with **Go-Back-N** style recovery and no

[5] **InfiniBand**: Formed in 1999 from the merger of two competing server I/O standards (Future I/O and NGIO), InfiniBand was originally designed to replace PCI as a general-purpose system interconnect. Its pivot to HPC networking preserved the credit-based, hardware-managed flow control that server I/O demanded, and this heritage is precisely why InfiniBand provides native losslessness without the PFC fragility that plagues Ethernet-based RDMA fabrics.

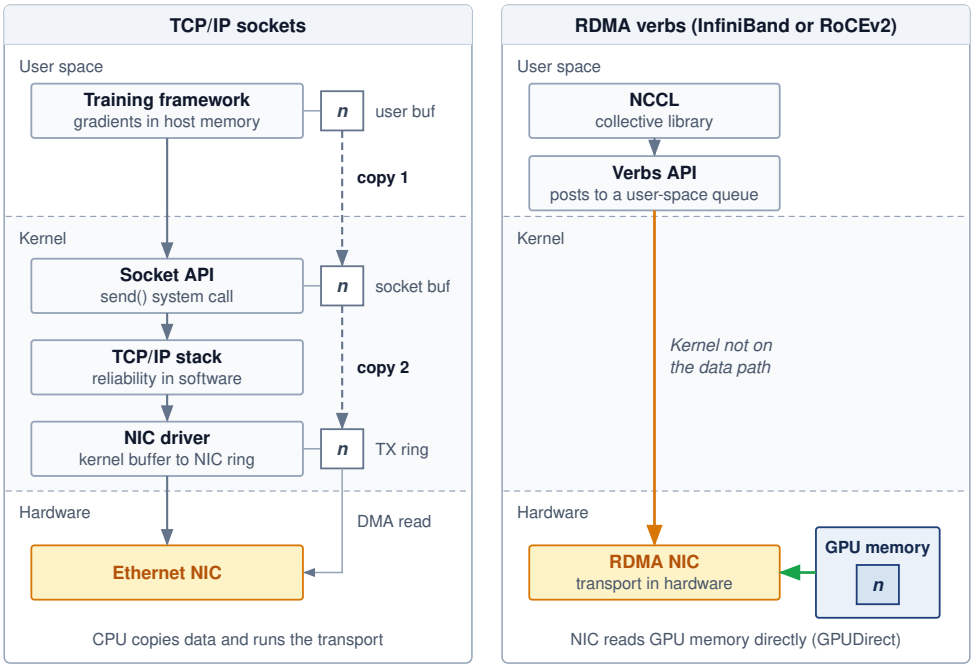


Figure 0.35: Traditional TCP/IP vs. RDMA verbs stacks: Read each stack top to bottom through the user-space, kernel, and hardware bands. In the illustrated copied TCP/IP socket path (left), a send enters the kernel through a system call, the payload is copied into kernel socket buffers and again toward the NIC's transmit ring, and the CPU runs the transport protocol in software. With RDMA verbs over InfiniBand or RoCEv2 (right), the collective library posts work requests from user space, the kernel stays off the data path, and the RDMA NIC runs the reliable transport in hardware, reading GPU memory directly through GPUDirect instead of staging a host copy.

(principle 5) decomposes message transfer time as $T(n) = \alpha + n/\beta$, where n is the message size in bytes, α is the fixed startup latency, and β is the sustained bandwidth in bytes per unit time (Hockney 1994). The physical topology influences both parameters through path length and available capacity. A collective built from many sequential rounds of messages pays α once per round, so its startup cost can grow with the number of participants even when the underlying fabric provides short physical paths.

The model reveals two regimes that lead to different engineering responses. For messages with $n < \alpha\beta$, startup cost α exceeds the transmission cost; sufficiently small control messages lie deep in this latency-bound region. For messages with $n > \alpha\beta$, the n/β term is larger; sufficiently large gradient transfers lie deep in the bandwidth-bound region. Near the crossover, both terms matter. A collective's regime also depends on how its algorithm divides the payload into messages and schedules them across rounds.

For the modeled NDR InfiniBand path with $\alpha = 1.5$ µs and $\beta = 50$ GB/s, the crossover point $n^* = \alpha \cdot \beta \approx 75$ KB. Measured startup latency and delivered bandwidth vary with the NIC, switch path, software stack, and contention, so these parameters describe a scenario rather than a protocol constant. Far below the crossover, more bandwidth removes only a small part of transfer time; far above it, lower startup latency removes only a small part. Shorter paths can lower α, while additional delivered path bandwidth raises β; their value depends on the message sizes the workload actually exchanges.

↪ The same decomposition, multiplied by each schedule's round count and traffic factor, is developed for collective algorithms in section 7.

↪ The crossover message size that separates the latency-dominated and bandwidth-dominated regimes, with a worked InfiniBand NDR example, is developed in section 4.

Napkin Math 3.1: The alpha-beta crossover

Problem: A fabric designer is comparing a modeled InfiniBand NDR path (1.5 µs, 50 GB/s) against a modeled RoCE path over slower Ethernet (5 µs, 12.5 GB/s). The comparison deliberately bundles a higher-latency stack with a slower link, so a third path, RoCE on a 400 Gb/s link, separates the two effects. For a 4 KB control message and a 350 MB gradient shard, which part of $T(n) = \alpha + n/\beta$ dominates, and why does the first path help for different reasons in each regime?

Math: Apply $T(n) = \alpha + n/\beta$ for a 4 KB control message and a 350 MB gradient shard.

1. **Small message** (4 KB):
   - InfiniBand: $1.5\,\mu s + 4\,KB/50\,GB/s = 1.5 + 0.08 = \mathbf{1.58}\,\mu s$
   - RoCE (100G): $5.0\,\mu s + 4\,KB/12.5\,GB/s = 5.0 + 0.32 = \mathbf{5.32}\,\mu s$
   - **Result**: Under these assumed path parameters, the NDR path is 3.4× faster because its modeled α is lower.
2. **Large message** (350 MB):
   - InfiniBand: $T = \alpha + n/\beta = 7.0$ ms
   - RoCE (100G): $T = \alpha + n/\beta = 28.01$ ms
   - **Result**: Under these assumed path parameters, the NDR path is 4× faster because its modeled β is higher. That factor is the ratio of the two line rates, so it measures the faster link rather than the transport.
3. **Same line rate** (RoCE at 400 Gb/s, RoCE α):
   - Small message: 5.08 µs, still 3.2× the NDR time, because α alone separates the stacks.
   - Large message: 7.0 ms, essentially the NDR time, because at equal β nothing but a few microseconds of α separates them.

Systems insight: This scenario places the crossover ($n^* = \alpha\beta$) near 75 KB. Because gradients are megabytes to gigabytes, their transfers are usually bandwidth dominated, whereas pipeline coordination can remain latency dominated. A higher line rate produces little benefit for a message whose startup term dominates; transport processing, topology, and hop count then govern the improvement.

In the 175B training job, a 4 KB control message, such as the notification that tells a pipeline stage its next microbatch is ready, costs $T(n) \approx 1.58$ µs, with bandwidth contributing only 5.1 percent of the total. Faster links therefore offer little benefit for this handoff. A 350 MB gradient shard, roughly the share of the 350 GB gradient that each of the 1,024 GPUs owns when a reduction partitions it across the whole cluster, costs $T(n) \approx 7.0$ ms; doubling bandwidth to 100 GB/s would approximately halve its transfer time.

Across the full range of message sizes, each path traces a flat latency-dominated plateau that bends into a linear bandwidth-dominated regime (figure 0.36). On the modeled NDR path, the knee at 75 KB marks where transmission time overtakes the 1.5 µs startup latency; the 100 Gb/s RoCE path sits on a higher floor of 5 µs and bends near 62.5 KB. The exact positions reflect the assumed α and β scenario parameters rather than invariant protocol constants. On both paths, startup latency governs sub-kilobyte control handoffs, whereas multi-megabyte gradient shards sit well inside the bandwidth-bound regime.

Checkpoint 3.1: Protocol selection

Consider the 175B job on the 1,024-GPU reference cluster. Its gradient exchanges move messages of hundreds of megabytes, while its pipeline stages coordinate through frequent control messages of a few kilobytes.

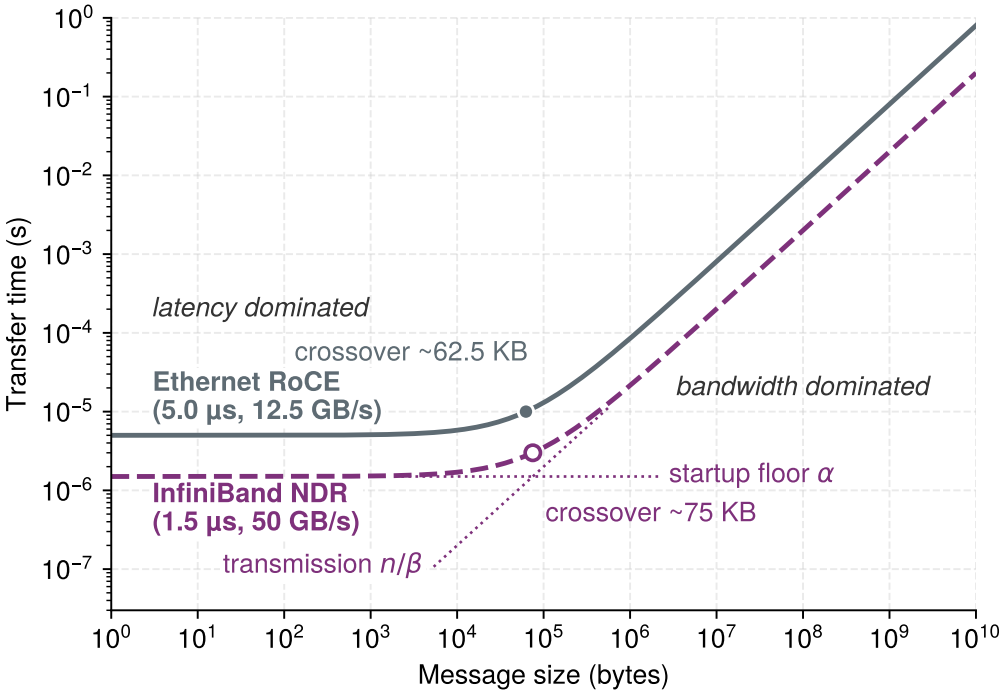


Figure 0.36: The α-β crossover: Modeled transfer time as a function of message size for an NDR InfiniBand path and a 100 Gb/s RoCE baseline using the scenario parameters in the text. Small messages are latency dominated (flat region), while large messages are bandwidth dominated (linear region); on the InfiniBand path the dotted asymptotes show the knee sitting where the two terms are equal. Measured crossover points vary with the end-to-end path.

- ☐ **Protocol fit**: use the α-β crossover to recommend a transport stack, and justify the choice for both the large gradient messages and the small control messages.
- ☐ **RoCE requirements**: compare the infrastructure required by PFC-based and PFC-free RoCE designs with InfiniBand's credit-based fabric.
- ☐ **Line rate vs. startup cost**: explain why moving the control messages from a 100 Gb/s path to a 400 Gb/s path with the same α would barely change their transfer time.

Beyond classifying individual transfers, the same model identifies when communication overtakes computation. That question sharpens as models grow, because the scaling laws that push training toward more parameters (section 6) enlarge, in direct proportion, the gradient that every data-parallel step must reduce. The α-β analysis in this section focused on the transfer time of individual messages across a single link, treating the network as a point-to-point channel. In a data-parallel training loop, however, the relevant question is whether the collective AllReduce across the full cluster finishes before the next compute step is ready to begin. When the gradient vector grows large enough, the aggregate transfer time for a ring AllReduce exceeds the per-step computation time, and the network becomes the pacing constraint for the entire training job.

A ring arranges participants in a logical cycle, with each forwarding chunks to its next neighbor. Its ReduceScatter phase combines contributions and leaves a different reduced chunk at each participant; its AllGather phase distributes those chunks so every participant has the complete result. This logical ring is a communication schedule over the fabric, not a requirement that the physical switches form a ring.

Napkin Math 3.2: AllReduce cost as gradients grow

Problem: How does the communication share of a training step change as the gradient grows from GPT-2 scale to 70 billion parameters on a 1024-GPU H100 cluster that reduces the full gradient with a ring AllReduce?

Setup: This is a separate scenario from the running 175B job. Its two models step toward the running example, one at GPT-2 scale and one approaching the running example's size. It holds each GPU's work per step fixed, sized so that the compute phase takes 101 ms at 50 percent accelerator utilization, and assumes an NDR path modeled by $\alpha = 1.5$ µs and $\beta = 50$ GB/s. For a GPT-2-scale model, each worker contributes 6 GB of gradients. The notebook reduces in FP32, as some recipes do for numerical safety, so its payloads are twice the 16-bit figure used elsewhere in this chapter.

Here N is the number of participating workers, or ranks, and M is the gradient payload contributed by each rank.

Math: Applying the ring cost $T_{\text{ring}} \approx \frac{2(N-1)}{N}\frac{M}{\beta} + 2(N-1)\alpha$ gives $T_{\text{ring}} \approx 242.8$ ms. The modeled communication fraction is:

$$\text{Comm. fraction} = 70.6\%$$

Each phase takes $N-1$ rounds and transfers a total of $(N-1)/N$ of that payload per rank. The expression therefore counts both the bytes transmitted and the startup cost paid across the two phases. This estimate assumes a uniform path bandwidth and no overlap with computation; it tests whether the fabric can keep pace without requiring the full scheduling derivation developed in section 8.

Systems insight: Increasing the payload to the 70 billion case (280 GB) raises the modeled ring time to:

$$T_{\text{ring}} \approx 11192.1 \text{ ms}$$

Holding the compute phase fixed isolates the effect of payload size; a real 70B step would also compute longer per sample, so its true communication fraction depends on the per-GPU batch. The running example's 350 GB FP16 gradient is larger still than this 280 GB payload, so a full-gradient ring for the 175B job would sit beyond the right end of this comparison. A ring time of this size shows why such models are not trained with pure data parallelism over this fabric. The conclusion is conditional rather than a universal model-size threshold: parallelism, gradient precision, bucketing, overlap, topology, and delivered bandwidth all move the boundary.

The α-β model quantifies the speed of a single link, but the 175B-parameter model requires 1,024 GPUs to work in concert. Scaling these transport primitives from a pair of nodes to a warehouse-scale supercomputer demands a **network topology**: a specific pattern of connections that maximizes $\text{BW}_{\text{bisect}}$ while minimizing the hop count and cabling cost for global collective operations.

Level 3 Switch and Topology

A cluster can have thousands of fast links at the edge and still starve its AllReduce operations if the cross-sectional capacity at the narrowest point in the switching hierarchy is insufficient. The physical arrangement of switches determines whether that cross-section throttles collective communication or sustains full line-rate exchange across all participating workers. Two properties govern this capability: bisection bandwidth $\text{BW}_{\text{bisect}}$ and whether the fabric is non-blocking, a constraint captured by the bisection bandwidth theorem (principle 6).

Bisection bandwidth quantifies this worst-case throughput ceiling that the topology imposes on global collectives.

Definition 3.4: Bisection bandwidth

Bisection bandwidth is a network topology metric defined as the minimum aggregate link capacity crossing any partition that divides the cluster into two equal halves, representing the worst-case throughput ceiling for traffic that must cross that partition, including global collectives.

1. **Significance**: Bisection bandwidth $\text{BW}_{\text{bisect}}$ directly sets the cluster-scale bandwidth ceiling for global synchronization. A 1,024-GPU fat-tree with 400 Gb/s links at 1:1 subscription provides $\text{BW}_{\text{bisect}} = 512 \times 50\,\text{GB/s} = 25.6\,\text{TB/s}$ per direction; a 4:1 oversubscribed spine reduces this to 6.4 TB/s, increasing the transfer-time lower bound for a fixed cut-crossing payload by 4×. Actual AllReduce slowdown depends on rank placement, the collective schedule, and which links are saturated.
2. **Distinction**: Unlike aggregate bandwidth (the sum of all edge link speeds, which can be high even in a poorly connected topology), $\text{BW}_{\text{bisect}}$ measures global connectivity. A star topology with 1,000 edge links all meeting at one central switch has high aggregate bandwidth but $\text{BW}_{\text{bisect}}$ limited by that switch's backplane capacity.
3. **Common pitfall**: A frequent misconception is that adding more leaf switches always increases $\text{BW}_{\text{bisect}}$. In a three-tier fat-tree, oversubscribing the spine layer (giving each spine switch fewer uplinks to the core than downlinks to its leaves) reduces $\text{BW}_{\text{bisect}}$ below the edge-link total regardless of how many leaf switches are present.

ML training includes global collectives and AllToAll phases that can drive traffic across topology partitions, making full $\text{BW}_{\text{bisect}}$ a useful capacity target. A smaller cut becomes a bottleneck when the workload's crossing traffic exceeds what it can deliver within the communication budget. Rank placement and the collective schedule determine that traffic.

Bisection bandwidth measures cut capacity; a non-blocking fabric provides paths that can sustain simultaneous input-output pairings at line rate with suitable routing. Full $\text{BW}_{\text{bisect}}$ and balanced uplink capacity support that goal, but routing must also spread traffic across the available paths. In the oversubscribed designs considered here, reducing a cut's capacity reduces its effective $\text{BW}_{\text{bisect}}$, increasing the transfer-time bound for a fixed payload that saturates it. A collective that keeps most traffic within each half need not experience the same slowdown.

↪ A slower cut lengthens the training step only when the extra transfer time cannot hide behind computation. The communication-to-compute diagnostic that tests this is developed in section 4.

Definition 3.5: Non-blocking fabric

Non-blocking fabric is a network with sufficient internal path capacity to support any permutation of input-output port pairs simultaneously at full line rate under a suitable routing assignment.

1. **Significance**: In ML fleets, a non-blocking fabric can support full-rate permutation traffic with suitable routing, preserving the available $\text{BW}_{\text{bisect}}$ term for global collectives. A 2:1 oversubscribed spine halves the effective $\text{BW}_{\text{bisect}}$, doubling the communication time when that cut is the saturated bottleneck and dropping scaling efficiency η_{scaling} accordingly. In a scenario workload assumed to spend 30 percent of each step communicating, doubling that share while the computation share stays fixed lengthens each step, and the longer step costs roughly 23.1 percent of total cluster throughput. Two ratios recur in this section. This definition uses 2:1, a common data-center compromise; the bisection definition above and notebook 3.3 use 4:1, a cost-optimized spine, and the notebook writes out the throughput formula behind both results.
2. **Distinction**: The guarantee concerns a permutation, in which each input and output belongs to one pairing. It does not promise full line rate from every sender to every receiver at once, nor does it make an arbitrary routing assignment free of contention.

3. **Common pitfall**: A frequent misconception is that non-blocking means zero congestion. Endpoint congestion (incast) can still occur if multiple senders simultaneously target the same receiver port, regardless of how much internal fabric capacity is available.

Fat-trees build on Clos-style non-blocking network principles to supply full BW_{bisect} (Clos 1953), rail-optimized networks trade some global routing flexibility for lower cabling cost, and dragonfly topologies reduce optical link counts while introducing workload-placement constraints (Kim et al. 2008). This fundamental balance between guaranteed bisection bandwidth and economic scalability drives every topology decision in large-scale ML clusters, as the topology comparisons in section 6, section 8, and section 8 illustrate.

Top-of-rack (ToR) and the failure domain

The top-of-rack (ToR) switch aggregates traffic and creates a shared **failure domain**, a set of resources affected by the same outage. Consider a rack containing four nodes with eight GPUs each. If all 32 accelerators depend on one ToR with no alternate path, losing that switch disconnects them from the rest of the job. Recovery then depends on available paths, surviving state, and the job's recovery policy. Individual links and nodes remain smaller failure domains, while rack power can create a broader shared outage. This one-switch-per-rack wiring is the simpler baseline used here to teach radix and failure domains; the reference cluster itself wires each GPU to a rail switch, a layout developed in section 8 that reshapes the failure domain, because losing one rail switch cuts one GPU in each of many nodes rather than every GPU in one rack.

The switch **radix**, its number of ports, determines how many endpoints and uplinks it can connect. In the reference allocation, a 64-port switch assigns 32 ports to servers, one for each of 32 GPUs, and 32 ports to the spine. With equal port rates, the 1:1 ratio avoids oversubscription at that boundary; delivered throughput still depends on forwarding and the paths beyond it. The 1,024 GPUs-GPU cluster requires approximately 32 such endpoint groups. Physical rack count also depends on node density and the cabling layout.

The same boundary shapes state placement. To survive a rack-wide outage, a job needs recoverable state outside that rack and a way to resume on available capacity. Topology-aware scheduling must therefore consider both fast communication paths and the failures that several nearby resources share.

↪ Nested failure domains, and why redundant state must span them to survive a correlated rack or ToR outage, are developed in section 6.

Fat-tree (Clos) networks

The ToR provides non-blocking bandwidth within a single rack, but connecting the reference cluster's 32 endpoint groups into a cluster that preserves full BW_{bisect} across every possible communication pair requires a topology that scales cross-sectional capacity with cluster size. The fat-tree (also called a Clos network) achieves this by adding parallel spine switches at each tier, so the aggregate uplink capacity always matches the total edge bandwidth feeding into it. In this vocabulary, leaf switches attach servers or racks, spine switches connect leaves within a pod, and core switches connect multiple pods when a third tier is needed; other sources call the leaf and spine tiers edge and aggregation. A pod here is a switching domain, the group of leaves that one set of spines joins, which can be narrower than the multi-rack pod of section 11, where the fat-tree and the torus were introduced as the two dominant ways to wire one. A multi-rack pod in that sense can contain several fat-tree pods.

Definition 3.6: Fat-tree

Fat-tree is a hierarchical ML cluster network topology in which the number of parallel paths (and therefore aggregate cross-sectional capacity) increases at each switch tier toward the spine, providing full BW_{bisect} and multiple equal-cost routes between any two nodes (Al-Fares et al. 2008).

1. **Significance**: A k-ary fat-tree built from radix-k switches supports $k^2/2$ hosts in a standalone two-tier configuration and $k^3/4$ hosts in a three-tier configuration with full BW_{bisect}.

With 64-port switches, a standalone two-tier fabric supports 2,048 GPUs and a three-tier fabric supports 65,536 hosts. This is a capacity bound for suitable routing and admissible traffic; it does not eliminate endpoint contention or guarantee that a particular AllReduce implementation reaches line rate.

2. **Distinction**: Unlike a standard tree (where bandwidth at the root is a single bottleneck shared by all leaves), a fat-tree replaces each root with multiple spine switches whose combined uplink capacity matches the total edge bandwidth, eliminating the bottleneck.
3. **Common pitfall**: A frequent misconception is that fat-trees guarantee zero network cost. They require $\mathcal{O}(N \log N)$ switches and dense cabling, so a non-blocking three-tier fat-tree at the 4,000-GPU scale needs hundreds of switches and more than ten thousand links before a single accelerator is purchased.

Figure 0.37 diagrams this non-blocking topology for a three-tier radix-4 fabric ($k = 4$), with four core switches interconnecting four dashed pod modules. Leaf and spine switches split their ports between the tiers below and above; core switches use all their ports to connect pods. Each tier boundary therefore carries 16 links. The highlighted route traverses five switches and is one of $(k/2)^2 = 4$ equal-cost routes from a GPU in Pod 1 to Pod 4. Parallel paths supply the capacity, while routing must distribute traffic across them to use it.

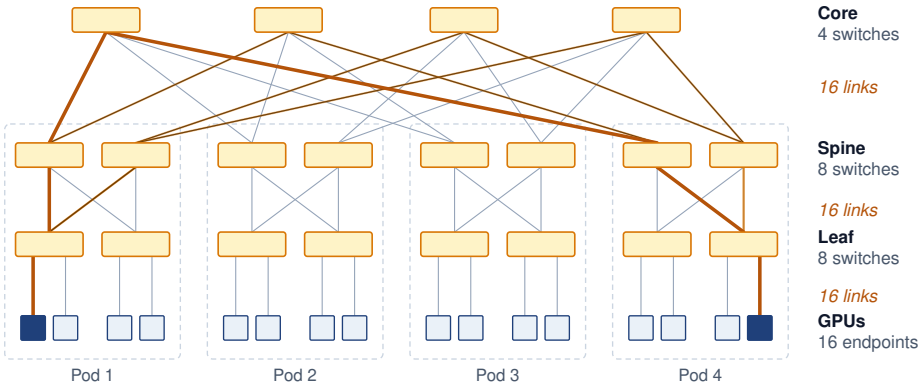


Figure 0.37: Non-blocking fat-tree topology: A three-tier fat-tree built from radix-4 switches ($k = 4$) connects $k^3/4 = 16$ GPUs through four pods. Leaf and spine switches split their ports equally between the tiers below and above; core switches use all their ports to connect pods. Each tier boundary carries 16 links, supporting full $\text{BW}_{\text{bisect}}$ with suitable routing. The highlighted leaf-spine-core-spine-leaf route between pod 1 and pod 4 is one of $(k/2)^2 = 4$ equal-cost paths (the other three are drawn lighter), and exploiting those alternatives without excessive reordering requires compatible switch and endpoint mechanisms.

The fat-tree[6] is a common default for ML clusters because a non-blocking design can provide full $\text{BW}_{\text{bisect}}$ across arbitrary partitions. This capacity benefits global AllReduce even though implementations such as rings and trees do not require simultaneous all-to-all communication. The number of hosts that the guarantee can cover depends on switch radix and tier count.

A fat-tree built from switches with radix[7] k supports $N_{\text{hosts}} = k^3/4$ hosts at three tiers. A standalone two-tier non-blocking fabric can instead use k leaves, each with $k/2$ host ports and $k/2$ uplinks, connected to $k/2$ spines. Each spine uses all k ports to reach the leaves, providing $k^2/2 = 2{,}048$ host ports for radix-64 switches. One pod of the three-tier design has only $k/2$ leaves and therefore $(k/2)^2 = 1{,}024$ host ports; its spine switches reserve ports for the core. These are different port allocations and switch counts, not two ways of counting the same fabric. The 1,024-GPU reference cluster fits within a standalone two-tier design. The distinction matters as soon as a cluster outgrows it. A 4,096-GPU deployment cannot join two fully populated standalone 2,048-host fabrics at their spines, because every spine port is already occupied by a leaf connection. It is instead built as four 1,024-host pods of the three-tier design, joined through a core tier.

[6] **Fat-tree (Clos network)**: The underlying multi-stage switching theory was invented by Clos (1953) at Bell Labs to minimize the number of electromechanical crosspoints in telephone exchanges. Leiserson (1985) at MIT generalized the concept as the "fat-tree," where the tree is "fat" because link bandwidth increases toward the root, proving it could emulate any network of equal hardware volume. The same cost-minimization logic that drove 1950s telephony now drives ML cluster design: minimize switch count while guaranteeing non-blocking connectivity for global AllReduce.

[7] **Switch radix**: High-end switches (for example, NVIDIA Quantum-2) can feature a radix of 64 ports, each at 400 Gb/s. This density allows a standalone two-tier fat-tree to support up to 2,048 GPUs; a path between distinct leaves traverses leaf, spine, and destination leaf, or three switches. As model scale pushes toward 100,000 GPUs, increasing switch radix (to 128 or 256), grouping accelerators into larger local domains, or accepting topology constraints are the main ways to avoid adding more tiers and the resulting latency/cost explosion.

A concrete bisection estimate shows how quickly oversubscription turns into synchronization delay.

Napkin Math 3.3: Bisection bandwidth: The cost of oversubscription

Problem: A cluster designer is choosing between a "non-blocking" (1:1) fat-tree and a "cost-optimized" (4:1) spine for a $300M cluster of 1024 GPUs. This is a separate economics scenario rather than the running 175B job: each GPU contributes a 5 GB gradient payload, and the workload is assumed to spend $f = 30$ percent of each step communicating. That share is a scenario input. It is larger than the 13 percent of the illustrative schedule in figure 0.32 and far smaller than the exposed share in the introduction's communication-tax estimate (section 11), which assumes pure data parallelism with no overlap; none of the three is a measured share of the reference job. How much slower will the AllReduce be on the cheaper network, and what does that cost?

Math: Bisection bandwidth ($\text{BW}_{\text{bisect}}$) is the minimum pipe diameter between halves of the cluster. Assume a unidirectional ring whose ranks alternate between the two halves of the cluster. Every ring edge then crosses the cut, with $N_{\text{GPU}}/2$ senders in each direction. Assume balanced routing, no competing traffic, and negligible startup latency. ReduceScatter plus AllGather contributes a traffic factor $2(N_{\text{GPU}} - 1)/N_{\text{GPU}}$ = 1.998 per GPU; multiplying by $N_{\text{GPU}}/2$ gives the bytes crossing the cut in each direction. A ring that groups ranks within each half would have fewer crossing edges and a different cut-load bound.

1. **Non-blocking (1:1)**: $\text{BW}_{\text{bisect}} = 512 \times 50$ GB/s = 25,600 GB/s per direction.
   - Time: 5,115 GB / 25,600 GB/s $\approx$ 0.200 s.
2. **Oversubscribed (4:1)**: $\text{BW}_{\text{bisect}}$ = 25,600 GB/s divided by 4 = 6,400 GB/s per direction.
   - Time: 5,115 GB / 6,400 GB/s $\approx$ 0.799 s.
3. **Throughput**: If the communication share stretches by the slowdown factor r while computation stays fixed, then relative throughput $= \frac{1}{(1-f)+fr} = \frac{1}{0.70+0.30\times4} = \frac{1}{1.90} \approx 0.53$, a loss of about 47.4 percent of cluster throughput.
4. **Cost**: That loss times the $300M capital cost is about $142.1M.

Systems insight: For this cut-saturating placement, saving money on core switches creates a 4× bottleneck for global synchronization, and on a $300M cluster that bottleneck idles about $142.1M of compute. The same formula gives the 23.1 percent loss of the 2:1 spine in the non-blocking definition. This is an equivalent-capacity cost under the stated workload assumptions, not a direct equipment loss. Oversubscription must be evaluated against the collective traffic actually crossing the constrained cut.

This oversubscription calculation turns the topology definition into a design rule: the subscription ratio at each tier determines whether a fat-tree can sustain global collectives.

Scaling beyond the 2,048-host two-tier limit requires a three-tier architecture with core switches, enabling the fabric to reach 65,536 hosts, but the added scale carries both cost and latency. A non-blocking $k = 64$ three-tier tree requires roughly $5k^2/4 \approx 5{,}120$ switches across the core, spine, and leaf layers; at $10,000 to $50,000 per switch, the switching layer alone represents $51M to $256M. Typical hop counts also rise, from two inter-switch links and three switch traversals for intra-pod traffic (leaf-spine-leaf) to four inter-switch links and five switch traversals for inter-pod traffic (leaf-spine-core-spine-leaf), adding serialization delay and switch processing time to the α latency term across thousands of synchronization steps. Rail-optimized topologies respond to both pressures by matching the physical cabling pattern to the collective communication pattern.

Checkpoint 3.2: Fat-tree topologies

These questions check whether hierarchical switch-fabric trade-offs are clear:

- ☐ **Radix and scale**: compute the maximum number of GPUs a radix-64 two-tier fat-tree can connect without core switches.
- ☐ **Non-blocking ratio**: explain why a non-blocking fabric requires a 1:1 subscription ratio at every tier of the network.
- ☐ **Tier vs. latency**: determine how α (startup latency) changes when moving from a two-tier to a three-tier fat-tree.
- ☐ **Aggregate vs. bisection**: distinguish aggregate bandwidth from $\text{BW}_{\text{bisect}}$ and identify the metric that matters for AllReduce.

Rail-optimized topology

Rail-optimized topology begins from the communication pattern rather than from a generic switch hierarchy. Dense accelerator nodes partition GPUs by local slot position into independent horizontal rails, as diagrammed in figure 0.38. In this physical cabling scheme, high-bandwidth internal NVSwitch planes bind GPUs 0 through 3 within each node, while external network ports route by slot position: GPU 0 in every node connects strictly to the Rail 0 switch, GPU 1 connects to Rail 1, and so on across the cluster.

↩ Assigning each GPU in a node to its own rail switch, rather than one shared top-of-rack switch, is established in section 11.

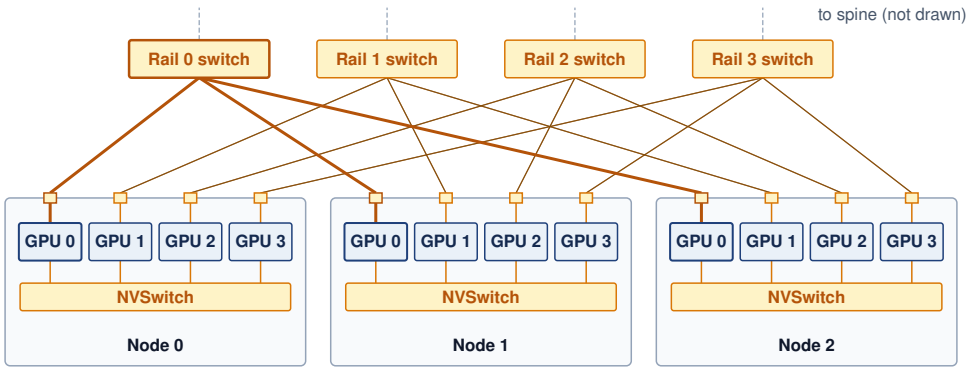


Figure 0.38: Rail-optimized physical wiring: In dense accelerator nodes such as the DGX H100, each GPU's network port is cabled by local slot position: GPU 0 in every node connects to the rail 0 switch, GPU 1 to the rail 1 switch, and so on. Three nodes and four of each node's eight GPUs are drawn, with the rail 0 cables emphasized; further nodes attach to the same rail switches. Tensor-parallel traffic stays on each node's NVSwitch, same-rank data-parallel traffic stays on its own rail, and a spine layer (not drawn) bridges the rails for cross-rank traffic.

The wiring pattern connects corresponding GPUs across nodes (GPU 0 to GPU 0, GPU 1 to GPU 1) through dedicated rail switches rather than a shared ToR switch. This matters because data parallelism creates a deterministic and highly stratified communication pattern that standard topologies fail to exploit. When tensor-parallel groups stay inside each node, each replica assigns the corresponding model shard to the same local GPU rank. The slot number here is a local rank within a node; workers in the full distributed job also have distinct global ranks. GPU 0 on one node therefore synchronizes that shard's gradients with GPU 0 on other nodes, but rarely with GPU 1 during this data-parallel exchange. A **rail-optimized topology** physically hardwires this logic by isolating these same-rank communication paths into dedicated networks. Instead of connecting all 8 GPUs in a node to a single ToR switch, the network connects all GPU 0s across the entire cluster to a dedicated "Rail 0" switch fabric, all GPU 1s to "Rail 1," and so on. A simple hop-count estimate shows the payoff.

Napkin Math 3.4: The rail-optimized dividend

Problem: A team is synchronizing per-rank data-parallel gradients across 128 nodes. In a standard fat-tree, each message between same-rank GPUs traverses its source leaf switch, a spine switch, and the destination leaf switch (3 switch traversals). In a rail-optimized network built from rail switches with at least one port per node, all corresponding GPUs sit on the same rail switch (one traversal). On the reference cluster that requires rail switches with more ports than the radix-64 switch used so far, so the estimate describes a higher-radix design. How much latency dividend does the rail design earn when a rail fits on one switch?

Math: This estimate counts only the switch-traversal contribution to communication latency (α), using the same assumed delay for each traversal.

1. **Standard latency**: 3 traversals $\times$ 0.6 µs = 1.8 µs.
2. **Rail-optimized**: 1 traversal $\times$ 0.6 µs = 0.6 µs.
3. **Result**: 3× lower latency.

Systems insight: For synchronous data-parallel AllReduce, this 3× reduction applies to the modeled switch-latency contribution, not to total collective time. Its effect on scaling efficiency (η_{scaling}) depends on payload size, delivered bandwidth, compute time, and overlap. The single-switch rail in this example avoids the spine traversal for same-rank traffic. The dividend is conditional. On the reference cluster's radix-64 switches each rail outgrows one switch and regains the extra traversals, so what rails reliably buy there is isolation, developed below.

The hop saving is only part of the case for rails. Large language model fleets adopt the pattern because it matches how their parallelism plan divides traffic.

Lighthouse 3.1: Archetype A (GPT-4/Llama-3): The rail-optimized fleet

Archetype A's use of 3D parallelism generates two distinct traffic patterns that pull in opposite directions: (1) massive, bandwidth-hungry gradient averaging for data parallelism, and (2) high-frequency, latency-sensitive activation exchanges for tensor parallelism. Keeping tensor parallelism inside each node's NVLink domain leaves data-parallel gradient traffic on the fabric, and rails give each same-rank data-parallel group its own switch network. A rail can provide a single switch hop between nodes when its endpoint count fits the available switch ports. Larger rails require additional switching stages, so rail alignment alone does not guarantee single-hop communication. Either way, the lesson for Archetype A is that how the fabric is wired to the parallelism plan matters as much as how many accelerators it connects.

For the cluster of 1,024 GPUs spanning 128 nodes, this creates 8 parallel networks of 128 GPUs each, requiring at least one switch port per endpoint in each rail. A single-switch realization therefore needs a radix at least as large as the rail endpoint count; the earlier radix-64 switch cannot realize this rail alone, which is why notebook 3.4 assumed higher-radix rail switches. Built from radix-64 switches instead, each rail becomes a small two-tier fabric that preserves rank alignment but adds hops. For the bandwidth-hungry gradient exchanges of data parallelism, the larger benefit is isolation. Each rail carries only its own rank's traffic, so the eight rail networks operate concurrently without competing for shared spine capacity. When a rail fits on one switch, the shorter path also trims the startup cost a ring pays on every round. However, this architecture introduces a sharp trade-off: traffic that must reach GPUs of different ranks (such as expert routing in mixture of experts (MoE), or pipeline-stage handoffs that do not align with the rail wiring) requires bridging across rails. Large clusters therefore often employ a hybrid approach, using rail-optimized leaves for same-rank data-parallel traffic while bridging the rails with a full fat-tree spine to support cross-rank communication patterns.

Checkpoint 3.3: Rail-optimized networks

These questions check whether workload-specific network-design trade-offs are clear:

- ☐ **Rail beneficiary**: identify the dimension of 3D parallelism (tensor parallelism, pipeline parallelism, or data parallelism) that benefits most from a rail-optimized design.
- ☐ **Switch hops**: explain when a rail-optimized network reduces the number of switch hops for gradient exchanges compared to a standard fat-tree, and what it still provides when a rail needs more ports than one switch offers.
- ☐ **Traffic isolation**: explain the traffic isolation benefit of placing all GPU 0s on one rail and all GPU 1s on another.
- ☐ **Core switch need**: classify the claim as true or false: a rail-optimized network eliminates the need for high-bandwidth core switches connecting different rails.

Dragonfly and torus alternatives

A **dragonfly**[8] topology organizes high-radix routers (the dragonfly literature's name for switches) into fully connected groups joined by global optical links. Each group has a routers, and each router has p terminal ports and h global channels. The ratio of h to p sets how much global bandwidth each group receives relative to the traffic its terminals can inject, so global bandwidth is a design parameter rather than a fixed percentage of aggregate injection bandwidth. The balanced configuration analyzed by Kim et al. (2008), $a = 2p = 2h$, is one setting of that knob. Because the routers in a group are fully connected and the groups are joined by global links, a minimal route between two groups takes at most one local hop to the router holding the right global link, one global hop, and one local hop in the destination group, so no minimal path exceeds three router-to-router hops regardless of system size. Short paths come cheaply, but performance for jobs spanning groups depends on the chosen p/h ratio, routing, and traffic matrix, because every inter-group transfer shares the provisioned global links.

A **torus** topology connects each node directly to its neighbors in a multidimensional grid, most commonly a 3D torus where every node links to its six adjacent peers (up/down, left/right, front/back). The design offers full local bandwidth with minimal switching hardware, because every neighbor is a single hop away. However, global communication requires traversing the diameter of the mesh ($\mathcal{O}(N^{1/3})$ hops), making latency scale poorly with cluster size. Google adopted this architecture for its Tensor Processing Unit (TPU) pods because the collectives that dominate its training workloads can be scheduled as rings along each torus dimension, a nearest-neighbor pattern that maps naturally onto the physical grid. The limitation becomes apparent with MoE, which relies on AllToAll communication patterns. On a torus, these random permutations can congest the limited $\text{BW}_{\text{bisect}}$ of the mesh and degrade performance relative to a non-blocking switch fabric.

The trade-off becomes concrete for the 4,096-endpoint deployment that the three-tier fat-tree reached with four pods. Arranged as a $16 \times 16 \times 16$ torus with wraparound links, the same endpoints need no external switching stages, but only 512 links cross the bisection, against 2,048 in the non-blocking fat-tree. With 50 GB/s per link and direction, the torus offers 25.6 TB/s across the cut against the fat-tree's 102.4 TB/s, a 4× gap, and its worst-case path crosses 24 neighbor hops against the fat-tree's five switch traversals. Because a cubic torus's cut grows only as $N^{2/3}$ while its endpoint count grows as N, that capacity gap widens at fixed link rate. Whether the gap matters depends on the traffic. A ring AllReduce scheduled along each torus dimension moves data only between neighbors and combines contributions before forwarding them, so it leans little on the narrow cut. An MoE AllToAll or an embedding exchange instead sends a large share of its traffic between distant endpoints and drives it straight into the cut, with the exact pressure set by placement and message sizes. The collective schedule and traffic matrix determine whether the torus's lower cross-sectional capacity limits completion time.

At the scale of the 1,024-GPU reference cluster, the four families range in cut capacity from 25.6 TB/s in the non-blocking fat-tree down to 6.4 TB/s in a 3D torus, while an assumed interconnect cost runs from \$1.5/Gb/s for the switchless torus to \$4/Gb/s for the tapered dragonfly (figure 0.39). The cheapest capacity is also the least capacity, which is the trade every topology decision prices.

[8] **Dragonfly topology**: Introduced by Kim et al. (2008) at ISCA 2008, the dragonfly uses high-radix routers grouped into fully connected "super-nodes." For systems with at least 16,000 terminals, the architecture achieves a 52 percent network-cost reduction relative to a folded Clos (the fat-tree of section 6) of equivalent bandwidth, though global optical link oversubscription can create AllToAll bottlenecks during MoE token routing.

The dragonfly's assumed cost per Gb/s is the highest here because its savings come from replacing long optical runs and switch tiers at large scale, which Kim et al. (2008) reports for systems of at least 16,000 terminals; at 1,024 GPUs it has few such runs to replace. Radix, endpoint count, link speed, routing mechanisms, and equipment pricing all shift these trade-offs; the topology family alone dictates neither raw cross-sectional capacity nor operational capital cost.

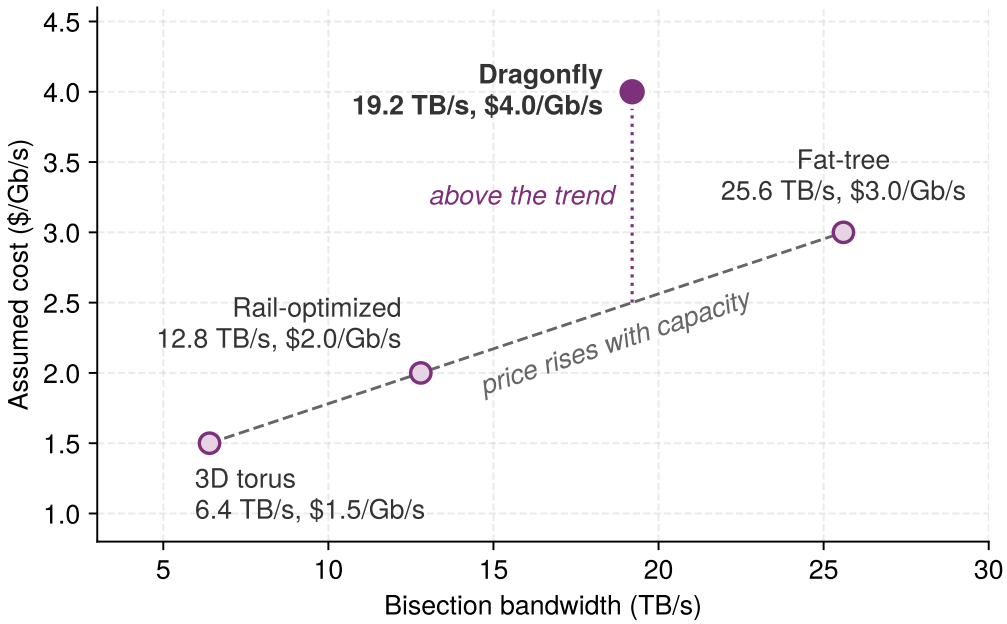


Figure 0.39: An illustrative bandwidth-cost scenario for ML network topologies: BW_{bisect} (TB/s, horizontal axis) against assumed cost per Gb/s (vertical axis) for four topology configurations on a 1,024-GPU cluster: fat-tree (25.6 TB/s, $3/Gb/s), dragonfly with tapered global links (19.2 TB/s, $4), rail-optimized with a 2:1 bridging spine (12.8 TB/s, $2), and a 3D torus (6.4 TB/s, $1.5). The bandwidths follow from the stated structures at one link rate; the costs are scenario inputs that illustrate the comparison method rather than universal properties of each topology family.

The topology examples above considered one traffic pattern at a time. In practice, clusters serve multiple workloads with different communication patterns, and topology selection must balance their competing demands.

Checkpoint 3.4: Topology selection for your workload

The choice of network topology dictates the upper bound of training efficiency. Warm up by matching each single-workload pattern to its ideal topology, then design a fabric that must serve several at once.

Single-workload picks

- ☐ **AllReduce bandwidth**: select the topology that maximizes BW_{bisect} for a standard data-parallel job dominated by AllReduce.
- ☐ **MoE traffic**: select the topology that best sustains a mixture-of-experts model's AllToAll-dominant, bursty communication, in which any rank may send to any other.
- ☐ **Neighbor locality**: select the topology that best fits a ring AllReduce scheduled along each dimension of the machine, where every transfer goes to a physical neighbor.

Designing for a mixed cluster

You are designing the network for a new ML cluster that will run two primary workloads: (1) training a 175B-parameter language model using 3D parallelism (tensor, pipeline, and

data parallelism), and (2) serving a mixture-of-experts model that relies heavily on AllToAll communication to route tokens to the correct experts.

- ☐ **Training topology**: select the topology (fat-tree, rail-optimized, or hybrid) that best matches tensor parallelism within groups of 8 GPUs and data parallelism across all nodes, then justify the choice.
- ☐ **MoE topology**: revise the topology choice for unpredictable AllToAll traffic where any GPU may need to communicate with any other GPU.
- ☐ **Oversubscription risk**: identify which workload suffers more under 2:1 spine-layer oversubscription and propose a scheduling strategy to mitigate the impact.

Topology provides the structural capacity for the cluster of 1,024 GPUs to communicate, but structure alone does not guarantee performance. When the 1,024 GPUs synchronize contributions to the model's 350 GB gradient state, that theoretical capacity collides with the reality of **fabric behavior**: congestion control and routing dynamics determine whether this traffic flows smoothly or gridlocks under the strict synchronization of the BSP model.

Level 4 Fabric Behavior, Congestion, and Routing

A collective can finish late even when the topology provides full BW_{bisect}. Levels 1 through 3 determine how long a transfer takes on an unloaded path; fabric behavior determines how much longer it takes once the job's own synchronized traffic loads that path. Competing flows can concentrate on one output path, and the BSP barrier introduced in section 11 exposes any delay that extends the last required transfer. The relevant paths are those used by the participating workers; a congested link elsewhere in the fleet need not affect the job. In the Fleet Law (equation 0.3), measured transfer durations contribute to $T_{comm}(N)$, while residual waiting at synchronization contributes to $T_{sync}(N)$, the point where the communication axis of C^3 hands its cost to the coordination axis. A timeline must assign each interval consistently so the same congestion delay is not counted twice.

The p99 tail latency introduced with the BSP barrier helps expose delays that an average hides, but a particular barrier waits for its last required participant, not for a percentile. Evaluating a fabric therefore requires both transfer-time distributions and the collective completion times they produce under load.

Priority flow control (PFC)

The BSP weakest-link property means that even a single dropped packet can trigger a retransmission timeout that stalls the global barrier for milliseconds, a delay that can rival the entire communication phase of a training step. PFC-based RoCEv2 fabrics prevent the drop in the first place by running PFC, the pause mechanism introduced with the RDMA stacks (section 5), in lossless mode, so that upstream senders stop before any buffer saturates (Guo et al. 2016; Gangidi et al. 2024).

Definition 3.7: Priority flow control


Priority flow control (PFC) is a link-layer mechanism used by RoCEv2 ML cluster fabrics to prevent switch buffer overflow by sending PAUSE frames to an upstream sender when a port's queue depth crosses a configured threshold, throttling injection on a per-priority basis without dropping packets.

1. **Significance**: In PFC-based RoCEv2 deployments, PFC is the foundation for a lossless Ethernet service. A PFC PAUSE frame must reach the upstream sender before the buffer overflows, so each pause threshold must leave headroom for the data still in flight during roughly one link round trip.
2. **Distinction**: Unlike standard IEEE 802.3 flow control, which pauses all traffic classes on a link, PFC operates per priority class, allowing latency-sensitive control messages to continue flowing while only pausing the congested gradient data queue.

3. **Common pitfall**: A frequent misconception is that PFC solves congestion. It transforms packet loss into congestion spreading. PFC itself places no bound on how far PAUSE frames propagate, so a single faulty transceiver can pause traffic far from its own link unless a watchdog intervenes.

The danger of PFC lies in its cascading nature. When a switch port's buffer fills, it sends a PAUSE frame upstream, which can move congestion into the upstream switch and trigger another PAUSE frame. A slow receiver, routing hot spot, or true fan-in burst can therefore pause links unrelated to the original queue. This behavior, known as **congestion spreading**, is the primary operational risk of PFC-based lossless Ethernet, and the flows it stalls without ever touching the congested queue are called **victim flows**. Fan-in is one trigger, but it is not intrinsic to every collective. A bandwidth-optimal ring exchanges data point to point, although multiple ring flows can still collide at a shared egress or an oversubscribed cut and create a hot spot without a single aggregation receiver (section 13).

Lossless fabric hazards and watchdog recovery



One congested port's PAUSE frames can freeze unrelated flows.

While priority flow control provides the illusion of a lossless physical layer, relying on link-layer backpressure introduces structural failure modes that do not exist in loss-tolerant packet-switched networks. When switch queues cannot drop packets to relieve congestion, pressure propagates backward through the network graph, creating two distinct hyperscale failure modes: buffer-dependency deadlocks and PFC storms.

Definition 3.8: Cyclic buffer dependency deadlock

Cyclic buffer dependency deadlock is a permanent distributed lockup in a lossless network, whether its backpressure uses PFC PAUSE frames or InfiniBand credits, where a set of switch port queues form a closed dependency cycle, each holding packets destined for the next queue while simultaneously paused by backpressure from that same queue.

1. **Significance**: A single such deadlock permanently halts traffic across all participating ports and upstream links, requiring manual intervention or watchdog timeouts that discard packets to recover. InfiniBand fabrics prevent it through deadlock-free routing and virtual-lane assignment; this section develops the PFC case.
2. **Distinction**: Unlike a PFC storm (which is a transient cascade of backpressure triggered by a slow-draining endpoint), a buffer-dependency deadlock is a static, self-sustaining topological cycle that cannot resolve itself even after traffic injection stops.
3. **Common pitfall**: Assuming multi-stage Clos (fat-tree) fabrics are inherently immune to deadlocks. Dynamic multipath routing, link failures, and address resolution flooding can introduce cyclic forwarding dependencies across switch tiers.

The graph mechanics of buffer-dependency deadlocks

In a lossless network, a switch cannot forward a packet to downstream buffer b_j if b_j is full; instead, it holds the packet in upstream buffer b_i and awaits credit or pause clearance. A directed buffer dependency graph $G = (V, E)$ formalizes this relationship, where each vertex $b_k \in V$ represents a packet buffer or virtual lane queue at a switch port, and a directed edge $(b_i, b_j) \in E$ indicates that a packet currently occupying buffer b_i requires buffer b_j along its routing path to make forward progress.

A directed cycle in the buffer dependency graph is a necessary condition for a cyclic buffer dependency deadlock (definition 3.8), but a cycle alone does not establish that progress has stopped. The cyclic dependency in equation 0.9 becomes a deadlock when the occupied buffers cannot drain and every participant waits for its successor:

$$b_1 \to b_2 \to \ldots \to b_k \to b_1 \tag{0.9}$$

When each buffer in the cycle fills beyond its configured pause threshold, each port asserts a PFC PAUSE frame to its predecessor. Because no buffer can advance a packet into a paused successor, no buffer can drain, and no port can de-assert its PAUSE signal. The entire cycle freezes permanently. Figure 0.40 models this mutual protocol interlock across a four-switch ring whose queues (b_1 through b_4) are completely full. Tracing the ring reveals an intractable counter-rotational deadlock: while solid gray arrows trace packet forwarding dependencies advancing clockwise ($b_1 \to b_2 \to b_3 \to b_4 \to b_1$), dashed red PAUSE frames propagate counterclockwise. Each full queue pauses its upstream predecessor while waiting for its downstream successor to drain, permanently freezing all four queues until an external watchdog intervenes to drop frames.

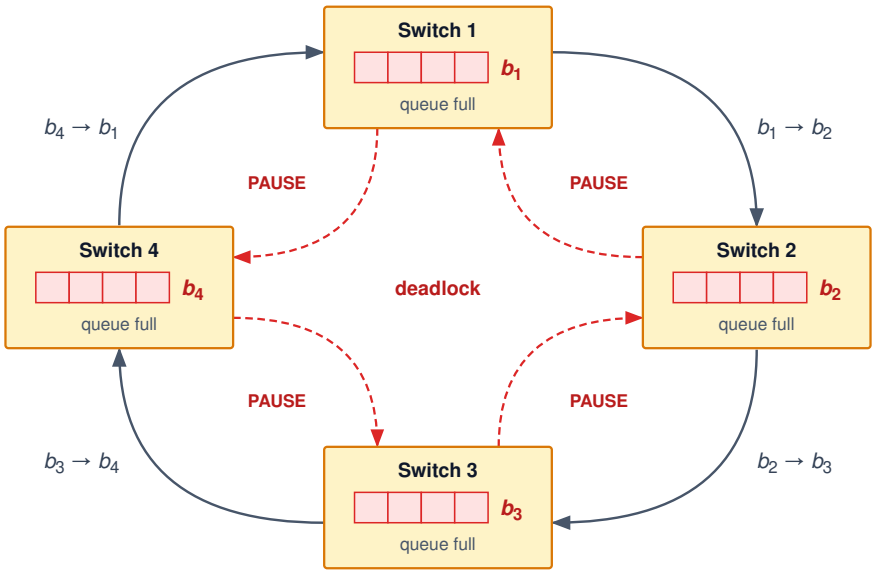


Figure 0.40: A PFC deadlock from a cyclic buffer dependency: Four switch queues form the cycle of equation 0.9. Follow the solid arrows clockwise: each full buffer holds packets that need space in the next. The dashed PAUSE frames run counterclockwise, so each full queue pauses its upstream predecessor while awaiting space in its downstream successor, and no queue can drain until a watchdog drops packets.

Routing changes and flooding can create the dependencies needed for deadlock. During link failure or Border Gateway Protocol (BGP) convergence, inconsistent forwarding tables can create transient loops. A lossy IP network eventually discards a looping packet when its time-to-live expires; a lossless class has no such release, so looping traffic can fill the buffers along the loop and hold them. If traffic occupies a cycle of mutually blocked queues, backpressure can prevent progress until recovery breaks the dependency. Multicast or broadcast replication can also fill queues whose dependencies intersect, while cross-connects and asymmetric failover paths can introduce cycles absent from the intended hierarchical route. None of these conditions alone proves a deadlock; the occupied buffers and pause states must form the closed waiting cycle described by the model.

Microsoft's production RoCE deployment encountered the flooding trigger directly (war story 3.1).

War Story 3.1: Microsoft's PFC deadlock (2016)

Context: A team led by Chuanxiong Guo at Microsoft Research deployed RoCEv2 across Microsoft's data centers, a fleet operating at the scale of tens of thousands of servers, to support latency-sensitive services. Their design provided a lossless fabric with PFC, and the team

developed a Differentiated Services Code Point (DSCP)-based PFC mechanism to extend the deployment beyond virtual local area network (VLAN) boundaries (Guo et al. 2016).

Mechanism: PFC interacted with Ethernet flooding to create a cyclic buffer dependency. A dead server with an incomplete mapping between an IP address and a media-access-control address caused upstream switches to flood lossless packets to every port; PFC PAUSE frames then propagated upstream in response to the flooded traffic, forming a closed loop of paused buffers.

Impact: Lossless traffic through the switches in the cycle stopped entirely and stayed stopped, because no buffer in the dependency loop could drain without outside intervention.

Fix: Microsoft blocked broadcast and multicast traffic from entering lossless traffic classes, and dropped lossless packets when the corresponding Address Resolution Protocol (ARP) entry was incomplete rather than falling back to flooding.

Systems lesson: PFC backpressure is a structural vulnerability of lossless Ethernet at hyperscale. RoCE fabrics require packet-class discipline, PFC pause telemetry, and hardware-level safeguards because a mechanism designed to avoid packet loss can itself become the failure mode. ML training fabrics built on RoCE inherit this risk directly. A single incomplete ARP entry can freeze the lossless class that carries a multi-thousand-GPU training run's gradients, with the cluster appearing healthy while no gradient flows between workers.

PFC storms and victim flows

In contrast to a static topological cycle, a **PFC storm** is a dynamic, runaway amplification phenomenon. A single "slow drainer" (an accelerator stalled by memory bus saturation, operating system preemption, or a degraded transceiver with elevated bit error rates) fails to consume packets at wire speed.

The attached ToR switch queue fills and sends a PAUSE frame to the sender. Because multi-port switches aggregate traffic from many sources across shared packet buffers, the paused queue blocks buffer allocation for unrelated packets (head-of-line blocking). The spine switches feeding that ToR then fill their buffers and pause the other leaf switches that send through them. Each additional tier widens the set of paused links until traffic between node pairs that never communicated with the stalled worker also stops. These victim flows turn one slow endpoint into a job-wide barrier delay, because every data-parallel worker whose path crosses a paused spine port now arrives late at the barrier.

Because a degraded transceiver is one such slow drainer, a component-exposure calculation shows how often a cluster should expect at least one. It does not by itself estimate the probability of a PFC storm.



Napkin Math 3.5: Probability of at least one transceiver degradation

Problem: A 4096-GPU RoCE cluster, larger than the reference cluster, is in operation. If the probability that a given transceiver begins degrading on a given day is 0.001 percent, what is the chance that at least one transceiver degrades on a given day?

Math: Assume independent transceiver-degradation events with the same per-device probability.

1. **Total exposure**: 4096 × 3 link tiers = 12,288 links, or 24,576 transceivers.
2. **Probability of zero transceiver degradations**: $\Pr(\text{no degradation}) = (1 - 0.00001)^{24{,}576} \approx 0.782$.
3. **Probability of at least one degradation**: $\Pr(\text{at least one degradation}) = 1 - 0.782 = \mathbf{0.218}$ (about 21.8 percent).

Systems insight: Under these assumptions, a large RoCE cluster has a 21.8 percent daily chance of at least one degraded transceiver. This result motivates hardware telemetry and auto-

mated remediation, but estimating fabric-wide freeze risk additionally requires the conditional probability that a degradation triggers and propagates a PFC storm.

Watchdog recovery and the lossy alternative

Switches can use **PFC watchdog timers** to detect prolonged pause states and trigger recovery without a full reboot. The configured threshold T_{watchdog} must fit the deployment's pause and recovery budgets; a range such as 50–200 ms is a configuration example, not a universal requirement. Exceeding it indicates stalled progress, not proof of a cyclic deadlock. Depending on the implementation, mitigation can disable pause handling or discard affected traffic so blocked queues can drain. The transport must then recover any lost data, with the completion penalty determined by retransmission behavior, outstanding traffic, and the collective's dependencies. On an RNIC with Go-Back-N-style recovery (section 6), each discarded packet also costs the in-flight window behind it, so breaking a pause converts a stalled queue into a retransmission tail that the waiting collective absorbs.

This systemic brittleness is driving hyperscale operators toward next-generation architectures such as the Ultra Ethernet Consortium (UEC) (Ultra Ethernet Consortium 2025), detailed in section 13, and loss-tolerant RDMA designs (Mittal et al. 2018). Designs that combine packet spraying with congestion control and selective retransmission can operate without link-layer PFC. Removing PFC removes its pause-based deadlocks and storms, but endpoint recovery must still bound the completion-time penalty of congestion and loss.

End-to-end congestion control with DCQCN and HPCC

End-to-end congestion control adjusts injection rates before queues reach their pause or overflow thresholds. For a BSP workload with a completion-time target, this is a *latency requirement* rather than an *optional throughput optimization*. Delaying a required transfer can extend the synchronization boundary, so the controller must balance delivered throughput against queueing and recovery tails.

The first widely deployed solution, **DCQCN**,[9] operates as a reactive feedback loop using ECN (Zhu et al. 2015). When a switch's queue depth exceeds a configured threshold, it marks the ECN bit in the packet header. The receiver echoes this mark back to the sender via a congestion notification packet (CNP), prompting the sender to reduce its injection rate using a multiplicative-decrease algorithm. DCQCN is widely supported, but production AI collectives expose a tuning problem: ECN thresholds and NIC firmware behavior can trade off PFC avoidance, throughput, visibility, and tail latency rather than offering one stable optimum (Gangidi et al. 2024).

HPCC[10] uses in-network telemetry (INT) to give the sender more information about path load (Li et al. 2019). Switch measurements of queue occupancy and transmitted traffic let the controller estimate an appropriate injection rate rather than react only to a binary congestion mark. That information still arrives after a feedback delay, so the controller must account for changing load and avoid overreaction. The evaluated design reduces queue buildup and tail latency, but requires switch telemetry support and compatible endpoint processing. DCQCN needs less detailed switch feedback, trading that simpler deployment requirement against a different tuning problem.

Adaptive routing

Static routing protocols like ECMP[11] distribute traffic by hashing flow headers to fixed paths. This approach works well for many small flows but can create persistent collisions among the small number of elephant flows typical of ML training. Consider a scenario with 4 equal-cost paths and 8 large gradient flows. An even distribution would place 2 flows on each link. Static hashing can instead place 4 flows on one link while another sits idle. In a synchronized training step, the overloaded link then determines completion time and can halve useful bandwidth in this scenario.

Adaptive routing mitigates this problem by allowing switches to select among eligible output paths using congestion information rather than only a static hash. The implementation is protocol- and device-dependent. Packet-level spraying[12] can send packets of one connection over different paths, so the receiver may observe reordering. Compatible endpoint support must accept out-of-order placement or restore the transport's required ordering; the presence of InfiniBand alone does not guarantee arbitrary spraying across every path.

[9] **DCQCN (Data Center Quantized Congestion Notification)**: Introduced by Zhu et al. (2015) (Microsoft and Mellanox) at SIGCOMM 2015 for large-scale RDMA fabrics, its binary ECN/CNP feedback loop is simpler to deploy than telemetry-rich schemes. However, it creates a delicate tuning surface for training collectives: Meta's 2024 RoCE deployment showed that aggressive ECN marking reduces PFC pauses but degrades collective completion time (Gangidi et al. 2024).

[10] **HPCC (High Precision Congestion Control)**: Introduced by Li et al. (2019) (Alibaba) at SIGCOMM 2019, HPCC replaces binary ECN with per-packet in-network telemetry (INT), giving senders path-load measurements for adjusting injection rates while accounting for feedback delay and changing demand. The systems trade-off is hardware dependency: it requires programmable switch ASICs capable of appending INT metadata at line rate.

[11] **ECMP (equal-cost multi-path)**: ECMP selects a path by hashing on the 5-tuple (source/destination IP, source/destination port, protocol), which means the same flow always takes the same path. This determinism is a feature for packet ordering but a liability for ML. Because a single AllReduce ring produces a small number of persistent flows, hash collisions are not transient statistical events but permanent hot spots that persist for the entire training run.

[12] **Packet spraying**: Unlike standard Ethernet (which hashes flows to single paths to avoid reordering), packet spraying sends individual packets of a single flow across multiple paths. This can improve BW_{bisect} for AllReduce elephant flows when the transport can tolerate or repair reordering. The Ultra Ethernet Consortium (UEC) specification design explicitly includes multi-path packet spraying and flexible ordering to reduce the ECMP collision problem for AI/HPC traffic (Ultra Ethernet Consortium 2025).

Ethernet fabrics can also employ **flowlet switching**, changing a flow's path between bursts separated by a gap large enough to preserve packet order across the candidate paths. Its usefulness depends on the available gaps and path delays. MoE expert exchanges illustrate the demand for path diversity. A dense exchange among 64 expert-parallel ranks contains at most $64(64-1) = 4{,}032$ directed remote rank pairs after excluding self-transfers; active traffic depends on expert placement and token-routing sparsity. Static-hash collisions can concentrate that traffic, while adaptive routing can improve use of the provisioned BW_{bisect}. Archetype B (DLRM at Scale) can create similar exchanges when batches of embedding requests and results move among table shards. The batch and shard placement determine the traffic matrix, rather than every individual lookup requiring a global exchange.

The incast problem in ML

Congestion control and adaptive routing manage flows that traverse the interior of the fabric. A different failure mode occurs at the edge, where the traffic pattern itself overwhelms a single port regardless of how much capacity the fabric interior provides.

Definition 3.9: Incast

Incast is a many-to-one ML cluster traffic pattern in which a large number of senders simultaneously transmit data to a single receiver port, concentrating line-rate traffic from multiple sources into a single switch queue and potentially overflowing the buffer if the burst outlasts available buffering and control response, even when the rest of the fabric is uncongested.

1. **Significance**: Flat aggregation, synchronized storage reads, or other fan-in phases can direct many senders toward one receiver. The deliberately worst-case scenario here assumes a RoCE fabric whose ports all run at 400 Gb/s. In it, 256 senders each transmit at 50 GB/s toward one switch egress, producing 12.8 TB/s of offered load against a 400 Gb/s port. A 32 MB buffer then overflows in about 2.5 µs under the stated assumptions, after which the switch either drops packets or, in a PFC deployment, pauses its upstream neighbors. The example is a stress bound, not the traffic matrix of a ring AllReduce.
2. **Distinction**: Unlike general congestion (which occurs on shared internal links when aggregate traffic exceeds link capacity), incast is an endpoint bottleneck: it occurs even if every internal spine and leaf link is completely uncongested, because the bottleneck is the single destination port, not the fabric interior.
3. **Common pitfall**: Incast is not necessarily rare or unpredictable. Training jobs create it on a schedule, whenever many GPUs read dataset shards from or write checkpoints to the same storage node, and in the aggregation step of a tree or hierarchical reduction, where several ranks send partial sums to one parent. A gradient ring is different; its point-to-point flows can still collide at a shared egress, but that is a hot spot rather than many-to-one incast. The severity depends on the collective algorithm, topology, routing, and oversubscription, so it must be measured and mitigated rather than treated as an edge case.

Figure 0.41 contrasts 12.8 TB/s of offered traffic from 256 senders with a 400 Gb/s (50 GB/s) egress. Each sender injects at 50 GB/s in this worst-case scenario. The buffer fills over a finite interval; control feedback can reduce arrivals, drops can discard excess traffic, or backpressure can move the queueing upstream. Whether that pressure spreads depends on shared queues and the paths carrying the traffic. Let the aggregate arrival rate to one egress be λ_{arr}, the egress service rate be μ, and the instantaneous queue occupancy be $Q(t)$. While a burst persists and $\lambda_{arr} > \mu$, the queue grows at the net rate

$$Q(t) = \min(Q_{max},\, Q(0) + (\lambda_{arr} - \mu)t)\,,$$

where Q_{max} is the finite buffer capacity. The ratio $\rho_{serv} = \lambda_{arr}/\mu$ distinguishes a drainable workload from sustained overload: for $\rho_{serv} < 1$, idle intervals can drain the queue; as long-run ρ_{serv} approaches one, less slack remains to absorb bursts; and for $\rho_{serv} > 1$, occupancy must reach a control threshold

or the buffer limit if the overload persists. This is a packet queue, distinct from the request queues of an inference server. Serialization and propagation set the unloaded path latency, whereas queued bytes add approximately Q/μ of waiting time.

⇄ **Contrast:** Request queues, whose arrival and service rates set serving latency rather than switch buffer occupancy, are developed in section 4.

In the deliberately worst-case incast above, ρ_{serv} is 256×, so the 32 MB buffer fills in about 2.5 µs. Once full, that buffer represents 640 µs of egress waiting time. By contrast, the bandwidth-delay product for the 400 Gb/s egress and an illustrative 5 µs feedback round trip is only 250 KB: it measures data in flight on the path, not the buffering needed to absorb an arbitrary fan-in burst. ECN must mark early enough for feedback to arrive before exhaustion; PFC can prevent a drop, but its backpressure can spread congestion. A larger buffer extends the reaction window at the cost of a larger tail-latency bound.

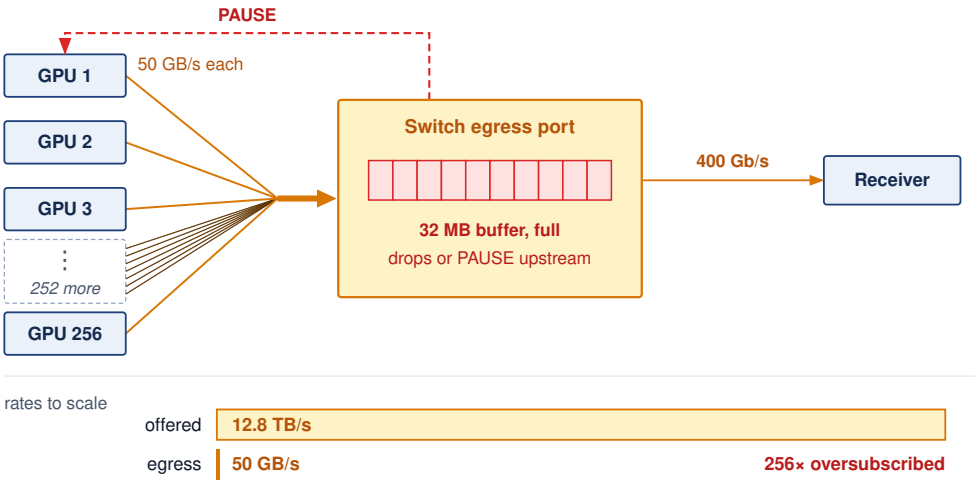


Figure 0.41: A true incast burst: This deliberately worst-case fan-in scenario sends 256 sources at 50 GB/s toward one 400 Gb/s (50 GB/s) egress with a 32 MB buffer. The 12.8 TB/s offered load oversubscribes the destination egress by 256×. Flat aggregation or synchronized reads can create this pattern; bandwidth-optimal ring AllReduce does not, because each rank exchanges point-to-point chunks.

Synchronized ML traffic is susceptible to both true fan-in and shared-egress hot spots. When a layer finishes backward computation, many ranks can inject traffic at once, and flat or hierarchical aggregation phases can create true fan-in. Production clusters mitigate both cases along three complementary dimensions:

1. **Time.** Layer-staggering triggers each gradient bucket's AllReduce as soon as backpropagation produces it. Final-layer gradients reduce while earlier layers are still computing, so communication is spread across the backward pass instead of released as one synchronized burst. The same staggering is communication-computation overlap, so it also hides transfer time behind the backward computation that remains.
2. **Space.** Collective algorithm selection bounds fan-in at individual switch ports. Hierarchical and rail-local reductions aggregate gradients in stages so that no single port must absorb all senders at once, and topology-aware placement keeps concurrent ring flows off oversubscribed ports.
3. **Priority.** Quality of service (QoS) classification tags gradient traffic with the highest service class to reduce interference from background storage or management traffic; shared links, buffers, and arbitration still constrain isolation.

↪ How far layer-staggered overlap hides gradient traffic, and how much communication it still leaves exposed, is developed in section 10.

These mitigations spread the burst in time, space, and priority, but they do not eliminate congestion or tail latency. The question becomes how to build end-to-end clusters that perform despite these realities.

Level 5 Cluster Design and Case Studies

The final level of the stack is cluster design, where wires, transport, topology, and congestion control combine into a coherent system. The goal of cluster design is to provide an end-to-end gradient bus that makes thousands of distributed GPUs feel like a single machine. At this level, the abstraction layers collapse into concrete engineering decisions: which cables to buy, how to wire the racks, which protocol to deploy, and how to validate that the resulting fabric delivers the bandwidth the training job expects. Two representative large-scale architectures, one built on InfiniBand and one on Ethernet, illuminate the trade-offs that define ML infrastructure (NVIDIA 2023; Meta Engineering 2024; Gangidi et al. 2024).

The GPU-to-GPU "gradient bus"

In a well-designed cluster, the network fabric acts as a scheduler-aware extension of the system bus, not a passive pipe. The ~9× per-direction cliff between NVLink and one external port, measured at the start of this chapter, is the gap the cluster must hide. Communication-computation overlap, which the Fleet Law credits as T_{overlap}, is the first mechanism for hiding it. Because gradients for the final layers are computed first, the system can launch their AllReduce while the GPUs continue computing gradients for earlier layers. If the backward pass requires 500 ms of computation and the AllReduce takes 300 ms, ideal overlap could hide the communication cost behind computation, reducing the exposed overhead to $\max(0, 300 - 500) = 0$. In practice, dependency chains and resource contention limit overlap, leaving a **last-mile problem**: gradients computed near the end of backpropagation have little subsequent computation behind which to hide their transfer time.

Placement is the second mechanism, because it decides which communication crosses each boundary. The placement from the opening of this chapter, tensor parallelism inside the NVLink domain with pipeline stages and data-parallel replicas spanning nodes, becomes a wiring rule at cluster scale, because each fabric tier must be provisioned for the traffic placed on it. The links between nodes must meet the pipeline's activation-transfer budget, which physical adjacency alone does not guarantee. The full fabric carries the data-parallel exchanges, which gradient accumulation makes less frequent and overlap partly hides. Production designs therefore differ mainly in how they provision that outermost tier, as the two that follow show.

NVIDIA DGX SuperPOD architecture

The NVIDIA DGX SuperPOD architecture connects DGX H100 nodes using an NDR InfiniBand network, serving as a concrete implementation of the gradient bus concept (NVIDIA 2023). Each node acts as a dense compute island, with eight H100 GPUs connected via NVSwitch to provide 900 GB/s of internal bandwidth. Externally, each GPU pairs with a ConnectX-7 NIC delivering 400 Gb/s of injection bandwidth. Across a standard scalable unit of 32 nodes (256 GPUs), this yields an aggregate injection bandwidth of 12.8 TB/s (256×50 GB/s), the rate the scalable unit can offer the fabric when every GPU transmits at once.

This architecture explicitly instantiates the five-level network model. At Level 1, it standardizes on 400 Gb/s NDR links, with media chosen by reach between each node and its leaf and between leaf and spine. At Level 2, it relies on InfiniBand's native credit-based flow control to guarantee a lossless medium without the fragility of Ethernet PFC. Level 3 implements a rail-optimized fat-tree. GPU rails are aligned across a scalable unit so same-rail traffic stays close and cross-rail traffic traverses the spine layer; the rack-level ToR allocation used earlier to illustrate switch radix is the simpler alternative this wiring replaces. At Level 4, hardware-based adaptive routing can select among spine paths to improve bisection behavior for cross-rank communication. At Level 5, the design is modular: multiple SuperPOD scalable units connect through additional switching to form larger clusters (NVIDIA 2023). For the 175B-parameter model, the physical infrastructure would consist of four SuperPOD scalable units wired together, allowing 1,024 GPUs to function as a single synchronous instrument.

Meta Grand Teton platform

Meta disclosed two Grand Teton-based 24,576-H100 clusters: one using RoCE over an Arista/OCP Ethernet fabric and one using NVIDIA Quantum-2 InfiniBand, both with 400 Gb/s endpoints. Meta

used both for Llama 3 training and reported ongoing Llama 3 training on the RoCE cluster (Meta Engineering 2024). The primary motivation for Ethernet is operational scale and supply chain resilience: by using Ethernet, Meta can source switches from multiple vendors and use the same optical infrastructure and management tooling shared by their front-end serving fleet, avoiding the operational silo of a dedicated InfiniBand island.

Meta's RoCE study shows how Level 4 choices affect the complete fabric. It describes PFC watchdogs for long-duration pause events, iterative routing designs beyond plain ECMP, future-oriented flowlet switching experiments, and a 400G deployment in which DCQCN tuning proved difficult enough that Meta proceeded without DCQCN while relying on PFC plus higher-layer collective controls (Gangidi et al. 2024). The lesson is to validate the combination of endpoint behavior, routing, and flow control under the intended collective traffic. Large-transfer throughput alone does not establish small-message latency or recovery tails, and those results cannot be inferred from the Ethernet or InfiniBand label.

> Systems Perspective 3.3: InfiniBand vs. RoCE: The industry verdict
>
> The InfiniBand and RoCE deployments demonstrate different ways to meet a workload's communication contract. Their equipment, routing, recovery mechanisms, and operational requirements must be compared as complete configurations. InfiniBand's native credit-based flow control can simplify lossless configuration and tighten small-message tails, while RoCE inherits Ethernet's multi-vendor switching and shared operational tooling at the cost of tuning buffering, PFC, ECN, and routing policy. For *training runs*, frequent small exchanges can expose startup latency even when a full step lasts seconds. For *inference serving*, the importance of fabric latency depends on model partitioning, request shape, and service-level objectives (SLOs). In both cases, delivered performance and operating cost decide the trade-off.

These case studies close the five-level stack by showing how the physical wire, transport protocol, topology, and congestion controls become one production fabric. The remaining operational problem is not how to build a single fast cluster, but how to share that expensive substrate across teams and workloads without sacrificing the predictable performance that training demands.

Network Virtualization

Sharing a cluster can recover capacity that a single workload leaves unused. In the scenario of a $300 million system with 30 percent unused capacity, the idle fraction corresponds to $90 million of the equipment budget. Network virtualization must make sharing compatible with bandwidth allocations, latency targets, and access isolation. These requirements interact because tenants still share physical links and buffers. A proposed policy might reserve 80 percent of the cluster's BW_{bisect} for training and allocate the remaining 20 percent to inference and preprocessing. Enforcing that policy requires admission control and compatible scheduling along the relevant paths; a virtual NIC or separate traffic class alone does not guarantee the end-to-end share.

Hardware NIC virtualization with SR-IOV

Cloud providers expose NIC resources to virtualized GPU instances through **single-root I/O virtualization (SR-IOV)**, a standard that allows a physical NIC to present multiple **virtual functions (VFs)**. Each VF exposes its own hardware queues, doorbell registers, and DMA mappings, which software can assign to a workload. A directly assigned VF can remove host software mediation from the active DMA path, while drivers and virtualization software still configure access and manage the device. Performance depends on the NIC, I/O placement, and competing traffic. Because VFs share physical resources, placement logic must reserve NIC capacity and QoS policy alongside GPUs rather than treat the network as an unbounded pool.

However, hardware-level isolation still needs explicit bandwidth policy. SR-IOV exposes multiple VFs that share the NIC's physical resources; administrators can add per-VF or per-group QoS policies to cap or guarantee bandwidth, such as assigning eight VFs 50 Gb/s each on a 400 Gb/s NIC. For the 175B-parameter model training on a multi-tenant cluster, that configured partitioning can prevent a neighboring tenant from stealing bandwidth, but it also enforces a hard ceiling on

peak throughput. The training job must be architected to operate within this slice, as no amount of software optimization can burst beyond the configured VF limit.

Traffic isolation and quality of service

Consider a worst-case contention scenario on a shared cluster: the 175B model is midway through a gradient AllReduce when a neighboring job initiates a massive checkpoint save. Without strict isolation, a bursty 100 GB write, which occupies a 400 Gb/s port for 2 s at full line rate, can claim a large share of the shared spine links for that interval and stretch every AllReduce whose traffic crosses them. To prevent this noisy-neighbor effect, high-performance fabrics rely on **quality of service (QoS)** mechanisms that enforce fairness at the packet level.

InfiniBand virtual lanes (VLs) separate credit and buffer state within a physical link; the architecture allows up to 16 lanes per link, one of them reserved for subnet management (InfiniBand Trade Association 2000). Ethernet/RoCE uses **traffic class** mappings and queue policies, whose supported counts and behavior depend on the device. In InfiniBand, exhausted credits for a storage lane need not block a gradient lane that has credits available, but both still share link bandwidth and arbitration. On Ethernet, **enhanced transmission selection** allocates service among traffic classes. Devices may also partition buffer and forwarding resources into **network slices**. These mechanisms reduce interference when classification, resource allocation, and scheduling agree across the path; shared priorities or buffers can still couple tenants.

Virtualization solves the sharing problem but makes performance diagnosis harder. When a training job slows down on a multi-tenant cluster, the cause could be a physical link degradation, a noisy neighbor exceeding its bandwidth allocation, or a misconfigured QoS policy. Systematic monitoring is essential to distinguish these cases.

Monitoring and Debugging

Network performance problems in ML clusters are insidious because they manifest as **silent waste** rather than explicit failures. A degraded transceiver causing a 10 percent reduction in effective bandwidth might slow each training iteration by only 2–3 percent. The slowdown is small because the lost bandwidth stretches only the exposed communication share of the step (the 30 percent assumed in the oversubscription estimate, less whatever overlap hides), and stretches it by roughly the inverse of the bandwidth that remains. A drift that small is easily masked by the natural variance of checkpointing or data loading. Over a 30-day training run on 1,024 GPUs, this invisible drag accumulates to roughly 15,000–22,000 wasted GPU-hours, burning about $45,000–$66,000 at $3/GPU-hour without triggering a single alarm. Traditional IT monitoring tools like SNMP or ICMP ping measure connectivity, not the sustained throughput required by RDMA. Effective observability requires a three-layer approach: **physical monitoring** (FEC errors, signal attenuation), **transport monitoring** (PFC pause frames, retransmission rates), and **application monitoring** (NCCL algorithmic bandwidth) (Jeaugey 2017; Gangidi et al. 2024). The three layers retrace the five-level model from the top down. Application monitoring observes the collective that Level 5 integrates, transport monitoring observes the Level 2 recovery and Level 4 congestion machinery, and physical monitoring observes the Level 1 wire. Only by correlating signals across these layers can operators detect that a "slow training run" is caused by a single degraded cable in one rack.

Link-level telemetry

Hardware counters test whether the deployed path still behaves as assumed. On InfiniBand, the `perfquery` utility reads supported port counters; Ethernet/RoCE devices expose telemetry through their own management interfaces (Linux man-pages project 2026). **PortXmitData** and **PortRcvData** count data in units of four octets, so utilization calculations multiply each counter delta by four to recover bytes. **PortXmitDiscards** records transmit discards that warrant investigation against the port's traffic and recovery policy. The **SymbolErrorCounter** and **LinkDownedCounter** provide evidence of signaling errors and link-down events. Correlating those counters with link rate, lane state, and transport behavior narrows the cause; a counter alone does not identify a defective cable or transceiver.

Polling link state alongside traffic counters can reveal **silent degradation**. A link operating at HDR (200 Gb/s) rather than the expected NDR rate (400 Gb/s) can remain connected while offering

half the expected bandwidth. A link that trains with two of its four lanes active after a connector fault fails the same way: it stays up while its bandwidth is halved. Both cases are visible only when negotiated rate and lane state are compared with the deployment baseline. For 1,024 GPUs and roughly 3,000 links, the assumed 0.1 percent point-in-time degradation probability gives 3 degraded links in expectation and, under independent events, a 95 percent probability of at least one degradation. This probability measures something different from the daily figure in notebook 3.5. That notebook asks how often a new degradation begins; this one asks how many degraded links are present at any moment. Standing prevalence is roughly the onset rate times how long a degraded link stays in service, and silent degradation, by definition, stays in service until someone looks, so prevalence can far exceed what a small daily onset rate suggests. Both rates are scenario assumptions rather than measured fleet data. A job slows when an affected path limits its required traffic; fleet-wide exposure alone does not determine the job's slowdown. When the degraded link lies on a ring AllReduce's path, however, the cost reaches every participant, because each round waits for its slowest hop and the whole ring proceeds at the pace of that one link.

Bandwidth and latency validation

Validation must test the bandwidth and latency the job can use, even when counters show no visible fault. The raw NDR rate of 50 GB/s is a reference ceiling; payload throughput also depends on protocol overhead and the complete host-to-host path. Pairwise tests such as `ib_write_bw` can populate an **all-pairs bandwidth matrix**, or a sampled subset for a large fleet (linux-rdma project 2026). A low-throughput pair identifies a path to investigate. Comparing the affected pairs with routing and physical telemetry helps distinguish a shared switch or cable problem from endpoint limitations.

For latency-sensitive synchronization, `ib_write_lat` runs a ping-pong test with small RDMA writes and reports half the measured round-trip time as one-way latency. Values such as 2 µs, 5 µs, or 100 µs must be compared with a baseline for the same endpoints, message size, path, and load; they are not universal fault thresholds or evidence of a particular fallback. Application-level tests such as `nccl-tests` then exercise collective communication across the intended worker group. Point-to-point results establish a path baseline, while collective tests reveal costs from concurrent traffic and scheduling that isolated pairs cannot expose.

Systematic debugging workflow

When a training job reports lower-than-expected throughput, the diagnostic order should preserve the layer model rather than starting with cables. The following sequence moves from application symptoms toward physical causes:

1. **Check GPU utilization**: Rule out compute bottlenecks using `dcgmi` or `nvidia-smi`. High SM utilization alone does not rule out a network bottleneck, because communication kernels can also keep SMs active. Correlate utilization with the compute and collective portions of the step timeline. Low utilization does not automatically implicate the fabric, however: a starved input pipeline (data loading or storage) produces the same symptom, so confirm the data path is keeping the accelerators fed before investigating the network.
2. **Inspect NCCL logs**: Set `NCCL_DEBUG=INFO` to reveal which network transport was selected, the detected bandwidth between nodes, and any fallbacks to slower protocols.
3. **Run point-to-point tests**: Use `ib_write_bw` between specific nodes in the job. A single degraded link can bottleneck the entire ring in a ring AllReduce.
4. **Check PFC/ECN counters**: Inspect switch counters along the path. Sustained PFC activity indicates persistent congestion that should be investigated at the scheduler or routing level.
5. **Validate physical layer**: Check symbol errors and CRC counts to identify failing transceivers or cables.

The diagnostic sequence preserves the chapter's layer model: application symptoms identify the failing path, transport counters show whether congestion or fallback is involved, and physical telemetry confirms whether the wire itself is degrading.

Checkpoint 3.5: Diagnosing a training slowdown

Your 175B model training job has been running for 3 days on the 1,024-GPU reference cluster. You notice that the iteration time has gradually increased from 4.2 s to 4.8 s (a 14 percent slowdown). The GPU utilization reported by `nvidia-smi` has dropped from 92 percent to 85 percent.

- ☐ **First diagnostic**: choose the first diagnostic step, name the tool that confirms whether the bottleneck is communication-bound or compute-bound, and cite the evidence that distinguishes the two.
- ☐ **Physical layer**: identify physical-layer causes that could explain a 50 percent bandwidth drop when `ib_write_bw` finds one node pair at 24 GB/s instead of the expected 48 GB/s, and verify them using switch counters.
- ☐ **Collective impact**: estimate the impact on overall AllReduce time when the degraded link lies in the ring AllReduce path, then evaluate whether a hierarchical reduction that routes less of the collective through that link would help.

Network Technologies That Move the Ceiling

Monitoring keeps deployed fabrics honest, but it cannot push past the physical ceilings it measures, such as the reach and power limits that copper approaches at high signaling rates. New fabric technologies earn attention only when they move one of those bounds. As clusters scale toward 100,000 nodes, the durable design variables are power per bit, reach, and the ratio of compute to memory to network capacity, not the product names attached to a particular roadmap.


Protocol convergence and link density

The Ultra Ethernet Consortium (UEC) addresses the reliability and load-balancing requirements of AI/HPC traffic. Its Ultra Ethernet Transport design combines packet spraying across multiple paths, flexible ordering, multiple transport delivery services, congestion-control changes, and telemetry (Ultra Ethernet Consortium 2025). The architectural question is how the selected service delivers the required completion and ordering semantics under congestion or loss. Packet trimming (cutting an overflowing packet down to its header instead of dropping it, so the receiver learns of the loss at once), retry, and endpoint recovery should therefore be judged by their effect on completion-time tails and resource cost, rather than by whether the design reproduces a lossless-fabric mechanism.

Higher switch capacity attacks hop count as well as raw bandwidth. XDR InfiniBand pushes 800 Gb/s per port, and Ethernet roadmaps include 800GbE and 1.6TbE link speeds (NVIDIA 2026e; Ethernet Alliance 2025). Ethernet switch silicon with 1.6 Tb/s ports pushes aggregate capacity to 102.4 Tb/s in current Tomahawk 6-class designs (Broadcom Inc. 2025). A single 1.6 Tb/s port delivers the bandwidth of 4 400G ports, so the same ASIC can instead expose 4 times as many 400G ports. Spending that capacity on radix rather than port rate is what flattens the topology, because fat-tree host count grows as $k^2/2$ at two tiers and $k^3/4$ at three. A cluster that previously required three tiers of switches may then be served by two when radix, port rate, and placement constraints line up, potentially reducing the number of optical links and switching stages. The transceiver savings require explicit port and cable accounting; removing one tier does not automatically halve the module count, and the latency benefit depends on the resulting paths and traffic.

Optical interconnects

Optical interconnects attack the power-per-bit and reach terms that copper makes worse as data rates increase. Each doubling of the per-lane signaling rate, from the 100 Gb/s-class lanes of current NDR and 800G Ethernet ports to the 200 Gb/s class now arriving, raises the insertion loss per meter of passive copper. The usable reach shrinks, as the link-budget example in section 4 showed, and the SerDes must spend more energy per bit on equalization to recover the signal. Active electrical cables, which add retimer chips to regenerate the signal mid-cable, extend that reach but add latency and power of their own.



Each extra meter pushes the fabric from copper toward optics.

Co-packaged optics (CPO) places optical engines close to the switch or accelerator on a shared package substrate. Moving the optical engine from the switch faceplate to the package shortens the SerDes-to-optics electrical path from centimeters of board trace to millimeters, which reduces the signal-conditioning burden before transmission over fiber. The receiving optical engine converts the signal back to electrical form. Fiber still introduces propagation delay and has a loss budget; packaging the optics closer to the processor does not remove those constraints.

Co-packaged optics therefore changes the electrical portion of the link budget while retaining the reach advantages of optical transmission. Usable reach still depends on the fiber, connectors, optical power, and receiver design. The relevant comparison holds payload capacity and error targets fixed, then measures the power saved by the shorter electrical path against the packaging and maintenance costs of integration.

A quick estimate makes the power dividend concrete.

> Napkin Math 3.6: The optical dividend
>
> **Problem**: Calculate the power savings of moving a 51.2 Tb/s switch from pluggable transceivers to co-packaged optics.
>
> 1. **Pluggable architecture**: 128 ports $\times$ 20 W = 2.56 kW for optics alone.
> 2. **CPO architecture**: 128 engines $\times$ 10 W = 1.28 kW.
> 3. **Savings**: The savings reach 1.28 kW of power per switch.
>
> **Systems insight**: Across 1,000 switches, the assumed pluggable modules consume 2.56 MW. The modeled CPO configuration saves 1.28 MW, equivalent to the reference power budget of roughly 1,800 H100 GPUs. That equivalence measures the scale of the saving; using it for additional accelerators also requires compute capacity, power delivery, and cooling in the right locations. Optics power constrains both operating cost and the equipment a facility can support.

The spine example for 10,000 GPUs assigns 400 kW to pluggable optics. That subtotal counts only the selected spine-side endpoints. Applying the same fractional saving to those endpoints would require a CPO implementation with the assumed per-port power and capacity; opposite-end optics remain outside the comparison. Integration also changes serviceability: replacing a failed optical component may involve a larger assembly than swapping a pluggable module. The energy benefit must be evaluated alongside packaging, repair, and spare-capacity costs.

For ML infrastructure, CPO could flatten the bandwidth hierarchy by narrowing the gap between intra-node and inter-node bandwidth. If inter-node links achieve bandwidth comparable to NVLink-class local fabrics (hundreds of GB/s per GPU), the bandwidth penalty for extending tensor parallelism beyond a single node would shrink. Cross-node tensor parallelism would then become economical for more workloads, provided that startup latency and collective frequency also fit the step-time budget.

However, CPO introduces new challenges. Optical components are sensitive to temperature (laser wavelength shifts with temperature, requiring active thermal management), and integrating photonics on the same package as a 1,000 W GPU creates a hostile thermal environment for the optical components. The manufacturing processes for silicon photonics and CMOS transistors are similar but not identical, requiring separate fabrication steps that increase package cost and complexity. Hybrid integration, which places the photonics chiplet on a cooler region of the package substrate and thermally isolates it from the GPU die, is one way to manage that environment, at the cost of a longer electrical path than full co-location.

Disaggregated and composable architectures

A fixed node configuration can leave compute or memory underused when workloads need different resource ratios. Compute Express Link (CXL) memory pooling allows supported hosts to access assigned memory capacity through a CXL path, while disaggregated designs make some resource allocations independent of the chassis boundary. This changes which links lie on the workload's

critical path. It does not merge CXL memory access, NVLink communication, and InfiniBand transport into one interchangeable service; each path retains its own supported operations, bandwidth, and latency.

A composed node therefore needs a new traffic budget. The α-β distinction between startup and transfer cost remains useful, but each path requires its own parameters and access model. Remote memory traffic can compete with other transfers, and fine-grained dependent accesses can expose latency that a bulk-bandwidth estimate hides. Disaggregation improves resource flexibility only when these added costs fit the workload's execution budget. Composition relocates the synchronization backbone onto new paths rather than eliminating it.

↩ CXL memory pooling, which makes node memory capacity less rigid but remains a capacity tier rather than a high-bandwidth memory (HBM) replacement, is established in section 11.

Fallacies and Pitfalls

Designing and operating high-performance fabrics for ML requires unlearning assumptions from traditional data-center networking. The following fallacies and pitfalls capture the most common errors that stall training and degrade cluster productivity.

Fallacy: *More bandwidth always means faster training.*

Engineers assume upgrading from HDR (200 Gb/s) to NDR (400 Gb/s) will yield proportional gains, but the α-β model (section 6) reveals this is only true in the bandwidth-dominated regime. For small models or the small-message phases of pipeline parallelism, the startup term α (1.5 µs in this chapter's NDR scenario, including NIC processing, switch hops, and FEC) dictates performance. If a workload is latency-bound, a 2× bandwidth increase may deliver only a small fraction of the line-rate gain while adding substantial power and transceiver cost.

Consider a 10 KB message (typical for control synchronization). On 200 Gb/s InfiniBand, it takes 1.90 µs. Upgrading to 400 Gb/s reduces this to 1.70 µs, a 10.5 percent improvement despite doubling the link rate.

Pitfall: *Treating InfiniBand as merely fast Ethernet.*

Procurement teams compare InfiniBand and high-speed Ethernet on link rate alone and conclude they are equivalent at the same Gb/s. The relevant comparison is between complete transport stacks, not between InfiniBand and TCP. InfiniBand provides kernel-bypass RDMA over a credit-based fabric; RoCE also provides kernel-bypass RDMA, but carries it over Ethernet and places more of the reliable-delivery, congestion-control, and routing contract in NIC behavior and fabric configuration. PFC and ECN are common parts of that contract. Conventional kernel TCP is a third design point with different CPU and recovery costs. The architecture decision therefore determines where flow-control state and operational risk reside, even when nominal link rates match.

Fallacy: *Lossless Ethernet is as reliable as InfiniBand.*

RoCE over Ethernet can achieve throughput comparable to InfiniBand for large transfers, but lossless operation depends on the configuration and interaction of PFC, ECN, routing, buffers, and NIC behavior (section 9). A forwarding loop, cyclic buffer dependency, or firmware defect can trigger a PFC storm, where PAUSE frames spread beyond the original queue. InfiniBand's per-hop credit mechanism avoids this specific reactive PAUSE-frame cascade, but the fabric still requires deadlock-free routing, sound virtual-lane configuration, and congestion management (InfiniBand Trade Association 2000). Both fabrics require validation and telemetry; RoCE adds particular sensitivity to the configuration of Ethernet losslessness.

Pitfall: *Accepting data-center oversubscription ratios for synchronous training.*

Oversubscription relies on the traffic crossing a shared boundary fitting its available capacity. Bulk-synchronous training can violate that assumption with coordinated bursts. In the cut-saturating scenario of section 6, 4:1 oversubscription increases the modeled communication bound by 4×. Applied to a $300M cluster with the assumed 30 percent communication fraction, the resulting idle-capacity estimate exceeds $142.1M. This is an equivalent-capacity comparison under the stated schedule, not an equipment loss or a universal penalty for every collective.

Fallacy: *TCP bandwidth tests are sufficient for ML fabric validation.*

Standard benchmarks like `iperf` measure kernel-based TCP/IP performance. TCP throughput depends on host processing, offloads, and tuning as well as wire speed; it has no fixed throughput ceiling independent of that configuration. An RDMA training job exercises a different data path, so a low TCP result does not establish that the RDMA path is slow, and a high TCP result does not validate collective performance. Validation protocols must use RDMA-specific tools from the `perftest` suite to match the workload's data path.

Pitfall: *Relying on adaptive routing instead of topology-aware placement.*

Adaptive routing can distribute traffic across available paths, but it cannot increase their total capacity. For a 1,024-GPU job spanning two oversubscribed spine groups, the group-to-group links become limiting when the collective sends more crossing traffic than those links can carry within its time budget. Placement can reduce that traffic, and routing can reduce path imbalance. Both must be evaluated against the actual collective schedule.

↪ Topology-aware gang placement that keeps collective traffic off contended cross-rack paths is operationalized in section 12.

Fallacy: *Network fabric problems always appear as hard failures.*

Network performance issues in ML clusters often manifest as subtle training slowdowns rather than errors, because jobs continue to run while gradients arrive late. The silent-waste estimate in section 13 shows the scale. A 10 percent bandwidth loss that stretches each iteration by only 2–3 percent costs 15,000–22,000 GPU-hours over a 30-day run on 1,024 GPUs without raising a single alarm. Detection therefore depends on comparing delivered throughput with a baseline, not on waiting for an error.

Pitfall: *Treating PFC and ECN counters as optional production details.*

Discard counters and PFC pause durations should be correlated with collective completion time and the affected paths. Rising values can reveal queue pressure or recovery activity, but they do not establish a failing transceiver or predict an inevitable job failure. Physical error counters, traffic load, routing, and configured watchdog actions help distinguish the causes and select a response.

Summary

The five-level model of figure 0.29 bridges physical reach, transport primitives, switch topologies, congestion dynamics, and cluster integration into a single system contract. A fabric must provide both enough capacity for the workload's traffic and predictable completion at its synchronization boundaries. InfiniBand and RoCE distribute this responsibility differently across links, endpoints, and operational policy; the production cases show why neither port rate nor protocol name determines delivered performance.

Three numerical anchors show how to apply the model. One GPU's NVLink bandwidth exceeds its own external port's per-direction bandwidth by 9×; the modeled NDR path has equal startup and transmission costs near 75 KB; and the 4:1 oversubscribed cut increases the fixed-payload transfer bound by 4×. Each result depends on its stated configuration and traffic assumptions. In the Fleet Law, transfer time contributes to $T_{\text{comm}}(N)$ and residual synchronization waiting to $T_{\text{sync}}(N)$; consistent timeline accounting prevents counting one delay in both. The communication and coordination axes of C^3 meet where those dependencies determine useful compute progress.

The same model guides design and diagnosis. Message sizes determine whether startup latency or bandwidth dominates; communication patterns determine which paths must carry that traffic. During operation, application throughput, transport counters, and physical telemetry distinguish inadequate capacity from contention or a degraded component. These measurements also test whether a proposed optical or composable architecture removes the binding constraint or merely moves it.

Key Takeaways: The fabric decides useful compute

- **Link speed is not fabric speed**: For traffic that crosses a fabric cut, available capacity bounds transfer time (principle 6). Workload placement and collective schedules deter-

mine how much data must cross, so advertised port speed alone cannot predict useful training throughput.


- **Latency and bandwidth bind differently**: The α-β model of section 6 separates startup cost from per-byte transfer cost, with $n^* = \alpha \cdot \beta$ marking the regime change. Message-size distributions, not vendor peak numbers, determine whether to optimize software latency or hardware bandwidth.
- **Reliable delivery moves the risk**: RDMA transports need reliable completion and bounded recovery, not one universal lossless-fabric mechanism. InfiniBand normally suppresses loss with link-level credits; many RoCE deployments use PFC and ECN, while PFC-free designs place more recovery responsibility at the endpoints. Each choice trades hardware flexibility against tail latency and operational complexity.
- **Topology must match traffic**: Fat-trees buy flexible bisection bandwidth, rail-optimized designs give same-rank AllReduce traffic its own isolated switch network, and dragonfly or torus designs trade cabling and locality differently. The right fabric depends on whether the workload stresses AllReduce, AllToAll, or multi-tenant sharing.
- **Telemetry saves GPU-hours**: PFC counters, link error rates, bandwidth baselines, and application throughput must be correlated across layers. Without that observability, a degraded transceiver or congestion storm silently converts a high-end fleet into a queue of waiting accelerators.

At fleet scale, the interconnect is part of the computer. Its value lies in how much useful computation it allows the participating accelerators to complete together. A fabric decision therefore has to be judged against the workload's communication pattern and synchronization schedule, because additional capacity helps only where those dependencies expose a communication limit.

What's Next: From wires to data pipelines

A fabric that completes every collective on time still leaves two flows of bytes unaccounted for. Each step needs its next input batch in place before the accelerators ask for it, and the fleet's training state must outlive the next hardware failure, which at this scale means writing multi-terabyte checkpoints on a schedule. Those checkpoint bursts are the traffic class this chapter isolated from the synchronization path, and for text pretraining they can outweigh the training corpus itself. Chapter 13 treats storage as the fleet's fuel line, sizing the tiers and pipelines that deliver inputs ahead of demand and persist model state without stalling the step.

Data Storage

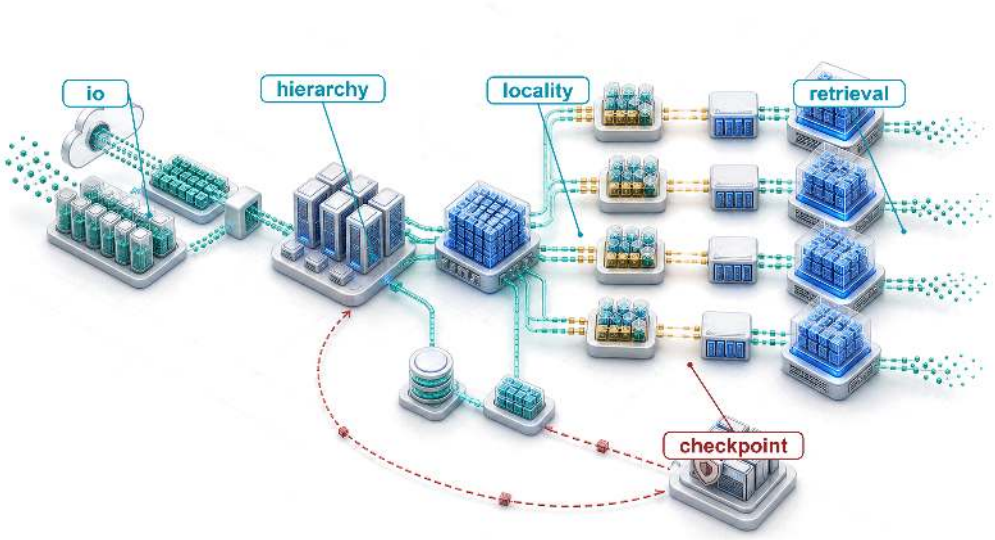

Purpose

Why does storage become the invisible bottleneck that prevents accelerators from reaching their potential?


A training job can leave expensive accelerators idle even when its models fit in memory and its network has ample capacity. The next batch must arrive before computation needs it, and a saved checkpoint must remain usable when a worker fails. Storage becomes an invisible bottleneck because accelerator benchmarks often begin with data already in place, excluding the work needed to deliver inputs and preserve results. A pipeline that keeps one machine busy can fail when many workers compete for the same data source. A burst of checkpoint writes from one job can delay input reads for others, turning a local pause into lost progress across the fleet. Adding compute increases demand without necessarily increasing the shared system's ability to serve it. The consequences depend on the workload: compact training inputs may be easy to deliver even when saving model state dominates storage traffic, while larger samples can make continuous input delivery the limiting factor. Bringing data closer to the accelerator reduces some delays but adds staging traffic, capacity cost, and responsibility for preserving complete versions. A faster local save also provides little protection if the only copy disappears with the failed machine. Storage decisions therefore determine both how quickly the fleet advances and how much of that progress survives disruption. In C^3 terms, storage design coordinates data movement and durable state so that available compute produces recoverable progress.

Learning Objectives

- Compare storage demands of full-corpus training, checkpoint writes, and model serving across local and shared tiers
- Calculate input bandwidth and mean cache service time from workload demand and tier behavior
- Design prefetching, sharding, locality, and direct-storage paths that reduce fleet-scale accelerator starvation
- Specify storage commit and replay contracts that preserve correctness when distributed pipeline stages fail
- Select checkpoint staging and replication strategies that balance pause time, recovery risk, and storage cost
- Evaluate staging and tiering choices by total delivery cost, including transfer fees and idle accelerators
- Assess retrieval indexes and synthetic-data pipelines as storage workloads with distinct latency, consistency, and governance constraints

The Fuel Line

The dense accelerator nodes of chapter 11 pack eight GPUs delivering petaFLOP/s of aggregate compute, and the InfiniBand fabrics of chapter 11 connect thousands of such nodes at hundreds of gigabits per second. Within the multi-tier fleet stack diagrammed in figure 0.15, data storage completes that physical foundation, staging training data, model weights, optimizer state, and intermediate checkpoints at the right distance from the accelerator. An engine without fuel is expensive sculpture. The engineering question is how to deliver that fuel fast enough that the accelerators of a training cluster never starve. This chapter poses that question on 256 eight-GPU nodes, 2,048 accelerators in all, deliberately twice the 1,024-GPU (128-node) reference cluster used elsewhere in this book, because the larger fleet makes the pressure on shared storage easier to see. Every worked number for the 175B job uses this running cluster; a side scenario with a different workload or fleet size names its own scale where it appears.



Storage is the physical substrate spanning Compute (C_1), Communication (C_2), and Coordination (C_3).

Consider the running example for the storage analysis, an instance of Archetype A (GPT-4/Llama-3). A 175-billion parameter language model trains on 1.5 trillion tokens of text: roughly 3 TB in compressed source form, or 6 TB once represented as 4-byte token IDs. That token budget is set upstream of storage. Under the compute-optimal scaling results of section 6, the training-token count grows in proportion to parameter count, so each step up the model-size curve enlarges both the corpus the fleet must hold and the bytes each epoch must read. This corpus already sits below the compute-optimal allocation for a 175B-parameter model, so a compute-optimal run would raise both figures further. The run makes a single pass (one epoch) over this corpus, reading every selected token once in an order determined by the shuffle seed. No small "hot" subset dominates access. Meanwhile, each accelerator processes its local batch in roughly 200 ms, then waits for the next. If storage cannot deliver data within that 200 ms window, the accelerator sits idle, and the organization pays for silicon that produces heat instead of gradients.


The problem is deceptive because storage technology has improved substantially. Non-Volatile Memory Express (NVMe) drives achieve 7 GB/s of sequential throughput, a figure that would have seemed out of reach a decade ago. An H100 moves data internally through high-bandwidth memory (HBM) at 3.35 TB/s, roughly 479× the sequential bandwidth of a single NVMe drive. This ratio contrasts two tiers; it is not the rate at which storage must supply training inputs, because HBM bandwidth also carries repeated weight, activation, and tensor traffic during computation. The storage feed requirement is instead determined by the input-batch bytes each accelerator needs per iteration. Dividing those bytes by the compute window gives one worker's required delivery rate; summing across workers gives the fleet demand. That rate must be evaluated at each tier using the representation stored there, since compressed inputs and decoded tensors occupy different numbers of bytes. A hierarchy becomes useful when the durable source cannot meet that rate or its latency

varies enough to interrupt computation. Faster tiers stage upcoming batches while the durable tier supplies capacity and preserves the source data.

The storage problem joins physics with economics. Physics favors the memory closest to the accelerator, which offers the highest bandwidth in the smallest capacity; economics favors shared storage, which pools far more capacity at lower cost per byte behind additional interfaces and service queues. Device technology, interconnects, and contention then determine the rate a particular consumer actually receives. The engineering task is to place and move data so that the accelerator receives each batch before it is needed. The resulting design problem is quantitative. It asks how fast each tier must be, how deep the pipeline must run, and which bytes are worth keeping close to the accelerator. Improving arithmetic throughput alone does not improve input delivery or checkpoint persistence. Those paths require their own bandwidth and latency budgets.

The canonical training-data footprint for this example is roughly 9 TB across the hierarchy, combining the example's compressed corpus and tokenized shards. Additional shuffled or packed variants can raise the staging footprint, but the per-epoch training read over 4-byte token IDs is 6 TB. This chapter adopts one resumable mixed-precision Adaptive Moment Estimation (Adam) checkpoint contract: FP16 model weights, FP32 master weights, and two FP32 Adam moments, for 14 bytes per parameter. This is the 16-byte training state of section 8 without its 2-byte FP16 gradients, which are recomputed after restore, while scheduler, random-number-generator, and data-loader metadata are negligible at this scale. The resulting checkpoint is 2,450 GB every 10 minutes.

Over a 30-day training run on the 256-node cluster, the storage system must deliver 6 TB of tokenized training data in the run's single epoch, absorb 10.6 PB of checkpoint writes, and stage model weights for evaluation runs. The sections that follow use this same contract for every checkpoint size, duration, retention total, and lifetime-write calculation.



Over the run, checkpoint writes exceed one epoch of training-data reads by more than 1,000 times.

Those numbers force the storage path. ML access patterns first invert the assumptions behind conventional storage systems; that inversion forces a hierarchy from HBM to cold archive; the hierarchy then requires a pipeline equation that sizes delivery, direct data paths that remove host copies, a checkpoint protocol for the dominant write traffic, and economics that decide which bytes belong at each tier. Serving-time model loading, retrieval indexes, and synthetic-data provenance are variations on the same fuel-line problem, and devices that move the boundaries between tiers close the chapter. In each workload, the storage system must place the right representation at the right distance before the accelerator asks for it.

How ML Workloads Invert Storage Assumptions

A database administrator moving to an ML infrastructure team would find that full-corpus pretraining workloads invert many familiar storage design principles. The 175B running example makes the inversion concrete. Its training pass reads every selected token once, in shuffled order, and a run that makes several passes reshuffles the same corpus for each one. Under this scenario, no small "hot" subset dominates access. Fine-tuning, curriculum learning, hard-example mining, recommendation features, and retrieval do create skewed working sets, so the inversion is a workload property rather than a universal property of ML.

Transactional databases emphasize small random accesses and strong consistency. A database server might issue thousands of 4 KB reads per second to serve user queries. Storage designs for this workload combine caching algorithms that exploit repeated access, write-ahead logs that support recovery, and redundant array of independent disks (RAID)[1] configurations that trade capacity and performance for fault tolerance. The caching layers assume that recently accessed data will soon be accessed again. A full-corpus training scan breaks that assumption and changes the access pattern, while retaining the need to protect durable state.

Full-corpus pretraining inverts these assumptions when samples are packaged into sequential shards, allowing the pipeline to stream through datasets that span hundreds of terabytes. Individual accesses are large (megabytes rather than kilobytes) because models consume batches of images or text sequences. Immutable, versioned training shards avoid read-write conflicts during a run; checkpoint publication and live feature updates still require explicit consistency guarantees. Image and video workloads can demand hundreds of gigabytes per second for days or weeks; compact tokenized text can require much less input bandwidth even when checkpoint writes dominate total traffic. The mismatch between what storage was optimized for and what ML actually needs

[1] **RAID (redundant array of independent disks)**: A Berkeley taxonomy of drive-combining strategies that trade redundancy, capacity, and I/O performance (Patterson et al. 1988). RAID 0 stripes data without redundancy and can suit a disposable cache backed by a durable source. A drive failure then requires restaging; redundancy may still be worthwhile when that recovery cost or the required availability justifies it. Unreplicated checkpoints and sole dataset copies require a different durability contract.

creates the **I/O wall** (principle 7): when storage throughput cannot deliver training data as fast as accelerators consume it, GPUs idle regardless of their computational power. For bandwidth-heavy image and video inputs, that wall arrives when accelerator count grows faster than provisioned storage throughput, making the *data pipeline*, not the *model*, the limiting factor.

A simple shard-assignment calculation shows how this bottleneck can emerge even when aggregate storage capacity looks ample.

↪ How storage stalls surface as communication or coordination bottlenecks in the C^3 taxonomy is developed in section 4.

2 **IOPS (Input/Output Operations Per Second)**: The metric that dominated storage procurement for decades because database workloads issue millions of small random reads. ML training inverts this priority: a pipeline streaming 256 MB shards sequentially needs sustained GB/s throughput, not per-operation speed. Provisioning storage by IOPS rating for an ML workload over-spends on random-access capability the pipeline never exercises.

Napkin Math 4.1: The thundering herd: Shard contention

Problem: A dataset is split into 1000 shards on a shared file system. If 32 workers each pick a shard at random to start their next epoch, what is the probability that at least two GPUs "collide" on the same shard, creating a potential read hotspot? A shard collision does not imply a server collision unless the placement maps each shard to a distinct server.

Math: This is a variant of the "Birthday Problem" in probability.

1. **Probability of No Collision**: $\approx e^{-n_{\text{workers}}^2/(2K_{\text{shards}})} = e^{-32^2/2{,}000} \approx 0.60$.
2. **Probability of Contention**: $1 - 0.60 = 40\%$.

Systems insight: With 32 workers and 1,000 shards, the 40.1 percent collision probability identifies a potential storage-shard hotspot. Whether that collision delays workers depends on shard placement, caching, and available service capacity. Coordinating shard assignments can reduce this source of tail latency when assignments spread demand across independently serving devices while preserving the intended sampling policy.

Shard collisions are one runtime symptom of the I/O wall. Even without contention, a fixed input service time can become the limiting stage when compute becomes faster.

Systems Perspective 4.1: The moving I/O bottleneck

Hold the batch representation and storage path fixed while improving compute throughput. The batch now finishes sooner, leaving less time to deliver the next one. Prefetching can overlap delivery with execution, but it cannot overcome a sustained service-rate deficit. This compute-to-storage imbalance does not imply that every larger model is input bound: a model that performs more computation on the same batch can instead give storage more time. The design must follow workload service times, not advertised peak-throughput trends.

A normalized example isolates the effect. Suppose input delivery takes one quarter of the original compute time and overlaps perfectly with computation, so each batch takes the longer of the two service times. Doubling compute speed halves batch time, and quadrupling it halves batch time again, at which point compute and delivery take equal time. Beyond that point the pipeline is delivery bound. A sixteenfold faster accelerator still raises batch throughput only fourfold, and the remaining compute sits idle behind the input path. That plateau is an I/O wall for this workload and allocation. Faster storage, a more compact representation, or additional independent input paths can move it; deeper prefetching alone cannot.

The first inversion is access pattern. Where database workloads exhibit *random access patterns* that benefit from seek-time optimization, full-corpus pretraining performs massive *sequential scans*. An epoch in the running example reads each selected sample once, in the order produced by shard and buffer shuffling. This pattern resembles video streaming more than database queries. Storage systems optimized for random IOPS[2] waste capabilities on this workload, while systems optimized for sequential throughput excel. The distinction is quantitatively dramatic: a Gen4/Gen5 NVMe drive delivers roughly 7–14 GB/s for sequential reads, while small 4 KB random reads can fall near 0.5 GB/s, an order-of-magnitude to 30× penalty for the wrong access pattern. The penalty is even more severe on hard drives, where mechanical seek times impose a 100× throughput reduction for random access compared to sequential.

The shuffling that ML training requires adds a complication rooted in the requirements of stochastic gradient descent. Stochastic gradient descent requires that each mini-batch be drawn approximately uniformly from the training distribution; presenting samples in a correlated order (all samples from the same document, all images from the same class) biases the gradient estimates and slows or destabilizes convergence. True global shuffling would satisfy this requirement perfectly, but it requires random access across the entire dataset, destroying the sequential access pattern that storage hardware demands. Even for a multi-terabyte corpus, random per-sample seeks are I/O-prohibitive: a dataset of 1 trillion 4-byte tokens (about 4 TB) stored as individual elements on NVMe, accessed

at random, would take hundreds to thousands of hours to read at the drive's random-read IOPS rate rather than about ten minutes of sequential streaming. The practical solution is therefore a compromise: shuffle the order of large data shards, then shuffle samples within each shard's local buffer. This preserves sequential I/O, but adequate mixing depends on shard composition, buffer size, and the intended sampling policy. Larger shards do not add diversity when their samples remain homogeneous or the buffer sees only a small correlated window. Finer shards or larger mixing buffers can improve mixing; compare the loss curve with a fully shuffled baseline on a subset before committing the run.

The second inversion is working set size. Traditional applications exhibit temporal locality: a web server repeatedly accesses popular pages, and a cache holding the top 10 percent of content serves 90 percent of requests. In the chapter's full-corpus pretraining scenario, the 6 TB serialized corpus has no "popular" token range; each selected token is consumed once per epoch. A cache of any practical size holds only a small fraction of the corpus, and most samples are effectively "cold" when accessed. This access pattern makes traditional recency caching much less effective. A least recently used (LRU)[3] cache can approach a 0 percent hit rate for a cyclic scan larger than the cache. With independently reshuffled epochs, cross-epoch hits are low but nonzero and depend on the cache fraction and sample order.

[3] **LRU (Least Recently Used)**: LRU is effective when recently accessed data is likely to be accessed again soon; a cyclic full-dataset scan larger than the cache can evict each sample before its next access and drive the hit rate toward zero. Independent reshuffling changes the boundary behavior because some samples retained from the end of one epoch may be reused before eviction in the next, so the hit rate depends on the cache-to-dataset ratio and ordering rather than being universally zero. Teams should measure this reuse before allocating DRAM that could otherwise serve as prefetch buffers.

Other training policies create different locality. Multi-task or curriculum learning, hard-example mining, and filtered sampling access some subsets more frequently during particular phases. This temporary working set lets the NVMe tier exploit locality. Large-scale pretraining jobs that repeatedly scan a fixed corpus remain the scenario for the hierarchy derived here; systems serving another sampling policy should measure its reuse distribution before adopting the same cache design.

The third inversion is write pattern. Transactional systems generate continuous streams of small writes, each immediately durable. ML systems generate occasional massive writes when saving checkpoints. A 175B parameter model checkpoint, including optimizer state, occupies roughly 2,450 GB. Saving it every 10 minutes generates concentrated bursts that saturate bandwidth for seconds, followed by long idle periods. These synchronized bursts, called checkpoint storms and defined formally in definition 4.5, must be absorbed by the shared file system without disrupting ongoing training reads. The bursty write pattern is particularly challenging because all nodes in the cluster write their checkpoint shards simultaneously. If 256 nodes each write 10 GB, the parallel file system receives 2.4 TB of writes in a single burst, which blocks training if the job writes synchronously to that tier. Local staging and asynchronous replication can shorten this pause, as section 15 develops. When checkpoint and gradient traffic share one fabric, traffic isolation also keeps the burst from delaying the job's collectives.

↩ Traffic isolation and quality-of-service mechanisms are established in section 13.

The fourth inversion is subtler. The read/write ratio shifts dramatically by lifecycle phase. During the intervals between checkpoints, the input pipeline reads continuously. Across a complete run, however, the read/write ratio depends on input size, epoch count, checkpoint size, and save frequency. The running language-model example produces far more checkpoint bytes than training-input bytes despite spending most of its time between saves. During data preprocessing, both reads and writes are heavy, and the access pattern more closely resembles a MapReduce job than a training loop: tokenization, deduplication, and shuffling scan the raw corpus once (large sequential reads), write intermediate artifacts (large sequential writes), and then scan those artifacts again for the next stage. A 3 TB compressed text corpus typically expands to 6 TB of tokenized shards before the first training epoch begins, loading each storage tier differently from the read-only training phase that follows. No single storage configuration optimizes for all phases, which is why ML systems require a multi-tier hierarchy rather than a single storage technology.

A fifth inversion emerges when comparing training and inference workloads. *Training* reads datasets sequentially and writes checkpoints in bursts. Weight-resident *inference*, by contrast, performs one large model read at startup and then serves requests from HBM. Its storage challenge is cold-start latency: the time required to load a model when scaling up or recovering from failure. The binding constraint flips from sustained dataset throughput to a bulk read whose duration depends on which tier supplies the weights. Retrieval, state offload, and models larger than aggregate HBM create additional serving-time I/O, so this weight-resident case is a baseline rather than a universal inference pattern. Section 15 derives the load times and connects that baseline to the retrieval workload that follows.

When scaling from a single user to thousands of concurrent inference requests, the storage challenge shifts from a single-stream throughput problem to a massive fan-out distribution problem. A serving cluster with 100 replicas of our 175B parameter model holds 35 TB of FP16 model weights across the cluster. When a new model version is deployed (a model rollout), all 100 replicas must be updated, triggering a 35 TB data distribution event that must complete within minutes to minimize serving disruption. This is analogous to the checkpoint storm in training but in reverse. Instead of many nodes *writing* to a central location simultaneously, many nodes are *reading* the same data simultaneously. The storage system must sustain this burst read bandwidth for model distribution while continuing to serve inference requests from the existing model version without degradation.

Table 0.23: ML Workloads Invert Traditional Storage Assumptions: The five inversions of full-corpus training and serving. Where databases optimize for random IOPS with cacheable working sets, ML training streams sequentially through datasets that exceed all cache levels and writes state in bursts, its read/write balance shifts by lifecycle phase, and serving replaces dataset streaming with bulk model loads.

Workload Pattern	Traditional Assumption	ML Reality
Access pattern	Random access	Sequential streaming
Working set	Fits in cache, with strong temporal locality	Exceeds all cache levels; low locality in full-corpus scans
Write pattern	Continuous small writes	Bursty large writes
Read/write ratio	Balanced	Phase-dependent (read-only to write-dominated)
Training vs. inference	One access pattern for all phases	Corpus streaming in training; bulk model loads and fan-out in serving

Table 0.23 collects the five inversions, and together they reduce to one procurement rule, which is to optimize for streaming reads and bursty writes rather than database-style random IOPS. An organization provisioning storage for ML based on database-era heuristics will over-invest in random IOPS for sequential training shards, under-invest in the sustained bandwidth those shards require, and fail to account for the bursty write patterns that checkpointing creates.

Checkpoint 4.1: Storage workload analysis

Consider the storage subsystem for a new ML training cluster with 512 GPUs. The primary workload will train large language models on a 10 TB text dataset.

- ☐ **Database heuristics**: use the five storage workload inversions to name at least three database optimization strategies that would be counterproductive for this workload.
- ☐ **Epoch reads**: calculate the total data volume read when each training epoch reads the full 10 TB dataset once and the cluster trains for 100 epochs, then compare it to a typical database workload.
- ☐ **Checkpoint bandwidth**: calculate the minimum write bandwidth required when the model saves a 500 GB checkpoint every 15 minutes and each save must complete within 30 seconds.
- ☐ **Write duty cycle**: calculate the percentage of time the storage system spends in "write mode" vs. "read mode" under bursty checkpoints every 15 minutes.

Which storage tier can keep accelerators fed depends on workload demand, not on a model's parameter count. The required rate is the aggregate input bytes consumed during a delivery window divided by that window, and demand above a tier's allocated service rate cannot be sustained by prefetching alone. A larger model need not require a higher input rate, because representation, batch size, parallelism, and compute time jointly determine it; section 11 turns that dependence into a sizing equation. Adding clients can raise the aggregate service a shared tier provides, while contention lowers the share available to any one job.

The practical consequence for the running example is stark. The 1.5 trillion tokens of training data produce roughly 6 TB of sequential token-ID reads per epoch, even though the compressed source

corpus is only 3 TB. Stored as one file per sample, the corpus would spend its storage service on file opens rather than payload bytes, a metadata request rate rather than a byte rate that section 6 develops as the small file problem. Preprocessing it into large sequential shards (Aizman et al. 2019) amortizes the fixed cost of open, seek, and close across many tokens, reducing metadata demand without changing the required payload rate; section 5 compares the shard formats that make this packaging work. Where those shards should live, and how close to the accelerator, is the question the storage hierarchy answers.

The ML Storage Hierarchy

A system architect must organize storage to serve workloads that simultaneously demand terabytes-per-second bandwidth for computation, petabyte-scale capacity for datasets, and durable checkpoints. No single technology satisfies all three requirements. HBM supplies high local bandwidth at limited capacity; object storage pools durable capacity, but delivery depends on its service and client paths. A multi-tier hierarchy combines these resources rather than requiring one technology to meet every demand. Each tier offers a different balance of bandwidth, latency, capacity, and cost. The hierarchy extends the familiar processor memory hierarchy across nodes. The new fleet-level decision is how local staging reduces demand on shared storage while preserving a durable, consistently versioned source. Table 0.24 compares the resources at their stated device, node, and service scopes.

Table 0.24: Extended Memory Hierarchy for ML Systems: HBM bandwidth is per accelerator, host DRAM and local NVMe are per node, and parallel-file-system and object-storage figures are aggregate service rates. These different scopes are not directly comparable tier ratios; divide shared bandwidth among active clients and account for each client path before sizing prefetching and caching. Memory costs are acquisition dollars per GB, while storage costs are recurring dollars per GB-month; comparing them requires an explicit amortization period and utilization assumption.

Storage Tier	Typical Capacity	Bandwidth	Latency	Illustrative Cost Basis
GPU HBM	80 GB	3.35 TB/s	~100 ns	~$15/GB acquisition cost
Host DRAM	512 GB–2 TB	200 GB/s	~100 ns	~$3/GB acquisition cost
Local NVMe SSD	4–30 TB	7–25 GB/s	~100 µs	~$0.10/GB/month provisioned
Parallel File System	100+ PB	1+ TB/s aggregate	~1 ms	~$0.03/GB/month provisioned/service
Object Storage	Very large pool	100 GB/s aggregate	~50 ms	~$0.02/GB/month service
Archive/Cold Storage	Very large pool	1 GB/s	Minutes to hours	~$0.004/GB/month service

A central property of table 0.24 is that HBM's advantage over host DRAM is *bandwidth*, not *latency*. Random-access latency for both technologies sits in the ~80–150 ns range; HBM achieves its bandwidth lead (10–20×) through thousands of parallel traces on a silicon interposer and 3D stacking, not faster cells. The latency cliff between adjacent tiers only opens up at NVMe and below, where the physical distance from the accelerator grows from millimeters to meters.

The storage hierarchy model (principle 8) governs storage tiering and pipeline design. The local tiers exchange bandwidth for capacity, while shared tiers aggregate many devices and expose a different client path. The per-client bandwidth depends on allocation and contention rather than a fixed factor between tiers. Data format choices, caching strategies, prefetch buffer sizing, and tiering policies all exist to manage the movement of data upward through the hierarchy so that the accelerator never starves.

The rest of the chapter numbers the six tiers by distance from the accelerator, from Tier 0 (HBM) through Tier 1 (host DRAM), Tier 2 (local NVMe), Tier 3 (parallel file system), and Tier 4 (object storage) to Tier 5 (archive). Distance alone hides an important distinction, because each tier's bandwidth figure describes a different scope: per accelerator, per node, or a shared service divided among its clients (figure 0.42).

The physical tiers diagrammed in figure 0.42 govern the trade-off among access distance, capacity, and cost. Shared services can aggregate more bandwidth than an individual local device, so the

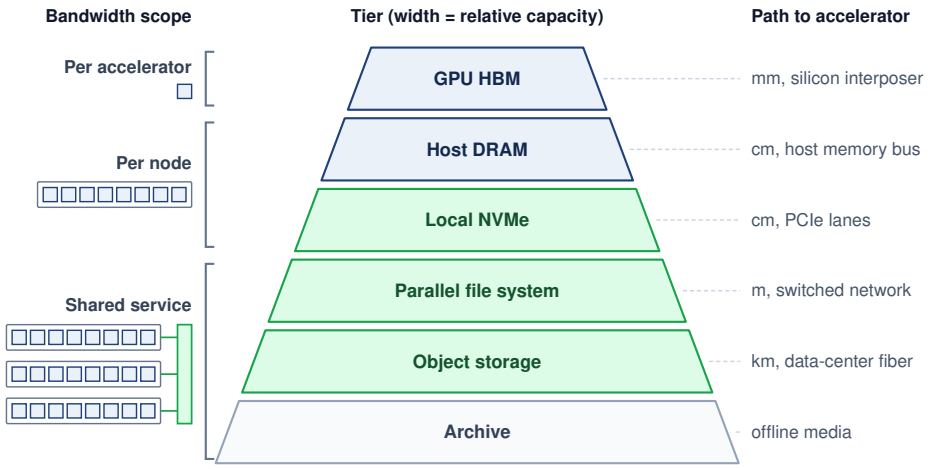



Figure 0.42: ML storage hierarchy: The six tiers of table 0.24 stacked by distance from the accelerator, with band width showing schematically how capacity grows toward the base; the table carries the numbers. The left brackets give the scope of each tier's bandwidth figure, and each glyph shows what shares it: one accelerator, the accelerators of one node, or many nodes drawing on one aggregate shared service. The right column gives the physical path each byte travels to reach the accelerator. Blue memory tiers are bought per GB; green storage tiers are rented or provisioned per GB-month; the gray archive tier is offline media.

ordering is not a monotonic ranking of aggregate throughput. This trade-off is not arbitrary; it reflects the physics of data proximity. HBM sits on the same silicon interposer as the accelerator, connected by thousands of parallel traces measured in millimeters. Host DRAM connects to the CPU memory controller; transfers from host memory to the accelerator traverse the host-device interconnect. NVMe reaches across a circuit board via a PCIe connector. The parallel file system traverses meters of cable and network switches. Object storage may span kilometers of fiber between data centers. Distance, protocol overhead, and contention can increase access latency, while media technology and provisioning determine capacity cost. Distance is therefore a guide rather than a measurement; only the complete client path establishes all three properties for a given consumer.

The engineering challenge is to deliver each batch to HBM before the accelerator needs it. Return to the running example: the durable corpus lives in object storage (Tier 4) as a 3 TB compressed source copy plus 6 TB of tokenized training shards, but the accelerator needs each batch in HBM (Tier 0) within 200 ms. The chapter's reference design fixes one path between them. At job start, each node copies its share of the tokenized shards from object storage to its local NVMe (Tier 2); the single training epoch then reads from that local copy, prepares batches in host DRAM, and transfers them to HBM, while the parallel file system (Tier 3) holds checkpoints rather than training inputs. Streaming the shards directly from object storage, or serving them from a parallel file system, are the alternatives the chapter weighs against this design, and the hierarchy describes placement choices, not a requirement that every byte visit every level.

Bandwidth cliffs between tiers

The bandwidth ratios between adjacent tiers reveal the severity of each transition in the hierarchy only when the scope of each rate is explicit, because a per-accelerator, per-node, or shared-service figure describes a different resource, as bracketed in figure 0.42. For one accelerator's HBM compared with the whole host's DRAM, the illustrative ratio is roughly 16.8× (3.35 TB/s vs. ~200 GB/s). A node-level comparison must account for all eight accelerators sharing that host-memory bandwidth. Between host DRAM and NVMe, the ratio is roughly 7.1× (200 GB/s vs. ~28 GB/s from a 4-drive RAID-0). Between NVMe and a parallel file system, the ratio depends on the per-node allocation: if a 1 TB/s aggregate parallel file system (PFS) serves 256 nodes, each node receives roughly 4 GB/s, a 7× reduction from the local RAID-0 stripe. Object-storage throughput likewise depends on the client path and allocation; there is no fixed ratio to a parallel file system.



Per-client bandwidth falls roughly 7 to 17× at each step from HBM to a node's share of the parallel file system.

As section 13 established, a cliff is not a feed requirement; the feed rate remains input-batch bytes divided by iteration time, summed over distinct consumers. What the cliffs decide is where buffering must sit. Along the chosen path, host DRAM can buffer prepared batches and NVMe can cache shards from shared storage. Each buffer must cover the delay of the tier below it while that tier sustains the consumption rate; durable repositories need not act as intermediate buffers.

The same hierarchy can be analyzed as a cache rather than as six isolated devices. If a request hits the hot tier with probability h, taking T_{hot}, and otherwise falls through to a colder tier, taking total end-to-end miss-path time T_{cold} (including the failed hot-tier lookup), its mean service time is

$$\mathbb{E}[T] = hT_{\text{hot}} + (1-h)T_{\text{cold}}. \tag{0.10}$$

For fixed-size records served serially, the corresponding effective bandwidth is the record size divided by $\mathbb{E}[T]$. The arithmetic makes small miss rates consequential: with a 95 percent hit rate and a cold-tier access $100\times$ slower than a hot-tier access, $\mathbb{E}[T] = 5.95T_{\text{hot}}$, so the effective request rate is only about one-sixth of the all-hot rate. Concurrent requests and prefetching can overlap service, so this mean is a sizing baseline rather than a fleet-throughput or latency guarantee. Correlated misses or a heavy-tailed cold tier can drain the prefetch buffer even when the average satisfies the pipeline budget, so production designs must check a tail percentile and miss bursts as well as $\mathbb{E}[T]$.

The batch-volume arithmetic also explains why increasing cluster size creates storage pressure. Aggregate demand is each consumer's batch bytes divided by its compute window, summed over consumers, so at a fixed per-node rate it grows linearly with node count. The per-node rate itself spans orders of magnitude across data modalities, as text and image training on the running cluster show.




Image training demands 1,800× the storage bandwidth of text.

Napkin Math 4.2: Text vs. image bandwidth

Problem: How much aggregate storage bandwidth does a 2,048-GPU cluster require for text training vs. image training?

Setup: Compare two declared batch representations at the same compute window and number of independent input consumers. The result depends on batch volume and rate, not modality alone. Both jobs are generic ones sized to the running cluster, not the 175B running job. Each GPU consumes one per-GPU batch every step, a pace that fits a model far smaller than 175B parameters.

For text training, the demand is surprisingly low. With a per-GPU batch of one packed sequence of 4,096 tokens and a 200 ms step time, the aggregate bandwidth is:

$$2{,}048 \text{ GPUs} \times 4{,}096 \text{ tokens/GPU} \times 4 \text{ bytes/token} \div 0.2\text{s} \approx 167.8 MB/s$$

This is easily served by a single network-attached storage node.

For image training, the picture changes dramatically. Using a common batch size of 256 per GPU (ImageNet at 224×224, roughly 116 KB/image), the aggregate bandwidth explodes:

$$2{,}048 \text{ GPUs} \times 256 \text{ images/GPU} \times 115.7 \text{ KB/image} \div 0.2\text{s} \approx 303.2 GB/s$$

Systems insight: Under the stated batch representations and compute times, image training requires 1,800× higher input bandwidth than text training. The text example is *volume-heavy* but *bandwidth-light*. One network-attached storage server can carry its input feed, so its storage design is shaped by total corpus volume and, as later sections show, by checkpoint traffic. The image example is *bandwidth-heavy*, with a feed that exceeds any single storage server and calls for the aggregate bandwidth of many servers or of local caches. Whether either demand becomes an actual bottleneck still depends on the measured delivery rate of the path that serves it.

The 175B running job sits lower still. Its 6 TB epoch spread over the 30-day window averages about 2.3 MB/s for the whole cluster, corpus bytes divided by run length, roughly 70× below the notebook's generic text job. Each token of a 175B model carries so much computation that the corpus

trickles in, which is why the running example's storage design is shaped by checkpoint traffic rather than by its input feed.

The image result is a floor for visual data rather than a ceiling. At about 303.2 GB/s across 256 nodes, the image job already consumes nearly a third of a 1 TB/s parallel file system built from 100 data-serving nodes (the architecture section 6 develops). Higher-resolution images and video clips, at megabytes per sample rather than the roughly 116 KB of a compressed ImageNet image, raise the per-node demand by an order of magnitude or more, and a fleet several times larger multiplies it again. Demand at that scale exceeds what a shared file system of this size can serve, so the architecture must rely on local NVMe caching to take repeated reads off shared storage.

The bandwidth cliff between tiers also has implications for the data format at each level. Computation consumes float16 tensors, packed token IDs, or other supported representations, while NVMe and object storage can retain compressed records. Compression reduces bytes stored and transferred but adds decoding work. The chosen format must let CPU or GPU decoding keep pace with consumption; maximum compression can reduce end-to-end throughput when decoding becomes the limiting stage. A host-decoded path stages the resulting tensors in DRAM, while a GPU-decoded path moves the transformation and its resource demand to the accelerator.

The format challenge intensifies for multi-modal training, which combines text, images, audio, and video in a single model. Serialized sizes span orders of magnitude, from 4 bytes per text token to roughly 116 KB per compressed image to megabytes per short video clip, depending on representation, compression, resolution, and duration, and each modality requires its own decoding and augmentation work. A multi-modal training job must manage these parallel streams and provision for their combined service demand. For a corpus containing 3 TB of text, 50 TB of images, and 200 TB of video, video dominates retained capacity. Its bandwidth contribution also depends on how frequently training samples it and how many bytes each sampled batch reads. Corpus size alone determines neither the delivery rate nor the modality's contribution to model quality.

The descent starts where computation actually consumes bytes: HBM, the tier fast enough to keep accelerator arithmetic fed but far too scarce to hold the full training corpus.

Tier 0 GPU HBM

The scarcest resource in the system sits closest to the arithmetic. On the H100 used here, HBM holds the active weights and activations served to the accelerator, while caches and on-chip buffers reuse portions of that state. Its stacked packaging supplies 3.35 TB/s of aggregate bandwidth, the top of the cliffs just measured. That bandwidth is what makes large-scale deep learning feasible, because a matrix multiplication involving billions of parameters reads those parameters from memory on every forward and backward pass. What HBM lacks is room.

For placing the unpartitioned running model, the immediate constraint is *capacity*. Once state fits, HBM bandwidth can still limit execution. An H100 provides 80 GB of HBM, enough to hold a 40-billion parameter model in FP16 (2 bytes per parameter), but nowhere near enough for the 175B parameter running example. The training budget for the 175B model shows how far short one device falls. The model weights in FP16 consume 350 GB. FP16 gradients require another 350 GB. The Adam optimizer maintains two additional states (momentum and variance) in FP32, consuming $175 \times 10^9 \times 4 \times 2 = 1{,}400$ GB. Activations for a single batch, depending on sequence length and batch size, can consume another 100 to 400 GB. The node-memory subtotal of section 8 stops at weights, Adam moments, and gradients; the mixed-precision contract this chapter checkpoints also retains 700 GB of FP32 master weights, which is why the total here is larger. Weights, gradients, master weights, and Adam moments therefore occupy 2.80 TB before activations and communication buffers. This capacity pressure is precisely why the partitioning in table 0.25 is mandatory. From the storage hierarchy perspective, HBM is the destination that every lower tier exists to serve. The data pipeline's purpose is to ensure that the 80 GB of HBM always contains the data the accelerator needs *next*, not the data it needed *a second ago*.

↩ High-bandwidth memory packaging, the 3D stacking and through-silicon vias behind this bandwidth, is established in section 3.

Because HBM capacity is so limited relative to both model size and dataset size, the accelerator processes data in batches. Each batch occupies a fraction of HBM for the duration of one forward-backward pass, then is discarded to make room for the next. The rate at which batches must be supplied sets the bandwidth requirement for all lower tiers.

That batch lifecycle sits inside a much larger resident footprint, and the footprint creates a "spill" dynamic down the hierarchy. When state does not fit in one HBM pool, the system has only two basic choices: split it across accelerators, or keep some of it outside HBM and fetch it when needed. The FP16 weights alone, 350 GB, need at least five 80 GB H100 accelerators, and Adam's FP32 moments add another 1.4 TB. Splitting this footprint across the cluster makes the run possible, but every shard becomes a separate piece of state that lower tiers must stage, save, and restore in step with the others. HBM scarcity is what forces the rest of the hierarchy to exist.

The razor-thin margin is a defining feature of large model training. Table 0.25 shows the HBM memory budget that each 80 GB H100 carries while the fleet trains the 175B parameter model. The table treats partitioning as a storage layout, and the chapter keeps this one layout throughout. Tensor parallelism splits the model weights eight ways inside each node, so every node holds one complete copy of the weights spread across its GPUs. Optimizer, master-weight, and gradient state are additionally sharded across the 256 nodes, so each GPU holds only its slice of that state rather than a full replica. Sharding optimizer and gradient state across data-parallel replicas while each replica keeps its weights is the second stage of the Zero Redundancy Optimizer (ZeRO), a training technique in its own right; its third stage also partitions the weights. Here only the resulting per-GPU slices matter, because they set the storage pressure HBM sees.

↪ Sharded data parallelism (ZeRO and FSDP), which partitions optimizer, gradient, and weight state across workers, is developed in section 4.

Table 0.25: HBM Memory Budget for 175B-Parameter Training: Per-GPU allocation when splitting a 175B model eight ways inside the node and sharding optimizer and gradient state across 256 nodes. The optimizer, master-weight, and gradient rows are per-GPU shards after both levels of partitioning. The resulting budget occupies most of a 80 GB HBM device, leaving limited buffer for the incoming data pipeline. Any delay in fetching the next batch from host memory risks starving the accelerator.

Component	Size per GPU
Model Weights (FP16, 8-way shard)	43.75 GB
Optimizer State (node-sharded)	0.7 GB
FP32 Master Weights (node-sharded)	0.34 GB
Activations (variable by sequence length)	10–20 GB
Gradient Buffers (FP16, node-sharded)	0.2 GB
Communication Buffers (NCCL)	2–4 GB
Total Occupied	**56.9–68.9 GB**

Even with aggressive partitioning, the total memory footprint reaches 56.9–68.9 GB in decimal gigabytes, about 66.3–80.3 percent of the HBM pool. The percentage is lower than the gigabyte figures suggest because the device's nominal 80 GB is a binary capacity, 80×2^{30} bytes, slightly more than 80 decimal gigabytes. The remaining headroom shrinks further once fragmentation and framework workspaces are included, and that headroom is all the incoming data pipeline has to work with.

An input batch and its activations occupy HBM for one training step, while model weights and optimizer state persist across steps. Prefetching the next batch therefore competes with the live training footprint for scarce capacity; a deeper input queue is useful only if the memory budget can accommodate it.

From the data pipeline's perspective, Tier 0 is not a storage tier to be managed but a constraint to be satisfied. The pipeline's purpose is to ensure that the batch the accelerator needs *next* is already resident in HBM before the *current* batch's computation completes. If it arrives late, the accelerator stalls. If it arrives early, it consumes HBM that could hold activations. The tension between "just in time" and "just too late" defines the pipeline's buffer management strategy, quantified in section 11.

Tier 1 host DRAM

One level below HBM, host DRAM serves as the staging area for the data pipeline. Every byte of training data that reaches the accelerator passes through host DRAM first (unless GPUDirect Storage bypasses it, as described in section 14). A typical training node contains 512 GB to 2 TB of system memory shared across the host CPU and its peripherals. While the bandwidth between host DRAM and the accelerator is limited to what PCIe Gen 5 (about 64 GB/s per direction, 128

GB/s bidirectional) can provide, host DRAM plays three roles in the ML storage hierarchy: it is the prefetch buffer, a home for embedding tables too large for HBM, and the augmentation workspace. Only CPU-accelerator superchips with a coherent NVLink-class host link raise that path toward the 900 GB/s that NVLink provides between accelerators. The data loader occupies two of these roles at once, because its augmentation stage and the prefetch buffer it fills both live in host DRAM.

The data loader pipeline that runs in host DRAM follows four ordered stages:

1. **Read**: I/O threads read compressed data from NVMe or network storage into read buffers.
2. **Decode**: Decode threads decompress the data, such as JPEG decoding for images or decompression for text.
3. **Augment**: Augmentation threads apply transformations, including random cropping, flipping, and normalization for images or tokenization and sequence packing for text.
4. **Collate**: The collation stage assembles individual samples into batches and places them in pinned memory for efficient direct memory access (DMA) transfer to the accelerator.

That final placement matters because pinned, or page-locked, memory (exposed in PyTorch as `pin_memory=True` on the `DataLoader`) prevents the operating system from paging out the buffer before the DMA transfer completes, providing a stable host buffer for the subsequent host-to-accelerator DMA transfer. Pinning the collated batch does not make an ordinary file read a direct NVMe-to-batch transfer; storage reading and CPU preprocessing still follow their configured paths. Each stage runs concurrently, forming a pipeline that overlaps I/O, CPU computation, and data transfer. The efficiency of this pipeline determines whether host DRAM can keep up with the accelerator's appetite.

Host DRAM's most critical function is serving as a prefetch buffer. The CPU data loader reads data from lower tiers (NVMe or network storage), decodes compressed formats (JPEG, gzip), applies augmentations (random crops, flips, color jitter), and assembles tensors in host DRAM. When the accelerator finishes processing batch k, batch $k+1$ should already be assembled in host memory, ready for transfer to HBM. The depth of this prefetch buffer determines how much I/O variance the pipeline can absorb without stalling.

Recommendation workloads, the regime of Archetype B (DLRM at Scale), place a different demand on host DRAM: hosting embedding tables that can exceed 100 GB, far too large for HBM. These tables reside in host DRAM and are accessed through lookups that fetch only the rows needed for the current batch. The bandwidth between host DRAM and HBM becomes the critical bottleneck for these workloads, and some systems go further, pooling embedding tables in the DRAM of dedicated CPU servers and returning only the requested rows over remote direct memory access (RDMA).

Host DRAM also provides the augmentation workspace that the CPU pipeline requires. Data augmentation operations (resizing images, tokenizing text, applying noise) execute on the CPU and require temporary memory for intermediate results. A training pipeline that applies five augmentations to a 256-image batch at 116 KB per image needs tens of megabytes of working space for each augmentation stage. Although modest per-batch, this memory accumulates when multiple data loader workers run in parallel.

Some augmentation pipelines have moved from CPU to GPU execution, using libraries like NVIDIA Data Loading Library (DALI) to perform image decoding and augmentation on the accelerator itself. This approach eliminates the CPU augmentation bottleneck and reduces the host DRAM bandwidth demand, because compressed data (smaller) is transferred to the GPU instead of decoded data (larger). The trade-off is that augmentation on the GPU consumes HBM capacity and compute cycles that would otherwise be available for training. For *compute-bound* workloads (where the GPU is already saturated with matrix multiplications), GPU-based augmentation is counterproductive. For *I/O-bound* workloads (where the GPU waits for data), it can improve overall throughput by shifting work from the bottleneck (CPU) to the resource with spare capacity (GPU).

The three roles interact in subtle ways. The prefetch buffer and the augmentation workspace compete for the same physical DRAM, and embedding tables consume capacity that could otherwise serve as deeper prefetch queues. A node with 512 GB of DRAM hosting a 200 GB embedding table has only 312 GB remaining for prefetching and augmentation. If the data loader uses 8 workers, each maintaining a decode buffer of 1 GB, the effective prefetch capacity drops further. System

architects must balance these competing demands by profiling the actual memory consumption of each pipeline stage and provisioning DRAM accordingly.

The physical layout of DRAM has performance implications that are invisible in single-socket benchmarks but critical at production scale. Multi-socket servers exhibit non-uniform memory access (NUMA) topology where each CPU socket has "local" DRAM that it can access at full bandwidth and "remote" DRAM attached to the other socket at roughly half bandwidth. In a dual-socket DGX node with eight GPUs split four per socket, a data loader thread running on socket 0 that allocates its prefetch buffer in socket 1's DRAM pays a roughly 2× bandwidth penalty on every buffer access. The fix is NUMA-aware allocation: pin each data loader worker to the same CPU socket (the same NUMA domain) as the GPUs it serves, and use `numactl` or `libnuma` to ensure memory allocation stays local. Proper NUMA pinning can improve data loading throughput by 30–50 percent on dual-socket systems, a gain that is invisible in development environments but essential when every percentage point of utilization translates to thousands of dollars per day.

Host DRAM sits below the first cliff of section 4, and the host-to-GPU interconnect adds a separate cliff, with effective transfer bandwidth depending on whether the node uses PCIe or NVLink. In the conventional path that stages payloads through host memory, a depleted DRAM prefetch buffer leaves the accelerator waiting for lower tiers. The direct path of section 14 removes that staging copy when the data layout and devices support it. In the running example, the 256-node cluster requires each node's host DRAM to sustain a continuous flow of decoded, augmented batches ready for PCIe transfer. If the NVMe-to-DRAM read pipeline falls behind by even a few hundred milliseconds, the prefetch buffer drains and the accelerator idles until the next batch arrives.

Tier 2 local NVMe

When the working set exceeds host DRAM, the system falls to Tier 2: the local NVMe drives attached directly to the compute node. NVMe[4] provides a high-performance protocol designed specifically for solid-state drives, achieving 7 GB/s of sequential throughput per drive. With four drives in a RAID-0 configuration, a single node can sustain roughly 28 GB/s of sequential reads before overhead, sufficient to stream the 6 TB serialized dataset from local disk in about 3.6 minutes under ideal sequential conditions.

In ML training, local NVMe acts as a warm cache, storing data shards fetched from distributed storage. Workers can reread resident shards across epochs without fetching them over the network again. The savings depend on reuse, cache capacity, and whether remote reads cross a charged transfer boundary (section 15). Staging pays an initial transfer cost and provisions local capacity in exchange for avoiding later remote reads; it does not eliminate storage cost or read latency.

The warm cache pattern requires careful capacity planning. A training node with four 7.68 TB NVMe drives provides approximately 30.7 TB of local storage. For the running example, the 6 TB serialized dataset fits comfortably on a single node's local storage, with room for checkpoint staging and temporary augmentation buffers. A multi-modal training job combining 20 TB of images, 10 TB of text, and 5 TB of audio totals 35 TB, exceeding local capacity by about 4.3 TB and forcing the pipeline to stream from the parallel file system for at least part of the dataset. The design trade-off is between provisioning more local NVMe (which increases node cost) and accepting network-dependent reads (which risks latency spikes).

NVMe's internal parallelism is key to its throughput advantage over traditional storage. A data loader with 32 workers, each issuing asynchronous reads, can keep the NVMe controller's internal pipeline saturated because the protocol's deep queues admit far more outstanding commands than AHCI's single 32-command queue. This queue architecture, together with PCIe lanes that far exceed the roughly 550 MB/s ceiling of a 6 Gb/s SATA link, explains why NVMe delivers 10× to 50× the throughput of SATA SSDs with identical NAND flash, even though the storage medium is the same.

The I/O wall takes a deceptive form at this tier. The HBM-to-NVMe ratio of section 4 does not set demand, so the question here is whether the stripe meets the input-batch rate, not whether it approaches HBM. Pipelining overlaps that delivery with compute (section 11), while GPUDirect Storage (section 14) can remove host payload copies when those copies limit throughput. The wall is easy to miss because NVMe performance is excellent by historical standards. A storage engineer accustomed to HDD-era throughput of 150 MB/s might view 28 GB/s from a local RAID-0 stripe as superabundant. Whether 28 GB/s suffices depends on the batch representation and consumption

[4] **NVMe (Non-Volatile Memory Express)**: A storage protocol designed for SSDs, connecting directly to the CPU via PCIe lanes. NVMe replaced Advanced Host Controller Interface (AHCI)'s single queue of 32 commands with 64K queues of 64K commands each, a 130-million-fold increase in maximum outstanding I/O. This deep queue parallelism is what allows a multi-worker ML data loader to saturate the drive's bandwidth; under AHCI, the single 32-command queue caps the outstanding requests that many loader workers can expose, regardless of flash speed.

rate. Compact text may fit within this budget, while image or video inputs may require more bandwidth; overlap hides transfer time only when sustained supply keeps pace with demand.

Local NVMe also supports local checkpoint staging. Writing a consistent snapshot locally and replicating it to shared storage in the background can shorten T_{write}, the time training pauses to save a checkpoint, when the shared write would otherwise be slower. Resuming after a local save accepts a period during which a node failure can destroy the new shard. The storage design must therefore specify both the exposed pause and the later durability boundary, while retaining a previous recoverable generation. Section 15 develops this trade-off and its timing model.

The same local NVMe tier also pays for itself by recovering utilization lost to remote-read latency.

Napkin Math 4.3: Return on investment of local NVMe caching

Problem: A vision-model training pipeline, a separate workload from the 175B language model, runs each step in 800 ms on the 1,024-GPU reference cluster. It reads from a shared parallel file system, and even with prefetching, congestion bursts on that shared service drain the loader's buffer and leave an average of 150 ms of exposed I/O wait per step. Assume that serving the same shards from local NVMe leaves only 10 ms of exposed wait per step, the residue of local tail latency that the prefetch queue does not cover. How much does adding local NVMe SSDs to each node improve GPU utilization?

Math: GPU utilization here means the fraction of step time spent in computation, an active-time fraction rather than model FLOPs utilization.

1. **Remote Only**: 800 ms / (800 ms + 150 ms) $\approx$ 84.2 percent.
2. **Local Cache**: Prefetching from local NVMe removes the congestion bursts of the shared service, leaving the assumed local residue.
   - New Util: 800 ms / (800 ms + 10 ms) $\approx$ 98.8 percent.

Systems insight: Local storage can act as a *GPU utilization multiplier*. In this scenario, adding a $500 NVMe drive to a node whose accelerators each cost $30,000 recovers 14.6 percent of the GPU's capacity that was previously wasted on I/O wait. Across the 1,024-GPU cluster, that utilization gain is equivalent to adding 149 GPUs worth of useful work without buying that many more accelerators. The gain is exactly the exposed remote wait that local reads remove, so it is large only when shared-storage congestion leaves a wait of this size; where it does, local NVMe is not auxiliary but the physical buffer that decouples expensive compute from unpredictable shared storage.

A practical concern at this tier is SSD endurance. NAND flash memory can sustain a limited number of write-erase cycles before the cells degrade. Enterprise NVMe drives are rated for 1 to 3 drive writes per day (DWPD) over a 5-year lifespan. For a 7.68 TB drive at 1 DWPD, this means the drive can absorb 7.68 TB of writes per day, or roughly 14 PB total over its lifetime. ML training workloads are predominantly read-heavy (the dataset is written once and read many times), which is favorable for SSD endurance. However, checkpoint writes can be intensive: if each node saves its roughly 10 GB share of the running example's checkpoint every 10 minutes, that is about 1.4 TB per day of checkpoint writes spread across the node's drives, well within a four-drive node's 1 DWPD budget. The risk emerges when local NVMe is used as a staging buffer for both checkpoint writes and dataset caching: the combined write volume from initial dataset staging plus repeated checkpoint saves must remain within the drive's endurance rating.

Data formats for training

Local NVMe can stream 28 GB/s per node, but packaging determines how much of that bandwidth reaches the loader. The same multi-terabyte dataset stored in different formats can yield I/O throughput that differs by over 100$\times$ on identical hardware, because each format charges a different access cost: per-file metadata, unnecessary feature reads, or sequential shard traversal. A directory containing one JPEG per sample pays a separate file open and metadata lookup for every image. At roughly 10 to 50 microseconds per open in the kernel's file-system layer, a node reading 8,000

images per second spends 80 to 400 ms of CPU time per second on opens alone, before it decodes a single byte. On a shared file system the same operations also queue at a metadata service, the fleet-scale form of this cost that section 6 develops as the small file problem. A standard ImageNet training pipeline makes the cost of the wrong format visible.

Napkin Math 4.4: The ImageNet bottleneck analysis

Problem: A ResNet-50 training job on ImageNet (1.28M, ~116 KB average) targets 1000 images/s. Can individual JPEG files on an HDD sustain that rate, or does the job need NVMe?

Math:

1. **Raw Bandwidth**: 1000 images/s $\times$ 116 KB = 116 MB/s.
2. **HDD reality**: A 7200 RPM hard disk drive (HDD) delivers 100 IOPS at random reads. Sustaining 1000 images/s requires 10× more IOPS than the disk provides.
3. **Result**: When every image is a separate random read, shuffling individual files on an HDD will starve the GPU, capping utilization at about 10 percent before decode, seek, and file-system overheads.

Systems insight: Two fixes work, and they remove different limits. NVMe answers a random read in roughly 100 µs rather than the milliseconds of a mechanical seek, so even one outstanding request covers the 1000 images/s that the HDD's 100 IOPS cannot. Alternatively, converting the dataset to a sequential format (TFRecord/WebDataset) removes the random reads altogether and turns the HDD problem into a bandwidth one, in which the job needs 116 MB/s, within the roughly 150 MB/s that one HDD streams sequentially.

The first format choice is the record layout. Row-oriented formats, such as CSV or JSON lines, store successive records together and are easy to inspect and debug. They can stream many records from one file, although parsing text and reading unused fields consume CPU cycles and bandwidth.

A second choice solves a different storage problem. Columnar formats like Apache Parquet and Apache Arrow avoid unnecessary reads when tabular features can be selected before transfer. They organize data by column rather than by row, which allows for excellent compression as data within a column is typically of the same type and has lower entropy. Column pruning lets the reader fetch only required features. Predicate pushdown applies filters at the storage reader and can skip groups of records using their metadata, further reducing unnecessary I/O. These formats are well-suited for tabular ML tasks and feature engineering but are less natural for unstructured data like images or audio, which are treated as atomic blobs.

A third choice addresses the training access pattern directly. Sequential streaming formats reduce per-sample metadata to the cost of opening a shard. TFRecord, Mosaic's StreamingDataset format (Databricks 2026), and WebDataset[5] group many samples into large, contiguous binary files called shards. WebDataset uses standard `tar` archives, in which each sample keeps its image, label, and metadata entries while the loader streams the archive in order. A data loader opens a single shard and streams its contents sequentially, amortizing the open over thousands of samples. The `tar`-based formats have the added advantage of being valid targets for HTTP byte-range requests, making them ideal for streaming data directly from object storage without downloading the entire file first.

A key trade-off within streaming formats is the presence of an index. TFRecord readers often rely on a separate index file that records each sample's byte offset within a shard, while HDF5 embeds its index in the file itself. This enables efficient random access within a shard but introduces a metadata dependency: the index must be read and held in memory. WebDataset is indexless, because each record in the `tar` archive contains its own header specifying its size, allowing for purely sequential streaming without any external metadata. The trade-off is that indexless formats cannot efficiently seek to an arbitrary sample within a shard, a capability that matters for curriculum learning or active learning workloads that require nonsequential data access.

Compression integration also varies across formats, and it trades storage bytes against CPU decoding work. Parquet integrates compression at the column level, exploiting type homogeneity for high ratios. WebDataset and TFRecord typically leave compression to the individual sample: a

[5] **WebDataset**: A data format that repurposes standard POSIX tar archives for ML training. The design insight is that tar's sequential header-then-data layout, invented in 1979 for tape backup, maps perfectly onto the streaming access pattern that ML data loaders need. Because tar archives are valid HTTP byte-range targets, a data loader can stream training samples directly from object storage without staging them on a parallel file system or local NVMe first.

WebDataset of images stores already-compressed JPEG files, while a text dataset might apply zstd compression per shard, and the host CPU pays for that decompression. Consider two illustrative codecs on the same corpus: a lighter codec compresses 3:1 and produces 1.5 GB/s of decoded output per CPU core, while a denser codec compresses 4:1 and produces 0.5 GB/s per core. These are scenario assumptions, not fixed properties of named codec levels. At the 28 GB/s local NVMe rate, their potential decoded output rates are 84 GB/s and 112 GB/s, respectively, provided decoding keeps pace. Sustaining those different output rates requires 56 versus 224 cores, so the denser codec needs 4× as many. Running each codec at the drives' full output is the worst case, an upper bound on decode work; a node needs only enough cores to decode its own share of demand. The generic text job of notebook 4.2 asks the entire cluster for about 167.8 MB/s, which a single core of either codec covers, so these core counts bind only for image and video feeds whose decoded demand per node approaches the drives' rate. With fewer cores than that demand requires, decoding limits delivery before storage saturates, so compression is chosen from the measured corpus, decoder, and available CPU budget rather than from the compression ratio alone.

For the running example, the 1.5 trillion token dataset is stored as roughly 2,000 shards of 3 GB each in a custom binary format. Each shard contains a small header (token count, vocabulary size, byte order) followed by a contiguous array of 4-byte token IDs. The number of `open()` calls per epoch is therefore the number of shards, not the number of tokens (trillions), an approximately 750,000,000× reduction in metadata operations that makes streaming from both local NVMe and remote storage feasible at training scale. When staged on POSIX storage such as local NVMe or a parallel file system, the data loader memory-maps the shard and indexes directly into the token array by position, achieving near-peak read bandwidth with zero per-sample metadata overhead. When the same shards are read directly from object storage, the loader uses HTTP ranged GET streaming and an explicit local buffer rather than memory mapping. Table 0.26 compares the format choices by the access cost they impose on the storage path.

Table 0.26: Data Format Comparison for ML Training: Per-sample overhead determines whether the storage hardware's bandwidth is realized or wasted on metadata operations.

Format	Overhead/Sample	Random Access	Streaming	Compression
Individual files	≈ 50 µs (open/stat/close)	Yes	Poor	Per-file
Parquet	≈ 1 µs (row group seek)	Yes (row group)	Good	Column-level
TFRecord	≈ 0.1 µs (index lookup)	With index	Excellent	Per-record
WebDataset (`tar`)	~0 (sequential)	No	Excellent	Per-sample
Raw binary (tokens)	0	Yes (byte offset)	Excellent	None needed

Packaging removes the per-file cost within one node, but no node-local format gives every node the same view of the data. That requirement belongs to the next tier.

Tier 3 parallel file systems

Beyond the single node, the workload requires a shared namespace where all workers can access the same datasets and where durable checkpoints are globally visible. This is the role of the parallel file system.

Definition 4.1: Parallel file system

Parallel file system (PFS) is a distributed storage architecture for ML training clusters that stripes data across many storage servers to provide aggregate throughput exceeding the capacity of any single device.

1. **Significance**: A PFS aggregates storage I/O bandwidth ($BW_{storage}$) across object storage servers (OSS). Twenty OSS nodes delivering 10 GB/s each offer 200 GB/s aggregate. When the client and network sustain that full rate, a 10 GB striped shard loads in about

50 ms rather than the 1 second a single 10 GB/s server would need. The rate that enters the data-movement term D_{vol}/BW of the single-machine iron law recalled in section 11 is the bandwidth that reaches the actual consumer, not the aggregate rating.

2. **Distinction**: Unlike network-attached storage, where every I/O request routes through a single server, a PFS client receives stripe location metadata from a dedicated metadata server (MDS) and then reads data directly from multiple OSS nodes in parallel: the MDS and OSS paths are architecturally separated, so data bandwidth scales with OSS count while metadata operations scale with MDS count.
3. **Common pitfall**: A frequent misconception is that a PFS has unlimited throughput if enough OSS nodes are added. In reality, a Lustre MDS handles roughly 100,000–300,000 metadata operations per second; a one-time burst of 10,000 opens does not by itself establish sustained saturation. The MDS becomes a throughput bottleneck when the aggregate metadata-operation arrival rate exceeds its service rate, regardless of spare bandwidth at the OSS nodes.

Figure 0.43 traces how a Lustre-style parallel file system decouples metadata lookups from bulk data movement, separating two concerns that traditional file systems handle together (Schwan 2003). Metadata servers (MDS) manage the namespace (persisting file layouts and attributes on metadata targets, or MDTs): file creation, directory listings, permission checks, and lock management. Object storage servers (OSS)[6] manage the actual data blocks, each serving a stripe of every large file. When a client opens a 10 GB training shard, the MDS tells the client which OSS nodes hold which stripes, and the client reads from all of them in parallel. A Lustre[7] deployment with 100 OSS nodes, each providing 10 GB/s, delivers an aggregate 1 TB/s.

[6] **OSS (Object Storage Server)**: In parallel file system terminology, "object" means a chunk of striped file data managed by an object storage target, a usage that predates cloud object storage (S3, GCS) by over a decade. Confusing the two is a common source of miscommunication: when a Lustre administrator says "add more OSS nodes," they mean adding data-serving capacity to the parallel file system, not provisioning cloud buckets.

[7] **Lustre**: A portmanteau of "Linux" and "cluster," developed at Carnegie Mellon University and first deployed in production in 2003. Lustre is common in HPC and ML infrastructure because its architecture scales aggregate bandwidth linearly with the number of OSS nodes, the same property that makes it a natural choice for training clusters where a single job may demand hundreds of GB/s of sustained read throughput.

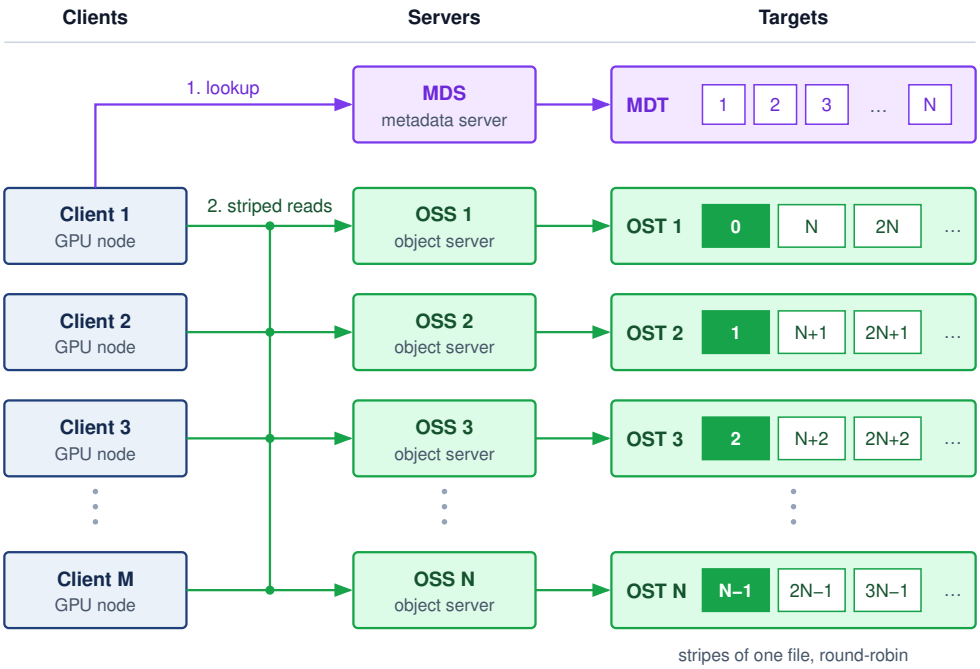


Figure 0.43: Parallel file system architecture: A client makes one metadata request (MDS → MDT) to learn a file's stripe map, then reads the stripes directly from the object storage servers (OSS → OST) in parallel. Each OST holds every Nth stripe of the file in round-robin order, so consecutive stripes (dark) sit on different servers and one client reads them at once. The shared data path lets every client draw on every OSS, so aggregate bandwidth grows with the number of servers while metadata traffic stays on a separate path.

This abstract architecture has concrete implications for performance tuning. When a training job creates a new dataset directory on Lustre, the administrator configures the stripe count (the number of object storage targets, or OSTs, a file is spread across) and stripe size (the chunk size written to each OST) for that directory (Lustre Wiki 2017). For large sequential-read training shards, administrators may choose wider striping and multi-megabyte stripe sizes so a single file can draw bandwidth from multiple OSS nodes; Lustre's striping guide treats wide striping as useful for very large files or files accessed by many clients, while smaller files often use fewer stripes to reduce overhead (Lustre Wiki 2019). A 4 GB data shard striped across 100 OSTs with 4 MB stripes places roughly 10 stripes on each OST. When a data loader reads large contiguous ranges, the Lustre client can issue parallel read requests to the OSS nodes holding those stripes, aggregating their bandwidth. The client also maintains its own read-ahead buffer, prefetching the next several stripes while the application processes the current ones. This file-system-level read-ahead is distinct from the data loader's application-level prefetch buffer; the two layers of prefetching compound to provide deep latency hiding, making the physical distance to the OSS nodes nearly transparent to the training process.

The separation between metadata and data paths is what enables the aggregate bandwidth that ML workloads demand. In GPFS[8] (IBM Spectrum Scale), the architecture takes a different approach: it stripes data and metadata across shared disks and coordinates concurrent access through token-based distributed locking (Schmuck and Haskin 2002). The result is not a simple MDS/OSS split; it is a shared-disk design whose metadata and data placement can be distributed while the lock protocol preserves consistency across clients. The trade-off is greater complexity in lock management, which must scale to thousands of nodes.

The data path scales with the number of object storage servers, but every file still begins with a request to the metadata service, and that service has a finite operation rate. That finite rate is the source of the small file problem. The per-open cost that section 5 charged to one node's CPU now lands on a metadata service shared by the whole fleet. Each `open()` system call requires a metadata lookup, lock acquisition, and attribute fetch. When a dataset of millions of 10 KB images is stored as individual files and 10,000 workers, a fleet several times the running cluster, each open a new file every few samples, the aggregate open rate exceeds the few hundred thousand operations per second an MDS typically serves. The MDS becomes the serialization point, and delivery collapses to its operation rate long before the data links saturate.

8 **GPFS (General Parallel File System)**: Developed by IBM Research starting in 1998, now marketed as IBM Spectrum Scale. Unlike Lustre's dedicated metadata-server/object-server organization, GPFS is a shared-disk parallel file system that can stripe data and metadata and uses token-based locking to coordinate concurrent client access. For ML checkpoint writes, this distributed coordination model can reduce reliance on a single dedicated metadata path, but it also makes lock behavior part of the performance envelope.

Definition 4.2: Small file problem

Small file problem is an ML data-loading pathology in which per-file operations overwhelm a storage system's metadata service.

1. **Significance**: `open`, `stat`, and `close` requests from 10,000 workers can serialize at the metadata service, idle the cluster, and reduce effective I/O bandwidth $(\mathrm{BW}_{\mathrm{storage}})$.
2. **Distinction**: This is a metadata request-rate and latency (L_{lat}) problem, not a bulk bit-rate problem.
3. **Common pitfall**: Faster SSDs do not fix this format problem. Packing samples into sequential containers such as TFRecord or Parquet amortizes metadata operations across many samples.

At production scale, the metadata bottleneck can collapse an otherwise high-bandwidth file system.

Example 4.1: The metadata meltdown

Scenario: A large-scale training cluster migrates from a preprocessed sequential dataset to 200 million raw image files stored individually on a parallel file system provisioned for 500 GB/s aggregate bandwidth.

Diagnosis: The file system delivers less than 1 percent of rated throughput. Millions of per-second `stat()` and `open()` calls overwhelm the metadata servers, choking data loaders despite abundant network and storage bandwidth.

Systems lesson: Metadata contention limits delivery when operation demand exceeds metadata service capacity. Bundling 200 million raw images into 50,000 large tar shards (for example, WebDataset) reduces the file count by 4,000× and amortizes per-file operations across samples. Packaging alone does not prevent startup contention if loaders still enumerate files with per-file `stat()` calls; distributing a precomputed dataset manifest removes those repeated lookups from the hot path. Measure metadata operation rate alongside byte bandwidth to determine which service limits delivery.

Striping and aggregation solve different problems. Striping distributes large files across data servers; aggregation, the shard packaging of section 5, reduces the number of files the MDS must track. Realized bandwidth depends on the reader. A read contained within one stripe uses one server, while enough concurrent reads spanning stripes can use several servers. Wider striping helps only when the read sizes and concurrency exploit those paths; small files usually need fewer stripes.

Parallel file systems provide a shared namespace and lock management that support coordinated checkpoints (Schmuck and Haskin 2002). Recovery requires every reader of a committed checkpoint to observe the same completed state. The file system supplies storage primitives, but the training system must coordinate the shards into one restorable generation. A completed write to one file does not establish that all other checkpoint files are complete.

The consistency model has subtleties that matter for ML workloads. For training data reads, immutable shards remove conflicts with concurrent writers once the dataset version has been published. Readers must still agree on which completed version belongs to the run. Checkpoints require more. File-system locks can coordinate individual writes, but they do not by themselves make a checkpoint that spans many files atomic, so a multi-file generation needs an application-level publication protocol, developed in section 15.

The performance of a parallel file system depends on the *balance* of load across OSS nodes as well as their *number*. If a shard uses 10 of 100 equally provisioned OSS nodes, those servers offer at most 10 percent of the system's aggregate server bandwidth. Realized delivery can be lower because of client limits, request size, or insufficient concurrency. Conversely, when many concurrent readers draw on shards striped across all 100 servers, demand spreads over every server and realized bandwidth can approach the system's rating, provided the clients and network keep pace. Placement and access scheduling therefore matter alongside the number of storage servers.

At the scale of thousands of nodes, tail latency (Dean and Barroso 2013a) can dominate exposed input wait. If a training step requires data from 100 storage servers and each independently has a 1 percent chance of being slow, the probability that all 100 respond quickly is $0.99^{100} = 0.366$, meaning over 63 percent of these request sets contain at least one slow response. Shared congestion can correlate delays, changing that probability. A slow response delays the step only when prefetching fails to hide it and the required input lies on the step's critical path. When it does, the delay is not confined to one worker, because synchronous data-parallel training waits for every worker at the next collective, so one late fetch stretches the whole fleet's step.

Systems can mitigate tail latency through hedged requests: after a chosen delay, the client issues a redundant read to another replica and uses the first valid response. The trigger delay trades faster tail completion against extra work (Dean and Barroso 2013b). An independence model can multiply the probabilities of two slow replicas, but shared congestion and the later start of the hedge invalidate a simple squared-probability latency guarantee. Issuing a hedge at the median response time would duplicate roughly half of requests before accounting for cancellation; that load can worsen the congestion the scheme aims to avoid. A hedge therefore pays off only when its trigger sits in the measured tail and the duplicate traffic it adds stays within the spare service capacity.

The effectiveness of hedged requests depends on the replicated data layout. If both replicas reside on OSS nodes that share the same network switch, a switch failure makes both copies simultaneously unavailable. Effective hedging requires failure-domain-aware placement: replicas should reside in

different racks, connected through different top-of-rack switches, so that the failure of any single component affects at most one replica.

In production clusters, the parallel file system is a shared utility, simultaneously servicing dozens of concurrent training jobs with different I/O patterns. At any given moment, a large language model job might be streaming sequentially through text shards, a computer vision job might be reading random image shards, and a checkpoint storm from a third job could be saturating write bandwidth. This concurrency gives rise to the noisy neighbor problem, where one job's I/O pattern severely degrades performance for all other jobs. A checkpoint save that consumes a disproportionate share of the PFS's internal network bandwidth causes read latency for other jobs to spike, potentially stalling their training pipelines. PFS administrators mitigate this through I/O scheduling policies (quality-of-service tiers, bandwidth quotas per job), but these policies add administrative complexity and can reduce peak single-job throughput.

A related challenge is namespace isolation. Different teams and workloads require different storage configurations. A team training on millions of 100 KB images first needs to aggregate samples to reduce metadata operations; increasing stripe count does not remove per-file metadata work. A team working with large video shards can use wider striping when read sizes and concurrency exploit the additional data paths. Misconfigured striping for one team's workload can create hotspots that degrade performance for the entire shared file system. The impact of sharing is easy to quantify: a PFS with 1 TB/s aggregate bandwidth, shared across 10 concurrent training jobs, provides only 100 GB/s per job on average. If one job's checkpoint storm consumes 400 GB/s for 10 seconds, the remaining nine jobs share 600 GB/s, a 33 percent reduction that can trigger data stalls in their accelerator pipelines.

Checkpoint 4.2: Parallel file system design

Consider a training cluster with 512 nodes, each running 8 GPUs. The training job requires 400 GB/s of aggregate read bandwidth.

- ☐ **OSS count**: calculate the number of OSS nodes required when each Lustre OSS delivers 10 GB/s.
- ☐ **Metadata cost**: calculate the time required to open 200 million 116 KB image files sequentially when each `open()` call takes 50 µs on the MDS, then state the practical implication.
- ☐ **Shard count**: calculate the number of metadata operations needed to read the full dataset when images are bundled into 4 GB tar files.

Parallel file systems solve the shared-namespace problem for active training clusters, but their cost per byte is too high for the organization's complete data holdings. The petabytes of raw training data, historical checkpoints, and preprocessed datasets that an ML organization accumulates over years require a tier optimized for capacity and durability rather than bandwidth.

Tier 4 object storage

At the scale of petabytes, object storage provides the durable, cost-effective foundation of the hierarchy. Services like Amazon S3 and Google Cloud Storage organize data in object namespaces where objects are retrieved by keys rather than by POSIX directory paths (Amazon Web Services 2026c; Google Cloud 2026a). Unlike file systems, which organize data in hierarchical directories with metadata-rich operations (rename, link, permission inheritance), object storage treats each object as an opaque blob identified by a unique key. The simpler interface changes the namespace operations exposed to clients; the service still manages metadata for placement, versions, access control, and integrity as capacity grows.

Services such as Amazon S3 publish an "eleven nines"[9] annual durability target (99.999999999 percent). Erasure coding,[10] replication, placement, and repair contribute to storage protection, but a coding scheme alone does not establish a service's durability target. Selecting a source-of-truth tier for training data and checkpoint archives requires checking the chosen service's failure model alongside versioning, lifecycle policy, access control, and recovery testing.

9 **Eleven Nines (99.999999999 Percent Durability)**: A design target of 11 nines annual durability corresponds to an expected loss probability of about 10^{-11} per object-year; for one million objects, that is about one expected object loss per 100,000 years. The same service indirection, erasure coding, replication, and metadata lookup that support durability also make object storage a higher-latency tier than local NVMe or a warm parallel file system, so real-time data pipelines need prefetch buffering.

10 **Erasure Coding**: Built on Reed-Solomon codes (Reed and Solomon 1960), which use maximum-distance-separable coding to recover the original data from any sufficient subset of encoded fragments. In storage systems, Reed-Solomon-style codes and later local-reconstruction variants trade storage overhead against repair bandwidth and degraded-read cost (Plank 1997; Huang et al. 2012). Local-reconstruction codes, for example, read fewer surviving fragments to rebuild a lost one, cutting repair traffic at the price of a little extra capacity.

Three different guarantees govern whether that source of truth is usable. Durability asks whether acknowledged data survives failures; availability asks whether the storage service responds when a client needs it; and consistency asks which version a read is allowed to observe when writes overlap or replicas disagree. Replication can improve durability and availability without by itself guaranteeing that a reader sees the newest committed checkpoint. A recovery design must therefore state all three properties instead of treating a durability percentage as a complete reliability contract.

Definition 4.3: Erasure coding

Erasure coding protects stored data by adding redundant fragments, with the Reed-Solomon scheme considered here encoding d data and m parity blocks so that any d remaining fragments recover the original.

1. **Significance**: Coding can protect against fragment loss with less capacity overhead than full replication. A 4+2 Reed-Solomon code stores four data fragments and two parity fragments, tolerating two unavailable fragments at 1.5× storage overhead instead of the 3× overhead of triple replication. Actual durability also depends on failure correlation, placement, detection, and repair.
2. **Distinction**: Unlike replication (which stores complete copies), erasure coding uses mathematical encoding (for example, Reed-Solomon) to distribute redundant information across different failure domains (disks, racks, or sites).
3. **Common pitfall**: A frequent misconception is that erasure coding is "free durability." In reality, it is a latency-compute trade-off: reconstructing data after a failure requires additional CPU cycles and increases the p99 latency of the storage read.

Erasure coding lets the service recover data without requiring the training application to manage fragments. In the form considered here, the service retains the original d data fragments alongside parity, so healthy reads can use the data fragments directly. When a required fragment is unavailable, reconstruction uses surviving data and parity fragments. The object interface hides that recovery procedure, but additional I/O, network traffic, and decoding can remain visible as longer read latency. Protection against data loss does not imply unchanged service time during a failure.

The cost advantage of object storage is significant: at a representative $0.02/GB/month, its recurring capacity rate is 5× lower than the local-NVMe rate assumed here, and section 15 converts that ratio into annual costs for a 100 TB dataset. Comparing it with HBM acquisition cost additionally requires a hardware lifetime and utilization assumption. This cost advantage makes object storage a common home for the organization's training data lake, where raw data, preprocessed datasets, and archived model artifacts can reside durably.

Request latency also matters. Design estimates use 50 to 100 ms for an object GET as a representative planning range rather than a universal service guarantee. Much of that delay is the price of the indirection that provides durability. The service looks up the object's location in a distributed metadata index, determines which fragments to read, fetches them from potentially different storage nodes, and reconstructs data when a fragment is unavailable, all on top of the client network path and queueing. Large transfers amortize per-request overhead across more bytes, while small transfers can spend most of their elapsed time on that overhead. Request size and concurrency therefore enter the delivery budget alongside aggregate bandwidth.

The remedy is the shard packaging of section 5, applied here to request latency rather than metadata operations. Formats like WebDataset (Aizman et al. 2019) or Mosaic Streaming (Databricks 2026) bundle samples into multi-gigabyte shards that transform high-latency random access into high-bandwidth sequential streaming. Rather than issuing billions of small GET requests, the data loader issues hundreds of large reads in parallel, each fetching an entire shard that contains thousands of samples. With sufficient parallelism and colocated network capacity, object storage can sustain high aggregate throughput, enough to feed large training clusters for some workloads. The streaming pattern works by assigning each data loader worker a subset of shards and having it read them sequentially. Within each shard, samples are stored contiguously, so the worker decodes

them in order and shuffles them in a local buffer. This approach achieves pseudo-random access across the dataset while maintaining sequential I/O at the storage level.

The architecture of a streaming data loader for object storage differs from a local-storage loader in important ways. A local-storage loader can use memory-mapped I/O to treat the dataset as a virtual memory region, relying on the operating system's page fault mechanism to load data on demand. This approach is elegant but incompatible with object storage, which does not support the POSIX file system interface that memory mapping requires. Instead, an object-storage loader must explicitly manage HTTP connections, issue ranged GET requests for specific byte ranges within shards, handle retries on transient failures, and manage a local buffer pool for decoded samples. Libraries like WebDataset and Mosaic Streaming encapsulate this complexity, presenting a simple iterator interface to the training loop while managing the HTTP transport and buffering internally.

Applying this streaming architecture to the running example makes the design concrete as an alternative to the staged path the chapter adopts. Instead of copying shards to local NVMe at job start, the cluster would read them from the object store throughout the run. The tokenized training set is stored in an S3-like object store as roughly 2,000 shards of 3 GB each. The streaming architecture assigns each of the 256 compute nodes a unique subset of roughly 8 shards. Within each node, 8 data loader worker processes issue concurrent HTTP `Range` requests to fetch 256 MB chunks from their assigned shards. Across the cluster, this results in 2,048 concurrent requests, allowing aggregate throughput in the 50–100 GB/s range when the object store and network path are provisioned for it, far exceeding the roughly 167.8 MB/s required by the generic text job in the text-versus-image comparison. The running example's average input demand is lower still. At these provisioned service rates, the network between the compute virtual private cloud (VPC) and the object-storage endpoint can limit maximum streaming throughput without making input delivery the running job's bottleneck. Organizations that co-locate compute and storage in the same cloud availability zone can reduce cross-network latency, directly reducing the required prefetch buffer depth and improving overall pipeline efficiency.

That request parallelism is what object storage rewards. Each of the 2,048 GET requests is independent and can be served by a different storage node within the cloud provider's infrastructure, and the count grows with the fleet. With each request fetching a 256 MB chunk of a shard, the aggregate throughput depends on the cloud provider's network capacity, internal bandwidth, and request-rate quotas. The practical limit is often the network bandwidth between the compute cluster and the object storage service, not the storage service's internal media bandwidth.

Many object storage services provide strong read-after-write consistency, which means that a subsequent read of an acknowledged object sees the completed write. Amazon S3 announced strong read-after-write consistency for object writes and overwrites, together with strongly consistent listing, in December 2020 (Amazon Web Services 2020). The relevant contract is the documented behavior of the chosen backend, not a blanket assumption about object storage. Per-object consistency still does not make a checkpoint spanning many objects atomic, so the publication protocol of section 15 applies here as it does on a file system.

The immense scale of ML datasets makes them vulnerable to silent data corruption: subtle bit flips in the storage medium or during network transfer that can introduce training artifacts nearly impossible to diagnose. Object storage services provide per-object checksums that verify integrity on upload, copy, or download; Amazon S3, for example, documents checksum options including CRC-family and cryptographic hashes (Amazon Web Services 2026a). Parallel file systems often rely on underlying RAID or erasure coding for physical integrity but may not provide end-to-end checksums visible to the application. A well-engineered large-scale ML pipeline computes and stores a checksum for each data shard during preprocessing and verifies it when the shard is first loaded by a training worker. The verification overhead is negligible compared to the cost of training on corrupted data. For model checkpoints, integrity verification is even more critical: a single bit flip in a weight or optimizer state can corrupt the model, causing training to diverge silently after recovery. Frameworks and checkpoint libraries can include integrity verification, but the pipeline should not assume it without testing the checkpoint format.

Training datasets can contain sensitive information, including personal data, proprietary text, and licensed images. Storage design must carry the organization's access and retention policies through every copy. Object services expose identity policies and encryption options; parallel file systems

provide POSIX permissions and access-control lists. Audit coverage and enforcement depend on the configured platform, not the tier's name. Versioned manifests should identify derived shards and retained copies so that access reviews, retention decisions, and deletion workflows can locate the relevant artifacts; a deletion request, for example, must reach every immutable preprocessed shard derived from the deleted record. Storage controls protect stored bytes; evaluating what a trained model retains requires additional model-level analysis.

The transition from Tier 4 to Tier 5 is driven primarily by economics. Data that is accessed rarely should move to archive storage when retrieval latency and governance requirements allow it, because archive capacity is cheaper still.

Tier 5 archive and cold storage

The final tier provides long-term preservation for compliance and auditability. Archive services (such as S3 Glacier) are designed for data that is rarely accessed: training logs from previous years, superseded model checkpoints, audit trails for regulatory compliance. At a representative $0.004/GB/month, archive storage is 5× cheaper than the $0.02/GB/month object-storage assumption used in section 9. The trade-off is retrieval latency measured in minutes to hours, making this tier unsuitable for operational access.

The primary value of archive storage is organizational memory. When a model trained two years ago produces unexpected behavior in production, the ability to recover the exact training data, hyperparameters, and intermediate checkpoints for forensic analysis depends on archive storage. Organizations that aggressively purge old data to save costs discover, often at the worst possible moment, that they cannot reproduce or explain the behavior of deployed models.

Automated lifecycle policies govern the transition of data between tiers based on access recency. As one illustration of how such automation is expressed, a time-based rule for ML infrastructure might move checkpoints as follows: the most recent three checkpoints remain on the parallel file system for fast recovery; checkpoints older than 72 hours are transitioned to object storage; checkpoints older than 90 days are transitioned to archive storage; and checkpoints older than two years are deleted unless flagged for regulatory retention. S3 Lifecycle rules provide the same general transition/archive/delete mechanism for object lifetimes (Amazon Web Services 2026b). The running example's checkpoint retention in section 15 adopts a count-based variant of the same idea, where the transition rule keys on checkpoint count rather than age. Without automation, teams either hoard data on expensive tiers (wasting budget) or delete data too aggressively (losing reproducibility). The lifecycle policy encodes the organization's cost-recovery trade-off in a declarative rule that requires no manual intervention.

For the 175B model training run, the archive tier holds the complete training lineage: the raw 3 TB compressed source corpus, the 6 TB serialized shard set, all preprocessing scripts, the final checkpoint, and a sampled subset of intermediate checkpoints. Capacity must include every retained full checkpoint as well as both corpus representations; table 0.27 computes that total for the declared retention policy. A round dataset-only allowance would underprovision the archive. The asymmetry between archive cost and compute cost makes retention inexpensive relative to the run it documents; failures to archive usually reflect missing lifecycle ownership, unclear retention policy, or retrieval-process neglect rather than raw capacity cost.

Archive storage services offer multiple retrieval speed tiers, each with different pricing. In an S3 Glacier-style service, standard retrieval may complete within hours at moderate cost, expedited retrieval may complete within minutes at a higher cost, and bulk retrieval may trade still more latency for the lowest retrieval price (Amazon Web Services 2026d). The choice of retrieval tier depends on the urgency of the use case. Forensic analysis of a production incident warrants faster retrieval; annual compliance audits can use slower bulk retrieval. Designing the lifecycle policy requires understanding the storage cost, the expected retrieval frequency, and the urgency for each class of data.

Training data provenance links a deployed model to the data versions and preprocessing that produced it. The organization's governance policy determines which records to retain and for how long; the storage design must make those records identifiable and retrievable throughout that period. Archive is a candidate when its retrieval delay meets that requirement. Records needed during frequent investigations may justify a warmer tier even when archival capacity is cheaper.

The six tiers now have their roles, capacities, and prices, but a role does not say how fast bytes must climb the hierarchy. That rate is set by the accelerators consuming them, and it is the next quantity to derive.

The Data Pipeline Equation

Every training job eventually raises the concrete sizing question of how much storage bandwidth the pipeline must deliver before accelerators stall. The required rate depends on the training configuration, and miscalculating in either direction is expensive. Under-provisioning storage bandwidth starves accelerators. Over-provisioning wastes budget on storage capacity that sits partially idle. The data pipeline throughput equation in equation 0.11 quantifies the bandwidth the pipeline must sustain for a target training rate:

$$\mathrm{BW}_{\mathrm{required}} = N_{\mathrm{GPU}} \times \eta_{\mathrm{target}} \times \frac{D_{\mathrm{vol}}^{(\mathrm{batch})}}{T_{\mathrm{compute}}} \tag{0.11}$$

where N_{GPU} counts accelerators consuming distinct local input batches, η_{target} is the target fraction of wall-clock time spent computing (typically 0.8 to 0.95), $D_{\mathrm{vol}}^{(\mathrm{batch})}$ is one local batch in bytes, and T_{compute} is its uninterrupted compute time. This utilization is an active-time fraction, not model FLOPs utilization. If iteration time already includes stalls, multiplying by utilization again would count the slowdown twice. Eliminating sustained input stalls requires supplying batches at the full compute rate; the target fraction sizes a lower accepted training rate. Devices that cooperate on one batch do not each require an independent storage read, so their shared input must be counted once at the tier being sized. The text-versus-image comparison of notebook 4.2 already applied this equation with $\eta_{\mathrm{target}} = 1$; the equation makes the target fraction explicit, and the service chain below adds the requirement that every stage, rather than the accelerator-facing endpoint alone, meet the resulting rate.

The demand equation sizes the accelerator-facing endpoint, but bytes must traverse the complete service chain. Let r_j denote the measured service rate of stage j, including object-store reads, network transfer, decoding and augmentation, host-memory copies, and host-to-device transfer. Express all rates in the same output-equivalent bytes per second, using each stage's expansion or compression ratio; raw compressed-read bandwidth cannot be compared directly with decoded-tensor bandwidth. With bounded buffers and no sustained backlog, the pipeline can deliver at most

$$r_{\mathrm{pipeline}} = \min_j r_j, \qquad r_{\mathrm{pipeline}} \geq \mathrm{BW}_{\mathrm{required}}. \tag{0.12}$$

Capacity at one tier cannot compensate for a slower downstream stage. Compression may raise the storage-read rate while lowering the decode rate; additional loader workers may raise decoding throughput while saturating the host-memory or PCIe stage. The end-to-end inequality in equation 0.12 therefore turns the chapter's hierarchy into a testable contract: measure every stage under representative concurrency, then provision or overlap the stage whose service rate is the minimum.

The throughput equation in equation 0.11 exposes four levers on storage demand, and none of them is free. Reducing the accelerator count (N_{GPU}) lowers aggregate input demand by reducing the number of distinct consumers, but it lowers training throughput with it. Lowering target utilization (η_{target}) relaxes the delivery rate by accepting idle accelerators. Decreasing the per-batch data volume ($D_{\mathrm{vol}}^{(\mathrm{batch})}$) through a more compact representation of the same samples helps only while decoding keeps pace; shrinking the batch itself changes the training configuration and its statistical efficiency. Increasing compute time (T_{compute}) gives storage longer to deliver each batch, but every iteration takes proportionally longer, which is also why a faster accelerator can expose an input bottleneck the slower one hid. The equation therefore sizes the pipeline for a chosen training configuration; deliberately slowing useful computation does not improve delivery.

As a separate image-training example, consider 256 GPUs training with ImageNet-scale images, 200 ms iterations, and 80 percent target utilization. This configuration requires 30.3 GB/s of aggregate storage throughput. The bandwidth must be sustained continuously for the duration of training, which may last days or weeks. If sustained delivery falls below 30.3 GB/s, the input path cannot

support that target rate once its buffers drain. For the chapter's 175B language-model running example, tokenized text has a much lower per-batch bandwidth demand, but the total data volume and checkpoint traffic over the run are much larger, shifting the bottleneck from peak training-data bandwidth to sustained throughput and checkpoint movement over weeks.

The consequences of falling short are captured by the **data stall ratio**, defined in equation 0.13 as the fraction of each training step where the accelerator waits for data:

$$\text{Data Stall \%} = \frac{T_{\text{step}} - T_{\text{compute}}}{T_{\text{step}}} \times 100 \tag{0.13}$$

Equation 0.13 describes one worker's input path with communication excluded, so its T_{step} is compute plus exposed input wait. The Fleet Law of section 11 carries no input-wait term, so it implicitly treats the next batch as already resident; whatever input wait the loader fails to hide adds to the distributed step on top of $T_{\text{comm}}(N)$ and $T_{\text{sync}}(N)$, as compute (C_1) capacity that sits idle while storage catches up. In a real distributed job, the gap $T_{\text{step}} - T_{\text{compute}}$ also contains exposed communication and synchronization, so the ratio implicates storage only when that gap is measured as time spent waiting on the input queue, separately from collectives and barriers. Without overlap, step time adds compute and I/O time. Pipelining reduces step time to the longer of the two durations and stall time to the positive difference between I/O and compute.



Napkin Math 4.5: The data stall ratio

Problem: A GPU processes a batch in 200 ms, but storage takes 250 ms to deliver the next batch. What fraction of each training step is the accelerator idle, and how much does pipelining I/O with compute reduce that stall?

Without pipelining (sequential I/O then compute):

$$T_{\text{step}} = T_{\text{IO}} + T_{\text{compute}} = 250 + 200 = 450 \text{ ms}$$

$$\text{Stall \%} = \frac{250}{450} = 55.6\%$$

With pipelining (I/O overlapped with compute):

$$T_{\text{step}} = \max(200, 250) = 250 \text{ ms}$$

$$\text{Stall \%} = \frac{250 - 200}{250} = 20\%$$

Systems insight: Even with pipelining, the accelerator is idle 20 percent of the time. To eliminate the stall entirely, the next batch must arrive within the 200 ms compute window, either by increasing effective storage bandwidth or by adding parallel I/O streams. Deeper prefetch buffers cannot help here, because the delivery time exceeds the compute window on every step rather than merely in the tail.

The data stall ratio measures time lost waiting for inputs relative to the chosen iteration window. Acceptable stall time depends on the fleet's cost and throughput objectives; a threshold is a policy choice, not a universal storage-health boundary. Instrument batch-ready times and accelerator execution in the same trace to distinguish input starvation from synchronization, CPU preprocessing, and other idle intervals. General profiling tools can expose these events, but an idle accelerator alone does not identify storage as the cause.

↪ An I/O-wait efficiency target for the fleet Data axis is operationalized in section 4.

A storage pipeline that met its budget at launch can drift out of it as datasets grow, jobs contend, and drives age, so it requires continuous monitoring to keep silent bottlenecks from eroding training efficiency. Key metrics to track in real time include per-tier bandwidth utilization (NVMe, network, object storage), prefetch buffer depth (how many batches are queued and ready), the data stall ratio per GPU, the parallel file system's metadata operation rate, and NVMe drive health indicators (wear level, temperature, error counts). Alert thresholds should trigger before stalls become visible

in training loss curves. An undetected 5 percent increase in data stall ratio across the 1,024-GPU reference cluster (half the running cluster) for just one week wastes about $17,203 in idle compute (1,024 GPUs $\times$ $2/GPU-hour $\times$ 168 hours $\times$ 5 percent), making comprehensive storage monitoring a first-order economic concern rather than an operational nicety.

Diagnose a storage stall at three levels. The application timeline identifies when the accelerator waits; per-worker rates and queue depth identify the pipeline stage that falls behind; device and shared-server counters show which resource limits that stage. Correlating those observations distinguishes a byte-bandwidth shortage from metadata contention or insufficient decoding capacity.

A small development dataset may hide the contention and accumulated state of a production run. A pipeline stress test should therefore use representative data volume and concurrency and run long enough to expose queue depletion, resource leaks, and memory pressure before the loader is coupled to an expensive training job.

Different ML workloads have dramatically different bandwidth profiles, even when using the same cluster. Image classification with ResNet-50 on ImageNet produces a high bandwidth demand because each batch contains hundreds of large images (116 KB each on average) and iteration times are short (100 to 200 ms). Language model pretraining produces a lower per-batch bandwidth demand because tokenized text is compact (each token is a 4-byte integer, so a packed sequence of 4,096 tokens occupies only 16 KB), but the total data volume over the training run is enormous (trillions of tokens). Recommendation model training, the Archetype B (DLRM at Scale) workload, produces a mixed bandwidth demand: embedding lookups require high-IOPS random access to the embedding table, while the dense layers consume standard sequential training data. Each workload's bandwidth profile determines which storage tier is the bottleneck and where optimization effort should focus. Archetype C (Federated MobileNet) falls outside this shared-storage analysis, because its raw training data stays on the devices that produce it; there is no central corpus to stage, and its storage constraints become per-device capacity and upload limits.

↪ On-device training data and federated updates are developed in chapter 16.

Figure 0.44 bounds the compute active-time fraction as a function of the bandwidth-to-demand ratio across an ideal overlapped pipeline. Defining input demand as batch bytes divided by uninterrupted compute time, the piecewise curve ramps linearly through bandwidth-starved operating points before flattening at the supply-equals-demand saturation knee (ratio = 1). The active fraction is the smaller of one and available bandwidth divided by that demand, assuming no other bottleneck.

Below matching supply, bandwidth increases raise the ideal active fraction proportionally. Above it, more bandwidth does not improve this ideal compute stage, although headroom can help absorb contention and variable delivery. The markers show how far apart the chapter's workloads sit. Served by the whole 1 TB/s parallel file system, the text job of notebook 4.2 has about 6,000× more bandwidth than it consumes, the image job only 3.3×, and the pipeline of notebook 4.5 sits left of the knee at 80 percent active time. Real systems can fall below the curve because of preprocessing, latency tails, or synchronization. The graph identifies a workload service-rate boundary; it does not establish that every job needs every storage tier.

The pipeline equation also reveals a scaling challenge that worsens with cluster size. As N_{GPU} increases, the required bandwidth $\text{BW}_{\text{required}}$ increases linearly, but the storage system's aggregate bandwidth does not automatically scale to match. Adding more compute nodes to a cluster that shares a parallel file system increases the demand on a fixed storage resource. Eventually, the storage system saturates and every additional GPU beyond the saturation point contributes zero additional training throughput while increasing cost. This saturation point is the practical upper limit on cluster scaling for a given storage configuration, and identifying it quantitatively requires applying equation 0.11 to the specific storage system's measured bandwidth.

Pipelining and prefetching

Figure 0.45 contrasts sequential and overlapped execution across concurrent storage, CPU, and GPU timeline lanes, demonstrating how pipelining shields the accelerator from I/O stalls. Staging and preparing batch $k+1$ on host resources while the GPU trains on batch k hides input work when delivery keeps pace and enough prepared work absorbs latency variation.

While the dual timelines in figure 0.45 demonstrate how pipelining converts a sequential bottleneck into overlapped execution, continuous saturation hinges on maintaining a prefetch buffer deep enough to absorb variance in I/O latency. Stage durations need not be deterministic if ready batches

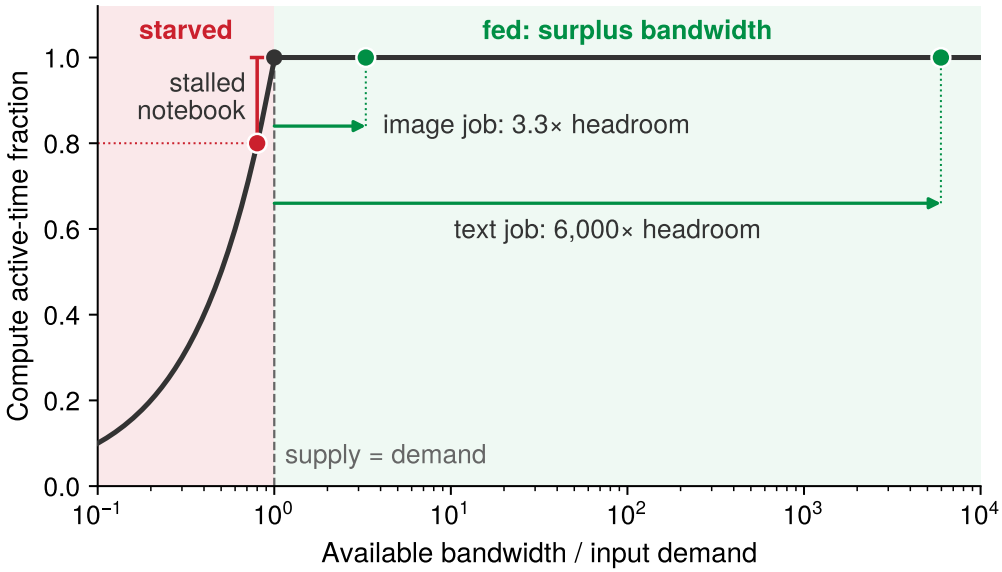


Figure 0.44: The data-stall frontier: In the ideal overlapped pipeline, the compute active-time fraction is min(1, available bandwidth / input demand), plotted against a logarithmic bandwidth ratio. Markers place three of the chapter's workloads on the curve: the data-stall notebook's pipeline, whose delivery time exceeds its compute window, and the image and text jobs of the text-versus-image bandwidth comparison, each served by the whole parallel file system; arrows from the knee measure each fed job's bandwidth headroom. The curve is an ideal service-rate bound, not an empirical utilization curve or a claim about a storage technology.

cover the delays. Storage systems exhibit I/O jitter: variation in read latency caused by contention and background work. NVMe drives experience occasional latency spikes during internal garbage collection (when the controller reorganizes NAND flash blocks) or wear-leveling operations. Parallel file systems exhibit latency spikes when multiple training jobs contend for the same OSS nodes, when the MDS processes a burst of metadata operations, or when background scrubbing detects and repairs bit errors. Object storage likewise exposes delays from shared-service contention and maintenance.

A single slow I/O creates a "bubble" when it exhausts the pipeline's ready work. If the CPU is preparing batch $k+1$ with no additional batches ready, a delayed read can leave batch $k+1$ unavailable when the GPU finishes batch k. The GPU then idles until the batch is ready. A longer queue tolerates a longer interruption, and delivery faster than consumption can refill it afterward. Rather than preparing just one batch ahead, the CPU maintains a queue of N_{prefetch} preloaded batches.

A buffer sized to the measured p99 I/O delay needs enough ready batches to cover that delay without draining:

$$Q_{\text{prefetch,min}} = \left\lceil \frac{T_{\text{IO,p99}}}{T_{\text{compute}}} \right\rceil \tag{0.14}$$

The prefetch depth equation in equation 0.14 estimates how many ready batches cover the selected latency window. Outstanding reads contribute to replenishing that buffer but do not count as ready batches until they complete. The equation assumes that the long-run data supply rate is at least as high as the accelerator's consumption rate; prefetching absorbs latency variance, not a sustained bandwidth deficit. When average throughput is sufficient but p99 latency exceeds compute time, deeper prefetching absorbs delays within the provisioned window; rarer or correlated delays can still cause stalls. When sustained delivery is lower than demand, identify the limiting stage before choosing more storage bandwidth, additional decoding capacity, a different representation, or local staging. The equation uses the p99 delay rather than the mean because a buffer sized for the mean


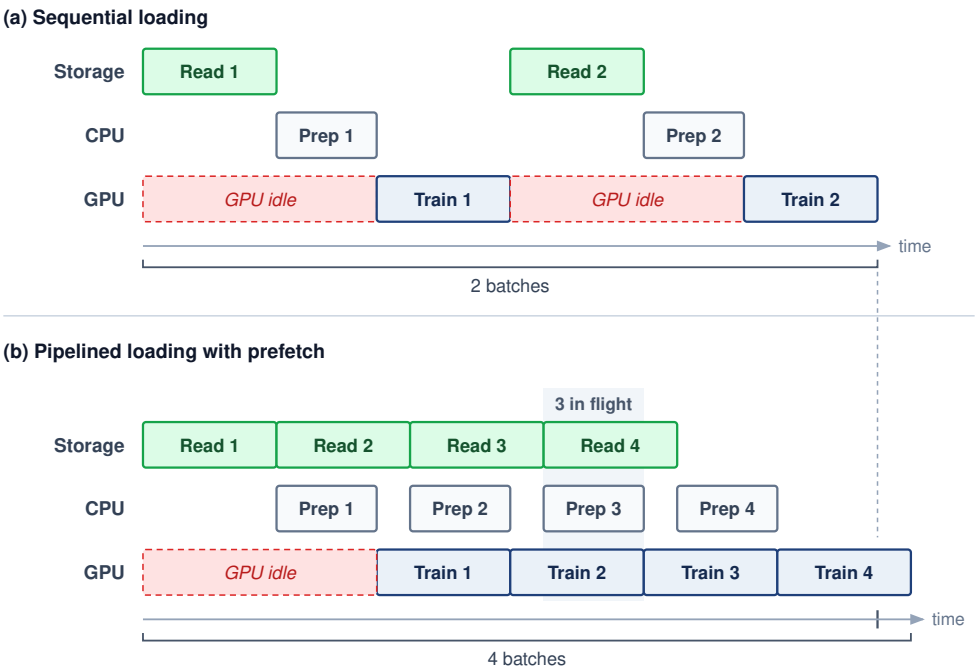


Figure 0.45: Pipelined data loading: Both panels share one time scale, with illustrative stage durations. Sequential loading (a) leaves the GPU idle while each batch is read and prepared. Pipelined loading (b) reads and prepares batch $k+1$ while the GPU trains on batch k, so four batches finish in about the time sequential loading needs for two (dashed line). The shaded column marks one instant with three batches in flight. The overlap hides storage latency only while delivery keeps pace with compute and the prefetch buffer is deep enough to absorb variance.

drains whenever a slow read arrives, and the tail-latency arithmetic of section 6 shows that when a step depends on many servers, some read is slow on most steps. Even the p99 window leaves rarer events and correlated interruptions to test.

If object-storage reads take 500 ms at the 99th percentile and compute takes 200 ms, then $Q_{\text{prefetch,min}} = 3$ batches; provisioning five ready batches adds a margin. In practice, data loaders like PyTorch's `DataLoader` use `prefetch_factor` and `num_workers` parameters to control work ahead of consumption. Setting `prefetch_factor=2` with 4 workers permits eight prefetched batches across workers, but some may still be loading or undergoing preprocessing. The configured count is therefore not a guarantee of eight ready batches; the quantity that protects the accelerator is completed-queue occupancy and its refill rate, measured against the delay window on whichever tier serves the reads.

To illustrate the memory cost of prefetch buffer depth, return to the image job of notebook 4.2. Each GPU processes its batch in roughly 200 ms, and once its 256 images are decoded into $224\times224\times3$-byte tensors, the collated batch occupies about 40 MB per GPU. Reading from local NVMe, the p99 I/O latency for that batch is approximately 50 ms. Under the p99-window model, the minimum ready-buffer depth is $\lceil 50/200 \rceil = 1$ batch, and this example provisions a depth of 2. Reading from a parallel file system, the p99 I/O latency rises to roughly 200 ms due to network jitter and contention, requiring a minimum depth of $\lceil 200/200 \rceil = 1$, with an illustrative provisioned depth of 3. Reading from object storage, the p99 latency can exceed 500 ms, requiring a depth of at least 3, with an illustrative provisioned depth of 5 or more. These numbers translate directly into host DRAM consumption: at 40 MB per batch, a depth-5 prefetch buffer per GPU consumes 200 MB, and 8 GPUs per node consume 1.6 GB. At 40 MB per batch with a depth of 1, the same node needs only 320 MB. Measured delivery delays, batch size, and the chosen protection window determine this memory budget. Queue occupancy and refill rate must still be tested under correlated delays.



A 500 ms p99 read spans 2.5 steps of 200 ms, so three ready batches must cover it.

The representation decides whether that depth is cheap. Text barely registers, because a per-GPU batch of a few packed 4,096-token sequences occupies tens of kilobytes, so even a deep text queue is negligible. Decoded images are where depth costs memory. The 256-image batch above is roughly 39 MB before rounding, and a buffer of 8 such batches consumes about 310 MB per GPU, modest against a node's 512 GB of DRAM even after multiplying by the GPUs on the node. Higher-resolution images and video raise the per-batch size by an order of magnitude or more, at which point the prefetch buffer competes with embedding tables and other DRAM consumers.

The interaction between prefetching and the storage hierarchy creates a layered defense against stalls. The first layer is the prefetch buffer in host DRAM, absorbing I/O variance from NVMe reads. The second layer is the local NVMe warm cache, absorbing network variance from shared storage, whether a parallel file system or an object store. The third layer is the parallel file system read-ahead cache, absorbing variance from disk seeks across the OSS cluster. Each layer adds latency tolerance at the cost of memory or storage capacity. The system designer must check each active path against the interruption window it is intended to absorb and verify that sustained delivery replenishes the consumed batches. The running example's shards come from object storage, whose 500 ms p99 against a 200 ms step would call for 3 ready batches if every read went to that tier. Once the shards are staged on local NVMe, every training read is a local hit, and the prefetch buffer needs to absorb only the 50 ms local p99, which a single ready batch covers.

Checkpoint 4.3: Data pipeline design

A training cluster the size of the book's reference cluster runs 1,024 GPUs with 128-image batches (116 KB per image after compression, 150 ms per iteration).

- ☐ **Bandwidth requirement**: with the pipeline bandwidth requirement of equation 0.11, which scales accelerator count and target utilization by bytes per iteration, calculate the required aggregate storage bandwidth at 90 percent target utilization.
- ☐ **Checkpoint contention**: determine whether 800 GB/s aggregate parallel-file-system bandwidth is sufficient, then recalculate when checkpoint writes consume 20 percent of that bandwidth.
- ☐ **Prefetch depth**: calculate the minimum prefetch buffer depth in batches needed to absorb 300 ms p99 object-storage latency.
- ☐ **Host memory**: calculate total prefetch buffer memory when each decoded batch occupies 10 MB in host DRAM at the depth calculated in (3).

Multi-worker data loading

A single CPU core cannot keep a high-throughput accelerator fed, even when the storage hardware is fast enough, because of the CPU work required between the storage read and the GPU transfer. Consider the throughput required for image training: decoding a 116 KB JPEG image into a $224\times224\times3$ raw tensor requires entropy decoding of Huffman-coded coefficients, inverse discrete cosine transform, chroma upsampling, and pixel-format conversion. This process takes roughly 1 to 5 ms per image on a server CPU core. After decoding, augmentation adds further CPU work: a random crop requires computing crop coordinates and copying the sub-region; horizontal flip requires copying with reversed column order; color jitter requires per-pixel multiplication and addition. Each augmentation adds 0.5 to 2 ms per image.

The image job of notebook 4.2 feeds each GPU 256 images every 200 ms step, more than 1,000 images per second. At 1,000 images per second per GPU and 8 GPUs per node, a single core would need to decode and augment 8,000 images per second, a throughput $10\times$ to $40\times$ beyond what a single core can sustain. The solution is multi-worker data loading, where W worker processes each read from storage, decode, augment, and enqueue batches independently. The effective I/O throughput scales approximately linearly with W until one of three bottlenecks is reached: the storage device's bandwidth saturates, the PCIe bus between host and device saturates, or the workers exhaust host CPU cycles.

In PyTorch's `DataLoader`, each worker is a separate process with its own file descriptors and memory space. The `num_workers` parameter controls W. Setting W too low leaves the GPU starved; setting W too high wastes CPU resources on context switching and contention. A good heuristic is to start with $W = 4 \times G_{\text{node}}$, where G_{node} is the number of GPUs per node, and profile the data stall ratio, adjusting until it meets the fleet's chosen target. For a node with 8 GPUs, this yields 32 workers, which on a system with 64 CPU cores leaves 32 cores for the PyTorch runtime, GPU-to-GPU communication threads, and operating system overhead. The division of CPU resources between data loading and training orchestration is itself a capacity planning exercise.

The interaction between multi-worker loading and the storage hierarchy matters. When reading from local NVMe, workers can issue concurrent reads to the same RAID array, using NVMe's deep command queues to expose device parallelism until shared drive or controller capacity saturates. When reading from a parallel file system, workers distribute their reads across different OSS nodes, naturally aggregating bandwidth. When reading from object storage, workers issue concurrent GET requests, each to a different shard, achieving parallelism at the HTTP level.

A subtle pitfall in multi-worker loading is shuffle quality vs. I/O efficiency. Perfect shuffling requires that each batch contain samples drawn uniformly from the entire dataset, which implies random access across all shards. Random access, however, defeats the sequential I/O patterns that storage systems optimize for. The practical compromise is *shard-level shuffling* combined with *within-shard shuffling*: the loader shuffles the list of shards at epoch start, assigns contiguous groups of shards to each worker, and then shuffles samples within each shard's local buffer. This approach usually provides enough randomness for convergence while maintaining sequential I/O at the storage level. Its adequacy depends on how the shards were built. A corpus whose shards are internally homogeneous, such as one source or one class per shard, needs finer shards or a larger shuffle buffer, so the layout should be validated against the loss curve of a fully shuffled baseline on a subset before the run commits to it.

The shuffle buffer size creates a memory-randomness trade-off. A larger buffer provides better randomness (because samples are drawn from a larger pool) but consumes more host DRAM. For the running example with text data, a shuffle buffer of 10,000 sequences at 2,048 tokens each, with each token represented as a 4-byte integer, consumes roughly 82 MB. This is negligible relative to the 512 GB of host DRAM. For image data, where each decoded image occupies 151 KB, a shuffle buffer of 10,000 images consumes 1.5 GB, still manageable but a nontrivial fraction of the prefetch budget. The data loader designer must balance shuffle buffer size against prefetch depth, since both compete for the same host DRAM capacity.

The data loading pipeline, from storage read through decode, augmentation, and transfer to accelerator, is the complete fuel delivery system for the training engine, and when any stage becomes the bottleneck the accelerator starves. Local reads can reduce network and shared-storage wait, which makes shard placement across nodes the next decision when that path limits delivery.

Data locality and placement

In a distributed training cluster, the placement of data shards across the storage hierarchy determines pipeline performance. Each training worker needs efficient access to its assigned portion of the dataset. The core trade-off is between the flexibility of shared storage and the raw speed of local storage. Local NVMe avoids shared-network and service contention, but its advantage depends on the local drive configuration and the bandwidth allocated to the same client by remote storage. Compare measured client rates rather than assuming a fixed local-to-remote ratio.

The simplest strategy is static placement. At the beginning of a training job, the orchestrator assigns a fixed subset of data shards to each node. The node stages this data by copying its shards from shared storage (the object store in the running example, a parallel file system in many on-premises clusters) to local NVMe drives. Reads remain local while the assigned shards fit and the sampling policy uses that assignment. A changed dataset or assignment requires restaging, so the placement policy must preserve the intended sample distribution as well as local throughput.

The alternative is dynamic placement, where nodes fetch shards from shared storage as needed and can retain them locally for reuse. This supports datasets larger than aggregate local NVMe capacity and sampling policies that change the active subset over time. Cache misses consume

shared-storage bandwidth and expose remote latency unless prefetching hides it; cache hits retain the benefit of local reads.

The cache view of equation 0.10 puts a number on that trade. Take the multi-modal job of section 4, whose 35 TB corpus overflows a node's 30.7 TB of local NVMe. If the job samples uniformly and the cache holds that fraction of the corpus, about 88 percent of reads hit the 28 GB/s local stripe and the remaining 12 percent fall through to the node's 4 GB/s share of the parallel file system. Taking the time to deliver one byte as the service time, the mean delivered rate is about 16 GB/s, only 58 percent of the all-local rate. A miss rate near one in eight costs about two-fifths of the bandwidth because each missed byte takes 7× as long as a hit, and that mean is the optimistic case; misses that cluster in time drain the prefetch buffer faster than the average suggests.

A more advanced approach is locality-aware scheduling. The scheduler keeps track of which data shards are cached on which nodes' local NVMe drives. When it starts a new job or replaces a failed node, it prefers a node that already has the required data cached, rather than treating all nodes as interchangeable. This uses the principle of data gravity,[11] co-locating compute with data to minimize transfer times. Scheduling avoids a staging copy only when an available node holds the required, validated shard versions. The next requirement is therefore to identify the cached contents precisely enough to reuse them safely.

For the 6 TB serialized dataset distributed across 256 nodes, each node is responsible for approximately 23.4 GB of data. If a node fails, its replacement must restage that shard subset from shared storage. Drawn at the uncontended 4 GB/s per-node share of the chapter's parallel file system, the copy takes about 5.9 seconds. At an effective 400 MB/s per-node rate, which recovery contention can impose and which is also the order of the per-node share of the 50–100 GB/s object-store streaming path described in section 9, the same copy stretches to about 58.6 seconds. If the orchestrator can instead schedule the replacement workload on an idle node that already has the data cached from a previous run, staging time is zero and training resumes as soon as the replacement joins. The saving is modest per event but recurs. At a per-GPU mean time between failures of 50,000 hours, the 256-node cluster sees about 1 node failure per day, and each contended restage idles the whole synchronous job for the copy time above. Larger fleets fail proportionally more often, although each node's share of the corpus shrinks as the node count grows.

11 | **Data gravity**: A metaphor treating large datasets as massive objects that attract compute. The gravitational analogy is apt: moving a 100 TB dataset out of one cloud provider to another costs roughly $9,000 in egress fees and takes hours, while launching compute next to the data is near-instantaneous. In ML fleet design, data gravity means the storage location of the training dataset often dictates the physical placement of the entire training cluster.

Data versioning and pipeline orchestration at scale

Knowing where data lives is only half the problem; at scale the storage infrastructure must also record which version of the data each run uses and how it flows through the pipeline. Versioning turns the storage hierarchy into a reproducibility system: the fleet must record both the exact bytes read and the preprocessing code, shuffle seed, schema, and integrity checks that produced those bytes before the run began.

> Lighthouse 4.1: Archetype B (DLRM at Scale): Feature store latency
>
> While Archetype A (GPT-4/Llama-3) deals with static, versioned datasets of trillions of tokens, Archetype B (DLRM at Scale) deals with dynamic, high-velocity feature streams. For a recommendation system, the "ground truth" changes every second as users click and interact. This forces a move from simple file-based storage to a feature store architecture that must solve the point-in-time correctness problem: ensuring that the features retrieved for training exactly match what the model would have seen at the moment of inference, without "leaking" future information.

That same reproducibility requirement becomes harder when the inputs are live features rather than immutable text shards. Feature store architectures address point-in-time correctness[12] by maintaining an immutable feature ledger or a "time-travel" query engine, significantly increasing storage complexity.

At fleet scale, even an immutable collection of files produces a distributed stream of consumed samples whose versions and order must be recorded. Foundation-model runs can last weeks or months; in the 30-day running example, the dataset version and sampling policy must remain identifiable throughout the run. Samples and shuffle order can change across epochs, but the

12 | **Point-in-Time Correctness**: In recommendation systems, features (for example, user click history) must be retrieved exactly as they existed at the moment of the historical interaction. Retrieving current features for a past event, a form of temporal leakage, inflates training accuracy but causes the model to fail in production. At petabyte scale, the ledger that prevents it must retain every feature version a training query might request.

pipeline must record enough state to reconstruct the sequence consumed. Otherwise, an engineer cannot distinguish between a model regression and a silent change in the input distribution. Dataset versioning provides the necessary "Git for data" capability by snapshotting the cryptographic hashes[13] of every data shard, the exact preprocessing code used for tokenization, and the random seeds governing the global shuffle. This level of rigor is essential for audit trails and for debugging the subtle "loss spikes" that characterize large-scale training, where engineers must be able to replay the exact batch that caused a divergence to determine if the cause was a corrupted data sample or a numerical instability in the optimizer.

At petabyte scale, the data pipeline has to make every transformation reproducible. Raw documents are cleaned, tokenized, packed into training examples, and sharded across storage tiers. Each stage writes an immutable artifact, and each artifact records the input version, code version, schema, and statistical checks it satisfied. Once those dependencies are explicit, the pipeline forms a directed acyclic graph: later artifacts depend on earlier artifacts, and no stage is allowed to rewrite its own history. When a training job starts, the cluster manager verifies that each worker's local NVMe shards match the data snapshot declared for the run. Treating the data pipeline as a graph of versioned artifacts rather than a simple file transfer makes silent data drift detectable and attributable to a specific stage, code version, or input snapshot. Immutability also pays a storage dividend. Because an artifact never changes once written, a manifest can name it by content identifier, and many experiments can reference the same unchanged shards without copying entire datasets.

[13] **Hash Cost (SHA-256)**: Verifying the integrity of a 100 TB dataset using SHA-256 consumes approximately 55.6 CPU-core hours at a per-core hashing rate of 500 MB/s. The work parallelizes across shards, but it still competes with decoding for host cores and must read every byte, so the validation step is best pipelined with ingestion rather than run as a separate pass before the fleet starts.

Execution semantics for distributed transformations

Versioned artifacts identify *what* a pipeline produced; execution semantics determine whether failures can change that result. Consider the tokenization stage that built the running example's shards, in which many workers each read raw documents and write packed token shards. When a worker crashes halfway through a shard, its replacement must decide which documents to process again. The storage system's part in that decision is the commit boundary, the point at which a stage's output becomes durable and visible downstream, the same contract that section 15 later applies to checkpoint generations. That shared contract is why a storage chapter owns these semantics, because whether a replay loses or duplicates data is decided by what the store has committed. The restarted worker compares its input position with the last committed output and replays everything after it, so the work at risk is whatever accumulated past the last commit. Two service-rate effects govern how much accumulates. Records are assigned to workers by a partition key, such as a document's source or a user identifier, and partition skew arises when one key owns disproportionate work and holds its stage open while the rest of the fleet idles. Backpressure propagates a slow downstream stage's limit upstream by slowing admission or bounding in-flight data, a control response to overload rather than another name for slow processing.

Failures near that boundary raise a correctness question, and three guarantees answer it differently. At-most-once processing never replays uncertain work, so a document that was read but whose output was never confirmed is lost. At-least-once processing replays everything after the last confirmed commit, so a document whose output was written but not yet confirmed is written twice. An effectively exactly-once outcome combines replayable inputs with idempotent writes, writes that leave the same result however many times they repeat, or with transactional output keyed by a stable event or transaction identifier (Akidau et al. 2015). Reliable message delivery between workers cannot provide this guarantee on its own, because the duplicate arises from the worker's own replay.

Example 4.2: The acknowledgment gap

Failure trace: A feature-pipeline worker writes the output row for click event `e42`, then crashes before it records that the write succeeded. Its replacement cannot tell whether `e42` was committed. Skipping the event risks losing it. Replaying it with an append writes the feature row a second time, so that click counts twice in every training set built from the table. Writing the row under the stable key `(feature_version, e42)` turns the replay into an overwrite of the same row, so the uncertain event can be reprocessed safely.

Systems lesson: Exactly-once belongs at the output commit boundary, whose record must bind the input position, transformation version, stable identifier, and commit state.

Streaming adds a time boundary to the contract. Event time records when an event occurred; processing time records when a worker handled it. A pipeline that aggregates clicks per hour must decide when an hour is finished, even though events can arrive late. A watermark is its running estimate that every event up to some event time has arrived, which lets it close that window and emit the result; a late-data policy determines whether later arrivals update, retract, quarantine, or drop the result (Akidau et al. 2015). Watermarks therefore trade freshness against completeness rather than prove that no older event remains.

Each of these mechanisms buys one property at the cost of another. Buffering absorbs finite bursts or temporary slowdowns but increases recovery state and freshness lag; sustained overload still requires backpressure or more service capacity. Aggressive watermarks reduce delay but exclude more late data, while retries help only when writes are safe to repeat. These choices change the stored result, because a feature table closed under an aggressive watermark holds different rows from one closed under a lenient watermark. A reproducible training snapshot must therefore record source and code versions alongside partitioning, replay policy, stable identifiers, watermark state, and late-data decisions. That record is what lets a later feature backfill, a replay of history under new code, rejoin features at the correct points in time without mixing old and new histories.

↪ Feature backfills that replay history under this snapshot contract are operationalized in section 6.

The pipeline equation, the prefetch queue, the loader workers, and the versioned artifacts together determine which bytes reach host memory and when. On the conventional path, however, every one of those bytes is also copied by the CPU through host DRAM before the accelerator's DMA can start, and at high request rates that copy competes with decoding for the same cores. No amount of orchestration removes that copy; only a direct data path between storage and accelerator does.

GPUDirect Storage and the CPU Data-Copy Bypass

The storage hierarchy can provide enough aggregate bandwidth and still leave GPUs waiting when the CPU copies data for thousands of small transfers. In the traditional path, every shard read bounces through host DRAM before reaching GPU HBM; GPUDirect Storage (GDS) removes that host-memory bounce copy for local or RDMA-attached NVMe, which pays off when the copy itself limits throughput. The CPU still submits and coordinates I/O through the software stack. Understanding the traditional path first makes the GDS optimization clear.

The traditional data path for loading training data follows three hops: storage → host DRAM → GPU HBM. Data is first read from NVMe into a kernel buffer in host DRAM (via a DMA transfer initiated by the NVMe controller), then copied to a user-space buffer (the data loader's tensor, via a `memcpy` that the CPU executes), and finally transferred to GPU memory via the PCIe bus (using a `cudaMemcpy` or `cudaMemcpyAsync` call that programs the GPU's DMA engine). Each hop adds latency and consumes CPU resources. The CPU must orchestrate every transfer, manage buffer allocation, and handle interrupts from both the storage device and the GPU. For a single transfer, this overhead is negligible. When eight GPUs each demand thousands of small transfers per second, however, the aggregate CPU load for data movement alone can saturate multiple cores, leaving insufficient CPU capacity for the data augmentation that is also essential to the pipeline.[14]

Definition 4.4: GPUDirect Storage

GPUDirect storage (GDS) is a technology that enables a direct DMA path between NVMe storage devices and GPU memory, bypassing the system-DRAM bounce buffer and CPU payload copies while retaining CPU submission and control.

1. **Significance**: It eliminates the "bounce buffer" through system memory. In the small-transfer model detailed in notebook 4.6, the assumed active CPU service per request falls by 75 percent. That model estimates CPU capacity savings, not an end-to-end latency guarantee. Whether the storage link saturates depends on the remaining bottlenecks.

14 **GDS (GPUDirect Storage)**: Part of NVIDIA's GPUDirect family, which also includes GPUDirect RDMA (network adapters writing directly to GPU memory) and GPUDirect Peer-to-Peer (inter-GPU memory access); GDS extends this data-copy-bypass approach to NVMe storage via the cuFile API. With RDMA and GDS, payload data can traverse the path remote storage → network → GPU memory without a CPU-mediated bounce copy. The CPU still issues and coordinates cuFile operations, but it spends less time copying payloads and can devote more capacity to augmentation and pipeline orchestration.

2. **Distinction**: Unlike traditional I/O, where payload data is staged through host buffers and copied between them, GDS provides direct memory access between the storage controller and the accelerator. CPU-issued cuFile calls and kernel storage drivers remain in the control path.
3. **Common pitfall**: A frequent misconception is that GDS makes all storage "faster." The direct path depends on supported storage and interconnect configurations; it does not eliminate media latency, network latency, or queueing.

The software layers in the traditional I/O path contribute control overhead as well as payload-copy work. A buffered read traverses the runtime, file system, and device driver, then makes the completed bytes available to the application. Direct I/O and pinned buffers can avoid some copies even without GDS, so the correct baseline is the actual data path rather than a fixed number of copies for every read. The GDS design guide distinguishes the payload path from the CPU control work that remains.

GDS changes the payload path without eliminating the software control path. The cuFile API registers a GPU memory region for direct DMA. Subsequent reads transfer payload data from NVMe to GPU memory without an intermediate system-memory bounce buffer, while cuFile, the virtual file system, kernel storage drivers, and `nvidia-fs` remain involved in submission and coordination. The CPU issues the I/O and checks for completion but avoids the payload-copy work of the traditional path.

The benefit from GDS matters when host payload movement is a limiting stage after other pipeline work is accounted for. Figure 0.46 diagrams these hardware interfaces, contrasting the two-hop DMA and intermediate host-DRAM bounce buffers of the conventional path against the single direct DMA transfer of GDS. While the direct path eliminates the CPU payload-copy stage, the dashed control link emphasizes that the host CPU still orchestrates transfer submission and completion.

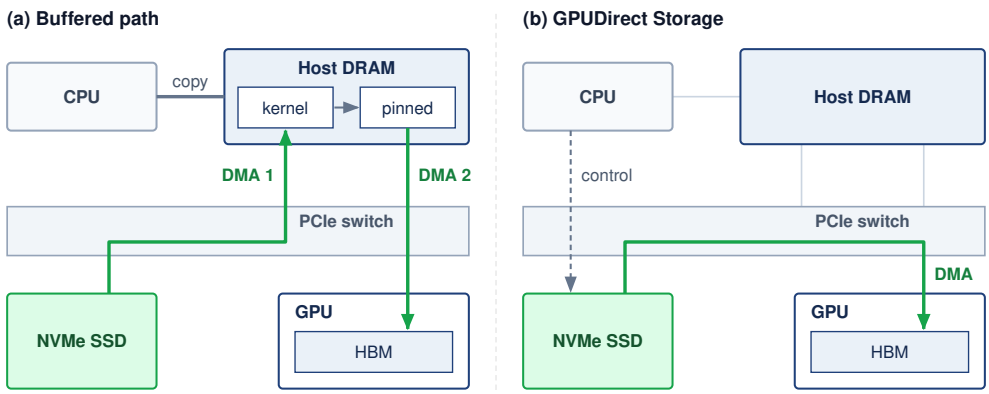


Figure 0.46: Traditional vs. GPUDirect Storage path: Both panels draw the same node: CPU and host DRAM above a PCIe switch, NVMe and GPU below it. Green routes are DMA transfers of payload bytes. In the buffered path (a), payload climbs into host DRAM and comes back down, and the CPU copies every payload from the kernel buffer to a pinned buffer before the accelerator's DMA can start. In the GDS path (b), NVMe transfers directly into GPU memory, and the dashed CPU link shows the submission and completion work that remains.

GDS benefits depend on the bottleneck, request sizes, alignment, concurrency, and storage topology. Removing host bounce buffers can improve throughput when those copies limit the path; it does not imply that the smallest transfers benefit most. Small I/O may remain submission- or latency-limited and require concurrency to approach the available bandwidth. NVIDIA's GDS benchmarking guide therefore evaluates I/O size and per-device behavior as well as throughput. The benefit appears only in an end-to-end comparison of the pipeline with and without the direct path, and the clearest case is the one where host CPU time per request is the limiting stage.

Napkin Math 4.6: The CPU bypass dividend

Problem: A training node with 8 GPUs loads 116 KB images at 8,000 images/s per GPU (64,000 images/s total). That rate is deliberately aggressive, several times the per-GPU image rate of notebook 4.2, to isolate the case in which per-request CPU work is the limiting stage. Assume active CPU service of 120 µs per request on the buffered path and 30 µs on the direct path. These illustrative service times exclude time blocked on I/O; compare the implied CPU load rather than treating elapsed transfer latency as CPU time.

Traditional path: In the assumed buffered implementation, each image requires a DMA from NVMe to DRAM, a host copy from kernel to user space, and a PCIe transfer to GPU. At 64,000 images/s with 120 µs of CPU time per image, the CPU spends 7.68 seconds of CPU time per wall-clock second, consuming roughly 8 cores worth of processing just for data movement.

GDS path: Each image is transferred directly via DMA from NVMe to GPU. At 30 µs of CPU time per image (for initiating the DMA), the CPU spends 1.92 seconds of CPU time per wall-clock second, freeing roughly 6 cores for data augmentation.

Systems insight: Under the assumed CPU-service costs, bypassing payload copies releases processing capacity for preprocessing. The calculation does not predict end-to-end transfer latency, nor prove that preprocessing or storage throughput can sustain this request rate.

GDS has practical limitations. Not all NVMe controllers support peer-to-peer PCIe transfers. The data must be in a format that the GPU can consume directly, which means it must already be decoded or GPU-decodable (raw pixel values, token IDs, or formats handled by GPU decoders, not arbitrary compressed JPEG or gzip streams). In practice, many pipelines use a hybrid approach: CPU-side decoding for compressed formats followed by a normal pinned-memory GPU transfer, while GDS is reserved for direct reads of GPU-consumable data from supported local or remote storage.

The architectural evolution from CPU-mediated copies to direct storage access reflects a broader trend of removing CPU payload copies from the critical data path wherever possible. RDMA allows network payloads to move without CPU copying, while GDS provides the same bypass for storage payloads. Together, RDMA and GDS let data flow from remote storage (such as NVMe over Fabrics, or NVMe-oF), through the network fabric, and into GPU memory without a host-memory bounce copy. The CPU still submits and coordinates the operation, while more of its capacity remains available for data augmentation, pipeline orchestration, and error handling.

↩ RDMA and kernel-bypass network paths are established in section 4.

The GDS design principle also extends to checkpoint writes. A host-staged path transfers checkpoint bytes from GPU HBM through host DRAM to NVMe. A supported direct path can bypass that host staging for a 2,450 GB checkpoint. Removing the copy reduces T_{write} only when that movement contributes to the exposed pause; snapshot consistency, serialization, storage service, and durable publication remain separate requirements.

The complete data path

Combining GDS with the multi-tier hierarchy, the complete data path connects the tiers for the running example. At the beginning of the training job, the 6 TB serialized shard set, derived from the 3 TB compressed source corpus, is staged from object storage into the cluster's local NVMe caches, with each node receiving its assigned shard subset during setup. The data loader workers read tokenized shards from NVMe, assemble packed sequences in pinned host DRAM, and transfer those batches to the accelerator. With GDS enabled, token IDs that are already in a GPU-consumable layout can be loaded directly into GPU memory without CPU payload copying; compressed formats still require CPU or GPU decompression before use.

During steady-state training on the host-staged path, CPU data loader workers read from local NVMe and fill a prefetch queue in host DRAM. The GPU receives batches from this queue via PCIe DMA; the supported GDS alternative bypasses that host payload staging. The compute phase (forward pass, backward pass, optimizer step) consumes the batch and updates model state in HBM. Every 10 minutes, the training framework captures a consistent checkpoint, writes it to local NVMe

through the chosen path, and copies it to the parallel file system in the background. The checkpoint protocol must still establish when all required shards are safe to publish for recovery.

At the end of the training job, the final model checkpoint is promoted from the parallel file system to object storage for long-term retention. The local NVMe copies are deleted during job cleanup. If the model is deployed for inference, it is loaded from object storage into the serving cluster's HBM, completing the lifecycle of data movement through the hierarchy.

The total number of data copies in this lifecycle is instructive. Each training sample traverses: object storage → NVMe (staging), NVMe → host DRAM (read), host DRAM → GPU HBM (transfer). Each checkpoint traverses: GPU HBM → NVMe (local save), NVMe → parallel file system (async copy), parallel file system → object storage (long-term retention). Every copy consumes bandwidth and contributes latency. The engineering goal is to minimize copies on the critical path (the training loop) and tolerate additional copies on noncritical paths (staging and archival). Figure 0.47 maps these dual lifecycles across the tiers, visually distinguishing synchronous critical-path copies (solid arrows) from asynchronous background transfers (dashed arrows). For training inputs moving rightward, the active loop waits only on local promotion into HBM (or the optional GDS bypass); for checkpoints flowing leftward, the exposed pause is confined to the local NVMe save while parallel-file-system replication and archival retention proceed off the critical path.

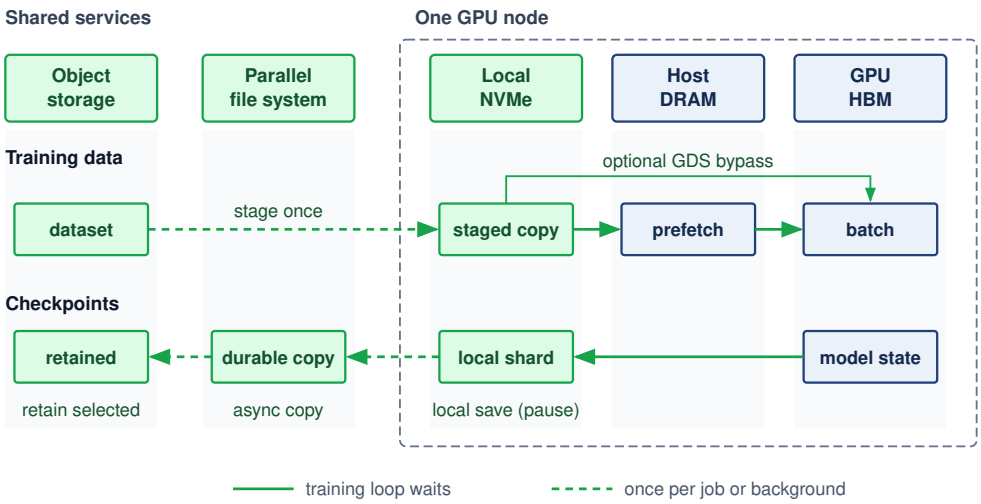


Figure 0.47: The complete data path: Columns are storage tiers, ordered from the durable object store (left) to accelerator memory (right). Training data moves right and bypasses the parallel file system in this running example; checkpoints return left through it. Solid arrows mark copies the training loop waits on; dashed arrows mark copies that run once per job or in the background. The dashed outline is one GPU node: every copy the training loop waits on stays inside it.

Every copy that leaves the node also needs a network, and the choice of network decides whom a storage burst can disturb. Many training nodes carry a small number of storage-facing network adapters on a separate front-end network, in addition to one compute-fabric adapter per accelerator. Routing staging reads and checkpoint copies over that front-end network isolates them from gradient collectives, but it caps each node's storage bandwidth at a few front-end ports. Routing storage over the compute fabric offers far more bandwidth, and remote GDS reads use exactly that RDMA path, but then a checkpoint burst shares switch buffers and spine links with the job's collectives and must be separated by traffic classes. For the running example, each node's fair share of a 1 TB/s file system shared by 256 nodes is roughly 4 GB/s, and copying its roughly 10 GB checkpoint shard within the 10-minute interval needs far less, so a front-end network can carry it; image workloads that stream hundreds of GB/s across the cluster push designs toward the compute fabric. Through the C^3 lens, storage traffic becomes communication (C_2) load the moment it leaves the node, and the network chosen to carry it decides which collectives a storage burst can delay.

The volume of data moved during a 30-day training run reveals a counterintuitive reality. A single staging copy of the 6 TB serialized dataset from object storage to local NVMe accounts for a modest transfer. The checkpointing process, however, generates a vastly larger data stream. With a roughly 2,450 GB checkpoint created every 10 minutes across 256 nodes for 30 days, the system produces approximately 4,320 checkpoints, totaling roughly 10.6 PB of state that must traverse the storage hierarchy. Checkpoint data movement dwarfs training data movement for large models. The 6 TB training dataset is read once in this single-epoch run (and only a handful of times in a multi-epoch one), while the 10.6 PB of checkpoint data is generated anew, making checkpoint I/O the dominant storage workload. This insight explains why checkpoint staging strategy (write locally, replicate asynchronously) can have a larger impact on overall storage design than training data pipeline optimization for large-model runs. Because checkpoints dominate the bytes this run moves, they are the storage workload to design next, and the design must take a multi-terabyte save off the training critical path without ever exposing a checkpoint that cannot be restored.

Checkpoint Storage

After the 2,048 accelerators of the running cluster have been training for six hours, a power supply failure turns checkpoint storage into the difference between resuming quickly and repeating hours of work. The decisive storage questions are how quickly the most recent checkpoint was saved, where it resides, and whether it can be read back. Checkpoints are the most demanding write workload in the storage hierarchy. They are also among the most consequential: a lost checkpoint after a hardware failure means repeating hours or days of training. The storage architecture must therefore minimize T_{write}, the time the training pipeline pauses to save a checkpoint, while stating when that checkpoint becomes durable and visible for restore. The save interval is an input to this storage analysis; selecting it from failure rates and recovery costs is a separate reliability decision derived in section 13.

A 175B parameter model with mixed-precision Adam generates a resumable checkpoint of approximately 2,450 GB. The byte contract comprises 350 GB of FP16 model weights, 700 GB of FP32 master weights, and 1,400 GB for the two FP32 Adam moments. Learning-rate-scheduler state, random-number-generator state, and the data-loader cursor add little capacity but remain required for deterministic continuation. Gradients are omitted because the restored job recomputes them. Each participating worker process, called a rank, saves its assigned shard simultaneously, creating a checkpoint storm that the storage system must absorb without disrupting ongoing training reads. How large each rank's shard is depends on the rule that a coordinated save writes each unique byte once, whatever the parallel layout. In the running layout of table 0.25, the Adam moments and master weights already exist as distinct per-node slices, while the FP16 weights repeat once per node, so the save writes one copy of the weights and each optimizer slice once. Spreading those unique bytes evenly gives each of the 256 nodes about 1/256 of the checkpoint. The third ZeRO stage (ZeRO-3), which partitions the weights as well, makes that even split the natural one, because every rank already owns a distinct slice. Breaking that rule is a real risk even in the running layout, where a save in which every node writes the FP16 weight copy it holds would multiply the weight bytes by the node count. Its cost is clearest in a deliberately extreme thought experiment, a smaller model whose complete resumable state is written once per GPU of the book's reference cluster.



Writing one copy per replica takes 1,024 times longer than writing each unique byte once.

Definition 4.5: Checkpoint storm

Checkpoint storm is a burst of synchronized network and storage traffic that occurs when all nodes in an ML training fleet save model state simultaneously.

1. **Significance**: When each replica writes its own full copy, the naive storm takes $T_{\text{write}} = N_{\text{DP}} \times \text{per-replica state}/\text{BW}_{\text{ingest}}$, where N_{DP} is the number of replicas writing at once and $\text{BW}_{\text{ingest}}$ is the aggregate rate at which the target storage tier absorbs writes; a coordinated save that writes each unique byte once takes unique state/$\text{BW}_{\text{ingest}}$. Under the chapter's checkpoint contract, a 70B-parameter model, smaller than the 175B running example, stores 140 GB of FP16 weights, 280 GB of FP32 master weights, and 560 GB of Adam moments. With vanilla data parallelism across 1,024 replicas (one per GPU of the book's

reference cluster, rather than the chapter's 256-node fleet), naively writing that complete state from every replica generates 1003.5 TB of simultaneous traffic. No 80 GB device can hold a 0.98 TB replica, so the case is a bound on write volume rather than a deployable layout. At 100 GB/s of aggregate storage ingest bandwidth, the write takes roughly 10,035.2 seconds, or over 167.3 minutes of training stall. A coordinated checkpoint protocol writes one logical copy. Replicated data parallelism can select one writer; ZeRO-3 instead distributes that copy across state-owning ranks. In the sharded example the total is roughly 0.98 TB, bringing T_{write} down to roughly 9.8 seconds. Gradients do not appear in either total because recovery recomputes them.

2. **Distinction**: Unlike general I/O contention (which is stochastic and unpredictable), a checkpoint storm is synchronous and periodic: every node writes at the same moment because the training orchestrator triggers checkpoint after a fixed step count. Its predictability makes it both more damaging (all nodes compete simultaneously) and more tractable (it can be prevented by design through staggered scheduling or asynchronous serialization).
3. **Common pitfall**: A frequent misconception is that checkpointing every 100 steps is "low overhead" whatever the save protocol. Under the naive protocol at 70B scale, if each training step takes 10 seconds and a checkpoint storm takes 10,035.2 seconds, checkpointing every 100 steps means spending most of the run on checkpoint I/O rather than useful training.

The severity of a checkpoint storm depends on two factors: the per-node shard size, determined by the model size and the sharding strategy, and the throughput of the first write tier, typically local NVMe. A concrete 175B example shows why the local-write phase, rather than the durable copy to the parallel file system, governs the exposed training pause.

Napkin Math 4.7: Tiered checkpoint staging

Problem: Assume sustained bandwidth, no snapshot-copy, serialization, or coordination overhead, and no interference from background copies. The resulting times are bandwidth lower bounds. A 256-node cluster saves a 175B-parameter checkpoint every 10 minutes. Each checkpoint totals 2,450 GB. Writing each unique byte once and spreading the bytes evenly across nodes, each node saves roughly 9.6 GB.

1. **Per-node write to local NVMe** (4 drives at 7 GB/s each = 28 GB/s): 9.6 GB ÷ 28 GB/s ≈ 0.34 seconds.
2. **Async copy to PFS**: 256 × 9.6 GB ≈ 2.4 TB total. If the PFS provides 1 TB/s aggregate, the storm completes in roughly 2.4 seconds.
3. **Per-node PFS bandwidth**: If all 256 write simultaneously, each gets 1000 GB/s ÷ 256 = 3.9 GB/s.
4. **Training pause**: At least 0.34 seconds for the local NVMe write under this model. The PFS copy overlaps with the next training iteration.
5. **Overhead lower bound**: 0.34 seconds pause every 600 seconds ≈ 0.06 percent training time lost to checkpointing.

Systems insight: Under these 1 TB/s aggregate-PFS assumptions, tiered staging reduces checkpoint overhead from about a 2.4 seconds PFS-direct write to a sub-second local write. The training pause can end at the local snapshot boundary before durable publication, but actual pause includes snapshot creation, serialization, and coordination in addition to this byte-transfer lower bound.

A PFS-direct save of a few seconds every 10 minutes costs well under 1 percent of the run, which can make tiered staging look unnecessary for the running example. The checkpoint-dominance argument of section 15 concerns bytes moved, not this pause, and the notebook's figure holds only

while its assumptions do. The job has the whole 1 TB/s file system to itself; shared among the ten concurrent jobs of section 6, it receives a tenth of the bandwidth, the same save takes ten times as long, and its burst slows the other jobs' reads. Realized ingest also falls below the rated aggregate once serialization, metadata operations, and stragglers enter. The save interval shrinks as the fleet grows, because a larger fleet fails more often and the reliability analysis of section 13 then calls for more frequent saves, and a larger model scales every save with it. Tiered staging removes the shared-tier write from the exposed pause when the background copy keeps pace, although local snapshot creation, serialization, writing, and coordination still determine that pause.

The tiered staging strategy minimizes T_{write} by writing in two phases. In the first phase, each node writes its checkpoint shard to local NVMe at full bandwidth. With 4 NVMe drives providing 28 GB/s aggregate, a per-node shard of roughly 9.6 GB (an even 256-node split of the 2,450 GB total checkpoint) completes in roughly 0.34 seconds. In this staging model, the training pipeline can resume after every required local shard has completed and the snapshot is no longer being modified. The local-write calculation excludes snapshot-copy, serialization, and coordination overhead, so it is a bandwidth lower bound on the pause.

In the second phase, a background process asynchronously copies the local checkpoint to the parallel file system for durability. The copy can overlap training, but it still competes for memory, network, and storage service and must drain before repeated saves create an unbounded backlog. The two phases therefore land differently in the Fleet Law (equation 0.3). The local write is a pause that every rank takes at the same step boundary, and training resumes only when the slowest writer has finished its shard. That is the shape of a barrier rather than of a transfer between workers, a coordination (C_3) cost, so the pause adds to the synchronization term $T_{\text{sync}}(N)$ of each saving step, the term that already carries barrier and straggler waiting. The background copy belongs to no step's critical path. While it stays hidden and drains before the next save, it adds nothing to the step time; it reappears only as interference, in $T_{\text{comm}}(N)$ when it shares links with collectives or in exposed input wait when it slows shared-storage reads. If a node fails before its copy completes, the new generation may lose a required shard. Replication to peer nodes' NVMe drives can protect against a single-node loss, provided replicas occupy independent failure domains. Waiting for that replication extends the pause beyond the local-only calculation. A design that resumes earlier must retain the previous committed generation until the new one reaches its declared durability boundary.

Durability alone does not make a distributed checkpoint visible safely. Each rank first writes its shard under an immutable generation identifier, computes a checksum over the completed bytes, and acknowledges the shard only after the target tier has persisted it. A coordinator then writes a manifest containing the training step, checkpoint schema, expected shard set, sizes, and checksums. The manifest or commit marker is published last using the target backend's atomic publication primitive: an atomic create or rename on a file system, or an immutable manifest plus conditional creation or a versioned pointer under the object store's consistency guarantees. PyTorch Distributed Checkpoint exposes the ordering directly: storage writers write rank data before the coordinator's `finish()` operation writes metadata and marks the checkpoint successful, while the storage backend supplies the publication semantics (PyTorch Contributors 2026a). Restore logic lists only committed generations, verifies every shard against the manifest, and rejects temporary, partial, or mixed-step state. This ordering separates *writing bytes* from *publishing a restorable checkpoint*: a crash can leave garbage to collect, but it cannot make an incomplete generation appear valid.

The exposed pause and the durability boundary therefore fall at different moments. Figure 0.48 aligns these decoupled milestones across four concurrent execution lanes: training pauses only during the local NVMe shard write (t_0 to t_1), resuming on live state while the parallel file system absorbs the asynchronous copy (t_1 to t_2) and the coordinator validates checksums before publishing the manifest last (t_3).

The total storage consumed by checkpoints over the life of a training run is substantial. A 175B parameter model checkpointed every 10 minutes over a 30-day training run generates roughly 4,320 checkpoints, each 2,450 GB, for a total of approximately 10.6 PB of checkpoint data. Retaining all of them is neither necessary nor economical. The retention policy this run adopts keeps the three most recent checkpoints on the parallel file system for fast recovery, copies every 100th checkpoint and the final checkpoint to object storage for long-term auditability, and deletes the rest. This policy

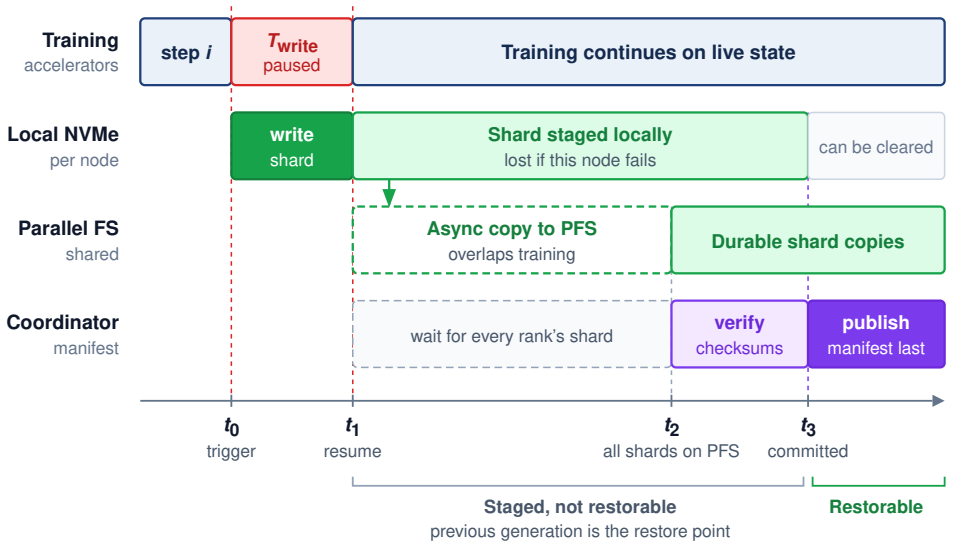


Figure 0.48: Two-phase checkpoint staging: Read the lanes left to right. Training pauses only for the local NVMe write (t_0 to t_1); the copy to the parallel file system overlaps later training steps, and the coordinator publishes the manifest last (t_3). Between t_1 and t_3 the new generation exists only as staged shards, so the previous committed generation remains the restore point.

reduces the parallel file system checkpoint footprint from 10.6 PB to roughly 7.35 TB (three live full checkpoints) while preserving 43 periodic historical snapshots in object storage, plus the final checkpoint when it does not coincide with that schedule, for posttraining analysis.

Incremental checkpointing offers a further optimization for reducing T_{write}. Rather than saving the entire training state every time, an incremental checkpoint records changed state relative to a declared base or preceding generation. The delta must include changed optimizer and continuation state as well as parameters. For models where a large fraction of parameters are frozen (such as fine-tuning scenarios where only the last few layers are updated), incremental checkpoints can be orders of magnitude smaller than full checkpoints. Restoring a generation requires its base and every intervening delta, so smaller saves add recovery work and dependencies. Periodic full checkpoints bound that chain. The retention policy must preserve each dependency until no retained generation requires it.

Checkpoint storage interacts directly with the system's failure model. From the storage perspective, the design goal is to minimize T_{write} (the time the training pipeline pauses) while defining which failures each saved generation survives. Failures can occur during background replication, so a locally staged generation and a durably committed generation must remain distinct. Reducing T_{write} through tiered staging makes more frequent checkpoints affordable. Minimizing T_{write}, however, only matters if the checkpoint can actually be read back; the costlier failure is a checkpoint that was written but never verified as restorable.

War Story 4.1: The backup that had not been restored (2017)

Context: On January 31, 2017, a GitLab.com site reliability engineer working a database replication incident accidentally wiped the primary PostgreSQL data directory (GitLab 2017).

Mechanism: All five layered backup paths failed simultaneously: S3 dumps were silently empty due to a version mismatch, Azure disk snapshots were disabled, replication was broken, LVM snapshots were six hours stale, and WAL archiving was unimplemented.

Impact: Six hours of production database writes, user comments, and repository metadata were permanently lost, requiring an 18-hour emergency restoration from a staging snapshot.

Fix: GitLab instituted automated daily backup restoration testing, unified PostgreSQL versioning across environments, and implemented automated WAL archiving to S3.

Systems lesson: Storage reliability is a restore property, not a backup property. A checkpoint, replica, or dump only counts if the team regularly proves that it can be located, validated, and restored under incident conditions. ML systems encounter this exact vulnerability: a model checkpoint written to object storage or a feature store snapshot is useless if silent version mismatches or missing restore tests prevent resuming a multi-day training run after node preemption.

That incident turns checkpoint storage from a capacity question into a restore-design question.

Checkpoint 4.4: Checkpoint storage design

A training cluster of 256 nodes saves a 175B-parameter model checkpoint every 10 minutes. Each checkpoint is 2,450 GB total, distributed across all nodes.

- ☐ **Per-node state**: calculate the per-node checkpoint size.
- ☐ **Local write**: calculate T_{write} for the local write when each node writes to local NVMe at 28 GB/s.
- ☐ **Async copy**: calculate the per-node write bandwidth and async-copy time when the parallel file system provides 1 TB/s aggregate and all 256 nodes write simultaneously.
- ☐ **Tiered staging**: explain why tiered staging (local NVMe first, then async PFS copy) is faster than writing directly to PFS.

Distributed checkpoint coordination

In a sharded training setup with 256 nodes, no single node necessarily holds the complete training state. One node may hold a shard of the optimizer state, while other model-partitioning strategies split the weights themselves across devices. A complete checkpoint therefore requires every node to save its shard, and the checkpoint is publishable only after all expected shards have been durably written and verified against one manifest. This creates a coordination problem: the system must confirm that all 256 nodes have finished writing before it exposes the generation for restore.

The simplest approach coordinates a snapshot at one completed training step: all nodes pause, write their shards to local NVMe, then run a cluster-wide acknowledgement operation to confirm completion. Only when every node has acknowledged its write does training resume. Capturing the same step prevents mixing shards from step s with shards from step $s+1$; a barrier after writing cannot repair a snapshot captured inconsistently. The slowest node determines when the completion barrier releases.

Asynchronous checkpointing reduces the training pause by writing in the background. Nodes first coordinate the training step to capture. Each node copies its accelerator-resident shard to a dedicated pinned host-memory buffer, then resumes training and writes the buffer to NVMe in a background thread. The snapshot buffer must remain immutable until the background write finishes; separate live-state buffers allow training to advance without changing the captured generation. If a node fails during the asynchronous write, its local shard may be incomplete. The job must wait for the required writes or peer replication before declaring this generation durable, even if training has already resumed.

The choice between synchronous and asynchronous checkpointing depends on the pause budget and save frequency. A 1-second pause at 200 ms per iteration costs five iterations; whether that overhead is acceptable depends on how much useful training occurs between saves. Asynchronous checkpointing reduces exposed write time when snapshot buffers and background bandwidth are available, but its buffer capacity, contention, and durability delay also enter the decision.

Beyond the choice of synchronous or asynchronous methods, checkpoint format optimization reduces the per-node I/O volume. In the simplest data-parallel setup, every node holds an identical copy of the model weights, so a naive checkpoint would redundantly save the same data from

every node. Sharded checkpoint protocols avoid that redundancy by saving shards instead of full replicas. DeepSpeed's zero-redundancy checkpointing applies the write-once rule through its ZeRO optimizer-state partitioning: each of the N_{nodes} nodes saves only its $1/N_{\text{nodes}}$ shard of the optimizer state, and the system saves one consolidated copy of the weights. PyTorch's Distributed Checkpoint protocol follows the same storage principle by writing each rank's sharded data to a distinct file.

For the 175B model split evenly across 256 nodes, each node writes only its roughly 9.6 GB shard of the total 2,450 GB state. Had one node saved the full 2,450 GB itself, its 28 GB/s local stripe would need more than a minute; the shard takes around a second on one NVMe drive and well below a second on the stripe. For coordination, the local NVMe write bounds one component of the exposed pause, while the durable copy to the parallel file system can overlap subsequent training. Snapshot copying, coordination, and any replication required before resumption also contribute to the actual pause.

With the checkpoint accounting now derived in full, the running example's storage demands can be consolidated against the same hierarchy, so the training dataset, checkpoints, and archive lineage are visible side by side.



Systems Perspective 4.2: The 175B model's storage footprint

Table 0.27 assembles the complete storage picture for the running example, a 30-day training run of a 175B-parameter model on 256 nodes.

Table 0.27: 175B-Parameter Training Storage Footprint: Volume and primary storage tier for each data category in a 30-day, 256-node training run.

Category	Volume	Primary Tier
Training dataset (compressed source)	3 TB	Object Storage
Training dataset (tokenized, per epoch)	6 TB	Object Storage → NVMe cache → Host DRAM
Model weights (FP16)	350 GB	GPU HBM (distributed)
Master weights (FP32)	700 GB	GPU HBM (ZeRO-partitioned)
Adam moments (two FP32 states)	1,400 GB	GPU HBM (ZeRO-partitioned)
Single resumable checkpoint	2,450 GB	NVMe → PFS → Object Storage
All checkpoints (30 days, 10-minute interval)	10.6 PB	NVMe (transient) → PFS (recent) → Object (archive)
Archive (retained checkpoints + dataset)	~116.8 TB	Glacier

The total data moved through the hierarchy is approximately 10.6 PB of checkpoint data plus 6 TB per 1 epoch of training data reads. For a single-epoch language model training run, checkpoint I/O dominates data loading I/O by a factor of over 1,764.

Checkpoint accounting completes the training side of the storage picture. Inputs are read once per epoch and state is written thousands of times, each on its own path through the tiers, and every one of those placements carries a price set by the tier that holds the bytes and by how often they cross a billing boundary.

Storage Economics

A 100 TB training dataset can reside on any tier of the hierarchy, but the cost differs by orders of magnitude depending on which tier is chosen and how the data is accessed. ML storage economics is not simply about choosing the cheapest tier; it is about minimizing total cost of data delivery, which includes storage costs, transfer costs, and the opportunity cost of idle accelerators.

The per-gigabyte rates quoted for each tier become concrete when applied to one 100 TB training dataset. The recurring annual storage costs diverge by orders of magnitude: object storage (S3 Standard) costs $24,000 per year, provisioned local NVMe costs $120,000 per year, and archival storage (such as Glacier) drops to $4,800 per year. By contrast, hypothetically provisioning the same capacity as GPU memory at $15/GB would require $1,500,000 in upfront acquisition cost alone, before factoring in amortization, power, or server housing.

The 5× cost difference between local NVMe and object storage motivates placing data on the least expensive tier that meets its delivery and recovery requirements. Device technology contributes to the gradient: HBM uses 3D-stacked silicon with through-silicon vias, and accelerator-adjacent capacity is constrained by packaging and node design. Shared storage pools capacity across clients but introduces network and service dependencies. The cost comparison must include those dependencies rather than infer the cheapest usable path from capacity price alone.



Repeated cross-boundary egress, not storage, dominates cloud cost.

Storage cost, however, is only part of the equation. Data transfer costs can dominate, especially in cloud environments. When compute runs in a different region or cloud from the bucket, as assumed here, reading the 100 TB dataset from object storage to compute instances incurs a transfer charge of $9,000. For multi-epoch training that reads the dataset 10 times, the egress cost alone reaches $90,000, more than the annual storage cost. This inversion, where *reading* data costs more than *storing* it, drives the architecture decision to cache data on local NVMe rather than streaming from object storage each epoch.

The economic analysis changes further when accounting for the opportunity cost of accelerator idle time. The book's reference cluster of 1,024 GPUs, half the chapter's running cluster, at $2/GPU-hour costs $49,152 per day. If input stalls reduce its compute-active fraction from 90 percent to 70 percent, the lost compute time is valued at $9,830 per day. Over a 30 days training run, this amounts to $294,912. That value sets a budget for evaluating a storage upgrade, but the recoverable benefit depends on how much exposed wait the upgrade removes. Capacity that does not relieve the limiting stage yields no corresponding compute-time saving.

Systems Perspective 4.3: The storage cost iceberg

The visible cost of storage ($/GB/month) is the tip of the iceberg. Below the surface lie costs that often exceed the storage cost itself:

- **Egress fees**: A representative cross-boundary egress charge of $0.09/GB makes a 100 TB dataset read once per epoch across 10 epochs cost $90,000 in egress alone.
- **IOPS charges**: Object storage charges per-request fees. S3 Standard GET requests cost about $0.0004 per 1,000 requests, so a dataset of 100M individual files, read once, costs about $40 in GET request fees before data transfer or retrieval charges, even though the storage cost is $2,000/month.
- **Idle accelerator cost**: If storage stalls reduce GPU utilization from 90 percent to 70 percent on a cluster of 1,024 GPUs at $2/GPU-hour, the lost compute costs $9,830/day (20 percent of $49,152 daily spend), dwarfing any storage savings.
- **Retrieval fees**: Archive storage charges retrieval fees ($0.02/GB for Glacier) in addition to egress. Restoring a 100 TB dataset from Glacier costs $2,000 in retrieval fees plus $9,000 in egress.

The economically rational strategy often invests more in storage (local NVMe caching, parallel file system capacity) to reduce transfer costs and prevent accelerator stalls.

The cost iceberg reveals that raw storage capacity can account for less than half of the total expenditure; replication, metadata operations, API calls, and cross-region transfers can collectively dominate the bill at scale. Among those hidden line items, egress is the one that often flips the architecture decision. Unlike capacity charges, which scale with the volume of data stored, egress charges scale with the volume of data read, and ML training reads the full dataset on every epoch.

Napkin Math 4.8: The egress tax

Problem: A team trains a vision model on a 50 TB image dataset stored in S3. Training runs for 20 epochs. The decision is whether to stream from S3 each epoch or stage to local NVMe.

Option A: Stream from S3

- Storage: 50 TB × \$0.02/GB/month × 12 months = \$12,000/year
- Egress: 50 TB × 20 epochs × \$0.09/GB = \$90,000 per training run
- Total for 4 training runs/year: \$12,000 + \$360,000 = \$372,000/year

Option B: Stage to local NVMe

- Storage (S3 source of truth): \$12,000/year
- NVMe capacity (50 TB across cluster): 50 TB × \$0.10/GB/month × 12 = \$60,000/year
- Egress (stage once per training run): 50 TB × 4 runs × \$0.09/GB = \$18,000/year
- Total: \$12,000 + \$60,000 + \$18,000 = \$90,000/year

Systems insight: Local NVMe caching saves \$282,000/year at 20 epochs per run, enough to fund 9 additional H100 GPUs at list price. Including the \$60,000/year provisioned NVMe cost and the once-per-run staging egress, the break-even point is just over 4 epochs per run; by the fifth epoch, local caching is cheaper than streaming from S3 every epoch.

The notebook turns the iceberg into a decision rule: the cheapest storage tier is not always the cheapest delivery path. Object storage can remain the source of truth, but repeated reads make egress, request overhead, and idle-accelerator cost part of the storage design. Multi-epoch vision training may justify staging on local NVMe by the fifth epoch, while single-epoch language-model pretraining may leave the corpus in object storage and optimize the streaming path instead. The running example stages anyway, although it reads its corpus only once, because egress is not what decides it. Each node's share of the shards fits easily on local NVMe, the staging copy happens once before the clock starts, and local reads keep object-store latency tails out of every training step. When compute and bucket share a region, transfer fees largely disappear and the same comparison turns on request charges, latency, and idle accelerators instead. The architecture is therefore chosen from access pattern, read count, and latency sensitivity rather than from \$/GB/month alone.

The cost analysis extends to the parallel file system tier, which occupies a middle ground between NVMe and object storage in both performance and price. A parallel file system capable of delivering 1 TB/s aggregate bandwidth requires roughly 100 OSS nodes, each with multiple NVMe drives and high-bandwidth network connections. Because the throughput target, not the stored capacity, sets that server count, a bandwidth-sized system costs far more than its stored bytes alone would suggest. This expense is justified only if the alternative, streaming from object storage and paying egress fees, is even more expensive, or if the latency requirements of checkpoint writes cannot be met by object storage alone. The break-even analysis depends on the organization's workload mix: a team running a single long training job may find that staging data on local NVMe and bypassing the parallel file system entirely is the cheapest option, while a team running many concurrent short jobs benefits from the shared namespace that a parallel file system provides.

The decision to build vs. buy storage infrastructure hinges on the trade-off between the high capital expenditure of an on-premises parallel file system and the recurring operational expenditure of cloud object storage. A 1-petabyte Lustre deployment, sized for capacity rather than for the 1 TB/s target above, costs roughly \$3–5 million in hardware, plus an additional \$500,000 per year in operational overhead for power, cooling, and engineering support. Storing 1 PB in a cloud object store at \$0.02/GB/month costs \$240,000 per year for storage alone. However, egress fees for accessing the data dominate the total cost: reading that petabyte at 10 reads/year adds \$900,000 in data transfer fees. Under these assumptions, annual cloud delivery costs \$1,140,000; after subtracting \$500,000 of on-premises operations, the net savings are \$640,000 per year. The resulting hardware break-even is roughly 4.7–7.8 years, and a payback within two years would require a hotter workload with many more full-dataset reads per year, lower capital expense, or non-egress drivers such as checkpoint latency and shared-namespace requirements. For the running example, the 6 TB serialized corpus is

much smaller than 1 PB, so the local-storage case is driven more by latency, repeated experiments, and checkpoint staging than by one-year egress savings alone.

Hardware degradation introduces the need for a storage refresh cycle. NVMe drives are rated for a specific write endurance, measured in DWPD over a typical five-year warranty period. Many large-scale ML training workloads are predominantly read-heavy once the initial dataset is ingested, so drives in a training cluster can last beyond their rated write lifespan. The primary driver for a refresh cycle may therefore be density rather than wear: newer drives often provide more capacity at a similar price point. Refreshing a cluster from 7.68 TB to 15.36 TB NVMe drives doubles the local cache capacity, enabling larger datasets to be staged directly on compute nodes and reducing dependence on the parallel file system for steady-state reads.

Tiering strategies

The cost structure laid out above turns tiering into a placement policy: keep data only as close to the accelerator as its access frequency and latency requirement justify. A tiering strategy encodes that policy across the hierarchy. Its hot, warm, cold, and archive labels name placement roles for a dataset rather than devices, and they follow the scope brackets of figure 0.42. The node-local pair is the hot tier, and the three shared services become the warm, cold, and archive tiers. The tier sections called local NVMe a warm cache because it sat in front of shared storage; in this placement vocabulary the same drives belong to the hot tier, because they hold the data the running job consumes.

The fastest and most expensive layer is the hot tier (local NVMe + host DRAM), which holds data being actively consumed by the running training job. Datasets are staged from shared storage to local NVMe at job start. This tier is provisioned per-node and is not shared across the cluster, so data that multiple jobs or teams need simultaneously cannot live here alone.

That shared-access requirement is what justifies the warm tier (parallel file system), which holds datasets accessed by multiple jobs or teams, shared checkpoints for fault recovery, and model artifacts under active development. The parallel file system provides the shared namespace necessary for multi-tenant access with strong consistency.

Below the warm tier sits the cold tier (object storage), which serves as the canonical repository for all organizational training data. Datasets are authored and versioned in object storage, then promoted to warmer tiers when needed for training. Object storage also serves as the durable backup for checkpoints after they are staged from local NVMe through the parallel file system.

Data that must be retained for compliance or reproducibility but is not expected to be accessed during normal operations drops to the archive tier (Glacier or equivalent). Lifecycle policies automatically transition data from cold to archive after a configurable period, typically 90 to 365 days since last access.

The movement of data between tiers should be automated through lifecycle policies. A well-designed tiering system automatically promotes data from cold to warm when a training job requests it, and demotes data from warm to cold when no job has accessed it for a configurable period. Manual tiering introduces operational burden and inevitably leads to either over-provisioning (data left on expensive tiers) or under-provisioning (data unavailable when needed).

Return to the running example to see tiering in action. The 3 TB source corpus and 6 TB serialized training shards live permanently in object storage (cold tier). When a training job is scheduled, the orchestration system triggers a "data staging" phase that copies each node's assigned tokenized shards from object storage (cold tier) to its local NVMe (hot tier) before the first iteration, as in section 15. The run's single epoch then reads entirely from local NVMe, incurring no network traffic for training inputs. When the job completes, a cleanup process deletes the local NVMe copies; the parallel file system holds only the job's recent checkpoints, which the retention policy of section 15 governs. The entire lifecycle, from staging through training to cleanup, is managed by policy rather than by the training engineer.

The economic benefit of automated tiering compounds over time. An organization retaining 50 training datasets of 10 TB each would need 500 TB of parallel file system capacity if all data were left in place. If ten datasets are active concurrently and the other forty can be demoted after their jobs finish, automated tiering reduces the dataset capacity required on the parallel file system to 100 TB, saving $144,000 per year at the parallel file system's per-TB rate. These savings are invisible in any single experiment but substantial when accumulated across the fleet.

Data staging patterns

The staging decision determines where the job pays for data movement: before training starts, during the first epoch, or on every epoch. Three common patterns balance the trade-off between startup latency and steady-state throughput.

Prestaging copies the entire dataset from object storage to local NVMe before the first training iteration begins. This approach delivers the highest steady-state performance because all subsequent reads are served locally, but it imposes the longest job startup delay. Staging a 10 TB dataset across 256 nodes at 500 MB/s per node takes roughly 80 seconds per node under ideal conditions, and contention on shared parallel file system bandwidth can extend that stall to several minutes.

On-demand staging instead defers copying until the data loader first accesses each shard. This removes the upfront startup delay, but the first epoch must pay the full network-read cost. Such amortized overhead works best for multi-epoch training where local reads across later epochs repay the initial transfer latency.

Streaming keeps data off local storage entirely, reading records from the parallel file system or remote object store on every epoch. Streaming incurs zero startup delay and requires no local NVMe capacity, but every epoch repeatedly absorbs the network-read cost. This trade-off makes streaming best suited for single-epoch pretraining runs or for massive datasets that exceed the aggregate local NVMe capacity of the cluster.

Tiering and staging settle where training data and checkpoints live and what each placement costs. Serving reuses the same hierarchy for a different objective, the time to bring a model into HBM and the latency of serving-time state, rather than epoch throughput.

Storage for Inference Workloads

The fifth workload inversion of section 13 set serving apart from training. Full-corpus training streams datasets and writes checkpoints in bursts, while in the weight-resident serving baseline, inference reads model weights once at startup and then serves requests from HBM. The primary storage challenge shifts from sustained dataset throughput to model-loading latency, although retrieval indexes and KV-cache offload add serving-time I/O when those mechanisms are enabled.

The most critical metric for inference storage is model loading latency, often called cold-start time: the duration required to load a model from storage into the accelerator's HBM. For the 175B parameter language model, the weights alone occupy 350 GB in FP16 format. Loading this sequentially from a single high-performance NVMe drive at 14 GB/s takes 25 seconds, an unacceptable delay for a user-facing application. Loading from a shared PFS at a per-node rate of 4 GB/s takes 87.5 seconds. From object storage at 1 GB/s, the delay reaches 5.8 minutes.

To reduce cold-start time, the model is sharded and loaded in parallel. If the 350 GB model is striped across 8 NVMe drives, each loading a 43.75 GB shard at 7 GB/s, the total load time drops to roughly 6.2 seconds. When using tensor parallelism across 8 GPUs, each GPU loads only its 43.75 GB shard. If the weights already sit in host DRAM, each GPU's own PCIe link could move its shard in about 0.7 seconds, but the 8 transfers share the node's 200 GB/s of host-memory bandwidth, so the full load takes about 1.8 seconds. For the most latency-sensitive applications, organizations maintain warm replicas: one or more copies of the model weights kept preloaded in host DRAM, ready for that host-memory-bound transfer. This trades DRAM capacity for a load of about 1.8 seconds instead of the 6.2 seconds striped NVMe read.

These load times describe one replica. The model rollout previewed in section 13 asks all 100 replicas to load a new version at once, 35 TB of weights in one burst. If every replica reads from object storage at the 1 GB/s single-client rate, the fleet asks the store for 100 GB/s. A store whose aggregate service matches that figure, the 100 GB/s of table 0.24, finishes the rollout in about 5.8 minutes, no slower than one replica's cold start; any smaller aggregate share stretches the rollout in proportion. Reading from the 1 TB/s parallel file system instead would take about 35 seconds, but only by claiming the whole file system and starving every training job that shares it, the read-side mirror of a checkpoint storm. Serving fleets therefore stage the new version on local NVMe before switching traffic, roll the update across groups of replicas so that the old version keeps serving, or let replicas that have finished loading supply the rest.

During autoregressive generation, the server keeps a per-request record of the attention keys and values produced by earlier tokens so it can generate the next token without recomputing the

entire prefix. This record, called the key-value cache (KV cache), grows with sequence length and can consume significant HBM. For long sequences (128K tokens or more), KV cache offloading to host DRAM or NVMe extends the effective context window at the cost of increased latency per generated token, because cache blocks must be moved back into HBM before attention can use them. The storage lesson is that inference maintains an active working set rather than presenting solely a model-loading demand. When serving must also retrieve external context to ground that generation, the storage pipeline faces an entirely different access pattern: low-latency random queries into high-dimensional vector indexes.

Retrieval Infrastructure and Vector Indexes

An inference request that needs supporting documents cannot wait for a sequential scan of the training corpus. A retrieval system first converts documents into vectors that represent semantic meaning, then finds nearby vectors and returns their source documents as context. The same storage analysis still applies, but the unit of demand becomes a query and its index accesses, and the deadline becomes the serving latency budget. With a graph-based approximate nearest-neighbor (ANN) index, the storage system traverses a high-dimensional vector graph instead of streaming sequential blobs via formats such as TFRecord or Parquet. Graph indexes are one family among several, and the others impose different bandwidth, capacity, and recall trade-offs. Exact flat search compares the query against every stored vector. Inverted-file (IVF) partitioning clusters the vectors and searches only the few clusters nearest the query. Product quantization (PQ) compresses each vector into short codes so that more of the index fits in memory, at some cost in accuracy.



Systems Perspective 4.4: The IOPS bottleneck in high-dimensional search

For graph-based ANN, this architectural pattern shifts the primary storage bottleneck from sequential read bandwidth to random-access IOPS. The search traverses a high-dimensional graph to find approximate nearest neighbors across billions of embeddings. Its performance is governed by the trade-off among recall, latency, and capacity, where recall is the fraction of the true nearest neighbors that the approximate search returns. Raising recall requires traversing a larger portion of the index, driving up IOPS and latency. The arithmetic of a disk-resident traversal shows why IOPS, not bytes, binds. Each hop that misses DRAM costs one dependent SSD read of roughly 100 µs (table 0.24), and the next hop cannot start until that read returns, so ten such hops already spend a millisecond of the serving budget in storage alone. Throughput is bounded separately. A drive whose 4 KB random reads run near 0.5 GB/s (section 13) completes on the order of 10^5 such reads per second, and every concurrent query draws on that same budget, while each read moves only a few kilobytes. A 1,536-dimension embedding in FP32 (4 bytes per value) consumes approximately 6.1 KB, so a billion-document corpus requires roughly 6.1 TB before graph adjacency lists. If those lists add 50 to 100 bytes per node, they add 50 GB to 100 GB, making raw vectors plus minimal graph metadata about 6.2 TB at the high end. Production indexes can be larger once identifiers, graph levels, allocator overhead, deleted-entry slack, and replication are included. In-memory hierarchical navigable small world graph indexes make graph navigation fast when the index fits in DRAM (Malkov and Yashunin 2020). Disk-backed graph indexes such as DiskANN trade DRAM footprint against SSD traversal while targeting high recall and low query latency (Subramanya et al. 2019).

Graph-based retrieval therefore spends storage budget on index levels that keep random traversal inside the serving latency service-level objective. A disk-backed graph is economical only if the extra SSD accesses do not erase the quality gain from searching a larger corpus. Flat, IVF, and PQ designs move that budget toward scan bandwidth, partition probes, or decompression and approximation error. The same hierarchy now supports bulk model loading, request-scoped KV state, and retrieval, each with a distinct service-rate contract. Each of those serving workloads reads artifacts that training produced. The last storage workload reverses that direction. When the fleet generates its own training data, storage must hold both the new samples and a record of how every one was made.

The Synthetic Fuel Line

The versioned-artifact contract of section 12 applies to generated training samples as well as collected ones. When a fleet generates candidate samples, filters them, and verifies the survivors, each stage adds storage traffic and records that must remain linked to the accepted payload. The pressure to generate comes from the volume's scaling thesis. The scaling laws of section 6 make loss fall as a power law in training data as well as in parameters within their fitted regime, so each step up in model scale calls for more tokens, and the compute-optimal allocation grows the token budget with the parameter count. As high-quality human-generated text becomes harder to expand, the fleet encounters the **data wall**: the point where additional training samples must increasingly come from synthesis, simulation, curation, or expensive human collection (Villalobos et al. 2024). This shift from simple collection to managed data generation sends more than payload bytes through the hierarchy. A "synthetic fuel line" must also store the **provenance chain** of every sample: which model generated it, which filters accepted or rejected it, which judge or verifier models scored it, and which downstream run consumed it. That lineage makes repeated reuse of generated material traceable. It supports investigation of **model collapse**, where recursive training on generated data can degrade the learned distribution (Shumailov et al. 2024); retaining provenance alone does not prevent the degradation. The storage design must separately budget retained artifacts and the repeated scans used to assess them.

Napkin Math 4.9: The synthetic tax

Problem: A 1 TB synthetic dataset retains provenance metadata and undergoes three independent verification scans. How much persistent capacity and pipeline traffic does it require if judge outputs are not retained as full dataset copies?

1. **Raw Payload**: 1 TB.
2. **Provenance Overhead**: 40 percent extra for lineage hashes, generation logs, and reward-model scores.
3. **Verification Traffic**: 3 judge passes each read the payload, producing 3 TB of read traffic. Their scores reside in the provenance metadata rather than in three retained payload copies.
4. **Capacity Result**: Persistent capacity is 1 TB $\times$ 1.4 = 1.4 TB, a 1.4× capacity factor.
5. **Traffic Result**: Writing the payload and metadata once and reading the payload three times moves 4.4 TB, a 4.4× traffic factor before generation and judge-model compute are counted.

Systems insight: Verification primarily taxes service rate and compute, while retained provenance taxes capacity. The two costs coincide only when the pipeline materializes each judge output as another full dataset. Synthetic storage must therefore budget bytes at rest separately from bytes moved and record which generator, filters, judges, and downstream runs produced each accepted sample.

The synthetic fuel line completes the chapter's survey of storage workloads by making lineage part of the payload. Large-scale training, checkpointing, retrieval, and synthetic-data generation stress different tiers. Their common design requirement is to account for service rate and correctness alongside capacity. A store can have room for every artifact yet fail to deliver it on time, restore a complete generation, or identify the data that shaped a model. Every design in the chapter so far also assumes today's six tiers, and the boundaries between those tiers are themselves moving.

Storage Technologies That Move Tiers

While the six-tier hierarchy represents a common production baseline, memory and storage technologies can fill the bandwidth gaps between existing tiers, reshaping effective storage architecture for large-scale ML. The widest unfilled gap in the hierarchy sits between host DRAM and local NVMe, and Compute Express Link (CXL), the coherent capacity tier of section 11, targets exactly this gap. Seen from storage, CXL-attached memory is a "Tier 1.5," slower than host DRAM but

byte-addressable, with access latencies of roughly 200 to 500 ns against the roughly 100 µs of an NVMe read. It offers a capacity pool for the structures that the Tier 1 discussion showed competing for host DRAM. For the running example, CXL-attached memory could expand the effective host memory tier from 512 GB to over 4 TB per node. That pool could hold deeper prefetch queues, embedding-table spillover, or a local shard cache as large as the 3 TB compressed source corpus without paying NVMe access latency on every read, though it still falls short of the full 6 TB tokenized training copy on one node.

A different bottleneck appears when CPU-side decoding, not storage bandwidth, throttles the pipeline. The computational storage drive closes that gap by embedding processing elements (field-programmable gate arrays (FPGAs) or simple CPU cores) directly on the SSD controller, enabling decompression, filtering, or format conversion to happen at the storage device rather than consuming host CPU cycles. For ML pipelines where CPU-side decoding is the bottleneck, computational storage could eliminate the CPU from the data path entirely, complementing GDS by offloading work that direct DMA cannot address.

Checkpoint writes impose the pause T_{write} while a consistent snapshot reaches the first storage tier, and shrinking it makes frequent saves less costly. Persistent memory, despite market shifts such as the discontinuation of Intel Optane, remains the architectural idea that attacks that term directly. Byte-addressable non-volatile memory could lower the destination-device latency, but the checkpoint pause still includes snapshot creation, byte transfer, and coordination. A lower device-access latency reduces T_{write} only to the extent that this device lies on the pause's critical path.

These technologies are not yet broadly deployed at the scale of the largest ML clusters, but they illustrate the direction of the storage hierarchy's evolution. The fundamental principle remains unchanged, with faster, more expensive storage closer to the accelerator and slower, cheaper storage at the periphery. What changes is the *granularity* of the tiers and the *size of the gaps* between them.

Fallacies and Pitfalls

Storage design errors are among the most expensive mistakes in ML infrastructure because they are discovered late, when training begins, and remediation requires either expensive hardware upgrades or time-consuming data reformatting. The following fallacies and pitfalls capture the most common errors that experienced storage engineers make when first encountering ML workloads.

Fallacy: *NVMe is fast enough to feed GPUs directly without pipelining.*

A single NVMe drive delivers 7 GB/s, while an H100 consumes 3.35 TB/s from HBM. The gap is roughly 479×. Even four drives in RAID-0 only close this gap to about 120× before overhead. Without pipelining and prefetching to hide the latency of loading from NVMe to host DRAM to HBM, every batch transfer introduces a stall equal to the transfer time. The HBM ratio measures tier disparity rather than the required input rate, because model state is reused many times for each batch loaded from storage. The relevant test compares measured input delivery with batch bytes divided by compute time, then checks whether buffering hides transfer latency and jitter. A device can have enough sustained bandwidth and still expose stalls when transfers are serialized with computation.

Pitfall: *Relying on prefetching to hide object storage latency.*

Prefetching hides latency only within the time covered by ready batches; it cannot hide an arbitrarily long interruption. With N_{prefetch} batches ready and constant compute time, a complete interruption of supply exhausts the queue after $N_{\text{prefetch}} \times T_{\text{compute}}$ milliseconds. A slow request need not stall computation if other completed work remains available, but correlated delays can deplete many workers' queues together. Provision buffer depth from measured delivery tails, test correlated interruptions, and verify that the sustained refill rate meets consumption. Local staging can reduce remote exposure when the required shards fit and remain valid.

Fallacy: *Millions of small training files are harmless at scale.*

Storing each training sample as an individual file (one JPEG per image, one JSON per text sample) creates repeated per-file work through operations such as `open()`, `stat()`, and `close()`. Metadata becomes the bottleneck when the resulting request rate exceeds the service's capacity, even if byte

bandwidth remains available. Aggregating samples into sequential shards amortizes that work (section 5). Packaging 10,000 to 100,000 samples per shard can reduce file-level operations by a corresponding 10,000 to 100,000× when readers consume whole shards. The loader must still implement the intended sampling policy and avoid repeated enumeration.

Pitfall: *Ignoring egress costs when designing the storage architecture.*

Cloud egress costs are invisible during development but can dominate at scale. Under a representative $0.09/GB cross-boundary egress fee, a training job that reads a 100 TB dataset from object storage 10 times incurs $90,000 in egress fees, far exceeding the annual storage cost of $24,000 under the object-storage price assumption in section 9. These fees apply when reads cross a region, provider, or internet boundary; same-region reads may be free or discounted, which is exactly why the cost stays hidden until a cross-region or multi-cloud topology makes it unavoidable. Teams that prototype with small datasets on object storage and then scale up discover that their storage architecture is economically unsustainable. The fix is to budget egress costs explicitly and to design the data pipeline to minimize cross-tier transfers, typically by staging data on local NVMe at job start rather than streaming from object storage each epoch.

Fallacy: *Average write bandwidth is enough for checkpoint design.*

Checkpoints are written by all nodes simultaneously, creating bursts that can exceed steady-state bandwidth by 10× or more. When the PFS write lies on the training critical path, sizing it only for average write load extends T_{write} during bursts and reduces effective training throughput. A synchronous PFS-direct design must provision enough burst bandwidth to meet its pause budget. With local staging, the first tier absorbs the burst and the PFS drains it in the background; the shared tier must then meet the durability deadline and keep up with repeated saves without an unbounded backlog.

Pitfall: *Assuming faster accelerators automatically improve training throughput.*

When an organization upgrades from A100 to H100 GPUs, they expect training time to decrease proportionally to the compute improvement. If the storage pipeline was already marginal on A100s, delivering data just fast enough to avoid stalls, the faster H100 compute simply hits the I/O wall sooner. The accelerator upgrade reduces T_{compute} without reducing T_{IO}, which means the data stall ratio increases. Every accelerator upgrade must be accompanied by a storage pipeline audit to ensure that the faster compute does not simply expose a previously hidden storage bottleneck.

Fallacy: *RAID configurations optimized for databases are suitable for ML training.*

RAID selection follows the tier's failure contract. A disposable local cache can use RAID 0 to aggregate drives without parity, provided a durable source remains available and the fleet can tolerate restaging after a drive failure. Redundant layouts can still reduce disruption when restaging is slow or the cache supports an availability objective. A local checkpoint awaiting durable replication is not yet disposable merely because it lives on the same NVMe drives. Treating all ML storage as replaceable input data confuses capacity placement with recovery policy.

Pitfall: *Creating full copies for each dataset snapshot.*

Copying an entire dataset for every version duplicates unchanged content. For a 10 TB dataset with 5 percent of its bytes changed, a full copy retains 9.5 TB of redundant data. Content-addressable storage or delta encoding can reuse unchanged objects or blocks. If the storage granularity isolates the changed bytes, the new payload is roughly 500 GB, a 20× reduction before metadata and redundancy overhead. Rewriting large compressed shards can reduce that saving because a small sample change may replace a much larger stored object. Versioning must therefore preserve lineage while choosing a reuse granularity compatible with the dataset format.

Fallacy: *Compression always helps because it reduces the amount of data to read.*

Compression reduces stored and transferred bytes but adds decoding work. If decoding further saturates an already limiting host processor, it makes that bottleneck *worse*, not *better*. If transfer is limiting and decoding has headroom, compression can improve delivery until another stage becomes the limit. Compare candidate representations using output-equivalent stage rates, including CPU or GPU decoding, rather than select the strongest codec from an I/O-bound label alone. The same

choice can reduce capacity cost without improving training throughput. These fallacies all return to the same accounting exercise: where each byte lives, how often it moves, and which tier pays the cost.

Summary

Storage in ML systems is an active, multi-tiered pipeline that supplies accelerator inputs, preserves restorable state, and records the lineage of training and serving artifacts. The hierarchy exists because workloads need different combinations of bandwidth, capacity, latency, durability, and cost, and the demand on it grows with the scaling laws that drive the fleet. Larger models call for more training tokens and carry larger checkpoints, so storage pressure rises at every step up the model-size curve. The data pipeline throughput equation, $\text{BW}_{\text{required}} = N_{\text{GPU}} \times \eta_{\text{target}} \times D_{\text{vol}}^{(\text{batch})} / T_{\text{compute}}$, sizes delivery for a chosen training rate when applied to the representation and distinct input consumers at each tier. Measured against the Fleet Law, storage succeeds when it contributes no exposed time. Prefetching preserves the Fleet Law's assumption that the next batch is already resident. Tiered checkpoint staging shrinks the save pause that surfaces in $T_{\text{sync}}(N)$ to the local write and takes the slow shared-storage copy off the step entirely, so that copy costs step time only when it contends with collectives or input reads. Both spend communication (C_2) and coordination (C_3) capacity to protect compute (C_1).

Treating the hierarchy as a cache makes that sizing workload-specific. The hit rate and the service times of the hot and cold paths determine mean effective throughput, while the tail and correlation of misses determine whether a finite prefetch buffer drains. At the durable tiers, reliability also separates into three contracts: data survival, service response, and the version a reader may observe. These are durability, availability, and consistency, respectively; improving one does not automatically establish the others.

The diagnostic task is to identify which service contract fails before changing the storage tier. Low accelerator utilization can arise from metadata-intensive loading, a depleted prefetch queue, an exposed checkpoint write, or host-memory traffic crossing a contended NUMA link. Measure input wait separately from communication and synchronization before attributing it to storage. Full-corpus scans favor aggregated shards, while graph retrieval and live features require random access and explicit consistency. A depleted input queue can reflect slow storage, metadata contention, or insufficient decoding capacity; GDS helps when host payload copying is the limiting stage while retaining CPU control. Compare remedies by total delivery cost, including transfers and idle accelerators. For checkpoint writes, evaluate the shorter training pause together with the time until a complete generation becomes durable and publishable.

Key Takeaways: Feed the accelerators or waste them

- **Workload demand sizes the delivery path**: Use $\text{BW}_{\text{required}} = N_{\text{GPU}} \times \eta_{\text{target}} \times D_{\text{vol}}^{(\text{batch})} / T_{\text{compute}}$ for the chosen training rate, then check each tier's service rate and buffering (principle 8).
- **Workload determines the storage contract**: Full-corpus scans favor sequential throughput and aggregated shards, and metadata operations can bind before byte bandwidth does (principle 7). Disk-backed graph retrieval must fit its random I/O within a serving deadline, and synthetic-data pipelines must budget verification traffic separately from retained capacity while preserving provenance for accepted samples.
- **Tail latency sets the cache budget**: A high hot-tier hit rate is insufficient when cold misses are orders of magnitude slower. Use equation 0.10 as a mean baseline, then size prefetch buffers from p99 I/O latency and test correlated miss bursts against the compute window.
- **Pipeline correctness lives at commit boundaries**: Replay preserves processing completeness only when stable identifiers and idempotent or transactional writes prevent duplicate effects. Event-time watermarks then make the separate freshness-completeness trade-off explicit.

- **Direct storage removes host payload copies**: GDS retains CPU submission and coordination while bypassing host bounce buffers. The illustrative example assumes 4× less active CPU time per request; the benefit depends on whether payload copying limits the workload.
- **Checkpoint recovery is a storage protocol**: Local NVMe staging can shorten pause time, but a restorable checkpoint also needs durable publication, a committed manifest, and verified shards; durability, availability, and consistency remain distinct contracts.
- **Economics drive tiering**: The 5× local-NVMe/object-storage price ratio illustrates the incentive to keep data on cheaper tiers under the stated pricing assumptions (principle 8). Compare total delivery cost, including transfer charges and idle accelerators, before deciding where to stage it.

Checkpoint staging shows the C^3 trade-off in one design decision. Writing first to local NVMe shortens the compute pause, but asynchronous replication adds communication traffic and requires coordination to publish only complete generations. Once the shared-file-system write leaves the critical path, the bottleneck can move to local flash endurance, peer-replication bandwidth, or manifest commit latency. Measuring only the shorter training pause would miss the new recovery boundary.



What's Next: From storage to splitting

Compute silicon, network fabrics, and storage hierarchies establish the physical resources of the machine learning fleet. Coordinating those resources into one training computation remains a separate problem. This chapter's 175B running model already exceeds, in its FP16 weights alone, the 80 GB device of the HBM placement example, so its state and work must span devices. The partition determines which intermediate results and gradients must cross the fabric and when workers must synchronize. Part II moves from physical infrastructure to distributed execution: partitioning neural networks across data, tensor, pipeline, and sequence dimensions, orchestrating collective communication, and surviving hardware failures at fleet scale.

↪ Parallelism strategies (data, tensor, pipeline, and sequence) are developed in chapter 15.

II

DISTRIBUTED ML

Part II

Distributed ML Principles

Coordinating the fleet requires solving problems that a single machine does not. If Part I built the physical substrate, Part II establishes the logic of distribution: the algorithms, protocols, and coordination strategies that make a collection of independent accelerators behave as one machine. The same physics that set the rates in Part I explains why adding accelerators does not always yield linear speedups, and why communication, not computation, is often the hidden bottleneck.

At this scale, the engineering challenge is a trade-off between parallelization and coordination. Partitioning a model reduces per-device memory pressure but requires exchanging intermediate results across partitions. Replicating a model across workers instead requires coordinating their updates. Adding nodes can reduce training time while exposing a job to more component failures, decreasing its mean time between failures (MTBF) when an individual failure interrupts the job. Fault tolerance therefore becomes part of the execution design. These principles decompose the communication tax that the Fleet Law exposes (section 11) and add the reliability tax of scale.

The following principles preview the trade-offs developed in Part II, and the chapters establish when each mechanism helps and how to measure its cost. The first pressure is the economics of scale itself. Frontier capability demands compute, and each improvement costs more than the last, as the scaling laws of section 6 showed. Part I priced the supply of that compute; the first principle states the demand in the form that later chapters cite.

Principle 9: The universal scaling law

Invariant: Within empirically validated regimes, foundation-model loss ($\mathcal{L}$) follows approximate power-law relationships with a resource quantity X such as training compute, dataset size, or parameter count. The exponent α_{scale} depends on the fitted regime. The single-resource simplification used to illustrate diminishing returns is:

$$\mathcal{L}(X) \propto X^{-\alpha_{\text{scale}}}$$

Implication: Within a fixed scaling regime, reducing loss further requires increasing resources. The diminishing return helps explain the move from single-server training to warehouse-scale clusters. Architecture, data quality, and training methods can change that regime, so a fitted scaling relation guides resource planning without guaranteeing improvements on every task.

That demand for scale turns each training step into a negotiation between faster local work and slower global coordination.

Principle 10: The fleet law (distributed step time law)

Invariant: Under ideal partitioning of a fixed amount of work across N workers or accelerators, the step-time model adds computation, communication, and synchronization, then subtracts the portion hidden by overlap, with $0 \leq T_{\text{overlap}} \leq \min\left(\frac{T_{\text{compute}}}{N}, T_{\text{comm}}(N) + T_{\text{sync}}(N)\right)$.

$$T_{\text{step}}(N) = \frac{T_{\text{compute}}}{N} + T_{\text{comm}}(N) + T_{\text{sync}}(N) - T_{\text{overlap}}$$

Implication: Scaling is a race between parallelizable compute (which shrinks with N under ideal partitioning), communication overhead, and synchronization overhead. To scale efficiently, algorithms must reduce or amortize $T_{\text{comm}}(N)$ and $T_{\text{sync}}(N)$ (for example, through gradient accumulation, which alters the effective batch and convergence regime, or through compression, which can introduce numerical error) and maximize T_{overlap} through communication hiding and pipelined execution.

The Fleet Law predicts the time of one step; the scaling efficiency bound measures how far the resulting speedup falls short of ideal.

Principle 11: The scaling efficiency bound

Invariant: For a fixed amount of training work, adding nodes reduces the computation assigned to each node, but the communication and synchronization terms of the Fleet Law limit the resulting speedup.

$$\eta_{\text{scaling}} = \frac{T_1}{N \times T_N}$$

Here, T_1 and T_N are the times to complete the same work on one and N devices, respectively. The ratio measures achieved speedup as a fraction of ideal linear speedup.

Implication: Perfect linear scaling ($\eta_{\text{scaling}} = 1.0$) is the ideal baseline, not a practical target. Real systems fall short of it by an amount that depends on the workload, the fabric, and the parallelism layout, and the shortfall tends to grow with N. The gap between $\eta_{\text{scaling}} = 1.0$ and the achieved efficiency captures losses from communication and coordination as well as load imbalance or other limits on parallel execution.

Even when communication and coordination are tuned, a larger fleet fails often enough that progress itself must be protected.

Principle 12: The Young-Daly checkpoint law

Invariant: The first-order checkpoint model balances the cost of writing the checkpoint (T_{write}) against the expected cost of reworking lost progress due to system-level failures ($\text{MTBF}_{\text{system}}$). For long runs with approximately constant failure rates and checkpoint write times small relative to MTBF, its optimal checkpoint interval (T^*_{ckpt}) is:

$$T^*_{\text{ckpt}} = \sqrt{2 \cdot T_{\text{write}} \cdot \text{MTBF}_{\text{system}}}$$

Implication: Checkpointing consumes time and storage bandwidth. When more participating components reduce job MTBF, the model favors shorter intervals; faster checkpoint writes can reduce that overhead. Correlated failures, variable write times, and recovery requirements need additional analysis before the interval becomes an operational schedule.

Fault tolerance illustrates why reducing one cost requires checking the others. Saving more often reduces expected rework but increases storage traffic.

Principle 13: The displacement of overhead

Invariant: Distributed ML optimizations often relocate overhead among Compute, Communication, and Coordination (the C^3 taxonomy). Reducing one term can increase another, so designs must evaluate all three.

Implication: Asynchronous training can eliminate global coordination barriers ($T_{\text{sync}}(N) \to 0$) but may introduce gradient staleness that manifests as additional training iterations ($T_{\text{compute}} \uparrow$). Pipeline parallelism can reduce communication volume relative to finer-grained model partitioning but adds pipeline bubble time ($T_{\text{sync}}(N) \uparrow$). The C^3 taxonomy reveals where each design pays its overhead.

Accounting for overhead inside one job leaves a fleet-level question open, because many jobs compete for the same machines and a share of the fleet is worth something only if the job can run on it.


Principle 14: The feasibility-before-fairness principle

Invariant: A gang allocation for a synchronous job requires atomic allocation (every member is granted at once) and topology-feasible placement (the members sit within the interconnect domains the job's parallelism requires) to complete training steps. Its power and I/O allocation must also support the rate of progress promised at admission. Missing required gang members or placement can prevent execution; insufficient power or I/O capacity can reduce progress below the admitted rate.

Implication: Fairness policies such as dominant-resource fairness divide useful progress, so they can choose only among feasible allocations. A scheduler must first enumerate the feasible bundles and only then apply its fairness policy to them; a fair share of accelerators on which the job cannot run is idle capacity charged to a tenant. Feasibility constraints can deliberately leave accelerators idle, and that idle capacity is the price of keeping every admitted job productive.

Part II develops these previews in dependency order. Distributed training establishes how to partition a workload and what information the partitions must exchange. Collective communication then explains how groups of workers combine and redistribute that information efficiently. Fault tolerance protects the resulting progress against failure, and fleet orchestration allocates shared resources to jobs with those communication and recovery needs, admitting only allocations the jobs can actually use. In fleet-law terms, distributed training decides how T_{compute}/N is divided and what $T_{\text{comm}}(N)$ that division incurs, collective communication shrinks $T_{\text{comm}}(N)$ and enlarges T_{overlap}, and fault tolerance and orchestration bound the synchronization and recovery time that no partitioning can remove. The same chapters also set the fleet-level envelope for serving, since replicas draw on the same scheduler, share the same failure rates, and need the same recovery machinery. Together, they develop the algorithmic and operational discipline that turns the physical fleet of Part I into a working distributed system.

Distributed Training

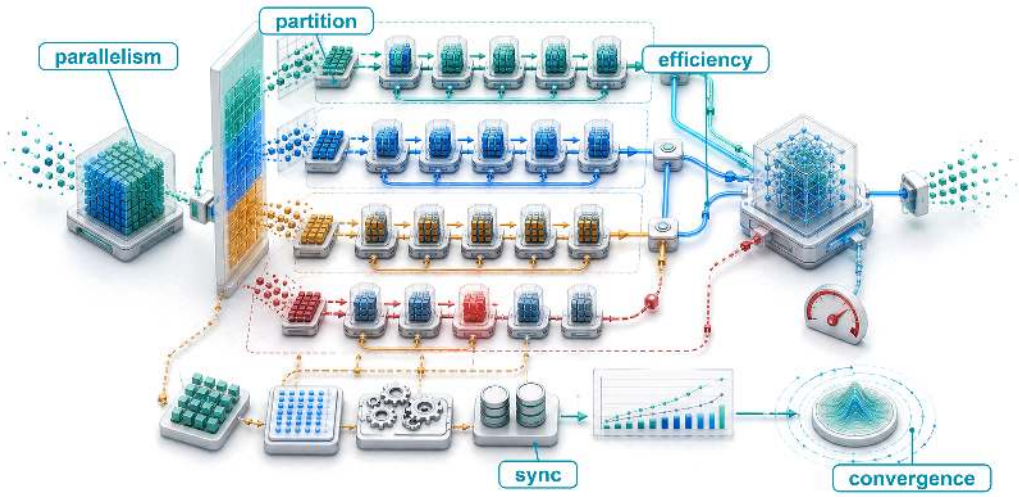

Purpose

Why can adding accelerators make training slower?

Splitting a training job across machines creates more compute capacity, but it also requires those machines to exchange state and agree on updates. Each accelerator may finish its local work sooner while spending more of the step waiting for other workers. Once communication and waiting consume the time saved by parallel execution, adding accelerators raises the bill without shortening the run. Single-node optimization remains necessary, yet faster local arithmetic cannot remove a dependency on data that another machine has not delivered. Memory pressure complicates the decision, because a model may require distribution simply to fit, even when the resulting exchanges are expensive. Dividing its state across more devices can relieve that limit while exposing another in network bandwidth or scheduling. Conversely, replicating a model can process more examples at once without reducing the memory needed for each copy. Neither improvement alone establishes that training will finish sooner. Changing how examples are grouped or when updates become available can change the work required to reach the target quality. Engineers must therefore compare complete training configurations, accounting for memory, communication, update behavior, and elapsed time together. The practical question is where additional hardware buys useful progress and where it merely creates more coordination. That judgment determines which models and experiments fit the available schedule and budget. In C^3 terms, each partitioning strategy trades parallelized compute against network-bound communication and coordination across workers.

Learning Objectives

- Apply the Fleet Law to diagnose compute-, memory-, communication-, or coordination-bound distributed training regimes
- Calculate scaling efficiency, estimate useful batch size, and budget synchronization overhead for data-parallel training
- Design memory-sharding plans that trade accelerator capacity for additional communication
- Map tensor, pipeline, expert, and data parallelism onto hardware bandwidth tiers and model structure
- Analyze microbatch pipeline schedules for bubble overhead, activation residency, and synchronous update ordering
- Evaluate synchronization and low-precision policies under staleness, straggler, and numerical-stability constraints
- Synthesize hybrid parallelism configurations for frontier, recommendation, and alignment training constraints

Why Distribution Is Necessary

The accelerator hierarchy, network fabric, and storage pipeline form the physical foundation of the fleet. The remaining challenge is algorithmic. A partition of the training job decides which intermediate results and gradients must cross that fabric and when workers must synchronize, and it must make those decisions while preserving the optimization process a single device would have followed. The universal scaling law (principle 9) explains why this pressure keeps rising. Frontier quality improvements demand disproportionately more compute, data, and parameters, so the training problem eventually outgrows any single machine in capacity, in calendar time, or in both. Chapter 13 closed on one instance of that growth, a 175B reference model whose FP16 weights alone exceed the memory of the device that must hold them.

↩ The power-law relationship between quality and compute, data, and parameters, and the compute-optimal allocation it implies, are established in section 6.

A hypothetical accelerator with 100 terabytes of memory and an exaflop of compute would make distributed training unnecessary for that model. Real accelerators instead have finite high-bandwidth memory (HBM) capacity, compute throughput, and input bandwidth, and more capable designs move the distribution threshold without removing it. The reference workload must be evaluated against those limits before selecting a partition. In the Fleet Stack diagrammed in figure 0.15, distributed training occupies the Distributed Execution row of the Distribution band, the logic that partitions the *mathematical* workload across the *physical* fleet. Data, tensor, pipeline, and hybrid parallelism create different traffic patterns for the interconnect to carry.

The Physics of the Cluster

Before optimizing algorithms, the physical constraints of the machine learning fleet must be understood. The performance of any distributed training job is governed by the Fleet Law (principle 10), which decomposes the per-step time:

$$T_{\text{step}}(N) = \frac{T_{\text{compute}}}{N} + T_{\text{comm}}(N) + T_{\text{sync}}(N) - T_{\text{overlap}}$$

↩ The Fleet Law and its compute, communication, and coordination terms are established in section 11.

The **communication-computation ratio**, $\rho = T_{\text{comm}}(N)/(T_{\text{compute}}/N)$, compares communication time with ideally partitioned compute time for fixed global work. This ρ is a ratio of two times, not the queue utilization of the incast model. It is the time consequence of communication intensity CI (equation 0.2), the bytes moved per operation of the workload. When transfers run at link bandwidth β, the sustained-bandwidth parameter of the α-β message model, and each device computes at sustained rate $R_{\text{peak}}\eta_{\text{hw}}$, $\rho \approx \text{CI} \times R_{\text{peak}}\eta_{\text{hw}}/\beta$, so the same workload becomes more communication-bound on faster accelerators or slower links. This ratio identifies the pressure to overlap communication; the complete step time also depends on how much exchange is hidden and how much coordination remains exposed.

↩ The α-β message model, with startup latency α and sustained bandwidth β, is established in section 6.

↪ The communication-computation ratio, evaluated for representative data-parallel and point-to-point transfers and related to communication intensity, is developed in section 4.

Two regimes follow from this ratio. When $T_{\text{compute}}/N \gg T_{\text{comm}}(N)$, the cluster is compute-bound, and communication is small relative to useful computation, provided coordination and input delivery do not introduce another limit. Large-batch training of a dense convolutional model such as ResNet commonly sits here. When $\rho \gtrsim 1$, $T_{\text{comm}}(N)$ matches or exceeds T_{compute}/N, the cluster is communication-bound, and insufficient overlap leaves substantial time waiting for gradients or activations. Large language models (LLMs) with billions of parameters to synchronize, and Deep Learning Recommendation Model (DLRM)-style workloads whose embedding exchanges saturate the network, frequently land in this regime. These are typical operating points rather than fixed labels: batch size, partitioning, and placement can move the same workload across the boundary, so the ratio must be measured for the configuration at hand.

↪ The optimizations that help, and the ones that are wasted, for a compute-bound, communication-bound, or coordination-bound fleet are operationalized in section 4.

Multi-Machine Training Requirements

Three signals motivate evaluating distributed execution. The first is memory exhaustion: model parameters, optimizer states, and activation storage exceed single-device capacity. For full mixed-precision training with Adaptive Moment Estimation (Adam), the convention of 16 bytes per parameter can exceed an 80 GB accelerator at roughly 5 billion parameters before activations. Larger 10–20B models therefore need sharding, offload, or another memory-saving approach (Rajbhandari et al. 2020). The failed allocation establishes a capacity problem; it does not by itself choose the remedy.

↪ Accelerator HBM capacity, the ceiling these per-parameter budgets are measured against, is developed in section 3.

The second signal is unacceptable training duration. Even when a model fits, single-device training may require weeks or months to converge, making wall-clock time itself a systems constraint. GPT-3's 175B-parameter training run used a cluster of V100 GPUs (Brown et al. 2020), illustrating why the calendar, rather than HBM capacity alone, forces distribution at this scale.

The third signal is input demand at dataset scale. Dataset bytes determine storage capacity, while the training schedule determines the delivery rate. As section 11 showed, either can motivate distributed data services, but a large dataset alone does not require distributing model computation. Together, capacity, calendar, and input delivery define the constraints a training configuration must satisfy.

The first signal, memory exhaustion, has a long history, traced in figure 0.49. Over the plotted span, single-accelerator memory grew about 38× from the K20 to the B200, while the memory needed to train a state-of-the-art model grew by roughly 4 orders of magnitude. Among the plotted models, the curves cross in 2020 at GPT-3, whose training state exceeded the largest accelerator then available by about 35×. The real crossing came earlier than the plot shows. By the 16-bytes-per-parameter convention above, any model beyond roughly 5 billion parameters already overflows one 80 GB device, and models between the plotted points, such as the 2019 Megatron-LM model developed with tensor parallelism (Shoeybi et al. 2019), were partitioned for that reason. GPT-3 marks where the gap passed an order of magnitude, and every later plotted frontier model also sits far above the capacity curve. For those models, spreading state beyond one device's memory is a precondition for training at all rather than a way to train faster.

Whichever signal motivates distribution, the system must state which optimization update it implements. In the synchronous baseline developed first, the 1,024 GPUs of the volume's Archetype A (GPT-4/Llama-3) reference cluster, whose running instance in this chapter is a GPT-3-class 175B-parameter dense transformer, combine their contributions before advancing to the next parameter version. Matching the global batch, loss normalization, and optimizer state preserves the corresponding single-device update mathematically. Later synchronization models deliberately relax that update ordering and must be evaluated under their own convergence assumptions.

↩ The three systems archetypes and their binding constraints are established in section 11.

> Definition 5.1: Distributed training
>
> ***Distributed training*** partitions the optimization loop across multiple compute nodes, distributing data or model computation and coordinating contributions according to a specified update protocol.
>
> 1. **Significance**: Partitioning training state across devices can meet a memory budget that exceeds one accelerator. GPT-3 (175B parameters) requires approximately 350 GB in BF16

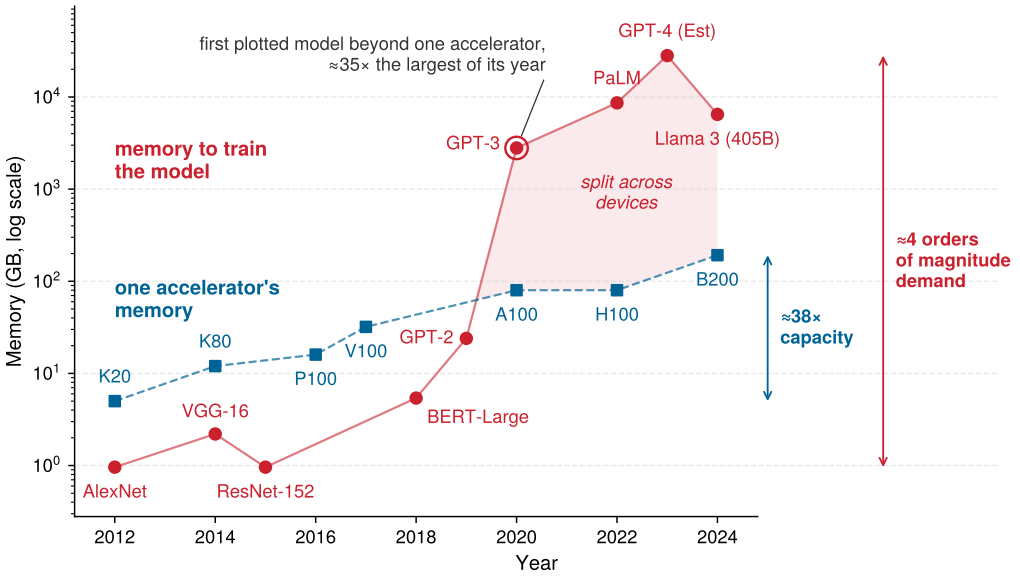


Figure 0.49: The memory wall: Accelerator memory capacity plotted against the memory a state-of-the-art model needs to train. Capacity climbs steadily while demand climbs faster, and the widening gap is why weights, gradients, and optimizer state must be split across devices rather than merely compressed.

(FP16 also stores 2 bytes per value, so the chapter's byte counts hold for either format), more than 4× the 80 GB capacity of a single H100. If weights remain entirely in HBM, their aggregate capacity lower bound is 5 H100s. Adding BF16 gradients plus FP32 Adam master weights and moments gives about 2.8 TB, or at least 35 H100s before activations. These lower bounds do not establish a runnable placement; offload changes the capacity calculation, and the time budget can require more accelerators than memory alone.

2. **Distinction**: CPU threads can share a coherent address space, while accelerators generally hold separate training-state allocations even within one node. Distributed training extends coordination across those devices and node boundaries through collectives or point-to-point transfers governed by the chosen update protocol.
3. **Common pitfall**: A frequent misconception is that distributed training scales linearly with node count. In practice, communication overhead grows with cluster size and the serial fraction of each step (Amdahl's Law): a fixed serial fraction of the single-device baseline bounds strong-scaling speedup.

Distributed Training Complexity Trade-offs

Distribution expands three costs that determine whether a partition is viable. Communication overhead includes gradient aggregation through AllReduce, which returns the same reduced tensor to each participant, or rank. For P parameters across N devices, a ring all-reduce, in which each worker passes gradient chunks only to its neighbor in a logical ring, sends approximately $2(N-1)/N \times M_{\text{grad}}$ bytes per worker per step, where the gradient payload M_{grad} is the P gradient values times their storage width; this is not total fleet traffic.

↪ The ring schedule and the derivation of its $2(N-1)/N$ volume are developed in chapter 8.

Fault tolerance becomes more demanding as the number of failure sources grows. Under independent constant-rate GPU failures, fleet-wide failure-free survival decays exponentially. If each of the 1,024 GPUs has mean time between failures (MTBF) of 50,000 hours, the modeled probability of at least one GPU failure in an hour is 2.0 percent, with mean interval 49 hours between such events. Whether each event interrupts training depends on recovery and redundancy. Section 4 develops the assumptions.

Algorithmic stability adds a separate constraint when the partition changes global batch size or update ordering. Learning-rate scaling and warmup are candidate responses to large-batch behavior (Goyal et al. 2017), not requirements unique to multiple machines. A viable design must satisfy all three budgets.

Single-Machine to Distributed Transition

The single-machine optimization methodology summarized in Appendix 5 extends to distributed environments with important adaptations. Profiling must capture inter-device communication patterns and synchronization overhead in addition to computation and memory metrics. The solution space expands to data parallelism, model parallelism in its tensor and pipeline forms, and hybrid approaches. Data parallelism assigns different examples to model replicas; tensor parallelism splits the operations inside a layer; pipeline parallelism assigns successive layer groups to different devices.

A useful mental model treats these strategies as *loop transformations*, the same toolkit a compiler uses to restructure sequential code, now applied by a cluster-level compiler. The logical training loop nests iterators over the examples in a batch, the layers of the model, and the matrix operations inside each layer, and each parallelism strategy distributes one of them across devices.

Data parallelism resembles a parallel for-loop, assigning different batch indices to devices running the same model. Tensor parallelism resembles vectorization, or single instruction, multiple data (SIMD), by partitioning the work inside matrix operations. The analogy describes the work split, not a shared instruction stream or register file; the devices exchange tensor shards over an interconnect. Pipeline parallelism resembles instruction pipelining, assigning successive layer groups to stages. Overlapping microbatches can keep those stages active, subject to dependency delays and load balance.

Whichever loop a strategy unrolls, distributed training[1] spreads the workload across machines that must coordinate to train a single model. Coordination here means keeping every model shard or replica on a compatible training step. Basic barriers can keep a small research run ordered, but long-running training jobs also need timeout, checkpoint, and recovery mechanisms so one failed worker does not waste days of compute.

Each rung of the scaling path inherits earlier challenges. A single GPU already needs input delivery, memory management, scheduling, and recovery from interrupted work. Multiple GPUs add coordination across separate device memories, even within one node. Interconnects such as NVLink or PCIe carry these exchanges,[2] with collective libraries such as NCCL selecting communication schedules.[3]

The leap to multi-node training adds network communication overhead, fault tolerance requirements, and cluster orchestration. Because each stage compounds the previous one's bottlenecks, single-GPU performance must be optimized before scaling out, so inefficiency does not multiply across the fleet. Although frameworks abstract away much of this through sharded data parallelism and communication libraries, implementing distributed training efficiently still demands careful network configuration (InfiniBand tuning, topology-aware routing), infrastructure management through cluster schedulers, and debugging of nonlocal issues such as synchronization hangs and communication bottlenecks. Figure 0.50 maps this design space onto a 3D decomposition grid ($N = N_{\text{DP}} \times N_{\text{PP}} \times N_{\text{TP}}$), partitioning cluster execution across tensor parallelism (N_{TP}, intra-layer sharding), pipeline parallelism (N_{PP}, sequential stage partitioning), and data parallelism (N_{DP}, batch replication), where each individual cell represents a single accelerator coordinate.

Under the three-dimensional partitioning of figure 0.50, called **3D parallelism**, the total accelerator allocation scales as the product $N = N_{\text{DP}} \times N_{\text{PP}} \times N_{\text{TP}}$. The axes represent distinct mathematical partitions, but they are not independent configuration knobs. Tensor and pipeline degrees must divide the model structure, the data-parallel degree and microbatch schedule must produce a viable global batch, every partition must fit memory, and each communication group must map onto an adequate topology and acceptable failure domain. Training systems therefore select a jointly feasible coordinate rather than tuning N_{DP}, N_{PP}, and N_{TP} in isolation.

[1] **Distributed training**: Google's DistBelief (2012) was an early framework for training neural networks across thousands of machines, but its parameter server architecture created bandwidth bottlenecks at central nodes. This limitation drove the shift to decentralized AllReduce patterns in successors like Horovod and PyTorch DistributedDataParallel (DDP), where each data-parallel worker sends and receives about $2(N-1)/N$ times the gradient size per step rather than concentrating traffic at a single server (Dean et al. 2012; Sergeev and Balso 2018; S. Li et al. 2020; Patarasuk and Yuan 2009).

↪ Checkpointing and recovery for long-running training jobs are developed in chapter 12.

[2] **NVLink**: NVIDIA's point-to-point GPU interconnect delivers 300 GB/s–450 GB/s per-direction bandwidth, roughly 12×–18× InfiniBand HDR per port. This bandwidth gap is why tensor parallelism, which requires AllReduce on every layer, favors the fast NVLink domain, while pipeline and data parallelism can tolerate slower links when their traffic budgets fit. NVLink Switch systems can extend that fast domain beyond one server.

[3] **NCCL (NVIDIA Collective Communications Library)**: NCCL provides topology-aware inter-GPU collective communication primitives, including AllReduce, across PCIe, NVLink, InfiniBand, and IP networks. Current NCCL deployments expose ring, tree, and related algorithm families through runtime selection and tuning controls, so training frameworks can avoid naive mappings that route all traffic through the slowest inter-node path (Jeaugey 2017; NVIDIA 2026b).

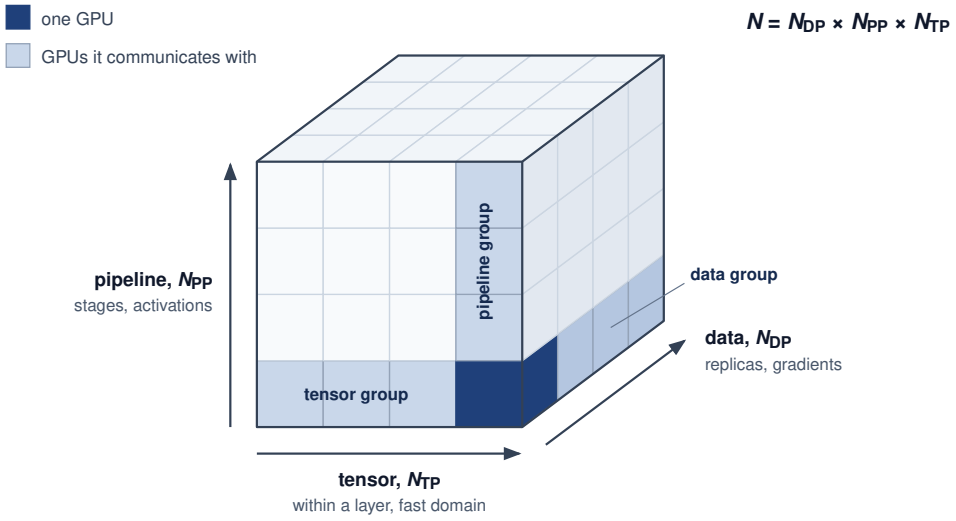


Figure 0.50: The 3D parallelism cube: The configuration space decomposes cluster training across three orthogonal axes: tensor parallelism (N_{TP}, intra-layer sharding), pipeline parallelism (N_{PP}, sequential stage partitioning), and data parallelism (N_{DP}, batch replication). Each cell is one accelerator, identified by its $(N_{\text{DP}}, N_{\text{PP}}, N_{\text{TP}})$ coordinate, so the cube holds $N = N_{\text{DP}} \times N_{\text{PP}} \times N_{\text{TP}}$ devices. A feasible point must jointly satisfy model divisibility, per-device memory limits, and the network hierarchy that carries each axis's traffic.

Parallelism Strategy Selection and Engineering Trade-offs

Choosing the right parallelism strategy is not a matter of preference; it is a constraint satisfaction problem governed by parameter count (P), batch size (B), and interconnect bandwidth. In this first feasibility screen, N_L denotes layer count, S sequence length, and d hidden width. The table identifies traffic sources rather than complete byte budgets; datatype width, partition degree, and communication frequency enter the worked mechanisms below. Table 0.28 quantifies the parallelism communication costs for each strategy, revealing which approaches are physically feasible for a given hardware topology.

Table 0.28: Parallelism Communication Costs: Tensor parallelism exchanges partial layer results frequently and favors a fast communication domain, which can span servers. Pipeline parallelism transfers boundary activations; its bandwidth need depends on tensor shape and microbatch schedule. Data parallelism synchronizes gradient bytes, whose exposed cost depends on overlap and topology. Memory sharding addresses capacity but does not automatically reduce communication.

Strategy	Communication Pattern	Comm. Volume	Hardware Constraint
Data Parallel (DP)	AllReduce Gradients	$\propto M_{\text{grad}}$ (gradient bytes)	Requires high bisection BW
Tensor Parallel (TP)	AllReduce Activations	$\propto B \times S \times d \times N_L$ (per-layer activations)	Fast domain matched to layer traffic
Pipeline Parallel (PP)	Point-to-Point (P2P)	$\propto B \times S \times d$ (Activations)	Link must sustain stage activations

The bandwidth requirements impose a hard constraint on hardware placement: each parallelism strategy must be matched to the interconnect available between the GPUs that need to communicate, or the design fails before it leaves the whiteboard. A quick back-of-envelope bandwidth feasibility check catches that mismatch before any code is written.

↩ The communication domains and bandwidth hierarchy used to evaluate placement are established in section 7.

Systems Perspective 5.1: Bandwidth feasibility check

Frequent tensor-parallel collectives must fit the layer-time budget. The test compares the time one layer's local share of computation takes with the time its collectives take on each candidate link. For the forward pass of one GPT-3 layer split 8 ways, processing one 2,048-token sequence at half of an H100's dense FP16 peak:

- Local compute per layer: about 1.9 ms
- Tensor-parallel transfer per layer over NVLink: about 0.4 ms
- The same transfer over one NDR InfiniBand port: about 3.5 ms

On NVLink the exchange is a fraction of the layer's compute; across InfiniBand it would take longer than the compute it serves. The amount hidden depends on independent work available in the execution schedule. NVLink is one suitable fast domain, but the test uses message bytes, exposed latency, and sustained link rate rather than an interconnect brand or chassis boundary. Cross-rack placement may favor pipeline or data parallelism when the available fabric cannot meet the tensor-parallel budget; their activation and gradient traffic must also be checked.

The communication costs in table 0.28 already narrow the choice before any mechanism has been developed, because a strategy is viable only when its traffic fits the tier that must carry it. What each formula implies in practice depends on the mechanics of data, tensor, and pipeline parallelism developed over the rest of the chapter, and section 8 turns the same constraints into a decision procedure once those mechanics are in place.

Data Parallelism

When a model fits on one accelerator but training takes weeks, replicating its computation lets several workers process examples concurrently. The initial data-parallel baseline gives each worker the same model state and a local portion of one global minibatch. Combining those local contributions before the optimizer update preserves the intended global-batch estimator; the sampling and weighting conditions below explain when that equivalence holds.



Definition 5.2: Data parallelism

Data parallelism distributes training examples across workers that execute the model and combine their contributions to its optimization updates.

1. **Significance**: With N workers each processing a local batch of B_{local} examples once per update, the global batch size is $N \times B_{\text{local}}$. At fixed local work, 1,024 workers offer an ideal 1,024$\times$ throughput increase before exposed overhead. A 1B-parameter model with BF16 gradients contributes a 2 GB gradient payload; ring AllReduce moves $2(N-1)/N$ times that payload per worker. Realized speedup depends on local compute, collective service, overlap, and load balance.
2. **Distinction**: The replicated synchronous baseline keeps a full model copy on each worker and aggregates gradients before each optimizer update. Model parallelism instead partitions the model's computation. Sharded data parallelism, developed below, retains data-parallel computation while distributing training-state storage.
3. **Common pitfall**: Data parallelism does not scale indefinitely with worker count. Holding the local batch B_{local} fixed while adding workers grows the global batch. Beyond the workload-dependent critical batch size, additional examples yield diminishing reductions in the steps needed to reach target quality (Shallue et al. 2019). The crossover developed in section 5 therefore limits the statistical benefit even when gradient variance continues to decrease.

Data parallelism applies when examples can be processed independently, as in training a ResNet model (He et al. 2016) on ImageNet. Each replica computes its local loss gradient, and the workers combine those contributions to reproduce the intended global-batch gradient. The averaging rule makes the sampling and weighting assumptions explicit.

Consider a model with parameters θ training on a dataset D. The loss function for a single data point x_i is $\mathcal{L}(\theta, x_i)$. In standard stochastic gradient descent (SGD) with batch size B, the gradient update for a minibatch is:

$$\mathbf{g} = \frac{1}{B} \sum_{i=1}^{B} \nabla_\theta \mathcal{L}(\theta, x_i)$$

In data parallelism with N devices, each device k computes gradients on its own minibatch $\mathcal{B}_k$:

$$\mathbf{g}_k = \frac{1}{|\mathcal{B}_k|} \sum_{x_i \in \mathcal{B}_k} \nabla_\theta \mathcal{L}(\theta, x_i)$$

When all workers use the same local batch size, the global update averages these local gradients:

$$\mathbf{g}_{\text{global}} = \frac{1}{N} \sum_{k=1}^{N} \mathbf{g}_k$$

Under that equal-batch assumption, the averaging is mathematically equivalent to computing the gradient on the combined batch $B_{\text{total}} = \bigcup_{k=1}^{N} \mathcal{B}_k$:

$$\mathbf{g}_{\text{global}} = \frac{1}{|B_{\text{total}}|} \sum_{x_i \in B_{\text{total}}} \nabla_\theta \mathcal{L}(\theta, x_i)$$

For unequal local batch sizes, the combined-batch gradient is the weighted average $\mathbf{g}_{\text{global}} = (1/|B_{\text{total}}|) \sum_k |\mathcal{B}_k| \mathbf{g}_k$. The equivalence shows why data parallelism maintains the statistical properties of SGD training: sampling the intended global batch across devices, computing local gradient sums independently, and normalizing by the aggregate denominator reproduces its estimator. The reduction step uses an AllReduce over local gradient sums and valid-item counts.

Three batch quantities recur from here on, and the chapter keeps them apart. A worker's local batch B_{local} is the set of examples it processes for one update, playing the role of $\mathcal{B}_k$ above. The global batch $B_{\text{global}} = N \times B_{\text{local}}$ is the set the update averages over. Pipeline parallelism later splits a batch into m microbatches of size B_{micro} that flow through stages one after another; the word microbatch is reserved for those pipeline slices.

↪ The ring and tree AllReduce cost models that set the price of this synchronization are developed in section 4.

Checkpoint 5.1: Data parallelism mechanics

Verify your understanding of how data parallelism distributes work:

- ☐ **State placement**: determine whether data parallelism shards or replicates the model state (weights) across GPUs.
- ☐ **Global batch size**: calculate the effective global batch size for 8 GPUs with a per-GPU batch size of 32.
- ☐ **Single-device equivalence**: explain why data parallelism is mathematically equivalent to single-device training with a larger batch size.
- ☐ **Binding constraint**: identify the primary hardware resource that constrains data parallelism as more nodes are added: GPU TFLOP/s or network bandwidth.

The method parallels gradient accumulation, where a device accumulates contributions from multiple forward and backward passes before one optimizer update. Both techniques use gradient addition and the intended loss denominator to process a larger effective batch. Distribution adds communication, partial failures, and coordination to that arithmetic. The implementation must preserve the update while accounting for those costs.

Data parallelism implementation

The implementation details matter because the SGD equivalence only holds when each phase preserves the intended aggregate sampling and weighting, complete local gradient contributions,

and a single synchronized update. The concrete workflow follows the dataflow from assigning local batches to synchronizing the computed gradients. Figure 0.51 diagrams this five-stage execution pipeline across four GPU swimlanes, tracking how identical model replicas ingest disjoint batch shards, compute local gradients ($\mathbf{g}_0$–$\mathbf{g}_3$), and synchronize through a ring AllReduce collective before applying uniform parameter updates.

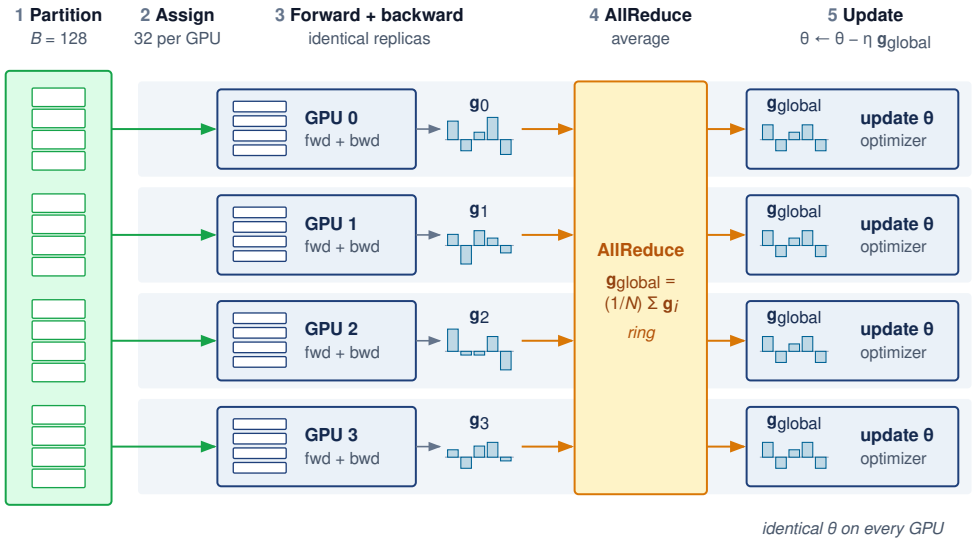


Figure 0.51: Data parallelism implementation pipeline: The five-stage workflow for data-parallel training: (1) partition the global batch, (2) assign sharded mini-batches to individual GPUs, (3) compute independent forward and backward passes to produce local gradients $\mathbf{g}_i$, (4) execute an AllReduce collective across the cluster to obtain the average gradient $\mathbf{g}_{\text{global}}$, and (5) update parameters identically across all devices. This strategy preserves the mathematical semantics of single-device SGD while distributing the compute burden.

The gradient synchronization stage of figure 0.51 (stage 4) establishes a dependency: each rank must receive the completed reduction before applying its optimizer update. The exposed wait can reflect bandwidth, collective startup, or a late contribution. Measuring that wait determines whether synchronization limits scaling; the dependency alone does not identify the binding resource.

Dataset splitting

Data splitting is the first place where the SGD equivalence can fail, but uniqueness and equal-sized shards are sufficient conditions rather than the invariant itself. The aggregate examples or tokens, their sampling probabilities, and their gradient weights must reproduce the intended global-batch estimator. Uniform sampling without replacement can assign disjoint shards; sampling with replacement can legitimately repeat examples; and variable-length batches can assign unequal token counts if the reduction weights each worker by its valid-example or valid-token denominator. An unweighted mean of unequal local means instead overweights workers with smaller denominators.

The sampler is therefore an integral component of the distributed training system rather than merely an input-loader convenience. A distributed sampler coordinates workers by rank and can deterministically partition or draw indices from a seeded sampling stream. For a 1.2 million-example dataset distributed evenly across 32 GPUs, each GPU processes approximately 37,500 examples per epoch. If the sampler pads the final batch by repeating examples, the loss normalization or sample weights must account for those repeats when exact epoch-level weighting matters. A recorded seed and deterministic index stream make sample assignment repeatable; bitwise run reproducibility additionally depends on kernel determinism, collective reduction order, numerical precision, and checkpointed random-number-generator state.

Compute-phase forward and backward passes

For a replicated model whose local forward and backward operations require no cross-worker state, the computation phase is *embarrassingly parallel*. Each GPU executes the model on its local batch; synchronized normalization or additional model partitioning can introduce communication within that phase. To isolate the activation term, consider an unpartitioned 175B reference model at a local batch of 4 sequences and sequence length 2048. This is a hypothetical memory budget, not a feasible one-GPU training configuration: weights and optimizer state must fit as well. Without optimization, storing these activations for backpropagation would consume roughly 1.1 TB of HBM, an order of magnitude beyond the capacity of even an H100 GPU. Activation checkpointing recomputes selected activations during the backward pass rather than retaining them, reducing this example's footprint to ~19.3 GB at the cost of extra computation.

The capacity test must include activations rather than stopping at bytes per parameter. Section 3 tabulates the 16-byte-per-parameter training state from which this test starts. At the point of peak residency,

$$M_{\text{total}} = M_{\text{weights}} + M_{\text{gradients}} + M_{\text{optimizer}} + M_{\text{activations}},$$

with communication buffers and temporary workspaces consuming additional headroom. Sharding reduces the first three terms according to its stage, whereas sequence length, local batch size, and pipeline scheduling govern $M_{\text{activations}}$. Activation checkpointing reduces that last term by retaining only selected boundaries and recomputing the omitted forward operators during backpropagation (Narayanan et al. 2021). The memory saved is therefore purchased with additional FLOPs and a longer critical path; a feasible parallelism plan must budget both effects.

As the backward pass traverses the computation graph in reverse, it produces gradients for the parameters held by each replica or shard. Under pure data parallelism, a full 175B FP16 replica would imply a 350 GB gradient tensor per worker, which exceeds single-accelerator memory budgets; large runs therefore combine data parallelism with sharding, tensor parallelism, or pipeline parallelism. Each local gradient contributes to the intended global-batch estimator. Aggregation can begin as gradient tensors become ready, overlapping later backward computation, but the optimizer must wait for the completed contributions it consumes. This readiness schedule connects local computation to collective communication.

Gradient synchronization

Gradient synchronization combines local contributions into the synchronous update. Each replica must receive the aggregate before applying that update. In a centralized parameter-server design with fixed per-worker payload and update frequency, the server receives $\mathcal{O}(N)$ incoming traffic. That concentration becomes a bottleneck when demand exceeds the server tier's service capacity; sharding the server state or changing the communication pattern can relieve it.

The replicated synchronous baseline distributes aggregation through collective communication. AllReduce lets each worker contribute its local gradient tensor and receive the same reduced result, which the training loop normalizes to obtain the global average. In sharded variants such as ZeRO and FSDP, ReduceScatter and AllGather change which result each worker retains. ReduceScatter combines corresponding tensor elements, then leaves a different reduced shard on each worker. AllGather collects distinct shards and returns their concatenation to every worker without summing them. These contracts support gradient sharding and on-demand parameter reconstruction. Small messages emphasize startup latency; large messages emphasize sustained bandwidth. Centralized aggregation remains another design choice, particularly for the sparse workloads developed later.

At the Distributed Execution row of the fleet stack, the loop specifies an AllReduce contract while its implementation determines the cost. For a large worker group, ring AllReduce transfers approximately $2M_{\text{grad}}$ bytes per worker for an M_{grad}-byte gradient payload. Chapter 8 derives this approximate $2M_{\text{grad}}$ volume and compares algorithms whose startup costs, topology, and contention differ. It also examines how libraries such as NCCL schedule exchanges within and across communication domains.

When a measured collective deviates from these estimates, the diagnosis compares the trace against what each candidate algorithm would predict on the same hardware. The worked example below concerns a trace that the modeled flat-ring schedule cannot explain. The leading candidate is a hierarchical AllReduce, which first ReduceScatters the tensor over NVLink across the eight ranks

in each node. Each rank retains one eighth of the reduced tensor. Eight inter-node groups then AllReduce corresponding shards concurrently, after which a local AllGather reconstructs the full result on every rank. The example assumes an independent InfiniBand port for each local rank, so each port carries one shard; the node's aggregate payload has not fallen by a factor of eight. The flat-ring comparison assumes that each rank's full-tensor ring traffic crosses its inter-node port at the stated link rate.

↪ Hierarchical AllReduce and its cost relative to a flat ring are developed in section 9.

Example 5.1: Debugging slow gradient synchronization

Scenario: In this hypothetical diagnostic trace on an A100 cluster with HDR InfiniBand, one generation older than the reference H100 cluster and chosen because its narrower inter-node links make the flat-ring penalty easy to see, an AllReduce of a 3 GB gradient tensor across 128 nodes (1,024 GPUs) takes 100 ms.

Diagnosis: Three times bracket the trace. The idealized hierarchical estimate is 48.5 ms, the observed collective takes 100 ms, and the flat-ring estimate is 239.8 ms. Under the modeled routing and port assumptions, the observation falls well below the flat-ring estimate, so that flat-ring schedule cannot explain it, and a hierarchical algorithm becomes the leading hypothesis, which runtime traces must confirm by identifying the actual algorithm, channels, and routes. Because the observation still exceeds the hierarchical ideal, lower achieved transfer rates, startup, or waiting must account for the residual. Suppose switch counters also show inter-node InfiniBand links at 60 percent utilization. That aggregate utilization does not exclude a saturated port or uplink during the exposed collective interval. Per-port and per-channel traces over that interval must distinguish transfer-capacity limits from channel imbalance or a late participant before raw bandwidth can be ruled out.

Systems lesson: Debugging collective communication requires evaluating physical link utilization against algorithmic bounds. The gap between the 48.5 ms idealized hierarchical estimate and the 100 ms trace motivates checking congestion, channel placement, startup, and stragglers. Change topology only after identifying the exposed bottleneck.

Stepping back from that specific cluster to the architectural design space, figure 0.52 diagrams three synchronization topologies: the bandwidth-optimal ring AllReduce that circulates chunks along neighbor links ($2(N-1)/N$ volume), the centralized parameter server constrained by network interface card (NIC) saturation at the server node, and the dense mesh of logical All-to-All peer traffic ($N(N-1)$ messages). In dense synchronous data-parallel settings, ring AllReduce avoids a single reducer bottleneck by distributing traffic evenly across participating links, as Baidu's implementation illustrates (Gibiansky 2017).

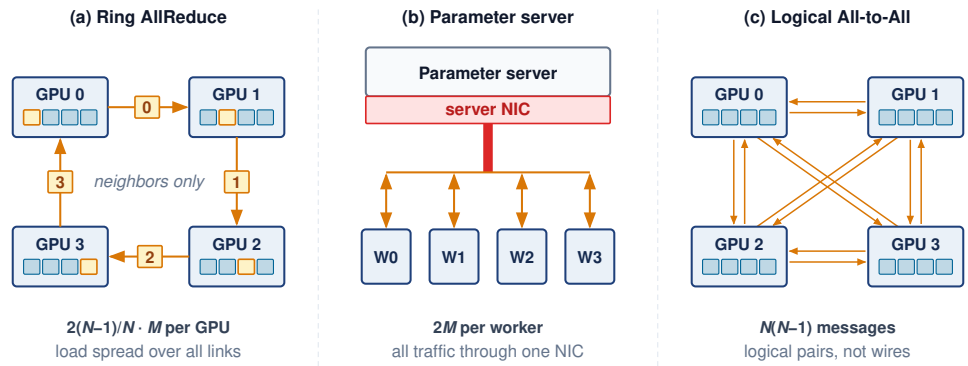


Figure 0.52: Communication patterns and their costs: Ring AllReduce and a parameter server illustrate two ways to aggregate updates. All-to-All instead routes distinct data to each peer; the complete graph shows logical destinations, not a requirement for dedicated physical links. A switched fabric can carry this traffic, with cost determined by message size, routes, and contention.

The panels separate an aggregation algorithm, a centralized architecture, and a collective traffic pattern. They do not provide interchangeable implementations of the same operation. Only the first two aggregate gradients; the All-to-All panel previews the exchange that sparse embedding tables and mixture-of-experts layers need, in which every worker sends different data to every other worker (section 8). Libraries choose algorithms and routes for the requested collective on the available fabric; a logical complete graph does not guarantee one-round physical delivery.

Synchronization models

Distributed training systems use synchronization models to specify when workers observe and apply updates. The baseline is bulk synchronous parallel (BSP), the superstep-and-barrier model. In the replicated training loop, workers compute from one parameter version, combine their gradient contributions, and complete the update before computing from the next version. This is a dependency order, not a requirement that every device update at the same wall-clock instant. Relaxing it changes the optimization process as well as the waiting time.

↩ Bulk synchronous parallel execution and its barrier cost are established in section 11.

BSP provides synchronous update semantics: every worker computes from the same parameter version and reaches the next update boundary together. With the same global batch and reduction, this matches the corresponding synchronous single-device update mathematically. It does not by itself guarantee bitwise reproducibility. Floating-point reduction order, nondeterministic kernels, data-order state, and failure recovery can still change the result. The synchronization cost is that the slowest worker determines iteration time. A worker that keeps producing correct results but runs markedly slower than its peers is a **straggler**, and under BSP every straggler delays the entire step.

Stale synchronous parallel (SSP) relaxes this constraint by allowing workers to proceed up to s iterations ahead of the slowest worker before blocking. This bounds staleness while reducing synchronization delays. SSP requires careful learning rate tuning since workers compute gradients on slightly different parameter versions. The bounded staleness guarantee provides a middle ground between BSP's strong consistency and fully asynchronous approaches (Ho et al. 2013).

Asynchronous parallel (ASP) execution removes the global update barrier, allowing a worker's contribution to be applied while others continue computing; asynchronous SGD is the optimizer run under that protocol. Less barrier waiting can improve update throughput, but communication and shared-state contention remain. Gradients computed from older parameter versions introduce staleness that can affect convergence. Section 5 develops the objective and delay assumptions needed to evaluate that trade-off.

The key trade-offs across synchronization models are summarized in table 0.29.

Table 0.29: Synchronization Model Trade-offs: BSP, SSP, and ASP trade consistency for throughput along a spectrum. BSP preserves synchronous update boundaries but pays for the slowest worker; SSP permits bounded progress ahead of slower workers; ASP removes the global update barrier without a finite protocol-wide staleness bound. Throughput and time to target quality depend on the workload and implementation. Reproducibility requires a separate deterministic-execution contract.

Model	Consistency	Throughput	Convergence	Use Case
BSP	Strong	Bounded by slowest worker	Same synchronous update semantics	Controlled final training runs
SSP	Bounded staleness	Less global-barrier waiting	Depends on delay and tuning	Hyperparameter search
ASP	Weak	No global update barrier	Depends on staleness and objective	Large heterogeneous clusters

Figure 0.53 sequences execution traces for four workers across BSP, SSP, and ASP, isolating how global barriers force faster workers into idle wait blocks while straggler W3 completes, how bounded slack ($s = 1$) throttles drift with brief pauses, and how asynchronous updates remove the global barrier without imposing a finite staleness bound. Communication and resource contention can still leave workers waiting.

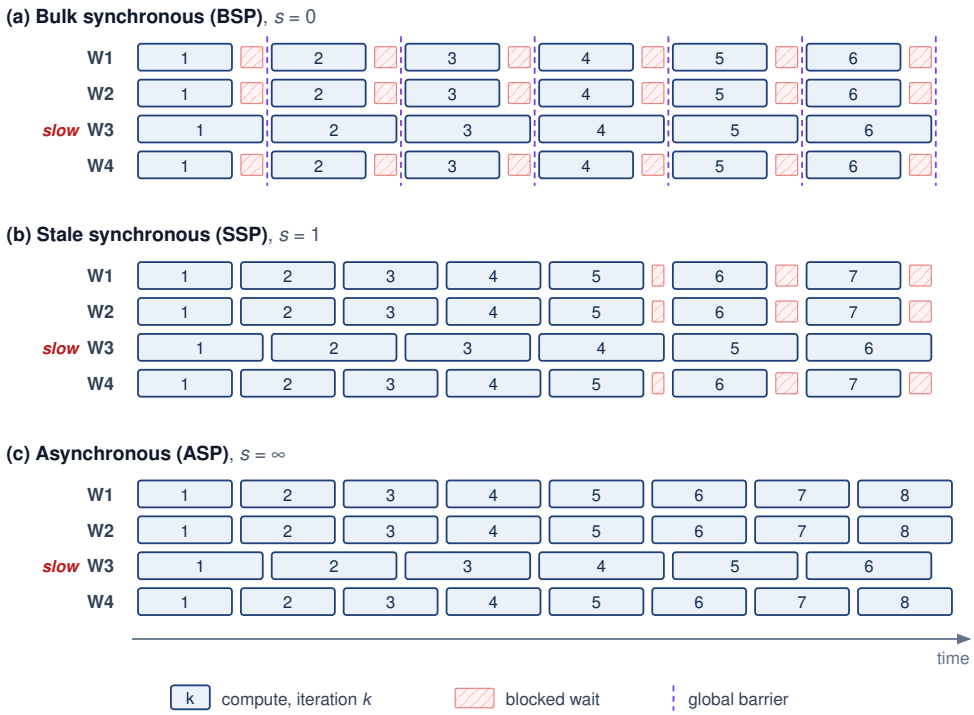


Figure 0.53: Distributed synchronization models: The timelines compare three synchronization strategies. Top: bulk synchronous parallel (BSP) forces all workers to wait at a global barrier every step. Middle: stale synchronous parallel (SSP) allows workers to proceed up to s steps ahead of the slowest worker. Bottom: asynchronous parallel (ASP) execution removes the global update barrier while allowing gradient staleness; communication and resource contention can still delay progress.


The choice of synchronization model directly affects both system throughput and model convergence. Training teams often use BSP for controlled final runs because synchronous steps simplify comparison and replay, while exploring SSP or async approaches during hyperparameter search where throughput can outweigh exact update equivalence. Reproducible replay still requires deterministic sampling, kernels, collective ordering, and restored random state.

Barrier semantics and failure modes

An optimizer update that consumes an AllReduce result must wait for every required contribution. Workers can execute independent computation while a collective is in flight, but they must issue compatible collectives in the same group order and wait for completion before consuming the result. This coupling creates failure modes absent from single-device training.

A worker failure can leave peers waiting for a contribution that will never arrive. The runtime may report a communication error, or the operation may remain blocked until a timeout detects the failure. Watchdogs bound that wait so the job can enter recovery rather than retain an unusable allocation indefinitely.

Collective mismatches occur when workers issue incompatible operations, tensor shapes, or ordering within a communication group. Conditional computation can create such a mismatch if some workers omit an expected reduction. Variable sequence lengths or different expert routes



One missing worker stalls the entire AllReduce barrier.

do not inherently violate the protocol; the runtime must construct a compatible communication schedule for those varying local computations.

Stragglers extend an iteration when their late work lies on its critical path. Thermal throttling, network congestion, or OS jitter can delay a required contribution even when other workers are ready. At 1,000 GPUs with a 1 percent straggler probability per GPU per step, the expected count is 10 stragglers per step, but the number that matters under BSP is the chance of a step with none at all. That chance is the per-GPU on-time probability raised to the GPU count, about 0.004 percent. Almost every step therefore waits for at least one slow worker, which is why the slowest worker, not the typical one, sets step time. The resulting exposed wait depends on how late that contribution arrives and what independent work remains.

Deployed systems address these issues through timeouts, heartbeat monitoring, and elastic training mechanisms.

↪ Heartbeat and collective-timeout failure detection, and the trade-off between restarting healthy workers and leaving peers blocked, are developed in section 18.

Parameter updating

Parameter updating closes the replicated synchronous contract. Workers apply the aggregated gradient using matching parameters, optimizer state, and update settings. Each worker can then update its local model independently with SGD, momentum, or Adam. Identical gradients alone are insufficient if optimizer moments, learning rates, or step counts differ across replicas.

In a system with 8 GPUs training a ResNet model, each GPU computes local gradients based on its data subset. After gradient averaging via ring all-reduce (Patarasuk and Yuan 2009), every GPU has the same global gradient values. Each device then independently applies these gradients using the optimizer's update rule. With SGD and learning rate 0.1, the update becomes `weights = weights - 0.1 * gradients`. The example shows why the update can remain decentralized without sacrificing mathematical equivalence to single-device training.

The cycle of splitting data, computing gradients, synchronizing results, and updating parameters repeats for each batch. Frameworks automate this cycle, but they cannot remove the ordering constraint that makes the replicas coherent: every worker must update only after the synchronized gradient is complete.

Data parallelism trade-offs

Data parallelism is a common starting strategy because it preserves each replica's model computation while distributing examples. Near-linear throughput scaling requires local compute efficiency, balanced input delivery, and small exposed synchronization costs. Once those costs become material relative to useful work, the benefit of another worker diminishes (Ben-Nun and Hoefler 2019). Whether the global batch stays fixed or grows determines how both computation and statistical efficiency change. Holding the global batch fixed while adding workers is **strong scaling**: each worker's local batch shrinks, so communication must hide behind less computation. Holding the local batch fixed so that the global batch grows with N is **weak scaling**: per-worker computation stays constant, but each update averages more examples, which eventually stops reducing the number of updates needed. The rest of the chapter refers to the two regimes by these names.

Weak scaling pays off when the larger global batch still reaches the target accuracy. Goyal et al. (2017) trained ResNet-50 on ImageNet in about one hour on 256 GPUs at a global batch of 8,192 images; the learning-rate rules that let that batch reach the target accuracy are developed in section 5. Replicated data parallelism retains the model's local operators, and frameworks can trigger gradient reductions as backward computation produces them. Each replica executes a complete forward and backward pass, avoiding the layer-stage fill and drain bubbles of pipeline parallelism. Input stalls, imbalance, and exposed reductions can still leave devices idle.

Three constraints limit these advantages. The memory wall arises because a replicated worker holds parameters, gradients, and optimizer state; the 175B-parameter example requires more than 1 TB per replica before activations. Communication limits useful scaling when its exposed cost grows relative to local work. As N grows, the ideal ring bandwidth term $\frac{2(N-1)}{N}\frac{M_{\text{grad}}}{\beta}$ approaches a constant for a fixed gradient payload M_{grad} and link bandwidth β, while startup, topology, and shrinking local computation can worsen the balance. Statistics binds under weak scaling, where $B_{\text{global}} = N \times B_{\text{local}}$ grows and added samples eventually yield diminishing reductions in update count. Strong scaling avoids that limit but reduces local work, exposing the communication trade-off.

Napkin Math 5.1: GPT-2 data parallel scaling: Single node

A GPT-2 scaling scenario makes the efficiency loss concrete by holding the model fixed and changing only the communication domain. GPT-2 stands in for the 175B reference here because it fits on one GPU, so pure replicated data parallelism applies and communication is the only variable. The first case keeps all eight GPUs inside a single NVLink node.

Single-GPU baseline

- Batch size: 16 (with gradient checkpointing, fits in 32 GB)
- Time per step: 1.8 s
- Baseline time for 50K single-GPU steps: 25 hours

The following durations hold the total sample budget fixed, so larger global batches require fewer optimizer updates. They assume those samples attain the same quality; the calculation establishes throughput scaling, not convergence equivalence.

8 GPUs: single node with NVLink

- Per-GPU batch: 16, global batch: 128
- Gradient synchronization: 5.2 GB @ 450 GB/s (NVLink, per direction) $\approx$ 11.7 ms

Performance results:

- Compute: 1800 ms per step
- Communication: 11.7 ms per step
- Total: 1811.7 ms per step
- Speedup (throughput): 8×
- Parallel efficiency: 99.4 percent

Training time: 25 hours $\div$ 8 = 3.1 hours

Inside the node, NVLink keeps gradient exchange small relative to compute, so efficiency stays near 99.4 percent. The picture inverts once the same model must synchronize across nodes over a commodity network.

Napkin Math 5.2: GPT-2 data parallel scaling: Commodity scale-out

The second case scales the same GPT-2 run across multiple nodes, replacing the intra-node NVLink hop with inter-node Ethernet for the bulk of the AllReduce. The 10 Gb Ethernet link models a commodity cloud tier without a dedicated training fabric, far slower than the InfiniBand of the reference cluster, which makes the cost of leaving the node easy to see.

Commodity network configuration: 32 GPUs across 4 nodes

- Per-GPU batch: 16, global batch: 512
- Intra-node communication: 11.7 ms (NVLink)
- Inter-node communication: 5.8 GB @ 1.25 GB/s (10GbE) $\approx$ 4650 ms

Performance results:

- Compute: 1800 ms (27.9 percent of time)
- Communication: 4661.7 ms (72.1 percent of time), so communication dominates and becomes the bottleneck.
- Total: 6461.7 ms per step
- Speedup (throughput): 8.9× faster $\rightarrow$ 2.8 hours
- Parallel efficiency: 27.9 percent

The scale-out run bought its larger global batch with four nodes on a slow network. A single node can reach the same global batch another way, by running several local microsteps and accumulating their gradients before one AllReduce. The comparison below is therefore between two placements, one node with accumulation against four nodes without it; accumulation's job is to keep the global batch equal, while the saving comes from never leaving the NVLink domain.

Napkin Math 5.3: Gradient accumulation speedup

Problem: A GPT-2 run on a commodity 10G network is communication-bound at 32 GPUs across 4 nodes, costing $359 for a fixed number of samples. Can a single 8-GPU node that uses gradient accumulation to match that global batch process the same samples for less?
Math:

1. **Effective batch size**: 8 GPUs $\times$ batch 16 $\times$ 4 accumulation steps = 512.
2. **Communication overhead**: With 4-step accumulation, the job AllReduces once every 4 steps (overhead = 11.7 ms / (4 $\times$ 1800 ms) $\approx 0.162\%$).
3. **Training duration**: Total time is 3.1 hours.
4. **Scale-out baseline cost**: 4 nodes $\times$ 2.8 hours $\times$ $32/hr = $359.
5. **Accumulation cost**: 3.1 hours $\times$ $32/hr = $100.

Systems insight: The one-node plan saves $259 (72.1 percent). Almost all of that saving comes from placement, because the four-node run spent most of each step on the slow inter-node link and the single node never uses it. Gradient accumulation is what makes the single node a fair substitute, because it reproduces the four-node global batch, and its own contribution to speed is small, since the same node already ran at 99.4 percent parallel efficiency without accumulation. Accumulation on a multi-node job still requires inter-node synchronization once per window.

In this GPT-2 scenario, changing the communication domain drops efficiency from 99.4 percent to 27.9 percent. Accumulation can preserve the effective batch while avoiding the slow scale-out link, at the cost of additional local computation between updates. It leaves each worker's replicated model state unchanged, however; reducing that memory burden requires sharding.

Memory-efficient data parallelism with ZeRO and FSDP

The memory constraints of replicated data parallelism motivate techniques that shard training state while retaining each worker's full forward and backward computation. The Zero Redundancy Optimizer (ZeRO) (Rajbhandari et al. 2020) and PyTorch's Fully Sharded Data Parallel (FSDP) (Zhao et al. 2023) implement this approach.[4] They can make a model feasible without partitioning its layer computations across devices.

[4] **ZeRO (Zero Redundancy Optimizer)**: Introduced by Microsoft researchers in 2019 and released in the DeepSpeed library (Rasley et al. 2020), ZeRO's stages progressively partition optimizer states, gradients, and parameters. FSDP draws on the fully sharded approach associated with ZeRO's deepest stage; the shared partitioning principle does not imply identical implementations or communication schedules.

Definition 5.3: Sharded data parallelism

Sharded data parallelism partitions optimizer state, gradients, and at the deepest stage the parameters themselves across data-parallel workers. Each worker processes its own minibatch shard and uses collectives to obtain the parameters and reduced gradients it needs. Full sharding reduces each worker's persistent state toward $1/N$ of the replicated training state; activations and temporary buffers still contribute to peak memory.

1. **Significance**: Under the mixed-precision Adam convention used here, 16 bytes of state per parameter gives a 7B-parameter model 112 GB of training state, exceeding a 80 GB accelerator before activations. ZeRO Stage 3 across 64 workers reduces persistent state per device to 1.75 GB (0.25 bytes per parameter). The resulting AllGather and ReduceScatter traffic trades memory capacity for communication whose exposed cost depends on the interconnect and available overlap.

2. **Distinction**: Unlike vanilla data parallelism, which replicates training state, sharded data parallelism partitions its storage. Unlike model parallelism, it retains each worker's full forward and backward computation. Fully sharded execution gathers parameters for the current computation; the resharding schedule determines when it releases them.
3. **Common pitfall**: A frequent misconception is that sharding is free memory. The on-demand AllGathers place parameter traffic on the critical path of every layer in every step; on slower interconnects or at small per-worker batch sizes, the exposed communication erodes throughput faster than the memory savings help. Capacity is purchased with bandwidth.

The scale of the savings is clearest on a model whose replicated training state only modestly overflows one accelerator, so that the effect of each sharding stage stays visible; the 175B reference returns when the question becomes whether sharding alone is enough.

Napkin Math 5.4: ZeRO memory savings

Problem: Training a 7B parameter Llama-2 model in mixed precision requires 16 bytes per parameter for weights, gradients, and optimizer state. Does the full training state fit on a single A100-80 GB, and how does ZeRO Stage 3 with 64 GPUs change the per-device memory requirement?

Baseline: Standard DDP (replicated state) Per-Parameter Memory Cost:

- **Weights (FP16)**: 2 bytes
- **Gradients (FP16)**: 2 bytes
- **Optimizer state (FP32)**: 12 bytes (4 master weight + 4 momentum + 4 variance)
- **Total**: 16 bytes/parameter

Total Memory for 7B Model:

$$C_{\text{state,total}} = 7 \times 10^9 \times 16 \text{ bytes} \approx 112 \text{ GB}$$

Baseline outcome: Out-of-memory (OOM) on A100-80 GB.

Optimization: ZeRO-3 (fully sharded) With $N = 64$ GPUs, state is partitioned:

- **Weights**: $2/N$ bytes
- **Gradients**: $2/N$ bytes
- **Optimizer**: $12/N$ bytes
- **Total**: $16/N = 0.25$ bytes/parameter effective storage!

Per-GPU Memory:

$$C_{\text{state,ZeRO3}} = \frac{112 \text{ GB}}{64} \approx 1.75 \text{ GB}$$

Result: The persistent state fits, leaving ~78 GB for activations, gathered parameters, temporary buffers, and runtime allocations. Their simultaneous peak determines whether the chosen batch size fits.

ZeRO reaches that result in stages, and the intermediate stages matter because each one buys memory with a different communication pattern. Optimizer sharding alone (ZeRO-1) already brings the replicated footprint of the same model under the accelerator ceiling, because optimizer state is three-quarters of it; gradient sharding (ZeRO-2) and parameter sharding (ZeRO-3/FSDP) continue toward the fully sharded figure (figure 0.54). Table 0.30 pairs each stage with the collectives it uses.

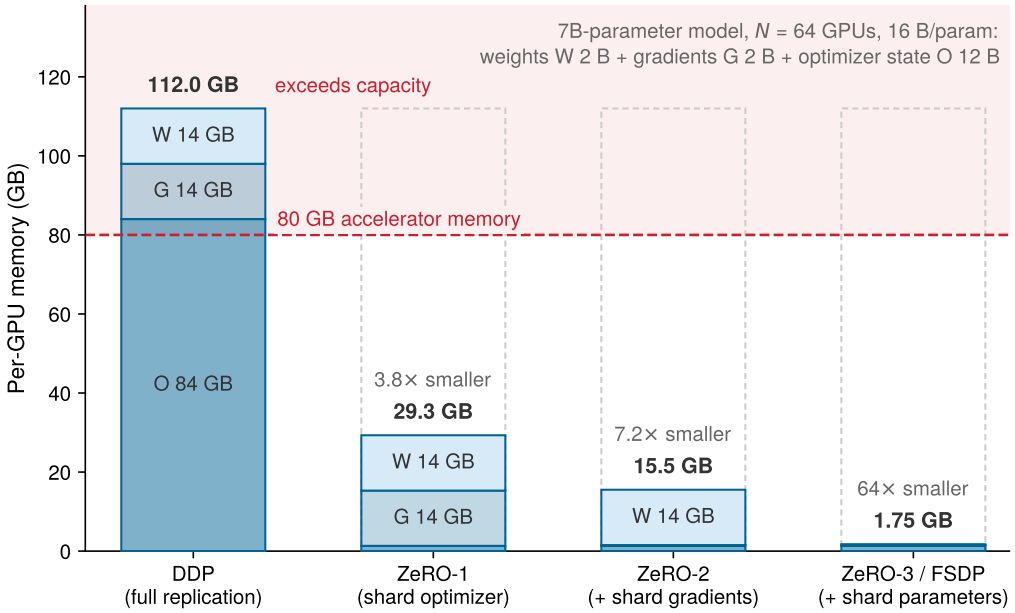


Figure 0.54: ZeRO memory reduction: Standard data parallelism (DDP) replicates all model states across every GPU. ZeRO progressively partitions these states: ZeRO-1 shards optimizer states, ZeRO-2 adds gradient sharding, and ZeRO-3 shards the parameters themselves; each dashed outline marks the replicated stack a stage no longer holds. ZeRO-3 achieves linear memory scaling, enabling models with 100B+ parameters to fit on accelerators that could not hold the replicated state.

Table 0.30: ZeRO Sharding Stages: Each stage shards a different layer of training state and trades a different communication primitive. ZeRO-1 and ZeRO-2 both replace the gradient AllReduce with a reduction to each shard's owner and a parameter AllGather, matching DDP volume, and differ only in whether each worker keeps a full-size gradient buffer; ZeRO-3 (FSDP) adds per-layer AllGathers during forward and backward passes, unlocking near-linear memory scaling at $1.5\times$ communication.

Stage	What is Sharded	Memory Reduction	Communication Overhead
ZeRO-1	Optimizer states only	~4×	Reduce to owner + AllGather (1× DDP volume)
ZeRO-2	+ Gradients	~8×	ReduceScatter + AllGather (1× DDP volume)
ZeRO-3/FSDP	+ Parameters	~N (linear in workers)	AllGather before each layer (1.5× DDP volume)

ZeRO-1 shards optimizer states across GPUs. Each GPU stores only $1/N$ of the Adam optimizer-related state. Gradients need only be reduced to the worker responsible for each parameter shard; after updating that shard, workers AllGather the updated parameters to restore the full replicas. This schedule supports the table's baseline communication volume; a full gradient AllReduce followed by a parameter AllGather would add traffic. Under the 12-byte convention that counts FP32 master weights, momentum, and variance, memory savings reduce optimizer state from $12N$ bytes/param to 12 bytes/param total across the cluster.

ZeRO-2 additionally shards gradients. ReduceScatter leaves each GPU with its $1/N$ shard of reduced gradients. Each worker updates its $1/N$ parameter partition using the corresponding optimizer state, then AllGather restores the updated parameter replicas. In the ideal ring accounting, each phase transfers $P(N-1)/N$ elements per worker, for $2P(N-1)/N$ across both phases. This matches DDP's byte volume ($1\times$) when gradient and parameter communication widths match. Replicated parameters avoid forward parameter gathers, although model operations may still communicate. Under the FP16-gradient convention, gradient storage falls from $2N$ bytes per parameter across N workers to 2 bytes per parameter in total, or $2/N$ per GPU, apart from transient buffers.

ZeRO-3 and FSDP also partition parameters, leaving each GPU with a $1/N$ persistent slice. The full-shard schedule considered here gathers each unit before forward computation, releases its un-

sharded parameters, and gathers them again for backward. ReduceScatter distributes the completed gradients for local shard updates. Figure 0.55 contrasts the stored state across four ranks. Under matching communication widths, ZeRO-1 ($M_{\text{optimizer}}/4$) and ZeRO-2 ($M_{\text{optimizer}}/4, M_{\text{gradients}}/4$) retain baseline $1\times$ communication volume; ZeRO-3 ($M_{\text{weights}}/4, M_{\text{gradients}}/4, M_{\text{optimizer}}/4$) adds the second parameter gather, yielding $1.5\times$ the baseline volume in this accounting.

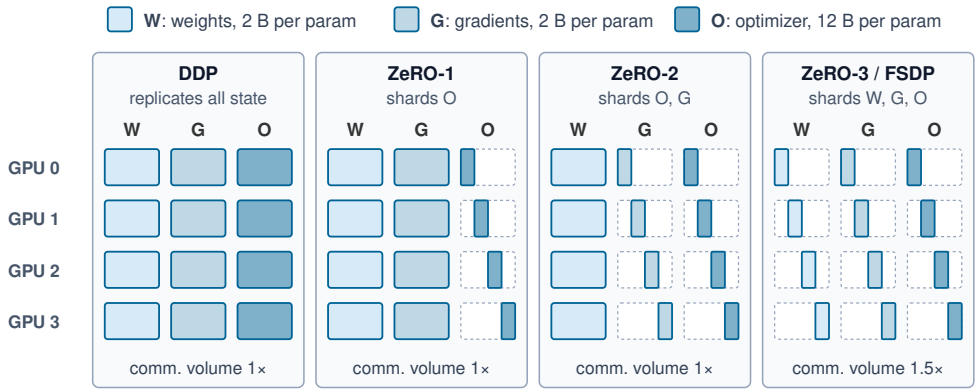


Figure 0.55: ZeRO state partitioning across GPU ranks: Which copy of each training state every GPU holds, for 4 workers. A filled full-width tile is a replicated copy; a quarter-width segment inside a dashed outline is that GPU's shard, stepping one quarter per rank. ZeRO-1 shards optimizer state ($M_{\text{optimizer}}/4$), ZeRO-2 adds gradients ($M_{\text{gradients}}/4$), and ZeRO-3 shards parameters too ($M_{\text{weights}}/4$). The footers give per-worker communication volume relative to DDP: only ZeRO-3 pays more, for the parameter AllGathers.

Full sharding adds parameter-readiness dependencies that replicated DDP avoids. With one sharding unit per layer, the forward pass needs an AllGather to reconstruct parameters (M_{layer} bytes); resharding after forward requires another gather before backward (M_{layer} bytes), followed by a ReduceScatter for gradients (M_{layer} bytes under equal communication precision). For a model with N_L layers, this schedule performs about $3N_L$ collective operations per step; DDP instead AllReduces gradient buckets as they become ready. At large worker counts, the ideal per-worker transfer volumes approach $3M_{\text{param}}$ bytes versus $2M_{\text{param}}$ for DDP, where M_{param} is the model's parameter bytes at the communication precision, not full training state, and equals M_{grad} when parameters and gradients travel at the same width. These volumes do not determine elapsed time alone. While layer ℓ computes, layer $\ell+1$ can prefetch parameters, subject to memory headroom and fabric contention.

The choice between FSDP and DDP begins with peak memory. If replicated state, activations, and working buffers fit, DDP avoids repeated parameter gathers. When optimizer and gradient storage are the obstacle, ZeRO-2 offers savings while leaving parameters replicated. If parameters themselves do not fit, ZeRO-3/FSDP, offload, or partitioned computation must address that remaining constraint. For a 70B+ model on 80 GB devices, the need for tensor parallelism depends on the gathered layer size, activation budget, and throughput target; parameter count alone does not decide it.

Memory-efficient data parallelism requires careful tuning of sharding strategy (by layer, by transformer block, or flat) and mixed precision settings. The sharding granularity determines the trade-off: finer sharding reduces per-GPU memory but increases communication frequency as more AllGather and ReduceScatter operations must execute per training step.

Parameter servers and embedding sharding

ZeRO and FSDP shard dense state that every step touches in full. Recommendation models pose the opposite problem, and for them the parameter server (PS) architecture, formalized by Li et al. (2014), remains common. A parameter server architecture separates workers, which compute gradients, from servers, which store parameters and apply updates.

For dense models such as ResNet or BERT, that separation concentrates traffic, as section 4 noted. With N workers, a server's inbound links must absorb N gradient streams at once. This incast problem is why dense training moved to ring AllReduce, in which every worker sends and receives at its own link rate and the aggregate load spreads across all nodes.

Recommendation systems reverse the balance. Their parameters are dominated by embedding tables (often 10 TB+) that no single GPU can hold, and their updates are sparse, because a batch of users interacts with only a tiny fraction of the items.

In a sparse parameter-server design, embedding tables are sharded across servers, and workers request only rows indexed by their local minibatches. A sparse pull returns those embedding vectors; a sparse push sends updates for the touched rows. This pattern avoids exchanging the complete table, but hot rows, lookup rates, and network contention can still limit throughput. Embedding-sharding frameworks such as TorchRec also support accelerator-based layouts, so sparse partitioning should not be equated with a CPU-only server architecture. This is the volume's Archetype B (DLRM at Scale) regime, and it differs from the dense running example in which resource binds first.



Lighthouse 5.1: Archetype B (DLRM at Scale): DLRM vs. LLM scaling

Each workload scales through a distinct mechanism and is bound by a different resource. Dense LLMs scale through data, tensor, and pipeline parallelism, constrained by compute throughput and by the bandwidth that dense gradient and activation collectives need over fabrics such as NVLink and InfiniBand. Sparse recommendation models such as DLRM scale by sharding embedding tables of 10 TB or more across parameter servers or accelerator memory, where aggregate memory capacity, lookup rate, and the latency of many small random accesses dominate. The distinction shapes cluster design: accelerator pods built around high-bandwidth dense fabrics for LLMs, and memory-capacity-rich layouts for recommendation systems, whether the embedding shards live in CPU-hosted servers, in accelerator HBM, or in a tiered hybrid that keeps hot rows on accelerators and cold rows in host memory.

Dense or sparse, the resulting design must turn added resources into faster progress toward target quality. The next section measures that progress.

Scaling Efficiency and Convergence

When doubling the number of GPUs yields only 1.5× speedup for the same work, scaling efficiency is 75 percent. The ratio quantifies the shortfall but does not identify its cause; communication, synchronization, input delivery, and changed local kernel efficiency require separate examination. Understanding *why* scaling efficiency degrades and *how* convergence changes with parallelism also requires distinguishing hardware throughput from time to a target loss. The scaling metrics apply to every strategy; the convergence analysis that follows concerns data-parallel batch growth and stale updates. It supplies a batch-size constraint that tensor and pipeline configurations must also respect when they are combined with data parallelism.

The mathematics of scaling efficiency

Whether scaling from one device to many is worthwhile is measured by scaling efficiency, a fleet-level ratio. If a model trains in time T_1 on one device, ideal (linear) scaling would train it in time T_1/N on N devices; communication overhead, pipeline bubbles, and load imbalance reduce the speedup. Equation 0.15 restates the ratio:

$$\eta_{\text{scaling}} = \frac{T_1}{N \times T_N} \tag{0.15}$$

where T_N is the training time on N devices. Measured per step of the same work, T_1 is the quantity the Fleet Law writes as T_{compute}, the single-device compute time that its compute term divides by N. An efficiency of 1.0 means perfect linear scaling; an efficiency of 0.5 means the run achieves only half the ideal speedup.

Definition 5.4: Scaling efficiency

Scaling efficiency (η_{scaling}) is the ratio of actual training throughput to ideal linear throughput when increasing the number of ML compute devices (N).

1. **Significance**: The ratio in equation 0.15 measures added devices against the specified baseline. At 0.50 efficiency, a 10,000-GPU run delivers the throughput that 5,000 perfectly scaled devices would, so half of the accelerator-hours buy no progress relative to ideal scaling. The equivalence is to an idealized baseline; a real 5,000-GPU run would have its own, typically higher, efficiency, and the loss is spread across every device as waiting rather than concentrated in idle ones.
2. **Distinction**: Unlike single-node efficiency, which captures local bottlenecks like BW, scaling efficiency measures how performance changes with device count. Communication time $(T_{\text{comm}}(N))$ and synchronization contribute, but changing local kernel shapes or input delivery can also affect the ratio.
3. **Common pitfall**: A frequent misconception is that scaling efficiency is constant. In reality, it depends on both device count and problem size. For a fixed model, the communication-to-compute ratio typically worsens as N increases (Amdahl's Law). At a fixed N, a smaller model or local batch leaves less computation per device to hide startup latency and coordination, so its efficiency falls sooner.

For data-parallel training of the 175B reference model, the per-step communication cost is dominated by the AllReduce of 350 GB of gradients, and how much of that exchange hides behind computation decides the efficiency.

The scaling efficiency depends critically on computation per communicated byte. At fixed tokens per update, increasing parameter count raises both transformer computation and gradient bytes roughly proportionally, so model size alone does not guarantee better scaling. Larger batches raise computation per optimizer step without changing gradient size; the catch is that large batches can harm convergence and so require learning-rate tuning and warmup schedules. Network bandwidth enters directly because doubling InfiniBand bandwidth halves the bandwidth term, but efficiency changes according to the full step-time denominator rather than in direct proportion. The network fabric is therefore a first-order determinant of cluster productivity, not a secondary concern. Every point of scaling efficiency it recovers is returned across the much larger accelerator investment, which is why fabric spending is judged by the efficiency it buys rather than by its own price.

These factors interact, so efficiency cannot be inferred from model size or GPU count alone. The following worked model fixes the parameter count, tokens per update, accelerator count, effective bandwidth, local compute efficiency before communication, and overlap before calculating one efficiency point. Changing any of those inputs requires recomputing the full step-time model.

Napkin Math 5.5: Scaling efficiency for a 175B model

Setup: A communication-only model for training a 175B model on a DGX H100 cluster with 400 Gb/s InfiniBand per GPU. Pure replicated data parallelism is a counterfactual baseline here: the calculation isolates gradient exchange but does not establish that the full training state fits on each device.

- **Compute per step** (assuming batch size 2M tokens, 6 FLOPs per parameter per token): $O_{\text{step}} = 6 \times 175 \times 10^9 \times 2 \times 10^6 \approx 2.1 \times 10^{18}$ FLOPs
- **Per-GPU compute time** on 1,024 GPUs, each at 1,979 TFLOP/s peak in the 8-bit floating-point (FP8) format developed in section 5 (50 percent local compute efficiency before communication). The general matrix multiplications (GEMMs) run in FP8 while the gradients below still cross the wire in FP16, because the collective's data type is chosen independently of the arithmetic's: $T_{\text{compute}}/N \approx 2.1$ seconds

- **AllReduce time** (for 350 GB of gradients using ring-AllReduce with overlap): $T_{\text{comm,exposed}}(N) \approx 11.9$ seconds (raw ring transfer takes $2 \times (N-1)/N \times 350/50$, about 14 seconds; the schedule could hide 75 percent of that transfer, but the available compute window caps hidden communication at 15 percent of raw transfer time)
- **Scaling efficiency**: $\eta_{\text{scaling}} = T_{\text{compute,local}}/(T_{\text{compute,local}} + T_{\text{comm,exposed}})$, which is equation 0.15 with the per-device compute window $T_{\text{compute,local}} = T_{\text{compute}}/N$ and the exposed term standing for $T_{\text{comm}}(N) + T_{\text{sync}}(N) - T_{\text{overlap}}$. Here the numerator is 2.1 s and the complete denominator is 14 s, giving 15 percent. The exposed communication term already subtracts the hidden portion from the raw transfer time and includes collective synchronization; subtracting overlap again would double-count the same saving.

Systems insight: The low efficiency (15 percent) shows why naive data parallelism at this scale is insufficient. It is one operating point, fixed by 2M per update, 1,024 GPUs, and 15 percent overlap, not a universal threshold; another cluster size requires recomputing per-device compute time, collective cost, overlap, and topology. Hierarchy-aware systems recover much of the lost efficiency by combining data parallelism with tensor parallelism, which communicates over NVLink, and pipeline parallelism, which overlaps computation with communication.

Parallelism-infrastructure interaction

The scaling efficiency analysis shows that the effective parallelism strategy is not determined by the *model architecture alone* but by the *interaction* between the model's communication requirements and the infrastructure's bandwidth hierarchy. Each combination of parallelism strategy and infrastructure topology produces a different scaling efficiency curve, and selecting the wrong combination can waste a significant fraction of the cluster's capacity. The preceding napkin math showed pure data parallelism stalling near 15 percent efficiency at this scale; recovering that lost capacity means mapping each parallelism dimension onto the bandwidth tier that can carry its traffic. Section 8 works that combination through three concrete configurations and formalizes it as hierarchy-aware parallelism, once tensor and pipeline parallelism have been developed.

Selecting a parallelism mapping determines which devices exchange each tensor and when that tensor becomes ready. The resulting collective cost depends on payload size, group size, topology, and contention. Its exposed share also depends on the remaining compute window. Those dependencies explain why neither a fixed AllReduce overhead percentage nor a mandatory combination of parallelism axes predicts performance across workloads.

AllReduce complexity depends on latency (α) and bandwidth (β). In the ring volume formula, $(N-1)/N$ describes the fraction of the buffer transferred per worker in each phase, not achieved link utilization. Tree-based approaches reduce communication depth to $\mathcal{O}(\log N)$ steps, making them attractive for small messages dominated by startup latency. Large gradient buffers emphasize sustained bandwidth instead. Message size, topology, and contention therefore determine which algorithm is faster; the next chapter develops those cost models.

↪ The message size at which ring AllReduce overtakes tree AllReduce, derived from the latency and bandwidth terms of each algorithm, is developed in section 9.

Interconnect selection determines whether large-scale deployments remain compute-bound or collapse into communication-bound regimes, and the bandwidth requirements for efficient distributed training are substantial, particularly for transformer models. BERT-Base (110M parameters) requires approximately 440 MB of gradient synchronization per iteration in FP32, while BERT-Large (340M parameters) requires approximately 1.4 GB. A ring AllReduce across 64 GPUs moves nearly twice the gradient bytes through each GPU's link, so finishing BERT-Large synchronization within 50 ms requires roughly 54 GB/s of sustained per-GPU bandwidth, and BERT-Base about a third of that. For 175B-parameter language models, exact bandwidth requirements depend on the 3D-parallel configuration, gradient accumulation, overlap, and interconnect topology rather than a single universal number.

Synchronization frequency presents a trade-off between communication efficiency and convergence behavior. Accumulating gradients for 4 microsteps reduces synchronization frequency by 75 percent, but the realized step-time reduction depends on the compute/communication mix and how much communication can overlap with backpropagation. In standard implementations, gradient accumulation reuses one resident gradient buffer and accumulates in place; memory pressure comes

from keeping that buffer resident and from any larger local batch or activation choices, not from storing 4 independent gradient tensors. Asynchronous methods remove the global update barrier while retaining communication costs, and introduce staleness that can degrade convergence for large learning rates.

Scaling physics and Amdahl's Law with communication

An Amdahl-style model separates work that scales with device count from a fixed residual cost. Step time on N devices then exceeds T_1/N because the residual does not shrink with the compute share. Section 4 develops this model at fleet scale. Its speedup ceiling assumes that the residual remains a fixed fraction r of the single-device baseline.

That baseline fraction is not the synchronization share a profiler reports for a distributed step, because the compute share has been divided by N while the residual has not. A residual of 1 percent of the single-device step occupies about 84 percent of each step on 512 GPUs. Reading the observed share as r would therefore overstate the residual many times over and predict a far lower speedup ceiling than the model implies.

Figure 0.56 illustrates this scaling tax up to 512 GPUs on log-log axes, complementing the scaling efficiency bound (principle 11). In this illustrative fixed-residual model, a small baseline fraction ($r = 0.1\%$) stays closer to ideal scaling than a larger fraction ($r = 1\%$). A residual equal to a tenth of baseline time ($r = 0.10$) limits asymptotic speedup to $1/r = 10\times$. Actual collective and coordination costs can change with worker count, so predicting a training run requires the more explicit Fleet Law below.

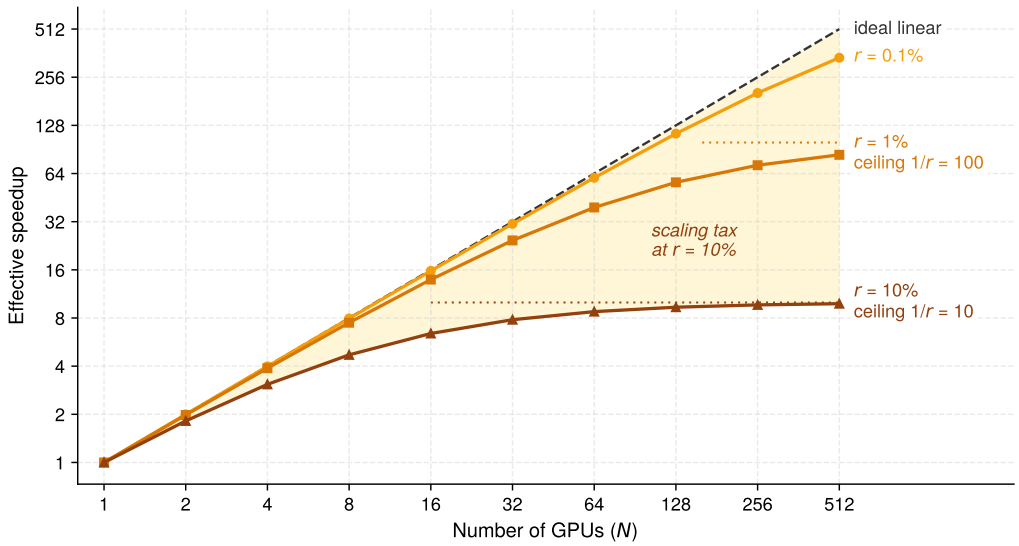


Figure 0.56: The scaling tax: Effective speedup $N/(1+(N-1)r)$ against GPU count on log-log axes, for illustrative fixed residual fractions r of baseline step time. Ideal scaling (dashed) is linear. Each curve bends away from it and flattens near $1/r$: at 512 GPUs, $r = 0.1$ percent still delivers about two-thirds of ideal speedup, 1 percent about one-sixth, and 10 percent under $10\times$ in total. Darker curves carry larger r.

Predicting a run requires returning to the Fleet Law (principle 10) from section 15. As the fleet-scale counterpart of the single-machine iron law, it separates compute, communication, and coordination into additive terms, labeled here with their C³ names:

$$T_{\text{step}}(N) = \underbrace{\frac{T_{\text{compute}}}{N}}_{\text{Compute Term}} + \underbrace{T_{\text{comm}}(N)}_{\text{Communication Term}} + \underbrace{T_{\text{sync}}(N)}_{\text{Coordination Term}} - T_{\text{overlap}}$$

In this decomposition, the compute term T_{compute}/N captures the batch's compute time after ideal partitioning across N devices. The communication term $T_{\text{comm}}(N)$ represents fabric transfer time,

analogous to the iron law's data-movement ratio D_{vol}/BW. For a large-message Ring AllReduce, its bandwidth contribution is $\frac{2(N-1)}{N}\frac{D_{\text{vol}}}{\beta}$, where D_{vol} is the payload being reduced (the gradient bytes M_{grad} under data parallelism, or a shard of model state under sharding) and β is sustained per-link bandwidth; this expression omits per-message startup latency. The coordination term $T_{\text{sync}}(N)$ accounts for exposed ordering and straggler delays not already included in communication time. Finally, T_{overlap} subtracts communication hidden behind computation. Each wait must enter the accounting once.


↪ The single-machine iron law and its data-movement term are developed in section 2.

The Fleet Law leads to the scaling efficiency metric for fixed global work. Substituting its step time for T_N in equation 0.15, with T_{compute} standing for T_1 per step as noted there, gives:

$$\eta_{\text{scaling}} = \frac{T_{\text{compute}}}{N \times T_{\text{step}}(N)} = \frac{1}{1 + \frac{N(T_{\text{comm}}(N) + T_{\text{sync}}(N) - T_{\text{overlap}})}{T_{\text{compute}}}}$$

This is the scaling efficiency bound (principle 11): perfect linear scaling ($\eta_{\text{scaling}} = 1.0$) is a *theoretical limit*, not a *practical target*. Real systems fall short of it by an amount that depends on the configuration and grows with N. The 175B data-parallel example above reached only 15 percent, and the hybrid layouts later in the chapter recover much of that loss without reaching 1.0. The gap between $\eta_{\text{scaling}} = 1.0$ and the achieved efficiency is the scaling tax, paid in communication and coordination as the price of distributed execution.

The equation reveals the **scaling wall**: as N increases, the compute term (T_{compute}/N) shrinks, but the communication and synchronization terms can remain constant or grow. Eventually, the denominator is dominated by overhead, driving efficiency toward zero. Beyond wall-clock time, this communication overhead imposes an energy tax that scales with physical distance between devices.




Communication energy climbs from HBM out to the network.

Systems Perspective 5.2: The energy tax of scale

Distributed training is a race against energy as much as against time. Within one GPU, moving a bit from HBM to the cores costs a few picojoules, roughly 2–5 pJ/bit; section 11 expresses the same cost per access, about 64 pJ for one 16-bit operand. Moving that same bit across an NVLink interconnect costs 5–10 pJ/bit. Moving it across an InfiniBand network through switches costs 20–50 pJ/bit.

At the scale of 10,000 GPUs, the multiplication by aggregate bandwidth is what changes the engineering problem. A full H100 NVLink envelope is roughly 9 PB/s across the cluster; at 7.5 pJ/bit, that movement represents about 540 kW before cooling and switch overhead. The aggregate NDR InfiniBand envelope is smaller (500 TB/s), but at 35 pJ/bit it still represents about 140 kW. Communication-computation overlap is therefore necessary for wall-clock efficiency, but avoiding unnecessary movement is the direct way to reduce the power term itself.

As the device count grows for a fixed workload, the balance can move from a linear scaling regime toward a communication-bound regime. The transition has no universal GPU count: it depends on compute per device, message sizes, topology, and overlap. Coordination overhead becomes consequential when its exposed time is no longer small relative to useful computation. Measurements at the intended workload and placement must establish the efficiency curve.



More GPUs shrink each step's compute, not its communication.

Hardware selection critically impacts these scaling characteristics. NVIDIA DGX A100 systems, one generation older than the reference H100 nodes, provide 300 GB/s of NVLink bandwidth per GPU in each direction, with aggregate NVSwitch bandwidth at the system level, enabling high parallel efficiency inside an 8-GPU node. Multi-node scaling requires a network fabric with enough bisection bandwidth; EDR-class 100 Gb/s links, the InfiniBand generation before HDR, can support smaller multi-node jobs, while HDR-class 200 Gb/s links can support larger clusters when topology, placement, and overlap are well matched.

The efficiency metrics directly influence the choice of parallelism strategy. Data parallelism works well in the linear scaling regime but becomes communication bound at scale. The model-parallel strategies developed after this section replace part of that gradient traffic with other costs, and the same efficiency equation will price each of them once its mechanism is in place.

Hardware efficiency metrics govern throughput, but convergence theory determines whether distributed training reaches the same solution quality as single-device training. Parallelism affects optimization convergence in three ways: convergence rate changes with batch size, adding workers yields diminishing returns beyond the critical batch size, and learning-rate schedules must be revalidated when the global batch changes.

Convergence rate for synchronous data parallel SGD

The fundamental convergence result for distributed SGD explains what synchronous averaging preserves. Informally, when the gradient cannot change abruptly as parameters move and averaging over more workers reduces the noise in each gradient estimate, synchronous SGD makes steady progress toward parameters where the gradient is small. Formally, let $\mathcal{L}$ be lower bounded by $\mathcal{L}_{\text{inf}}$ and have L_s-Lipschitz gradients, so the smoothness constant limits how sharply the gradient can change as parameters move. Each worker computes gradients from B_{local} independent samples. At update t, the aggregated estimator $\mathbf{g}_t$, the average of the N workers' local gradients, is unbiased, and its conditional variance satisfies $\mathbb{E}[\|\mathbf{g}_t - \nabla\mathcal{L}(\theta_t)\|^2 \mid \theta_t] \leq \sigma^2/(NB_{\text{local}})$. These assumptions bound progress toward a small gradient norm, not convergence to a global minimizer or a particular validation accuracy.

Theorem 5.1: Convergence rate for distributed SGD

For the update $\theta_{t+1} = \theta_t - \eta\mathbf{g}_t$ with constant step size $0 < \eta \leq 1/L_s$, after T synchronized updates,

$$\frac{1}{T}\sum_{t=0}^{T-1}\mathbb{E}[\|\nabla\mathcal{L}(\theta_t)\|^2] \leq \underbrace{\frac{2(\mathcal{L}(\theta_0)-\mathcal{L}_{\text{inf}})}{\eta T}}_{\text{optimization term}} + \underbrace{\frac{\eta L_s\sigma^2}{NB_{\text{local}}}}_{\text{stochastic-variance term}}.$$

Choosing $\eta = \min\left\{1/L_s, \sqrt{2(\mathcal{L}(\theta_0)-\mathcal{L}_{\text{inf}})NB_{\text{local}}/(L_s\sigma^2T)}\right\}$ balances the two terms. Before the smoothness cap becomes active, the stochastic contribution scales as $\mathcal{O}(1/\sqrt{NB_{\text{local}}T})$.

The theorem isolates the benefit that follows from the assumptions. With equal local batch size B_{local}, synchronous data-parallel SGD computes the same minibatch estimator as one worker using batch size $N \times B_{\text{local}}$ for that update, and the estimator variance decreases as $1/(N \times B_{\text{local}})$. It does not say that every increase in batch size proportionally reduces time to a target loss; learning-rate limits and critical-batch-size effects still apply. This distinction is the statistical efficiency of distributed training, separate from hardware efficiency.

The theorem assumes perfect synchronization (BSP). When workers proceed at different rates or use stale gradients, convergence guarantees degrade as staleness increases.

Staleness impact across synchronization models

The operational guarantees of BSP, SSP, and ASP established in section 4 have convergence consequences, but there is no universal additive staleness penalty independent of the objective, step-size schedule, worker count, and delay model. The staleness parameter τ_{stale} quantifies how many updates occur between computing and applying a gradient, tying throughput to solution quality (Ho et al. 2013; Dutta et al. 2018).

Definition 5.5: Gradient staleness

Gradient staleness (τ_{stale}) is the number of parameter updates that occur between the time a gradient is computed and the time it is applied to the global model state.

1. **Significance**: It represents the synchronization error in distributed optimization. Increasing τ_{stale} can improve throughput by reducing barrier waits ($T_{\text{sync}}(N)$), but it typically

degrades the rate of convergence, requiring more optimizer steps, and therefore more FLOPs, to reach the same accuracy.

2. **Distinction**: Unlike network latency, which is a physical delay, staleness is an algorithmic offset that arises from the choice of synchronization protocol (e.g., ASP, SSP).
3. **Common pitfall**: A frequent misconception is that staleness is "always bad." In reality, it is a throughput-convergence trade-off: for some large-scale workloads, allowing bounded staleness is one practical way to keep thousands of GPUs in use.

The convergence behavior differs across these models in ways that directly affect training cost and solution quality. In BSP ($\tau_{\text{stale}} = 0$), all workers compute on the same parameter version and aggregate before updating. Under the assumptions of theorem 5.1, the synchronized estimator inherits the $N \times B_{\text{local}}$ minibatch guarantee.

SSP ($\tau_{\text{stale}} \leq s$) allows workers to proceed up to s iterations ahead of the slowest worker. Ho et al. (2013) bound the average regret of their SSP update sequence, the per-update gap between the loss its iterates incur and the loss of the best fixed parameters chosen in hindsight, at $\mathcal{O}(\sqrt{(s+1)N/T})$ for N workers and T updates. The bound assumes convex Lipschitz component functions, a bounded domain, and a decreasing step size. It makes the staleness dependence explicit, since the bound grows with s, but it measures a different quantity from the gradient-norm bound of theorem 5.1, which covers nonconvex objectives, so the two rates cannot be compared directly.

Asynchronous SGD imposes no protocol-wide finite delay bound. Removing the barrier can improve update throughput, but a convergence rate requires additional assumptions about realized delays, the objective, and the step-size schedule. Dutta et al. (2018) analyze this as an error-runtime trade-off in which worker speed and gradient staleness jointly determine whether accepting a delayed update helps. Therefore neither a fixed square-of-average-delay penalty nor the complete loss of N-worker variance reduction follows from asynchronous execution alone.

Table 0.31 summarizes the convergence properties of each synchronization model.

Table 0.31: Convergence Properties by Synchronization Model: The synchronization protocol determines the delay model; the convergence rate follows only after the objective, gradient, delay, and step-size assumptions are fixed.

Model	Delay control	Scoped guarantee	Systems effect
BSP	$\tau_{\text{stale}} = 0$	Synchronous $N \times B_{\text{local}}$-minibatch theorem 5.1	Waits for the slowest worker
SSP	$\tau_{\text{stale}} \leq s$	$\mathcal{O}(\sqrt{(s+1)N/T})$ average regret under convex assumptions (Ho et al. 2013)	Bounds delay while reducing some waits
ASP	No protocol-wide finite bound	No universal rate without additional delay and objective assumptions	Removes the global barrier but applies stale updates

Learning rate scaling rules

Increasing the effective batch size through data parallelism changes the number and noise of optimizer updates. The learning-rate schedule must therefore be revalidated against the target quality. Two scaling rules provide starting points for that comparison.

The linear scaling rule (Goyal et al. 2017) proposes that when batch size is multiplied by k, learning rate also increases by k:

$$\eta_{\text{new}} = k \cdot \eta_{\text{base}}$$

The approximation compares one large-batch step at learning rate $k\eta$ with k consecutive small-batch steps at learning rate η. At batch size $k \times B$, independent gradient contributions reduce estimator variance by factor k, but lower variance alone does not establish stability. The approximation also requires gradients to change little over the corresponding k small-batch steps. Goyal et al. (2017) validated the recipe for ResNet-50/ImageNet at global batch size 8,192 with gradual warmup. Layer-wise adaptive rate scaling (LARS) and layer-wise adaptive moments based optimizer (LAMB) provide related large-batch approaches for ImageNet and BERT-style pretraining (You et al. 2017;

You et al. 2020). A warmup period increases the learning rate from η_{base} to $k \cdot \eta_{\text{base}}$ over the first W iterations to reduce early instability; the schedule still requires validation:

$$\eta_t = \eta_{\text{base}} + \frac{t}{W}(k \cdot \eta_{\text{base}} - \eta_{\text{base}}) \quad \text{for } t < W$$

The rule and the warmup were introduced together, and the run that introduced them shows why the scaled learning rate needs the warmup. A learning-rate schedule tuned for an eight-GPU run need not reach the same accuracy at 256 GPUs once the global batch grows with the worker count.

War Story 5.1: The one-hour ImageNet run (2017)

Context: Facebook AI Research set out to train ResNet-50 on ImageNet in one hour using 256 GPUs, pushing data parallelism far beyond the batch sizes that earlier practice treated as safe (Goyal et al. 2017).

Mechanism: Scaling the global batch to 8,192 cut the number of optimizer updates per epoch by the same factor. Keeping the small-batch learning rate left too few effective updates to reach the target accuracy, while scaling the learning rate up by the same factor destabilized optimization in the first epochs, when the loss surface changes fastest.

Impact: Without the gradual warmup recipe, the large-batch runs reported higher training and validation error than the small-batch baseline. Higher hardware throughput alone did not preserve the quality target.

Fix: The team introduced the linear learning-rate scaling rule paired with a 5-epoch gradual warmup schedule, stabilizing optimization at batch size 8,192.

Systems lesson: Distributed training demands more than parallel hardware alone. Scaling changes the optimization regime, so the cluster, communication schedule, batch size, and learning-rate schedule must be tuned as one system.

The square root scaling rule is an alternative learning-rate heuristic to test when increasing batch size:

$$\eta_{\text{new}} = \sqrt{k} \cdot \eta_{\text{base}}$$

This rule increases the learning rate more slowly than linear scaling. Its suitability depends on the optimizer, schedule, and training regime; exceeding a critical-batch estimate does not make it mandatory or guarantee convergence. The learning rate must be validated against the same target quality.

LARS (You et al. 2017) scales each layer's update relative to its weight norm. The simplified LARS expression below illustrates the ratio of weight norm to gradient norm with weight decay. LAMB (You et al. 2020) applies a related layer-wise adaptation to an Adam-based update rather than using this raw-gradient denominator:

$$\eta_\ell = \eta_{\text{global}} \cdot \frac{\|\mathbf{w}_\ell\|}{\|\mathbf{g}_\ell\| + \lambda_{\text{reg}}\|\mathbf{w}_\ell\|}$$

Here λ_{reg} is the weight-decay coefficient in the illustrated LARS expression, distinct from the failure-rate parameter used in reliability analysis. Layer-wise scaling controls update magnitude relative to parameter magnitude, but does not guarantee convergence for arbitrary batches. Its systems role is to extend the range of validated batch sizes over which added data-parallel workers can reduce time to quality.

Critical batch size and diminishing returns

Increasing the global batch eventually yields diminishing reductions in the optimization steps needed to reach a fixed target quality. The critical batch size B^* marks the transition point beyond which increasing batch size yields diminishing returns in convergence per sample seen.

Definition 5.6: Critical batch size

Critical batch size (B^*) is a workload-dependent crossover batch size beyond which further batch growth yields diminishing reductions in optimization steps per added sample (McCandlish et al. 2018; Shallue et al. 2019).

1. **Significance**: It characterizes statistical scaling, separately from hardware throughput. In the gradient-noise model, batches well below B^* can reduce step count approximately in proportion to batch growth; above it, additional samples buy progressively smaller step-count reductions.
2. **Distinction**: Unlike the memory-limited batch size (determined by memory capacity and activation footprint), the critical batch size depends on the model, data, optimizer, training phase, and target quality.
3. **Common pitfall**: A frequent misconception is that training can be sped up indefinitely by adding GPUs. In reality, B^* is a guide to diminishing statistical returns, not a hard physical ceiling or a universal optimum in wall-clock time.

The gradient-noise-scale proxy for the critical batch size can be estimated as:

$$B^* \approx \frac{\text{tr}(\Sigma)}{\|\nabla \mathcal{L}(\theta)\|^2}$$

where $\text{tr}(\Sigma)$ is the trace of the gradient covariance matrix (total gradient variance) and $\|\nabla \mathcal{L}(\theta)\|^2$ is the squared gradient norm (signal strength). Intuitively, B^* is the batch size at which averaging reduces gradient variance to the level of the true gradient magnitude.

Published large-batch regimes illustrate the scale rather than providing fixed thresholds. On ImageNet, Goyal et al. (2017) stabilized ResNet-50 at global batch 8,192 with warmup, and LARS extends ImageNet large-batch training further in some settings (You et al. 2017). For BERT-Large pretraining, LAMB reports training at 32K–64K batch sizes with layer-wise adaptive updates (You et al. 2020). Across other domains, McCandlish et al. (2018) show useful batch-size limits ranging from tens of thousands in ImageNet-like settings to millions in reinforcement-learning workloads, so new frontier-language-model thresholds should be measured rather than copied.

The gradient-noise model separates statistical efficiency from hardware efficiency. Well below B^*, increasing batch size can reduce optimization steps almost proportionally while preserving similar total sample use. Near B^*, the trade-off between fewer updates and more samples becomes material. Above it, step count approaches a lower limit while sample use continues to increase. Neither maximum samples per second nor minimum training time necessarily occurs at B^*: those objectives also depend on device utilization, communication, and the validated learning-rate schedule.

Figure 0.57 plots this gradient-noise trade-off on log-log axes, tracking the divergence between optimization step count and total sample consumption. Below the critical threshold ($B/B^* < 1$), increasing batch size yields near-linear reductions in optimization steps with negligible sample waste; past the crossover point at $B/B^* = 1$ (where both normalized costs equal 2), the step count curve asymptotically flattens toward 1 while total examples processed climb steeply along the $1 + B/B^*$ trajectory.

Dividing the critical batch by the per-worker batch B_{local} estimates where worker growth leaves the near-proportional statistical scaling regime. With one local batch per update and its size held fixed, the crossover occurs around $N \approx B^*/B_{\text{local}}$ workers. Past that point, additional workers mainly raise sample throughput that the optimizer cannot convert into proportionally fewer steps. Gradient accumulation increases each worker's contribution per update and lowers the corresponding worker count. Shrinking B_{local} moves the crossover outward but leaves less computation per worker to hide communication, coupling statistical and hardware efficiency.

That crossover informs a cost-time trade-off rather than setting a mandatory worker count. Larger batches may still reduce time to target even as they consume more examples. Evaluate that benefit using measured step time, a validated learning-rate schedule, and the same target quality. Changing synchronization or compression also changes the optimization process, so its communication savings must be weighed against any additional steps required.

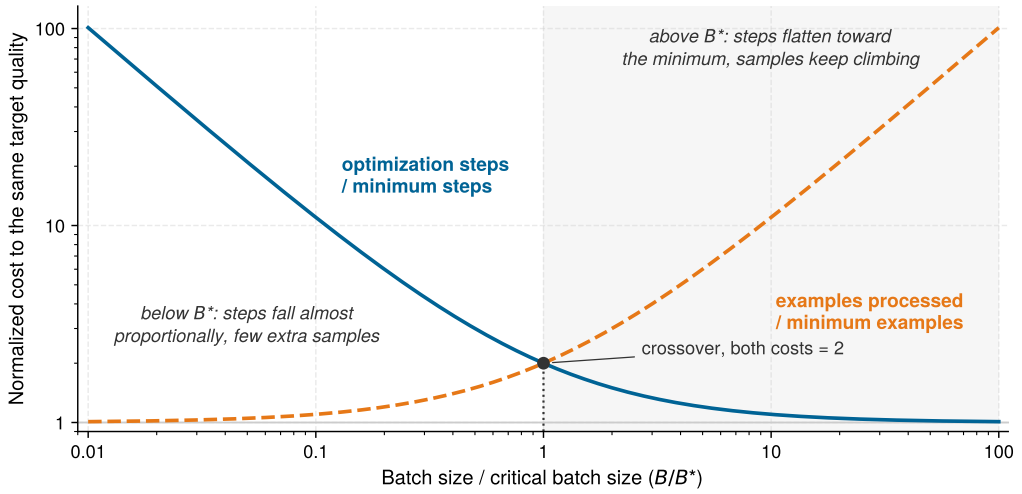


Figure 0.57: Statistical cost of larger batches: A normalized illustration of the gradient-noise trade-off model, with batch size divided by the fitted critical batch. Optimization steps approach a lower limit as batches grow, while total examples processed increase. The crossover is not a hardware-throughput optimum or a measured threshold for a particular model (McCandlish et al. 2018).

Checkpoint 5.2: Scaling decisions

Given a 7B-parameter model distributed across a cluster of 64 A100 GPUs (80 GB HBM2e each), estimate the critical-batch crossover. Use a pilot trace with $\text{tr}(\Sigma) = 1.6 \times 10^6$, $\|\nabla \mathcal{L}(\theta)\|^2 = 100$, per-GPU batch $B_{\text{local}} = 4$, and a proposed gradient-accumulation depth of 32 steps, giving $B_{\text{global}} = 64 \times 4 \times 32 = 8{,}192$ samples.

- ☐ **Critical batch size**: calculate the critical batch size (B^*), where the gradient noise scale equals the batch size.
- ☐ **Proposed batch**: use the critical batch size proxy $B^* \approx \frac{\text{tr}(\Sigma)}{\|\nabla \mathcal{L}(\theta)\|^2}$ to evaluate the proposed batch size.
- ☐ **Efficiency distinction**: explain why the gradient-noise estimate can assess statistical scaling but cannot establish hardware scaling efficiency without compute and communication timings.

Convergence comparison for 8 versus 64 workers

To illustrate these concepts concretely, consider scaling from 8 to 64 workers when training a transformer language model with baseline batch size $B_{\text{local}} = 32$ per worker.

Napkin Math 5.6: Scaling from 8 to 64 workers

Setup: This illustrative comparison assumes the iteration counts needed to reach one fixed target quality. They are scenario inputs, not measured convergence results or predictions from GPU count. The baseline is 100K iterations on single GPU with $B_{\text{local}} = 32$.

8 workers (BSP)

- Effective batch size: $B = 8 \times 32 = 256$
- Learning rate: $\eta = 8 \times \eta_{\text{base}}$ (illustrative candidate with warmup; validate for the workload)
- Expected iterations: 100K / 8 = 12.5K iterations

- Assumed iterations to the same target: 12.8K iterations (98 percent efficiency)
- Communication overhead: 15 percent (NVLink intra-node)
- Wall-clock speedup: 100K $\times$ 1 / (12.8K $\times$ 1.15×) = 6.8×

64 workers (BSP)

- Effective batch size: $B = 64 \times 32 = 2{,}048$
- Learning rate ($N = 64$ workers): $\eta = N \times \eta_{\text{base}}$ is the scenario's assumed candidate schedule, not a prescription determined by B^* alone
- Assuming $B^* \approx 4{,}000$ (below critical): the useful-worker bound is $B^*/B_{\text{local}} \approx 4{,}000 \ / \ 32 \approx 125$ workers, so 64 workers stay inside the near-proportional regime; this estimate does not validate a learning-rate schedule
- Expected iterations: 100K / 64 = 1.56K iterations
- Assumed iterations to the same target: 1.72K iterations (91 percent efficiency)
- Communication overhead: 45 percent (InfiniBand inter-node, 8 nodes)
- Wall-clock speedup: 100K $\times$ 1 / (1.72K $\times$ 1.45×) = 40.1×

SSP workers: 64 workers ($s = 4$)

- Same effective batch size: $B = 2{,}048$
- Illustrative learning-rate reduction, not a staleness theorem: $\eta' = \eta_{\text{BSP}}/\sqrt{1+s}$ with $s = 4$, giving $\eta' \approx 0.45 \times \eta_{\text{BSP}}$
- Expected iterations: Higher due to staleness penalty
- Assumed iterations to the same target: 2.1K iterations (74 percent efficiency)
- Communication overhead: 25 percent (reduced synchronization)
- Wall-clock speedup: 100K $\times$ 1 / (2.1K $\times$ 1.25×) = 38.1×

Analysis (table 0.32)

Table 0.32: Illustrative scaling comparison: Assumed iteration counts to one target quality, communication increments relative to local compute time, and the resulting speedup and sample efficiency. These are scenario calculations, not empirical optimizer benchmarks.

Configuration	Iterations	Comm. Overhead	Wall-clock Speedup	Sample Efficiency
1 GPU (baseline)	100,000	0%	1×	100%
8 GPU BSP	12,800	15%	6.8×	98%
64 GPU BSP	1,720	45%	40.1×	91%
64 GPU SSP	2,100	25%	38.1×	74%

The 64-GPU BSP configuration achieves 40× speedup despite only 91 percent sample efficiency because the communication overhead (45 percent) is offset by the massive parallelism. SSP provides comparable wall-clock time with lower communication overhead but requires more total samples.

Cost Analysis (assuming \$3/GPU-hour):

- 8: 12.8K iters × 0.46 s/iter × 8/3600 × \$3/GPU-hour = \$39
- 64 BSP: 1.72K iters × 0.58 s/iter × 64/3600 × \$3/GPU-hour = \$53
- 64 SSP: 2.1K iters × 0.50 s/iter × 64/3600 × \$3/GPU-hour = \$56

Despite higher parallelism, 64-GPU training costs more per run due to communication overhead and reduced sample efficiency. The 8-GPU configuration is more cost-efficient, but its 6.8× speedup against the 64-GPU run's 40.1× leaves it several times slower in wall-clock time. The choice depends on whether minimizing cost or minimizing time-to-result is the priority.

Communication cost versus convergence speed

Communication savings matter only through the resulting time and cost to achieve target model quality. In the preceding scenario, the 8-worker BSP configuration minimizes cost (\$39) at the expense of runtime, and scaling to 64 workers under BSP buys a much shorter run for \$53. The 64-worker SSP run saves communication per iteration yet finishes later and costs more (\$56), because its stale updates need extra iterations to reach the same target. Figure 0.58 places the three runs on the cost-time plane, where BSP at 64 workers dominates SSP on both axes.

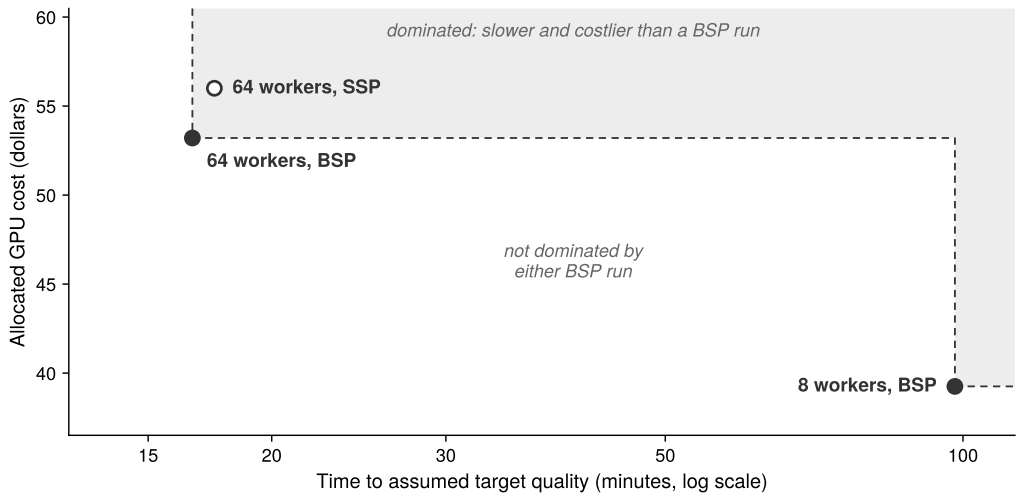


Figure 0.58: Cost and time in the illustrative scaling scenario: Points reuse the assumed convergence counts and step times in the preceding notebook. The eight-worker configuration costs less but finishes later; the assumed sixty-four-worker SSP configuration is dominated by BSP in both cost and time. This is not a universal ranking of synchronization methods.

Several techniques occupy different positions on this trade-off curve. Gradient compression reduces communication volume by transmitting compressed gradient information through quantization, sparsification, or low-rank approximation. Examples include sign-based updates (Bernstein et al. 2018), Deep Gradient Compression (Lin et al. 2018), PowerSGD (Vogels et al. 2019), quantized SGD with convergence analysis (Alistarh et al. 2017), and empirical sparse gradient dropping for neural machine translation (Aji and Heafield 2017).

Local SGD lets workers perform H_{local} local updates before synchronizing, reducing synchronization frequency per local update by factor H_{local}. Results for smooth, strongly convex objectives can recover synchronous SGD's asymptotic rate under specified learning-rate and local-update-interval

conditions (Stich 2019). The interval is part of the convergence assumptions, not an unrestricted communication saving.

Decentralized SGD exchanges information along a communication graph instead of performing a global AllReduce at each update. Sparse neighbor exchanges can reduce immediate communication demand, but spreading information across the group takes additional rounds. Graph connectivity, link service time, and the optimization effect of delayed mixing determine whether this trade-off helps a geographically distributed workload.

The choice among these methods depends on the specific bottleneck and the convergence cost of changing the update. Gradient compression targets payload size, Local SGD and SSP target synchronization frequency or waiting, and decentralized approaches change the communication graph. Each requires measuring time to the same target quality. A narrower numeric format is one more way to shrink that payload, but only under conditions that FP8 makes precise.

FP8 for distributed training

Numerical precision can become a distribution lever, but compute precision and communication precision are separate choices. Casting GEMM operands to half as many bytes reduces operand storage and local memory traffic; it halves a collective payload only when the communication path explicitly transmits that narrower representation. The 8-bit floating point (FP8) format exploits the compute-side lever by reducing operand precision while preserving enough range for stable optimization.

FP8 matters to distributed training only after four dtypes are distinguished: the stored parameter dtype, the GEMM operand dtype, the accumulator or master-state dtype, and the collective wire dtype. Traditional mixed-precision training commonly retains FP32 optimizer or master state while using FP16/BF16 operands. FP8-capable accelerators add E4M3 and E5M2 operand formats optimized for different tensor distributions (Micikevicius et al. 2022). The collective may still transmit FP16/BF16 gradients or activations unless the runtime applies an explicit FP8 cast or compression protocol.

↩ The throughput that narrower precisions buy on current accelerators is established in section 11.

The two FP8 formats trade precision against range. E4M3 (4-bit exponent, 3-bit mantissa) reaches approximately ± 448 and offers finer precision, motivating its use for scaled *weights and activations* in the cited recipe. E5M2 (5-bit exponent, 2-bit mantissa) reaches approximately ± 57344 with coarser precision, accommodating a wider range of scaled *gradients*. The assignment follows from the distributions. Forward activations and weights tend to cluster within a predictable range, so the extra mantissa bit of E4M3 buys accuracy, whereas gradients can span many orders of magnitude during backpropagation, so the extra exponent bit of E5M2 avoids the overflow and underflow that the narrower E4M3 range would cause more often. Neither format guarantees that every value survives conversion. Tensor distributions, scaling granularity, and numerical validation determine suitability. Table 0.33 summarizes the available range and typical roles without making those roles mandatory.

Table 0.33: Training Precision Formats: Each row represents a floating-point format that can occupy one role in a mixed-precision training contract. E4M3 and E5M2 narrow selected operands; accumulator, optimizer-state, storage, and wire formats remain independent engineering decisions.

Format	Exponent	Mantissa	Range	Precision	Typical numerical role
FP32	8 bits	23 bits	$\pm 3.4 \times 10^{38}$	Very high	Master or optimizer state
FP16	5 bits	10 bits	± 65504	High	Operand, higher-precision accumulation/output, or wire
BF16	8 bits	7 bits	$\pm 3.4 \times 10^{38}$	Moderate	Operand, higher-precision accumulation/output, or wire
E4M3	4 bits	3 bits	± 448	Low	Scaled weights and activations
E5M2	5 bits	2 bits	± 57344	Very low	Scaled gradients

One response to FP8's limited range is *dynamic scaling*. A scale suitable early in training can become unsuitable as tensor magnitudes change. Per-tensor scaling multiplies values before conversion and compensates for that scale when interpreting the result. A common policy tracks the recent

maximum absolute value of each tensor and chooses the scale that maps that maximum near the largest representable FP8 value, so the tensor uses as much of the format's range as possible without overflowing. Scaling policy and granularity must balance overflow, underflow, and precision; changing the scale does not remove the need to validate training quality.

An FP8 training contract combines FP32 master or optimizer state and FP8 GEMM operands with higher-precision accumulation and output. The exact accumulator and output formats are properties of the operation and hardware implementation rather than universal FP16/BF16 choices. This approach can achieve near-FP16 training quality while improving effective throughput on FP8-capable hardware for suitable workloads (Micikevicius et al. 2022). The systems implication is concrete but scoped: FP8 halves bytes only for tensors actually stored or transmitted in FP8, while operation throughput and energy gains depend on the accelerator implementation. A collective that reduces FP16 gradients receives no wire-volume reduction merely because the preceding GEMMs used FP8.

For distributed training, FP8 earns its place when lower-precision compute improves the local critical path or an explicit communication cast reduces payloads while its accumulation and scaling policy protects convergence. It changes representation, not the parallelization axis. Compression, local updates, and narrower formats all make each data-parallel step cheaper, yet none of them partitions an individual layer or its activations; that remaining capacity constraint motivates model parallelism.


Model Parallelism

Sharded data parallelism distributes stored state but still asks each worker to execute every layer on its local examples. If one layer's gathered parameters and working memory exceed device capacity, or its execution is too slow for the target schedule, splitting that computation becomes a candidate. Model parallelism addresses this form of the memory capacity gap (principle 2) by assigning different computations to different devices. Its value must be compared with offload, recomputation, and smaller local batches under the same throughput and quality requirements.

Definition 5.7: Model parallelism

Model parallelism is a distributed training strategy that partitions a single neural network's parameters or operations across multiple devices so each device computes a distinct portion of the model.

1. **Significance**: If a model with parameter state M_{weights} is split across $N_{\text{TP}}N_{\text{PP}}$ model-parallel devices, the ideal per-device parameter footprint falls toward $M_{\text{weights}}/(N_{\text{TP}}N_{\text{PP}})$, enabling training of models that exceed single-device memory. The cost is extra communication for activations and gradients plus idle time from sequential dependencies, so the memory gain must exceed the transfer and pipeline-bubble overhead introduced by the partition.
2. **Distinction**: Unlike data parallelism, which replicates the full model on every worker and shards the minibatch, model parallelism shards the model itself. Pipeline parallelism and tensor parallelism are implementation forms of model parallelism: one partitions layers into stages, while the other partitions individual tensor operations.
3. **Common pitfall**: A frequent misconception is that model parallelism automatically speeds up training. Its primary benefit is capacity, not throughput; without careful scheduling and overlap, downstream devices wait for upstream activations and utilization can fall below a single-device baseline.



Weights are only a small slice of the full Adam training state.

Memory fit alone does not settle whether a model needs this kind of partition. For a 175B-parameter model, weights alone occupy 350 GB, or about 5.5 GB per GPU across a 64-GPU group, one-sixteenth of the 1,024-GPU reference cluster. Full mixed-precision Adam training state is much larger, 2,800 GB globally, yet ZeRO-3 across the same 64 GPUs reduces it to roughly 43.8 GB per GPU before activations, which fits an 80 GB accelerator. ZeRO-3 can therefore make the static state fit, as the notebook below confirms. It pays for that fit in traffic, because every step regathers every

layer's parameters across the data-parallel fabric, roughly three times the model's parameter bytes per worker (section 4). It also cannot split an individual layer's computation or activations across devices. Tensor parallelism addresses both limits by partitioning individual weight matrices across devices, using the column-then-row pairing diagrammed in figure 0.61 and detailed in section 7, which confines collective communication to block boundaries. Pipeline parallelism instead stages sequential layers across devices (section 5).

Activations add a separate memory requirement. Under the earlier unchecked-storage assumptions, a 2048-token sequence through 175B parameters produces roughly 1.1 TB at a local batch of 4 sequences; optimizer sharding does not reduce that storage. Recomputation trades memory for extra FLOPs, partitioning distributes activations, and offload moves them to another memory tier. Kernel and batch-size choices also change the budget. Full activation checkpointing brings the same modeled case down to ~19.3 GB. The following notebook, which uses a single-sequence local batch, checks whether ZeRO-3 plus checkpointing fits the model without partitioning its computation.



Napkin Math 5.7: The memory wall of scale

Problem: Training a 175B-parameter model (like GPT-3) on a 64-GPU group of NVIDIA A100s (80 GB), smaller than the 1,024-GPU reference cluster. The A100 carries the same 80 GB of HBM as the reference H100, so the capacity verdict carries over, and a small group is the harder test of whether sharding alone suffices. Can data parallelism with ZeRO-3 handle this?

Math:

1. **Parameter storage**: 175B params $\times$ 2 bytes (FP16) = 350 GB.
2. **Gradients and optimizer state**: Gradients add 175B params $\times$ 2 bytes = 350 GB, while Adam FP32 master weights, momentum, and variance add 175B params $\times$ 12 bytes = 2,100 GB.
3. **Total static memory**: 2,800 GB.
4. **ZeRO-3 sharding**: With 64 GPUs, per-GPU static memory = 2,800 GB/64 GPUs $\approx$ 43.8 GB.
5. **Activation memory**: For sequence length 2048 and batch size 1, the canonical full-checkpointing strategy stores $\approx$ 4.8 GB of activations per GPU.

Systems insight: 43.8 GB (static) + 4.8 GB (dynamic) = 48.6 GB. Under this simplified accounting, ZeRO-3 plus full activation checkpointing fits within the 80 GB A100 capacity, leaving material headroom for framework buffers and transient layer gathers. If those additional allocations exceed the remaining HBM, the design can reduce the local batch, offload state, increase the sharding degree, or add tensor or pipeline parallelism; tensor parallelism is not the only recourse.

In this example, sharding and checkpointing make the modeled state fit, so two reasons to consider model parallelism remain. The first is the regather traffic. On the 1,024-GPU reference cluster, ZeRO-3 moves about 1.1 TB per worker per step for this model, which on one NDR InfiniBand port takes about 10× as long as the step's computation. The second is layer execution, since full sharding gathers parameters but never splits one layer's computation. Model parallelism instead chooses where to cut that computation. Layer-based splitting assigns sequential groups, such as layers 1–4 and layers 5–8, to different devices. Channel-based splitting distributes a layer's channels, while attention-head splitting assigns different heads to different devices. Layer cuts introduce pipeline dependencies; channel and head cuts expose concurrent work but add intra-layer exchanges. Other workloads may still need these cuts to meet peak memory capacity.

These cuts enable the large-scale cases that exceed a single device for different reasons. GPT-3, with 175B parameters, was trained with model parallelism within each matrix multiplication and across layers (Brown et al. 2020), which avoids regathering the full parameter set on every step. Vision transformers processing high-resolution $16k \times 16k$ pixel images use model parallelism to manage activation and memory constraints. Mixture-of-experts (MoE) architectures, whose experts are sparsely activated feed-forward blocks developed in section 8, use this approach to distribute

their conditional computation paths across hardware (Shazeer et al. 2017; Lepikhin et al. 2021; Fedus et al. 2022).

For a layer-wise cut, device coordination proceeds in three phases. In the forward pass, data flows sequentially through model segments on different devices. The backward pass propagates gradients in reverse order through these segments. During parameter updates, each device modifies only its assigned portion of the model. The coordination ensures mathematical equivalence to training on a single device while enabling models that exceed individual device memory capacities. The cost is sequential dependency between stages: while one device computes its forward pass, downstream devices sit idle, creating the pipeline bubble that governs utilization for this layer-wise partition.

Checkpoint 5.3: Model parallelism foundations

Verify your understanding of model sharding:

- ☐ **Memory relief**: determine whether model parallelism reduces the memory footprint per GPU for a given model.
- ☐ **Sequential dependency**: identify whether sequential dependencies between layer-wise model shards arise in the forward pass, the backward pass, or both.
- ☐ **Pipeline bubble**: explain why unscheduled layer-wise model parallelism can lead to lower GPU utilization than data parallelism through the "pipeline bubble."
- ☐ **Layer vs. tensor split**: distinguish layer-based and tensor-based ways to split a Transformer layer.

Model parallelism implementation

Once the model itself is the object being partitioned, the implementation problem is placement: every cut must save enough memory to justify the activation transfer and idle time it introduces. The first implementation below partitions sequential layer groups to expose those pipeline dependencies, while tensor splitting executes pieces of the same layer concurrently. In layer-wise partitioning, input activations propagate forward through sequentially assigned model partitions while gradients flow backward to update parameters, with intermediate activations transferring across device boundaries at each stage.

The running example shows what a layer-wise cut changes and what it does not. Before any sharding, the 175B-parameter model's 350 GB of FP16 weights exceed the 80 GB capacity of the A100s in the preceding notebook by a factor of four. ZeRO-3 met that capacity limit by sharding storage while every worker still executed every layer; model parallelism meets it by giving each device a *unique* fraction of the model to compute. Unlike data parallelism, where every GPU processes a unique fraction of the global batch through the whole network, the layer-wise partition considered here sends the *same* data stream sequentially through devices that each own a slice of the layers. With 8-way partitioning, FP16 weights alone occupy approximately 44 GB per GPU. That is only the weights budget: full training still needs activations, gradients, and optimizer state, so pure 8-way model parallelism is not sufficient by itself. Production layouts therefore combine it with optimizer and gradient sharding or offload, and with pipeline scheduling that keeps activation memory within capacity, the composition developed in section 8.

In a typical pipeline parallel implementation, the training loop operates as a relay race. GPU 1 computes the initial transformer blocks and sends the resulting activation tensor to GPU 2. For the 175B model with hidden dimension 12,288 and a microbatch of 4 sequences at 2,048 tokens each, the forward handoff carries approximately 201 MB per stage boundary per microbatch. GPU 2 needs that payload before processing the same microbatch, creating a dependency chain through the stages. Other microbatches can occupy the pipeline concurrently. Backward propagates activation gradients in reverse, while each stage also computes gradients for its own parameters.

Partitioning layers changes where an optimizer update runs without necessarily changing the update rule. Each GPU can apply Adam (Kingma and Ba 2015), AdaFactor, or another optimizer to its parameter slice once the required gradients are complete. A device holding transformer layers 1–12 updates those layers; tied parameters, global gradient clipping, or a combined data-parallel

group can still require coordination. Preserving synchronous optimization also requires the schedule to use consistent parameter versions. Sequential dependencies introduce pipeline bubbles, and unequal stage service times add waiting. The engineering problem is to overlap microbatches and balance stage work while preserving that update contract (Rasley et al. 2020).

Parallelism variations

Partitioning strategy determines which cost the model pays after memory no longer fits on one device. Layer-wise partitioning spends idle time to reduce per-device memory; pipeline parallelism spends scheduling complexity to hide that idle time; tensor parallelism spends NVLink bandwidth to split a single layer. The following subsections separate these choices by the architecture and interconnect that make each viable.

Layer-wise partitioning

Layer-wise partitioning is the least invasive model cut: it saves memory by assigning consecutive layers to separate devices, but it preserves the model's sequential dependence. In transformer architectures, this translates to specific devices managing defined sets of attention and feed-forward blocks. Figure 0.59 diagrams this partitioning for a 16-layer transformer across four GPUs: panel (a) maps the weight footprint reduction to one-quarter per device alongside forward activation and backward gradient transfers across stage boundaries, while panel (b) charts the resulting execution timeline, revealing that each GPU remains idle for six of eight time slots without microbatch pipelining.

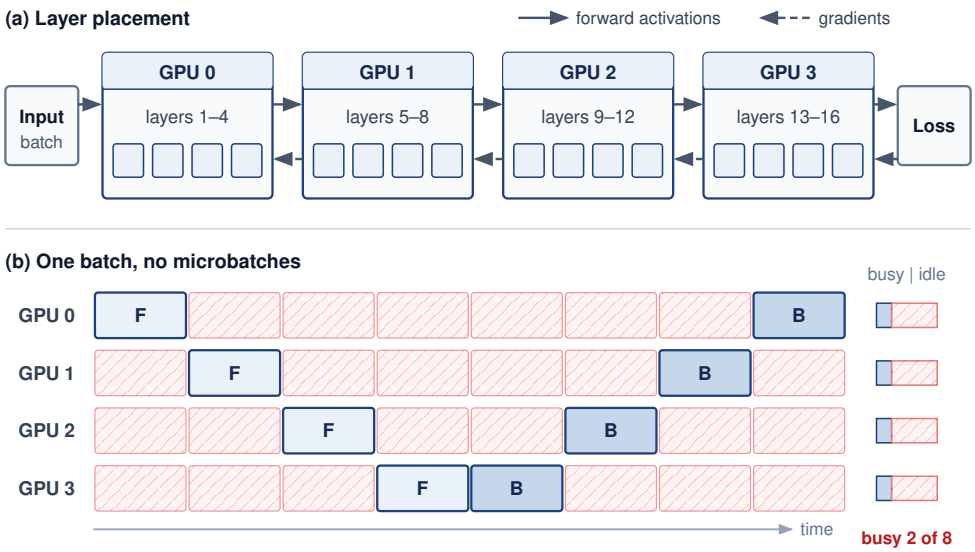


Figure 0.59: Layer-wise model parallelism: (a) A 16-layer transformer placed four consecutive layers per GPU, cutting each GPU's weight footprint to one-quarter of the model. Forward activations cross each stage boundary left to right; gradients return right to left. (b) Without microbatching, one batch visits the stages in turn, forward (F) and then backward (B) in reverse, in equal schematic time slots, so each GPU works in only 2 of 8 slots. The microbatched schedule in figure 0.60 fills much of that idle time.

Sequential processing introduces device idle time, as each device must wait for the previous device to complete its computation before beginning work. While GPU 0 processes the initial blocks, GPUs 1, 2, and 3 remain inactive. Similarly, when GPU 1 begins its computation, GPU 0 sits idle. This pattern of waiting and idle time reduces hardware utilization efficiency compared to other parallelization strategies.

Pipeline parallelism

Pipeline parallelism extends layer-wise partitioning by introducing microbatching to amortize device idle bubbles.

Definition 5.8: Pipeline parallelism

Pipeline parallelism is a model parallelism technique that partitions a neural network's layers into sequential stages assigned to different devices, passing activations forward and gradients backward between stages while overlapping computation across stages using microbatches to maintain throughput.

1. **Significance**: Each boundary transfers forward activations and backward activation gradients. A forward tensor contains $B_{\text{micro}} \times S \times d \times 2$ bytes at BF16, where B_{micro} is the microbatch size. For a hidden dimension of 8,192 with microbatch size 1 and a 2,048-token sequence, the forward payload is approximately $8{,}192 \times 2{,}048 \times 2 \approx 34$ MB per microbatch per boundary. Backward traffic and all microbatches must be counted before comparing this with a per-update gradient AllReduce or sizing a 50 GB/s InfiniBand link. In a balanced noninterleaved schedule with ideal transfers, the idle fraction is approximately $(N_{\text{PP}} - 1)/(m + N_{\text{PP}} - 1)$, where N_{PP} is the stage count and m the microbatch count.
2. **Distinction**: Tensor parallelism partitions operations within a layer and introduces communication among their participants. Pipeline parallelism instead transfers activations and their gradients between sequential stages. This coarser exchange can suit slower links when the transfer fits within the stage schedule; the interconnect name alone does not establish feasibility.
3. **Common pitfall**: A frequent misconception is that adding pipeline stages always improves throughput. Each additional stage increases the pipeline bubble fraction $(N_{\text{PP}} - 1)/(m + N_{\text{PP}} - 1)$ unless the number of microbatches m scales proportionally, causing hardware to idle and erasing the benefit of deeper partitioning.

Figure 0.60 sequences a four-stage pipeline processing four microbatches ($N_{\text{PP}} = 4, m = 4$) under a GPipe schedule: dividing the global batch into discrete microbatches allows forward passes to overlap diagonally across stages before backward passes unfold in reverse order. While microbatching raises hardware utilization above naive sequential placement, pipeline fill (t_1–t_3) and drain (t_{12}–t_{14}) bubbles still leave each device idle for 6 of 14 time slots.


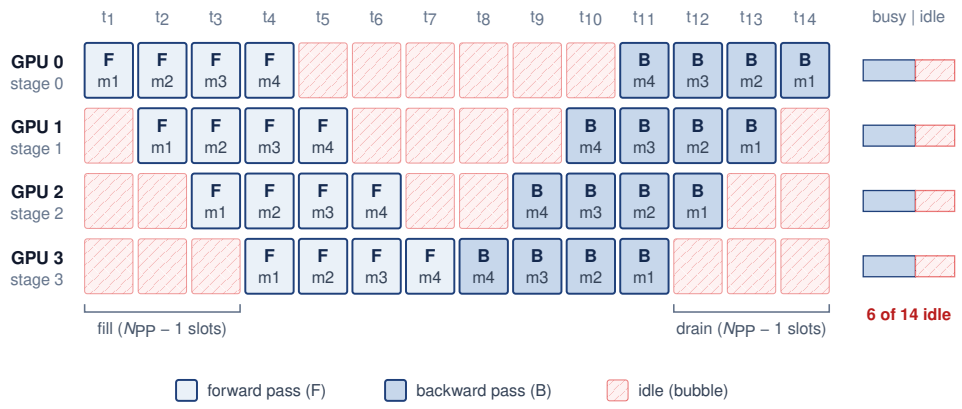


Figure 0.60: Pipeline parallelism schedule: A 4-stage pipeline processes 4 microbatches with all forward passes (F) before any backward pass (B), as in GPipe. Rows are pipeline stages and columns are equal time slots. Each backward pass enters a stage only after the next stage has produced that microbatch's gradient, so every stage idles $N_{\text{PP}} - 1$ slots in the forward phase and $N_{\text{PP}} - 1$ in the backward phase, 6 of 14 slots in all.

Tracing the schedule grid in figure 0.60 column by column reveals how the fill and drain bubbles arise. In the first slot only stage 0 has work, the forward pass of microbatch 1. In the second, stage 0 starts microbatch 2 while stage 1 receives microbatch 1's activations, and by the fourth slot every stage holds a different microbatch. The last stage then turns microbatch 4 around into its backward pass, and gradients travel upstream in reverse microbatch order, so stage 0 waits until the eleventh slot for its first gradient. Each stage therefore idles 3 slots in the forward phase and 3 more in the backward phase, 6 of the 14 slots in the step, whether those slots fall at the start of its row, the middle, or the end. That share, about 43 percent, is the bubble fraction $(N_{\text{PP}}-1)/(m+N_{\text{PP}}-1)$ at $N_{\text{PP}}=m=4$. Adding microbatches lengthens the busy diagonal without lengthening fill and drain in this balanced schedule. Increasing m is therefore one way to reduce the idle fraction; later schedules also change which work can occupy the gaps.

The same bubble term becomes concrete in the following worked example, where an 8-stage pipeline and 32 microbatches still leave a measurable idle-time tax.



Enough microbatches shrink the bubble even as stages double.

↪ The bubble fraction across stage and microbatch counts, and its interleaved-schedule variant, are developed in section 4.

> **Napkin Math 5.8: The cost of the pipeline bubble**
>
> **Problem**: A large-model training run uses pipeline parallelism across 8 stages. To hide the sequential delay, the batch is split into 32 microbatches. What is the "bubble tax," the fraction of GPU cycles lost to idle waiting?
>
> **Math**: For balanced, noninterleaved synchronous stages under the one-forward-one-backward (1F1B) schedule developed below, with ideal transfers, the bubble fraction follows from the stage and microbatch counts. The time units below each combine one forward and one backward service interval; they are not individual optimizer steps.
>
> 1. **Wait time**: At the start and end of each batch, GPUs sit idle for $N_{\text{PP}}-1$ steps.
> 2. **Productive time**: GPUs compute for m steps.
> 3. **Bubble fraction**: $(N_{\text{PP}}-1)/(N_{\text{PP}}-1+m) = 7\ /\ (7+32) \approx 17.9$ percent.
>
> **Systems insight**: Pipeline parallelism is a *utilization-memory trade-off*. With this stage count and schedule fixed, reducing the bubble from 18 percent to 5 percent requires more microbatches (m). Their activation-memory cost depends on the schedule. GPipe retains activations across the microbatches, whereas the 1F1B schedule developed next releases them during the steady state. The modeled 17.9 percent idle fraction also motivates interleaved pipelining, which divides each device's work into smaller stages. Interleaving can reduce the original 18 percent bubble, but additional transfers and memory requirements determine the net gain.

GPipe[5] (Huang et al. 2019) introduced synchronous pipeline parallelism with microbatch accumulation, while PipeDream (Narayanan et al. 2019) developed asynchronous approaches with weight stashing. Modern systems employ 1F1B (one-forward-one-backward)[6] scheduling to reclaim activation memory earlier; that lower memory pressure makes larger microbatch counts practical, and the larger m is what shrinks the bubble term.

At the schedule level, 1F1B is a warmup, steady-state, and drain loop. Algorithm 0.1 makes the contract explicit: each stage alternates forward work for newer microbatches with backward work for older microbatches once gradients arrive, so activations can be released before the whole batch has completed.

5 | **GPipe**: Published by Google in 2019, GPipe introduced synchronous microbatch pipelining that trained a 557M-parameter AmoebaNet across 8 Tensor Processing Units (TPUs) with near-linear scaling. GPipe exposed the central trade-off of the technique. The fill-and-drain idle time traced in figure 0.60 shrinks only as microbatch count grows, yet GPipe's schedule keeps every microbatch's activations live, a tension that drove systems design toward schedules that reduce activation residency and make larger microbatch counts feasible.

6 | **1F1B (one-forward-one-backward) scheduling**: Unlike GPipe (which processes all forward passes before any backward passes), 1F1B interleaves them. For equal-sized microbatch activations and a non-interleaved schedule, peak retained activations per stage fall from $\mathcal{O}(m)$ under GPipe to at most $\mathcal{O}(N_{\text{PP}})$ under 1F1B, where m is the microbatch count and N_{PP} the pipeline-stage count. Summed across stages, the corresponding bounds are $\mathcal{O}(mN_{\text{PP}})$ and $\mathcal{O}(N_{\text{PP}}^2)$. This memory reclamation is what enables the massive microbatch counts $(m \gg N_{\text{PP}})$ required to keep the pipeline bubble small.

Algorithm 0.1 One-forward-one-backward pipeline schedule

Require: N_{PP} ordered pipeline stages; m microbatches; activation links $j \to j{+}1$ and gradient links $j{+}1 \to j$
Ensure: one optimizer update after gradients accumulate across all m microbatches
1: split the global batch into m microbatches; assign consecutive layers to the N_{PP} stages
2: warm-up: launch forwards from stage 0, forwarding each activation downstream as produced
3: **for** each stage in steady state **do**
4: alternate one backward (oldest ready microbatch) with one forward (next microbatch)
5: release a microbatch's activation as soon as that stage's backward consumes it
6: **end for**
7: drain: finish the remaining backward passes in reverse stage order
8: apply the optimizer update once every stage has accumulated gradients for all m microbatches

The warm-up and drain phases still leave a bubble of roughly $(N_{\text{PP}} - 1)/(m + N_{\text{PP}} - 1)$, but interleaving backward work in the steady state frees each activation as soon as its backward consumes it, so peak activation memory grows with the stage count rather than the microbatch count. That is the gain over GPipe-style all-forward-then-all-backward scheduling, and it lets the system raise m until activation memory, recomputation, or the global-batch constraint becomes the next limit.

The activation handoff has shape $B_{\text{micro}} \times S \times d$; its completion still constrains the next stage. The 1F1B schedule in algorithm 0.1 reduces activation residency, but fill, drain, communication, and load imbalance leave idle time. Filling those remaining slots requires separating work that releases an upstream dependency from work that can wait.

Zero-bubble pipeline schedules further reduce idle time by overlapping weight gradient computation with activation gradient communication. In a standard backward pass, the GPU computes $\partial\mathcal{L}/\partial\mathbf{W}$ (weight gradient) and $\partial\mathcal{L}/\partial\mathbf{X}$ (activation gradient, sent to the previous stage) together. Zero-bubble scheduling splits these into separate kernels: a B kernel that computes only the activation gradient $\partial\mathcal{L}/\partial\mathbf{X}$ and sends it to the previous stage, and a W kernel that computes the weight gradient $\partial\mathcal{L}/\partial\mathbf{W}$ locally. The B kernel must execute promptly (it is on the critical path), but the W kernel can be scheduled opportunistically to fill bubbles.

The B/W split creates scheduling freedom, but weight-gradient work must still finish before the corresponding optimizer update. In a balanced 4-stage pipeline with 8 microbatches, noninterleaved 1F1B still leaves $3/11 \approx 27\%$ of each stage's time idle, by the bubble fraction derived above. Reordering forward, activation-gradient, and weight-gradient work can reduce that gap. Approaching zero also depends on kernel durations, memory headroom, and optimizer synchronization; splitting backward alone does not guarantee it.

The trade-off is memory: zero-bubble scheduling requires storing intermediate activations for longer (because the W computation is deferred), increasing peak memory usage. Some implementations address this by combining zero-bubble scheduling with activation checkpointing, selectively recomputing certain activations rather than storing them. The interaction between these techniques creates a three-way trade-off among pipeline bubble size, memory consumption, and recomputation overhead, an example of the displacement of overhead (principle 13).

Tensor parallelism

Every pipeline schedule so far keeps whole layers on each device, which is why its traffic is confined to stage boundaries and tolerates moderate interconnect bandwidth. The same property sets its limit. A pipeline cannot help when a single layer's weights or activations exceed one device, and it cannot shorten the time one layer takes, because that layer still runs on one accelerator.

Tensor parallelism takes a fundamentally different approach: instead of assigning complete layers to devices, it splits the weight matrices within each layer. This operator-level parallelism (also called intra-layer parallelism) enables finer-grained distribution but requires high-bandwidth interconnects for the frequent intra-layer communication it introduces.

Definition 5.9: Tensor parallelism

Tensor parallelism partitions individual tensor operations across devices, commonly through column-parallel or row-parallel weight splits. Communication combines or redistributes the resulting tensor shards as required by the next operation. The Megatron-style forward-pass example below illustrates one such arrangement.

1. **Significance**: The Megatron-LM arrangement developed below uses two AllReduce operations per transformer block in the forward pass, one after attention and one after the MLP, each reducing a 2-byte activation tensor of $B \times S \times d$ elements, where B counts the sequences in flight through the layer. A ring AllReduce moves roughly $2(N_{\text{TP}}-1)/N_{\text{TP}}$ times that payload per GPU, and the exchange recurs in every one of the 96 blocks of the GPT-3 shape, with backward adding corresponding exchanges. Whether that traffic hides behind computation depends on the link that carries it, which the arithmetic after the mechanism quantifies. Computing model FLOPs utilization (MFU) requires the complete compute and exposed-communication time, not the bandwidth ratio alone.
2. **Distinction**: Unlike pipeline parallelism, which communicates only at layer boundaries and transfers small activation slices, tensor parallelism synchronizes within every layer via AllReduce, making it sensitive to the per-operation latency of the interconnect and favoring a fast communication domain such as NVLink, which can extend beyond one node.
3. **Common pitfall**: Extending tensor parallelism across nodes without checking the transfer budget can erase the compute saving. The reference NVLink specification is approximately 900 GB/s bidirectional, or 450 GB/s per direction; InfiniBand NDR provides 50 GB/s per port, a 9× per-direction gap. These specifications identify a placement risk. Whether the split helps depends on sustained bandwidth, operation size, compute saved, and overlap.

Frequent intra-layer exchanges favor placing tensor-parallel groups within the fastest available communication domain. Pipeline stages communicate at coarser boundaries and can often span slower domains when their transfers fit the schedule. This difference motivates a hybrid that maps each exchange to a suitable fabric tier; it does not impose a universal node boundary for either strategy.

Megatron-style tensor parallelism[7] (Shoeybi et al. 2019) partitions matrix multiplications by alternating column and row splits. In the two-GPU dataflow diagrammed in figure 0.61, column-parallel splitting partitions the first weight matrix $\mathbf{A} = [\mathbf{A}_1 \mid \mathbf{A}_2]$ to produce local activation slices $\mathbf{Y}_1, \mathbf{Y}_2$ from replicated input $\mathbf{X}$; row-parallel splitting then partitions the second weight matrix $\mathbf{B} = [\mathbf{B}_1; \mathbf{B}_2]$ so that each GPU computes partial products $\mathbf{Z}_1, \mathbf{Z}_2$ locally, deferring cross-device communication to a single amber AllReduce that reconstructs output $\mathbf{Z}$.

Column-parallel linear layers split weights along columns. For input $\mathbf{X}$ and weight matrix $\mathbf{W} = [\mathbf{W}_1 \mid \mathbf{W}_2]$ split across 2 GPUs:


$$\mathbf{Y} = \mathbf{X}\mathbf{W} = \mathbf{X}[\mathbf{W}_1 \mid \mathbf{W}_2] = [\mathbf{X}\mathbf{W}_1 \mid \mathbf{X}\mathbf{W}_2]$$

Each GPU computes its partition independently. The concatenation in the equation is logical: when the next operation is row-parallel, each output shard remains on its producing device and feeds the matching weight shard without an AllGather. The row-parallel half of the pattern splits weights along rows, $\mathbf{W} = \begin{bmatrix} \mathbf{W}_1 \\ \mathbf{W}_2 \end{bmatrix}$:

$$\mathbf{Y} = \mathbf{X}\mathbf{W} = \mathbf{X}_1\mathbf{W}_1 + \mathbf{X}_2\mathbf{W}_2$$

Each GPU computes a partial sum, and the system pays one AllReduce to combine the partial outputs.

The column-then-row sequence diagrammed in figure 0.61 embodies the governing architectural invariant: pairing a column-parallel layer directly with a row-parallel layer allows intermediate



Tensor-parallel exchanges belong on the fast tier, about 9× an NDR port.

7 **Megatron-LM**: NVIDIA's 2019 framework that trained an 8.3B-parameter transformer (24× BERT-Large and 5.5× GPT-2 at the time) by strategically placing only two AllReduce operations per transformer block in the forward pass (one after attention, one after the multilayer perceptron (MLP)). This column-then-row partitioning eliminates inter-GPU communication between the two linear layers within each block, achieving 76 percent scaling efficiency across 512 GPUs and establishing tensor parallelism patterns that remain influential in large-scale transformer training.

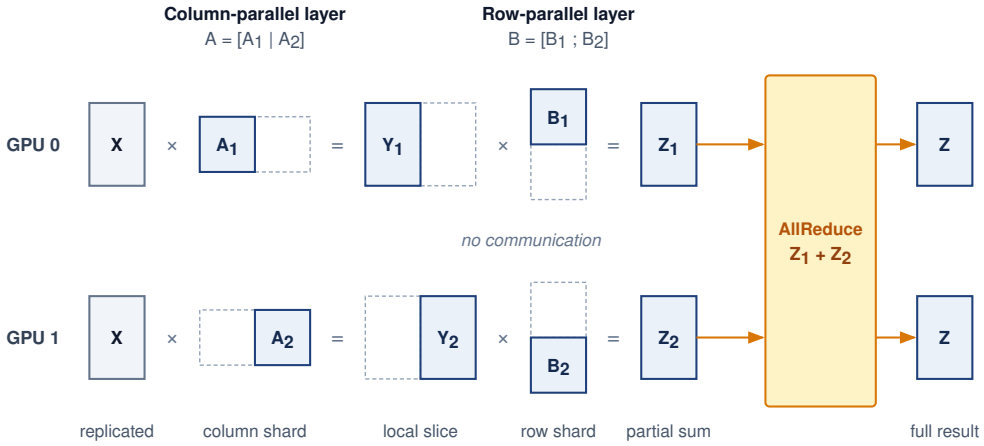


Figure 0.61: Matrix partitioning under tensor parallelism: A Megatron-LM layer pair on two GPUs, read left to right. The first layer (for example, QKV or the first feed-forward layer) is split by columns, $\mathbf{A} = [\mathbf{A}_1 \mid \mathbf{A}_2]$, so each GPU computes its own slice $\mathbf{Y}_i$ of the replicated input's output. The second layer is split by rows, $\mathbf{B} = [\mathbf{B}_1 ; \mathbf{B}_2]$, so each slice feeds its matching shard on the same GPU without communication. The only collective is the amber AllReduce that sums the partial outputs $\mathbf{Z}_1 + \mathbf{Z}_2$, leaving the full result on both GPUs.

activations $(\mathbf{Y}_1, \mathbf{Y}_2)$ to remain strictly local on each GPU, confining inter-device synchronization to a single collective at the end of the block. Megatron applies that pattern twice in each transformer block. The QKV projection is column-parallel and its attention output projection is row-parallel, then the first feed-forward layer is column-parallel and the second feed-forward layer is row-parallel. The design places AllReduce operations strategically, one after attention and one after the feed-forward network, for two AllReduce operations per transformer layer. Communication volume per transformer layer depends on sequence length S, hidden dimension d, tensor-parallel degree N_{TP}, and batch size B, the number of sequences in flight through the layer (the local batch, or the microbatch B_{micro} when the layer also sits in a pipeline). The activation payload is:

$$M_{\text{act}} = B \times S \times d \times s_{\text{elem}}$$

A ring AllReduce transfers approximately $2(N_{\text{TP}} - 1)/N_{\text{TP}} \times M_{\text{act}}$ bytes per GPU, which is close to $2M_{\text{act}}$ for large N_{TP}. For the GPT-3 shape ($S = 2048$, $d = 12{,}288$, 96 layers) with $B = 4$ and FP16, the activation payload is $4 \times 2048 \times 12{,}288 \times 2 \approx 201$ MB.

At $N_{\text{TP}} = 8$ the ring factor is 1.75, giving roughly 352 MB per AllReduce. With two AllReduces in each of the 96 layers, this totals approximately 67.6 GB per forward microbatch. The symmetric backward exchanges bring the total to roughly 135 GB per forward/backward microbatch, before any recomputation. Set against the computation it serves, that volume is modest on the right link and prohibitive on the wrong one. At the per-layer compute rate of the earlier feasibility check, one such microbatch takes about 2.2 s of forward and backward computation per GPU; its tensor-parallel traffic takes about 0.3 s on NVLink but about 2.7 s on one InfiniBand port, longer than the computation. The number of microbatches per update and the available overlap then determine the required fabric service rate.

Tensor parallelism eventually reaches a workload-dependent limit because smaller operation shards leave less computation to cover communication. Per-GPU ring AllReduce bytes approach $2\times$ the activation tensor size, while local matrix shapes and collective startup costs change with group size. The useful degree therefore depends on layer shape, microbatch size, and the fast communication domain. Llama 3 405B's TP=8 arrangement within NVLink-connected H100 nodes (Dubey et al. 2024) and node-local groups in other large training systems (Z. Jiang et al. 2024) illustrate a placement choice, not a universal eight-device limit.

Sequence and context parallelism

While tensor parallelism partitions weight matrices within linear layers, the memory footprint of large-scale transformer training is increasingly dominated by activations. As models scale their context length from thousands to hundreds of thousands or millions of tokens ($S \geq 32\text{k} \ldots 1\text{M}+$), the activation footprint scales proportionally:

$$M_{\text{activations}} = \mathcal{O}(B \times S \times d \times N_L)$$

for linear, normalization, and residual layers, and $\mathcal{O}(B \times N_{\text{heads}} \times S^2 \times N_L)$ for un-tiled attention (or $\mathcal{O}(B \times S \times d \times N_L)$ with tiled FlashAttention). At long contexts, activation memory dwarfs parameter storage, exposing the memory capacity gap (principle 2). Two complementary paradigms address this constraint by sharding along the sequence axis: sequence parallelism (SP) within the tensor-parallel domain, and context parallelism (CP) across dedicated long-sequence process groups.

Definition 5.10: Sequence and context parallelism

Sequence and context parallelism partition the token sequence dimension to reduce per-device activation storage. Sequence parallelism (SP) retains sequence shards during operations such as LayerNorm and Dropout within a tensor-parallel group. Context parallelism (CP) partitions the sequence across a dedicated group and exchanges the information needed for attention, through mechanisms developed below that either pass key/value blocks around a ring or transpose between sequence and head partitions.

1. **Significance**: Long contexts can exhaust activation memory even when sharded model state fits. The relevant limit depends on batch size, layer shapes, attention kernels, and checkpointing. Sequence parallelism divides the targeted activation storage by N_{TP} while preserving the ideal collective payload volume in the decomposition below. Context parallelism distributes sequence-dependent storage; linear context growth ($c \times S_{\text{single}}$, with c denoting the context-parallel degree) is an ideal capacity estimate that still requires communication buffers and computation to fit the budget.
2. **Distinction**: Tensor parallelism partitions weight matrices along hidden dimensions d, whereas context parallelism partitions the sequence axis S. Ring Attention exchanges key/value chunks between devices; Ulysses All-to-All transposes between sequence and head dimensions. Both require placement that can service their exchanges within the attention schedule.
3. **Common pitfall**: Assuming context parallelism eliminates the quadratic attention compute complexity. CP distributes the attention computation across devices, reducing *per-device* memory and FLOPs by $1/c$, but the *aggregate* cluster FLOPs for dense self-attention still scale quadratically as $\mathcal{O}(S^2)$.

Megatron sequence parallelism In the Megatron-style arrangement just derived, the column-then-row pairing in figure 0.61 splits the QKV projection and first MLP layer column-wise, and the attention output projection and second MLP layer row-wise. The surrounding LayerNorm, Dropout, and residual operations retain replicated activations across all N_{TP} devices. LayerNorm operates across a token's hidden features, while Dropout and residual addition operate element-wise; none requires another token's features. This token independence permits partitioning the otherwise replicated $B \times S \times d$ activation tensor along its sequence dimension.

Megatron Sequence Parallelism (Korthikanti et al. 2023) eliminates this redundancy by sharding the sequence dimension across the N_{TP} ranks for all non-tensor-parallel operations. Instead of replicating activations, each GPU holds only a $B \times (S/N_{\text{TP}}) \times d$ slice during LayerNorm and Dropout.

This sharding incurs zero additional communication volume. In standard tensor parallelism, the row-parallel matrix multiplication is followed by an AllReduce to sum partial products across ranks. An AllReduce mathematically decomposes into a ReduceScatter followed by an AllGather:

$$\text{AllReduce}(x) \equiv \text{AllGather}(\text{ReduceScatter}(x))$$

Megatron-SP decouples this collective pair across the transformer block. Following the row-parallel linear layer, a ReduceScatter reduces partial sums while scattering the resulting activations along the sequence dimension, leaving each GPU with an S/N_{TP} token slice. LayerNorm, residual additions, and Dropout then execute on these local slices with zero cross-device communication. Immediately before the next column-parallel linear layer, an AllGather across the sequence dimension reassembles the complete S tokens required for the weight-partitioned matrix multiplication.

In this ideal payload accounting, standard TP executes two AllReduces per transformer block ($2 \times 2(N_{\text{TP}}-1)/N_{\text{TP}} \times M_{\text{act}}$ bytes), while Megatron-SP executes two ReduceScatter and AllGather pairs ($2 \times [(N_{\text{TP}}-1)/N_{\text{TP}} + (N_{\text{TP}}-1)/N_{\text{TP}}] \times M_{\text{act}} = 2 \times 2(N_{\text{TP}}-1)/N_{\text{TP}} \times M_{\text{act}}$ bytes). The volumes match while the targeted activation storage falls by a factor of N_{TP}. Equal bytes do not imply equal elapsed time: separating the collectives changes readiness, startup costs, and overlap opportunities.

Context parallelism with ring attention versus Ulysses Increasing sequence length S can exhaust the remaining activation budget after sequence parallelism and checkpointing. Context parallelism of degree c distributes the sequence across c accelerators. Attention then needs exchanges across sequence partitions. Ring-based point-to-point transfers and all-to-all transpositions provide two ways to supply that information, and can also be combined hierarchically. The ring method relies on an online softmax, which keeps a running maximum and a running sum of the attention scores seen so far. Each arriving key/value tile can then be folded into the partial result, with the earlier contribution rescaled whenever the maximum changes, so no device ever stores the full attention matrix.

Ring Attention (Liu et al. 2023) organizes devices in a logical ring where each GPU holds a query chunk $\mathbf{Q}_i$ of length S/c and an initial key/value chunk $(\mathbf{K}_i, \mathbf{V}_i)$. Computation proceeds in c rounds along the ring. In each round, GPU i computes block attention between its stationary $\mathbf{Q}_i$ and resident $(\mathbf{K}_j, \mathbf{V}_j)$ tiles using an online softmax accumulator, while asynchronously transmitting $(\mathbf{K}_j, \mathbf{V}_j)$ to ring neighbor $(i+1) \bmod c$ and receiving $(\mathbf{K}_{j-1}, \mathbf{V}_{j-1})$ from $(i-1) \bmod c$.

For one sequence with standard multi-head attention, let $n = S/c$ be the tokens per chunk, d the total head width, s_{elem} the bytes per stored element, $R_{\text{peak}}\eta_{\text{hw}}$ the sustained attention FLOP/s, and BW_{link} the one-way transfer rate. Computing both $\mathbf{QK}^T$ and the weighted-value product costs approximately $4n^2d$ FLOPs, while sending $\mathbf{K}$ and $\mathbf{V}$ costs $2nd\,s_{\text{elem}}$ bytes. Ignoring startup, softmax, and overlap interference gives the necessary tile-size estimate:

$$\frac{4n^2d}{R_{\text{peak}}\eta_{\text{hw}}} \geq \frac{2nd\,s_{\text{elem}}}{\text{BW}_{\text{link}}} \iff n \geq \frac{s_{\text{elem}}R_{\text{peak}}\eta_{\text{hw}}}{2\text{BW}_{\text{link}}}$$

This compares computation time with transfer time; HBM bandwidth cannot substitute for $R_{\text{peak}}\eta_{\text{hw}}$. It is an idealized overlap condition, not a guarantee.

For an H100 sustaining half its dense FP16 peak with 2-byte elements, the condition requires chunks of at least about 1,100 tokens per device when KV tiles travel over NVLink, and about 9,900 tokens when they cross one NDR InfiniBand port. A million-token context split across a few dozen devices clears both bounds, whereas splitting a 32K context across many nodes can leave each chunk too short to hide its transfers.

Grouped-query attention changes the transferred KV width, and causal masking changes the tile work; both require recomputing the two costs. In causal autoregressive attention, upper-triangular tiles are masked out ($j > i$). A naive ring execution leaves half the GPUs idle during later rounds; production implementations employ zigzag or striped token partitioning, which gives each device a mix of early and late tokens (for example, one chunk from the start of the sequence and one from the end), so every device holds a similar share of the unmasked causal tiles.

DeepSpeed Ulysses (Jacobs et al. 2023) takes an alternative approach: rather than circulating tiles along a ring, it exploits the independence of attention heads. Each head attends over the whole sequence without reading any other head's scores, so the attention work can be split by heads instead of by tokens. Outside the attention core, activations are sharded along the sequence dimension (S/c tokens, all N_{heads} attention heads). Before computing self-attention, an All-to-All collective transposes the tensor from sequence-partitioned `[S/c, h, d_head]` to head-partitioned `[S, h/c, d_head]`. Each GPU now holds the full sequence length S, but only a subset N_{heads}/c of attention heads. Each device computes standard local FlashAttention across the full sequence for its heads;

each rank owns complete heads, while the kernel handles causal masking locally. A second All-to-All collective transposes the attention output back to `[S/c, h, d_head]`. Ulysses is conceptually clean and reuses single-GPU attention kernels, but requires that the head count be divisible by the context degree ($N_{\text{heads}} \geq c$). Under Grouped Query Attention (GQA), where the key-value head count H_{KV} is smaller, a direct head-sharding implementation requires compatible divisibility and $c \leq H_{\text{KV}}$. Replicating KV heads changes that limit and its communication budget.

A hierarchical configuration can combine head-sequence transposes within a fast domain and ring exchanges between domains. For an eight-device intra-node domain, a Ulysses group satisfies ($c_{\text{intra}} \leq 8$), while a second degree (c_{inter}) determines the ring's inter-node partition. In this example, Ulysses partitions heads locally and Ring Attention circulates KV blocks across nodes. The arrangement is feasible only if head divisibility, peak memory, link service time, and the overlap condition all hold; hierarchy alone does not prevent fabric saturation.

Expert parallelism (mixture of experts)

While tensor parallelism splits dense operations, expert parallelism distributes model capacity that is used selectively. In an MoE architecture (Shazeer et al. 2017), a feed-forward layer contains N_{experts} "experts" (independent feed-forward networks). A gating network selects a small subset, often top-1 or top-2, for each token. Increasing expert count while holding expert shape and the number selected fixed increases stored parameters without proportionally increasing expert FLOPs per token; routing and communication still add work.

In a distributed setting, experts are partitioned across workers, with each rank hosting a disjoint subset of expert networks. Figure 0.62 traces this token routing cycle across four ranks: after top-k_{experts} gating selects destination experts, an All-to-All dispatch shuffles tokens across the fabric to the hosting ranks, expert FFNs compute locally, and a second All-to-All return routes the processed activations back to the originating ranks to form the gate-weighted sum. The backward pass repeats both exchanges in reverse order: output gradients travel to the ranks hosting the experts, and input gradients return to the ranks that own the tokens.

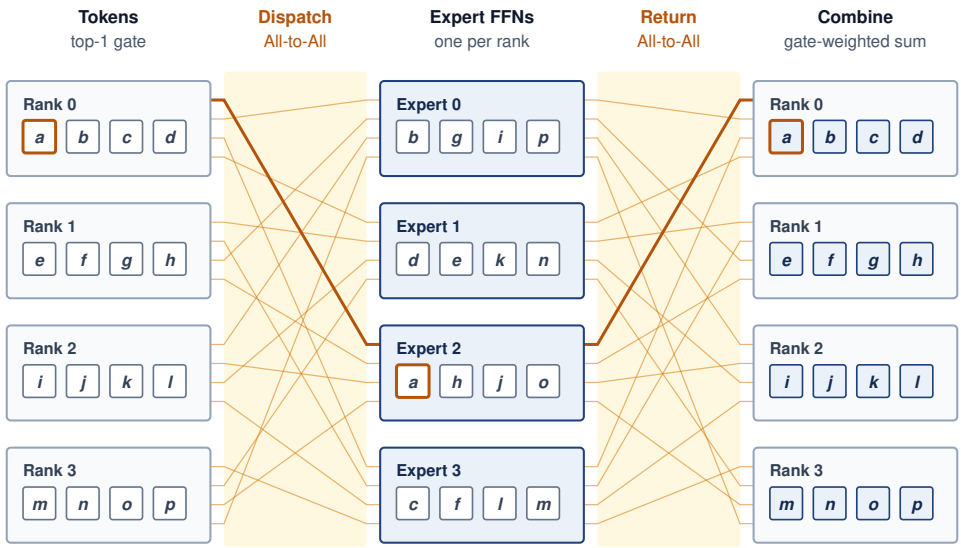


Figure 0.62: Mixture-of-experts (MoE) AllToAll routing: Expert parallelism on four ranks, one expert per rank, read left to right and drawn for top-1 routing with one token traced. Each rank's gate picks the top-k_{experts} experts for its tokens; the first All-to-All dispatches every token to the rank that hosts its expert, the experts compute, and a second All-to-All returns the results so each rank can form the gate-weighted sum for its own tokens. In both exchanges every rank may send to every other rank, which is why the pattern stresses the fabric's bisection bandwidth.

The primary advantage is decoupling model size from per-token compute, which lets parameter count grow within feasible hardware budgets. The constraint is the All-to-All communication, which is bandwidth-intensive and sensitive to load imbalance.

Definition 5.11: Expert parallelism

Expert parallelism is the distribution strategy for mixture-of-experts models that places different experts on different devices and routes each token's activations to the devices hosting its selected experts through All-to-All collectives, scaling total parameter count across the cluster without scaling the compute each token consumes.

1. **Significance**: It decouples model capacity from compute budget. For illustration, a trillion-parameter MoE model may activate on the order of 10B parameters per token, so per-token FLOPs remain near those of a 10B dense model while capacity grows roughly $100\times$. The price is communication structure: every MoE layer requires two All-to-All shuffles per pass (dispatch and combine) whose volume scales with tokens moved times hidden dimension, stressing the cluster's bisection bandwidth rather than any single link.
2. **Distinction**: Unlike tensor parallelism, which splits dense operations so that every device computes a fraction of every token, expert parallelism is conditional computation: each device computes only the tokens routed to its experts, making both the communication pattern and the load distribution data-dependent rather than fixed by the architecture.
3. **Common pitfall**: A frequent misconception is that experts share work evenly. A hot expert receiving, for example, 3–5$\times$ its uniform share can overflow its device's activation buffer while sibling devices idle. Capacity limits and routing penalties are possible responses; a design that retains every assignment must instead accommodate the resulting memory and scheduling demand.

All-to-All dispatch routes token activations to their assigned experts. Consider $N_{\text{experts}} = 64$ experts across 64 GPUs, processing a routing-group batch of $B = 4$ sequences of length $S = 2048$ and hidden dimension $d = 4096$. Under top-1 routing, $B \times S$ tokens each contribute one activation vector. At FP16, the logical dispatch payload is $B \cdot S \cdot d \cdot 2$ bytes, approximately 67 MB; returning expert outputs doubles the forward payload to about 134 MB per block. Local destinations reduce bytes crossing the network, multiple selected experts increase routes, and backward adds gradient transfers. The resulting service time depends on placement and load balance, including in Switch Transformer (Fedus et al. 2022) (up to 2,048 experts) and GShard (Lepikhin et al. 2021).

Uniform routing is a useful capacity baseline, not a guarantee. An expert receiving several times its uniform share, the hot expert of the definition above, needs correspondingly more token processing and activation storage. The actual skew depends on the learned router and batch. A hot expert can exhaust its buffer or delay the step while other experts remain underused, coupling memory feasibility to load balance.

One response bounds expert workload with a capacity factor C_{cap}. For top-1 routing, a capacity of roughly $C_{\text{cap}} \cdot (B \times S)/N_{\text{experts}}$ token assignments per expert provides headroom above uniform load. A dropping implementation sends excess tokens past that expert through the residual connection; implementations that retain every assignment instead need memory and scheduling to accommodate the imbalance. An auxiliary load balancing loss can encourage less concentrated routing. Models using more than one expert per token, such as Mixtral 8x7B with top-2 routing, require a capacity budget that counts all selected assignments rather than reusing the top-1 denominator unchanged.

Sparse routing gives MoE layers a coordination problem much like the sparse embedding exchanges of Archetype B (DLRM at Scale) in section 5. In both, which device a token's data must reach depends on the data itself, so load balance cannot be fixed in advance. MoE language models nonetheless remain Archetype A (GPT-4/Llama-3) workloads, because their dense layers still carry the tensor, pipeline, and data-parallel traffic developed above.

Pipeline bubble versus bandwidth dilemma

Model parallelism breaks the memory wall by choosing where to partition computation. Layer splits introduce pipeline bubbles, tensor splits require frequent collective reductions, and expert splits introduce All-to-All routing. The engineering challenge is balancing the idle time and communication created by the chosen partition.

Model parallelism offers three principal advantages. Memory scaling enables training of models that exceed single-device capacity: with 8-way tensor parallelism, the FP16 weight slice of a 175B model fits within A100 HBM before optimizer state and activation budgets are counted. Splitting the model also frees per-device memory for larger microbatches, since each GPU holds a smaller parameter slice. The approach maps naturally to the physical structure of transformers, where attention heads split via tensor parallelism and layers split via pipeline parallelism.

The advantages come at the cost of three fundamental limitations. Pipeline bubbles idle every stage for the fill and drain slots that the bubble fraction counts; holding that loss under 10 percent requires $m > 9(N_{\text{PP}} - 1)$ microbatches, at an activation-memory cost set by the schedule. Communication intensity in tensor parallelism is equally constraining. Two AllReduce operations per layer sit on the critical path, and for the GPT-3 shape at $N_{\text{TP}} = 8$ one microbatch's tensor-parallel traffic took about 2.7 s on one InfiniBand port against about 2.2 s of computation. That cost is why tensor parallelism is typically confined to a single fast domain such as an 8-GPU NVLink node. Implementation complexity rounds out the trade-off, requiring invasive changes to the model definition (replacing standard linear layers with column-parallel and row-parallel variants) unlike data parallelism, which wraps the model externally without modifying internals.

Hybrid Parallelism

The 175B running example has now exhausted each family on its own. Data parallelism with ZeRO-3 makes the state fit, but it regathers every layer's parameters across the data-parallel fabric on every step. On the reference cluster that regather is the 1.1 TB per worker per step priced in section 5, roughly 21 seconds on one NDR InfiniBand port against a compute window of about 2.1 seconds, so communication would take about 10× as long as the computation it serves. Tensor parallelism confined to one 8-GPU node, meanwhile, still leaves several hundred gigabytes of training state per device. The preceding strategies address different constraints and need not be used in isolation. Section 4 established how replication and state sharding distribute examples and storage; section 5 showed how partitioned operations and pipeline stages distribute computation. Hybrid design chooses the dimensions needed to satisfy memory, communication, and global-batch constraints together.

Hybrid parallelism applies both families orthogonally: model parallelism splits the architecture to fit available memory, while data parallelism scales throughput across multiple model replicas. Training a 175B parameter language model on a dataset of 300 billion tokens demonstrates this approach in practice. The neural network layers distribute across multiple GPUs through model parallelism, while data parallelism enables different GPU groups to process separate batches. This dual strategy addresses both memory constraints from model size and computational demands from dataset scale simultaneously, and it is precisely this combination that defines Archetype A training at large-model scale.



Lighthouse 5.2: Archetype A (GPT-4/Llama-3): Physics of 3D parallelism

Archetype A (GPT-4/Llama-3) illustrates the motivation for hybrid parallelism. Parameter count (P) must first be converted to a complete memory budget before comparison with device capacity (M_{device}), while dataset size (D) and the deadline determine the throughput target. Tensor parallelism partitions layer computations within a suitable communication domain; pipeline parallelism assigns consecutive layers to stages; and data parallelism distributes examples from D across replicas. A design combines the dimensions that address its constraints; efficient execution does not require all three in every case.

To see why the combination matters, consider three parallelism configurations for training the 175B model on a 1,024-GPU cluster organized as 128 nodes of 8 GPUs each. The progression from pure data parallelism through tensor and pipeline parallelism makes the efficiency gain concrete.

Configuration A: Pure Data Parallelism (DP-1024) is a communication counterfactual rather than a feasible placement for this model. The FP16 weights alone occupy 350 GB, so an A100 or H100 cannot replicate them; sharding only optimizer states does not change that fact. If replication were possible, all 1,024 ranks would form one data-parallel group, and each rank would participate in an AllReduce of the 350 GB gradient tensor across the InfiniBand fabric. The 15 percent calculation in section 5 isolates that communication cost.

Configuration B: TP-8, DP-128. Within each of 128 model replicas, 8 GPUs use tensor parallelism over NVLink. The corresponding tensor shard from every replica forms one 128-rank data-parallel group, so the layout contains 8 such groups. Each rank AllReduces its $1/8$ gradient shard, 43.75 GB rather than 350 GB, and TP communication remains within the fast NVLink domain. This is a communication comparison only. At 16 bytes per parameter each GPU would still hold about 350 GB of training state, so the layout also needs optimizer and gradient sharding across its data-parallel group before it fits. The inter-node AllReduce time drops from 14 seconds to approximately 1.75 seconds. If the compute time is still 2.1 seconds, the unoverlapped efficiency improves to about 54.5 percent. The smaller transfer also fits inside the compute window, so the same optimistic schedule assumed for the data-parallel baseline can now hide its full 75 percent of the transfer behind backward computation, which lifts efficiency to about 83 percent.

Configuration C: TP-8, PP-4, DP-32. Each of 32 model replicas uses 8-way tensor parallelism within a stage and 4 pipeline stages across nodes. For each of the 8×4 tensor-and-pipeline shard positions, the corresponding ranks from all replicas form one 32-rank data-parallel group. Each rank therefore AllReduces a $350/(8 \times 4) \approx 10.94$ GB gradient shard. Pipeline communication forwards activations between stages and has lower volume than a full-model AllReduce. The trade-off is the pipeline bubble: at the beginning and end of each training step, some pipeline stages are idle while waiting for activations from earlier stages or gradients from later stages. The bubble fraction is approximately $(N_{\text{PP}} - 1)/(m + N_{\text{PP}} - 1)$, so with 4 pipeline stages and 32 microbatches per training step, the bubble wastes roughly 9 percent of compute ($3/35 \approx 8.6\%$). The smaller shard takes about 0.44 seconds to AllReduce, and under the same overlap model as configuration B most of it hides behind backward computation. Charging the bubble against the compute window and adding the remaining exposed transfer gives a predicted efficiency of about 87 percent, a few points above configuration B's 83 percent. The pipeline cuts the data-parallel traffic by another factor of 4, and that saving slightly outweighs the bubble it introduces. Configuration C does not fit memory by itself either. Its training state is about 87.5 GB per GPU, above the 80 GB of an H100. Adding ZeRO-1 across its 32-rank data-parallel group closes that gap. Each GPU then keeps its tensor-and-pipeline slice of weights and gradients but only a $1/32$ share of that slice's optimizer state, about 24 GB in all, which leaves most of the HBM for activations and buffers. ZeRO-1 matches plain DDP's ideal data-parallel byte volume at matching communication widths (table 0.30), but equal bytes do not preserve the overlap schedule. Gradient reduction to owners must precede their optimizer updates, and the updated-parameter AllGather follows those updates. The predicted efficiency remains conditional on that schedule achieving the modeled exposed communication time. TP-8, PP-4, DP-32 with ZeRO-1 passes this simplified persistent-state memory budget; its reduction, update, and parameter-gather readiness must still be priced before accepting the throughput prediction.

Within this comparison's communication model, the configuration that places frequent tensor-parallel exchanges in the fast NVLink domain, pipelines across nodes, and leaves only small data-parallel gradient shards for InfiniBand has the best predicted efficiency. Peak memory, kernel shape, and scheduling still need verification before that prediction becomes a runnable design. *The infrastructure hierarchy dictates the parallelism hierarchy.* Here, hierarchy-aware parallelism means matching exchange requirements to measured communication domains rather than choosing each degree independently.

Definition 5.12: Hierarchy-aware parallelism

Hierarchy-aware parallelism is the strategy of mapping different parallel execution modes to the physical bandwidth tiers of the cluster.

1. **Significance**: It places high-frequency synchronization (for example, tensor parallelism) on fast links such as NVLink, while assigning lower-frequency exchanges (for example, data parallelism) to slower tiers when their transfers fit the schedule. This alignment can improve scaling efficiency (η_{scaling}) by reducing exposed communication time (T_{comm}) and latency (L_{lat}); the gain depends on readiness, contention, and available overlap.
2. **Distinction**: Unlike uniform parallelism, which treats all node-to-node links as equal, hierarchy-aware strategies respect the bandwidth cliffs between die, node, and rack boundaries.
3. **Common pitfall**: A frequent misconception is that any model can be sharded across any number of nodes. In reality, if the hierarchy mapping is wrong (for example, sharding a large tensor across a slow inter-rack link), the communication time will dwarf the compute time, making the scale-out useless.

The dependence runs both ways: a parallelism configuration also determines which traffic the fabric must carry. In the TP-8, PP-4, DP-32 layout, tensor reductions stay within each fast local domain, pipeline traffic crosses neighboring stages, and data-parallel groups synchronize corresponding shards across replicas. Rail-optimized and hierarchical fabrics can exploit that structure, but a workload mix that adds expert All-to-All traffic changes the global bandwidth requirement. Infrastructure planning must therefore evaluate the anticipated communication groups together rather than optimizing the fabric for a single layout.

↩ Rail-optimized fabrics, which cable each GPU slot position to its own rail switch, are established in section 8.

The 3D training loop

The following layout trains a 175B-parameter model using 3D parallelism, the coordinated composition of data, pipeline, and tensor parallelism introduced with figure 0.50, across thousands of devices. This approach composes the strategies geometrically to match the physical topology of the hardware. The example traces their interactions; parameter count alone does not require all three dimensions.

Consider a training fleet configured with tensor parallelism (TP) of 8 GPUs, pipeline parallelism (PP) of 16, and data parallelism (DP) of 128. This configuration uses 16,384 GPUs (8 GPUs $\times$ 16 $\times$ 128) organized into a hierarchy of bandwidth domains, sixteen times the 1,024-GPU reference cluster so that every level of the hierarchy is exercised.

The training step begins at the data-parallel level. Each of the 128 model replicas receives a distinct slice of the global batch. Within each replica, the model is split across 16 pipeline stages (nodes), with microbatches flowing sequentially from the embedding layer on Node 0 to the loss calculation on Node 15. At the finest granularity, within each node, the 8 GPUs fuse into a single "super-accelerator" via TP. The transformer matrix multiplications are split across these devices; column- and row-parallel pairs retain local intermediate shards and exchange partial results at the reduction points already derived. For a 175B-scale hidden dimension, the activation payload is roughly 201.3 MB; the resulting tensor-parallel traffic is about 4.2 GB per pipeline stage per microbatch in the forward pass, or 8.5 GB including the backward pass. Across the full 96-layer replica, the forward tensor-parallel traffic is about 67.6 GB. This traffic is the highest-intensity in the system, but its exposed latency can remain small relative to compute because the chips communicate over 300 GB/s–450 GB/s of local bandwidth per direction.

The backward pass exposes dependencies between parallelism dimensions. Nodes exchange activation gradients point-to-point, roughly 201.3 MB per microbatch per stage boundary in this example. A smaller payload still stalls a stage if it arrives after the stage needs it. Data-parallel synchronization creates another dependency: although full-model gradients occupy about 350 GB, each data-parallel group exchanges only the corresponding tensor- and pipeline-parallel parameter shard. Gradient bucketing groups ready gradients as backward computation proceeds. Which

exchange limits the step depends on its readiness, service time, and overlap; data parallelism is not necessarily the final bottleneck.

The architectural imperative is *bandwidth matching*: each exchange's startup and transfer time must fit its available compute or overlap interval. In this mapping, frequent TP exchanges use the NVLink domain (300 GB/s per direction or higher), while PP transfers cross nodes and DP reductions overlap backward computation. Accumulation can enlarge the compute interval between DP synchronizations, subject to the global-batch constraint. An infeasible mapping leaves part or all of the 16,384 GPUs fleet waiting. Comparing service time with the schedule completes the feasibility check introduced in section 4.

Hybrid-parallelism worked example

Applying this bandwidth-matching principle to physical infrastructure transforms cluster design into a placement problem: each parallelism dimension must sit on the network tier that can tolerate its traffic. Tensor parallelism is the most latency-sensitive because it launches frequent AllReduce operations inside transformer blocks, so it favors the fast NVLink domain, intra-node in this example, at 300 GB/s–450 GB/s per direction. Pipeline parallelism moves activation tensors only at stage boundaries, so it can span nearby nodes over InfiniBand (50 GB/s–100 GB/s). Data parallelism produces the largest payload, the gradient synchronization, but it occurs once per step and can be overlapped with backward computation. Memory capacity per device (80 GB–80 GB) sets the hard limit for every placement.

For the 3D training loop's layout on 16,384 GPUs, built from 8-GPU NVLink nodes, this reasoning leads to a concrete placement. Fix tensor parallelism at $N_{\text{TP}} = 8$ so the bandwidth-heavy matrix-multiplication collectives stay within one 8-GPU node. Map pipeline parallelism across nodes in the same high-bandwidth rack or island, here $N_{\text{PP}} = 16$, with $N_{\text{PP}} = 8$ as the alternative when the per-device memory budget allows. Use data parallelism for the remaining scale-out dimension across pods. The result is not a generic rule but a consequence of matching each traffic pattern to the cheapest fabric tier that can carry it.

With the placement fixed, the next question is whether the static model state fits inside each accelerator's HBM budget.

The memory budget for a 175B model must include every persistent training component. Under the mixed-precision Adam convention used here, each parameter has FP16 weights and gradients, an FP32 master weight, and two FP32 optimizer moments, totaling 16 bytes before activations and workspaces. With tensor parallelism degree 8 alone, these components occupy 350 GB per device, exceeding H100-class capacity. Adding 16 pipeline stages spreads that state across the product of the two degrees, yielding 21.9 GB per device under even partitioning. A budget that counts only weights and optimizer moments, about 13.7 GB per device here, understates this total. Activation peaks, layer imbalance, and communication workspaces must fit in the remaining memory before this configuration is feasible.

Once the configuration fits in memory, the same layout has to satisfy the communication hierarchy that motivated it. Each parallelism dimension imposes a distinct traffic profile on the network. Tensor parallelism is the most chatty, requiring two `AllReduce` operations for every transformer block (one for the attention projection, one for the MLP) in both the forward and backward passes. These repeated messages expose both collective startup latency and payload-transfer time; their placement requires the fast communication domain used by the tensor-parallel group. Pipeline parallelism, in contrast, involves point-to-point transfers of activation tensors (size $B_{\text{micro}} \times S \times d$) only at the boundaries of the pipeline stages. While these messages are moderate in size, they occur less frequently, making them manageable over standard InfiniBand links. Data parallelism synchronizes matching tensor-and-pipeline shards across replicas. The full gradient buffer is 350 GB, but each data-parallel group reduces only its corresponding shard; no rank in this hybrid layout AllReduces the full buffer. Each shard is synchronized once per global batch update. Gradient bucketing can overlap this transmission with independent backward computation once each bucket is ready. The exposed cost depends on both available fabric bandwidth and the remaining computation window before the optimizer needs the reduced shard.

The last cost is not bandwidth but scheduling: a pipelined model is only efficient when enough microbatches are in flight to keep all stages busy. This remaining cost is the pipeline bubble developed

in section 5. Applying its bubble fraction $\frac{N_{\text{PP}}-1}{m+N_{\text{PP}}-1}$ to this hybrid layout, $N_{\text{PP}} = 16$ stages with $m = 32$ microbatches waste $\frac{15}{47} \approx 31.9\%$ of theoretical compute capacity, nearly one-third, against roughly 9 percent for configuration C's 4 stages at the same microbatch count. The deeper pipeline is chosen at this scale for two reasons. Sixteen stages spread the full training state to about 21.9 GB per device without optimizer sharding. Filling 16,384 GPUs with configuration C's 32-GPU replicas would instead need four times as many data-parallel replicas, which multiplies the global batch $N_{\text{DP}} \times m \times B_{\text{micro}}$ by four at the same per-replica schedule. The shallow pipeline spends global batch; the deep one spends bubble. The 1F1B scheduling that reclaims activation memory, and the larger microbatch counts it makes practical, drive the bubble fraction down asymptotically, but every added microbatch also enlarges the global batch, so the bubble target must be reconciled with the critical-batch constraint from section 5.

Blackwell-class scaling example

The Blackwell reference illustrates how a wider fast communication domain changes 3D parallelism choices. NVLink 5 provides 1.8 TB/s of bidirectional bandwidth per GPU, twice the Hopper reference's capacity. Higher bandwidth reduces the transfer term for a fixed payload; it does not by itself reduce message startup latency. Larger tensor-parallel (N_{TP}) groups, such as $N_{\text{TP}} = 16$ or $N_{\text{TP}} = 32$ across nodes, remain subject to topology and local-kernel efficiency. Blackwell's FP4 support adds a separate numerical choice whose training use depends on the validated recipe and software stack.

Because a wider fast domain matters most for a model larger than the 175B reference, consider a 1 trillion-parameter model. One candidate uses $N_{\text{TP}} = 16$ across two 8-GPU nodes joined by NVLink Switch and $N_{\text{PP}} = 8$. Relative to the Hopper reference's $N_{\text{TP}} = 8$ and $N_{\text{PP}} = 16$, this preserves the model-partition product while halving stage count. The bubble must be recomputed from the new stage and microbatch counts rather than assumed to halve. The 10 TB/s internal link joins Blackwell's two dies behind one logical GPU; those dies are not separate software tensor-parallel ranks. The general lesson is that improving local bandwidth shifts pressure outward. Once intra-node exchanges bind less, the inter-node fabric that carries pipeline and data-parallel traffic, rail-optimized topology, and expert All-to-All service become the terms to evaluate, so the full placement still needs checking against the next tier.

The same placement constraints can be made operational through design-space search.

Example 5.2: Automated design space search

Scenario: An engineering team schedules a 175B-parameter model across 8,192 H100 GPUs (80 GB HBM each), eight times the 1,024-GPU reference cluster so that the pipeline and data-parallel degrees both have room to vary, navigating the multi-dimensional 3D-parallelism search space (TP $\times$ PP $\times$ DP).

Diagnosis: Candidate configurations must fit within 80 GB HBM and satisfy the modeled communication budget. The search evaluates TP $\times$ PP $\times$ DP factorizations and selects TP=8 GPUs, PP=8, and DP=128 as the best predicted MFU among configurations feasible under its assumptions. That result is a candidate for measurement, not proof of the best attainable runtime.

Systems lesson: This search favors TP=8 GPUs within the reference topology's fast domain and PP=8, with 36.4 percent projected MFU. The result balances memory, local computation, transfers, and pipeline idle time within the model. A different topology, microbatch schedule, or kernel efficiency can change the preferred factorization.

Adjusting any one dimension shifts the pressure onto the other two, making the factorization TP $\times$ PP $\times$ DP a tightly coupled system rather than three independent knobs.

Checkpoint 5.4: Hybrid 3D parallelism

Verify your understanding of how parallelism strategies combine:

- ☐ **Dimension roles**: identify which dimension in a TP=8, PP=16, DP=128 configuration partitions operations within each layer inside one node.
- ☐ **Bubble vs. depth**: determine how moving from PP=16 to PP=8 changes the pipeline bubble fraction.
- ☐ **DP vs. PP**: explain the trade-off, with the budget fixed at that layout's 16,384 GPUs, between increasing DP (data parallelism) and increasing PP (pipeline parallelism).
- ☐ **Latency sensitivity**: identify which dimension, TP, PP, or DP, is most sensitive to inter-node latency.

A projected MFU needs comparison with measured execution. Figure 0.63 places reported MFU from 2020–2024 systems against an illustrative 50 percent reference line. GPT-3's 21 percent and PaLM's 46 percent describe different hardware and workload configurations; their difference does not isolate the effect of parallelism or overlap. Llama 3's reported result at 16,384 H100 GPUs (41 percent) is lower than at 8,192 GPUs (43 percent). Interpreting that change requires the batch, configuration, precision convention, and measurement window alongside device count.

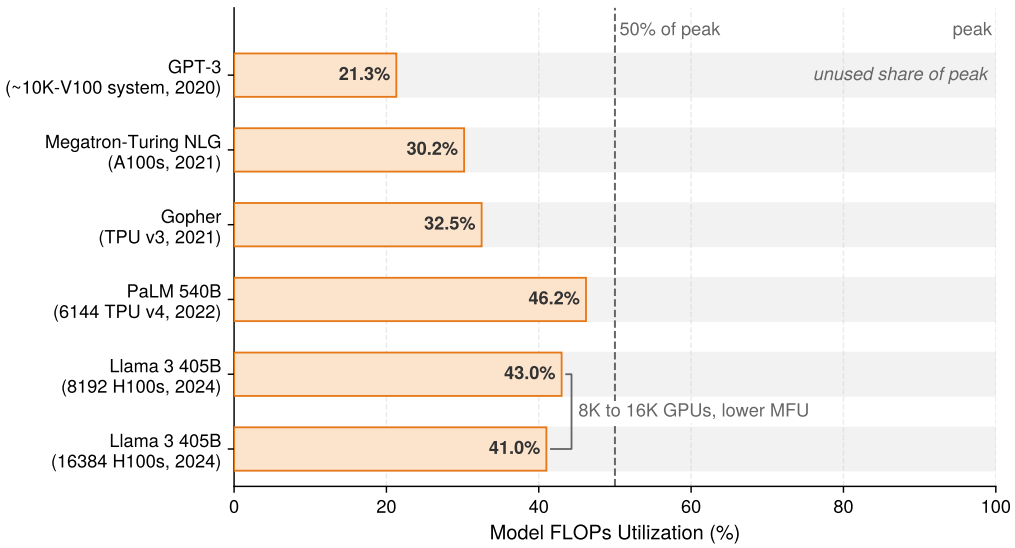


Figure 0.63: The MFU progression: Model FLOPs Utilization across published training systems, ordered chronologically. Reported MFU rises from 21 percent (GPT-3, 2020) to 46 percent (PaLM, 2022), with later illustrated runs near 40–45 percent. These systems differ in hardware and workload, so the comparison does not isolate the effect of parallelism or overlap. The Llama 3 data points show lower reported MFU at the larger scale: MFU drops from 43 percent at 8,192 GPUs to 41 percent at 16,384 GPUs. Interpreting the difference requires the batch, execution configuration, and measurement convention. Data sources: Chowdhery et al. (2022), Dubey et al. (2024).

The three configurations and the worked layout tell one story. Pure data parallelism moves the full 350 GB gradient over the slowest tier and reaches only 15 percent scaling efficiency. Keeping tensor parallelism inside the NVLink domain cuts each rank's share of that traffic by the tensor-parallel degree, and pipeline stages cut it again at the price of a bubble. Communication alone does not make a layout feasible, however. Each layout must also hold the full training state, which is why configurations B and C still need optimizer sharding and why the worked layout adds pipeline depth until the persistent state falls to about 21.9 GB per device. Hybrid parallelism is therefore the joint solution of a memory constraint, a bandwidth hierarchy, and a batch-size limit, and every axis added to satisfy one of them tightens another. Alignment training tests that joint solution hardest,

because it asks one fleet to host several models with different memory and compute profiles at the same time.

Multi-Model Training for Alignment and RLHF

Reinforcement learning from human feedback (RLHF) extends the placement problem beyond one training model. The proximal policy optimization (PPO) example developed here generates responses, scores them with a preference-trained reward model, constrains policy drift against a reference, and uses value estimates to guide updates. These roles have different memory and compute requirements and need not run simultaneously. Direct preference optimization (DPO) provides a useful comparison because its standard offline form removes online generation and separate reward and value models. The engineering question is how the chosen learning procedure determines which state and work must coexist on the fleet.

The multi-model coordination problem

The single-model pretraining baseline becomes a multi-role loop in PPO (Schulman et al. 2017), as used in InstructGPT-style systems (Ouyang et al. 2022). Table 0.34 separates policy, reference, reward, and value roles by execution mode and memory burden. In figure 0.64, the policy π_θ generates responses for scoring by the frozen reference and reward models and evaluation by the value model M_{value}. The penalized reward ($r - \beta_{\text{KL}}\,\text{KL}$) subtracts a Kullback–Leibler divergence penalty, weighted by a coefficient β_{KL} unrelated to link bandwidth β, to discourage drift from the reference. Generalized advantage estimation (GAE) combines rewards and value estimates to judge how much better a response was than expected. Those estimates guide policy updates; the value model learns to predict returns, the cumulative discounted reward that follows each generated token. Reference and reward models remain forward-only in this loop, and shared-backbone implementations can combine roles without changing their distinct responsibilities.

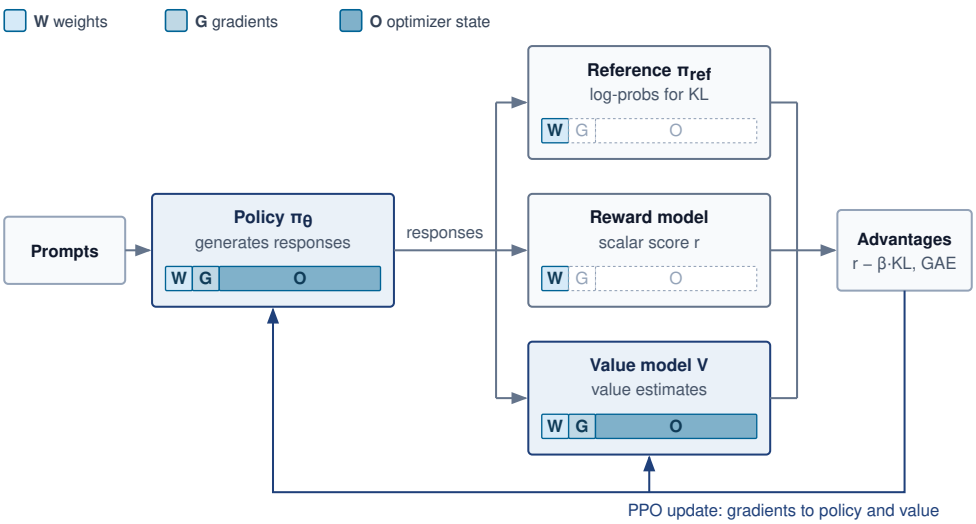


Figure 0.64: One PPO-style RLHF step: The policy generates responses to a batch of prompts. The frozen reference model supplies log-probabilities for the KL penalty, the frozen reward model supplies a scalar score, and the trained value model supplies value estimates. The penalized reward and value estimates form advantages, which update the policy and value models. Blue cards carry gradients and optimizer state; slate cards run forward passes only and hold weights alone, as each card's weight, gradient, and optimizer-state strip shows; strip widths follow the 2, 2, and 12 bytes per parameter of mixed-precision Adam, unlike the equal-width columns of figure 0.55. That asymmetry drives placement.

Table 0.34: RLHF Model Coordination Roles: PPO-style RLHF coordinates models with different execution modes and memory footprints, so placement decisions must separate trainable policy and value state from inference-only reference and reward state.

Model	Role in PPO-style RLHF	Execution mode	Memory burden
Policy Model	The model being aligned and optimized.	Training mode with gradients, optimizer moments, and activations.	For a 70B-parameter model in mixed precision with Adam, memory is approximately 70B $\times$ (2 + 2 + 12) = 1,120 GB, the same budget as standard pretraining.
Reference Model	A frozen copy of the pretrained policy that supplies the KL-divergence penalty.	Inference mode only.	FP16/BF16 parameters without gradients or optimizer state; a 70B model needs about 70B $\times$ 2 = 140 GB, roughly 8× less than the training configuration.
Reward Model	A preference-trained scorer that produces scalar rewards for generated sequences.	Inference mode only.	Often smaller than the policy; a 13B reward model requires approximately 26 GB in FP16, but it must process every generated sequence.
Value Model	The PPO critic that estimates expected future reward.	Training mode, either separate or sharing a policy backbone.	A full-size separate critic can add another 1,120 GB; smaller models or shared-backbone designs reduce this to 200–400 GB.

The aggregate memory demand of the four-model PPO system dwarfs standard pretraining. A naive co-location of a 70B policy, 70B reference, 13B reward, and 13B value model requires approximately 1,494 GB of accelerator memory, before accounting for the KV caches and intermediate activations generated during sequence generation. A key-value (KV) cache stores attention keys and values for previously processed tokens so the policy can generate the next token without recomputing that state. It grows with the number and length of active sequences, creating a temporary memory budget distinct from weights and optimizer state. On H100 GPUs with 80 GB of HBM each, this system requires a minimum of 19 GPUs as an aggregate static-state capacity lower bound, including optimizer state and gradients. This division does not establish a feasible placement: each phase must also fit its KV or activation peak, workspaces, and uneven shards. Replicated policy groups increase the total state further.

Infrastructure asymmetry between training and inference models

The defining infrastructure challenge of RLHF is not the *total memory footprint* but the *asymmetry* between the models' compute profiles. The policy and value models require full backward passes with gradient computation, activation checkpointing, and optimizer updates, compute-intensive operations that benefit from tensor parallelism and high arithmetic intensity. The reference and reward models, by contrast, perform only forward passes over generated sequences. Their scoring passes do not require optimizer state, and they need not decode token by token. The policy's rollout phase creates the autoregressive generation workload and its KV-cache budget. Separating scoring from generation matters because forward-only execution does not imply a single memory or compute profile.

The asymmetry creates a placement dilemma. Co-location permits devices to serve different phases, but inactive model state can occupy memory needed for the active phase. Dedicated pools allow each role to use a suitable execution configuration, but pools may idle while waiting for another role's output. Separation also adds transfers of generated sequences, scores, and updated policy weights. The design must compare phase utilization and data movement rather than assume that either placement eliminates waste.

The PPO rollout phase introduces autoregressive dependencies absent from the teacher-forced pretraining baseline. The policy generates responses before sequence-level rewards guide its updates. At small active batches, decoding is often memory bandwidth bound because each new token requires another model pass. For a Llama-2-70B-style grouped-query attention policy, KV storage grows by approximately $m_{\text{token}} = 2N_L H_{\text{KV}} d_{\text{head}} s_{\text{elem}}$ per cached token per sequence. With 80 layers, 8 KV heads, 128-dimensional heads, 1,024 generated tokens, and 256 active sequences, the generated-token portion occupies 85.9 GB, or $2 \times 80 \times 8 \times 128 \times 1024 \times 256 \times 2$ bytes. Dense multi-head

attention using the full 8,192 hidden width for K and V would require 687.2 GB for that portion. Even with grouped-query attention, that portion alone already exceeds the 80 GB of HBM on one H100, and prompt tokens add KV state as well. This temporary cache must fit alongside the state live during rollout; its lifetime differs from training activations and optimizer state.

RLHF systems address this asymmetry through temporal multiplexing. During the generation phase, the cluster behaves like an inference system: the policy model generates sequences while the reference model computes log-probabilities, and the dominant resource is HBM reserved for token-by-token attention state. During the training phase, the same fleet switches back to training mode: gradients are computed through the policy and value models using the 3D parallelism configuration developed in section 8. During generation, batching active sequences and placing their KV state determine how much useful work shares each weight read. During the update phase, activation residency and gradient synchronization again govern the schedule. RLHF is not one steady training loop, but an alternation between inference-shaped work and training-shaped work, and standard training frameworks rarely manage that transition by themselves.

Direct preference optimization in the fleet

Standard offline DPO (Rafailov et al. 2023) removes the separate reward and value models from the update loop by reformulating alignment as a loss over preference pairs. The policy learns from preferred and dispreferred responses using their log-probabilities relative to a frozen reference. Because those responses are already in the training data, the update requires neither online generation nor advantage estimation.

A DPO implementation that retains a resident reference has two model roles: the trainable policy and the frozen reference. For the 70B policy with 13B reward and value models used in section 8, static state falls from about 1,494 GB to 1,260 GB, a 16 percent reduction. Against a policy-sized PPO value model, it falls from 2,406 GB to 1,260 GB, or roughly 48 percent. These are configuration-specific state budgets. For fixed preference pairs and a fixed reference, reference log-probabilities can instead be precomputed, removing that model from the repeated update loop. Offline DPO needs no autoregressive rollout during those updates. Variable lengths still require padding, packing, or length-aware batching, and policy training can use the same partitioning, accumulation, and overlap mechanisms as pretraining.

The trade-off is how training obtains new feedback. Standard offline DPO learns from a fixed preference dataset, so the policy cannot try new responses and receive feedback on them during training. PPO-style training generates responses from the evolving policy and scores them, so the policy can improve on its own outputs and expose behavior the original dataset lacks, provided the reward signal is reliable. When the preference data already covers the target distribution, DPO's fixed-data loop usually wins on infrastructure. When training must discover behavior beyond the dataset, as in training models on novel reasoning tasks, PPO's online loop can justify the reward and value models, the generation phase, and the memory they occupy. The decision is settled by achieved quality per unit of total resource cost, not by either property alone.

Resource requirements for PPO versus DPO

To make the infrastructure trade-off concrete, consider aligning a 70B policy model using a policy/reference pool of 256 H100 GPUs (80 GB HBM each). PPO's separate reward and value pools sit outside that allocation. The policy is a 70B-class model rather than the 175B reference, a size at which each role's memory budget stays readable while the four PPO roles together still need at least 19 GPUs, more than one node.

> Napkin Math 5.9: RLHF infrastructure budget: PPO vs. DPO
>
> **Problem**: This alignment setup co-locates a 70B policy model with a 70B reference model and, for PPO, uses pools outside the 256-GPU policy/reference allocation for a 13B reward model and a 13B value model. Under 3D parallelism (TP=8 GPUs, PP=4, DP=8), how much memory resides on each policy GPU, and which separate model pools and generation-phase memory requirements does DPO remove?

PPO memory budget (per-GPU, with TP=8 GPUs, PP=4, DP=8 for policy)

The policy model under 3D parallelism with TP=8 GPUs and PP=4 distributes one replica's 1,120 GB training state across 32 GPUs, yielding 35 GB per GPU. The reference model, requiring only 140 GB for inference, can instead be sharded across an additional 8 GPUs pool outside the policy allocation at 17.5 GB each, or co-located with the policy GPUs at an additional 4.4 GB per GPU (140 GB / 32 GPUs). The 13B reward model adds 26 GB shared across its pool. The 13B value model in training mode adds approximately 208 GB (13B $\times$ 16 bytes/param) across its pool.

Total static memory (one co-located policy + reference replica on 32 GPUs): 35 GB + 4.4 GB $\approx$ 39.4 GB per GPU, leaving $\sim$ 46.5 GB for activations and KV cache. With generation-phase KV caches for a rollout batch containing 256 sequences and 1,024 tokens inside one $TP \times PP$ policy replica, each policy GPU must reserve an additional 85.9 GB/32 GPUs $\approx$ 2.7 GB for its KV cache shard. The remaining $\sim$ 43.8 GB is generation-phase headroom. Once rollout KV state is released, the update phase recovers the 46.5 GB headroom before allocating training activations and other runtime buffers. The phase peaks must be evaluated separately.

DPO memory budget (same parallelism configuration)

The policy model uses the same 35 GB per GPU. The reference model adds 4.4 GB per GPU (co-located). No reward model, no value model, no KV cache for generation.

On the policy GPUs, total static memory is 35 GB + 4.4 GB = 39.4 GB per GPU, identical to PPO's co-located policy/reference footprint. Both have 46.5 GB available before update-phase activations and runtime buffers when PPO releases its rollout KV cache. DPO removes the separate generation peak and the reward/value model pools; the absence of rollout KV state alone does not establish larger update microbatches.

Throughput comparison

PPO alternates generation and parameter updates. If generation consumes 60 percent of an iteration in this illustrative schedule, updates occupy the remaining 40 percent; this time fraction is not MFU. Update-phase MFU must be multiplied by that fraction to report update computation over the whole iteration, using the same allocated hardware denominator. DPO eliminates online generation, but its measured throughput still depends on sequence lengths, reference scoring, parallelism, and memory use. Table 0.35 separates the static-state comparison from these schedule-dependent effects.

Table 0.35: PPO vs. DPO state and execution phases: Static-state totals sum one copy of each model across its device pool, including trainable optimizer state and gradients. Data-parallel replication and phase-specific runtime allocations add to these totals; the table does not determine a minimum device count or measured MFU.

Metric	PPO (70B policy)	DPO (70B policy)
Models required	4 (policy, ref, reward, value)	2 (policy, reference)
Static state, one copy of each model	∼ 1,494 GB	∼ 1,260 GB
Device count	Depends on placement and phase peak	Depends on placement and activation peak
Generation phase	Yes (autoregressive)	None
Update throughput	Shares the schedule with generation	No online-generation phase
Data pipeline	Online generation	Static preference pairs

Systems insight: In this 13B reward/value-model scenario, DPO reduces the one-copy static-state budget by 15.7 percent by eliminating the reward and value models. It also removes online generation, but the throughput benefit requires a measured schedule. The choice between PPO and DPO is governed by infrastructure constraints as much as modeling preferences: organizations with limited GPU budgets may prefer DPO because it restores the workload to a fixed-data training loop. If the PPO value model is policy-sized rather than 13B, the memory reduction approaches the larger 2,406 GB to 1,260 GB comparison discussed in section 8.

Sequence length variance and batching challenges

PPO and DPO make variable sequence length a prominent scheduling concern. Pretraining often packs documents into fixed-length blocks, such as 2,048 or 4,096 tokens, although variable-length workloads also occur. Alignment batches combine prompts and responses whose lengths can differ substantially; an illustrative batch can span a 10–50× length range. Those lengths determine activation residency, padding, and work assigned to each worker.

Length variance creates two interacting problems. Padding every sequence to the longest in a batch can leave most token positions unused. A batch of one 2,048-token sequence and fifteen 128-token sequences, padded to 2,048 tokens, fills only 3,968 of its 32,768 positions, so kernels that execute padded positions spend about 88 percent of their work on padding; kernels that skip them recover most of that waste. Dynamic batching groups similar lengths to reduce padding, but assignments across workers still need balancing. A worker processing longer sequences can have a larger activation peak and finish later, leaving other workers waiting for the required gradient contributions.

Sequence packing combines short sequences within a fixed-length input, with attention masking that keeps their contexts separate. Adaptive microbatching varies the number of sequences according to token count or a predicted memory budget. Both techniques also appear in pretraining; alignment adds the need to preserve response boundaries and the chosen preference or policy objective. Workers need not process equal token counts for a correct reduction. A token-mean PPO loss weights local means by valid-token counts, whereas standard DPO averages over preference pairs and uses pair counts (Rafailov et al. 2023). Packing changes layout, not that denominator. Unequal lengths can still create load imbalance, so balancing work remains a performance goal even when weighted reduction preserves the estimator.

RLHF is therefore not a detour from parallelism strategy; it is the case that shows why no strategy is sufficient by itself. The policy model may need tensor and pipeline parallelism, the reference and reward models behave like inference services, the value model may require training state, and the rollout data pipeline changes shape from step to step. With that stress test in view, the final comparison can return to the general engineering question: identify the binding constraint first, then choose the parallelism pattern that moves the least data while fitting the required state.

Parallelism Strategy Comparison

A parallelism strategy is useful only if it moves the binding constraint without creating a larger one. Assembling data, tensor, pipeline, and hybrid partitioning into a coherent decision procedure requires evaluating where each strategy relocates the execution tax across the cluster's memory and interconnect hierarchy. For a new model, the decisive questions are which memory state fits, how often communication occurs, where the pipeline bubble appears, and which abstraction cost the engineering team can tolerate.

The canonical 3D core does not exhaust the partitioning space. Sequence parallelism accompanies tensor parallelism by partitioning along the sequence dimension the activations for operations such as layer normalization and dropout that tensor parallelism would otherwise replicate (Korthikanti et al. 2023). Context parallelism instead partitions a long attention context and exchanges key/value blocks or partial attention state across ranks (Liu et al. 2023). Expert parallelism partitions sparse feed-forward capacity and routes token activations to the selected experts. Table 0.36 places these extensions beside the 3D core without pretending they are independent of its batch, memory, and topology constraints.

Table 0.36: Parallel Training Strategies: Data, tensor, and pipeline parallelism form the canonical 3D core. Sequence/context parallelism extends the partition along token positions, while expert parallelism extends it across sparse model capacity. Strategy selection remains an engineering feasibility test: identify the binding constraint, the communication primitive it creates, the placement decision it forces, and the measurement that proves the strategy is helping.

Strategy	Binding constraint	Primary movement	Placement decision	Validation signal
DDP	Model state fits on one accelerator	AllReduce gradients every step	Replicate full model across data-parallel workers	Step time dominated by compute, not synchronization
FSDP/ZeRO	Model state exceeds one accelerator	Gather parameters; reduce-scatter gradients	Size prefetch and reshard windows within peak memory	State plus activations and workspaces fit
Tensor parallelism	One layer or tensor operation exceeds local capacity	Reduce or gather partial layer results	Keep tightly coupled partitions on fast local links	Exposed collective time fits the layer-time budget
Pipeline Parallelism	Layer stack fits only when split by stage	Activations and gradients between stages	Balance stages and live microbatch activations	Bubble and peak activation memory meet budget
Sequence/context parallelism	Activations or attention context exceed local capacity	Exchange sequence shards or attention state	Partition long sequences across a low-latency group	Longer context fits without communication dominating
Expert parallelism	Sparse expert capacity exceeds local memory	Route token activations with AllToAll	Balance expert load across a high-bisection group	Expert imbalance and dropped-token rate stay bounded
Hybrid parallelism	More than one constraint binds at once	Multiple collectives on coupled axes	Satisfy divisibility, batch, topology, and failure domains	MFU improves within memory and network budgets

Figure 0.65 sketches candidate choices from memory fit and execution structure. Its single-device branch asks whether throughput and input delivery meet the target; the complete dataset need not reside in accelerator memory. Layer depth, an oversized operation, and replicated state suggest pipeline, tensor, and sharded data parallelism respectively, subject to the feasibility tests in table 0.36. A 3D layout ($TP \times PP \times DP$) combines these choices when needed. Before accepting any branch, check peak memory, global batch, communication service time, and load balance together; bandwidth is a feasibility constraint throughout the decision, not an afterthought.

The table and flowchart are intentionally coarse, but their purpose is precise: identify the binding constraint before choosing the implementation stack.

Throughout this chapter, the partitioning strategies were developed directly for dense large-model training and recommendation-style workloads. Table 0.37 also shows how the same constraint logic reaches the federated edge case, where the bottleneck shifts from accelerator memory and fabric bandwidth to unreliable devices, privacy, and intermittent connectivity.

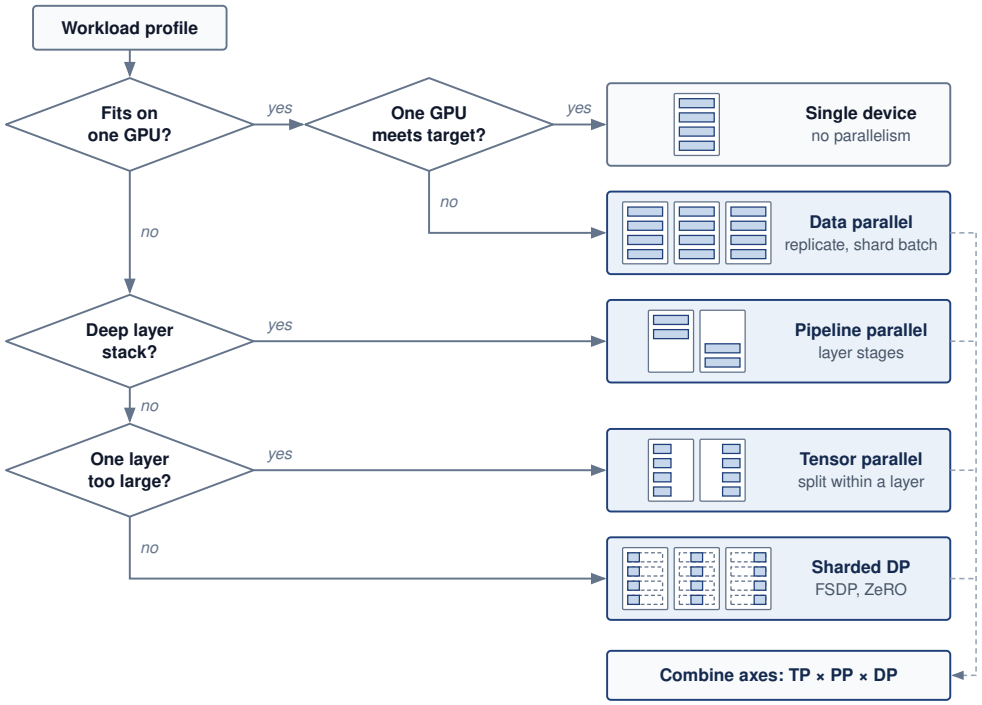


Figure 0.65: Parallelism strategy decision framework: A selection guide that begins with memory fit. For a model that fits on one device, evaluate data parallelism against the throughput target and input-delivery budget; the complete dataset need not fit in accelerator memory. A model that does not fit is routed by the structure that breaks the budget, with sequential depth leading to pipeline parallelism, an oversized single layer to tensor parallelism, and otherwise sharded data parallelism (FSDP/ZeRO). Combine parallelism axes when the workload requires them. Peak memory, global batch, bandwidth, and workload imbalance constrain every candidate.

Lighthouse 5.3: Distributed archetype spectrum

Partitioning and coordination choices differ with the system's primary bottleneck:

Table 0.37: Partitioning strategy by archetype: Partitioning and coordination choices differ with the dominant bottleneck.

Archetype	Primary Partitioning Strategy	The Logic
Archetype A (GPT-4/Llama-3)	Hybrid 3D Parallelism	Combine Tensor (width), Pipeline (depth), and Data (throughput) to fit roughly 3.5 TB of weights under third-party estimates (OpenAI has not disclosed the parameter count).
Archetype B (DLRM at Scale)	Embedding Sharding	Partition massive 10 TB+ tables across parameter servers or accelerator shards; use sparse AllToAll updates.
Archetype C (Federated MobileNet)	Federated Learning	The same logic extends to coordinating on-device MobileNet updates across unreliable, privacy-constrained edge devices; section 14 develops this regime.

A configuration chosen this way still has to be expressed in software, and the way a framework expresses it decides which of the chapter's budgets the engineer controls directly.

From Principles to Systems

A TP-8, PP-16, DP-128 layout that passes every feasibility check on paper can still hang at its first collective if two ranks disagree on group membership, or run slowly if gradient buckets become ready in an order the collective runtime cannot overlap. Choosing DDP, FSDP/ZeRO-style sharding, tensor parallelism, or pipeline parallelism is therefore also a decision about which constraints the runtime owns and which constraints the engineer must manage directly. Sparse workloads add a fourth contract, the parameter-server push/pull interface (Li et al. 2014) developed for Archetype B in section 5.

The training framework defines process groups, gradient buckets, and the point in backpropagation when each reduction becomes ready; the collective runtime maps those reductions onto ring, tree, or hierarchical algorithms. The engineer must choose compatible group membership and bucket order and verify which communication remains exposed on the step's critical path.

Layer-wise model parallelism requires explicit stage placement and load balancing, while pipeline parallelism adds microbatch scheduling logic to overlap forward and backward work. Tensor splitting instead changes the operators inside each layer, using the column-parallel and row-parallel pairing developed in section 7. FSDP adds parameter-gather and gradient-reduction boundaries around layer execution. Composing these abstractions requires preserving both the intended optimizer update and the memory and dependency budgets that each mechanism introduces.

Production frameworks expose these same strategies under different names, which makes a translation aid useful when reading their documentation or configuration files. Table 0.38 maps the strategies of this chapter onto four widely used stacks; the names change between releases, but the partition each one implements does not.

Table 0.38: Framework names for the parallelism strategies: A translation aid, not a ranking. Each entry names the mechanism a framework uses for the partition developed in this chapter; exact class and option names vary across releases.

Strategy	PyTorch	DeepSpeed	Megatron-LM	JAX
Data parallel	DistributedDataParallel (DDP)	DeepSpeed engine, ZeRO stage 0	Data-parallel process groups	Batch axis sharded over a device mesh
Sharded data parallel	Fully Sharded Data Parallel (FSDP)	ZeRO stages 1–3	Distributed optimizer	Parameter and optimizer state sharded over a mesh axis
Tensor parallel	DTensor tensor-parallel APIs	AutoTP or Megatron integration	Column- and row-parallel linear layers	Sharding annotations on model axes, partitioned by the compiler
Pipeline parallel	`torch.distributed.pipelining`	Pipeline engine	Pipeline schedules (1F1B, interleaved)	User-written stage schedules

The training design therefore determines message size, readiness order, and frequency, while collective algorithms determine how those messages move. *No framework abstraction changes the underlying physics*: distributed-training efficiency ultimately depends on interconnect bandwidth, memory capacity, synchronization latency, and the useful overlap admitted by the computation graph.

↪ How much communication overlap can remove from a step's critical path, and how to quantify that opportunity, is developed in section 6.

Fallacies and Pitfalls

The GPT-2 notebooks showed the trap in miniature. Moving the same model from one NVLink node to four Ethernet-connected nodes quadrupled the GPU count but cut parallel efficiency from 99.4 percent to 27.9 percent. The following misconceptions generalize that error, each treating one term of the step-time accounting as if it were the whole budget.

Fallacy: *Linear speedup is achievable with sufficient engineering effort.*

Amdahl's Law limits speedup when a fixed serial component remains exposed. Synchronous gradient aggregation creates an update dependency, but some of its work can overlap backward computation. As section 5 shows, $\eta_{\text{scaling}} = 1/(1 + N(T_{\text{comm}}(N) + T_{\text{sync}}(N) - T_{\text{overlap}})/T_{\text{compute}})$ depends on the exposed overhead relative to useful compute as N changes. A 1,000-GPU allocation

therefore does not by itself justify a 1,000× speedup forecast. Local kernel efficiency, memory feasibility, communication, and convergence must be evaluated against the specified baseline. Linear scaling is a result to demonstrate for an operating range, not a return guaranteed by device count.

Pitfall: *Optimizing MFU without considering scaling efficiency.*

A single-node MFU measurement does not predict fleet throughput by itself. For a fixed workload and hardware peak convention, scaling efficiency compares measured distributed throughput with ideal replication of that single-node baseline. Multiplying the baseline MFU by this scaling efficiency gives distributed MFU; multiplying an already measured distributed MFU by the same scaling efficiency counts communication and synchronization losses twice. The chapter's own numbers make the difference concrete. A single node running at 50 percent MFU, scaled with the 83 percent scaling efficiency of the overlapped TP-8 layout in section 8, delivers about 41 percent MFU across the fleet. A planner who measures that 41 percent on the full cluster and then applies the 83 percent again would budget for about 34 percent and buy capacity the job does not need. Capacity planning must state the device count and measurement window for each metric. Checkpointing, recovery, and replay require additional accounting only when those losses fall outside that window, and useful goodput must count retained model progress rather than repeated work.

Fallacy: *Hyperparameters tuned on small clusters transfer directly to large-scale training.*

Engineers tune hyperparameters on 8-GPU workstations then deploy to 256-GPU clusters expecting identical behavior. At scale, convergence patterns change fundamentally. The most critical hyperparameter is learning rate: as section 4 explains, global batch increases with GPU count when local batch and accumulation depth remain fixed, so the learning-rate schedule must be revalidated. The linear scaling rule of section 5, which the one-hour ImageNet run established, suggests $\eta_{\text{new}} = \eta_{\text{base}} \times (B_{\text{new}}/B_{\text{base}})$, but this relationship holds only within bounds. As models scale, they eventually encounter the critical batch size of section 5, where adding more data per step yields diminishing returns in convergence.

Beyond the critical batch size, this relationship breaks down in a model-, data-, and optimizer-dependent way. A team that takes a small-cluster learning rate, multiplies it mechanically with GPU count, and jumps directly to a much larger global batch may see lower final quality or slower sample efficiency even though hardware throughput improved. Warmup schedules, weight decay adjustment, layer-wise optimizers such as LARS/LAMB, and careful momentum tuning can recover accuracy in some regimes, but require systematic experimentation at target scale. Organizations that skip these scaling studies waste thousands of GPU-hours on suboptimal runs.

Pitfall: *Adding GPUs to data-parallel jobs without modeling communication.*

More GPUs improve time to target only if the gain in processing rate outweighs communication overhead and any additional sample use. With fixed local batch size, adding data-parallel workers increases the global batch; fixing the global batch instead reduces local work and can expose more communication. The critical-batch analysis in section 5 supplies a workload-dependent statistical guide, not universal GPU-count or model-size thresholds. Compare complete learning curves and cost at the same target quality before committing to a larger allocation.

Fallacy: *Memory capacity alone determines the parallelism strategy.*

A model that exceeds device capacity needs a feasible partition, but memory fit does not select the fastest one. Tensor parallelism exchanges partial results within layers, while pipeline parallelism transfers stage-boundary activations and introduces scheduling bubbles. Their relative cost depends on layer shapes, microbatch count, placement, and overlap. Compare complete training-state and activation budgets together with measured time to target; an unsupported throughput percentage or a weights-only fit cannot settle the choice.

Pitfall: *Applying FSDP or ZeRO without measuring efficiency trade-offs.*

Engineers adopt FSDP universally after reading that it "reduces memory and enables larger models." Sharding trades memory capacity for communication overhead: full-shard FSDP gathers parameters before layer execution and reduces gradient shards during backward, with another parameter gather when the forward pass resharded them. The relevant comparison begins with the complete

training-state budget. Under the mixed-precision Adam convention established here, the 7B worked example exceeds single-device capacity before activations, so standard DDP cannot fit that state on an A100-80 GB. A weights-only fit does not establish a feasible training baseline. When the complete state, activations, and workspaces fit without sharding, DDP can avoid the repeated gathers; when they exceed the 80 GB capacity, the comparison must include a feasible alternative such as sharding or offload. FSDP provides value when it enables training at all or when the larger local batch it permits offsets its communication cost. ZeRO-Offload extends capacity through CPU memory but adds transfers of its own. The decision therefore requires measuring peak memory and exposed communication for the same workload and optimizer contract.

Fallacy: *Parallelism overhead is roughly constant regardless of model size.*

Engineers benchmark parallelism strategies on convenient small models then apply those conclusions to large-scale training. For dense transformers at fixed tokens per update, computation and gradient bytes both grow roughly proportionally with parameter count, as the earlier scaling analysis established. Larger parameter count alone therefore does not imply a better computation-to-communication ratio. Architecture, sequence length, local batch size, partition degree, and kernel efficiency determine how much useful work each rank performs; gradient representation and process-group membership determine how much it communicates. A larger model can also require a different partition that introduces new layer collectives or pipeline bubbles. Reliable strategy selection holds the workload and target quality explicit, then recomputes memory fit, local compute time, communication volume, and the available overlap window at the target scale. A small-model benchmark becomes transferable evidence only when those governing terms remain comparable.

Pitfall: *Treating scaling efficiency as a property of the hardware alone.*

A vendor benchmark might report 85 percent scaling efficiency at 1,024 GPUs, and procurement teams then plan capacity as if that number were a cluster constant. Scaling efficiency is a joint property of four things: the workload's communication-to-computation ratio, the parallelism strategy (data, pipeline, tensor, hybrid), the network topology (fat-tree vs. torus vs. dragonfly), and the software stack (NCCL version, kernel fusion, overlap quality). Reference numbers from dense large-language-model benchmarks transfer poorly to other workloads and fabrics. They may overstate scaling for graph neural networks with irregular communication and for embedding-heavy recommendation models, whose AllToAll embedding exchanges and many small random lookups load the fabric differently from dense gradient AllReduce (section 5), and they say nothing about a commodity-Ethernet placement like the GPT-2 scale-out, which lost most of its parallel efficiency on leaving the node. Capacity planning should use measured scaling on the target workload, not a vendor hero benchmark.

Fallacy: *Gradient accumulation is free.*

Gradient accumulation can reduce synchronization from every microstep to once per window of k microsteps, eliminating $(k-1)/k$ of those synchronization events when the implementation defers reduction. The saving has costs. A resident gradient buffer remains live throughout the accumulation window; for the 7B model, the FP16 buffer occupies 14 GB. Retaining graphs across microsteps or increasing the local batch size can add activation pressure. Accumulating eight microsteps makes updates $8\times$ less frequent per processed microstep, but wall-clock spacing also depends on the communication saved. Larger effective batches can change convergence, and narrow accumulation formats can lose small contributions or overflow. The dtype, loss normalization, and reduction schedule must therefore be validated at the intended batch size. Accumulation trades communication frequency against update spacing, memory residency, and numerical stability.

Summary

Scaling laws keep pushing frontier training budgets past what one machine can hold or finish in time, and distributed training is how the fleet absorbs that growth. It confronts the scaling wall, the workload-dependent operating point beyond which communication and coordination can consume the compute time saved by adding accelerators. A feasible design must preserve the intended optimization update while satisfying model-state, activation, batch-size, and interconnect

constraints. Hardware throughput alone is insufficient; the comparison must also account for time to the target model quality.

Each partition relocates cost along the C^3 axes. Data parallelism divides compute across replicas and pays in communication, the gradient aggregation whose exposed share set the scaling efficiency of the 175B communication example. Tensor parallelism divides work inside a layer and pays in communication on the critical path, which confines it to a fast domain. Pipeline parallelism divides layer depth and pays mostly in coordination, the fill and drain bubble that only more microbatches, better balance, or a smarter schedule can shrink. The 3D parallelism cube in figure 0.50 unites these trade-offs in one coordinate space ($N_{\text{DP}} \times N_{\text{PP}} \times N_{\text{TP}}$). A feasible point must satisfy peak memory and global-batch constraints as well as communication and coordination budgets.

Sharding and model partitioning make different parts of the training state fit, while synchronization and precision policies determine whether the resulting updates remain useful. Hybrid layouts compose these choices within the bandwidth hierarchy. The alignment workload extends the same reasoning to multiple models and alternating generation and update phases, where peak memory depends on which state is live together.

The chapter's strategies are complementary dimensions of one design space rather than alternatives. Systems such as Megatron-LM map tensor, pipeline, data, and expert exchanges to the communication domains that can carry them, and that matching is what delays the communication-bound regime as the fleet grows. The workload archetypes weight those dimensions differently. Archetype A (GPT-4/Llama-3) combines dense-model partitioning with state sharding and, at long contexts, sequence or context partitioning; Archetype B (DLRM at Scale) shards sparse embedding state and pays in lookup traffic rather than layer collectives; Archetype C (Federated MobileNet) moves the coordination problem onto unreliable edge devices. In each case the binding constraint, not the archetype label, selects the configuration.

Key Takeaways: Parallelism relocates the tax

- **Splitting work moves the bottleneck**: Distributed training does not make the underlying computation smaller; it converts memory pressure into communication volume, synchronization delay, or idle pipeline time (principle 11). The winning strategy is the split that sends overhead to the least binding part of the fleet.
- **Throughput must serve convergence**: Larger global batches can improve hardware efficiency while yielding diminishing progress per sample. Compare time to the same target quality, and treat the critical-batch estimate as a workload-dependent guide for selecting batch size and update schedules.
- **Sharding buys memory with messages**: ZeRO and FSDP partition optimizer state, gradients, and parameters (principle 2), reducing replicated storage. Peak memory must still include activations, temporary gathers, and workspaces; exposed ReduceScatter and AllGather costs determine whether the capacity gain also improves throughput.
- **Tensor parallelism needs a fast domain**: Splitting operations inside layers creates frequent communication on the dependency path. Place those groups on links with sufficient bandwidth and low latency; the relevant boundary is the communication domain, which may span nodes, rather than the server enclosure.
- **Pipeline parallelism trades bytes for bubbles**: Layer staging reduces communication frequency, but fill and drain slots leave accelerators idle (principle 10). Microbatching with $m \gg N_{\text{PP}}$ is the mechanism that turns model depth into throughput rather than pipeline slack.
- **Hybrid layouts are joint decisions**: Combine only the partitioning and sharding strategies needed to satisfy the workload's constraints (principle 13). Model divisibility, batch size, peak memory, communication groups, and failure domains must form one feasible configuration; improving one axis can expose a limit on another.

The displacement of overhead (principle 13) makes a feasible partition the beginning of the design problem. A memory-saving split is useful only if its communication and schedule still meet the


run's time-to-quality budget. Every mechanism in this chapter shrinks the per-device compute term T_{compute}/N or the per-device training state, and pays for it in $T_{\text{comm}}(N)$, in $T_{\text{sync}}(N)$ through barriers, stragglers, and pipeline bubbles, or in lost overlap. In C^3 terms, no partition removes the execution tax of scale; it only relocates that tax among compute, communication, and coordination. The engineering judgment is therefore to compare complete configurations, including their exposed dependencies, rather than optimize each parallelism axis independently.



What's Next: From logic to traffic

Splitting the mathematics defines the *logical* exchanges the update protocol needs. Replicas AllReduce gradients, sharded layers ReduceScatter and AllGather their state, expert and embedding partitions route tokens through AllToAll, and pipeline stages pass activations point to point. Each exchange specifies a result that participants must receive, not how its bytes cross the *physical* fabric. The next chapter separates those result contracts from the ring, tree, and hierarchical schedules that carry them out and prices each schedule's latency, bandwidth, and topology costs, so that the communication budgets charged to $T_{\text{comm}}(N)$ here can be evaluated rather than assumed.

Collective Communication

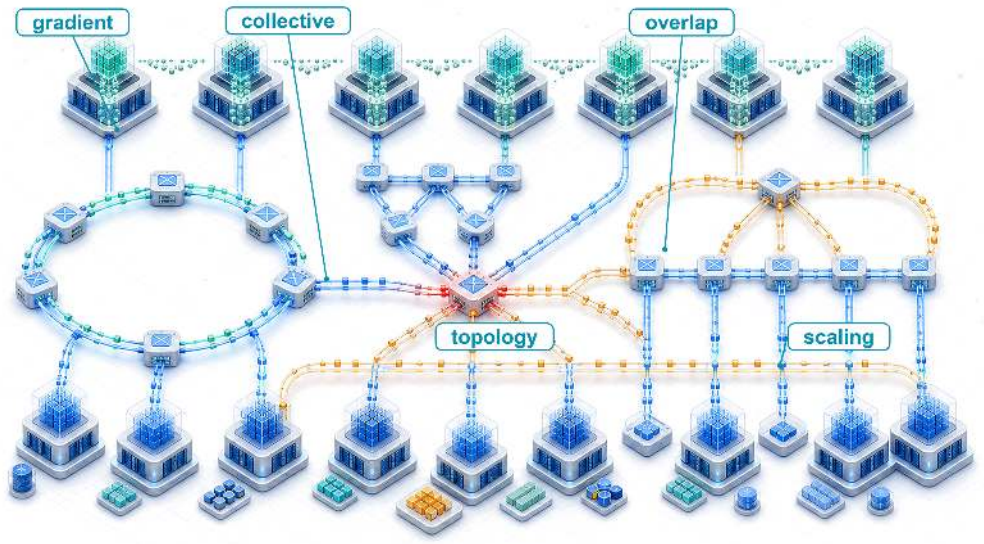

Purpose

Why does communication between machines constrain large-scale machine learning systems?

Computation scales by adding processors; communication scales by moving data between them. These scale differently. Adding processors increases available arithmetic capacity, but useful work stalls when the required data does not arrive in time. Exchanging gradients, activations, and parameters can then consume more time than computing them. On one machine, shortening the dominant calculation often shortens the job. Across a fleet, that same improvement may simply make each processor reach its next dependency sooner and wait longer for the others. The cost of that wait includes every reserved accelerator, so a small delay repeated throughout training can consume a substantial budget without advancing the model. Faster links help when transfer capacity is the constraint, but the benefit depends on which physical paths the traffic shares. More bandwidth cannot remove a dependency. Sending less data introduces its own choices about numerical accuracy, memory use, and when the next computation can begin. An exchange must also deliver the correct result to every participant that needs it. A fast transfer that combines the wrong contributions does not preserve a valid training run. The engineering decision is therefore how to organize communication so that its cost remains compatible with the work it enables. Light-speed delays, bandwidth limits, and the energy cost of movement make that decision as physical as processor design. In C^3 terms, collective communication connects distributed compute through coordinated exchanges whose correctness and exposed cost determine whether the fleet delivers useful scale.

Learning Objectives

- Apply communication cost models to estimate collective duration and message-size crossover points
- Match collective communication primitives and AllToAll schedules to parallelism strategies, topology, message granularity, and skew
- Compare ring, tree, butterfly, double-tree, and hierarchical reduction algorithms using scale-dependent cost models
- Evaluate topology-aware collective schedules under link-bandwidth, rank-placement, and shared-capacity constraints
- Evaluate compression, sparsification, and error feedback by balancing communication savings against convergence risk
- Design overlap strategies with bucket fusion, asynchronous operations, and layer-by-layer gradient scheduling
- Specify matched measurements for calibrating collective cost models across algorithms, process groups, and topologies

From Parallelism to Communication Patterns

When 10,000 GPUs cooperate on one training update, the splits created by data, tensor, pipeline, and expert parallelism determine which results must cross device boundaries. Workers execute collective operations within participating groups and point-to-point transfers between pipeline stages. Within the multi-tier fleet stack diagrammed in figure 0.15, these exchanges occupy the Distributed Execution row of the Distribution band, where logical parallelism becomes physical traffic.

The 3D parallelism cube assumes that replicas, shards, stages, and experts can exchange gradients, activations, parameters, and tokens quickly enough for the optimizer to see one coherent training run. Chapter 15 decided which exchanges each partition requires and charged them to the Fleet Law's communication term $T_{\text{comm}}(N)$ as budgets. That assumption is the handoff from parallelism to communication. Every way of splitting the model relocates work onto the network, and this chapter turns those budgets into schedules whose latency, bandwidth, and topology costs can be computed.

↩ The 3D parallelism cube, which composes data, pipeline, and tensor parallelism into one configuration space, is established in section 15.

The first distinction is between an operation's result and the schedule that produces it. Section 11 named AllReduce, AllGather, and AllToAll as the traffic the fabric must carry; here they become contracts on results. AllReduce combines corresponding tensor elements across participating workers and returns the reduced tensor to every worker. AllGather instead concatenates their shards, ReduceScatter combines contributions but leaves each worker with only a shard of the result, and AllToAll sends different data to different destinations. The parallel decomposition determines which contract each exchange needs; ring, tree, and hierarchical algorithms are alternative schedules for carrying that contract out.

The gap between the cube's assumption and the wire reveals an asymmetry in how computation and communication scale. Computation is local because each GPU works on its own data, so aggregate compute grows with the number of GPUs. Communication is global because keeping the fleet synchronized requires information to cross physical links with finite latency, bandwidth, interconnect topology, and energy. Gradient synchronization is the central case, because every synchronous data-parallel step repeats it on the full gradient. Scaling laws (principle 9) make that case harder over time, because the capability they reward comes from more parameters trained on more accelerators, so the gradient to be reduced and the group that must agree on it grow together.

For the initial gradient budget, consider a ring schedule: each worker passes tensor chunks to a neighbor, first accumulating their sums and then circulating the completed chunks. Each phase moves nearly one tensor's worth of data per worker, so the bandwidth budget is approximately twice the gradient size divided by link bandwidth. The detailed round count follows once the transfer model is established.

Definition 6.1: Gradient synchronization

Gradient synchronization is the collective communication step in synchronous data-parallel training in which every worker contributes its locally computed gradient tensor to an aggregate reduction, then receives the same reduced result so all model replicas apply an identical update.

1. **Significance**: Communicating all gradients of a 70B-parameter model in BF16 gives a 140 GB logical payload per replica per step. As a communication-only baseline, suppose every rank reduces that complete buffer. A ring across 1,000 GPUs at 50 GB/s per link has a bandwidth budget of approximately $2 \times 140/50 \approx 5.6$ s of transfer per step. Model partitioning shrinks each rank's share of that buffer, and only the portion of $T_{\text{comm}}(N)$ left exposed after overlap adds to step time in the Fleet Law (equation 0.3).
2. **Distinction**: Unlike a parameter server, which concentrates every worker's gradient at a central aggregator, ring AllReduce spreads the exchange so that each worker sends $2 \times (N-1)/N \times M$ bytes per step, approaching $2M$ however large the cluster grows (section 8 develops the comparison).
3. **Common pitfall**: A frequent misconception is that ring AllReduce behaves like an all-to-all exchange. In ring AllReduce, each worker communicates with neighbors according to a schedule, and the per-node communication volume is approximately constant as the cluster grows. The scaling pressure comes from latency steps, topology, and the gradient volume per step, not from every worker opening a distinct stream to every other worker.

For standard synchronous data-parallel stochastic gradient descent (SGD), gradient synchronization supplies the shared gradient needed for one optimization trajectory. Replicas that apply different local gradients can diverge. To reproduce the intended global-batch update, they must also start from matching parameters and optimizer state, weight local contributions correctly, and apply the same update rule. The AllReduce[1] primitive provides the reduction; convergence follows from the optimization assumptions, not from communication alone. Floating-point reduction order can still change low-order bits.

The gradient payload depends on parameter count and the representation transmitted. A model with P parameters contributes $2P$ bytes per data-parallel replica when all gradients are communicated in BF16 (2 bytes per parameter); stored weight precision alone does not determine that choice. For a 70-billion-parameter model, a mid-sized dense model smaller than the 175B-parameter running instance of Archetype A (GPT-4/Llama-3), this gives 140 GB for the complete logical gradient. A ring moves nearly twice its input buffer size per rank.[2] If a replica spans multiple ranks through model parallelism, each corresponding-shard group reduces its own portion rather than this full buffer.

This chapter varies the volume's reference configuration in two stated ways. Its headline payload is this 70B gradient rather than the 175B instance's, which keeps the worked arithmetic compact; every bandwidth term in the chapter is linear in payload, so each result scales directly to the larger model, and section 9 prices the 175B instance on the volume's reference cluster itself. The cluster size changes from example to example, because each algorithm's behavior depends on rank count and the point of an example is often to isolate one term. Each worked example states its rank count. A second recurring payload, the chapter's reference gradient buffer, first appears in the energy estimate of section 3.


At large scale (hundreds of billions of parameters across thousands of GPUs), gradient synchronization can dominate training step time unless collective communication is systematically optimized. Understanding how to manage that overhead requires modeling data movement as physics rather than as an abstract API call.

The Physics of Data Movement

Physical constraints govern data movement before algorithms are designed. The speed of light sets a latency floor[3] (roughly 5 µs per kilometer in fiber), the bandwidth-distance product limits how far a fast link can reach before it needs optics (signal loss grows with both lane rate and cable length,

[1] **AllReduce**: The name comes from MPI and describes the result, not the schedule: a Reduce (combining every rank's data at one root) followed by a Broadcast (returning the combined value to all ranks). A direct gather to the root concentrates raw input traffic there, but a tree can aggregate contributions along the way. The algorithms in section 8 distribute the reduction without a root.

[2] **Ring AllReduce**: The algorithm dates to the HPC collective-communication literature; Patarasuk and Yuan analyzed bandwidth-optimal AllReduce algorithms for workstation clusters, Baidu's Andrew Gibiansky popularized ring AllReduce for deep learning in February 2017, and Horovod plus NVIDIA NCCL helped make it a common distributed-training primitive (Patarasuk and Yuan 2009; Gibiansky 2017; Sergeev and Balso 2018; Jeaugey 2017).



Exposed gradient synchronization can dominate step time at scale.

[3] **The Speed of Light Constraint**: Light travels through optical fiber at approximately 200,000 km/s, or 200 meters per microsecond. For a rack-to-rack fiber path of 100 meters, propagation alone contributes approximately 500 ns in one direction. Faster switches can reduce other latency components, but reducing this propagation delay requires a shorter path or a different propagation medium.

so copper reach shrinks as lane rates rise; section 3), and kernel-bypass transports such as remote direct memory access (RDMA) and GPUDirect RDMA strip the per-message software tax down to a few microseconds. Collective communication adds the energy cost of moving a bit, which the algorithms must respect as firmly as latency and bandwidth.

↩ Kernel-bypass RDMA, which strips the per-message software overhead, and GPUDirect RDMA, which removes the host-memory bounce, are established in section 4.

Moving data consumes energy across storage arrays, interfaces, serializers, transceivers, and switches. A transfer that starts in local SRAM can stay on-package in high-bandwidth memory (HBM), cross to an intra-node peer GPU, or traverse intermediate switches to a remote node, and each step widens the physical accounting boundary that an energy estimate must include (figure 0.66). Each boundary activates distinct physical components: on-package links, intra-node crossbars, serializers, optical transceivers, and switch fabrics. Distance alone does not determine energy per bit, and an endpoint-only estimate cannot be compared directly with a complete fabric-path estimate. Locality remains useful because it can avoid transfers and active interfaces; the energy saving must be evaluated under the same workload, utilization, and accounting boundary.

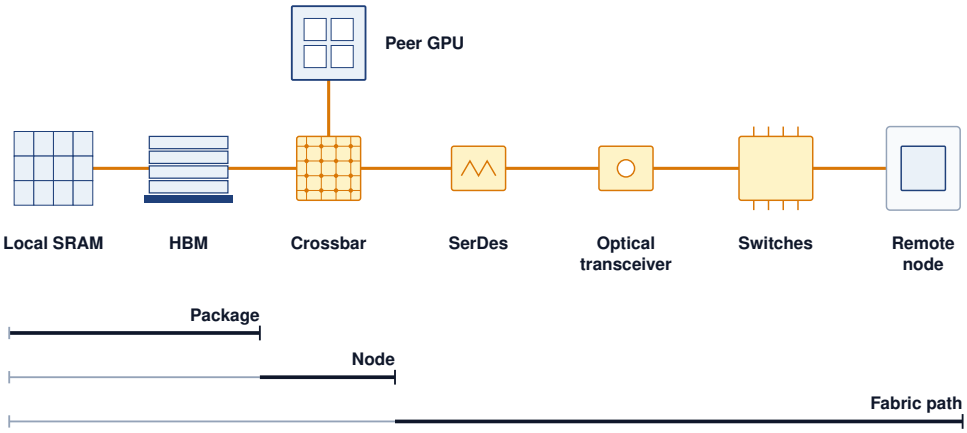


Figure 0.66: Data-movement accounting boundaries: Successively broader paths involve different storage and communication components. The schematic identifies what an energy estimate must include; it assigns no universal distance law or fixed energy multiplier. Compare energy per transferred byte only after specifying endpoints, interfaces, switches, and utilization.

The chapter's reference gradient buffer of 1 GB stands for one large fused reduction, far smaller than a full model gradient but large enough that per-byte transfer, not per-message startup, governs its cost; later examples return to it by name. Reducing it around an illustrative 10,000-rank ring sends approximately twice the payload from every rank. At a complete-path transfer cost of 35 pJ/bit, a representative midpoint of the range typical of switched fabrics rather than a measurement of any particular one, this gives about 5.6 kJ per reduction, paid again at every synchronous step. The usable rule is that communication energy is the bytes an algorithm sends multiplied by the energy per bit of every boundary those bytes cross. An algorithm that moves fewer bytes, or a placement that keeps more of them inside the node, therefore saves energy as directly as it saves time, while the share of the step's total energy that communication represents must be measured at the same accounting boundary as the compute it accompanies.

These constraints enter different parts of a communication budget. Latency sets the floor for every message regardless of size. Bandwidth caps the throughput for large transfers. Protocol overhead adds a per-message tax that penalizes fine-grained communication, which is why the kernel-bypass transports matter for collective performance. RDMA's zero-copy path[4] avoids staging each transfer through host memory and the kernel's socket buffers. The physical fabric supplies these limits; the collective schedule determines how many times the job pays them.

4 **Zero-Copy Communication**: GPUDirect RDMA lets the NIC read gradients directly from accelerator memory, so a 140 GB gradient never passes through host DRAM, whereas a staged path writes and then rereads it there (280 GB of host-memory traffic per send).

The initial ring budget reveals why data movement can become the governing constraint at scale. A single AllReduce on a 70B model's gradients consumes seconds of wall-clock time, which becomes exposed delay when no independent computation overlaps it. This asymmetry between local computation and global coordination motivates every collective algorithm that follows, and it

is why a seemingly modest improvement to the collective repays itself across a training campaign that repeats it at every step.

Across the four scale tiers charted in figure 0.67, the training step's critical path inverts as a fixed workload spreads from 8 to 4,096 GPUs. In this illustrative scenario, local compute contracts from 75 percent on a single 8-GPU node down to 20 percent at 4,096 GPUs, while communication and synchronization expand to claim 80 percent (65 percent communication and 15 percent sync/idle) of elapsed wall-clock time. These fractions represent assumed scaling regimes rather than empirical measurements for a specific cluster; in practice, gradient size, local batch size, partition topology, and asynchronous overlap determine where the critical path lies.

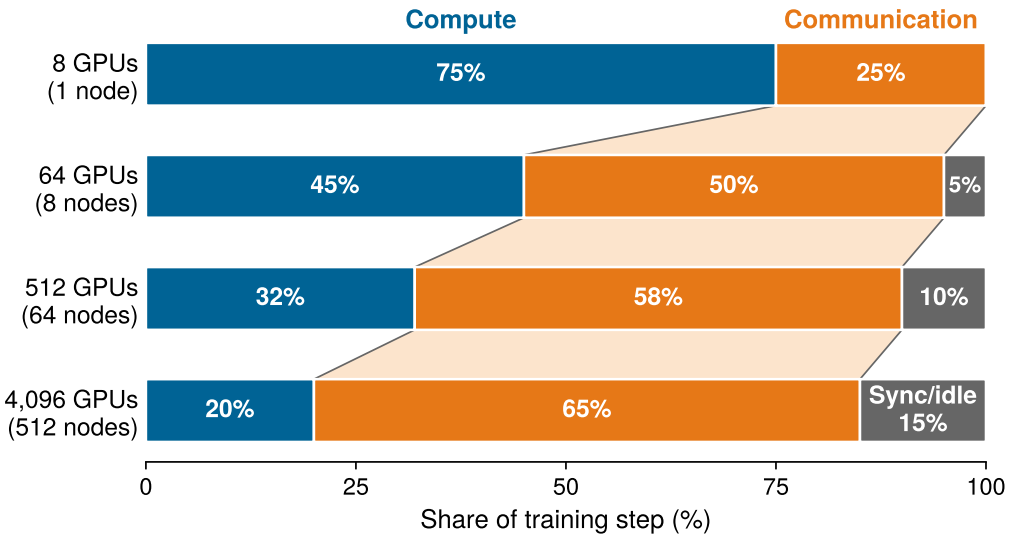


Figure 0.67: The compute-communication timeline: Illustrative fractions show how exposed communication and synchronization can take a growing share of a training step as a fixed workload spreads across more devices. The fractions are assumed scenarios, not measurements or predictions for a particular model or cluster; they motivate measuring the critical path at each scale.

The Gradient's Travel Manifest

Data movement begins as gradients become ready during the backward pass. A synchronous data-parallel worker computes gradients from its local batch, and the optimizer requires the combined global contributions before applying the parameter update. Some exchanges can begin while independent backward computation continues. Tensor ownership determines the destination; gradient readiness determines when transfers can start.

The travel manifest for this exchange is dictated by the chosen parallelism strategy, because the mathematical decomposition determines which tensors must cross device boundaries. For Archetype A (GPT-4/Llama-3), dense gradient contributions are combined within each data-parallel group; in a hybrid layout, that group contains the matching parameter shard from each replica. AllReduce serves the replicated-gradient baseline. For Archetype B (DLRM at Scale),[5] lookup requests travel to embedding-shard owners and the resulting vectors return to the workers that need them. Mixture-of-experts (MoE) routing similarly sends activations to the ranks hosting selected experts and returns their outputs. These destination-specific exchanges motivate AllToAll.

At large scale, these parallelism strategies can be combined. A 3D parallelism layout combines data parallelism, tensor parallelism, and pipeline parallelism, creating distinct communication groups whose exchanges may overlap in time. In a node-local tensor-parallel example, layer reductions use NVLink, pipeline stages exchange activations and their gradients point-to-point across nodes, and data-parallel groups reduce matching parameter shards over InfiniBand. Other placements change those physical paths while retaining the logical communication requirements.

[5] **DLRM (Deep Learning Recommendation Model)**: Meta's 2019 architecture for click-through rate prediction uses sharded embedding tables and exchanges the resulting sparse lookups across workers. The resulting All-ToAll may be startup-bound when each destination receives a fine-grained message, injection- or reception-bound as aggregate payload grows, or fabric-bound under oversubscription, unfavorable routing, or shard-access skew. DLRM therefore supplies a destination-specific traffic pattern, not a universal latency regime.

↩ The three lighthouse archetypes and the C^3 regimes each one stresses are established in section 11.

Each primitive operates on a different process group, a subset of the total GPU population that participates in that particular collective. Classical Message Passing Interface (MPI) uses a communicator as the object that names such a participating set; its communicator size is the number of ranks in that set. MPI libraries already selected collective algorithms based on communicator size and message size (Thakur et al. 2005). GPU communication libraries inherit that algorithm-selection problem and add the further challenge of coordinating overlapping process groups without creating contention between concurrent collectives.

Table 0.39 maps each parallelism strategy to the data it must move, the collective primitive that moves it, and the term most likely to bind. The table acts as a traffic map that specifies which participants must exchange data. The network transfer model then prices those exchanges, and the collective algorithms that follow provide execution schedules.

Table 0.39: The Travel Manifest: How each parallelism strategy becomes a traffic pattern. Pipeline parallelism alone relies on point-to-point transfers rather than a collective.

Parallelism Strategy	What Must Move	Primary Primitive	Primary Constraint
Data Parallelism	Full gradient, averaged across replicas	AllReduce	Bandwidth (large payloads)
FSDP/ZeRO-3	Parameter shards in, gradient shards out	AllGather + ReduceScatter	Bandwidth, high frequency
Tensor Parallelism	Partial layer activations within the node	AllReduce, AllGather	Critical path (NVLink bandwidth and latency)
Sequence Parallelism	Activations sharded along the sequence	AllGather + ReduceScatter	Bandwidth (activation exchange)
Pipeline Parallelism	Activations to the next stage	Point-to-Point (Send/Recv)	Latency (microbatch dependencies)
Expert Parallelism (MoE)	Tokens to the ranks hosting their experts	AllToAll	Startup, injection/bisection, or skew
Embedding Sharding (DLRM)	Embedding lookups to and from shard owners	AllToAll	Granularity, fabric capacity, or skew

In this table, expert parallelism refers to the mixture-of-experts[6] architecture pattern. The mapping shows that different parallelism strategies impose fundamentally different communication patterns. Data parallelism and fully sharded data parallel (FSDP) commonly generate large messages that benefit from ring-based algorithms and hierarchical decomposition. Tensor and pipeline parallelism generate smaller, more frequent messages whose cost sits on the critical path, so low-overhead software stacks and fast local links matter. Expert parallelism and sharded embedding tables generate destination-specific traffic whose limiting term depends on message granularity, endpoint injection and reception, fabric bisection, oversubscription, routing, and skew.

The manifest's rows describe data center parallelism, so they leave out the federated Archetype C. Across all three lighthouse archetypes, the dominant exchange and its bottleneck differ.

6 **Mixture-of-Experts (MoE)**: Because each token activates only a few experts, MoE replaces a uniform dense reduction with destination-specific AllToAll traffic. Fine-grained dispatch can expose startup cost, larger batches can bind injection or reception bandwidth, and oversubscription, routing, or expert skew can make bisection capacity or a hotspot the critical path.



Lighthouse 6.1: Communication archetype patterns

The travel manifest for a gradient depends on the system's objective function and constraint regime. Each lighthouse archetype faces a distinct communication challenge, and the techniques developed in this chapter map to those challenges differently, as table 0.40 summarizes.

Table 0.40: Archetype-to-Collective Mapping: Each lighthouse archetype produces a characteristic traffic pattern, but the limiting term depends on message shape, placement, and the physical fabric.

Archetype	Primary Collective	Candidate Limiter	Optimization Strategy
Archetype A (GPT-4/Llama-3)	AllReduce	Bandwidth (β)	Hierarchical AllReduce; rail-optimized placement
Archetype B (DLRM at Scale)	AllToAll	Granularity, fabric capacity, or skew	Message coalescing; topology-aware routing; shard balancing
Archetype C (Federated MobileNet)	Client uploads to an aggregator (asynchronous)	Uplink bandwidth and availability	Aggressive quantization; error feedback

The table separates traffic pattern from limiting resource. A dense reduction, a destination-specific exchange, and an intermittent device update require different interventions even though all three serve a training workload. Hierarchical AllReduce, AllToAll schedule selection, and compression with error feedback each receive their own treatment later in the chapter.

Choosing among those interventions requires pricing each exchange, and pricing requires a model of network performance.

Network Performance Modeling

Predicting transfer duration across a cluster requires separating two physical variables: the time required to initiate a message and the rate at which data moves once in transit. Across a data center fabric, these two terms govern communication latency and throughput differently depending on message size, network topology, and software overhead.

The alpha-beta cost model for network transfers

The α-β model $T(n) = \alpha + n/\beta$ prices a transfer over a single link (principle 5), separating a fixed startup tax (α) from a per-byte transit fee (n/β) (Hockney 1994). A collective pays that price at every step of its schedule, so the two terms, multiplied by the schedule's round count and traffic factor, determine algorithm selection across the fleet.

↩ The α-β model for a single link and its latency-dominated and bandwidth-dominated regimes are established in section 6.

↪ Worked message-size regimes and crossover calculations for this model are developed in section 4.

For collectives, the parameters must describe the effective path. Latency (α) is the startup cost paid at every step of a schedule, so it includes recurring software overhead, PCIe traversal, and network switching time; one-time communicator initialization is a separate setup cost. Bandwidth (β) is the sustained per-direction transfer rate. The critical message size $n^* = \alpha \cdot \beta$, where the two terms are equal, carries over unchanged, but a collective changes what must be compared with it. Each step of a schedule transfers a chunk rather than the whole tensor, and a ring over N ranks moves M/N bytes per step. A bucket of tens of megabytes split across a thousand ranks therefore yields chunks of tens of kilobytes, below the inter-node crossovers in table 0.41, even though the bucket itself is far above them. Below n^*, a step is latency-bound; above it, bandwidth-bound.

The crossover explains two recurring optimizations. For InfiniBand NDR at $\alpha \approx 1.5$ µs and $\beta \approx 50$ GB/s, the knee sits at $n^* \approx 75$ KB, the value section 6 computed for a single transfer. A 4 KB routing message is far below n^*, so the startup tax dominates. If 100 ready messages have compatible destinations and can share one transfer, fusing them into a 400 KB message reduces the modeled cost from approximately $100\alpha = 150$ µs to $\alpha + n/\beta \approx 9.5$ µs, roughly a 16× improvement before packing costs. More generally, N_{msg} serialized messages of size n/N_{msg} can cost up to $N_{\text{msg}}\times$ as much as one message of size n when $n/N_{\text{msg}} \ll n^*$. Fusion is the first optimization, and it motivates framework gradient buckets and destination-aware token coalescing.

Compression is the second, and the crossover tells where it pays. A 140 GB gradient tensor sits far above n^*, so shrinking its bytes shrinks the dominant n/β term directly, provided encoding and aggregation costs are counted. Even keeping only the largest 1 percent of values (Top-k sparsification, developed in section 10) leaves 1.4 GB of values before their indices are added, still far above n^*, so

the saving remains a byte saving. Compressing a 4 KB routing message, by contrast, offers little, because its unchanged α term already dominates.

Across the typical data center interconnects tabulated in table 0.41, the critical-size column carries the load-bearing pattern: intra-node NVLink stays latency-bound up to several hundred kilobytes, whereas the inter-node fabrics cross over below roughly 100 KB. A message between those crossover sizes can therefore be latency-bound inside a node but bandwidth-bound once it travels between nodes.

Table 0.41: Interconnect Performance Parameters: Effective per-message launch latency (α, including the software stack), per-direction link bandwidth (β, the one-way deliverable rate that enters $T(n) = \alpha + n/\beta$; NVLink's datasheet 900 GB/s is the bidirectional total, so its β is the 450 GB/s one-way rate), and the computed crossover size $n^* = \alpha \cdot \beta$ at each row's α midpoint (for InfiniBand NDR, at the representative 1.5 µs used throughout this chapter), where communication transitions from latency-bound to bandwidth-bound.

Interconnect	Latency (α)	Bandwidth (β)	Critical Size (n^*)
NVLink 4.0 (intra-node)	1–2 µs	450 GB/s	~0.7 MB
InfiniBand NDR 400 Gbps	1–3 µs	50 GB/s (per port)	~75 KB
InfiniBand HDR 200 Gbps	2–5 µs	25 GB/s	~87.5 KB
PCIe Gen5 (GPU↔CPU)	2–5 µs	64 GB/s	~224 KB
Ethernet 100 Gbps (RoCE)	5–10 µs	12.5 GB/s	~93.7 KB

The same comparison across generations shows that the roughly ninefold per-direction cliff between a GPU's NVLink capacity and its one InfiniBand port, which section 7 established for the H100 generation, is not an artifact of one product cycle (figure 0.68). Every point in the figure is per direction, so NVLink values are half the bidirectional datasheet totals, exactly as for the NVLink 4.0 row of table 0.41. A gap of that order has persisted for a decade even as both tiers grew. A GPU's NVLink aggregate and a single network port are different endpoint boundaries, but that persistent gap is why collective design must be hierarchy-aware, because unpartitioned traffic routed across the slower external fabric saturates it long before the local links are busy.

The opening of this section claimed that a bucket far above n^* can still be carried in chunks below it, because a ring divides the bucket among its N ranks. Pricing one bucket at two group sizes tests that claim and shows what it costs.

Napkin Math 6.1: The critical message size

Problem: A data-parallel job reduces a 25 MB gradient bucket with Ring AllReduce over InfiniBand NDR, with $\alpha = 1.5$ µs and $\beta = 50$ GB/s. The bucket is hundreds of times larger than the single-transfer knee. Does each step of the ring run in the bandwidth-bound regime on 64 GPUs, and on the 1,024-GPU reference cluster?

Math:

1. **Knee**: $n^* = \alpha \cdot \beta = 1.5 \times 10^{-6}$ s $\times\ 5 \times 10^{10}$ B/s $= 75$ KB.
2. **Chunk per step**: A ring sends M/N per step, 390.6 KB on 64 ranks (above the knee) but only 24.4 KB on 1,024 ranks (below it).
3. **Ring time** $2(N-1)\left(\alpha + \frac{M}{N\beta}\right)$: about 1.2 ms on 64 ranks, of which the byte term is 1.0 ms; about 4.1 ms on 1,024 ranks, where the byte term is still only 1.0 ms.

Systems insight: The regime belongs to the chunk, not to the tensor. The byte term barely moves as the group grows, but at 1,024 ranks each step carries a chunk below n^*, so startup dominates and the same bucket takes several times longer. Large language model (LLM) gradients are bandwidth-bound as tensors, yet a flat ring over a large group can still carry them


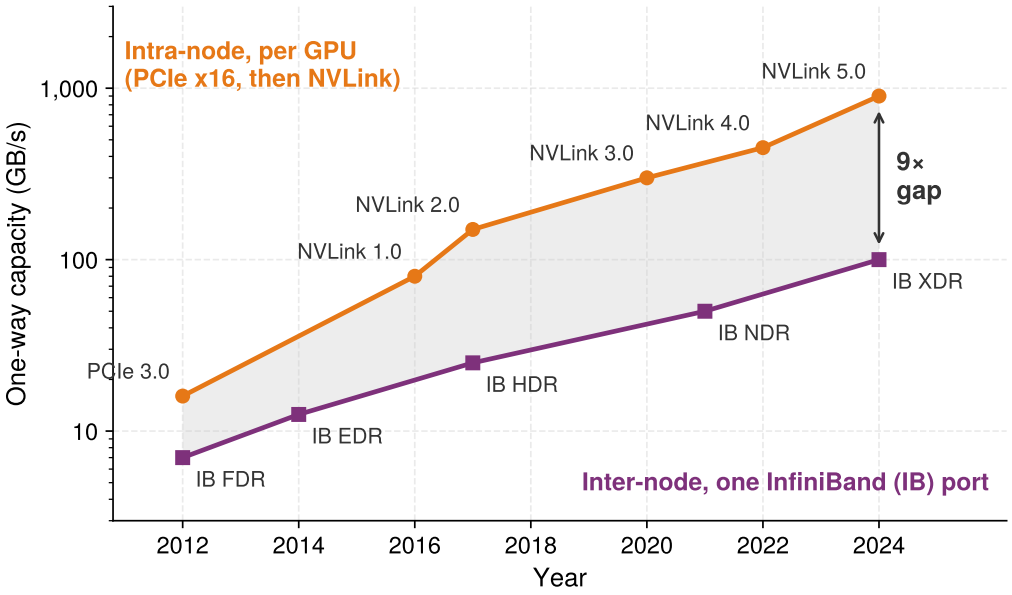


Figure 0.68: Interconnect bandwidth conventions: Selected advertised intra-node and inter-node capacities, expressed per direction. NVLink points sum a GPU's links; PCIe uses one x16 interface, and InfiniBand uses one port. These capacities reveal a hierarchy but are not equal-sized endpoint budgets or achieved collective rates. Algorithm selection additionally requires startup cost, port count, routing, and contention.

in latency-bound steps. The levers then shift to larger buckets, fewer rounds, and hierarchy, which is why the algorithms of section 8 compete on round count as well as bytes.

For collectives, the two regimes map onto different levers. In the latency-bound regime ($n < n^*$), where MoE routing tokens, scalar reductions, and the small chunks of a large-group schedule sit, the levers are fusion, fewer schedule rounds, fewer hops, and a leaner software stack. In the bandwidth-bound regime ($n \gg n^*$), where LLM gradients and optimizer states sit, they are compression, a byte-efficient algorithm, and link aggregation across multiple network interface cards (NICs). Classifying each exchange, and each chunk within it, into one regime is the diagnostic skill the rest of the chapter applies.



Below n^* the latency term α dominates; above it, the byte term n/β does.

Checkpoint 6.1: Alpha-beta diagnostics

Verify your understanding of network performance regimes:

- ☐ **Bound regime**: classify a 10 KB message sent over a link with $\alpha = 2$ µs and $\beta = 10$ GB/s as latency-bound or bandwidth-bound.
- ☐ **Software overhead**: determine which type of parallelism benefits more when "Software Overhead" (α) is reduced by half: Data Parallelism or Tensor Parallelism.
- ☐ **Critical message size**: describe how the critical message size ($n^* = \alpha \cdot \beta$) changes when networking upgrades from 100 Gbps to 400 Gbps while software latency stays constant.
- ☐ **NIC scaling**: assess the True or False claim that, in the bandwidth-bound regime, doubling the number of NICs per node effectively doubles the transmission speed for large tensors.

The LogP model

The α-β model estimates transfer duration without specifying how much independent computation can proceed during that transfer. Adding the entire estimate to compute time therefore overstates step time when overlap is possible. The **LogP model** (Culler et al. 1993) separates network transit from processor involvement with four parameters:

- L_{LogGP} **(latency)**: The time for a message to traverse the network (similar to α).
- o **(overhead)**: The processor time spent initiating or completing a transfer. During this work, the same execution resource cannot compute, making o the nonoverlappable cost. In a distributed training context, dispatch, device-kernel launch, memory registration, and runtime progress can all contribute. The value is an effective parameter of a particular software and hardware path, so it must be measured with the same collective, process group, and topology used by the workload.
- g **(gap)**: The minimum spacing between consecutive sends or consecutive receives at a processor. It limits endpoint message rate but does not describe every source of link contention in a routed fabric.
- N **(rank count)**: The number of ranks in the communication group. The original model names this processor count with its final letter, P; this chapter writes it N to match its other collective cost formulas.

LogP distinguishes network latency (L_{LogGP}, which can be hidden) from processor overhead (o, which cannot). Independent computation can overlap the network transit interval, while initiation and completion overhead remain exposed on the execution resource that performs them. A small overlap calculation makes this distinction concrete:

> Napkin Math 6.2: Hiding communication behind computation
>
> **Problem**: A training pipeline attempts to overlap gradient AllReduce with the next layer's backward pass. The backward pass takes 500 µs. Represent the complete transfer by a toy budget with network time 100 µs, processor overhead $o = 50$ µs to initiate, and $o = 50$ µs to receive. Assume both overhead intervals occupy the same execution resource as backward computation, with independent network progress and no contention. Can the communication be hidden under these assumptions?
>
> **Math**:
>
> 1. **Overlappable portion**: Network latency L_{LogGP} = 100 µs (data in flight while GPU computes).
> 2. **Non-overlappable portion**: $2o$ = 100 µs (GPU busy initiating/receiving).
> 3. **Compute available**: 500 µs.
> 4. **Hidden**: All 100 µs of L_{LogGP} can overlap with compute.
> 5. **Exposed**: The 100 µs of $2o$ overhead cannot overlap.
>
> **Result**: Effective time is 100 µs + max(500 µs, 100 µs) = 600 µs. The network latency is hidden, but the processor overhead remains exposed. Applied to every layer of a backward pass, the same split determines which gradient transfers a training step can hide (section 10).
>
> **Systems insight**: The α-β model captures the total communication time. The LogP model reveals how much of it can be hidden. When designing pipelined training, optimize for low o (kernel bypass, GPUDirect) rather than high β alone.

The α-β model estimates transfer duration from latency and bandwidth measurements. LogP adds the processor/network distinction needed to estimate exposed delay in pipelined execution. Choosing a communication schedule therefore requires both a transfer budget and the independent computation available to overlap it.

When messages are large and pipelined across the network, the LogGP model (Alexandrov et al. 1995) extends LogP with a gap-per-byte parameter G, modeling the streaming cost of long messages.

These models describe multiprocessor communication with endpoint rate and capacity limits; they are not restricted to one flow on one link. Their compact parameters do not explicitly represent every shared path, oversubscribed cut, or routing hotspot. For congestion-sensitive workloads, particularly AllToAll for MoE, measurements on the target placement must test whether the model captures the active bottleneck.

The transfer model prices one message, but a training dependency usually requires a coordinated set of messages. Counting algorithmic rounds or bytes first requires a precise statement of which result each participating worker must receive.

↪ The LogGP long-message cost model and its gap parameters are developed in section 4.

Collective Operation Primitives

Sending a gradient tensor to a peer does not specify which workers must contribute or where the final result belongs. Collective operations supply that group-level contract, using a vocabulary standardized by MPI and inherited by modern ML communication libraries (Message Passing Interface Forum 2015). The four contracts sketched at the start of the chapter differ in what each rank holds afterward (figure 0.69). AllReduce leaves an identical sum (Σ) on every rank, AllGather leaves every rank with the concatenation of all shards, ReduceScatter sums across ranks but leaves each rank one reduced shard (Σ_i), and AllToAll performs a distributed matrix transpose, routing each rank's j-th chunk to rank j. Two further primitives complete the set and serve as building blocks for these four: Broadcast, in which rank 0 sends its data to all ranks, and Reduce, in which all ranks aggregate into rank 0.

↪ The bandwidth and latency cost terms of AllReduce, AllGather, ReduceScatter, AllToAll, and Broadcast, under ring, tree, and pairwise-exchange algorithms, are developed in section 4.

Definition 6.2: Collective operation

Collective operation is a distributed communication pattern in which every rank in a process group invokes a matching operation to aggregate, broadcast, or redistribute data. The operation's contract specifies the output at each rank; it does not require simultaneous entry and does not, by itself, impose a general-purpose barrier before or after the call (Message Passing Interface Forum 2015).

1. **Significance**: Because the contract names only each rank's result, the schedule that carries it decides how communication demand spreads as the group grows. A schedule that funnels every contribution through one endpoint makes the communication term $T_{\text{comm}}(N)$ of the Fleet Law (equation 0.3) grow with N, while a balanced schedule keeps each rank's bytes nearly constant; section 8 quantifies the gap.
2. **Distinction**: Unlike point-to-point communication, a collective defines one operation over a process group. Ranks may enter at different times, and some algorithms allow one rank to complete before another has entered; correctness depends on matching the operation sequence and argument contract across ranks, not on barrier semantics.
3. **Common pitfall**: Treating a non-blocking collective as complete when its initiation call returns. The returned request or stream event represents work in flight. A dependent consumer must wait for completion, and a late rank can extend that dependency even though the collective is not a barrier.

The primitive choice is the first scaling decision because it fixes which ranks must coordinate and which result each must obtain. The algorithm and placement then determine the traffic and its limiting resource. Different model architectures require different operations, and choosing a broader operation than the workload needs can create unnecessary bottlenecks.

The six core primitives

With the contracts fixed, table 0.42 adds what the figure cannot show, the typical use and the cost of each primitive. Its rows run from the root-centered patterns (Broadcast and Reduce), through the three in which every rank contributes to and receives part or all of one shared tensor (AllReduce, AllGather, and ReduceScatter), to AllToAll, the only one in which every pair of ranks exchanges its own data. That order describes routing, not cost. ReduceScatter and AllGather each move half of

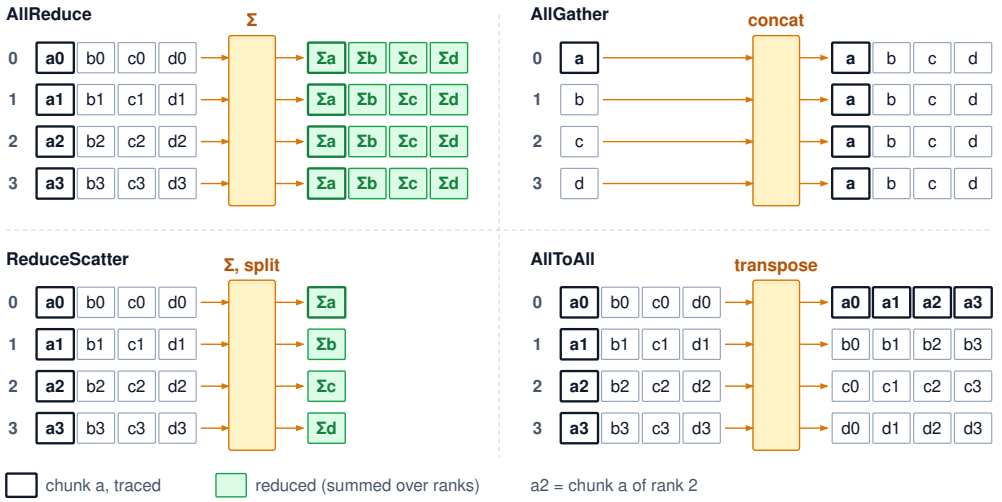


Figure 0.69: Four central collective primitives: Standardized patterns for group communication in distributed systems. In each panel the four rows are ranks 0 to 3, read left to right from each rank's input, through the collective, to what each rank holds afterward. (1) AllReduce: all aggregate and all receive the result. (2) AllGather: all send to all and concatenate. (3) ReduceScatter: all aggregate and results are distributed in shards. (4) AllToAll: every process sends unique data to every other process. The two foundational primitives Broadcast (rank 0 sends to all) and Reduce (all aggregate to rank 0) compose the patterns shown here and are defined in the surrounding prose.

AllReduce's bytes, because each is one phase of it. The selection rule is to choose the contract whose output matches what the next computation consumes, since a broader result than the model needs (a full AllReduce where the optimizer only reads a shard, for example) moves bytes that no rank uses. The cost column previews the algorithms derived in section 8, using N for the participating rank count, M_{coll} for the full tensor, and M for the per-rank AllToAll input payload. For AllReduce, the full tensor has the same byte size as each rank's input payload, the convention used in the following algorithm models. Two schedules appear there. A ring passes chunks between neighbors, and the simple full-message tree reduces up a binary tree and broadcasts back down it, forwarding the whole tensor at each of its $2\log_2 N$ levels. For Broadcast and Reduce, the table counts startup rounds and bytes per tree edge separately; each traverses one tree depth, so the elapsed transfer cost accumulates across its levels. The Tree AllReduce derivation combines those two traversals.

Table 0.42: The Six Collective Primitives: What each primitive computes, its primary use, and its communication cost, ordered from root-centered patterns (Broadcast, Reduce) to the fully destination-specific AllToAll. The order describes routing, not cost.

Primitive	What it does	Primary use case	Communication cost
Broadcast	One sender transmits data to all receivers.	Distribute initial model weights from rank 0 at startup, across all parallelism strategies.	$\mathcal{O}(\log N)$ startup rounds; $\mathcal{O}(M_{\text{coll}})$ bytes per tree edge. Elapsed byte-transfer time also grows with tree depth.
Reduce	Aggregate data from all workers (sum, min, max) to a single root.	Aggregate validation metrics such as loss and accuracy to a logging process.	$\mathcal{O}(\log N)$ startup rounds; $\mathcal{O}(M_{\text{coll}})$ bytes per tree edge. Elapsed byte-transfer time also grows with tree depth.
AllReduce	Aggregate from all workers, then distribute the result to all ($y_i = \sum_{j=0}^{N-1} x_j$ for all i).	Data parallelism: synchronize gradients so every GPU computes the same update.	Ring is bandwidth-optimal at $2\frac{N-1}{N}\frac{M_{\text{coll}}}{\beta}$ but $\mathcal{O}(N)$ latency; the simple full-message Tree model gives $\mathcal{O}(\log N)$ latency with more byte-transfer work.

Primitive	What it does	Primary use case	Communication cost
AllGather	Each worker's data goes to all; the result concatenates every input ($x_i \to [x_0, \ldots, x_{N-1}]$).	Sharded data parallelism (FSDP/ZeRO): collect sharded parameters before a forward or backward pass.	Ring $\frac{N-1}{N}\frac{M_{\text{coll}}}{\beta}$; resident data grows from an M_{coll}/N shard to the full M_{coll}.
ReduceScatter	Reduce across workers, but scatter so each keeps a distinct chunk (worker i receives the i-th block of $\sum x_j$).	Sharded data parallelism: reduce gradients while keeping them sharded to save memory.	Ring $\frac{N-1}{N}\frac{M_{\text{coll}}}{\beta}$; the same ring byte-transfer term as AllGather, with reduction.
AllToAll	The most general pattern: worker i sends a distinct chunk to each worker j, a distributed matrix transpose.	MoE routing tokens to experts; DLRM exchanging embedding lookups across workers.	Per-worker payload $\frac{N-1}{N}M$; the limiter can arise from startup, injection/reception, bisection, oversubscription, routing, granularity, or skew.

Ring achieves AllReduce's bandwidth-optimal cost while the simple full-message Tree model trades bandwidth for logarithmic latency (Patarasuk and Yuan 2009; Thakur et al. 2005).

AllReduce decomposes into ReduceScatter followed by AllGather. The decomposition is operational as well as mathematical, since Ring AllReduce's first phase is a ReduceScatter and its second phase is an AllGather. ReduceScatter performs arithmetic, so it does not invert AllGather despite reversing the direction of shard expansion. Full ZeRO-style sharding and PyTorch FSDP[7] use related partitioning strategies: AllGather parameter shards before a module needs them and ReduceScatter gradients after backward so each rank retains only its shard for the optimizer step (Rajbhandari et al. 2020). Sharding parameters, gradients, and optimizer state across workers reduces persistent model-state memory roughly by $N\times$, while temporary full-parameter buffers and prefetching determine peak memory.

The same AllGather/ReduceScatter pair also appears in sequence parallelism, where an AllGather reconstructs the activation view needed for a local operation and a later ReduceScatter redistributes the result along the sequence dimension. A primitive's semantics stay fixed even when the tensor dimension being sharded changes, so every schedule developed for the pair applies to both uses.

Beyond defining data-movement dependencies, collective operations carry explicit interface and numerical contracts. At the interface level, every rank in a process group must issue collectives in a compatible sequence; mismatched operation orders can deadlock or pair unrelated buffers. Operations also enforce shape and type contracts. AllReduce requires matching element counts and datatypes across all ranks, whereas variable-size exchanges require explicit per-destination counts and displacements. These invariants form the contract between the parallel decomposition and the communication runtime: the model decides which tensor slices each rank owns, and the collective contract guarantees that those slices can be recombined deterministically.

Reduction order introduces a second, numerical contract. Floating-point addition is not associative, so ring, tree, and switch-assisted reductions may accumulate the same values in different orders and produce different low-order bits (Goldberg 1991). A correct AllReduce therefore guarantees the specified reduction over all contributions, not bitwise identity across algorithms, rank counts, or hardware. Reproducibility-sensitive workloads must fix the algorithm and process-group configuration or use a reproducible accumulation scheme; ordinary training should treat small order-dependent differences as numerical behavior while still checking for larger rank disagreement.

The contrast between AllToAll and AllReduce highlights a fundamental difference in how collective operations scale with cluster size.

> Systems Perspective 6.1: AllToAll vs. AllReduce: Why scale differs
>
> Ring AllReduce can pipeline a uniform payload through neighbor exchanges. AllToAll presents a different scaling problem because every rank has destination-specific traffic, but the logical peer count alone does not determine its cost.
>
> An AllToAll over N ranks creates $N(N-1)$ logical source-destination transfers, yet each rank's aggregate payload can remain fixed under weak scaling. Its lower bound is governed by the

7 **FSDP (Fully Sharded Data Parallel)**: PyTorch's fully sharded implementation follows the ZeRO-3 idea of sharding parameters, gradients, and optimizer states across N accelerators (Rajbhandari et al. 2020). The trade-off is communication frequency, because full sharding adds layer-level AllGather and ReduceScatter operations instead of relying only on data parallelism's step-level AllReduce, making it more sensitive to the α_{eff} overhead.

largest of four terms: source injection time, destination reception time, traffic crossing the fabric bisection, and per-message startup or scheduling overhead. Oversubscription and routing determine how much physical capacity those flows share. Message granularity determines how often they pay α. Routing skew determines whether one destination or link becomes the critical path. A full-bisection network carrying balanced, coarse-grained traffic can therefore scale well despite the quadratic logical connection count, whereas an oversubscribed fabric or skewed expert assignment can stall at much smaller N.

Expert parallelism and large-scale recommendation systems can reach a communication wall earlier than standard data parallelism when their traffic exhausts injection, reception, or bisection capacity, or when routing and destination skew create hotspots. The primitive determines the traffic matrix; the physical fabric and routing distribution determine the scaling ceiling.

To make the AllToAll pattern concrete, consider a mixture-of-experts model with 64 experts distributed across 8 GPUs (8 experts per GPU). During each forward pass, a gating network assigns each input token to one or more experts. The tokens assigned to experts on remote GPUs must be physically moved to those GPUs before computation can proceed, and the results must be moved back afterward.

Napkin Math 6.3: AllToAll for MoE token routing

Problem: An MoE model processes a batch of 4096 tokens across 8 GPUs (512 tokens per GPU). Each token is a 2048-dimensional hidden state in BF16 (4.096 KB per token). The gating network assigns each token to exactly 1 of 64 experts (8 experts per GPU). Assuming uniform routing (each expert receives 64 tokens), how much data does each GPU send and receive?

Math:

Each GPU holds 512 tokens that need to reach 64 different experts across 8 GPUs. With uniform routing, each GPU sends 64 tokens to each of the other 7 GPUs (keeping 64 tokens local).

- Data per GPU-to-GPU transfer: 64 tokens $\times$ 4.096 KB/token = 262.144 KB
- Total data sent per GPU: 7 $\times$ 262.144 KB = 1.84 MB
- Total data received per GPU: 1.84 MB (symmetric)

Latency Analysis (InfiniBand NDR, $\alpha = 1.5$ µs, $\beta = 50$ GB/s):

Each of the 7 transfers is a 262.144 KB message. From the α-β model: T_{transfer} = 1.5 µs + 5 µs = 6.5 µs per transfer.

If serialized: 7 $\times$ 6.5 µs = 45.5 µs. If all 7 transfers are issued concurrently, they still share the GPU's 50 GB/s injection port. The aggregate injection lower bound is therefore $\alpha +$ total bytes sent$/\beta = 38.2$ µs, before contention and additional collective overhead. Full duplex permits simultaneous sending and receiving; it does not provide one full-bandwidth outgoing port per peer.

Systems insight: The injection result is only a lower bound. If the topology's usable bisection bandwidth is $\text{BW}_{\text{bisect}}$ and V_{cut} bytes must cross its minimum cut, the exchange also obeys $T \geq V_{\text{cut}}/\text{BW}_{\text{bisect}}$. Oversubscription reduces $\text{BW}_{\text{bisect}}$, fine-grained peer messages add startup cost, and expert skew raises the maximum receive volume above the uniform estimate. The forward pass runs the AllToAll twice per layer, once for token dispatch and once for result collection; training also communicates gradients during backward.

With the six contracts defined, every row of the travel manifest in table 0.39 names a primitive whose output and traffic pattern are precise. The sharded data-parallel row repays closer study, because sharding changes how often those primitives run rather than which ones run.

FSDP communication patterns

Fully sharded data parallelism, developed in chapter 15 as a memory technique (Rajbhandari et al. 2020), keeps data parallelism's mathematics but changes how its communication is invoked. A fully

sharded rank holds only $1/N$ of the parameters, so it calls AllGather before each layer's forward pass to reconstruct that layer and ReduceScatter after the backward pass to leave each rank the gradients for its own shard, then frees the temporary full parameters.

Chapter 15 counted the consequence, a displacement of overhead from memory to communication frequency. With one communication group per layer, a model with N_L layers issues $2N_L$ collective calls per step where unbucketed data parallelism issues one AllReduce, or about $3N_L$ when parameters are resharded after forward and gathered again for backward. The byte volume changes far less. When parameters and gradients travel at the same width and the group is large, each rank sends roughly the AllReduce's $2M_{\text{coll}}$, or about $3M_{\text{coll}}$ ($1.5\times$) with resharding, where M_{coll} is the model-sized payload without optimizer state; different parameter and reduction datatypes shift that ratio. The call count carries its own price, because every call pays a startup cost. An effective startup cost α_{eff} contributes approximately $2N_L\alpha_{\text{eff}}$ per step before overlap, or $3N_L\alpha_{\text{eff}}$ with resharding, so FSDP is more sensitive to α_{eff} than an unbucketed data-parallel reduction even though its bytes barely change. The counts describe one grouping policy, since FSDP units need not coincide with layers and bucketed data parallelism also splits its reduction to enable overlap. FSDP implementations mitigate the startup cost through prefetching and communication-stream pipelining, but the relevant α_{eff} must come from a matched collective benchmark rather than a wire-latency specification.

Selecting the right collective algorithm at each invocation requires distinguishing transfer cost from dependency exposure. An FSDP AllGather is latency-sensitive in the scheduling sense, because a layer cannot compute until its full parameters arrive. Its transfer can nevertheless be bandwidth-bound when the parameter tensor is large. Prefetching can hide part of that gather, while a ReduceScatter can overlap with the remaining backward computation. Neither dependency alone selects Ring or Tree; message size, group size, topology, and the available overlap window jointly determine the useful schedule.

↩ The reshard-after-forward ZeRO-3/FSDP schedule and its $1.5\times$ communication volume relative to DDP are established in section 4.

The primitives specify what must be communicated, and sharding shows how often a training step invokes them. The remaining question is how to execute them efficiently on real networks. The most performance-critical primitive, AllReduce, admits multiple algorithmic implementations whose latency and bandwidth characteristics differ sharply. For the 70B gradient across 1,000 ranks, a simple tree that forwards the whole tensor at every level (the schedule section 9 examines) pays about $2\log_2 1000 \approx 20$ full-message transfers against the ring's two, a tenfold difference in byte time, so this choice can decide whether gradient synchronization can be hidden at all.

AllReduce Algorithms and Topologies

A correct AllReduce must give each of 1,000 GPUs the reduced sum of all 1,000 gradient contributions, subject to the floating-point reduction contract, and the algorithm that delivers it sets the cluster's scaling ceiling. The naive answer, in which every GPU sends to one central server whose single network link must carry every worker's gradient, fails first, which makes it the right place to start.

Naive approaches vs. the bandwidth bottleneck

Consider a naive implementation using a Parameter Server (Star topology), with a dedicated server in addition to the workers. All N workers send their gradients to that server; it sums them and sends the result back. The server must receive $N \times M$ bytes and send $N \times M$ bytes, so its bandwidth budget grows as $T_{\text{comm}} \propto N \times M/\beta$. At 1,000 GPUs, concentrating those transfers at one server creates a scaling bottleneck even if the arithmetic is fast.

This naive approach captures the pressure that early distributed ML frameworks had to manage: parameter-server systems receive, aggregate, and redistribute model updates through a server tier, while practical implementations shard the parameter space to spread that load (Dean et al. 2012; Li et al. 2014). Sharding reduces the per-server traffic from $N \times M$ to $N \times M/K_{\text{srv}}$ (where K_{srv} is the number of servers), but the server tier still grows as workers and model state grow, and it introduces additional complexity in parameter partitioning and consistency management.

The bottleneck comes from concentration, not from total traffic. Every AllReduce algorithm moves more total data as workers are added, because every worker's contribution must be combined and every worker must receive the result. A star, however, routes all of that traffic through one endpoint, so the server's time grows as $N \times M/\beta$, while a ring spreads the same work so that each rank sends

about $2M$ and its time stays near $2M/\beta$ however large N becomes. The ratio of the two is about $N/2$, so at 1,024 workers the server's byte time is roughly 500× the ring's, before startup, arithmetic, or contention are counted. Bandwidth optimality makes that comparison precise by measuring an algorithm's required byte movement against a lower bound under a stated communication model, which the next derivation supplies for AllReduce.

War Story 6.1: When the parameter server became the bottleneck (2017)

Context: In 2017, Alexander Sergeev and Mike Del Balso's team at Uber open-sourced Horovod as part of Uber's Michelangelo ML platform, where TensorFlow training jobs needed to scale across many GPUs without forcing every model author to rewrite large portions of training code (Sergeev and Balso 2018).

Mechanism: TensorFlow's stock distributed training relied on a parameter-server pattern that concentrated gradient traffic through a central tier. As worker count N grew, the central server link saturated, degrading scaling efficiency.

Impact: Scaling training beyond a single node resulted in severe throughput bottlenecks and required complex, model-specific parameter partitioning.

Fix: Uber adopted Baidu's ring-allreduce algorithm (Gibiansky 2017), wrapping bandwidth-optimal collective reduction behind a lightweight API that replaced parameter servers with ring communication.

Systems lesson: A collective algorithm is also a developer interface. Scaling improves when the communication primitive is both bandwidth efficient and easy enough that teams actually use it correctly.

The bandwidth-optimal lower bound

Every specific algorithm can be measured against a lower bound for point-to-point AllReduce with an associative, commutative reduction and no in-network reduction or compression. Reducing one independent data item across N ranks and distributing its result requires at least $2(N-1)$ item transfers in aggregate (Patarasuk and Yuan 2009). The count has two halves. Combining N contributions that start on N different ranks takes at least $N-1$ transfers, because each transfer combines at most two partial sums and so reduces the number of separate partial sums by at most one. Delivering the finished value to the other $N-1$ ranks then takes at least one transfer each. For an M-byte tensor, the minimum aggregate sent volume is therefore $2(N-1)M$ bytes. At least one rank must send the average share, $2(N-1)M/N$ bytes; a balanced algorithm assigns that share to every rank.

Take β as each rank's available send bandwidth, with equal receive bandwidth that can operate simultaneously. Dividing the required sent volume by β gives the full-duplex bandwidth lower bound:

$$T^{\text{min}}_{\text{bandwidth}} = \frac{2(N-1)}{N} \cdot \frac{M}{\beta}$$

As N grows large, the bandwidth lower bound approaches $2M/\beta$, independent of N. Ring AllReduce matches the required byte volume under this model; startup and local reduction still add time (Patarasuk and Yuan 2009; Thakur et al. 2005). On a 64-GPU cluster synchronizing the chapter's 1 GB reference buffer over 50 GB/s links, the ring's byte term is about 39.4 ms. The simple full-message tree, which forwards the whole tensor once per level on the way up and once per level on the way down (the schedule section 9 develops), pays $2\log_2 64 = 12$ full-message transfers, about 240 ms. The byte-term difference of roughly 200 ms per step would accumulate to about 5.6 hours over a 100,000-step run if fully exposed. Actual wall-clock savings also depend on startup, placement, and overlap.

Ring AllReduce

Ring AllReduce[8] arranges nodes in a logical ring ($0 \to 1 \to \ldots \to N-1 \to 0$). Each node sends to its

[8] **Bandwidth-Optimal**: Under the point-to-point model above, Ring AllReduce sends $2(N-1)M/N$ bytes per rank and receives the same amount. With simultaneous full-duplex transfers at bandwidth β in each direction, its bandwidth time is $2(N-1)M/(N\beta)$. Adding send and receive bytes would double-count elapsed time.

successor while receiving from its predecessor. The chunk schedule distributes the required byte volume evenly across ranks, achieving the bandwidth lower bound in the ideal endpoint model (Patarasuk and Yuan 2009).

The algorithm splits the vector of size M into N chunks and then alternates communication and local reduction in two phases, a ReduceScatter phase (often called scatter-reduce) followed by an AllGather phase. Algorithm 0.2 states the mechanics before the figure and trace make the same dataflow concrete.

Algorithm 0.2 Ring AllReduce

Require: N ranks in a logical ring; each rank i starts with tensor $\mathbf{g}_i$ of M bytes, split into N chunks
Ensure: every rank holds $\mathbf{g} = \sum_{i=0}^{N-1} \mathbf{g}_i$

1: assign the ring order $0 \to 1 \to \ldots \to N-1 \to 0$
2: **for** $N-1$ ReduceScatter steps **do**
3: each rank sends one chunk (or partial sum) right, receives one from the left, and adds it into the matching local sum
4: **end for**
5: each rank now owns one fully reduced chunk of $\mathbf{g}$
6: **for** $N-1$ AllGather steps **do**
7: each rank forwards a reduced chunk around the ring and stores the chunks it receives
8: **end for**
9: **return** the complete reduced tensor $\mathbf{g}$, held on every rank

Across the $2(N-1)$ send/receive rounds each rank moves M/N bytes per round, for $2(N-1)M/N$ bytes sent and the same received. The bandwidth term therefore reaches the information-theoretic lower bound, while the latency term grows as $2(N-1)\alpha$. Figure 0.70 traces this two-phase state progression across a four-GPU ring with wrap-around links. In row (a), $N-1=3$ ReduceScatter steps circulate gradient chunks A through D until each GPU holds exactly one fully reduced partition (green ΣA through ΣD). In row (b), $N-1=3$ subsequent AllGather steps forward those finished shards around the ring until every device holds the complete sum.

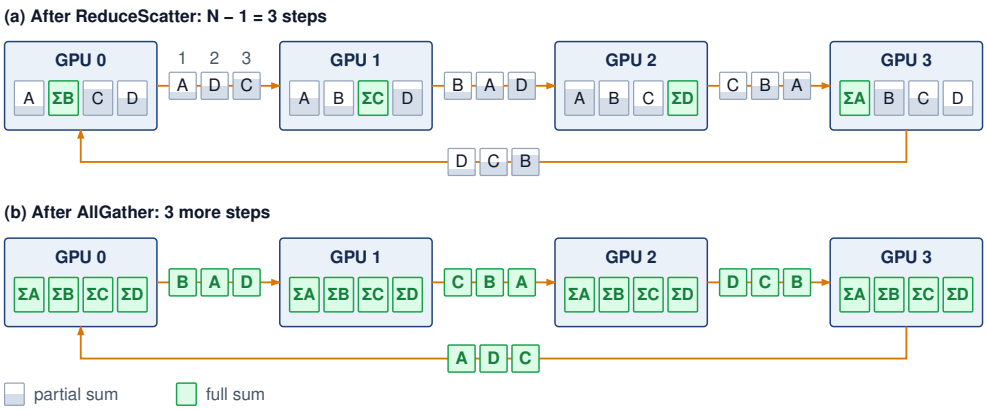


Figure 0.70: Ring AllReduce data flow: Four GPUs in a logical ring, each gradient split into chunks A to D; the wrap-around link closes the ring from GPU 3 back to GPU 0. (a) After the $N-1$ ReduceScatter steps, in which every GPU sends one chunk to its neighbor and adds the chunk it receives, each GPU holds one fully reduced chunk. (b) After $N-1$ AllGather steps that forward those finished chunks around the same ring, every GPU holds the full sum. Every link carries data in every step, so each GPU sends $2\frac{N-1}{N}M$ bytes in total, while the $2(N-1)$ steps each pay one startup latency α.

In the ideal schedule in figure 0.70, every logical ring edge carries a chunk in each round. Each node sends exactly $2(N-1)/N \cdot M$ bytes across both phases, matching the stated byte-volume lower bound. Logical edges may share physical links, however, and startup, local reduction, or

contention can leave transfer capacity unused. Byte optimality does not guarantee peak physical-link utilization.

To make the ring algorithm concrete, consider a two-phase example with 4 GPUs reducing a vector of 4 elements by summation. Each GPU i starts with a local gradient vector $\mathbf{g}_i = [a_i, b_i, c_i, d_i]$. The vector is split into 4 chunks (one per GPU), and the algorithm proceeds through two phases.

Example 6.1: Ring AllReduce: Two-phase example (4 GPUs)

Scenario: Four GPUs ($0 \to 1 \to 2 \to 3 \to 0$) perform a Ring AllReduce on local vectors $[1,5,3,7]$, $[2,6,4,8]$, $[3,7,5,9]$, and $[4,8,6,10]$ to compute the element-wise sum $[10,26,18,34]$.

Diagnosis: The trace has to show three properties of the schedule, namely that it takes $2(N-1) = 6$ steps, that every GPU sends and receives in every step, and that each step moves only one chunk. Ring AllReduce splits each vector into $N = 4$ chunks a, b, c, d. In ReduceScatter step s ($s = 1,2,3$), GPU i sends its running copy of chunk $(i-s+1) \bmod 4$ to GPU $(i+1) \bmod 4$, which adds it to its own copy. After the third step, each GPU owns one fully reduced chunk. In AllGather step s, GPU i forwards the finished chunk it completed or received most recently to GPU $(i+1) \bmod 4$, which stores it without arithmetic. Table 0.43 records, for all six steps, the chunk each GPU receives and the value it then holds.

Table 0.43: Ring AllReduce Trace: The chunk each of four GPUs receives in each of the six steps. In the three ReduceScatter steps the GPU adds the incoming chunk to its running partial sum; in the three AllGather steps it stores an already finished sum.

Step	GPU 0	GPU 1	GPU 2	GPU 3
ReduceScatter 1	d: 17	a: 3	b: 13	c: 11
ReduceScatter 2	c: 14	d: 25	a: 6	b: 21
ReduceScatter 3	b: 26	c: 18	d: 34	a: 10
AllGather 1	a: 10	b: 26	c: 18	d: 34
AllGather 2	d: 34	a: 10	b: 26	c: 18
AllGather 3	c: 18	d: 34	a: 10	b: 26

Every cell in every row is filled, so every GPU receives (and, symmetrically, sends) one chunk in every step, and after the sixth step every GPU holds [10, 26, 18, 34].

Systems lesson: Ring AllReduce achieves the optimal byte volume under the stated model: each GPU sends $2\frac{N-1}{N}M$ total bytes, approaching $2M$ as N grows, while the startup-round count continues to grow. Physical-link utilization also depends on placement and runtime overhead.

Checkpoint 6.2: Ring AllReduce mechanics

Verify your understanding of bandwidth-optimal reduction:

- ☐ **Step count**: calculate the number of sequential steps required for a ring of N GPUs to complete the full AllReduce.
- ☐ **Bandwidth optimality**: explain why Ring AllReduce is bandwidth-optimal, including how many times each byte of the total message M traverses the network per GPU.
- ☐ **Straggler impact**: determine the impact on total collective completion time when one GPU in the ring is 50 percent slower than the others.

☐ **Send/receive duality**: assess the True or False claim that every GPU is both a sender and a receiver in every step of Ring AllReduce.

The performance follows directly from the two-phase schedule in example 6.1. Each node sends and receives $\frac{M}{N}$ bytes in each of the $2(N-1)$ steps.

$$T_{\text{ring}} = \underbrace{2(N-1)\alpha}_{\text{Latency Term}} + \underbrace{2\frac{N-1}{N}\frac{M}{\beta}}_{\text{Bandwidth Term}}$$

The bandwidth term approaches $2M/\beta$ as $N \to \infty$, reaching the full-duplex lower bound: each rank sends nearly $2M$ bytes across the two phases and receives the same amount concurrently. In contrast, the latency term scales linearly with N. Across 10,000 nodes, 20,000 sequential hops accumulate substantial latency, which explains why Ring AllReduce becomes uncompetitive for small payloads.

Napkin Math 6.4: AllReduce cost for a 70B model

Problem: Consider a communication-only baseline for a 70B parameter model across 64 GPUs connected by InfiniBand NDR (50 GB/s per port). The bandwidth term barely depends on rank count, so this smaller group reproduces the bandwidth-only estimate from the opening definition while keeping the latency term visible. Each rank contributes a complete logical gradient buffer communicated in BF16 (2 bytes per parameter). This calculation isolates collective cost without establishing that the training state fits on each GPU. How long does one AllReduce take?

Step 1: Size the gradient payload. Each rank in this baseline contributes the complete logical gradient tensor of $7 \times 10^{10} \times 2$ bytes $= 140$ GB. A hybrid layout that partitions the model would instead reduce corresponding gradient shards within smaller groups and requires its own calculation.

Step 2: Apply the Ring AllReduce bandwidth formula.

$$T_{\text{bandwidth}} = 2 \cdot \frac{N-1}{N} \cdot \frac{M}{\beta}$$

Substituting: $T_{\text{bandwidth}}$ = 1.96875 × 140 GB / 50 GB/s ≈ 5,512.5 ms.

Step 3: Add the latency term.

$$T_{\text{latency}} = 2(N-1) \cdot \alpha$$

Substituting: $T_{\text{latency}} = 126 \times 1.5$ µs = 0.2 ms.


Step 4: Total communication time. Total: $T_{\text{ring}} \approx$ 5,512.5 ms + 0.2 ms ≈ 5,512.7 ms.

Systems insight: The modeled full-buffer AllReduce takes over five seconds under the stated link and rank assumptions, and almost all of it is the bandwidth term. Its effect on step time depends on how much remains exposed relative to useful computation. When it is fully exposed, halving it saves about 2.8 s per step; across a 100,000-step campaign on these 64 GPUs, that is roughly 4,900 GPU-hours of reserved accelerator time. Large-scale training systems can launch reductions for output-side gradients while input-side layers are still computing. Partitioned training also changes each rank's payload and participating group, so this complete-gradient budget must be recomputed for the actual layout.

Tree AllReduce

Ring AllReduce's byte efficiency comes with many startup rounds. As the group grows, the $2(N-1)\alpha$ term can exceed the byte-transfer term for a fixed payload; the crossover depends on the measured path parameters. Tree AllReduce reduces the number of dependent rounds. In the simple reduce phase, pairs combine contributions and forward partial sums toward a root, taking $\log_2 N$

steps for a balanced power-of-two group. The broadcast phase distributes the result in another $\log_2 N$ steps. This shorter dependency chain motivates the comparison before bandwidth costs are counted.



Ring latency grows with N; tree stays logarithmic.

The simple full-message tree loses parallel activity as contributions converge. A ring activates all N logical edges in each round. In a pairwise tree reduction, the first round has $N/2$ senders and $N/2$ receivers; receiving is useful work, not idleness. The next round has $N/4$ senders and $N/4$ receivers, and the final reduction exchange involves two ranks while the remaining $(N-2)$ have completed their upstream contribution. Sending the full message through successive levels adds byte-transfer time along the dependency path. This is a limitation of the illustrated schedule, not every tree-based implementation or every physical link mapping.

The resulting time complexity depends on the specific tree variant. A simple reduce-then-broadcast tree has logarithmic latency but nonuniform traffic and root/interior bottlenecks. Recursive doubling, in which partners at doubling distances exchange the entire tensor in each of $\log_2 N$ rounds, has the same logarithmic round count and incurs $\mathcal{O}(\log N)$ full-message bandwidth per rank. The following simplified model captures the latency advantage and the potential bandwidth penalty of tree-like collectives:

$$T_{\text{tree-like}} \approx \underbrace{2\log_2 N \cdot \alpha}_{\text{Latency}} + \underbrace{2\log_2 N \frac{M}{\beta}}_{\text{Bandwidth penalty in full-message exchange variants}}$$

The latency term is logarithmic ($\mathcal{O}(\log N)$): for 1024 nodes, Ring needs 2046 steps while Tree needs only 20, and that $100\times$ reduction in steps makes Tree attractive for small, frequent collectives across large process groups, such as scalar reductions, control messages, or small-batch activation reductions. The bandwidth term carries the penalty, because tree-like algorithms can underutilize links or concentrate traffic on interior links, and recursive-doubling-style full-message exchanges add a $\log_2 N$ bandwidth factor; these penalties make naive tree variants a poor choice for data parallelism's large gradient AllReduce, where bandwidth efficiency determines whether the network is saturated or partially idle.

For large-scale data parallelism, this bandwidth penalty decides the comparison whenever the implementation repeatedly exchanges full messages or creates root/interior bottlenecks. In the 64-GPU example of section 8, the simple tree already pays about 6.1× the ring's byte time. For a 70B-parameter model's 140 GB gradient AllReduce across 1,000 GPUs, a bandwidth-inefficient tree-like variant can erase the latency advantage that motivated it. Optimized double-tree algorithms exist precisely to keep logarithmic latency without imposing that naive bandwidth penalty.

Small activation reductions provide a useful case for fewer startup rounds. For an eight-GPU group communicating a 1 MB tensor, the simple model reduces Ring's $2(8-1)\alpha = 14\alpha$ to Tree's $2\log_2(8)\alpha = 6\alpha$, but Tree's byte term remains about $3.4\times$ Ring's. Whether the saved startups outweigh those extra byte transfers depends on the measured latency and bandwidth. Tensor-parallel collectives also have a scheduling constraint independent of this comparison: a layer that needs the reduced activation must wait for it. A critical-path dependency does not by itself imply a latency-dominated transfer or select a tree algorithm.

Recursive halving-doubling (butterfly)

The simple full-message Tree reduces startup rounds but repeats more byte-transfer work than Ring. Recursive halving-doubling, sometimes called the Butterfly algorithm, combines logarithmic rounds with the optimal byte volume under the flat-network model. It pairs ranks exactly as recursive doubling does, but where recursive doubling exchanges the whole tensor in every round, halving-doubling halves the exchanged region in each ReduceScatter round and doubles it in each AllGather round, and that difference removes the $\log_2 N$ byte penalty. For a power-of-two group, it uses $2\log_2 N$ rounds: $\log_2 N$ ReduceScatter rounds followed by $\log_2 N$ AllGather rounds. A partner-bit index k selects the XOR pairing with mask 2^k. The ReduceScatter trace below visits those bits in increasing order as messages shrink; the matching AllGather reverses that order as the assembled result grows.

In the ReduceScatter phase (first $\log_2 N$ rounds), GPU i partners with GPU $i \oplus 2^k$ (XOR of indices). The partners retain complementary halves of the current tensor region and send the other half. Each

adds the received contribution to the matching half it retained. After $\log_2 N$ rounds, each GPU owns M/N bytes of the fully reduced result. AllGather traverses the partner bits in reverse, exchanging completed regions and doubling the data held at each rank until every rank has the full result.

The performance of Recursive Halving-Doubling is:

$$T_{\text{butterfly}} = 2\log_2 N \cdot \alpha + 2\frac{N-1}{N} \cdot \frac{M}{\beta}$$

This achieves the best of both worlds: logarithmic latency ($\mathcal{O}(\log N)$, like Tree) and bandwidth-optimal data movement ($2(N-1)/N \cdot M/\beta$, like Ring). The catch is that it requires nonneighbor communication (GPU i must communicate with GPU $i \oplus 2^k$, which may be physically distant), and it requires N to be a power of two. For clusters where N is not a power of two, additional complexity is needed to handle the irregular cases.

Recursive halving-doubling is used in MPI-style collective implementations and is useful as a theoretical point in the latency-bandwidth trade-off (Thakur et al. 2005). NVIDIA's GPU collective backend, the NVIDIA Collective Communications Library (NCCL), offers implementation families that include ring, tree-derived, hierarchical, NVLink/NVSwitch-aware, and pattern-aware choices, with exact names and availability changing by version and topology (Jeaugey 2017; NVIDIA 2026b). Whatever a particular release calls them, practical communication libraries select algorithms through a topology-aware cost model because nonlocal communication patterns can create contention on shared network links that erodes theoretical advantages.

The partner distance is where topology enters. Consider the ReduceScatter phase for 8 GPUs placed four per node on two nodes, GPUs 0–3 on the first and GPUs 4–7 on the second, which proceeds in $\log_2(8) = 3$ rounds. In round $k = 0$, each GPU i partners with GPU $i \oplus 1$, pairing neighbors: (0,1), (2,3), (4,5), (6,7). They exchange half their data and reduce. In round $k = 1$, the distance doubles: GPU i partners with GPU $i \oplus 2$, creating pairs (0,2), (1,3), (4,6), (5,7). In round $k = 2$, the distance doubles again: GPU i partners with GPU $i \oplus 4$, creating pairs (0,4), (1,5), (2,6), (3,7).

Physical placement determines the cost of these logical pairings. Rounds $k = 0$ and $k = 1$ pair GPUs within a node, but in round $k = 2$ every GPU on the first node exchanges with one on the second, so that round crosses the node boundary. On eight-GPU nodes the same crossing would appear one round later, at $k = 3$ in a 16-rank group. In a separate 1,024-rank example, the final ReduceScatter round pairs GPU i with GPU $i \oplus 512$. If the two rank halves occupy different racks, those exchanges share the inter-rack fabric. The algorithm's logarithmic rounds and optimal byte volume therefore do not establish its runtime advantage; placement, shared paths, and the changing chunk size in each round must enter the comparison.

Double binary tree

NCCL can use a double binary tree for many message sizes and topologies, which addresses the bandwidth inefficiency of a standard binary tree while allowing topology-aware tree placement (Jeaugey 2017; NVIDIA 2026b). The idea is to construct two independent binary trees with complementary interior-node roles, then run both trees simultaneously, each carrying half the data.

The complementary-tree construction balances endpoint work by making ranks that act as interior nodes in one tree act as leaves in the other. With eight ranks, build the first tree by labeling the nodes of a binary tree in the order of an in-order traversal (left subtree, then node, then right subtree). In a balanced seven-node tree labeled from 0, in-order traversal puts the leaves at the even ranks 0, 2, 4, and 6 and the interior nodes at 1, 3, and 5; in one simple construction the eighth rank, 7, joins as one more interior node above that tree. The odd ranks 1, 3, 5, and 7 thus form the first tree's interior and the even ranks are its leaves; the second tree shifts every rank by one position, so the even ranks become its interior and the odd ranks its leaves. Each tree carries half the tensor, $M/2$, and the two halves never meet.

Two further steps bring the byte term down from the simple tree's $2\log_2 N \cdot M/\beta$ to about $2M/\beta$. First, each tree pipelines its half in small chunks, so while one chunk moves up from the leaves, the next is already leaving them and every level works at once; tree depth then adds startup rounds and a short pipeline fill, not repeated full-message transfers. Second, count what one rank sends during the reduce phase. As an interior node of one tree it combines the inputs of its (at most two)

children and forwards one $M/2$ stream to its parent, and as a leaf of the other tree it sends its own $M/2$ contribution, so it sends about M in total. The broadcast phase mirrors that traffic, for about $2M$ per rank across both phases, the same per-rank volume as the ring. This logical balance does not guarantee that every physical link stays busy or that both trees avoid shared fabric bottlenecks; rank placement and routing still matter.

The combined performance is approximately:

$$T_{\text{double-tree}} \approx 2\log_2 N \cdot \alpha + \frac{2M}{\beta}$$

The ideal bandwidth term approaches $2M/\beta$ while the startup-round count remains logarithmic. This combination makes Double Binary Tree a useful candidate across message sizes that penalize either the ring's many rounds or the simple tree's repeated full-message transfers. Complementary endpoint roles do not ensure disjoint physical paths, so topology-aware tree construction seeks a good placement, and measurements must establish the achieved rate under contention.

The algorithm crossover point

Plotting the three cost models for a 256-GPU group on a 200 Gbps fabric, over message sizes from 1 KB to 10 GB, shows the simple Tree and Ring curves intersecting near 1 MB (figure 0.71). At small sizes, fewer startup rounds favor the tree schedules; at large sizes, the simple full-message Tree pays more byte-transfer time. The Double Binary Tree curve includes illustrative overhead factors, so it approaches a comparable bandwidth-dominated regime without representing a measured library result. Table 0.44 summarizes the assumptions behind these candidate costs.

Table 0.44: AllReduce Algorithm Comparison: Each algorithm occupies a different point in the latency-bandwidth trade-off space. Ring and Butterfly achieve bandwidth optimality with different latency characteristics, while Double Binary Tree combines logarithmic depth with a near-optimal byte term. The Tree row refers to the simple full-message model, not every tree implementation.

Algorithm	Latency	Bandwidth	Bandwidth Optimal?	Constraint
Ring	$\mathcal{O}(N)\alpha$	$2\frac{N-1}{N}\frac{M}{\beta}$	Yes	None
Simple Tree	$\mathcal{O}(\log N)\alpha$	$\mathcal{O}(\log N)\frac{M}{\beta}$	No	None
Butterfly	$\mathcal{O}(\log N)\alpha$	$2\frac{N-1}{N}\frac{M}{\beta}$	Yes	$N = 2^m$
Double Tree	$\mathcal{O}(\log N)\alpha$	$\approx \frac{2M}{\beta}$	Near-optimal	Complementary tree construction

The intersection near 1 MB in figure 0.71 marks where the modeled Ring and simple Tree have equal total cost. It is an algorithm crossover, distinct from the startup-versus-transfer crossover for one message. Setting $T_{\text{ring}} = T_{\text{tree}}$ and solving for payload M identifies the point where Ring's lower byte cost compensates for its additional startup rounds:

$$T_{\text{ring}} = 2(N-1)\alpha + 2\frac{N-1}{N}\frac{M}{\beta}$$

$$T_{\text{tree}} = 2\log_2 N \cdot \alpha + 2\log_2 N \cdot \frac{M}{\beta}$$

For large N, $(N-1) \approx N$ and $\frac{N-1}{N} \approx 1$, so the ring pays a latency term proportional to N while moving each byte close to the bandwidth limit:

$$T_{\text{ring}} \approx 2N\alpha + \frac{2M}{\beta}, \quad T_{\text{tree}} \approx 2\log_2 N \cdot \alpha + \frac{2\log_2 N \cdot M}{\beta}$$

The tree has the opposite shape: logarithmic startup cost, but each message byte moves through more stages. Setting the estimates equal isolates the message size where the cheaper latency path stops compensating for the extra bandwidth work:

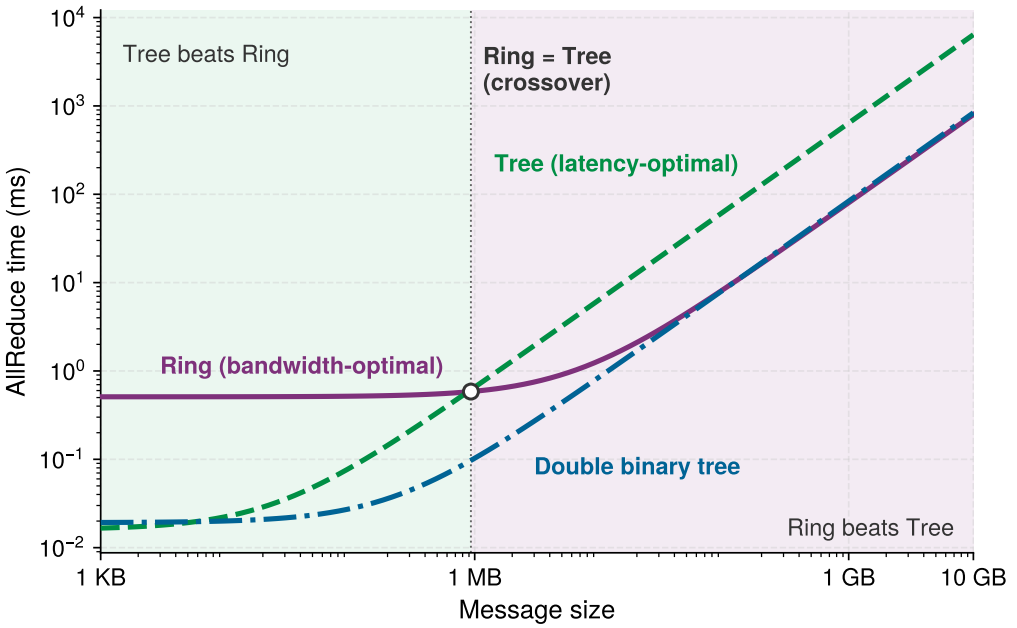


Figure 0.71: Algorithm crossover in collective communication: Performance analysis of Ring, Tree, and Double Binary Tree AllReduce algorithms across message sizes (1 KB to 10 GB) for a 256-GPU cluster with a 200 Gbps interconnect and $\alpha = 1$ µs. The Double Binary Tree curve applies modest latency and bandwidth overhead factors (1.2× and 1.05×) to its ideal cost.

$$2N\alpha + \frac{2M}{\beta} = 2\log_2 N \cdot \alpha + \frac{2\log_2 N \cdot M}{\beta}$$

$$\frac{2M}{\beta} - \frac{2\log_2 N \cdot M}{\beta} = 2\log_2 N \cdot \alpha - 2N\alpha$$

$$\frac{2M}{\beta}(1 - \log_2 N) = 2\alpha(\log_2 N - N)$$

Since $N \gg \log_2 N$ for large clusters, $(\log_2 N - N) \approx -N$ and $(1 - \log_2 N) \approx -\log_2 N$, yielding:

$$\frac{2M}{\beta}(-\log_2 N) \approx 2\alpha(-N)$$

$$\boxed{M_{\text{crossover}} \approx \frac{N \cdot \alpha \cdot \beta}{\log_2 N}}$$

The log-aware crossover formula is the large-N approximation to the exact crossover $M_{\text{crossover}}(N)$ derived in section 4. Within this two-algorithm model, Ring wins above the crossover because its byte savings exceed its extra startup cost; the simple Tree wins below it because the startup saving is larger. Optimized trees and topology-dependent rates require separate comparisons.

On the reference cluster, with the chapter's effective NDR $\alpha = 1.5$ µs and $\beta = 50$ GB/s across all 1,024 GPUs, the estimate gives $M_{\text{crossover}} \approx \frac{1{,}024 \times 1.5\ \mu\text{s} \times 50\ \text{GB/s}}{\log_2 1{,}024} = \frac{1{,}024 \times 1.5\ \mu\text{s} \times 50\ \text{GB/s}}{10} \approx 7.7$ MB. A gradient bucket of tens of megabytes or the full model gradient therefore sits on the ring side of the crossover, while a reduction of a few hundred kilobytes sits on the tree side. The two other configurations in this section depart from that anchor in stated ways. Figure 0.71 uses a smaller 256-GPU group on a slower 200 Gbps fabric with $\alpha = 1$ µs, which moves the curves' intersection down to about 1 MB, and notebook 6.5 uses a 64-GPU group on a still slower, higher-latency fabric, where a 1 MB buffer lands almost exactly on the crossover.

In practice, NCCL's algorithm selection is more nuanced than a simple two-way split. The Double Binary Tree algorithm offers logarithmic latency with near-optimal bandwidth, making it competitive with both Ring and Tree across a broad range of message sizes. NCCL also considers the number of channels (parallel communication streams), the network topology, and whether inter-node or intra-node links are being used. The effective selection logic resembles a multi-way decision tree indexed by (message size, GPU count, topology type) rather than a single crossover point.

Nevertheless, the crossover formula remains the essential mental model for understanding why libraries make the choices they do. When a library selects an unexpected algorithm, the crossover analysis provides the reasoning framework to evaluate whether the choice is correct or whether manual override is warranted.

Training frameworks decide which payloads reach that analysis. PyTorch DistributedDataParallel (DDP) groups gradient tensors into buckets (section 10), while FSDP groups parameter gathers and gradient reductions according to its sharding units. A bucket size alone does not locate a crossover, because rank count, effective startup cost, and available bandwidth also enter the comparison, so NCCL's algorithm selection must be evaluated for the actual invocation and topology rather than inferred from a nominal bucket-size range. A single 1 MB buffer on a slower fabric shows how close to the crossover a real bucket can sit.



Napkin Math 6.5: The ring vs. tree crossover

Problem: A cluster synchronizes a 1 MB buffer across 64 GPUs. The network has latency $\alpha = 10$ µs and bandwidth $\beta = 10$ GB/s. Which algorithm performs better: Ring or Tree?

Math:

Latency:

1. **Ring Latency**: $2(N-1)\alpha = 2 \times 63 \times 10$ µs = 1260 µs.
2. **Tree Latency**: $2(\log_2 N)\alpha = 2 \times 6 \times 10$ µs = 120 µs.

Bandwidth (note the difference):

3. **Ring Bandwidth**: $2\frac{N-1}{N}\frac{M}{\beta} \approx 2 \times \frac{1\text{ MB}}{10\text{ GB/s}}$ = 196.9 µs (optimal: each rank sends about $2M$ in total, the lower bound).
4. **Tree Bandwidth**: $2\log_2 N \cdot \frac{M}{\beta} = 12 \times \frac{1\text{ MB}}{10\text{ GB/s}}$ = 1200 µs (each level sends full message).

Table 0.45 sums the latency and bandwidth contributions into a head-to-head comparison:

Table 0.45: Ring vs. Tree AllReduce Timing for a 1 MB Buffer on 64 GPUs: Latency, bandwidth, and total-time terms with $\alpha = 10$ µs and $\beta = 10$ GB/s.

Algorithm	Latency	Bandwidth	Total
Ring	1260 µs	196.9 µs	1456.9 µs
Tree	120 µs	1200 µs	1320 µs

Tree wins, but only by 9 percent. For this 1 MB message, the payload is near the crossover point.

Systems insight: Ring's latency penalty (10× worse than Tree) nearly balances Tree's bandwidth penalty (6× worse than Ring). The log-aware crossover estimate predicts $M_{\text{crossover}} \approx N\alpha\beta/\log_2 N = 64 \times 10\text{ µs} \times 10\text{ GB/s}/6 \approx 1.1$ MB. At 1 MB, the payload is just below crossover, so Tree wins. At 10 MB, Ring would dominate.

The crossover point sits inside the range that gradient reductions can traverse as bucket sizes change. In this example, the 1 MB AllReduce lies near crossover, whereas a 10 MB DDP bucket is already above it. A fused bucket of 50–300 MB or the full 140 GB BF16 gradient of a 70B parameters model favors Ring over the simple Tree model even more strongly. These conclusions apply to the stated AllReduce configuration. An MoE token-routing payload of the same size

still requires an AllToAll schedule, and optimized tree or hierarchical implementations require their own cost comparison.

The crossover analysis makes algorithm selection a comparison under specified conditions. Communication libraries such as NCCL use tuning logic that accounts for message size, rank count, topology, and protocol. The simple model can identify a candidate worth benchmarking, but an apparent disagreement with the library is not proof that its choice is wrong. Compare measured collective duration and exposed training-step time before retaining an override.

Checkpoint 6.3: AllReduce algorithm selection

Verify your understanding of Ring vs. Tree AllReduce trade-offs:

- ☐ **Ring vs. Tree**: explain why Ring AllReduce achieves bandwidth-optimal communication (approaching $2M/\beta$) while the simple full-message Tree model incurs $\mathcal{O}(\log N)$ bandwidth overhead.
- ☐ **Crossover point**: calculate $M_{\text{crossover}}$ for a 256-GPU cluster with $\alpha = 5$ µs and $\beta = 50$ GB/s, then determine whether a 10 MB gradient buffer should use Ring or Tree.
- ☐ **ReduceScatter trace**: trace through the ReduceScatter phase of Ring AllReduce for 3 GPUs with a 3-element vector and verify that each GPU ends with the correct partial sum.
- ☐ **Latency limit**: explain why Ring AllReduce's $\mathcal{O}(N)$ latency hurts small, frequent collectives across a large process group, and why that penalty is modest inside an eight-GPU tensor-parallel group.

Hierarchical Communication

The AllReduce cost models in section 8 assume a flat network with uniform endpoint bandwidth. A multi-node GPU cluster instead has distinct local and cross-node communication paths. The DGX H100 nodes of the reference cluster show the gap at its starkest, with each GPU's NVLink capacity roughly nine times its one InfiniBand port, the bandwidth hierarchy that section 7 established.

Hierarchical communication is the response to that inequality. Intra-node links are abundant and fast, inter-node links are scarce and expensive, and the algorithm must shrink payloads before they cross the scarce tier whenever possible. This is why the same AllReduce can be implemented as a local ReduceScatter, a cross-node reduction, and a local AllGather rather than as one flat exchange across every rank.

Hierarchical AllReduce

On a DGX H100 node, each GPU's local NVLink capacity is 450 GB/s per direction, while its inter-node port provides 50 GB/s over InfiniBand. These are endpoint capacity budgets, not a promise of uniform achieved rate to every peer. Intra-node connectivity and simultaneous traffic still matter. The hierarchical network in table 0.46 motivates a schedule that assigns work to each tier according to its usable capacity.

Table 0.46: The Bandwidth Hierarchy: Per-GPU bandwidth per direction at each tier, the convention of table 0.41. NVLink's 900 GB/s datasheet figure is the bidirectional total; InfiniBand is one port. The order-of-magnitude gap is what hierarchical algorithms exploit.

Tier	Interconnect	Bandwidth	Relative Speed
Intra-Node	NVLink 4.0	450 GB/s	9× faster
Inter-Node	InfiniBand NDR 400G	50 GB/s	1× (baseline)

A flat ring whose ordering repeatedly crosses node boundaries can leave local NVLink capacity unused while loading scarce inter-node links. Hierarchical AllReduce explicitly partitions the global operation into three stages that align communication volume with the fabric tiers (figure 0.72).

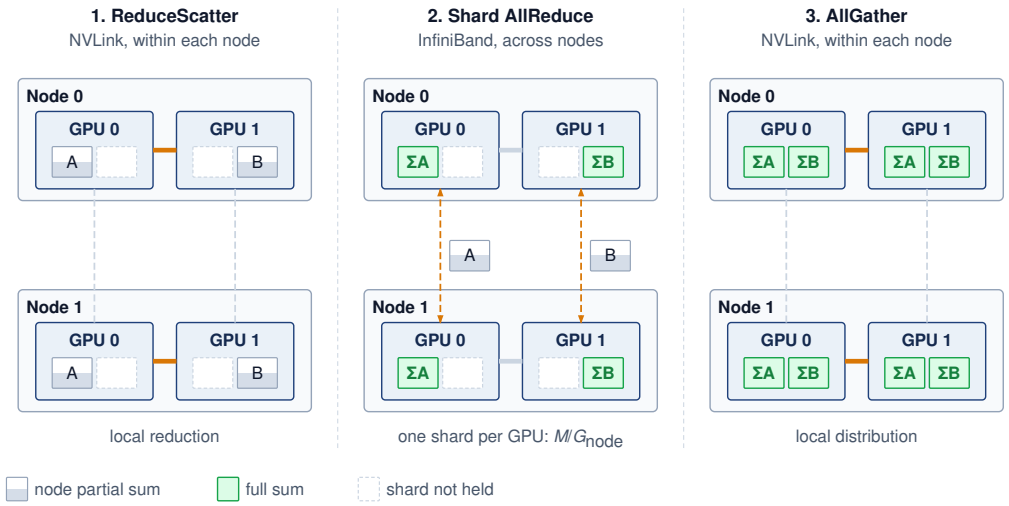


Figure 0.72: Hierarchical AllReduce: Three-phase decomposition that exploits the intra-node/inter-node bandwidth gap. Phase 1 performs intra-node aggregation over NVLink (an NVLink ring acting as a ReduceScatter that leaves each GPU holding a node-shard partial sum), leaving a payload of M/G_{node} on each of the G_{node} GPUs per node. Phase 2 runs an AllReduce across corresponding GPUs using InfiniBand. Phase 3 completes intra-node distribution over NVLink (the AllGather that returns each GPU to the full result). The schematic shows two representative ranks per node; the same decomposition applies to G_{node} ranks.

By decoupling local aggregation from global synchronization, figure 0.72 stages the dataflow so that slower inter-node InfiniBand links carry traffic only during Phase 2 (Shard AllReduce). Write G_{node} for the GPUs per node and N_{nodes} for the number of nodes. In this middle phase, each corresponding-rank group reduces an M/G_{node}-byte shard across N_{nodes} nodes. A ring in that group sends $2(N_{\text{nodes}}-1)M/(N_{\text{nodes}}G_{\text{node}})$ bytes per participating GPU and receives the same amount. Summing across the node's G_{node} GPUs gives $2(N_{\text{nodes}}-1)M/N_{\text{nodes}}$ bytes sent per node. Smaller per-port payloads improve elapsed time when the node has independent ports and sufficient fabric capacity; sharding does not create bandwidth on a shared uplink.

The three phases form a single causal pipeline. First, an intra-node ReduceScatter over NVLink performs a local reduction among the G_{node} GPUs in each node, leaving each GPU with a $1/G_{\text{node}}$ shard of partially reduced data while consuming only abundant intra-node bandwidth. Next, each corresponding-rank group applies an inter-node AllReduce over InfiniBand to its M/G_{node}-byte input shard, where the chosen collective algorithm dictates the bytes transmitted across the network fabric. Finally, an intra-node AllGather over NVLink redistributes the globally reduced shards within each node, completing the collective without consuming additional inter-node bandwidth.

A simple 8-node budget makes this bandwidth multiplication concrete:

> **Napkin Math 6.6: The hierarchical bandwidth multiplier**
>
> **Problem**: A cluster has 8 nodes, each with 8 GPUs (64 total). The system must AllReduce the chapter's 1 GB reference buffer. Assume each GPU has its own full-rate inter-node port, one rail per GPU as on a DGX H100 (rails are the subject of section 10), with no oversubscription. The flat baseline is a single ring over all 64 ranks. How much faster is Hierarchical AllReduce than that flat ring?
>
> **Flat ring AllReduce (ignoring hierarchy)**:
>
> - Each GPU sends ~2 GB total (the bandwidth-optimal Ring AllReduce formula).

- Every edge of a ring carries the same traffic in every step, so the whole ring advances at the rate of its slowest edge. Every ordering puts at least one fabric-crossing edge on each node, even the node-contiguous ordering that crosses the fabric only once per node.
- **Effective Bandwidth**: Limited by the slowest link = 50 GB/s (InfiniBand).
- **Time**: $\approx 2 \times 1$ GB/50 GB/s = 40 ms (bandwidth term dominates).

Hierarchical AllReduce (3-step decomposition):

1. **Intra-node ReduceScatter**: Each GPU sends 875 MB at 450 GB/s per direction $\rightarrow$ ~1.94 ms
2. **Inter-Node AllReduce**: Each GPU AllReduces a 1 GB/8 = 125 MB shard over InfiniBand; Ring moves roughly $2(N_{\text{nodes}} - 1)/N_{\text{nodes}}$ times that payload, and after adding the small latency term the phase takes ~4.40 ms at 50 GB/s
   (The eight shard groups run concurrently, each on its own GPU's port, so the node's eight ports together carry the full payload in parallel.)
3. **Intra-node AllGather**: Each GPU receives 875 MB at 450 GB/s per direction $\rightarrow$ ~1.94 ms
4. **Total time**: $\approx$ 1.94 ms + 4.40 ms + 1.94 ms = 8.3 ms

Systems insight: Hierarchical AllReduce achieves a 4.8× speedup by reducing the inter-node payload from 1 GB to 125 MB per GPU before the Ring traffic multiplier. The flat ring used one port's worth of fabric bandwidth because a single ring runs at its slowest edge; the hierarchical schedule uses all eight ports at once. That is also its precondition, since a node whose GPUs shared one uplink would carry the eight shard streams one after another and lose most of the speedup. This is why NVIDIA's NCCL and similar libraries often select hierarchical algorithms on multi-node clusters when the topology supports them.

The speedup carries over to model-sized payloads, because every phase is linear in bytes. Applied to the chapter's 140 GB 70B gradient across 128 ranks, the same three phases cut a flat ring's 5,556.6 ms to about 1,200.7 ms, provided each GPU has its own port for the concurrent shard exchanges.

The volume's running instance makes the same comparison on the cluster it was defined for. Archetype A's 175B-parameter model produces a 350 GB BF16 gradient, and the reference cluster holds 1,024 GPUs as 128 nodes of 8. A single flat ring over every GPU would spend about 14.0 s per full-gradient reduction. The hierarchical schedule sends one-eighth of the gradient through each GPU's port in a shard ring that spans every node and completes in about 3.1 s, a 4.5× improvement, of which the cross-node phase still accounts for about 1.7 s. Seconds per step remain a large exposed cost even after hierarchy, which is why the production layout for this instance shards the model so that each data-parallel group reduces a fraction of this payload, and why the overlap and compression techniques later in the chapter still matter at this scale.

These three phases also generalize to additional fabric tiers. For example, 4 racks of 4 nodes with 8 GPUs per node contain 128 GPUs. A rack-local ReduceScatter over 32 GPUs can leave each GPU with one thirty-second of the original payload for the cross-rack phase. The total elapsed time still includes both local phases, the cross-rack collective's traffic factor, startup, and contention. A cross-rack oversubscription ratio alone cannot determine a speedup over a flat ring.

Multidimensional reduction on a torus

Hierarchy fits a fabric whose tiers differ in speed. A torus, the direct-connect topology of Google's Tensor Processing Unit (TPU) pods, has uniform links instead, and its collectives reduce along one dimension at a time. TPU v4 pods support a 3D torus topology, unlike the 2D torus used by TPU v2 and v3. In the regular 3D torus model, each chip links directly to six neighbors $(\pm X, \pm Y, \pm Z)$ with equal per-link bandwidth. For collectives, the torus invites dimension-ordered reduction, which decomposes the AllReduce into sequential Ring AllReduces along axis-aligned torus rings. For a pod with $X \times Y \times Z$ chips, ranks first execute independent X-dimension rings for each fixed (Y, Z) coordinate, producing partial sums along each X line. A second phase runs Y-dimension rings to combine those partials across the $X \times Y$ plane, and a third executes Z-dimension rings across fixed (X, Y) coordinates to complete the global reduction.

↩ The torus topology and its bisection and path-length trade-offs against the fat-tree are established in section 8.

Figure 0.73 maps this dimension-ordered schedule onto a 4×4 2D torus grid (16 ranks). In Phase 1 (orange solid paths), each row executes an independent 4-rank Ring AllReduce across the horizontal X dimension using dashed wrap-around boundary links to close the ring ($2(X-1) = 6$ steps). Once row partial sums are established, Phase 2 (slate solid paths) executes orthogonal 4-rank vertical Ring AllReduces down the Y dimension ($2(Y-1) = 6$ steps). These phases use direct nearest-neighbor links without multi-hop routing within a logical ring edge. They reduce the startup count from $2(N-1) = 30$ rounds on a flat 16-rank ring to $2(X-1)+2(Y-1) = 12$ rounds, a $2.5\times$ reduction in the modeled startup term. In this simple form each axis still processes the full message, so the round-count saving comes at a byte cost that the partitioned dimension-wise schedule removes.

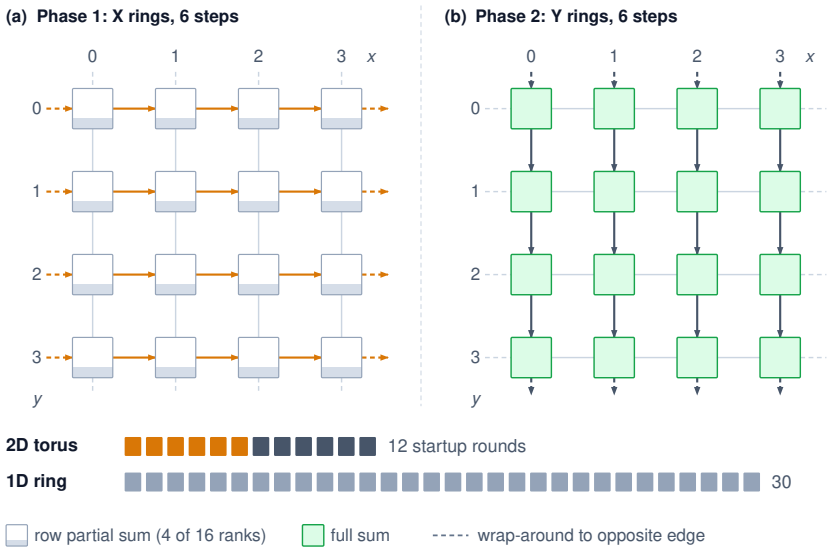


Figure 0.73: Dimension-ordered reduction on a torus topology: In a 2D torus mesh (4×4 node grid representing a simplified TPU pod slice), AllReduce proceeds sequentially along orthogonal dimensions. Phase 1 (orange) executes four parallel horizontal rings across the X dimension ($2(X-1) = 6$ steps). Phase 2 (slate) then executes four parallel vertical rings across the Y dimension ($2(Y-1) = 6$ steps) on the row-aggregated partial sums. Dashed stubs mark the torus wrap-around links, each leaving one edge of the grid and re-entering at the opposite edge. This dimension-ordered decomposition needs 12 startup rounds against 30 for a 16-rank 1D global ring, a $2.5\times$ reduction, but each axis processes the full message, so its bandwidth time is $3M/\beta$ for this grid.

The byte term does not shrink with the rings. Because every axis processes the full M-byte tensor, the bandwidth time is $2M[(X-1)/X + (Y-1)/Y + (Z-1)/Z]/\beta$ for equal per-axis bandwidth β, while the startup term is $2[(X-1)+(Y-1)+(Z-1)]\alpha$. Shorter rings reduce startup cost, but these sequential full-message AllReduces do not retain the bandwidth cost of one global ring. A bandwidth-efficient multidimensional implementation instead partitions the work with dimension-wise ReduceScatter followed by reverse-order AllGather. The X-dimension ReduceScatter sends $M(X-1)/X$ bytes per rank and leaves each rank an M/X shard; the Y-dimension ReduceScatter then operates only on that shard and sends $(M/X)(Y-1)/Y$, and the Z dimension continues the pattern. The three terms telescope to $M(N-1)/N$ for $N = XYZ$, and the mirrored AllGather doubles that to $2(N-1)M/N$, the ring's optimal byte term, while keeping the short rings' startup count. The torus thus teaches the same lesson as hierarchy, which is to shrink the payload before each successive stage rather than send the full tensor through every one.

Dimension-ordered reduction follows direct neighbor links and separates axis traffic in time; it does not change the network diameter or eliminate contention with other workloads. The torus topology also provides natural fault tolerance through alternate routing paths. If one link in the X-dimension fails, traffic can detour through the Y or Z dimensions (at the cost of increased latency). The compiler and collective runtime must choose a schedule for the actual topology, message size, and available links.

In-network reduction with SHARP

Hierarchical and dimension-ordered schedules redistribute work across links, but their software reduction stages still require endpoint GPUs to receive and combine contributions. NVIDIA's Scalable Hierarchical Aggregation and Reduction Protocol (SHARP)[9] moves that intermediate aggregation into the network. Instead of routing each partial sum through a GPU for arithmetic, an aggregation-capable InfiniBand switch combines contributions as packets pass through it.

Figure 0.74 contrasts upstream dataflow in a centralized endpoint reduction against in-switch aggregation. In the endpoint tree of panel (a), intermediate switches merely forward raw packets, forcing all four full gradient tensors ($\mathbf{g}_0$ through $\mathbf{g}_3$) across the upper links into a single Reducer GPU that executes every addition. In panel (b), SHARP offloads arithmetic to aggregation-capable switch application-specific integrated circuits (ASICs): each intermediate switch computes partial sums ($\mathbf{g}_0+\mathbf{g}_1$ and $\mathbf{g}_2+\mathbf{g}_3$) in-flight, leaving only the combined shards for the root switch to finalize. Moving reduction into the network fabric halves the upper link traffic and relieves accelerator endpoints from coordinating arithmetic steps.

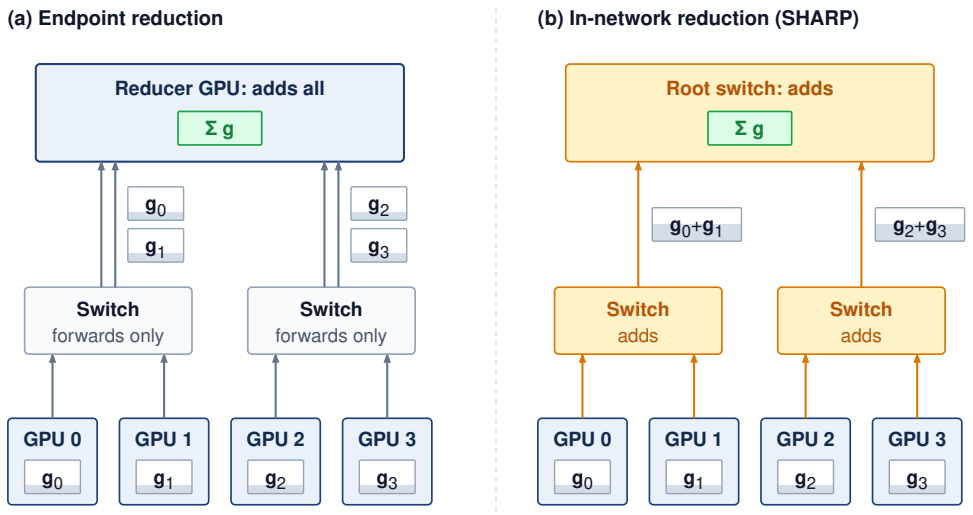


Figure 0.74: Endpoint and in-network reduction: The upstream half of a reduction over four GPUs. (a) Switches only forward packets, so every full gradient tensor crosses the upper links and converges on one reducer GPU, which does all the arithmetic. (b) Aggregation-capable switches add their inputs, so each upper link carries one partial sum and the root switch finishes the reduction; the result then travels back down the same tree. A software reduction tree also aggregates along its path, but performs arithmetic at endpoints rather than switches. The diagram compares where arithmetic happens, not measured speedup.

SHARP changes both terms of the cost model. On the startup side, it shortens the dependency chain. In a software-based tree reduction, each level waits for an intermediate GPU to receive, reduce, and forward its inputs; with SHARP the switch performs that step in the packet path, so no GPU execution stage or extra endpoint round trip sits between levels. On the byte side, each upper-tier link carries one partial sum rather than every contribution beneath it (figure 0.74), and in the idealized aggregation tree each GPU sends its contribution up once and receives the result once, where a ring rank sends nearly $2M$. Endpoint memory traffic falls for the same reason. Switch processing and contention for aggregation resources add costs of their own, so moving arithmetic into the network changes the α-β terms rather than eliminating them.

Which benefit matters follows the regimes of section 7. For small and medium messages, where startup rounds dominate, the shorter dependency chain is the main gain, although for very small messages fixed switch-processing overhead can limit it. For large messages the startup saving becomes proportionally small, and what remains is the byte saving at the endpoints and on the upper tier, which shortens the collective only when those links are the binding resource. Graham et al. (2020) report multi-fold reduction-bandwidth improvements and smaller application-level

[9] **SHARP (Scalable Hierarchical Aggregation and Reduction Protocol)**: In-network computing on Quantum InfiniBand switches that performs reduction operations (such as sum, min, and max) as packets traverse an aggregation tree (Graham et al. 2020). The same work reports substantially higher reduction bandwidth than host-based algorithms and describes switch-resource limits on outstanding aggregation groups and trees, which can create contention when many collectives compete for the same in-network resources.

gains for PyTorch workloads when SHARP Streaming-Aggregation is enabled on HDR/Quantum InfiniBand switches.

Strong scaling campaigns (training a fixed model across more accelerators without proportionally growing batch size) expose the importance of this distinction between collective speed and step time. As the per-accelerator batch shrinks, each gradient tensor stays large (proportional to model size) but the backward pass per accelerator shortens, exposing more of the communication budget. The limiting term can still be bandwidth; strong scaling alone does not establish that startup latency dominates. In-switch aggregation helps when its reduction in endpoint work or fabric traffic shortens the exposed critical path.

SHARP does impose constraints. The switch must support the specific reduction operation and the datatype the job reduces, such as FP16 or BF16 gradients, and supported datatypes differ across switch generations. The number of concurrent aggregation trees is limited by switch resources. Large clusters with many simultaneous training jobs may therefore exhaust aggregation capacity. The HDR/Quantum implementation examined here uses InfiniBand; its measured gains cannot be transferred to an Ethernet deployment without an equivalent, supported aggregation path.

Topology-aware routing

Hierarchy and in-network aggregation change where bytes move and where sums are computed. Their benefit still depends on mapping the logical communication pattern onto physical links. A Ring AllReduce among 64 GPUs creates a logical ring, but the paths carrying its hops can either distribute traffic or concentrate it on shared links. Two runs of the same training job on the same hardware can therefore differ substantially in communication throughput because of rank placement and routing.

Communication libraries like NCCL perform topology detection at initialization and use graph search to choose paths through the hardware topology available to them (NVIDIA 2026b). For each pair of ranks, the library must determine whether the peer sits behind a local NVLink switch or 100 meters away across an InfiniBand fabric, because that mapping decides which physical links each logical hop occupies. Local GPU, NVLink, PCIe, and NIC connectivity informs those choices, but local discovery does not reveal every remote switch, route, or competing flow. Fabric configuration and placement information must complement the library's view when diagnosing cross-node contention.

The topology detection process begins with hardware enumeration. NCCL queries the PCIe bus to discover GPU placement, NVLink connectivity between GPUs, and NIC-to-PCIe-switch affinity. From this information, it constructs an internal graph where nodes represent GPUs and edges represent physical links with annotated bandwidth and latency. A graph search algorithm then finds communication paths that maximize aggregate bandwidth while minimizing the number of cross-domain hops (transitions between NVLink, PCIe, and InfiniBand domains). This topology-aware path selection is what allows NCCL to approach theoretical peak bandwidth on well-configured systems, while topology-unaware implementations can leave a large fraction of bandwidth unused.

Rail-optimized routing (NVIDIA DGX)

In the eight-GPU DGX layout considered here, each GPU has a dedicated inter-node NIC, and the fabric connects matching NIC positions to rail switches. Rail-optimized routing fits the corresponding-shard phase of hierarchical AllReduce: GPU 0 on Node A exchanges its shard with GPU 0 on Nodes B and C, GPU 1 exchanges with peer GPU 1s, and so on. The eight rails can carry these groups concurrently (table 0.47), subject to their physical capacity and competing traffic. Other collectives may require cross-rail paths.

↩ Rail-optimized cabling, which connects each GPU slot position to its own rail switch, is established in section 8.

Table 0.47: Rail-Optimized Traffic Distribution: Each rail carries 1/8 of the total traffic independently.

Rail	Participants	Traffic
Rail 0	Node0-GPU0 ↔ Node1-GPU0 ↔ Node2-GPU0 ↔ …	$M/8$ each
Rail 1	Node0-GPU1 ↔ Node1-GPU1 ↔ Node2-GPU1 ↔ …	$M/8$ each
…	…	…

Rail	Participants	Traffic
Rail 7	Node0-GPU7 ↔ Node1-GPU7 ↔ Node2-GPU7 ↔ …	$M/8$ each

If all eight shard streams converge on one remote NIC, that endpoint faces $8\times$ the balanced receive demand. In the equal-shard layout, matching each shard group to its intended rail distributes one-eighth of the payload to each NIC. This removes that particular concentration; achieving the predicted rate still requires sufficient switch, uplink, and bisection capacity for concurrent traffic.

Rail-optimized routing and hierarchical AllReduce reinforce each other. In the hierarchical decomposition described in section 9, Step 2 (inter-node AllReduce) naturally aligns with rail topology. GPU i on each node communicates only with GPU i on other nodes, which is precisely the rail pattern. This alignment is not coincidental; NVIDIA designed the DGX hardware with rail-optimized communication in mind, and NCCL's hierarchical algorithms can exploit this structure when the topology is detected and ranks are mapped correctly. When the logical communication pattern matches the physical topology, each NIC carries its intended share of traffic and the cluster can approach its theoretical peak bisection bandwidth.

Misalignment between logical and physical topology is a common source of performance degradation that is difficult to diagnose without careful profiling. If process ranks are assigned arbitrarily (for example, by the job scheduler without topology awareness), the hierarchical AllReduce may route cross-node traffic through the wrong NICs or across rails, creating hotspots. In the worst case, all eight shard exchanges of a node converge on one NIC, cutting that node's usable injection bandwidth to one-eighth of the rail-aligned value. Large deployments use topology-aware rank assignment (configured through device ordering such as `CUDA_VISIBLE_DEVICES`, NIC binding, and the scheduler's GPU placement policies) to ensure alignment.

Hierarchical execution and topology-aware routing connect the cost model to a physical placement. The α-β terms estimate the service required by each scheduled exchange; hierarchy redistributes work across fabric tiers, and rail alignment can balance corresponding-shard traffic across independent ports. None removes shared-capacity limits. Measured collective duration must confirm that the intended placement shortens the dependency path before the design is accepted.

AllToAll Exchanges at Scale

Hierarchy, in-network reduction, and rail alignment were all developed for AllReduce, whose uniform payload lets every rank follow the same schedule. The AllToAll rows of table 0.39, expert parallelism and sharded embedding tables, break that uniformity. As perspective 6.1 showed, an AllToAll finishes when its slowest term finishes: startup across many fine-grained peer messages, injection or reception at an endpoint, traffic across the fabric bisection, or a hotspot created by skew. Production routing makes every one of those terms data-dependent, and the hierarchy just developed for AllReduce reappears as one of the schedules that can contain them.

Dynamic routing and expert imbalance in MoE AllToAll

The worked trace in notebook 6.3 assumes uniform token routing, in which every expert receives an identical share of tokens. In production MoE models, routing decisions are dynamic and data-dependent. The exchange keeps its two-phase shape, but its buffer sizes, its slowest receiver, and its load on the fabric all become functions of the routing distribution.

Each MoE layer performs two exchanges. In an MoE transformer layer with N_{experts} experts distributed across N ranks (N_{experts}/N experts per rank), each rank holds a local batch of B_{tok} tokens. A gating router computes top-k_{experts} routing probabilities over all N_{experts} experts for each token, inducing two collective communication phases separated by expert computation. During token dispatch, each rank partitions its B_{tok} local token activation vectors ($\mathbf{x} \in \mathbb{R}^d$, where d is the model's hidden dimension) according to the destination ranks hosting the selected experts, executing an AllToAll collective (or variable-size `AllToAllv`) to route tokens across the fabric according to the routing matrix. After each rank computes forward passes through its assigned local expert feed-forward networks (FFNs), the token combine phase executes a second AllToAll collective to route

output vectors back to their originating ranks. Each rank then computes the weighted combination of expert outputs:

$$\mathbf{y}_i = \sum_{j \in \text{top-}k_{\text{experts}}} p_{\text{gate}_{i,j}} \cdot \text{Expert}_j(\mathbf{x}_i)$$

Because routing is data-dependent, so are the required buffer sizes, even when the input tensor shape is fixed. One simplified model treats assignments of different tokens independently: the count for expert e is then $B_e \sim \text{Binomial}(NB_{\text{tok}}, p_e)$, where p_e is the fixed probability that a token selects expert e. Correlated tokens or changing router probabilities require a different count model. To avoid reallocating buffers for every routing decision, a capacity-limited implementation can reserve space using the expert capacity factor $C_{\text{cap}} \geq 1.0$ introduced in chapter 15:

$$\text{Capacity}_e = \left\lceil \frac{N \times B_{\text{tok}} \times k_{\text{experts}}}{N_{\text{experts}}} \times C_{\text{cap}} \right\rceil$$

The capacity factor exposes a trade-off between reserved space and retained expert assignments. At uniform expected capacity ($C_{\text{cap}} = 1.0$), some experts can still overflow while others have unused slots. A dropping implementation bypasses excess assignments through the residual connection, changing the computation and potentially harming training quality. Increasing headroom ($C_{\text{cap}} > 1.0$, for example 1.25–1.5) can reduce overflow. If the implementation transmits every reserved slot, its padded payload grows by approximately a factor of C_{cap} relative to the uniform capacity-one budget; kernels that skip unused slots need not perform the corresponding dummy computation. A dropless implementation retains every assignment and can use variable-size `AllToAllv` to avoid sending unused slots. It still needs enough memory for the realized counts and remains exposed to routing skew.

Skew turns the most heavily loaded rank into a straggler. Because token routing is determined by input semantics, some experts inevitably receive disproportionate token volumes. An expert that receives several times the average load raises its host GPU's receive traffic by the same excess. The host's total receive volume depends on the combined load of all experts assigned to it, which is the rank-level quantity in the bound that follows.

Routing skew can create stragglers in both communication and expert computation. An inbound reception bottleneck bounds dispatch completion by the most heavily loaded receiver. Other ranks may finish their transfers earlier, but work that needs the delayed expert outputs must wait. The receive budget gives a lower bound before expert computation and the return exchange are counted:

$$T_{\text{dispatch}} \geq \frac{B_{\max} \times d \times s_{\text{elem}}}{\text{BW}_{\text{rx}}}$$

where $B_{\max} = \max_i \sum_{e \in \text{rank } i} B_e$ counts the largest remotely received token batch at any rank i, restricting B_e in this sum to assignments arriving from other ranks; s_{elem} is the bytes per activation element, and BW_{rx} is that rank's receive bandwidth. Bisection capacity provides a separate limit. Ring AllReduce exchanges data with logical ring neighbors, whereas AllToAll permits a complete bipartite exchange. Under uniform destination assignment, a fraction $(N-1)/N \approx 1$ of tokens leaves its source rank; the fraction crossing nodes or a particular fabric cut depends on placement. In the simplified symmetric fabric model with oversubscription ratio $R:1$, usable bisection bandwidth $\text{BW}_{\text{bisect}} = (N \cdot \text{BW}_{\text{inject}})/(2R)$ bounds the time needed to carry traffic across that cut:

$$T_{\text{dispatch}} \geq \frac{V_{\text{cut}}}{\text{BW}_{\text{bisect}}}$$

Napkin Math 6.7: The cost of a hot expert rank

Problem: Return to the uniform routing of notebook 6.3: 8 GPUs, 64 experts, 4.096 KB per token, and one 50 GB/s port per GPU. Suppose skew sends one rank's experts 1.5 times the average remote load. This is an assumed realized routing skew; the per-expert capacity factor

reserves total-assignment headroom and does not determine remote arrivals. How does the receive bound on dispatch change?

Math:

1. **Uniform receiver**: Each GPU receives 448 remote tokens, or 1.84 MB, so $T_{\text{dispatch}} \geq 1.84$ MB / 50 GB/s ≈ 36.7 µs.
2. **Hot receiver**: $B_{\max}$ rises to 672 remote tokens, or 2.75 MB, so $T_{\text{dispatch}} \geq 2.75$ MB / 50 GB/s ≈ 55.1 µs.

Systems insight: The exchange cannot finish before its hottest receiver, so a 1.5× load on one rank raises the dispatch bound for the whole layer by the same factor. Transmitting unused capacity slots can add padding bytes; the amount depends on the packing layout rather than on this receive-skew factor alone. A variable-size exchange removes unused-slot traffic but not the receive bound. Expert computation processes local as well as remote assignments, so its work grows by the same factor only if the hot rank's total local-plus-remote assignment count also grows by that factor, with unchanged work per assignment.

Scale compounds both problems. To amortize small-message overhead across thousands of GPUs, hierarchical MoE runtimes decompose the flat AllToAll into a two-level collective (Hwang et al. 2023). Intra-node NVLink first coalesces tokens destined for experts on the same remote server node. Participating nodes then exchange aggregated payloads over InfiniBand or RoCE, and receiving GPUs use NVLink to distribute tokens to the GPUs hosting the targeted experts. At the logical level, this replaces $N(N-1)$ directed rank pairs with $N_{\text{nodes}}(N_{\text{nodes}}-1)$ directed node pairs; actual transport connections depend on the implementation. Coalescing can improve link utilization and reduce startup overhead, but the token bytes still have to cross the required fabric cuts, and skew can still overload a destination.

AllToAll schedule selection

AllToAll specifies the destination-specific exchange, not the schedule that carries it. The runtime should choose that schedule from the traffic matrix and physical hierarchy rather than treating every exchange as one flat pattern. Table 0.48 compares the three common regimes; hierarchical designs such as Tutel's two-dimensional exchange demonstrate why the best schedule can change with message size, scale, and topology (Hwang et al. 2023).

Table 0.48: AllToAll schedule selection: The right schedule minimizes the active bound rather than the logical peer count. Direct exchange preserves simplicity, hierarchy coalesces traffic before scarce links, and variable-size exchange removes padding without removing skew.

Schedule	When it fits	Cost exposed
Direct pairwise exchange	Balanced, coarse per-peer chunks on a small or full-bisection process group	Each rank injects directly to its peers; fine granularity repeats startup and scheduling cost, while oversubscription can bind the bisection
Hierarchical/coalesced exchange	Many small remote chunks across multi-GPU nodes or rails; pack by remote node, exchange aggregates, then redistribute locally	Coalescing amortizes inter-node startups and respects fast local links, but adds packing, local copies, synchronization, and temporary buffers
Variable-size exchange	Token or embedding counts differ by destination and padding to the maximum count would waste substantial bandwidth	Explicit counts and displacements avoid padding, but count exchange and irregular transfers add control overhead; the hottest receiver still sets completion time

The selection test follows the four-term lower bound developed in perspective 6.1 and section 10. If per-peer chunks are coarse and source injection or fabric bisection already dominates, coalescing cannot remove the byte term and may only add copies. If $N\alpha$ dominates because each remote destination receives a small chunk, hierarchy can replace many inter-node startups with fewer aggregate transfers. If counts are skewed, a variable-size interface prevents padding from inflating

V_{cut}, but the schedule must still provision for the maximum receive volume and expert compute load. Consequently, a runtime should benchmark candidate schedules with the observed count distribution, rank placement, and topology; a balanced fixed-size microbenchmark cannot select a production AllToAll schedule.

Gradient Compression Under Bandwidth Scarcity

Even after topology tuning and algorithm selection, a system may remain bandwidth-bound because the physical fabric cannot move gradient payloads fast enough. Reducing the payload can shorten those transfers without changing the fabric. Gradient compression trades numerical fidelity for fewer transmitted bits, so its benefit must be evaluated against the training quality target.

Bandwidth scarcity can arise when training across data centers over wide-area links or on cloud instances with constrained Ethernet networking. A wide-area link offering 10–100× less bandwidth than the reference InfiniBand fabric would sharply increase the cost of exchanging the same gradient payload. Beyond the data center, federated training on phone-class devices, the Archetype C (Federated MobileNet) regime, faces constrained and intermittently available cellular or Wi-Fi uplinks. Compression can reduce each client's update size, although client updates may summarize several local training steps rather than a single gradient. The techniques examined here offer nominal value-payload reductions of 4–1000× at different fidelity levels; metadata and aggregation costs reduce the realized savings. The central tension is how much communication can be removed while preserving progress toward the training quality target.

Precision reduction via quantization

Quantization is the least disruptive compression lever when bandwidth is binding because it keeps every gradient element but reduces the bits used to represent it. Most gradients are computed in FP32 (32-bit floating point) or BF16 (16-bit brain float), so reducing bit-width directly reduces communication volume. The useful question is how much gradient fidelity the optimizer can absorb across the progression from mild to aggressive quantization. The compression ratios discussed in this section follow the compression literature and are quoted against FP32 values. The chapter's 70B payload is already BF16, so against it every ratio halves; INT8 saves 2× rather than 4×, and 1-bit encoding 16× rather than 32×.

Half-precision representations such as FP16 serve as a standard baseline for accelerator training. By halving the bit-width of FP32, FP16 delivers a $2\times$ reduction in gradient value bytes, provided its range and precision support the workload's convergence requirements. Moving to INT8 stores each quantized value in one byte, achieving a $4\times$ reduction relative to FP32 before scale metadata. One symmetric scheme uses 255 levels from negative 127 through positive 127. For a nonzero gradient vector, it computes a tensor-wide scaling factor $s = \max(|\mathbf{g}|)/127$, quantizes via $\mathbf{g}_{\text{int8}} = \text{round}(\mathbf{g}/s)$, and has the receiver reconstruct $\hat{\mathbf{g}} = \mathbf{g}_{\text{int8}} \times s$; an all-zero vector requires a separate zero case. Independently scaled integer vectors cannot be added directly to recover the sum of their reconstructed gradients. The collective must account for each scale and use sufficient accumulator precision, or reconstruct values before reduction. At the extreme, 1-bit SGD transmits only the sign of each gradient element ($+1$ or -1), yielding a $32\times$ reduction in value bits over FP32. The receiver reconstructs values using a learned or adaptive scaling factor, though the substantial noise introduced by 1-bit quantization can severely degrade convergence without error-feedback mechanisms (Seide et al. 2014; Karimireddy et al. 2019).

Block quantization for gradient communication

Using a single scaling factor for an entire tensor makes every element's quantization resolution depend on the largest magnitude. When magnitudes vary substantially across the tensor, small gradients may round to zero even in regions whose values could be represented accurately with a smaller scale. Block quantization addresses this by dividing the gradient tensor into blocks of b_{block} elements (for example, $b_{\text{block}} = 64$ or 128) and computing an independent scaling factor per block. Each block's scaling factor adapts to its local range, improving resolution where that range is smaller at the cost of transmitting $d_{\text{grad}}/b_{\text{block}}$ additional scaling factors for evenly divided blocks.

For a gradient vector of dimension d_{grad} quantized to INT8 with block size b_{block}, the message size is $d_{\text{grad}} \times 1$ byte for the quantized values plus $(d_{\text{grad}}/b_{\text{block}}) \times 4$ bytes for the FP32 scaling fac-

tors, or $d_{\text{grad}} + 4d_{\text{grad}}/b_{\text{block}}$ bytes in total. The effective compression is therefore $4d_{\text{grad}}/(d_{\text{grad}} + 4d_{\text{grad}}/b_{\text{block}}) = 4b_{\text{block}}/(b_{\text{block}} + 4)$, which for $b_{\text{block}} = 128$ reaches 3.88×, close to the theoretical 4×. For rounding to the nearest level without clipping, the absolute error bound changes from $s \cdot 0.5$, where s is the global scaling factor, to $s_b \cdot 0.5$, where s_b is the block-local scaling factor. Blocks with smaller ranges obtain tighter bounds; the improvement depends on how magnitudes are distributed among blocks.

Interfaces that fuse quantization and reduction must preserve the meaning of each block's scale throughout aggregation. They must also control the resulting numerical error. Deterministic rounding generally introduces bias, whereas suitable randomized quantizers preserve the input in expectation while adding variance. Error feedback addresses accumulated compression error, but the need for it depends on the compressor and optimizer rather than on bit-width alone. Quantization should therefore move only as far down the precision ladder as the convergence budget permits.

Gradient sparsification methods

Quantization attacks communication volume by reducing the number of bits per gradient element while transmitting every element. An orthogonal approach, sparsification, attacks the problem from the other direction: keep full precision but transmit only a subset of gradient elements, setting the rest to zero.

Top-k sparsification

The most common method is Top-k compression: for a gradient vector $\mathbf{g} \in \mathbb{R}^{d_{\text{grad}}}$, transmit only the K_{top} elements with the largest absolute magnitude, setting the rest to zero (Aji and Heafield 2017; Lin et al. 2018):

$$\text{TopK}(\mathbf{g}) = \mathbf{g} \odot \mathbf{1}_{|\mathbf{g}| \geq |\mathbf{g}|_{(K_{\text{top}})}}$$

where $|\mathbf{g}|_{(K_{\text{top}})}$ is the K_{top}-th largest element by magnitude. The threshold expression retains all ties; an implementation targeting an exact count must break ties at the boundary. With $K_{\text{top}} = 0.001 \times d_{\text{grad}}$ (keeping only 0.1 percent of elements), the retained values occupy 1000× less space before index overhead.

The compression headline must be discounted by the cost of encoding the sparse representation. Transmitting a sparse gradient requires sending both the nonzero values and their indices. For a gradient vector of dimension d_{grad} with K_{top} nonzero elements, the encoded message contains K_{top} values (each in FP32 or FP16) plus K_{top} indices (typically INT32). The total message size is $K_{\text{top}} \times (4+4) = 8K_{\text{top}}$ bytes for FP32 values with INT32 indices. The effective compression ratio is therefore $4d_{\text{grad}}/(8K_{\text{top}}) = d_{\text{grad}}/(2K_{\text{top}})$.

For $K_{\text{top}} = 0.001d_{\text{grad}}$, the encoded message yields a compression ratio of 500×, not the 1000× suggested by the kept-element fraction alone, because the index overhead is significant. Using a 16-bit unsigned index representation (for $d_{\text{grad}} < 65536$) or run-length encoding for suitable sparsity patterns can improve the effective ratio. Aggregation imposes a separate cost. Workers may retain different coordinates, so summing their packed value arrays would combine unrelated parameters. A sparse collective must match indices and sum contributions to each coordinate; the union of selected coordinates can be much larger than any one worker's selection. Local compression ratios therefore do not directly specify collective traffic or runtime.

Top-k is not the only sparsification rule. Random-k sparsification selects K_{rand} elements uniformly at random and scales them by $d_{\text{grad}}/K_{\text{rand}}$ to maintain an unbiased gradient estimate. Random-k has the advantage of being an unbiased compressor even without error feedback, because $\mathbb{E}[\text{RandomK}(\mathbf{g})] = \mathbf{g}$. Its random selection can discard large components, and rescaling the retained values introduces variance. Top-k retains the largest components but introduces bias. Their convergence behavior therefore depends on the optimizer, residual correction, and gradient distribution; unbiasedness alone does not determine which reaches a quality target sooner.

The convergence problem


Naively discarding small gradients with Top-k creates a systematic bias. If a parameter's gradient remains below the selection threshold, even a consistent contribution of 0.01 per step is repeatedly

omitted. Over thousands of steps, those omissions can materially change the optimization trajectory. The problem is persistent exclusion, which can occur even when each discarded component looks negligible in isolation.

The bias of uncorrected Top-k means that the usual argument for SGD with an unbiased gradient estimate no longer applies directly. Biased compression can cause convergence failure even when the uncompressed method converges. Deterministic quantization can also repeatedly omit small contributions; randomized quantization and rescaled Random-k instead require accounting for their added variance. Error feedback addresses accumulated compression error for quantized gradients (Seide et al. 2014) and for sparsified gradients (Stich et al. 2018; Karimireddy et al. 2019).

Error feedback and residual accumulation

Error feedback controls the accumulated error introduced by compression. At step t, the system adds the local residual $\mathbf{e}_t$ to the new gradient $\mathbf{g}_t$, compresses that corrected vector, and transmits the compressed update $\mathbf{v}_t$. The next local accumulator stores the difference between the corrected vector and the transmitted update. This residual path defers information so that later updates can recover it under the compressor's convergence assumptions.



Error feedback carries the residual into the next compressed step.

Definition 6.3: Error feedback mechanism

Error feedback is a distributed-training technique for gradient compression that maintains a per-worker residual accumulator $\mathbf{e}_t$, re-injecting the compression error back into the next gradient update so that information omitted from the transmitted update remains in the residual. A finite run can end with an untransmitted residual.

1. **Significance**: Top-k sparsification at 1 percent keeps only the largest 1 percent of gradient values by magnitude, reducing each worker's retained value payload from 140 GB to 1.4 GB for a full 70B gradient, a 100× reduction before sparse-index and aggregation overhead. Without error feedback, the discarded 99 percent of gradient values create a biased update that can harm convergence. With error feedback, omitted information remains in the residual and can influence later selections, supporting the convergence guarantees analyzed for memory/error-feedback variants under their assumptions (Stich et al. 2018; Karimireddy et al. 2019).
2. **Distinction**: Unlike plain lossy compression, which permanently discards sub-threshold gradient components, error feedback delays their transmission. A component too small to send in one step stays in the residual and can influence later transmitted updates as it accumulates; a finite run may still end with an untransmitted residual.
3. **Common pitfall**: A frequent misconception is that error feedback is automatic whenever a compressor is used. It is not: the training system must explicitly preserve and reinject the residual. Without that residual path, Top-k and 1-bit quantization introduce systematic bias that can accumulate across steps (Karimireddy et al. 2019).

Error feedback preserves cumulative gradient information over time. Consider what happens over K steps:

$$\sum_{t=1}^{K} \mathbf{v}_t = \sum_{t=1}^{K} [(\mathbf{g}_t + \mathbf{e}_t) - \mathbf{e}_{t+1}] = \sum_{t=1}^{K} \mathbf{g}_t + \mathbf{e}_1 - \mathbf{e}_{K+1}$$

If the error accumulator remains bounded under the chosen compressor and training assumptions, then as $K \to \infty$:

$$\frac{1}{K} \sum_{t=1}^{K} \mathbf{v}_t \to \frac{1}{K} \sum_{t=1}^{K} \mathbf{g}_t$$

Under that bounded-residual condition, the difference between the two averages vanishes. At a finite stopping point, untransmitted information remains in the residual. Repeated small gradients can accumulate in $\mathbf{e}_t$ until they exceed the compression threshold, as the worked trace illustrates.

The telescoping property of compression error across time is why error feedback can transform a biased compressor into a convergent training method. Theoretical analyses show convergence guarantees for sparsified SGD with memory and for EF-SGD with broad compression operators under their stated assumptions (Stich et al. 2018; Karimireddy et al. 2019). A short trace shows how error feedback preserves gradient information that naive compression would lose. Table 0.49 runs the trace for a rounding compressor with no residual path. It transmits each value rounded to the nearest whole unit, so any value below 0.5 is sent as zero:

Table 0.49: Naive Compression Trace (No Error Feedback): Five-step worked trace showing how a rounding compressor transmits zero whenever an individual gradient falls below 0.5.

Step	True Gradient g_t	Transmitted v_t	Cumulative Transmitted	Cumulative True
1	0.4	0	0	0.4
2	0.3	0	0	0.7
3	0.2	0	0	0.9
4	0.4	0	0	1.3
5	0.3	0	0	1.6

Table 0.50 runs the same sequence with a residual accumulator $\mathbf{e}_t$ that re-injects the discarded remainder into the next step.

Table 0.50: Error-Feedback Compression Trace: Same five-step sequence under error-feedback compression.

Step	g_t	e_t	$g_t + e_t$	v_t	$e_{t+1} = (g_t + e_t) - v_t$	Cumulative v
1	0.4	0	0.4	0	0.4	0
2	0.3	0.4	0.7	1	–0.3	1
3	0.2	–0.3	–0.1	0	–0.1	1
4	0.4	–0.1	0.3	0	0.3	1
5	0.3	0.3	0.6	1	–0.4	2

Example 6.2: Error feedback mechanism

Scenario: A gradient compression pipeline rounds each gradient value to the nearest whole unit before transmission, so values below 0.5 are sent as zero, over 5 training steps of distributed data-parallel training.

Diagnosis: Naive rounding (table 0.49) discards every value below 0.5, transmitting 0 when the true cumulative gradient is 1.6 (100 percent gradient loss). With error feedback (table 0.50), the residual grows until it crosses 0.5 and is sent, so the run transmits 2 and ends holding –0.4 in the residual. Transmitted plus residual, 2 + (–0.4), equals the true total of 1.6.

Systems lesson: The trace illustrates how error feedback carries omitted information into later updates. By storing untransmitted residual vectors in local accelerator memory ($\mathbf{e}_{t+1} = \mathbf{g}_t + \mathbf{e}_t - \mathbf{v}_t$), repeated small contributions can accumulate until they cross the transmission threshold. The trace demonstrates the residual mechanism; convergence still depends on the compressor and optimizer assumptions.

1-bit Adam compression-aware optimization

Error feedback can restore convergence guarantees for suitable compressors under stated assumptions. When applied directly to gradients, it corrects the transmitted gradient without using the optimizer's internal state. Momentum and second-moment estimates offer other possible quantities to communicate, but compressing them changes how error enters the optimization trajectory. The

decision is whether compression should operate on raw gradients or on optimizer state, and what analysis supports that choice.

A more integrated approach, pioneered by Microsoft's DeepSpeed team, compresses the optimizer's communication rather than the raw gradients. 1-bit Adaptive Moment Estimation (Adam) (Tang et al. 2021) exploits the observed stabilization of Adam's second-moment (variance) estimate after an initial training period. It then compresses the communicated first-moment state, the momentum, to 1 bit per parameter plus a scaling factor while retaining the stabilized second moment as an adaptive preconditioner.

The algorithm proceeds in two phases. During a warmup phase, standard Adam runs with full-precision communication so that the second-moment estimate stabilizes. The algorithm then freezes that variance estimate and uses it as a fixed adaptive preconditioner. In the communication-efficient phase, workers communicate the momentum using 1-bit compression (sign plus scale) and retain each compression residual locally so it can be added before the next compression step.

The theoretical justification combines the frozen adaptive preconditioner with error-compensated momentum compression. The residual feeds quantization error into later momentum messages, controlling accumulated compression error and supporting the paper's convergence result without treating the compressed update as an unbiased estimator.

The 1-bit Adam paper reports up to 5× communication-volume reduction while matching the convergence speed of uncompressed Adam, with experiments up to 256 GPUs showing up to 3.3× higher throughput for BERT-Large pretraining and up to 2.9× higher throughput for Stanford Question Answering Dataset (SQuAD) fine-tuning (Tang et al. 2021). The practical lesson is narrower than "compression always wins": the compression overhead must remain small compared with the communication time saved.

The success of 1-bit Adam illustrates how the optimizer's structure can guide a compression scheme. Freezing the second moment and correcting compressed momentum together support the method's convergence analysis; replacing every gradient with its sign would not reproduce that algorithm. The reported end-to-end volume reduction of up to 5× includes the uncompressed warmup and other communication costs, so it is smaller than the raw 32× ratio of 1-bit values to FP32 momentum.

Bandwidth versus convergence trade-offs in compression

Gradient compression is not free; it trades reduced communication for increased variance or bias in the optimization process. The comparison in table 0.51 summarizes the source-backed patterns from quantization, sparsification, error-feedback, and optimizer-aware compression work (Seide et al. 2014; Aji and Heafield 2017; Lin et al. 2018; Stich et al. 2018; Karimireddy et al. 2019; Tang et al. 2021).

Table 0.51: Gradient Compression Methods: Encoded-payload ratios relative to an FP32 payload, as the literature quotes them, and relative to the BF16 payload this chapter's examples use. Top-k assumes FP32 values and 32-bit indices in both columns; quantization scales and other metadata reduce the stated upper bounds. No method has a fixed convergence penalty across workloads. The right choice depends on whether bandwidth or convergence speed is the binding constraint; evaluate the complete time to the same quality target, including encoding and any additional training steps.

Method	Ratio vs. FP32	Ratio vs. BF16	Convergence Impact	Best Use Case
FP16	2×	1× (none)	Check range and numerical stability	Common accelerator baseline
INT8 + Error FB	At most 4×	At most 2×	Workload- and scaling-dependent	Bandwidth-constrained clusters
Top-k (1%) + Error FB	At most 50×	At most 25×	Depends on sparsity and residual control	Cross-data center training
1-bit + Error FB	At most 32×	At most 16×	Requires compression-aware optimization	Extreme bandwidth constraints

Decision criteria for gradient compression

The decision rule is not the compression ratio alone. Compression is worthwhile only when the wall-clock time it saves across the run exceeds its encoding overhead plus the cost of any extra steps

that slower convergence requires, so the comparison must be made in time to the same quality target. A high communication-computation ratio $\rho = T_{\text{comm}}(N)/(T_{\text{compute}}/N)$, the ratio section 15 used to separate compute-bound from communication-bound clusters, creates an opportunity when that communication is exposed on the critical path. The compressor and optimizer analysis must establish how bias or variance is controlled, including whether error feedback is required; convergence tests then check that the chosen configuration reaches the target.

The first test is per synchronization. Compression shrinks only the byte term, so it helps a payload above n^*, such as a full gradient or a large bucket, and does little for one below it, whose startup term remains (section 7). Even above n^*, encoding must cost less than the transfer time it removes.

Napkin Math 6.8: The payback of compression

Problem: A training job takes 40 ms to synchronize a gradient buffer. A compression scheme shrinks the payload, but after scale factors, metadata, and protocol overhead its assumed effective throughput gain is 8×, and encoding and decoding add 2 ms of accelerator time per synchronization. Does compression shorten the synchronization, and by how much?

Math:

1. **Compressed communication time**: 40 ms divided by the effective factor 8 = 5 ms.
2. **Total new time**: 5 ms (comm) + 2 ms (overhead) = 7 ms.
3. **Effective speedup**: 40 ms divided by 7 ms ≈ 5.7×.

Systems insight: Compression is a trade of compute for bandwidth. With compression ratio r_{comp} and encoding cost T_{overhead}, it pays off only when $T_{\text{overhead}} < T_{\text{comm}}(N) \times (1 - 1/r_{\text{comp}})$, that is, when encoding costs less than the communication time it removes. In this case, spending 2 ms to save 35 ms of network time is a clear win. On a high-speed NVLink network where $T_{\text{comm}}(N)$ is only 1 ms, the same compression logic would cost more than it saves and slow down training. Always profile the network before adding compression.

The second test spans the run, because a compressor that passes the per-step test can still lose once slower convergence adds steps.

Suppose a training run requires 100,000 steps to reach its quality target without compression, with each step taking 500 ms (300 ms compute and 200 ms communication), for a total of 50,000 s. INT8 compression with error feedback of an FP32 payload reduces communication by 4× (from 200 ms to 50 ms per step), but suppose it raises the required steps by 10 percent, to 110,000. The new total is 110,000 steps at 350 ms each, or 38,500 s, a 23 percent improvement. Compression wins here because the per-step saving of 150 ms outweighs the additional steps.

The same model on a faster network, where communication takes only 30 ms per step, reverses the verdict. Compression cuts that to 7.5 ms, saving 22.5 ms per step, but still adds 10,000 steps at 307.5 ms each. The run now takes 33,825 s instead of 33,000 s, 2.5 percent longer. In this serial compute-plus-communication model, the break-even value of ρ depends on the assumed compression ratio and extra steps, with no separate encoding cost included. A training schedule with overlap must instead compare the exposed time saved against encoding and convergence costs. Scheduling transfers during independent computation offers another way to reduce that exposed time.

Checkpoint 6.4: Gradient compression decisions

Verify your understanding of when and how to apply gradient compression:

- ☐ **Error feedback**: explain why uncorrected 1-bit SGD can fail to converge and why 1-bit Adam introduces warmup and residual correction, comparing how each method handles information loss.
- ☐ **Compression payoff**: determine whether applying 4× gradient compression improves total step time when the backward pass takes 800 ms and AllReduce takes either 200 ms or 2000 ms.

- ☐ **Error accumulator**: derive the steady-state behavior of the error accumulator e_t when the true gradient is constant at $g = 0.3$ and the compression threshold is 0.5.
- ☐ **Top-k vs. quantization**: choose between Top-k sparsification and quantization for a workload, accounting for compression ratio and sparse-index encoding overhead.

Communication-Computation Overlap

In notebook 6.2, 100 µs of network transit disappeared beneath 500 µs of backward computation, and only the 100 µs of processor overhead stayed on the critical path, with no change to the physical network. Overlap applies that observation to a whole training step. Rather than shrinking payload bytes or restructuring network routes, it attacks the communication that compression and scheduling leave exposed by running transfers concurrently with independent backward-pass computation.

Layer-by-layer overlap

Gradient computation during the backward pass proceeds layer by layer, from the output layer back to the input layer. The gradient for layer ℓ is available as soon as that layer's backward pass completes, even while layers $\ell-1, \ell-2, \ldots$ are still computing. That ordering lets the gradient for layer ℓ start communicating immediately while the GPU computes the gradient for layer $\ell-1$. Over a four-layer backward pass, the transfers for layers 4 through 2 run beneath later backward work, and only the transfer for layer 1, which becomes ready last, is left exposed before the optimizer step (figure 0.75).

In PyTorch's `DistributedDataParallel`, this overlap is implemented through gradient hooks. Each parameter registers a hook that marks its gradient ready. Once all required gradients in a bucket are ready, the reducer can launch an asynchronous AllReduce, preserving the same collective order across ranks. Meanwhile, the backward pass continues computing gradients for earlier layers. A transfer is hidden only if it completes before its result is needed; queued communication can consume part of that window, and the last bucket's transfer remains exposed (section 10).

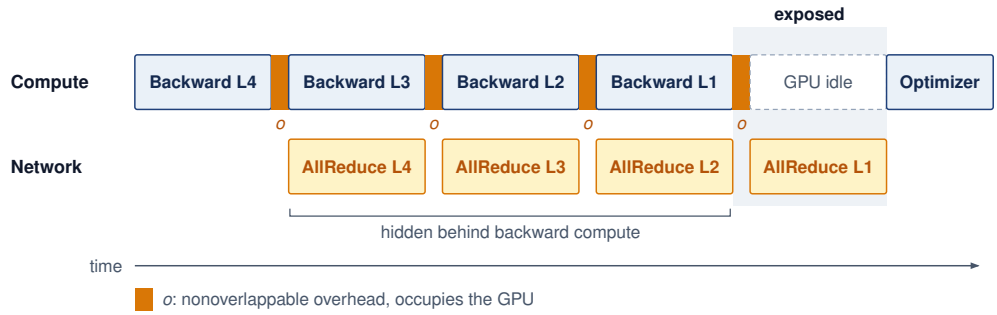


Figure 0.75: Communication-computation overlap: The backward pass runs from the last layer to the first, and each layer's gradient AllReduce launches as soon as that layer finishes, so it runs on the network while the GPU computes the next layer's gradients. The first layer finishes last and has no computation left to hide behind, so its AllReduce is exposed before the optimizer step. Overlap succeeds only when the nonoverlappable overhead (o) is small, leaving the bulk transfer free to proceed concurrently. Durations are schematic.

The effectiveness of this overlap depends on the relative sizes of computation and communication at each layer. For transformer models, the largest gradient tensors belong to the attention and feed-forward weight matrices, which are also the most computationally expensive layers. That computation cannot hide the same layer's gradient transfer, because the gradient is ready only afterward. It can hide a previously launched transfer; the ordering and cost of the remaining layers determine each gradient's overlap window.

The overlap strategy interacts with algorithm choice from section 8 and section 9. An isolated-collective crossover need not predict the best training-step schedule, because the dependency schedule determines how much of each candidate's transfer time is exposed. Overlap with the

backward pass can reduce Ring's exposed latency penalty, but the benefit must be measured with the actual gradient-ready times and runtime progress behavior.

A critical dependency limits this overlap: the optimizer step cannot begin until all required gradient reductions complete. The gradients for the final layers processed (closest to the input) expose their communication latency because no subsequent backward computation remains to mask them.

Bucket fusion

The layer-by-layer overlap described in section 10 assumes that each layer's gradient is communicated as a single message. In reality, a transformer layer contains dozens of individual parameter tensors (query, key, value projection matrices, output projection, layer norm parameters, feed-forward weights, and biases). Launching a separate AllReduce for every individual parameter would create thousands of small-message collectives, each paying the full α_{eff} overhead. To avoid this, DDP uses bucket fusion to group parameters into buckets (often configured around tens of megabytes, with 25 MB a common PyTorch reference point) and launches one AllReduce per bucket. The bucket size represents a trade-off: larger buckets amortize α_{eff} overhead but delay the start of communication (because the bucket cannot be sent until all its parameters have computed gradients). Smaller buckets start communication earlier but pay more α_{eff} overhead.

The optimal bucket size depends on gradient-ready times, tensor sizes, and network characteristics. Smaller buckets can start communication sooner when waiting for more gradients would consume the overlap window. Larger buckets can amortize startup when repeated small transfers dominate. Neither choice follows from the model family alone; the useful measure is the resulting training-step time, including the exposed final transfer. PyTorch's `bucket_cap_mb` parameter in DDP allows tuning this trade-off.

Bucket membership also determines how early communication can begin. A bucket containing one late gradient must wait even if its other gradients are ready. DDP can use reverse parameter registration order as an approximation to backward readiness and, depending on configuration, rebuild buckets from the observed backward order. Registration order need not match forward execution order, especially in models with branches or reused parameters. Grouping gradients that become ready together helps preserve the overlap window while maintaining a consistent collective sequence across ranks.

Overlap limits and exposed communication

Communication-computation overlap has fundamental limits. The LogP model's overhead parameter o represents processor time consumed by initiating or completing transfers. In the simplified LogP budget, initiation and completion consume $2o$ per operation on the participating execution resource. When backward compute intervals are short relative to that overhead, hiding network transit may save time while leaving processor overhead as the dominant cost.

The pipeline also has boundary effects. During the first backward computation, no gradient from this pass is ready to communicate. Once the output-side gradient is ready, however, its communication can overlap with the remaining backward work. At the other end, the input-side gradient has no subsequent backward computation to hide its transfer. More layers create a longer overlap window, but depth alone does not guarantee high coverage: if communication takes longer than each compute interval, a backlog remains even in a deep model.

A third limitation arises from memory pressure. Buffers used by an in-flight transfer must remain valid while independent computation produces or consumes other tensors. Their overlapping lifetimes can increase peak GPU memory use, although views and buffer reuse can avoid separate copies. For FSDP workloads, prefetching parameters can keep multiple materialized groups resident at once, trading memory savings for communication overlap. The engineering challenge is to hide transfers within the available memory budget, and FSDP's prefetch and resharding policies are the controls that set this trade-off.

A realistic training configuration shows how much communication remains exposed after overlap.

Napkin Math 6.9: Overlap budget for a 7B transformer

Problem: A 32-layer transformer model (7B parameters) is trained on 64 GPUs. Assume the data-parallel reducer communicates FP32 gradients, about 875 MB per layer, in 100 MB buckets, four times the common 25 MB default. Each layer's backward pass takes 15 ms. Assume the cluster achieves 3 ms per bucket under its contention and protocol overheads, so each layer's gradients take 27 ms, and assume equal layers and the same charge for the final partial bucket. What is the backward-plus-communication time with and without overlap?

Without overlap (sequential):

$T_{\text{sequential}} = T_{\text{backward}} + T_{\text{comm}}(N)$ = 480 ms + 32 × 27 ms = 1344 ms.

With overlap (pipelined):

Each layer's AllReduce (27 ms) runs in parallel with the next layer's backward pass (15 ms). Since 27 ms > 15 ms, there is 12 ms of exposed communication per layer that cannot be hidden.

Communication runs back to back from the moment the output layer's gradients are ready. Each later reduction overruns its backward window by the exposed amount, so the backlog grows by that much per layer, and the last reduction adds its full duration after the backward pass ends:

$T_{\text{pipelined}} = T_{\text{backward}} + T_{\text{layer comm}} + (N_L - 1) \times T_{\text{exposed}}$ = 879 ms.

Systems insight: Overlap reduces backward-plus-communication time by 34.6 percent. The remaining exposed communication comes from the AllReduce being slower than the per-layer backward pass. To reduce the backlog, either lengthen the independent compute window (for example, with a larger batch) or reduce AllReduce time. The final gradient still has an exposed transfer tail, and any change must preserve the intended training workload and quality target. The overlap is most effective when per-layer backward compute exceeds the reduction time ($T_{\text{layer backward}} > T_{\text{layer comm}}$).

The verdict turns on the assumed per-bucket charge. The hierarchical model of notebook 6.6 prices one uncontended 100 MB bucket on these eight nodes at about 0.85 ms, or 7.6 ms per layer, inside the 15 ms backward window, so at that rate every transfer except the last would hide. An overlap budget is therefore only as good as its achieved per-bucket time, which the calibration of section 12 measures rather than assumes.

An overlap budget joins the collective's transfer cost to the model's dependency schedule. Realizing that budget requires a runtime whose asynchronous progress and device-memory path preserve the independent work available between gradient production and consumption.

Communication Libraries and Runtimes

An overlap schedule only works if the communication backend can move the required tensors while independent computation proceeds. The engineering decision is which library preserves the chapter's model, topology, and overlap assumptions on the target hardware. Production libraries realize the same algorithms and schedules but differ in four properties, namely the device memory path, topology awareness, portability, and observability. Each library examined in this section is strongest on a different subset of them, and the selection guide in section 12 compares them side by side.

NCCL communication backend

NCCL[10] is central to many NVIDIA multi-GPU training deployments because it turns collective algorithms (covered in section 8 and section 9) into GPU-resident data movement (Jeaugey 2017; NVIDIA 2026b). Its integration with GPU memory and execution paths makes three mechanisms especially relevant. Kernel fusion combines reduction with data movement, avoiding separate copy-reduce-copy stages and reducing intermediate HBM traffic. Channel pipelining opens multiple parallel communication channels to exploit available network interfaces, but realized bandwidth depends on NIC placement, routing, and contention; multiple channels do not create additional port capacity. GPUDirect RDMA lets the network card access GPU memory directly over PCIe, avoiding

[10] **NCCL (NVIDIA Collective Communications Library)**: NCCL can approach theoretical peak bandwidth on well-configured NVIDIA clusters by combining GPU-resident collectives, GPUDirect RDMA, and topology-aware path selection (Jeaugey 2017; NVIDIA 2026b). Its NVIDIA-specific design creates a vendor lock-in trade-off: organizations can gain a tuned collective backend for NVIDIA GPU fabrics but lose portability to AMD (RCCL) or Intel (oneCCL) hardware.

host-memory staging. CPU work may still be needed to set up and coordinate transfers, but the payload need not follow the staged GPU → CPU memory → NIC → network path. Together these mechanisms make NCCL a natural first backend to benchmark for NVIDIA GPU collectives.

NCCL's topology discovery also informs algorithm selection. The topology-detection phase from section 10 uses hardware information about NVLink connectivity, PCIe paths, and NIC placement. On a DGX H100, NCCL detects that all eight GPUs are fully connected through NVSwitch, which makes switch-based algorithms available that a system with point-to-point NVLink connections cannot use. Detecting NVSwitch does not mandate one algorithm, however; message size, process-group membership, software support, and tuning logic still determine the selected schedule.

NCCL also implements automatic algorithm selection based on message size and GPU count. Internally, it maintains tuning logic that maps message size, GPU count, and topology to a selected algorithm or protocol family. Users can override or inspect some built-in choices through documented environment variables such as `NCCL_ALGO`, `NCCL_PROTO`, and `NCCL_DEBUG` when benchmarking reveals suboptimal choices for specific workloads (NVIDIA 2026b). The debug output provides essential visibility for performance debugging.

A newer NCCL capability is limited support for user-defined reduction operators, such as the documented premultiplied-sum reduction for a communicator and datatype (NVIDIA 2026b). This support is narrower than MPI-style arbitrary reductions and custom datatypes, so application-specific aggregation such as outlier clipping usually still requires separate kernels or framework-level logic.

Despite its adoption, NCCL is not without limitations. It is open source but tightly coupled to NVIDIA GPUs and networking, and cannot be used as the native collective library on AMD or Intel accelerators. For organizations building multi-vendor infrastructure or requiring full control over the communication stack, these limitations motivate the use of alternative libraries.

MPI distributed foundation

MPI[11] standardized collective operations before the emergence of modern large-scale GPU training. The MPI Forum's standards history records Version 1.0 in May 1994, defining a vendor-neutral API for point-to-point messaging, collective operations, and process management that became the lingua franca of high-performance computing (Message Passing Interface Forum 2015, 1993). MPI remains relevant for ML systems when portability, CPU-side coordination, or HPC integration is the binding requirement.

MPI's specification provides persistent collectives and non-blocking collective operations with explicit request-based completion semantics. Persistent collectives (introduced in MPI 4.0) let applications initialize a collective once and activate it repeatedly, giving the implementation an opportunity to amortize setup costs. This fits training loops where the same AllReduce shape repeats at every step. Non-blocking collectives (`MPI_Iallreduce`) return request handles that applications can test or wait on. Their completion model differs from NCCL's CUDA-stream ordering; either approach requires independent work and effective runtime progress to realize overlap.

MPI also provides one-sided communication (MPI_Put, MPI_Get, MPI_Accumulate) that maps naturally to RDMA hardware. These operations allow a process to read from or write to another process's memory without the remote process explicitly participating, enabling communication patterns that are difficult to express with collective operations alone. Parameter server architectures and certain asynchronous training algorithms benefit from one-sided semantics.

GPU-awareness depends on the MPI implementation and its configuration. A host-only implementation cannot accept a device pointer in `MPI_Allreduce`; the application must stage data through host buffers. CUDA-aware MPI extensions (available in OpenMPI and MVAPICH2) can accept GPU pointers directly, but the selected transport and reduction path determine whether data still passes through host memory. Benchmark that path against NCCL for NVIDIA GPU collectives. MPI also supports CPU collective operations, process management (`mpirun`, `mpiexec`), and integration with portable HPC applications, so a training system can use MPI and a device-specific collective library together.

[11] **MPI (Message Passing Interface)**: Standardized in 1994 after a multi-year community effort, MPI defined collective operations such as AllReduce, Broadcast, and Scatter that ML frameworks later adopted. Traditional MPI implementations require explicit device-to-host copies for GPU buffers, whereas CUDA-aware implementations can use GPUDirect paths. NCCL nevertheless became the usual performance-oriented choice for NVIDIA GPU collectives, while MPI remains common for job launch (`mpirun`) and CPU-side coordination.

Gloo communication library

Gloo is Meta's open-source collective communication library and a PyTorch backend for development, CPU workloads, and portability. Its TCP/IP transport supports multi-process testing over a loopback interface, so engineers can exercise collective semantics before deploying to an accelerator cluster. When a hardware-specific backend is unavailable or inappropriate, Gloo provides a portable communication path.

For CPU tensor workloads, Gloo provides AllReduce and Broadcast within PyTorch process groups. Its performance relative to MPI depends on the collective, message size, and transport selected by the installed implementation. Local process placement alone does not establish that a shared-memory transport is active; communication through a loopback network interface still incurs protocol and copying costs. The relevant comparison measures the actual intra-node and inter-node paths used by the workload.

Gloo prioritizes portability over the GPU-specific memory paths and topology tuning developed earlier. A hardware-optimized backend remains the candidate to benchmark for performance-critical accelerator training.

Library selection guide

The selection matrix in table 0.52 summarizes those axes. The point is not to memorize library names; it is to choose the backend whose memory path, topology model, portability constraints, and debugging visibility match the job.

Table 0.52: Communication Library Selection: Choose based on hardware and workload requirements. Many NVIDIA GPU training deployments use NCCL; Gloo serves as a portable fallback.

Scenario	Recommended Library	Rationale
Multi-GPU training (NVIDIA)	NCCL	GPUDirect, kernel fusion, NVLink-aware
CPU-only distributed training	Gloo or MPI	Mature CPU optimizations
Development/debugging	Gloo	Cross-platform, no CUDA dependency
Mixed vendor GPUs	Vendor-specific groups; validate cross-group path	NCCL, RCCL, and oneCCL are vendor-specific
HPC integration	MPI + NCCL	MPI for job launch, NCCL for GPU collectives

The table follows directly from the chapter's cost model. A backend's memory path and topology choices determine how it uses the fabric, while diagnostic signals help identify the part of α, β, or processor overhead that limits the job. Observability supports tuning; the resulting performance still has to be measured with the workload's collective and placement.

Vendor-specific libraries

The three libraries (section 10, section 11, and section 12) do not exhaust available options because the same collective algorithm has different effective α, β, and topology constraints on different accelerator platforms. The pattern is consistent: use the backend that understands the device memory path and interconnect on the hardware actually running the job. AMD's RCCL (ROCm Communication Collectives Library) implements collectives for AMD GPUs and the ROCm stack, while Intel's oneCCL (oneAPI Collective Communications Library) targets Intel accelerator and CPU deployments. Their names matter less than the durable selection criteria: device-memory access, topology awareness, collective semantics, and measurable performance on the target fabric.

The broader pattern is a standardized front-end API with hardware-specific backends underneath it. PyTorch's `torch.distributed` module routes collective calls to NCCL, RCCL, oneCCL, or Gloo based on the configured process group and available backend. In practice, teams often mix backends rather than choosing one globally: a GPU process group may use NCCL for gradient AllReduce while a CPU-side coordination group uses Gloo for barriers, scalar broadcasts, or sampler state. The chapter's algorithms remain universal, but the efficient execution plan is hardware-specific. When that plan underperforms, the communication backend also becomes the diagnostic starting point.

Calibrating collective communication models

The bandwidth-latency trade-off (principle 5) provides useful first-order predictions, but a valid comparison must model the same collective that the benchmark executes. For a ring AllReduce over N ranks and an M-byte tensor, the first-order cost is $2(N-1)\alpha + 2(N-1)M/(N\beta)$, not the point-to-point expression $\alpha + M/\beta$. A tree, a hierarchical schedule, and a switch-assisted reduction have different step counts and traffic factors. NCCL also selects protocols, channels, and algorithms according to message size and detected topology, so those choices become part of the experimental condition (Jeaugey 2017; NVIDIA 2026b).

A calibrated collective model therefore records the operation, reduction datatype, rank count, tensor size, algorithm and protocol, topology, rank placement, and achieved bus bandwidth. It then fits effective α and β to measurements from that same configuration. Comparing predicted and observed time under this contract reveals software overhead or topology loss without mistaking a collective's algorithmic traffic factor for library inefficiency. The resulting parameters apply only to the measured regime; changing the collective, process group, topology, or library version requires recalibration. A calibrated model selects a collective schedule and sizes its overlap window; attributing an observed training-step regression to kernels, memory, communication, or contention is a broader measurement task, and the system-profiling workflow in section 2 supplies the discipline it requires.

Communication diagnosis begins by comparing the workload against a matched bare-collective baseline and recording the selected algorithm, protocol, rank placement, and achieved bandwidth. A healthy baseline with a slow training step points to invocation granularity, contention, stragglers, or insufficient overlap rather than the fabric alone. Profiler traces and the attribution workflow separate those causes; the output needed here is the calibrated α, β, and overlap window that select a collective schedule.

The backend must satisfy both the collective contract and the measured execution budget. A fast isolated collective is insufficient when its placement, invocation order, or progress behavior leaves the training step waiting.

Fallacies and Pitfalls

Communication optimization attracts persistent misconceptions because the interaction between latency, bandwidth, topology, and compression creates nonobvious failure modes that simple mental models miss.

Fallacy: *Bandwidth is the only metric that matters.*

For small control messages or sufficiently small token exchanges, latency (α) dominates. Buying 400G networking will not help if the message takes 5 µs to serialize in software. The critical message size $n^* = \alpha \cdot \beta$ determines which metric to optimize: below n^*, reduce latency; above it, increase bandwidth.

Pitfall: *Assuming AllReduce works for everything.*

AllReduce computes one reduction over compatible element counts and datatypes; it does not implement destination-specific routing. In expert parallelism and recommendation systems, each worker instead sends distinct data to different peers. These workloads require AllToAll or its variable-count form, whose performance depends on injection bandwidth, bisection bandwidth, oversubscription, message granularity, routing, and skew rather than logical connection count alone.

Fallacy: *Pipeline parallelism eliminates communication overhead.*

Pipeline parallelism exchanges activations and their backward gradients between adjacent stages. It can coexist with data-parallel AllReduce, and transfer cost still depends on tensor size and placement. Each stage boundary is a point-to-point dependency on the critical path, so a stage cannot start a microbatch until its activations arrive, and the pipeline's bubble idleness (section 5) adds to whatever transfer time remains exposed. For a balanced fill-and-drain schedule with N_{PP} stages and m microbatches, the idle fraction is $(N_{\text{PP}}-1)/(N_{\text{PP}}-1+m)$, so keeping it below 20 percent requires $m > 4(N_{\text{PP}}-1)$, which 32 microbatches satisfy for eight stages, a constraint on batch size and activation memory that no faster link removes. Parallelism choices must therefore account for both communication dependencies and schedule-induced idleness.

Pitfall: *Using Ring AllReduce by default without checking message size and topology.*

Ring achieves the bandwidth-optimal term $2\frac{N-1}{N}\frac{M}{\beta}$ in the endpoint model but pays $\mathcal{O}(N)$ latency. For a 1 MB gradient across 64 GPUs with $\alpha = 10$ µs and $\beta = 10$ GB/s, the simple Tree model wins because Ring's extra startup cost (about 1140 µs beyond Tree's) exceeds Tree's extra byte-transfer cost (about 1000 µs beyond Ring's). The log-aware crossover estimate $M_{\text{crossover}} \approx N\alpha\beta/\log_2 N$ guides this two-model comparison. Runtime selection should be evaluated with the actual algorithm variants and placement.

Fallacy: *Gradient compression is safe without error feedback.*

Top-k sparsification can achieve 99 percent compression, but naively discarding small gradients can prevent convergence. Without error feedback ($\mathbf{e}_{t+1} = (\mathbf{g}_t + \mathbf{e}_t) - \mathbf{v}_t$), gradients below the threshold are lost forever, accumulating systematic bias that can destabilize training or leave a persistent optimization error.

Pitfall: *Evaluating gradient compression by communication speedup alone.*

Even a 100× communication speedup must be evaluated against the complete training budget when reaching the target quality requires 2× more iterations. It helps only if the reduction in total step time outweighs the extra iterations. The right metric is time to target quality, not time per iteration. Communication microbenchmarks measure collective time, while the engineering decision depends on time to target quality, and the two diverge whenever compression introduces gradient bias or variance that slows convergence. Validate compression on the target convergence benchmark with the deployment training schedule, not on a synthetic AllReduce microbenchmark alone.

Fallacy: *Async collectives always hide latency.*

Python's `dist.all_reduce(..., async_op=True)` only returns control to the CPU. The LogP model distinguishes network latency L_{LogGP} (overlappable) from processor overhead o (nonoverlappable). The condition $T_{\text{compute}} > o$ alone does not guarantee that a transfer is hidden. The remaining independent work must cover the transfer interval, the runtime must make progress, and dependent consumers must wait for completion.

Pitfall: *Silent data corruption in the network.*

Networks are not perfect. A bad cable, faulty NIC, or firmware bug can corrupt data below the level where the training framework sees an explicit error. At 10,000 nodes running 24/7, even rare bit errors can appear often enough to matter. The communication-specific lesson is that bandwidth tuning is incomplete without end-to-end validation: checksums, collective result checks, gradient-norm sanity tests, and the fault-tolerance mechanisms of chapter 12 must catch silent data corruption before corrupted gradients become model updates.

Fallacy: *Flat AllReduce is good enough for multi-node training.*

A single flat Ring AllReduce runs at the rate of its slowest edge, and on a multi-node cluster that edge is one cross-node port at 50 GB/s over InfiniBand rather than the 450 GB/s per direction available within the node, however carefully the ranks are ordered. For an 8-node cluster with 8 GPUs per node, the worked hierarchical schedule assigns one-eighth of the payload to each inter-node shard group and runs the eight groups on eight ports at once, an 8× reduction per group rather than a reduction in aggregate cross-node bytes. The modeled gain of about 4.8× in section 9 therefore depends on independent port capacity. A multichannel flat schedule that also occupies several ports at once requires its own traffic accounting.

Pitfall: *Assuming one cost formula fits every intra-node algorithm.*

NVSwitch provides high-radix, nonblocking connectivity within supported DGX generations, but it does not turn an arbitrary AllReduce into a one-step reduction. Unless the switch generation and software path provide in-network reduction, endpoints still execute a ring, tree, or other scheduled algorithm over NVLink paths; newer switch-assisted designs require their own documented cost model. Capacity planning should therefore use the algorithm and hardware generation that the runtime actually selects. Apply the corresponding intra-node traffic factor, the inter-node ring or tree factor, and their hierarchical composition rather than substituting a generic crossbar hop for reduction work.

Fallacy: *Rank-to-GPU mapping does not affect collective performance.*

If the job scheduler assigns ranks to GPUs without considering the physical topology, hierarchical AllReduce and rail-optimized routing may route traffic suboptimally. A common symptom is that `nccl-tests` reaches full bandwidth on the cluster while the training job achieves only a fraction of it, because the job's ranks were placed so that corresponding shards cannot stay on one rail; message sizes, overlap, and competing traffic can produce a similar gap. Before benchmarking, record each rank's GPU, NIC binding, node, and rail and confirm the intended layout (for example, ranks 0–7 on node 0 and ranks 8–15 on node 1, with local rank i on each node bound to rail i). Contiguous rank numbers on a node alone do not establish that corresponding shards use the intended physical rails.

Pitfall: *Benchmarking collectives without recording placement context.*

A collective benchmark is not reusable evidence unless it records rank order, NIC rail binding, NCCL topology configuration, and node allocation. Without that context, teams compare results from different physical layouts and mistake placement differences for library or hardware regressions.

Summary

Communication is the friction of scale. Every mechanism in this chapter works on the communication term $T_{\text{comm}}(N)$ of the Fleet Law (equation 0.3), either shrinking it through better schedules, placement, and smaller payloads or enlarging T_{overlap} so that less of it is exposed, and each spends effort on the Communication axis of C^3 so that added compute does not sit waiting. Computation is local, but learning is global.

The mechanisms compose into one ordered judgment. The contract comes first. The primitive whose output the next computation consumes fixes who must exchange data and what each rank must hold, and no faster schedule can recover the bytes spent delivering a broader result than the model needs. The price comes second. The α-β model, the critical size $n^* = \alpha \cdot \beta$, and the ring-tree crossover $M_{\text{crossover}}$ say which term binds for a given message, group, and fabric, and LogP says how much of that price can be hidden. Placement comes third, because a schedule priced on a flat network realizes its cost only when hierarchy, rails, and rank order match the logical exchange to the physical links. Compression and overlap then decide how much of the remaining transfer reaches the critical path, and each must win in time to the same quality target rather than in isolated collective time. A model calibrated against the same collective, process group, and topology closes the loop by separating a schedule's inherent traffic from library or placement loss.

Key Takeaways: Every byte has a travel cost

- **The α-β model reveals the bottleneck**: The critical message size $n^* = \alpha \cdot \beta$ separates startup-dominated from bandwidth-dominated transfers (principle 5). Collective duration also depends on round count and traffic volume; fit parameters with a benchmark that matches the workload's collective and topology.
- **Algorithm choice is scale-dependent**: Ring AllReduce is bandwidth-optimal but pays $\mathcal{O}(N)$ latency; the simple full-message Tree model uses fewer rounds ($\mathcal{O}(\log N)$) but more bandwidth work. Use the log-aware crossover estimate $M_{\text{crossover}} \approx N\alpha\beta/\log_2 N$ to reason about the switch point.
- **Hierarchy exposes parallel network capacity**: Local reductions over fast NVLink leave smaller shards for the slow InfiniBand tier. The effective bandwidth gain requires independent port capacity for concurrent shard exchanges; splitting a payload cannot multiply the capacity of a shared uplink.
- **AllToAll schedule selection follows the active bound**: Direct exchange preserves simplicity for balanced coarse chunks, hierarchy amortizes startup across scarce inter-node links, and variable-size exchange removes padding under skew. Injection bandwidth, bisection capacity, oversubscription, message granularity, and the hottest receiver determine which schedule wins.

- **Error feedback controls lossy compression error**: Sparsification can discard 99 percent of each transmitted update while accumulating the compression residual locally and adding it before the next compression step. Under the analyzed assumptions, this bounds accumulated compression error and restores convergence guarantees even though individual compressed updates can remain biased.
- **Overlap is limited by remaining independent work**: Gradient hooks and bucket fusion let communication run during later backward computations, but the final transfer and any communication backlog remain exposed. Evaluate the resulting step time, not model depth alone (principle 10).
- **Placement determines usable bandwidth**: Logical collective schedules share physical links according to rank placement and routing (principle 6). A matched benchmark must record that placement; changing the mapping can change the bottleneck even when the algorithm and hardware stay fixed.

If parallelism decides what must be communicated, collective communication measures what that communication costs. Every collective, whatever its contract, is priced first by the same two terms, a startup latency paid once per round and a transfer time paid per byte. The useful optimization is the one that shortens the training dependency path while preserving the required result. Communication is the price compute pays to act as one machine.




What's Next: From logic to resilience

The fleet now has its logic (parallelism) and its traffic patterns (communication). Every collective in this chapter, however, assumed that all ranks in its process group arrive, on time and with correct data. A collective is not a barrier, but each dependent consumer still waits for every contribution, so one crashed node, failed link, or GPU that slows down without failing stalls the whole synchronous group, and a contribution corrupted in transit is reduced into every replica's update. Across thousands of accelerators such events stop being rare. The next chapter begins by computing how often they arrive, then builds the checkpointing, recovery, and elastic training that keep the computation making progress on imperfect hardware.

↪ Checkpointing protocols, failure recovery, and elastic training systems are developed in chapter 12.

Fault Tolerance

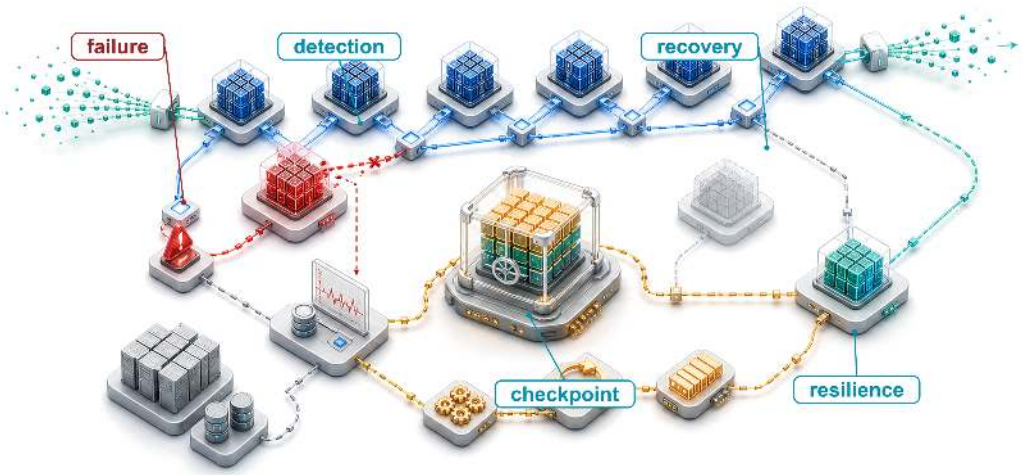

Purpose

Why does scale transform hardware failure from rare exception to routine condition that systems must absorb continuously?

A single accelerator can run for years between hardware failures. A thousand accelerators turn that same component risk into failures every couple of days, and ten thousand see failures every few hours, while shared power and network faults can interrupt many workers at once. Individual devices need not become less reliable for the fleet to experience failures routinely. A program on one machine can often stop and restart when a component fails; a distributed training job must also recover agreement among surviving workers about which progress remains valid. Restarting quickly is of little value if the restored state silently changes the computation. Preserving more state reduces the work at risk, but consumes storage bandwidth and memory while the job is healthy. Waiting longer between saves reduces that overhead while increasing the progress a failure can erase. Serving imposes a different consequence: users may abandon a request before recovery completes, and replacing a worker may leave the request's context unavailable. A response that arrives on time can still be unacceptable if recovery has discarded information needed to produce it. Engineers must therefore bound lost work and recovery delay while preserving the validity of training and the usefulness of service. The goal is continued useful execution despite repeated failures, with the costs and limits of recovery made explicit. In C^3 terms, fault tolerance spends compute and communication on coordination so that component failures do not routinely become failures of the entire workload.

Learning Objectives

- Calculate mean time between fleet failures from component rates and estimate interruption frequency for large training clusters
- Classify hardware, software, and silent-data-corruption failures by detectability, blast radius, and recovery path
- Select checkpoint intervals that balance write overhead against acceptable lost work and recovery delay
- Design distributed checkpointing and elastic recovery plans for multi-terabyte model state across GPU fleets
- Design serving redundancy, failover, and state-recovery policies under latency budgets and partial failures
- Select graceful degradation strategies that preserve useful service when models, features, regions, or capacity fail
- Evaluate fault injection and observability evidence to validate detection, isolation, and recovery behavior

Failure Analysis at Scale

Imagine a 10,000-GPU cluster midway through a three-month training run for a new foundation model. The communication layer has done its job, and thousands of devices exchange gradients through AllReduce, AllGather, and AllToAll as if they were one machine. Then the arithmetic of scale catches up. A GPU fails every few hours, and if the system cannot absorb that ordinary physical event, synchronized training halts and millions of dollars of compute sit idle. **Fault tolerance** is the system property that lets distributed execution continue making useful progress when components fail, degrade, or disappear. In the Fleet Stack of figure 0.15, fault tolerance occupies the Reliability & Control row of the Distribution band, where it protects the progress that parallelism and communication produce.

That fragility is the direct consequence of successful synchronization. Every collective in chapter 8 assumed that all ranks in its process group arrive, and each dependent consumer waits for every contribution. One stalled device can therefore stop progress in its synchronous training group, even while unrelated jobs continue elsewhere in the fleet. Fault-tolerant ML systems preserve progress by detecting failure, checkpointing recoverable state, restarting or elastically reshaping jobs, and treating hardware churn as normal execution rather than an exceptional path. That reliability envelope covers both halves of the fleet's work. Training needs recovery that preserves weeks of accumulated progress, while serving needs redundancy, failover, and graceful degradation that preserve a latency contract, and both draw their spare capacity from a shared fleet pool.

↪ How the scheduler holds spare capacity for failed jobs and prepositions replacement nodes while a missed heartbeat is confirmed is developed in section 4.


The failures to be absorbed differ first in how long they persist, from a transient bit flip that clears on its own, through an intermittent error that returns under the load that exposed it, to a permanent component failure that repeats on every retry. That persistence decides whether the fleet retries, quarantines, or replaces a component (section 10). Failures also differ in how visibly they announce themselves. A gray failure is a component that stays alive but runs slowly or erratically, so it keeps answering the liveness checks that would flag a crash while every peer that waits on it slows down. Silent data corruption (SDC) goes further, producing wrong values with no error at all. Both pair low detection rates with a high blast radius, because the system keeps running on state it should no longer trust.

The recovery target here is trustworthy execution: preserving valid training progress and restoring a service after its infrastructure or software fails. A restored model can still make poor predictions on changed inputs even when every component executes correctly. Evaluating that behavioral robustness requires a separate contract for model quality under distribution shifts and adversarial inputs, developed in chapter 26. The distinction lets us use model-quality signals to diagnose a fault without treating every quality regression as evidence of failed hardware.

Because failures cannot be eliminated at this scale, fault-tolerant systems verify completion rather than assume it, treat failure as a normal code path, exercise recovery continuously, and account for

partial failures that naive error handling may not anticipate. These techniques draw on decades of distributed systems research, but ML workloads change the economics. Training checkpoints are large but can be sized from the model and optimizer state, while some optimization algorithms tolerate bounded numerical perturbations without requiring bitwise replay. That tolerance must be established for the training method; stochasticity does not make arbitrary corruption or inconsistent recovery safe. A recovery design can exploit approximate execution only while preserving its declared convergence and quality requirements.

The transition from small-scale experimentation to large-scale production changes the relationship between systems and failures. A researcher training a model on a single GPU can go years without a hardware failure. That same workload on a 1,000-GPU cluster sees GPU-only failures every couple of days, and a production cluster fails more often once PCIe, power, storage, and network domains enter the failure budget. This shift from *rare exception* to *routine occurrence* demands different engineering approaches. The mathematical analysis that follows makes this transition precise and quantitative.



Fleet mean time between failures (MTBF) collapses from 50,000 h to 5 h as GPUs multiply.

The Mathematics of Inevitable Failure

System reliability engineering provides the foundational framework for understanding failure at scale (Birolini 2017). Individual components exhibit failure rates characterized by the failure rate parameter λ,[1] measured in failures per unit time. For a single component with constant failure rate λ, the probability of surviving without failure until time t follows an exponential distribution,[2] as in equation 0.16:

$$R_{\text{single}}(t) = e^{-\lambda t} \tag{0.16}$$

The expected time to failure of this component equals $1/\lambda$. In this book's convention, mean time to failure (MTTF) names a single component's expected time to its first failure while MTBF names the repairable system's expected operating time between successive failures, excluding recovery downtime. Under the constant-rate exponential model used here the two coincide numerically, and the fault-tolerance model uses MTTF for per-component constants and MTBF for composed system rates. Data center GPUs often use planning MTTF values in the tens of thousands of hours, with field behavior depending on operating conditions, cooling effectiveness, manufacturing variation, and workload stress.[3] Section 4 catalogs the reference per-component FIT and MTTF values (GPU, high-bandwidth memory (HBM), network interface card (NIC), power supply, PCIe switch, optical cable, ToR switch) that anchor these λ and FIT figures, so a reader can substitute the constant for any device and reproduce the rates used throughout the fault-tolerance analysis.

When multiple independent components operate in a system where any single failure causes system failure, equation 0.17 formalizes how system reliability becomes the product of individual component reliabilities:

$$R_{\text{system}}(t) = \prod_{i=1}^{N} R_{\text{single}_i}(t) = \prod_{i=1}^{N} e^{-\lambda_i t} \tag{0.17}$$

For N identical components with individual failure rate λ, equation 0.18 gives the identical-component simplification:

$$R_{\text{system}}(t) = e^{-N\lambda t} \tag{0.18}$$

The system failure rate becomes $N\lambda$, and equation 0.19 expresses how the system MTBF scales inversely with component count. This inverse scaling explains why per-device reliability that looks excellent in isolation erodes at cluster scale:

$$\text{MTBF}_{\text{system}} = \frac{1}{N\lambda} = \frac{\text{MTTF}_{\text{component}}}{N} \tag{0.19}$$

The consequence is a gap between failure cadence and job length. At 10,000 GPUs, the GPU-only calculation gives an expected interval of 5 hours, so a training run measured in weeks accumulates dozens of expected failures and one measured in months accumulates hundreds. These are planning averages, not a schedule of incidents; a shorter job can finish without failure even when its expected

[1] **Failure rate (λ)**: Expressed in FITs (Failures In Time), where 1 FIT equals one failure per billion device-hours. A data center GPU with a 50,000-hour mean time to failure has FIT $= 20{,}000$, corresponding to $\lambda_{\text{hour}} = 2.0 \times 10^{-5}$ failures/hour. That seems negligible for one device but becomes dominant at fleet scale: a cluster with 10,000 GPUs accumulates 200,000,000 FITs from GPUs alone, translating to an expected GPU failure every 5 hours.

[2] **Poisson process**: A statistical model for events occurring independently at a constant average rate. In this model, event counts follow a Poisson distribution and waiting times follow an exponential distribution, giving the survival function $R_{\text{single}}(t) = e^{-\lambda t}$. With independent identical component hazards, the probability of at least one failure in a 10,000-component cluster is $1 - e^{-N\lambda t}$. The aggregate hazard $N\lambda$ scales linearly with component count; the failure probability is nonlinear in both N and t, approaching $N\lambda t$ only when that product is small.

↪ The independence, exponential-lifetime, and Poisson results this failure arithmetic rests on are developed in section 4.

failure count exceeds one. Once the expected time between failures falls below the length of the job, fault tolerance becomes part of the execution budget for long-running fleet work.

Scale and reliability diverge sharply across training generations. By pairing accelerator counts (left axis, log scale) with modeled system MTBF (opposing right axis), figure 0.76 tracks how training fleets expanded by four orders of magnitude from 2012 (AlexNet on two GPUs) to 2024 (Llama 3 on over 16,000 GPUs), driven by the compute budgets that scaling laws reward (section 6). Applying the same per-device planning rate across those sizes compresses system MTBF from tens of thousands of hours to under ten hours. The opposing axis illustrates the scaling model rather than a history of measured failure rates, showing why recovery becomes an active scheduling constraint.

[3] **GPU MTTF variation**: This chapter uses 50,000 hours as a planning constant for current data center GPUs (A100 and H100 class), not as a guarantee for every deployed GPU. Published fleet studies from Google TPUv4 pods and Meta GPU clusters report that field reliability depends on topology, cooling, workload, and operational practice (Zu et al. 2024; Kokolis et al. 2025; Dubey et al. 2024). The planning constant therefore anchors the arithmetic, while operators should substitute measured fleet rates when they have them.

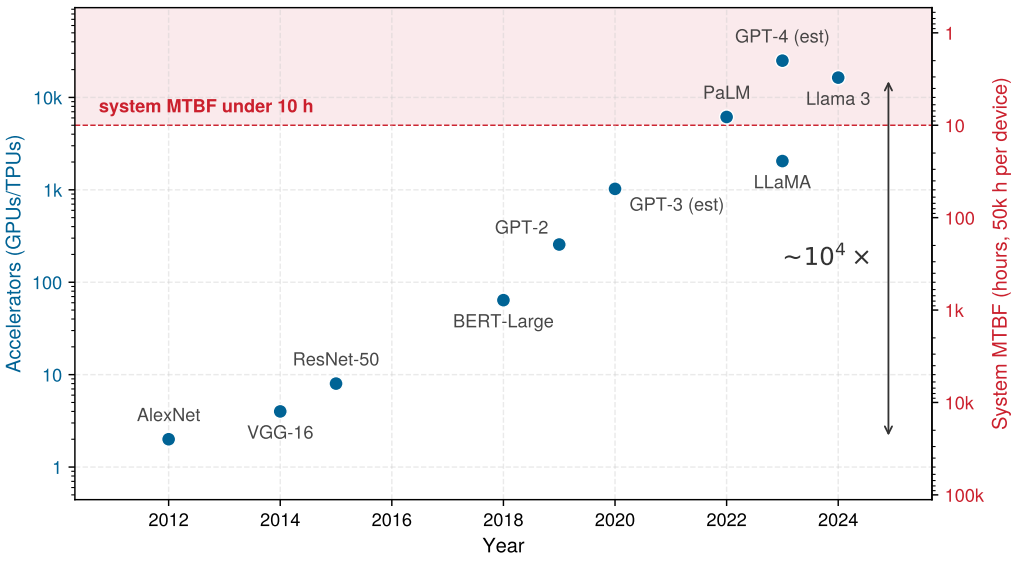


Figure 0.76: The rise of fleet-scale training: Accelerator count for state-of-the-art training runs from 2012 to 2024, with system mean time between failures on the opposing axis. Cluster size rises about four orders of magnitude and system MTBF falls correspondingly, which is what turns fault tolerance from a reliability feature into a scheduling constraint.

Quantitative Reliability Analysis

The GPU-only calculation of equation 0.19 supplies the scale intuition; a real training system then composes GPUs, HBM, links, power supplies, storage paths, and redundancy into one failure budget. Component rates are usually quoted in the FIT units introduced with the failure rate, so the 50,000-hour GPU contributes 20,000 FIT to whatever system contains it. The new question is how different component rates compose, and the composition rule depends on the redundancy structure and the independence assumptions. For series systems (for example, a node where all 8 GPUs must work), failure of any component fails the whole. With independent constant-rate failures, the reliabilities multiply as in equation 0.17, so the rates add even when the components differ:

$$\text{MTBF}_{\text{system}} = \frac{1}{\sum \lambda_i}$$

which is why the system failure rate grows linearly with component count while system MTBF falls in inverse proportion.

The same product governs instantaneous availability, a different quantity from the survival function $R_{\text{single}}(t)$. Availability A is the probability that a component is up at a randomly chosen instant, counting repairs, whereas $R_{\text{single}}(t)$ is the probability that it has not yet failed by time t. If each GPU is independently up with probability A_{GPU}, all N are up together with probability $(A_{\text{GPU}})^N$, which is the reliability gap of equation 0.1 evaluated here for the chapter's 10,000-GPU cluster. That power erodes even very reliable hardware once N reaches fleet scale.

Napkin Math 7.1: The 9s of availability

Problem: A cluster of 10,000 GPUs runs with each GPU at 99.99 percent availability (only 52.6 minutes of downtime per year). Assuming independent up/down states, what is the probability that the entire cluster is up at the same instant?

Math:

1. Single GPU availability probability (A_{GPU}): A GPU with 99.99 percent availability has an all-up probability $A_{\text{GPU}} = 0.9999$ at a randomly chosen instant.
2. Cluster availability probability (A_{cluster}): $A_{\text{cluster}} = (A_{\text{GPU}})^N$.
3. **Result**: $(A_{\text{GPU}})^N \approx 0.37$.

Systems insight: Even when each GPU is available 99.99 percent of the time, a 10,000-GPU cluster has only a 37 percent chance that every GPU is simultaneously available. Hardware reliability alone is insufficient; software must handle failures automatically.

Systems Perspective 7.1: Scale transforms failure

A cluster of 10,000 GPUs turns a per-GPU MTTF of 50,000 hours into a system MTBF of 5 hours. For a repairable system, steady-state availability is $A = \text{MTBF}/(\text{MTBF} + \text{MTTR})$, where mean time to recovery (MTTR) is the recovery interval. Cutting MTTR from 30 minutes to 5 minutes raises availability from 90.91 percent to 98.36 percent. This stationary two-state model assumes unconstrained repair capacity and complete outage; correlated incidents, repair contention, and degraded operation require direct measurement (Birolini 2017). Systems must engineer recovery, not merely improve components.

Engineering faster recovery is one response to that arithmetic; redundancy is the other. For parallel systems providing redundancy, suppose that any surviving component can satisfy the required service. With independent failures and no repair during the observation interval, the system survives until every component has failed:

$$R_{\text{system}}(t) = 1 - \prod_{i=1}^{N_{\text{red}}} (1 - R_{\text{single}_i}(t))$$

Series composition is the training job's problem, because a synchronous step needs every participant. Parallel composition is the serving fleet's lever, and it returns when interchangeable replicas protect a latency contract. Both rules, however, describe whatever the model calls a component, and the fault rate assigned to that component depends on which protections sit inside it.

Lighthouse 7.1: Archetype A (GPT-4/Llama-3): Memory soft-error scale

Composition makes the distinction between raw faults and job interruptions essential. Memory soft-error rates are quoted per megabit of storage rather than per device, so the exposure grows with memory capacity. As an illustrative raw-bit-error budget, assume 250 FIT per megabit across 1,024 GPUs with 80 GB each, the size of the Archetype A reference cluster. The resulting interval between raw memory errors is roughly 20 seconds. This is not a measured job-failure interval. Error-correcting code (ECC) protection can correct covered error patterns before they affect computation, while detected uncorrectable errors and escaped corruption require different recovery paths. At that raw rate, unprotected memory in the reference cluster would corrupt training state many times per hour, so ECC is a precondition for large-scale training rather than an option. A fleet reliability budget therefore needs the residual job-interrupting and silent-corruption rates under its actual protection scheme; raw bit-error rates alone cannot establish whether memory, logic, or interconnect dominates.

These raw bit-error rates justify ECC, but they are not the interruption rates that set checkpoint cadence; the worked cascade that follows uses device MTTF values that already include the effect of that protection. The cascade also treats its GPU, PCIe, power, and network contributions as separate categories, so a measured whole-node rate that already includes those paths cannot be added to them again.

Cluster MTBF Calculation

Consider a training cluster designed for large language model development, roughly ten times the 1,024-GPU Archetype A reference cluster, with the following specifications:

- 10,000 NVIDIA H100 GPUs
- Individual GPU MTTF: 50,000 hours
- Each GPU connected to host via PCIe (MTTF: 200,000 hours)
- Each node contains 8 GPUs fed by 6 power supply units (MTTF: 100,000 hours each) in 4+2 redundancy, so the node keeps full performance with any 2 of them failed
- Network infrastructure per node (NIC, cables): MTTF 150,000 hours

Together, these components define the failure domain used in the rate calculations in this worked example.

Failure rate calculation per GPU subsystem

Each GPU operates within a failure domain that includes the GPU itself, its PCIe connection, and a proportional share of the node's network infrastructure. Power enters the sum only through supplies whose single failure stops the node, counted as n_{psu} in the power equation. With the node's supplies in redundant sets, no single unit qualifies, so the power term below is zero in this first-order calculation. The approximation omits the residual risk that additional independent failures exhaust redundancy before repair. A fault upstream of the chassis, such as the loss of the circuits feeding it, can also take down the whole node; that risk belongs to the correlated failures treated later in this chapter.

$$\lambda_{\text{GPU}} = \frac{1}{50{,}000} = 2.0 \times 10^{-5} \text{ failures/hour}$$

$$\lambda_{\text{PCIe}} = \frac{1}{200{,}000} = 0.5 \times 10^{-5} \text{ failures/hour}$$

$$\lambda_{\text{power/GPU}} = \frac{n_{\text{psu,series}}}{8} \times \frac{1}{100{,}000} = \frac{0}{8} \times \frac{1}{100{,}000} = 0 \text{ failures/hour}$$

$$\lambda_{\text{network/GPU}} = \frac{1}{8} \times \frac{1}{150{,}000} = 0.083 \times 10^{-5} \text{ failures/hour}$$

Total per-GPU failure rate calculation

$$\lambda_{\text{total/GPU}} = (2.0 + 0.5 + 0.083) \times 10^{-5} = 2.583 \times 10^{-5} \text{ failures/hour}$$

System failure rate and MTBF calculation

$$\lambda_{\text{system}} = 10{,}000 \times 2.583 \times 10^{-5} = 0.2583 \text{ failures/hour}$$

$$\text{MTBF}_{\text{system}} = \frac{1}{0.2583} = 3.87 \text{ hours}$$

Under the model, the cluster experiences a failure every 3.9 hours on average. The expected failure cadence is 6.2 failures/day; a training run lasting one week has an expected count of 43 failures. Actual incident times vary, but the expected loss is large enough that recovery must be part of normal execution planning.

The cluster MTBF scaling in table 0.53 isolates the GPU-only baseline across cluster sizes. The full-system calculation is lower once PCIe and network failure domains are included. The same

↪ The step-by-step composition of per-component failure rates into a fleet-wide system MTBF, reusable for any node design or cluster size, is developed in section 4.

10,000-GPU cluster therefore carries three MTBF values in this chapter, and each later calculation names the one it uses: the GPU-only 5 hours of this table, the full-system 3.9 hours of the cascade above, and the two-to-three-hour cadence that somewhat larger production runs report below. Two running scenarios carry the rest of the chapter. The 1,024-GPU Archetype A reference cluster sizes per-node state, restore paths, and the elastic and straggler examples, while the 10,000-GPU cluster of the cascade sets failure cadence and checkpoint intervals. The full-system MTBF is the default input; a calculation that uses the GPU-only value says so, usually because it compares cluster sizes on the common basis of table 0.53, and its failure count is then a lower bound.

Table 0.53: Cluster MTBF Scaling: GPU-only mean time between failures falls in inverse proportion to cluster size, transforming failures from rare events to continuous operating conditions at scale. Additional host, power, storage, and network failure domains reduce system-level MTBF further.

Cluster Size (GPUs)	Individual GPU MTTF	Cluster MTBF	Expected Failures per Day
8	50,000 hours	6250 hours (260 days)	0.004
64	50,000 hours	781 hours (33 days)	0.03
512	50,000 hours	98 hours (4 days)	0.25
1,000	50,000 hours	50 hours (2 days)	0.48
4,000	50,000 hours	12 hours	1.9
10,000	50,000 hours	5 hours	4.8
25,000	50,000 hours	2 hours	12

Production measurements confirm the $1/N_{\text{GPU}}$ trend of table 0.53 and show that the GPU-only line is optimistic. Plotted on log-log axes, measured MTTF values and fitted projections from Meta's clusters follow the slope of the $50{,}000\,\text{h}/N_{\text{GPU}}$ line across more than three orders of magnitude in job size but sit below it, because a job can be interrupted by far more than its GPUs (figure 0.77). The Kokolis et al. (2025) study of Meta's Research SuperCluster reported measured MTTF values for observed RSC job sizes and projected a 1.8-hour MTTF for 16,384-GPU jobs. That projection lands next to the Llama 3 run of war story 1.1, whose 419 unexpected interruptions across a 54-day snapshot on 16,384 H100 GPUs give an observed MTTF of about 3.1 hours. Together, the measured Llama run and Kokolis projection put 16,384-GPU training on a failure cadence of roughly two to three hours, bracketed by the 1.8-hour projection and the 3.1-hour measurement. This evidence turns the idealized $1/N_{\text{GPU}}$ relation into an engineering constraint that determines checkpoint frequency, recovery architecture, and infrastructure investment.

Failure Taxonomy

The MTBF calculations in the reliability analysis quantify how often failures occur, which is critical for setting checkpoint intervals and sizing recovery infrastructure. Designing effective fault tolerance also requires understanding what kind of failures occur, which depends on precise vocabulary. A fault is the underlying defect or event, an error is the corrupted state it produces, and a failure is the externally visible behavior the training system must handle (Avizienis et al. 2004). A network partition that resolves in seconds demands different handling than a permanent GPU failure. A silent memory corruption that produces incorrect gradients requires different detection mechanisms than a node crash that stops responding entirely.

No single label captures all of these differences. Reliability decisions require three orthogonal axes: persistence (transient, intermittent, or permanent), manifestation (fail-stop, degraded, or value-corrupting), and failure scope (one device, one node, a rack or power domain, or the whole job). A transient fault can therefore manifest as either a detected crash or silent corruption, while a permanent switch failure can remain confined to one rack or partition an entire job. The four subsections that follow are therefore not four parallel classes or mutually exclusive buckets (Constantinescu 2008; Lamport et al. 1982). Each takes the value of one axis that most changes recovery. Transient failures come from the persistence axis, because they show why a fault that clears can still leave state to repair. Fail-stop and Byzantine (value-corrupting) failures come from the manifestation axis, and correlated failures come from the scope axis. Two parts of the space are developed where they drive decisions.

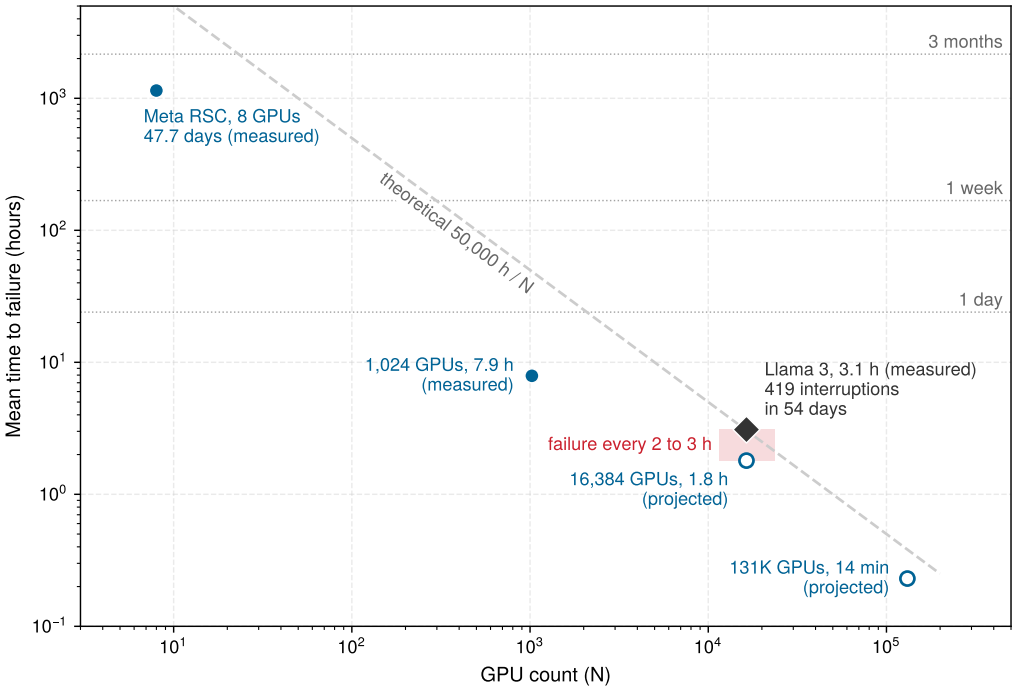


Figure 0.77: Published failure rates from production clusters: Measured MTTF values and fitted projections from Meta's RSC clusters (Kokolis et al. 2025) plotted with Llama 3 training measurements (Dubey et al. 2024) against the theoretical 1/N curve. At 16,384 GPUs, the Kokolis projection and the Llama 3 empirical measurement bracket a failure cadence of roughly two to three hours (the 1.8-hour projection and the 3.1-hour measurement), confirming that fault tolerance is a mathematical necessity, not an edge case. Data sources: Kokolis et al., arXiv:2410.21680; Meta, arXiv:2407.21783.

The intermittent and permanent persistence classes return with hardware faults (section 10), where persistence selects retry, quarantine, or replacement. The degraded manifestation, a gray failure that slows a worker without stopping it, returns with stragglers (section 20).

Transient failures

A transient fault clears without physical repair, but the state it corrupts can persist after the disturbance ends. Recovery must therefore retry or validate affected work before relying on that state. Large-scale training systems encounter several forms of temporary disruption. Network packet loss momentarily drops data while transport retransmission succeeds. Memory bit flips can result from cosmic-ray-induced single-event upsets.[4] Under temperature spikes, thermal throttling temporarily reduces compute throughput without halting execution, while software timeouts emerge when transient contention delays communication beyond its allotted time.

Transient faults are particularly difficult to diagnose in ML training when they leave no explicit error signal. A memory bit flip during gradient computation can propagate into later updates if hardware protection and the computation itself do not mask it. Training can then continue with corrupted state. Large-scale SDC studies show escaped corruption, while DRAM field studies show memory errors are common enough that fleet-level monitoring matters (Dixit et al. 2021; Sridharan et al. 2015; Schroeder et al. 2009). In ML training, that same undetected-corruption pattern can surface as degraded gradients, anomalous loss curves, or rollback-worthy checkpoints rather than an explicit crash.

The appropriate response to transient failures depends on detection capability. Errors that trigger explicit exceptions can be handled through bounded retry logic. Silent corruption requires end-to-end validation. Checksums detect changed bytes in storage or transport, cross-rank digests reveal disagreement about a supposedly identical reduced buffer, and statistical or replay checks test whether the computation itself remains plausible. A rank that computes the wrong local gradient

[4] **Single-event upset (SEU)**: From particle physics, where "upset" denotes a nondestructive state change. Cosmic rays and alpha particles from chip packaging can flip bits in memory and logic; the observed rate depends on altitude, process technology, packaging materials, shielding, and workload (Ziegler et al. 1996; Baumann 2005). ECC memory corrects single-bit errors but cannot handle every multi-bit upset in the same word, leaving a residual silent-corruption risk that compounds across the terabytes of state in large-scale ML training.

and then correctly checksums those wrong bytes passes an ordinary checksum; only independent recomputation, invariants, or model-level evidence can expose that error.

Fail-stop failures

Fail-stop failures cause components to cease operation entirely and detectably. The failed component stops responding to requests and is suspected through timeout mechanisms, though a timeout alone cannot distinguish an outright crash from an isolated or delayed host. A GPU hardware failure renders an individual accelerator unresponsive, while a broader node crash abruptly terminates all training processes on the host. Similarly, a network partition severs communication between a healthy node and the remaining cluster, and a storage failure prevents workers from writing or reading checkpoint shards.

In synchronous distributed training, a failed participant can stall the job's next update. A conventional AllReduce requires every participating rank to supply its input before the reduction can complete. A single GPU that goes silent, whether from a hardware fault, a process crash, or a network partition, can therefore block the ranks waiting on that result until recovery begins. If all 10,000 GPUs belong to a job whose progress depends on the failed group, the other 9,999 accelerators can be left waiting for the missing contribution. Smaller communication groups limit the immediate dependency, although later training stages can propagate the stall across the job.

A stopped component usually gives a clearer symptom than a component returning plausible but incorrect values. The missing response still leaves uncertainty about whether the component crashed or communication merely slowed. Once recovery starts, the system replaces or restarts the failed participant and restores the most recent valid checkpoint. Minimizing detection and recovery latency must therefore be balanced against false suspicions and the validity of the saved state.

A stopped rank announces itself only through silence, so detection rests on timeouts, and every timeout must separate a dead rank from one that is merely slow, such as a GPU still writing a large checkpoint while the collective waits. Section 18 sets that threshold once the full recovery-time budget is in view.

Byzantine failures

Where a fail-stop component ceases to participate, a value-corrupting component can keep running while returning incorrect results, as when a GPU returns wrong gradients without raising an error, a link delivers a corrupted packet whose error pattern the CRC happens not to cover, or a worker computes different results for identical inputs and state. Byzantine failures allow arbitrary behavior, including inconsistent messages to different participants (Lamport et al. 1982). ML systems can encounter this broader failure model through silent data corruption or adversarial corruption. Numerical instability and determinism violations also require validation when they break the execution contract, but ordinary rounding differences or intentionally stochastic outputs are not themselves evidence of a faulty worker. The recovery concern is a participant whose accepted contribution can corrupt shared state without a visible crash.

The two models leave different evidence (figure 0.78). A fail-stop worker such as W2 falls silent, and its missing heartbeats make it suspect. A Byzantine worker such as W6 keeps sending messages on schedule, so it passes every liveness check while the values it sends are wrong.

In an ML fleet the most common source of value corruption is not an adversary but hardware that changes a value without raising an error, the silent data corruption already met among transient failures. Its physical causes, the training signals that expose it, and the verification and hot-spare defenses that contain it are developed together in section 12, after the hardware faults that produce it.

Whatever its source, a Byzantine contribution violates a contract that liveness checks never test. Ordinary data-parallel workers process different batches and need not produce identical local gradients; the required contract is that each contribution correctly represents its assigned computation. A single Byzantine worker can violate that contract and corrupt the averaged gradient, potentially causing training to diverge or converge to a poor solution.

Redundant computation supplies one form of evidence against Byzantine failures. Workers repeating a computation from matching inputs, state, and random-number streams can compare results under a stated numerical tolerance. Statistical outlier detection and invariants provide

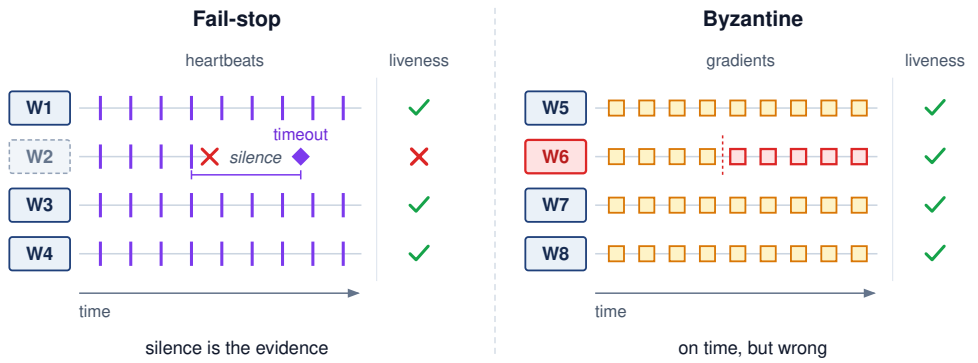


Figure 0.78: Fail-stop vs. Byzantine failures: In the fail-stop model (left), a failed worker simply ceases to send messages, which a timeout flags as suspect without distinguishing a crash from delay or isolation. In the Byzantine model (right), a failed worker continues to participate but sends incorrect data (for example, corrupted gradients reported as valid), which can poison the global model state if not detected by redundant validation.

additional evidence without fully repeating the computation. Each method has a coverage limit. Agreement can miss shared faults, while a statistical anomaly can arise from legitimate data variation. Detection overhead must therefore be evaluated together with the faults the method can expose.

Byzantine-resilient distributed training algorithms exist but impose significant overhead. Krum (Blanchard et al. 2017) keeps the single worker gradient whose nearest neighbors lie closest to it and discards the rest, while coordinate-wise trimmed mean (Yin et al. 2018) drops the largest and smallest values in each coordinate before averaging what remains. Both compute aggregates that stay robust to a bounded number of Byzantine workers, but they require more communication and computation than simple averaging. Without such protection, corrupted gradients can push the optimizer toward an unreliable model state while the training job appears healthy. Reliability must therefore protect semantic correctness rather than process liveness alone.[5]

[5] **Byzantine-resilient ML**: Named after Lamport's 1982 "Byzantine Generals Problem," these algorithms (Krum, trimmed mean, and signSGD, which aggregates only the signs of gradient coordinates by majority vote) tolerate a bounded fraction of corrupted workers, with the exact bound depending on the algorithm and assumptions. For N_{GPU} workers, Krum requires pairwise distance computations over worker gradients, so overhead grows quadratically with worker count and directly competes with the throughput gains of data parallelism (Blanchard et al. 2017).

Correlated failures

The reliability calculations in section 12 assume independent failures. Real systems depart sharply from this assumption by exhibiting correlated failures, where common physical or operational dependencies take down multiple components simultaneously. At the node level, a power fault that exhausts the chassis's redundant supplies, such as the loss of the circuits feeding it, takes down every GPU in the chassis. At the cluster level, a top-of-rack network switch failure isolates all attached nodes, while a cooling system failure can trigger thermal shutdowns across a row of racks. Beyond physical infrastructure, shared software dependencies create broad blast radii. A software bug in an updated CUDA driver can crash processes across nodes when they exercise the affected path, and operator error during cluster reconfiguration can render an entire fleet unreachable.

Correlated failures violate the independence assumption underlying equation 0.18. A model that counts only independent device failures omits shared hazards and their potentially larger blast radius; incident frequency and the number of affected devices must be modeled separately. Correlated failures can also defeat redundancy strategies. Three replicas of a model provide no protection against a shared power failure if all three run on the same power domain.

Defending against correlated failures requires understanding failure domains and ensuring redundancy spans independent failure domains. Table 0.54 catalogs common failure domains in ML infrastructure, from single GPUs to entire data center regions, each requiring distinct mitigation strategies. Figure 0.79 diagrams these nested containment boundaries, framing how physical disruptions scale upward from individual eight-GPU nodes to multi-rack power and network envelopes.

Table 0.54: Failure Domains in ML Infrastructure: Understanding failure domain boundaries enables placement of redundant components across independent domains, preventing correlated failures from defeating redundancy strategies.

Failure Domain	Impact Scope	Typical Recovery Time	Mitigation Strategy
Single GPU	1 GPU	Seconds (spare)	Hot spare, elastic training
Node (power/OS)	8 GPUs	Minutes	Checkpoint, node replacement
Rack (ToR switch)	32–64 GPUs	Minutes to hours	Cross-rack redundancy
Power domain	100–500 GPUs	Hours	Multiple power feeds
Data Center region	All GPUs	Hours to days	Geographic distribution
Software version	All GPUs running version	Minutes (rollback)	Staged rollouts

The nesting of failure domains in table 0.54 has direct consequences for redundancy placement: placing replicas within the same domain provides zero protection against that domain's failure mode.

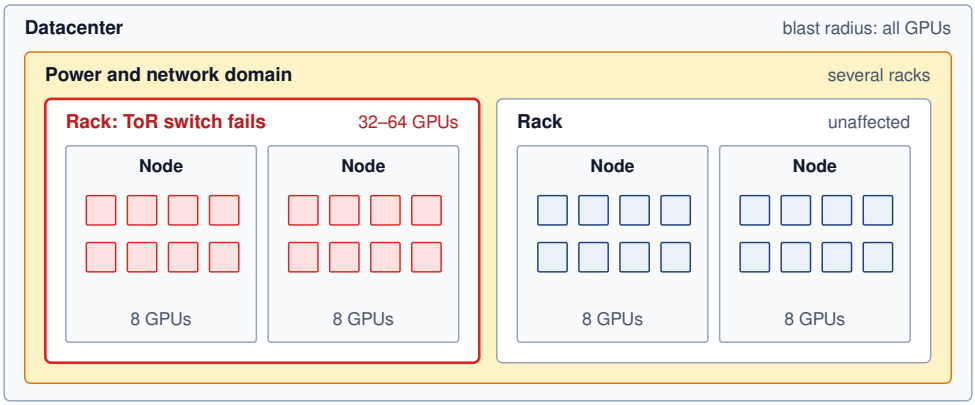


Figure 0.79: Hierarchy of failure domains: Failure domains are often nested or overlapping. A GPU failure affects one device. A node failure affects 8 GPUs. A rack switch failure affects 32–64 GPUs (each rack is drawn with only two of its four to eight nodes). A power distribution unit (PDU) failure may affect multiple racks. The red rack shows one such correlated failure: a single top-of-rack switch fault removes every GPU it contains, while the neighboring rack is untouched, which is why replicas must span independent domains (for example, different racks or rows).

This containment hierarchy explains why replica placement must match the fault being tolerated. The highlighted rack in figure 0.79 contains nodes that share a top-of-rack (ToR) switch, so that switch's loss can disconnect every attached node from the job. A neighboring rack with a separate switch can remain reachable during that event even if both racks share a power domain. The same placement does not protect against loss of their shared power source. Redundancy must therefore cross the relevant failure boundary, not merely occupy different devices.

↩ Top-of-rack aggregation and the physical rack failure domain are established in section 6.

Checkpoint 7.1: Mapping failure domains

Verify your understanding of how failure domains nest and their operational impact:

- ☐ **Blast radius**: calculate how many 8-GPU nodes a rack switch failure typically affects in a standard data center configuration.
- ☐ **Power-domain correlation**: explain why placing all 3 model replicas in the same power domain fails to provide protection against a power outage confined to that domain.
- ☐ **Staged rollouts**: identify the failure domain addressed by staged rollouts rather than hardware redundancy.

- ☐ **Nested domains**: explain hierarchical containment and decide whether the rack failure domain still matters once the power domain containing that rack fails.

War Story 7.1: The supercomputer that swapped in spare cubes (2024)

Context: Google's Tensor Processing Unit (TPU) v4 machine-learning supercomputer used 4,096 TPU chips connected by a custom 3D torus inter-chip interconnect (ICI) fabric, and Google engineers published their operating experience with automatic fault resiliency and hardware recovery (Zu et al. 2024).

Mechanism: At 4,096-chip scale, machine and link failures could remove participants or paths required by a job's configured communication topology.

Impact: Losing a required participant can interrupt the synchronous job across the slice. Losing a link instead raises a routing question: whether the remaining fabric can still provide the required communication paths.

Fix: Google used optical circuit switches (OCS) to assemble replacement slices from spare healthy TPU cubes, the pod's building blocks of chips wired as a $4\times4\times4$ mesh, for machine outages, together with fault-tolerant routing for supported OCS outage patterns. The response depended on which resource failed.

Systems lesson: Fault tolerance is a topology-management problem. In tightly coupled accelerator fleets, recovery must preserve the communication graph, not merely replace an individual component; otherwise one local hardware fault can become a cluster-wide training interruption.

The Bathtub Curve and Hardware Lifecycle

The failure taxonomy classifies failure types and domains, answering what kind of failures occur. Equally critical for fault tolerance design is determining *when* over an accelerator's operating lifespan those failures strike. Figure 0.80 plots the hazard function $h(t)$ across component lifecycles, partitioning operational longevity into three distinct reliability regimes.

The first phase, infant mortality, exhibits elevated failure rates from manufacturing defects, improper installation, and early-life failure of marginal components. This phase typically lasts days to weeks for electronic components. Burn-in testing[6] operates components under stress conditions before deployment to precipitate infant mortality failures before production use.

After surviving infant mortality, components enter the useful-life phase, where they exhibit relatively constant failure rates under the standard reliability-engineering model (Birolini 2017; Klutke et al. 2003). This phase represents the longest portion of component lifetime and is the period where the exponential reliability model in equation 0.16 applies most accurately. For data center GPUs, the useful-life window is an operational planning concept shaped by refresh cycles, cooling, utilization, and observed fleet health rather than a fixed physical duration.

As components age, they enter the wear-out phase, where failure rates increase due to accumulated wear. For GPUs, wear mechanisms include electromigration[7] in circuits, thermal cycling stress on solder joints, and degradation of thermal interface materials. The onset of wear-out depends heavily on operating conditions; components operated at high temperatures or with frequent thermal cycling enter wear-out earlier.

The practical implication for ML systems is that fleet-wide failure rates can depend on age distribution. Under the bathtub model, a new cohort passes through elevated early-life risk, a relatively stable period, and eventual wear-out. Screening, operating conditions, and replacement policy determine how much of that pattern appears in field data. Mixed-age fleets combine cohorts at different stages, so their aggregate hazard need not follow the curve of a single cohort.

These three hazard regimes in figure 0.80 translate directly into admission control and maintenance policies. Before assigning new or repaired nodes to a long training run, operators use matrix-multiply, memory, and communication stress tests to expose marginal components. During service, temperature trends, error counts, and performance degradation help identify devices for scheduled

[6] **Burn-in testing**: A controlled screening procedure stresses components before deployment to expose early-life defects. Temperature, voltage, duration, and acceptance criteria depend on the component and its qualified test procedure; a generic semiconductor screening recipe is not an operating specification for an assembled accelerator. Screening reduces the defective population entering service but does not certify every later workload or fault mode.

[7] **Electromigration**: Gradual displacement of metal atoms in conductors by electron momentum transfer, first characterized in early electromigration studies and later modeled in Black's reliability equation (Black 1969). Mean time to failure decreases with higher current density and higher temperature, so sustained high-power accelerator workloads make thermal management a direct determinant of fleet lifespan.

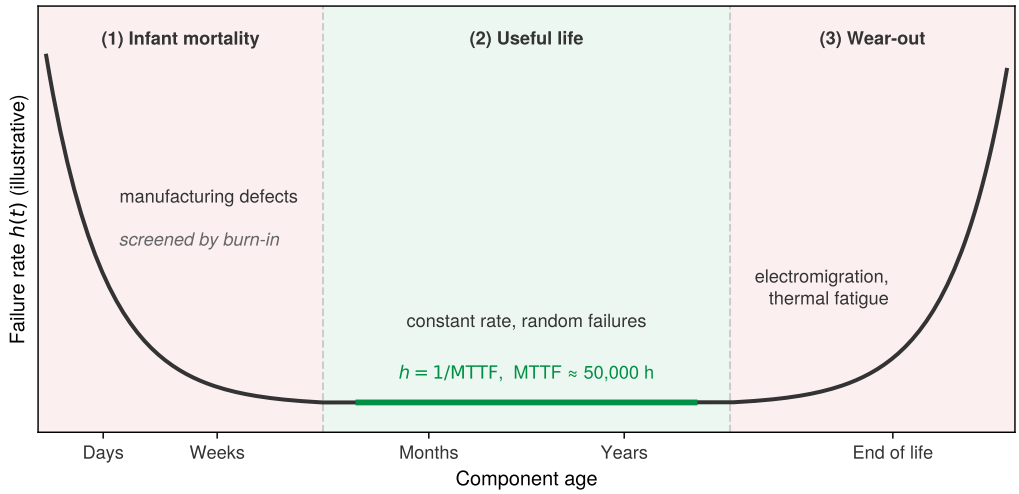


Figure 0.80: The bathtub curve: Hardware failure rates $h(t)$ vary over time. (1) Infant mortality: high failure rate initially due to manufacturing defects. (2) Useful life: constant, low failure rate where random failures dominate. (3) Wear-out: increasing failure rate as components age. Burn-in testing aims to filter out infant mortality failures before deployment.

replacement. Screening moves failures out of expensive production runs. An infant-mortality failure caught during a few hours of stress testing costs only idle time, while the same failure weeks into a pretraining run forces a checkpoint rollback, which is why operators often route fresh or repaired nodes to short jobs first. Monitoring then checks whether the constant-rate model remains appropriate as the fleet ages.

Model-Type Diversity in Failure Impact

While the mathematics of failure rates apply universally, the failure impact by model type differs dramatically. The impact of losing an hour of training depends on what that training costs, how much state must be recovered, and how long recovery takes. Table 0.55 quantifies these factors across model architectures, revealing orders-of-magnitude variation from large language models (LLMs), where a lost day of progress costs hundreds of thousands of dollars in compute, to vision models losing modest amounts of progress.

Table 0.55: Failure Impact by Model Type: The cost of training failures varies dramatically by model type, driven by training duration, checkpoint overhead, and the value of accumulated training state. The Archetype A cost is one lost day on the chapter's 10,000-GPU cluster; the vision, speech, and scientific rows give illustrative ranges rather than measured values. These differences demand model-specific fault tolerance strategies.

Model Type	Typical Training Duration	Checkpoint Size	State Sensitivity	Failure Cost
Archetype A (GPT-4/Llama-3)	Weeks to months	2.45 TB (175B)	High (position in data order)	\$0.7M compute per 24 hr loss
Vision (ViT-Large)	1–3 days	1.2 GB	Medium (augmentation state)	\$10–50K per day loss
Archetype B (DLRM at Scale)	Continuous	10 TB+ (embeddings)	Very High (embedding freshness)	Revenue impact per hour
Speech (Whisper-scale)	3–7 days	5–10 GB	Medium	\$50–200K per day loss

Model Type	Typical Training Duration	Checkpoint Size	State Sensitivity	Failure Cost
Scientific (AlphaFold)	Days to weeks	10–50 GB	High (exploration state)	Research delay

Large language model training illustrates how a costly allocation magnifies each hour of lost progress. The chapter's 10,000-GPU cluster at approximately \$3/GPU-hour incurs \$0.7M in compute costs per day. A job checkpointed only once a day can lose up to a full day of progress to one failure, which costs \$0.7M in wasted compute plus schedule delay. At the checkpoint interval derived in section 13, the same failure costs minutes of rework instead of a day. The checkpoint overhead is correspondingly large. At the 14-byte-per-parameter resumable format that the checkpointing analysis uses (BF16 weights, FP32 master weights, and two FP32 Adaptive Moment Estimation (Adam) moments), the 175B-parameter running example writes 2.45 TB at every save.

Recommendation systems such as Archetype B (DLRM at Scale) present a different challenge when training updates models continuously rather than episodically. For a workload whose useful signals change rapidly, delayed embedding updates can reduce recommendation quality even if serving remains available. A failure that loses recent updates therefore has a freshness cost as well as a replay cost. The recovery budget must reflect the workload's measured sensitivity to stale state.[8]

Vision models illustrate how a smaller state budget can permit more frequent saves on the same storage path. The vision transformer (ViT)-Large example has a checkpoint of about 1.2 GB, smaller than the large language and embedding-heavy examples here; actual overhead still depends on sustained write bandwidth and training step time. Recovery must preserve optimizer and schedule state as well as weights. Reproducible data processing also requires the augmentation configuration, random-number generator state, and data position, rather than only the initial shuffling seed.

Scientific workflows can require state beyond the model and optimizer. An iterative molecular-search pipeline, for example, must retain which configurations have been evaluated if those results determine its next candidates. A training pipeline that samples scientific datasets must preserve the sampling state needed by its own recovery contract. The governing question is which prior decisions affect future work; the checkpoint boundary must include that state wherever it resides.

[8] **RecSys freshness**: Freshness makes recovery delay part of the model-quality budget. Its importance depends on how quickly useful user and item signals change and how strongly predictions depend on them. Comparing quality at different state ages establishes the permitted staleness; that measured limit determines how much checkpoint and replication overhead is justified.

Economic Framework for Fault Tolerance Investment

Fault tolerance mechanisms consume resources: storage for checkpoints, bandwidth for checkpoint writes, compute cycles for redundant calculations, and engineering time for implementation and maintenance. Rational investment in fault tolerance requires quantifying both the cost of failures and the cost of prevention.

Failure costs include wasted compute, schedule delay, opportunity cost, and engineering time. Wasted compute measures GPU-hours expended on training steps that must be repeated. Schedule delay captures how extended time to a trained model impacts business timelines. Opportunity cost recognizes that compute consumed by recovery cannot be used for other training. Engineering cost accounts for time spent debugging failures and manually recovering.

Prevention costs include storage, throughput overhead, recovery infrastructure, and complexity. Storage cost scales with model size and checkpoint frequency. Checkpoint writes consume memory bandwidth and may stall training. Recovery infrastructure requires spare capacity and automated recovery systems. Fault tolerant systems are harder to develop and debug.

Optimal investment in fault tolerance balances these costs. For small-scale training on a few GPUs where failures are rare, minimal fault tolerance may be cost-optimal. Infrequent checkpoints and manual recovery suffice. For large-scale training on thousands of GPUs where failures occur multiple times daily, extensive fault tolerance provides positive return on investment. Frequent checkpoints, automatic recovery, and elastic training become essential. The checkpoint interval derived in section 13 is the same balance applied to one decision variable, chosen where the marginal cost of one more save equals the marginal rework it prevents.

Equation 0.20 presents a simplified economic model for expected cost per training run:

$$C_{\text{total}} = C_{\text{compute}} + \mathbb{E}[N_{\text{failures}}] \times C_{\text{per-failure}} + C_{\text{ft}} \tag{0.20}$$

where C_{compute} is the base compute cost, $\mathbb{E}[N_{\text{failures}}]$ is the expected number of failures during training, $C_{\text{per-failure}}$ is the cost per failure, and C_{ft} is the cost of fault tolerance mechanisms. The cost per failure includes wasted compute plus overhead.

Equation 0.21 formalizes when fault tolerance investment is justified:

$$\frac{\partial C_{\text{ft}}}{\partial x} < -\frac{\partial(\mathbb{E}[N_{\text{failures}}] \times C_{\text{per-failure}})}{\partial x} \tag{0.21}$$

where x represents investment in fault tolerance mechanisms and the base compute cost is held fixed. The negative derivative on the right is the marginal reduction in expected failure cost. Additional protection reduces total expected cost while this reduction exceeds its marginal cost; an interior optimum equates the two when the cost functions have a suitable minimum.

One investment worked through the criterion shows what it decides. Let x be a hot-spare node held idle beside the chapter's 10,000-GPU cluster, so that a failed node's replacement no longer waits for the scheduler to find capacity. Its marginal cost is 8 GPUs idling all day, about $576 per day. Its marginal benefit is the recovery time it removes from each failure while every other GPU waits. At the cascade's 6.2 failures/day, each minute removed from every recovery is worth about $3,100 per day, so the spare pays for itself once it shortens each recovery by about 11 seconds, provided it is refilled before the next failure arrives some 3.9 hours later. The same node beside an eight-GPU job, whose GPU-only MTBF in table 0.53 is 6250 hours (260 days), would sit idle far longer than it could ever save. Scale reverses the verdict on the same hardware.

Three foundational principles guide every design decision in this domain.

> Systems Perspective 7.2: Three rules of failure at scale
>
> 1. *At scale, failures are continuous, not exceptional.* A 10,000-GPU cluster experiences failures every few hours. Systems must be designed expecting failure as normal operation.
> 2. *Checkpoint intervals have an optimum.* The Young-Daly interval (developed in section 13) sets checkpoint frequency from write time and system MTBF under its stated assumptions, and it shrinks only with the square root of a falling MTBF.
> 3. *Training and serving have fundamentally different fault tolerance requirements.* A long training job can budget minutes for recovery while preserving accumulated progress; an interactive serving request may have only milliseconds left before its deadline. Those budgets motivate checkpoint recovery for training and ready alternate capacity for serving.

The rest of the chapter follows from these rules. Before any recovery mechanism can act, the fleet must recognize what failed, so the next sections examine where faults come from (hardware, silent corruption, and software) and how fault injection tests the detectors. Training recovery (checkpointing, detection and restart, elastic resizing) then puts rules 1 and 2 to work, and serving fault tolerance and graceful degradation answer rule 3. The first question is how the physical faults behind these failures look once they reach a fleet.

Hardware Faults at Fleet Scale

A cosmic ray that flips one bit in a GPU's high-bandwidth memory and a solder joint that cracks under thermal cycling are physical events, but the recovery system never observes them directly. It observes symptoms: a gradient spike with no process crash, a rank that disappears from the collective, or a node that fails only after it heats under sustained load. The failure taxonomy of section 4 already classifies such events by persistence, manifestation, and scope. For hardware, persistence carries most of the operational weight because it decides whether the fleet should retry, quarantine, or replace a component, while manifestation decides whether the fleet notices the fault at all.

ML workloads raise the stakes of each fault. A training step performs trillions of arithmetic operations on state that persists into later steps, so a wrong value can survive beyond the computation that produced it. The damage depends on the affected value and its later use. Under the IEEE 754 format,[9] a sign-bit flip inverts a weight, while an exponent-bit flip can move a small gradient by

[9] **IEEE 754**: The IEEE 754 floating-point standard defines the binary32 format with 1 sign bit, 8 exponent bits, and 23 fraction bits (IEEE Standards Association 2019). The bit layout creates an asymmetric vulnerability for ML: a sign-bit flip inverts a weight entirely ($0.5 \rightarrow -0.5$), while an exponent-bit flip can shift magnitude by orders of magnitude, so resilience mechanisms often prioritize the most sensitive bit positions rather than treating all bits as equally important.

many orders of magnitude. Fault-injection studies show that network resilience varies with model, layer, and bit position, so a few faults in vulnerable locations can cost disproportionate accuracy (Reagen et al. 2018). A valid-looking corrupted value can enter learned state without triggering the process failure that would otherwise initiate recovery.

Fleet scale turns these rare device events into routine operating conditions. Smaller geometries and lower operating voltages can reduce the charge needed to disturb a stored value (Baumann 2005), and fleet studies at Google and Meta found that a small but persistent population of processors, on the order of a few per several thousand machines, computes wrong results without raising any error (Hochschild et al. 2021; Dixit et al. 2021). Studies of accelerator training fleets reach the same conclusion: rare hardware faults appear often enough that software-level detection and recovery become part of the training system design (He et al. 2023). ML system architects must therefore treat hardware as an unreliable substrate and budget for end-to-end integrity checks, replayed computation on high-value paths, and periodic consistency checks as system requirements rather than high-performance computing specialties.

↪ How an FP16 exponent-bit flip rescales a value by 2^{16} and can saturate an attention softmax is developed in section 4.

Fault persistence and the fleet response

Each persistence class from the taxonomy maps to a different fleet action, from retry for a fault that leaves nothing to repair, through quarantine for one that returns under load, to replacement for one that repeats on every attempt (figure 0.81). A transient fault, as section 4 established, leaves no lasting defect from that event, so the fleet's question is only whether its effect escaped. A single-event upset, a voltage droop on an unstable power path (Reddi and Gupta 2013), a timing violation, or a soft error in combinational logic (Mukherjee et al. 2005) can corrupt a tensor, packet, or instruction. Detection and correction can prevent propagation; affected state may otherwise require rollback. During training, an undetected error in weights or gradients can compromise convergence and contaminate subsequent checkpoints (He et al. 2023). During stateless inference, an activation error can remain confined to one request (Mahmoud et al. 2020). If that activation enters retained state such as a KV cache, later outputs can also depend on it.

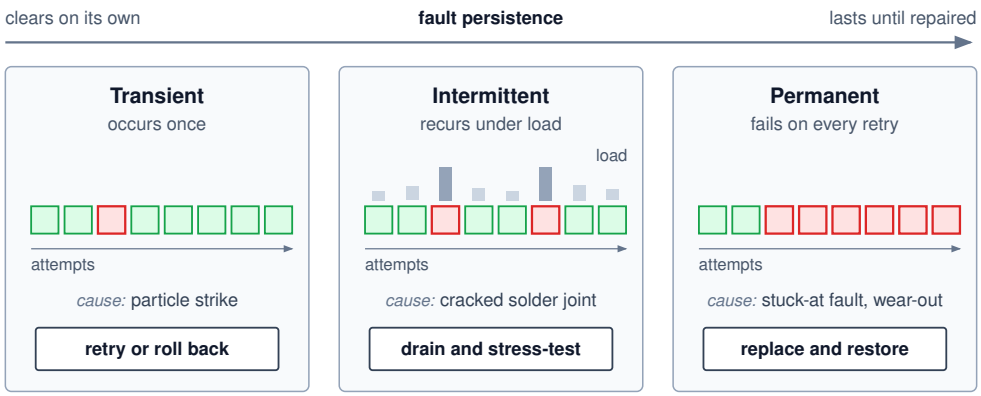


Figure 0.81: The ML failure spectrum: Hardware faults ordered by how long they persist. A transient fault leaves nothing to repair, an intermittent fault returns under the load that exposed it, and a permanent fault repeats on every retry. Persistence decides the fleet response, from retry through quarantine to replacement, and fault tolerance engineering must handle all three to keep a fleet making progress.

A permanent fault announces itself through repeatability. The same accelerator, memory cell, or link fails again after retry, often at the same address or in the same workload phase. Manufacturing defects and wear-out mechanisms such as electromigration and oxide breakdown produce this signature, and the stuck-at fault, in which a signal remains fixed at 0 or 1 regardless of input, is its standard abstract model (Seong et al. 2010). Repeatability helps locate the defect but does not make the result trustworthy. A permanent datapath fault keeps producing wrong gradients until the device is drained from the cluster (He et al. 2023), and rerunning the computation on the same

device reproduces the error instead of exposing it. The fleet must stop trusting the component, quarantine it, and restore from a checkpoint that predates its first bad write.

Intermittent faults create the most operational ambiguity because they produce evidence and then disappear. A node may pass a reboot test, rejoin the fleet, and fail again only when the next job drives the package into the same thermal, voltage, or communication regime. Cracked solder joints, aging packages, and contamination between contacts create these load-dependent conditions (Constantinescu 2008; Rashid et al. 2015), and reduced voltage margins cause timing errors that are hard to reproduce (Zhang et al. 2018). Sporadic errors of this kind can accumulate across iterations and degrade convergence without any explicit failure (Rashid et al. 2015). An intermittent node should therefore remain suspect until evidence clears it. The fleet drains it from long jobs, correlates its error logs, and readmits it only after it passes stress tests under the load that exposed the fault; otherwise one marginal component can make validation and recovery untrustworthy for every job that lands on it. Table 0.56 summarizes the three responses.

Table 0.56: Hardware Fault Persistence and Fleet Response: The persistence class of a hardware fault determines the evidence that exposes it and the action the fleet takes. Manifestation is a separate axis: any of the three classes can surface as a crash or as silent corruption (Constantinescu 2008).

Persistence	Fleet signature	Detection evidence	Fleet response
Transient	One-time wrong value or lost message; retry succeeds	Corrected-error counters, checksum mismatches, gradient spikes	Correct or retry; roll back if durable state was contaminated
Intermittent	Recurring errors under specific load, heat, or voltage	Correlated error logs and repeated anomalies on one node	Drain and quarantine; readmit only after screening under load
Permanent	Reproducible failure at the same device, address, or link	Failed self-test or replay mismatch on the same device	Replace the component; restore from a checkpoint before the fault

Fleet-scale detection and mitigation

Fault rates drive fleet decisions through compounding. The analysis in section 12 shows how per-device failure rates become fleet interruption rates, and memory errors compound in the same way. Field studies of DRAM in large data centers found errors frequent enough that error-correcting memory, background scrubbing, and error-rate monitoring are standard fleet practice rather than optional hardening (Schroeder et al. 2009; Sridharan et al. 2015). Protection consumes some capacity and bandwidth for check bits and scrubbing, but that cost is small compared with a corrupted multi-week run.

Detection works in layers with different coverage and cost. At the hardware layer, error-correcting codes[10] (Hamming 1950) correct and detect the memory-error patterns covered by the implemented code, and link-level CRCs[11] check corruption in transit. These protections operate within their enabled storage and transport boundaries; they do not validate an incorrect arithmetic result merely because its bytes arrive intact. Before deployment, built-in self-test and burn-in screening expose manufacturing defects and permanent faults (Bushnell and Agrawal 2002). During service, operators periodically pull nodes from production and run known-answer stress tests on arithmetic, memory, and interconnect, because defective processors often fail only on particular instruction mixes, data patterns, or operating points (Hochschild et al. 2021; Dixit et al. 2021).

The software layer draws its cheapest evidence from metrics the training loop already emits. Statistical checks on loss, gradient norms, and activations flag silent drift (Chandola et al. 2009), missed heartbeats identify suspected failures (Kawazoe Aguilera et al. 1997), and watchdog timers catch tasks that stall without crashing (Pont and Ong 2002). A node that stays alive but runs slowly or erratically, the gray failure of the chapter opening, can degrade progress while still meeting a liveness timeout, so section 20 treats it through straggler detection. Redundant computation adds stronger evidence on selected paths, either periodically or in response to an anomaly, by replaying a step on another device or comparing independently computed results. Its frequency depends on the residual corruption risk, the value of the protected state, and the cost of detecting an error late.

[10] **Hamming codes (1950)**: Richard Hamming developed error-correcting codes at Bell Labs after relay computers repeatedly detected errors in his unattended weekend jobs and abandoned them rather than repairing them. A Hamming code uses parity checks to locate a single-bit error with $\mathcal{O}(\log n)$ check-bit overhead; adding an overall parity bit yields the extended single-error-correcting, double-error-detecting form. Memory ECC implementations vary in code and coverage, so the system must account for both corrected errors and residual faults outside that coverage.

[11] **CRC (Cyclic Redundancy Check)**: Polynomial checksum family introduced by Peterson and Brown (1961). CRC coverage depends on the polynomial, frame length, and error model; it is best understood as a low-cost detection layer rather than a universal guarantee. In distributed ML training, checksums or hashes can validate gradient payloads exchanged during collectives; without a verification layer, a corrupted gradient packet can silently poison the parameter update for every worker in the collective.

Checkpoint 7.2: Classifying a hardware fault

Verify your understanding of the transient, permanent, and intermittent fault categories and the fault, error, failure progression:

- ☐ **Transient fault**: classify a GPU that produces a wrong result once after a cosmic-ray strike and then computes correctly for the rest of the run, and justify why detection and rollback to a known-good checkpoint, not node replacement, match that fault.
- ☐ **Intermittent vs. permanent**: distinguish an intermittent fault from a permanent one when both can produce a stuck-at value, including the diagnostic signal that separates them.
- ☐ **Fault-error-failure chain**: trace a single bit flip through the fault, error, failure chain, identifying where error correction codes and checkpoint-restart each intervene.
- ☐ **Silent corruption**: explain why silent corruption sits apart from the other fault manifestations even when its underlying fault is an ordinary transient bit flip.

Check-and-Verify Defenses Against Silent Data Corruption

Of the hardware faults just classified, the costliest are the ones whose manifestation is silent. A corrupted value that raises no error passes every liveness check the fleet runs, and training keeps building on it. Defending against silent data corruption therefore requires checks that establish a correct result, not merely a live process, and choosing those checks starts with where the corruption comes from and how it surfaces in training.


The physics of silent corruption

Digital hardware implements *deterministic* operations, but physical fault occurrence requires a *probabilistic* reliability model. Two mechanisms illustrate the distinction. Single-event upsets (SEUs), the particle strikes introduced with transient failures, create fleet exposure that grows with device count and operating time even when the per-device rate is low. Manufacturing variances can leave "marginal" chips that pass initial QA but fail under particular inputs or operating conditions. Voltage and temperature margins matter, including supply disturbances during rapid current changes (di/dt). These defects can produce repeatable errors, so a probabilistic fleet model does not imply that every individual fault is random.

Facebook documented a pervasive SDC issue where a hardware fault caused a valid file to be reported as "size zero" during decompression (Dixit et al. 2021); the system "worked" without crashing, but data was silently deleted. In ML, the same failure manifests as valid-looking but numerically corrupted gradients. The pipeline trace in figure 0.82 follows a single ALU or memory bit flip as it corrupts an individual tensor entry, taints gradient reduction during the backward pass, commits into weights, and finally surfaces as degraded quality at evaluation. The comparative timelines beneath contrast this silent latency with a standard detected error: while a hardware trap halts within milliseconds to restart cleanly from the last checkpoint, silent corruption commits contaminated state into checkpoints over hours or days before an evaluation alert forces a costly rollback.

Telemetry from production training fleets shows this corruption is routine rather than anomalous. At modern training scales, hardware bit flips occur regularly, and erroneous computations from a single malfunctioning accelerator can propagate into the global model state, as Jeff Dean documented in his MLSys 2024 keynote on silent data corruption (Dean 2024) (figure 0.83).

In the Google training telemetry presented by Dean (2024), figure 0.84 identifies an abrupt gradient-norm anomaly as an SDC event. The plot shows the symptom without identifying the damaged bit or circuit. Corrupting a floating-point exponent is one mechanism that can greatly change a tensor value and subsequent updates. Gradient clipping can limit update magnitude, but it does not reconstruct the correct gradient; an anomaly detector must trigger validation or recovery before suspect state is accepted.



Cumulative SDC probability nears certainty over a long run.

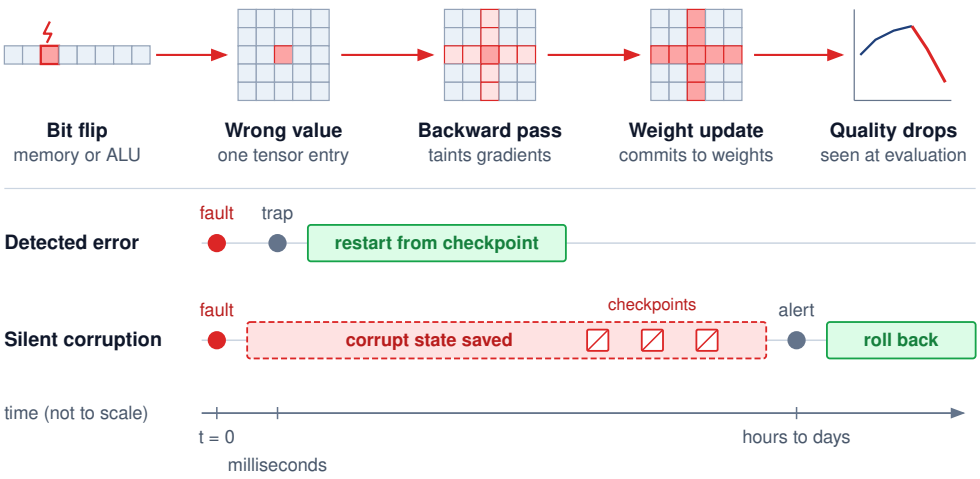


Figure 0.82: Silent data corruption propagation: A hardware bit flip moves left to right from one wrong tensor value through the backward pass and the weight update, surfacing only at the final stage as degraded model quality. The two timelines below contrast a detected error, which traps within milliseconds and restarts from the last checkpoint, with silent corruption, which is saved into checkpoints for hours or days before an evaluation alert forces a rollback; the gap between the two is the cost of silence.

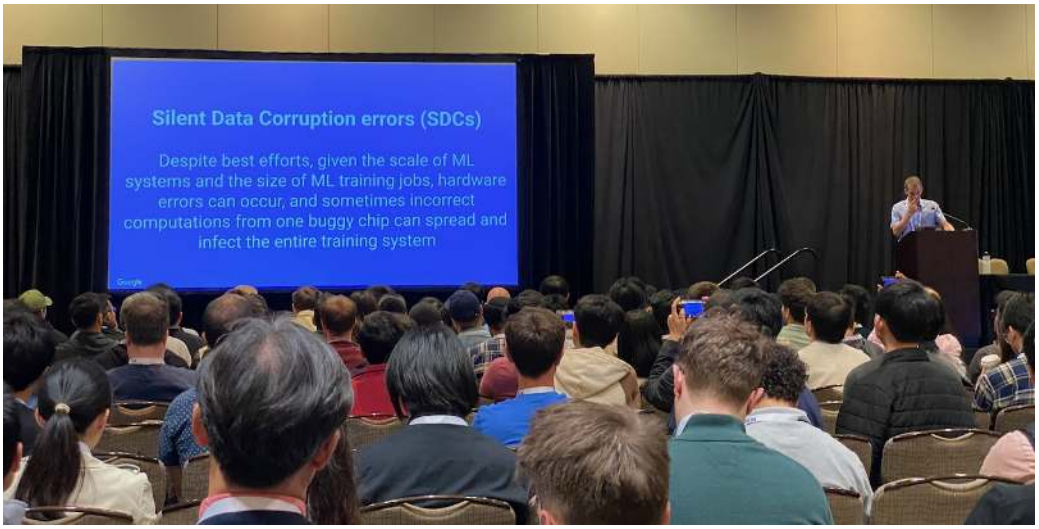


Figure 0.83: Silent data corruption at scale: Jeff Dean presents on silent data corruption (SDC) at MLSys 2024, arguing that at the scale of large ML training jobs hardware errors occur routinely, and that incorrect computations from one buggy chip can propagate and infect an entire training run. Source: Jeff Dean, MLSys 2024 keynote (Google).

Verification at fleet scale

Even a small per-GPU SDC rate accumulates across repeated collective operations, and the accumulation grows with fleet size. Any single collective is unlikely to contain an SDC event. Under the illustrative rate used in the analysis that follows, the per-step probability remains small while the cumulative probability grows over a long training run, reaching $1 - e^{-1} \approx 63$ percent once the expected number of events reaches one. On the chapter's 10,000-GPU cluster, that rate gives one expected event roughly every 100 hours, or about 22 over the three-month run of the chapter opening. The notebook below scales the same estimate to a fleet ten times larger to show where the trend leads, since the expected interval shrinks in proportion to fleet size. Standard AllReduce reduces

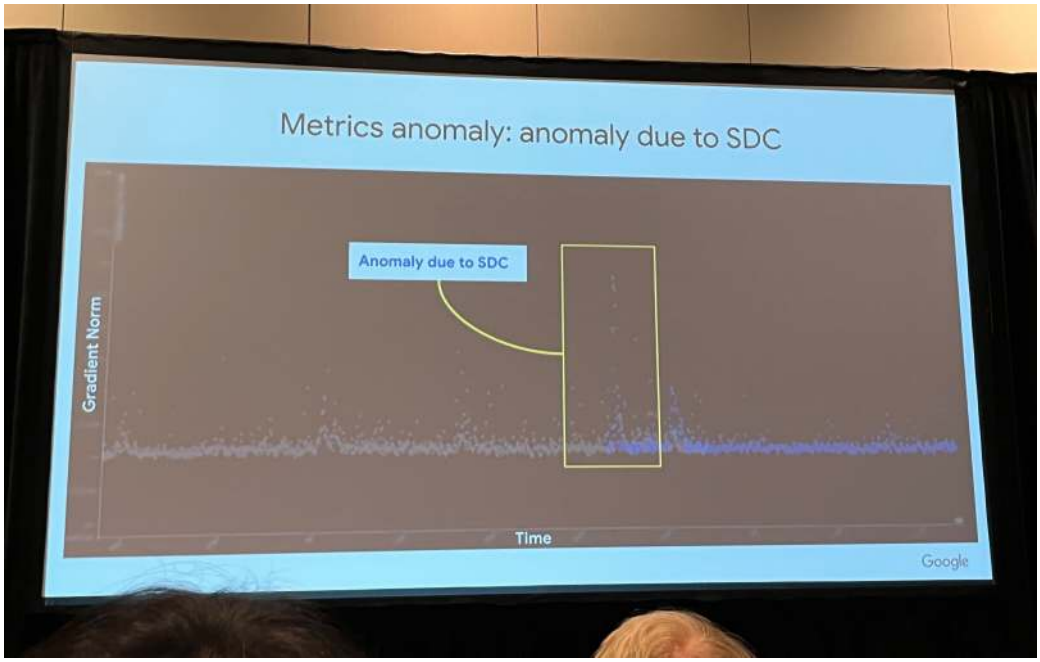


Figure 0.84: Gradient norm deviation: Transient hardware faults, such as silent data corruption (SDC), can disrupt optimization by causing abrupt changes in gradient norms. Google's production examples show SDC anomalies surfacing as visible gradient-norm spikes. Source: (Dean 2024).

the supplied contributions; it does not establish that an *alive* worker computed a *correct* gradient. The fleet therefore needs validation appropriate to its fault model in addition to liveness checks.

Check-and-verify methods test data-path invariants, subject to the boundary drawn for transient failures in section 4. Digests test byte integrity and agreement within their error-detection limits; they cannot establish that the original computation was correct. Independent computation, an algorithmic invariant, or replay tests that additional claim under a declared fault model. A quick estimate shows how much exposure those checks must cover.

Napkin Math 7.2: SDC risk accumulation

Problem: Under an illustrative generic SDC-rate assumption, calculate the probability that at least one GPU in a 100,000-GPU fleet experiences an SDC event during a single 2 s training step.

1. **Fleet size**: 100,000 accelerators.
2. **Individual risk**: 10^{-6} per GPU-hour (an illustrative generic SDC-rate assumption).
3. **The exposure**: In a 2-second window, the fleet has $100{,}000 \times (2/3600) \approx 56$ "GPU-hours" of exposure.
4. **The probability**: $\Pr(\text{at least one SDC}) \approx 0.0056$ percent.

Systems insight: Under this illustrative constant-rate assumption, a 100k-GPU fleet expects one SDC event every 18,000 steps (roughly every 10 hours), even though the per-step probability is only 0.0056 percent. A CRC or hash can protect each shard or reduced buffer against corruption in transit or storage, while a redundant reduction can test the arithmetic path independently. Robustness moves from being a *restart* problem to a *verification* problem only when the verification covers the failure mechanism being claimed.

Full replication protects a broader computation path at a correspondingly high resource cost. Dual modular redundancy runs every computation twice and compares the results, and triple modular redundancy runs it three times and takes a majority vote, paying 100 and 200 percent hardware overhead to detect or mask a fault within a single control deadline (Sheaffer et al. 2007; Arifeen et al. 2020). These guarantees depend on the replicas avoiding a shared fault. The price is justified in safety-critical embedded control, such as a vehicle's onboard computers, where one wrong output can endanger people and the replicated hardware is a small computer. For fleet training, duplicating every step of a run on 10,000 GPUs doubles the compute devoted to those steps, before comparison and coordination costs. When corruption is rare and rollback can recover valid state, selective redundancy can protect useful progress at lower cost. Screening removes suspect devices, statistical checks run continuously, standby pools absorb drained nodes, and periodic or triggered recomputation checks selected execution paths.

Google's reactive hot-spare protocol shows how those pieces combine in three stages (figure 0.85). When runtime monitors flag an anomalous gradient and replay implicates a suspect accelerator (G2), the scheduler isolates that device, promotes a standby hot spare (S) into the active ring, and provisions a replacement spare (S′) while the suspect unit undergoes hardware diagnostics (Dean 2024). The fleet pays in advance for one idle device per pool rather than for a duplicate of every computation, and the protocol shifts the burden of correctness from unverified hardware to system-level auditing.

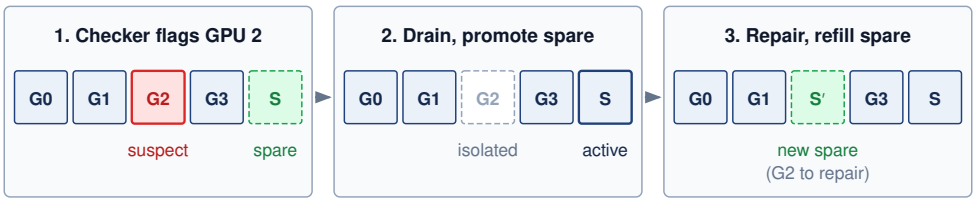


Figure 0.85: Hot-spare failover: An $N+1$ pool of four active GPUs and one standby spare. When loss or gradient sanity checks flag a suspect GPU and replay implicates it, the job drains that device and resumes on the spare from the last known-good state; the device goes to repair and a healthy unit refills the spare slot. Google's data-center examples use this reactive pattern to keep training moving despite hardware faults, in contrast to running every computation on two or three redundant units and comparing results (Dean 2024). The standing cost is the idle spare.

Checkpoint 7.3: Detecting silent corruption

Verify your understanding of Byzantine failures and SDC:

- ☐ **SDC danger**: explain why silent data corruption is more dangerous for ML training than a simple node crash.
- ☐ **Hot spare vs. restart**: compare a hot spare redundancy strategy with traditional checkpoint-restart in terms of recovery latency.
- ☐ **Sanity checker**: identify the metric used as a "sanity checker" to identify potential hardware faults: GPU temperature or gradient norm.
- ☐ **Byzantine scope**: assess the True or False claim that Byzantine failures only occur when a malicious actor intentionally sabotages the training cluster.

These checks reduce the risk of an unreliable substrate, but they do not protect against faults that the software stack introduces itself, bugs that look like valid computation while corrupting the ML pipeline.

Software Faults

A team spends three months testing an LLM against complex prompt-level failure cases, only to realize that its preprocessing script kept only the last 512 tokens of each input, silently discarding

the system prompt on long requests. The example exposes an ordinary source of ML failure that algorithmic testing can miss. A logic error in a data loader or prompt assembler can preserve valid tensor shapes while changing the computation's meaning, allowing the pipeline to continue without a crash.

Software faults require a different recovery lens from hardware failures. Hardware faults enter from silicon, electrons, and physical wear; software faults enter through design choices, dependency versions, and pipeline glue. The fault-tolerance problem shifts from replacing a failed component to identifying which valid-looking transformation corrupted data, gradients, or predictions, and every boundary between framework, library, runtime, and distributed system is a place where such a transformation can hide.

Software fault properties and propagation

Software faults in ML frameworks range from logic errors to resource leaks, concurrency bugs, and integration failures, and they propagate across system boundaries. A tensor leaked on every iteration lets a correctly sized job drift toward the device memory limit over hundreds of steps and then fail with an out-of-memory error, which makes root-cause attribution difficult without per-layer memory profiling. Race conditions in asynchronous updates can lose or overwrite parameter updates, and deadlocks[12] leave workers waiting on messages that never arrive. Some of these faults appear only under high load, on particular hardware, or with a specific pairing of a high-level library and a low-level numerical library such as cuDNN, so root-cause analysis must treat the model code, the runtime, and its dependencies as one versioned artifact.

[12] **Pipeline deadlock**: In pipelined training, a deadlock can form when stage 1 waits for a free buffer to send activations to stage 2 while stage 2 waits for stage 1 to accept its backward gradients. Neither stage can proceed, and because every other stage depends on them, the whole job stalls with no error raised, which a collective timeout eventually converts into a detectable failure.

Software fault detection and prevention

Because many software faults leave the pipeline running while corrupting gradients, reliability evidence must establish which invariant failed and which recovery action is now safe. Several tests verify recovery guarantees that later sections build in full, and each needs only the invariant it protects. A restore drill checks a manifest, the record that names every checkpoint shard and the training step they share. A membership test kills or partitions a worker and checks that, once it has been replaced, it can no longer write state the job will trust. Every such test is judged against two bounds that a recovery must meet, how much completed work it may lose and how long it may take before useful work resumes. Checkpointing turns those bounds into the formal recovery objectives of section 13. Later sections of this chapter build the guarantees themselves, the manifest protocol in section 16 and the epochs, leases, and write fencing that stop a replaced worker in section 19.

The prompt-truncation bug from the opening example should never survive until runtime. A unit test should catch the tokenizer boundary, an integration replay should catch the batch shape and metadata path, and a fault-injection test should verify that the resulting alert blocks publication or rolls back to a known-good state for the injected case. Table 0.57 organizes these gates by the recovery claim each one supports.

Table 0.57: Reliability Evidence and Recovery Decisions: Tests earn operational value when each one establishes an invariant and authorizes a specific rejection, rollback, isolation, or restore decision.

Reliability evidence	Invariant exercised	Decision enabled
Boundary unit test	Tokenizer limits, tensor shapes, masks, and step metadata remain valid	Reject the change before distributed execution
Deterministic replay	A recorded batch produces equivalent state on known-good hardware	Separate input or software defects from suspect hardware
Checkpoint restore drill	A committed manifest restores every shard and resumes at its named step	Accept the generation as satisfying the recovery contract
Membership fault injection	A killed or partitioned worker loses ownership and cannot write after replacement	Validate ownership handoff and communicator rebuild
Corruption injection	A changed shard, reduced buffer, or checkpoint fails the intended verifier	Block the optimizer step or roll back before propagation
Dependency rollback test	A versioned runtime and artifact set can return to the last known-good combination	Authorize automated rollback instead of manual repair

These safeguards matter only when each gate targets a concrete corruption path. A test that checks only whether the tokenizer runs is too weak; it must assert that system prompts, labels, masks, and sequence-length metadata survive preprocessing with the intended semantics. Integration replay then follows one recorded batch through loading, sharding, collation, and model input construction. Fault injection tests whether the detector fires before the protected commit and whether recovery stays within the named bounds on lost work and recovery time for the injected fault. A passing case supports that tested contract, not complete coverage of every possible corruption. Restore drills, stale-writer rejection, and corrupted-shard rejection therefore provide evidence that generic build success cannot supply.

Several rows of table 0.57 claim more than a passing test. They claim that a detector fires and a recovery path holds when something breaks, and a claim of that kind can be checked only by breaking something on purpose.

Fault Injection Tools and Frameworks

An injected failure is useful evidence only when it resembles the production failure the system must survive. A multi-node training cluster that claims to tolerate network partitions should have that connection severed in a staging environment so engineers can observe what the orchestration layer does. Fault injection is the engineering discipline of deliberately perturbing a system to empirically verify that robustness mechanisms work before production traffic discovers the gap. Fault-injection tools for tensors and accelerators cover bit flips, corrupted tensor values, and accelerator-oriented failures (Z. Chen et al. 2020; Tsai et al. 2021; Gräfe et al. 2023), while network partitions, latency injection, dependency termination, and API-response faults belong to chaos and distributed-systems testing practice (Basiri et al. 2016).

Fault and error models

A fault-injection experiment must specify duration, location, granularity, and propagation path. Its fault model describes the originating disturbance, such as a transient single-bit upset or a permanent multi-bit defect. Its error model describes the resulting corrupted state or computation. Results for transient single-bit faults do not establish resilience to permanent multi-bit defects (Sangchoolie et al. 2017).

The injection level determines which propagation paths the experiment includes. A register-level bit flip in a simulator such as gem5 (Binkert et al. 2011) can expose effects that a mutation of a PyTorch weight tensor omits. Conversely, hardware may mask an injected fault before software observes it. Location and propagation therefore matter when comparing results across fault models (Sangchoolie et al. 2017; Papadimitriou and Gizopoulos 2021).

This divergence comes from the multi-tier filtering formalized as error masking (Mohanram and Touba 2003). A physical soft error becomes an observable failure only if it passes two screens in turn (figure 0.86). The corrupted data must first be read, and the value read must then produce incorrect output or a crash. A hardware disturbance that hits an unused functional unit, is overwritten prior to use, or lands in dynamically dead instructions is silently absorbed within the microarchitecture or runtime (Ko 2021). Because tensor-level mutations inject perturbations downstream of these architectural filters, their empirical error rates must be evaluated at that higher abstraction level.

These masking effects determine which abstraction level an experiment should target.

Fault injection methods

Fault injection methods trade realism against experimental scale. Hardware-based injection, through field-programmable gate array (FPGA) emulation or accelerated particle-beam exposure of a running accelerator (Velazco et al. 2010), supplies the calibration point because its faults pass through the same circuit-level masking as production faults. Software-based injection is the scalable counterpart. Tools such as PyTorchFI (Mahmoud et al. 2020) perturb weights, activations, and gradients directly, covering many model states quickly without special hardware, and have shown that single bit-level faults can produce severe misclassifications, including “phantom” objects in detection models. The cost is an abstraction gap. A software tool that mutates a tensor skips the hardware masking that would have absorbed many of the same disturbances. Frameworks such as Fidelity (He et al. 2020) narrow that gap by mapping how faults in registers, memory hierarchies, and numerical units

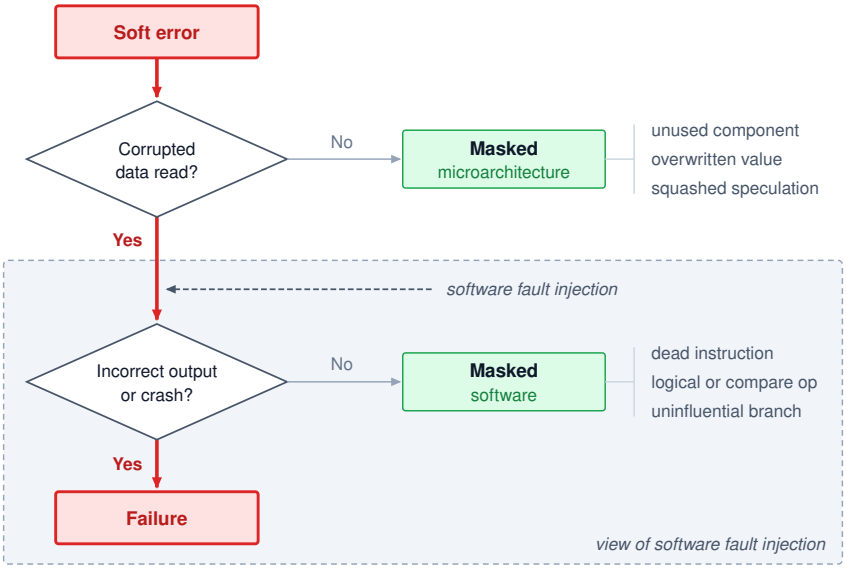


Figure 0.86: Error masking: Follow a soft error from the top. It becomes a failure only if the corrupted data is read and then also produces incorrect output; at each No branch it is masked, first by microarchitectural effects (unused components, overwritten values, squashed speculative instructions) and then by software effects (dead instructions, logical and compare operations, uninfluential branches). Because software-level fault injection sees only the second filter, it can misestimate a system's true resilience to transient errors.

become software-visible errors, so that injected faults resemble what physical hardware would produce.

Example 7.1: Software fault injection limits

Scenario: An engineering team validates a distributed training pipeline using software fault injection, concluding that tensor bit-flips always corrupt model gradient updates.

Diagnosis: Hardware-calibrated experiments reveal that software injection bypasses low-level hardware masking effects (such as ECC memory correction and gate-level masking) that prevent many register-level bit-flips from ever mutating software variables.

Systems lesson: In this experiment, bypassing hardware masking overstates the effect of the modeled physical faults. Tensor mutation still tests the software response to corrupted values; estimating production vulnerability additionally requires a calibrated model of which physical faults reach those values. The result must be interpreted at the injection level actually tested.

For fleet recovery, the most valuable experiments inject faults at the level where recovery decisions are made. Killing a rank in the middle of a collective, partitioning a node from the rendezvous service, delaying a heartbeat past its timeout, and corrupting one checkpoint shard each exercise one row of table 0.57. Running these experiments continuously in staging, and in controlled form in production, keeps rarely executed recovery code from decaying between real incidents (Basiri et al. 2016). A detection mechanism can identify corrupted or missing state, but only a recovery mechanism can replace it. Fault persistence determines whether to retry, quarantine, or replace a component, and checkpointing supplies the known-good training state from which any of those paths can resume.

Checkpointing and Progress Preservation

When a top-of-rack switch dies two weeks into the training run of a 175-billion-parameter model, the cluster loses 64 GPUs instantly. The system cannot simply restart from scratch; the sunk cost of weeks of compute is too high. The failure analysis in section 12 established that large-scale training systems will experience such failures frequently, requiring robust mechanisms to preserve and resume progress.

Training fault tolerance has three obligations: preserve state, detect and classify failures, and resume or resize the job. Checkpointing supplies the first obligation. The sections that follow then build the rest of the recovery model: detection supplies evidence for a recovery decision, recovery procedures restore a consistent process group, and elastic recovery determines whether the job can continue with a changed worker set. Every one of those paths falls back on the saved copy that checkpointing produces, so the first question is what that copy must contain.

Definition 7.1: Checkpointing

Checkpointing is the periodic serialization of the complete training state (parameters, optimizer state, data loader position, and random state) to persistent storage at a recorded training step.

1. **Significance**: It minimizes lost work after a system failure by trading checkpoint I/O against rework. Writing too often wastes accelerator time on storage traffic; writing too rarely risks replaying many completed steps after a failure. The Young-Daly interval developed in this section chooses the cadence that balances write cost against expected lost work.
2. **Distinction**: A resumable checkpoint captures a consistent execution state, including optimizer state, random-number generator state, data position, and learning rate schedules. It can use full or incremental storage; bitwise replay additionally requires compatible deterministic execution.
3. **Common pitfall**: A frequent misconception is that checkpointing is "just writing to disk." For large models it is a storage-system stress test, because the simultaneous write from thousands of GPUs can trigger a checkpoint storm (definition 4.5) that saturates the shared network and storage bandwidth (BW).

A checkpoint is useful only if it resumes the recorded step consistently. In distributed training, every shard must belong to the same recoverable state; a collection of files from different steps does not preserve progress. For the interval model, assume that writing a checkpoint completes durably before it becomes available for recovery and that a failure discards the work performed since the last completed checkpoint.

Two recovery objectives turn those obligations into a contract. The recovery point objective (RPO) bounds acceptable lost progress, so checkpoint age and replication lag must fit within it. The recovery time objective (RTO) bounds the delay until useful work resumes, which covers detection, resource replacement, restore, and warmup. A 20-minute checkpoint interval cannot promise an RPO below 20 minutes without a more frequent durable log or replica, and asynchronous flushing can leave the last durable generation older still. A five-minute RTO is impossible if checkpoint reload alone takes eight minutes. These objectives apply to a stated fault model. Corruption discovered after several saves can require rollback beyond the newest durable checkpoint. The Young-Daly interval derived next minimizes expected waste; RPO and RTO impose service constraints that the expected-value optimum must still satisfy (Beyer et al. 2016).

The Young-Daly checkpoint interval

When failures are expected during a job, the key engineering decision is how often to write that state, because every save costs I/O time and every unsaved step is work a failure can erase. The Young-Daly formula[13] (principle 12, applied in section 15) gives a first-order estimate of that balance through a square-root rule:

[13] **Young-Daly formula**: Young (1974) derived the first-order optimal checkpoint interval, and Daly (2006) independently refined it with tighter second-order bounds.

$$T^*_{\text{ckpt}} = \sqrt{2 \cdot T_{\text{write}} \cdot \text{MTBF}_{\text{system}}} \tag{0.22}$$

T_{write} in distributed ML training is not the time to flush a small process state; it includes transferring model weights and optimizer state to durable storage. The reference format here stores BF16 weights, separate FP32 master weights, and two FP32 moment tensors per parameter for Adam. A single resumable checkpoint for a 70B-parameter model therefore approaches a terabyte at 14 bytes per parameter; for the later 175B-parameter running example, it exceeds two terabytes. Reducing T_{write} requires a smaller payload or higher sustained write bandwidth, and T_{write} itself is the central constraint that determines how tightly the checkpoint interval can be set before I/O overhead displaces productive training compute.


Of those 14 bytes per parameter, the optimizer state[14] dominates the payload, exactly as in the storage sizing of the same resumable checkpoint in section 15, so the optimizer state rather than the model weights sets most of T_{write}.

To see the balance, consider an interval between saves. Doubling that interval approximately halves the checkpoint writes per unit of training, but a failure then loses twice as much work on average. Under the constant-rate, rare-failure approximation, failure occurs approximately uniformly within an interval, so the average lost work is half the interval. When write time is small relative to the interval, the wasted fraction from saving and replaying work is approximately the sum below. Detection, allocation, and restoration time require a separate recovery budget.

$$W(T_{\text{ckpt}}) \approx \frac{T_{\text{write}}}{T_{\text{ckpt}}} + \frac{T_{\text{ckpt}}}{2 \cdot \text{MTBF}_{\text{system}}} \tag{0.23}$$

Setting the first derivative to zero ($\frac{dW}{dT_{\text{ckpt}}} = -\frac{T_{\text{write}}}{T^2_{\text{ckpt}}} + \frac{1}{2 \cdot \text{MTBF}_{\text{system}}} = 0$) directly yields the square-root minimum of equation 0.22. The first term falls hyperbolically as the interval lengthens while the second climbs linearly, so total waste traces a U-shaped convex curve with a shallow floor. Its scaling consequence is the one to carry forward. As clusters grow, system MTBF drops, so the optimal interval shrinks, demanding higher-bandwidth storage to keep T_{write} small before the "checkpoint tax" consumes the cluster's compute capacity. Because the relationship is a square root, halving MTBF tightens the interval by only $\sqrt{2} \approx 1.4\times$, so doubling cluster size does not demand doubling checkpoint I/O bandwidth when checkpoint size and the other assumptions stay fixed. The next subsection applies the formula to the chapter's own cluster, whose full-system MTBF the cluster cascade already derived.

[14] **Adam optimizer state**: Adam's per-parameter first-moment (m) and second-moment (v) estimates are two FP32 values, 8 of the 14 bytes per parameter in the resumable checkpoint; with the FP32 master weights, optimizer-side state accounts for all but the 2 bytes of BF16 weights. For a 175B parameter model, the two moments alone reach 1.4 TB, which typically dominates checkpoint size and recovery time, making optimizer state the primary bottleneck in checkpoint I/O design.



Optimizer state, not weights, dominates checkpoint size.

Checkpoint interval from failure analysis

The Young-Daly interval of equation 0.22 needs two inputs. The failure analysis in section 12 supplies the system MTBF term, and the checkpoint payload together with sustained write bandwidth supplies T_{write}. With both in hand, the formula gives a candidate schedule for the chapter's own cluster, subject to its recovery objectives.

The worked cascade's 10,000-GPU cluster, roughly ten times the Archetype A reference cluster, supplies both inputs as computed values. That cascade (section 4) put full-system MTBF, including PCIe and network failures (the redundant power supplies add no term), at 3.87 hours. For the write time, the 175B running example's 2.45 TB resumable checkpoint drains to shared storage at the sustained aggregate write bandwidth this chapter assumes for the cluster, 100 GB/s, which takes 24.5 s. Substituting these into the Young-Daly formula gives the canonical interval for this cluster.

↩ The per-tier storage bandwidths that bound how quickly a checkpoint can be written are established in section 4.

Napkin Math 7.3: The Young-Daly optimal interval

Problem: A 10,000-GPU cluster has an MTBF of 3.87 hours. A full model checkpoint takes 24.5 s to write. What is the optimal checkpoint frequency?

Math: Apply the Young-Daly interval of equation 0.22 (principle 12).

1. **Convert to common units**: $\text{MTBF}_{\text{system}} = 3.87$ hours $\times$ 3600 s/hour = 13932 s.

2. **Substitute and solve**: With $T_{\text{write}} = 24.5$ s and MTBF $= 13932$ s, the formula gives $T^*_{\text{ckpt}} \approx 826.2$ s, or about 13.8 min.

Systems insight: At this interval, the "checkpoint tax" (time spent saving + time spent recomputing) is minimized to approximately 5.9 percent. Checkpointing every hour instead would lengthen the expected rework after each failure, wasting about 13.6 percent of the cluster's capacity. As clusters scale, the optimal interval must shrink to keep up with the falling MTBF.

The result connects measured or estimated interruption rates to checkpoint policy. At this interval, saving and expected replay together consume approximately 5.9 percent of training time in the first-order model, half from writes and half from replay, because at the square-root optimum the two terms of equation 0.23 are equal. Plotting those two terms for this cluster shows how forgiving the optimum is (figure 0.87). Write overhead falls hyperbolically and expected rework climbs linearly, so their sum has a shallow floor around 14 min. An interval somewhat off the optimum costs little, while one several times too short or too long costs far more, which is why a rough MTBF estimate still yields a usable schedule.

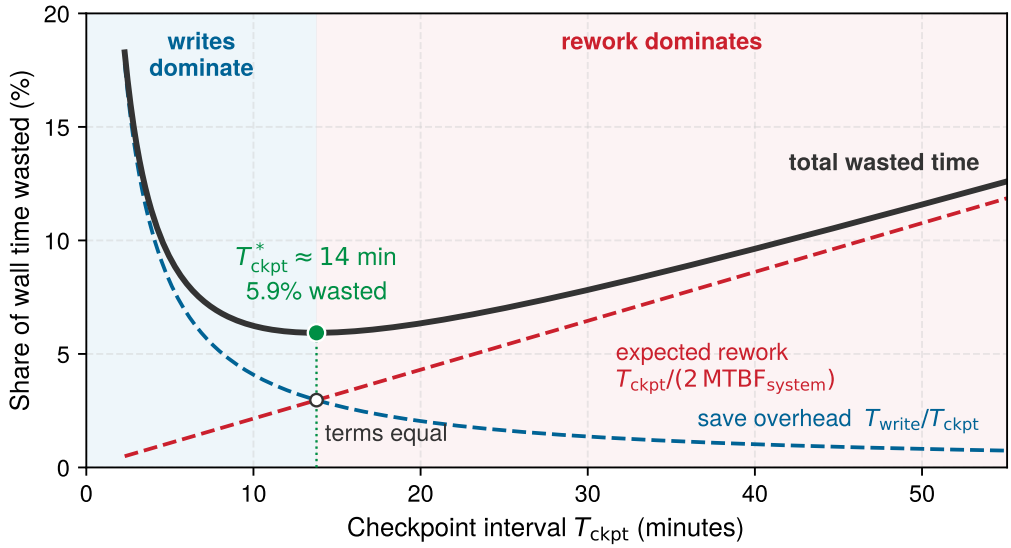


Figure 0.87: The checkpoint trade-off: Checkpoint save overhead (dashed blue) falls as the interval lengthens, while expected rework after a failure (dashed red) rises; their sum (solid) is minimized at the Young-Daly interval. The curves use this chapter's 175B running example on its 10,000-GPU cluster, with a 24.5 s checkpoint write and a 3.9 h full-system MTBF, which put the optimum near 14 min. The minimum is shallow, so an interval somewhat off the optimum costs little, while a far shorter or far longer one costs a great deal.

How far the estimate itself can be trusted depends on the assumptions behind it.

Systems Perspective 7.3: Young-Daly formula assumptions

The first-order Young-Daly formula provides valuable intuition but rests on assumptions that may not hold when write times are non-negligible relative to MTBF; the renewal model derived in section 4 shows how finite checkpoint time changes the optimum. The assumptions are:

- Exponentially distributed failures: Assumes a constant failure rate. Real systems exhibit "bathtub curve" behavior with higher rates during burn-in and wear-out phases.

- Deterministic checkpoint time: Assumes T_{write} is constant. In practice, checkpoint time varies 2–3× due to storage contention, network congestion, and memory pressure.
- Recovery cost is independent of the chosen interval: A fixed per-failure recovery cost does not change the first-order minimizing interval. Recovery can take longer than checkpoint writing because it also includes job scheduling delays, topology reconstruction, and warmup; it still belongs in the total-waste budget.
- Aggregate interruption process: Independent constant-rate failure sources can contribute to one job-interruption rate. Shared power, cooling, or switch failures require a model of incident frequency and recovery cost; adding per-device rates alone misses those common causes.
- Infinite timeline: Optimizes for long training runs. Short runs, where total time is comparable to MTBF, require different analysis.

When assumptions are violated, the optimal interval may shift significantly, but restart overhead should not be treated as if it were paid at every checkpoint. In the first-order lost-time model, restart time adds a per-failure recovery term to total expected waste; it does not replace T_{write} inside equation 0.22 unless a recovery-aware Daly-style model is explicitly derived and calibrated.

Along an execution timeline, a training run alternates productive compute intervals (T_{ckpt}) with synchronous save barriers (T_{write}), and a failure charges two distinct penalties (figure 0.88). Uncheckpointed progress is discarded as lost rework, and the restart latency (T_{recovery}) to reload state and warm up execution pipelines follows before useful work resumes.

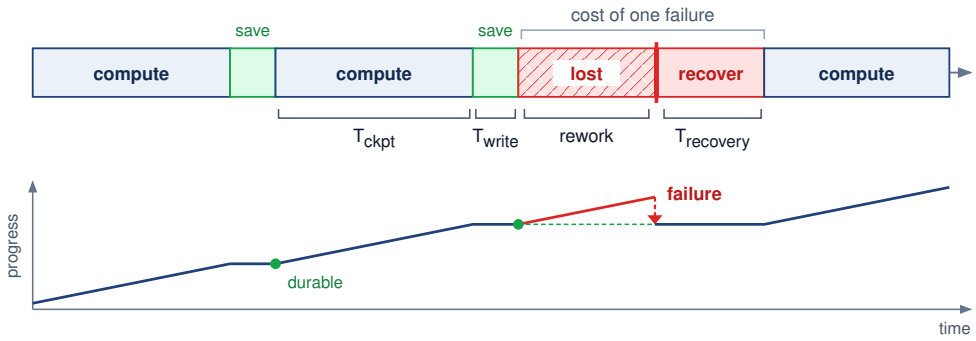


Figure 0.88: Checkpoint-recovery timeline: A training run alternates productive compute (blue) with durable checkpoint writes (green). When a failure strikes, all compute since the last completed checkpoint is lost (red hatching), and the job must then read the checkpoint and restart (red) before productive compute resumes. A failure therefore costs the rework since the last save plus the recovery latency; the Young-Daly interval trades the first of these against the write time paid at every checkpoint.

Recovery latency therefore matters as much as write duration, because every failure pays both the discarded compute since the last save and the restart delay. That delay includes job scheduling, checkpoint loading, and pipeline warmup. Production systems where recovery exceeds checkpoint write time by 3–5× should include it in their total-waste and service-level objective (SLO) budgets, and should use a cited recovery-aware checkpoint model rather than folding recovery time into the per-checkpoint write term.

Checkpoint overhead analysis

The interval calculation chooses *when* the system preserves state; the write path decides what each save costs while training waits. Equation 0.24 generalizes the save-side term of equation 0.23 to include any pause beyond the write itself:

$$f_{\text{ckpt}} = \frac{T_{\text{write}}}{T_{\text{ckpt}}} + \frac{T_{\text{pause}}}{T_{\text{ckpt}}} \tag{0.24}$$

Here, f_{ckpt} is the dimensionless fraction of time lost to checkpointing, T_{write} is checkpoint write time, T_{ckpt} is the checkpoint interval, and T_{pause} is any training pause beyond the checkpoint write itself. This includes memory allocation, coordination, and serialization. Total first-order waste is then $W(T_{\text{ckpt}}) \approx f_{\text{ckpt}} + T_{\text{ckpt}}/(2 \cdot \text{MTBF}_{\text{system}})$, so checkpoint overhead in this section means the save side alone, with expected rework counted separately. How large f_{ckpt} becomes depends first on whether training waits for durable storage.

Synchronous vs. asynchronous checkpointing

The synchronous and asynchronous checkpointing approaches differ in when training waits for durable storage. Synchronous checkpointing coordinates workers at a consistent state boundary, writes their portions, and resumes training only after all writes complete. Blocking alone does not establish consistency; the protocol must ensure that every shard belongs to the same recoverable training state.

Asynchronous checkpointing separates that consistent capture from the durable flush. Workers snapshot their state to CPU memory or staging storage and protect the captured values from later updates, then continue training while a background process writes the snapshot to persistent storage.[15] Recovery can use the new generation only after all required shards reach the storage tier that survives the modeled failure and the coordinator publishes completion.

[15] **Asynchronous checkpointing**: Pipelines durable writes behind training by first capturing a consistent snapshot in staging memory or storage. Training must not mutate values still being captured. After capture, background flushing can overlap independent computation, subject to staging capacity and sustained drain bandwidth. Exposed capture time and resource contention remain overhead even when the durable write finishes off the training critical path.

Memory footprint introduces a second contrast. Beyond write time, checkpointing consumes memory for serialization, transfer buffers, and any copied snapshot. A synchronous writer can read stable training state while updates are paused, so it does not necessarily need a complete second copy, but the pause can leave accelerators idle even with fast storage. Independent input prefetching may continue; forward or backward work that changes the captured state must wait unless the snapshot mechanism explicitly permits overlap. Asynchronous capture instead requires retained values that later updates cannot change, so its buffering policy can increase peak memory demand.

The "stop-the-world" cost

The financial impact of synchronous checkpointing at scale is severe when the storage path is slow. Suppose the same 175B checkpoint on the same cluster goes to a slower shared tier than the one assumed in the interval notebook, delivering about 20 GB/s instead, under a common hourly policy and with no staging to hide the write. A 10,000-GPU cluster then pauses for 2 minutes per save and burns $10{,}000 \times \frac{2}{60} \approx 333$ idle GPU-hours, which at roughly \$3 per GPU-hour costs about \$1,000 in wasted compute for a single checkpoint. Hourly, that idle time compounds to \$24,000 per day spent waiting for storage I/O. This is the cost that asynchronous capture removes from the critical path, which is why production systems stage checkpoints rather than block on the shared tier. Write time also varies widely across model types, because larger models require longer writes but also earn longer optimal intervals (table 0.58).

The Archetype A row in table 0.58 uses the same 14-byte-per-parameter resumable checkpoint (2.45 TB) as the rest of the chapter. Its interval calculation uses the GPU-only cluster MTBF rather than the shorter full-system MTBF of the worked cascade, so the square-root rule gives a longer interval than the Young-Daly notebook. The table keeps the GPU-only basis because its purpose is comparison across model types. Switching every row to the full-system MTBF would shorten each interval, and raise each overhead, by the same square-root factor, leaving the ranking across rows unchanged. The ResNet-50 and BERT-Large rows count only FP32 weights, so their write times and resulting intervals are lower bounds for a resumable checkpoint. Their intervals of seconds describe the balance for that smaller payload; selecting a recovery cadence requires including optimizer, schedule, and input-stream state. Small-state jobs rarely run on a cluster this large, and their actual storage bandwidth and complete recovery state determine whether saves every few minutes or every epoch have negligible overhead. The large-state rows show why interval selection becomes consequential when each save moves hundreds of gigabytes or terabytes.

Table 0.58: Checkpoint Overhead by Model Type: The Archetype A row is the 175B running example at 14 bytes per parameter (weights, FP32 master weights, and Adam moments); the 20B, recommender, and vision transformer rows are representative scenario sizes, and the 4 TB embedding-heavy recommender is a smaller scenario than the 10 TB+ embedding tables of Archetype B (DLRM at Scale) in table 0.55; the BERT-Large and ResNet-50 rows count FP32 weights only and omit optimizer state, so their write times understate a full resumable checkpoint. Larger models require longer save times but also benefit from longer optimal checkpoint intervals. The percentage column reports the save-side overhead f_{ckpt} of equation 0.24 with no extra pause, not total Young-Daly waste; at the optimum, expected rework adds a comparable term.

Model Type	Checkpoint Size	Write Time (100 GB/s)	Optimal Interval (5 h GPU-only MTBF)	Save Overhead
Archetype A (GPT-4/Llama-3)	2.45 TB	24.5 s	15.7 min	2.6%
20B dense transformer class	240 GB	2.4 s	4.9 min	0.8%
BERT-Large	1.4 GB	0.014 s	22 s	0.06%
Embedding-heavy recommender	4 TB	40 s	20 min	3.3%
ResNet-50	102.4 MB	0.001 s	6 s	0.02%
Vision transformer class	1.2 GB	0.012 s	21 s	0.06%

While the theoretical overhead of checkpointing appears manageable for individual models, writing these massive state files introduces a new bottleneck. When thousands of GPUs simultaneously attempt to write gigabytes of data to a shared file system, the resulting I/O congestion threatens to bring the entire cluster to a halt. The scale of that I/O burst is easiest to see by expanding the example from one model to thousands of simultaneous writers.

Example 7.2: The checkpoint storm

Scenario: A 10,000 GPUs distributed training cluster runs an embedding-heavy job whose per-worker model and embedding shard (10 GB) is several times the 2.4 GB per-GPU shard of the 175B running example. Every worker flushes its shard to shared storage at the same step instant.

Diagnosis: Simultaneous uncoordinated writes offer 100 TB to shared network and storage paths in one burst, the checkpoint storm of definition 4.5. When that arrival rate exceeds sustained service capacity, queues grow and writers stall; finite buffering can also lead to drops or timeouts. The total byte count alone does not establish which resource fails first.

Systems lesson: A consistent capture need not become an uncontrolled storage burst. Staggered flushes, rate limits, and bounded host-memory or local-storage staging can keep background writes within the drain capacity. The system must still publish a generation only after it reaches the required durability tier.

Theoretical models project modest overhead percentages under uncontended conditions, yet real deployments often encounter checkpoint times far exceeding these estimates. Diagnosing such discrepancies requires examining the full system stack.

Example 7.3: Debugging checkpoint overhead

Scenario: In a hypothetical trace, a cluster with 64 nodes training a 70B model pauses for 15 minutes per checkpoint after each 45 minutes of useful computation. This is a 25 percent share of wall time, exceeding a 2 minutes pause target.

Diagnosis: An update-boundary snapshot stores BF16 weights, separate FP32 master weights, and both FP32 Adam moments: 980 GB before metadata. A single shared 10 Gbps NFS path (1.25 GB/s) needs at least 13.1 min to transfer those bytes. The longer observed pause is consistent with this bandwidth floor but does not identify every source of overhead.

Systems lesson: Local NVMe staging can move the remote transfer out of the training pause, provided snapshot copies and local writes fit their own budgets. It cannot accelerate the shared path's sustained drain rate. Here the ideal drain time is shorter than the interval between snapshots; production must verify the effective rate, staging capacity, and contention. A snapshot on local staging alone does not survive loss of that node unless the recovery contract provides another copy.

That last caveat moves the question from what a save costs to what it survives. Staging hides the write from training, but where each copy lives decides which failures the saved state outlasts and how quickly it returns.

Checkpoint storage and recovery

Tiered checkpoint storage architectures, with local NVMe for speed, distributed filesystems for durability, and object storage for long-term retention, provide the storage foundation on which recovery mechanisms operate. The fault-tolerance question is how recovery mechanisms use that infrastructure rather than how the storage hierarchy is designed.

↩ Tiered checkpoint storage designs and asynchronous write pipelines are established in section 15.

For fault tolerance, checkpoint placement determines which failures the saved state survives, while the restore path determines how quickly that surviving state becomes useful. On the 128-node Archetype A reference cluster, each node holds about 19.1 GB of the 2.45 TB checkpoint for the 175B running example. Reading that share from local NVMe at 5 GB/s takes about 3.8 s, with every node reading in parallel, while pulling the full checkpoint back through shared storage at 100 GB/s aggregate takes about 24.5 s. The local path is faster because it multiplies drive bandwidth by node count, but a sole copy on a lost node cannot restore that node's shard. The replacement node must read its share from a copy outside the failed domain, such as a distributed filesystem or object store, whose recovery time is set by sustained aggregate reads, network capacity, and deserialization. A sound placement therefore keeps a fast local copy for the survivors and a durable remote copy for whatever the failure took away, and these rates must still be measured under the job's own load.

Checkpoint coordination patterns

Recovery from distributed checkpoints for sharded models requires understanding the coordination protocols that ensure checkpoint consistency. Checkpoint coordination involves two orthogonal dimensions: whether workers synchronize to capture a consistent state (coordinated versus uncoordinated checkpointing), and how that state flows to persistent storage (centralized versus distributed checkpointing).

In **uncoordinated checkpointing**, each worker records its local state independently without synchronizing with peers. While this avoids coordination barriers during healthy execution, recovery must search across independent shards for a mutually consistent cut. Because distributed ML workers exchange gradients and activations at every step, an uncoordinated rollback can cause dependencies to cascade backward through the entire training run—the classic domino effect (Elnozahy et al. 2002). Distributed ML systems therefore rely on **coordinated checkpointing**, in which workers synchronize (either at step boundaries or through explicit two-phase commit protocols) to ensure that saved shards together define a globally consistent recovery line.

Once coordination guarantees consistency, the architectural decision is how those shards reach persistent storage: whether workers funnel their state through a single coordinator or write their partitions directly in parallel.

Centralized checkpointing

In centralized checkpointing, workers send their state to a coordinator process that assembles and writes the complete checkpoint. This approach simplifies checkpoint management and can produce self-contained checkpoint files, but all state crosses the coordinator's network links, and coordinator failure interrupts the save. A streaming writer can avoid buffering the entire checkpoint, although it cannot remove the ingress bottleneck. That bottleneck is structural. The coordinator receives through one node's network links, so its write time grows with total state volume, whereas independent writers each move only their own share of the state through their own links. The gap between the two patterns therefore widens in proportion to the number of writers. For the 175B running example, the 128 nodes of the reference cluster would funnel 2.45 TB through one node's links instead of 19.1 GB through each. The pattern is viable while that one path meets the checkpoint budget; state volume and sustained bandwidth determine the limit more directly than a fixed worker count.

The decision boundary is the size of the state and the number of writers. Centralized checkpointing is attractive when operational simplicity matters more than aggregate bandwidth, but distributed and sharded approaches become necessary once the checkpoint itself is a fleet-scale object.

Distributed checkpointing

Distributed checkpointing eliminates this coordinator funnel by having each worker persist its own shard directly. Figure 0.89 contrasts the dataflow topologies: the centralized pattern concentrates traffic at the coordinator's ingress, while the distributed pattern writes in parallel to local NVMe and drains the shards to remote object storage in the background. With fixed per-worker shard sizes and sufficient independent staging bandwidth, adding workers need not lengthen the local write pause. Shared drain capacity and completion coordination can still limit scaling. A coordinator signals when to checkpoint and confirms completion, but state flows directly from workers to storage without aggregation.

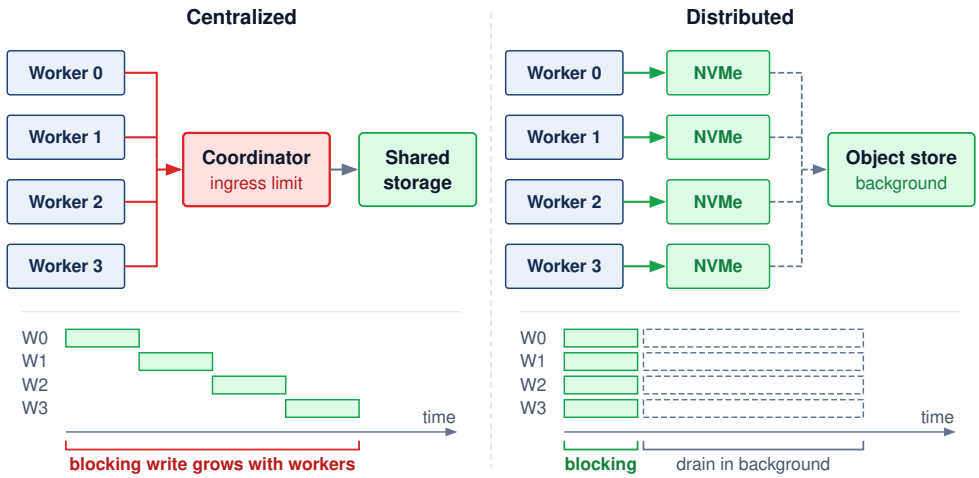


Figure 0.89: Distributed checkpoint architecture: Centralized vs. sharded checkpoint writes. In the centralized pattern (left), every worker funnels its shard through one coordinator, whose ingress bandwidth and buffering constrain the write path and whose failure halts the save. In the distributed pattern (right), each worker writes its own shard to local NVMe in parallel and a background process drains the shards to remote object storage, so the local blocking write time can remain roughly constant with fixed shard sizes and sufficient staging bandwidth; shared drain capacity still limits completion.

A synchronous version of the coordination protocol proceeds in six steps:

1. Coordinator broadcasts checkpoint request with checkpoint ID
2. Each worker reaches a consistent state (barrier synchronization)
3. Each worker writes an immutable shard to a generation-specific staging prefix and records its byte length and cryptographic digest

4. Each worker confirms durable write completion to the coordinator
5. The coordinator writes an immutable manifest after all confirmations; the manifest names the training step, topology, model and optimizer formats, data-loader position, random state, and the length and digest of every shard, then publishes a commit marker or atomic pointer to that manifest
6. Coordinator broadcasts checkpoint complete, training resumes

The idealized protocol assumes step 2 completes quickly. The barrier, however, waits for the slowest of thousands of arrivals, so a single slow worker can make it dominate the checkpoint pause even when the storage path has ample bandwidth. Measuring arrival skew separately from copying and writing reveals whether coordination or data movement limits the save.

The manifest, not the presence of a directory or a plausible set of shard names, defines a committed checkpoint generation. Restore accepts only a published manifest whose shards all match their recorded lengths and digests; staged shards without that final publication remain unreachable and can be garbage collected. This rule prevents a partially overwritten `latest` directory from masquerading as recoverable state and makes generation rollback explicit. The set of per-worker states a manifest names is a cut, and the cut is consistent when all of those states could have existed together at one moment of a valid execution, so that no shard reflects an update another shard has not yet seen. That consistency cut determines whether the system can claim strict, bounded-asynchronous, or eventual consistency.

> **Systems Perspective 7.4: Checkpoint consistency models**
>
> Strict synchronous: All workers checkpoint at exactly the same training step. Provides strongest consistency but highest overhead from barrier synchronization.
>
> Bounded asynchronous: Workers may progress at different rates while the checkpoint manager tracks which snapshots can form a consistent recovery cut. Bounding step skew alone is insufficient: the system must retain compatible shard versions or enough replay information to reconstruct that cut. Asynchronous flushing can also preserve a single synchronized snapshot while its writes complete in the background, avoiding training stalls without relaxing recovery consistency.
>
> Eventual consistency: Workers save independently and recovery attempts to reconcile their versions. A usable design must retain enough compatible versions or replay information to reconstruct a valid state; arbitrary recent shards do not necessarily form a recoverable generation. Reduced coordination at save time therefore transfers work and storage requirements to recovery.

Steps 3 through 5 are two-phase commit,[16] the classic distributed-systems protocol for making one decision atomic across many participants (Gray 1978), applied to a checkpoint. Steps 3 and 4 form its prepare phase, in which each worker stages its shard and reports success, and step 5 is its commit phase, in which the coordinator durably records the decision by publishing the manifest. The manifest publication rule inherits the protocol's guarantee and its known weakness. If the coordinator crashes after workers prepare but before it records a decision, the system must not expose those shards as a valid checkpoint, and the prepared participants remain blocked until the original or a replacement coordinator recovers the durable decision. Uncommitted staged shards can be garbage collected only after recovery establishes that no commit decision exists.

Atomic publication does not by itself make the published shards consistent. Synchronous gradient updates naturally create step boundaries where all workers have applied the same updates, but asynchronous training and pipeline parallelism require more careful coordination to define a consistent cut.

[16] **Two-phase commit (2PC)**: Formalized by Gray (1978), 2PC ensures all participants either commit or abort atomically. The protocol's known weakness is blocking, because a coordinator failure after participants prepare but before they learn the decision leaves the prepared participants waiting until the durable decision is recovered. A timeout can trigger coordinator recovery, but it cannot by itself authorize unilateral rollback.

Sharded checkpointing

Modern distributed training frameworks partition model state across workers using techniques like ZeRO and FSDP, which shard parameters, gradients, and optimizer state instead of replicating them

on every data-parallel worker. In these configurations, no single worker holds complete model state. Each worker holds only its assigned parameter shard plus corresponding optimizer state.

Sharded checkpointing[17] (Rajbhandari et al. 2020) uses this distribution: each worker writes only its shard, dramatically reducing per-worker write volume. Recovery loads shards and redistributes state to workers based on the recovery configuration.

This approach enables efficient checkpointing even for massive models. A 175B parameter model with a 2.45 TB checkpoint distributed across 1,024 workers requires each worker to write only 2.4 GB, achievable in seconds with local NVMe storage.

When recovering with a different number of workers than the checkpoint, shard redistribution must remap state to the new worker configuration. This occurs due to elastic scaling or hardware changes. Framework support for flexible resharding enables recovery even when the worker count changes. However, possessing a valid checkpoint is not sufficient on its own. Sharding distributes the write work, while staging and drain control govern the shared I/O burst. The system must still identify the failure, trigger restoration, and coordinate the distributed shards before training can resume. The speed of detection and recovery determines the true cost of the interruption.

↩ How ZeRO and FSDP partition training state across data-parallel workers is established in section 4.

17 **Sharded checkpointing**: Each worker saves only its local partition rather than gathering state to a single writer. For ZeRO-3 or FSDP with 1,024 workers training a 175B model, each worker writes approximately 2.4 GB instead of one writer handling 2.45 TB, parallelizing I/O across all nodes. The trade-off is that recovery requires every shard to be available and consistent, making the checkpoint protocol more complex. Losing one storage device invalidates the generation only if a required shard cannot be recovered from another copy or sufficient storage redundancy.

Checkpoint 7.4: Reasoning about the checkpoint tax

Verify your understanding of how failure rate and checkpoint cost set the optimal checkpoint interval:

- ☐ **Young-Daly shift**: use the Young-Daly formula to estimate how the optimal interval T^*_{ckpt} shifts when a cluster doubles in size and its system MTBF halves, with T_{write} held fixed. State whether the interval lengthens or shortens and by about what factor.
- ☐ **Two-sided tax**: explain why writing checkpoints too frequently and writing them too rarely both raise the checkpoint tax, including the two costs T^*_{ckpt} balances.
- ☐ **Faster writes**: determine how an order-of-magnitude reduction in T_{write} from sharded checkpointing changes the optimal interval and expected lost work per failure.
- ☐ **Square-root scaling**: explain why the Young-Daly interval depends on the square root of MTBF rather than scaling linearly with it.


Failure Detection and Recovery

A GPU silently hangs, dropping its utilization to zero while its peer GPUs wait indefinitely at an AllReduce barrier. Every minute the system takes to notice this hung rank and reboot the node costs thousands of dollars in idle cluster time. Checkpoints preserve state, but the recovery process itself determines how much compute a failure wastes. In the accounting of the Fleet Law (equation 0.3), that waiting belongs to the synchronization term $T_{\text{sync}}(N)$. Every surviving rank idles at the barrier until the group is whole again, so detection, restart, and reload add directly to step time averaged over the run.

Equation 0.25 decomposes recovery time into four primary components:

$$T_{\text{recovery}} = T_{\text{detect}} + T_{\text{restart}} + T_{\text{load}} + T_{\text{warmup}} \tag{0.25}$$

where T_{detect} is the time between the physical hardware fault and system classification as a failure, T_{restart} is the latency required for the job scheduler to allocate resources and launch replacement processes, T_{load} is the I/O duration to read checkpoint state from distributed storage into GPU memory, and T_{warmup} is the interval needed to refill data pipelines, compile just-in-time (JIT) kernels, and stabilize training throughput. Each component presents distinct optimization opportunities, and the dominant term varies by cluster configuration. Understanding this decomposition enables targeted investment in the bottleneck rather than uniform improvement across all components.



Detection latency climbs from seconds (crash) to hours (silent corruption).

Failure detection mechanisms

Heartbeat monitoring is the first detection layer and usually sets the floor on T_{detect}. Each GPU rank periodically signals liveness to a coordinator, and if no heartbeat arrives within the timeout period

T_{timeout}, the coordinator declares failure. Setting T_{timeout} requires balancing false positive rate against detection latency. False positives declare healthy workers failed due to transient delays, while slow detection wastes compute during the detection window, a cost that scales linearly with the number of GPUs blocked in the collective.

For a heartbeat interval of H seconds and network-delay standard deviation σ_d in seconds, equation 0.26 defines the timeout heuristic:

$$T_{\text{timeout}} = H + k\sigma_d \tag{0.26}$$

Here, k is a dimensionless safety multiplier; values from three to five illustrate a tuning range rather than a guaranteed false positive rate. The heuristic treats the normal heartbeat delivery delay as small relative to the heartbeat interval. A deployment with substantial baseline delay or a heavy delay tail must account for those measurements as well as σ_d. The practical difficulty is distinguishing a genuinely dead rank from one that is temporarily slow, for example, a GPU lagging because it is writing a large checkpoint to attached storage while the collective is already waiting. Tuning T_{timeout} too tightly causes checkpoint writes to trigger false failure declarations; tuning it too loosely extends the window during which other ranks wait for the missing contribution.

Collective communication timeouts provide a second detection layer. During synchronous training, a collective required by the next step remains an incomplete critical-path dependency if a required rank disappears. AllReduce needs every rank's contribution before it can produce the reduced result; the progress and failure behavior of other collectives depends on the operation and runtime. Transport and process-group timeouts bound how long the job waits before declaring the operation failed and entering recovery. NCCL[18] provides configurable transport and reliability, availability, and serviceability (RAS) timeout parameters for this purpose, while higher-level frameworks may impose process-group operation timeouts. These settings are often set conservatively to avoid crashing jobs during legitimate periods of slow communication, which unfortunately extends T_{detect}.

Container orchestration health checks provide a third layer. Kubernetes, the container orchestration system, offers liveness probes (verifying that a process still responds and makes progress) and readiness probes (verifying that a process is ready to handle requests). Slurm, the batch scheduler common on HPC-style training clusters, instead runs a periodic node health-check program that can drain a node whose GPUs, links, or file systems fail their tests. Both operate independently of the training framework, catching failures that application-level heartbeats might miss; a liveness probe that tests forward progress rather than mere process existence can catch a process that is alive but deadlocked.

Loss spike detection exposes an anomaly, not its cause. Silent hardware corruption can produce an abrupt loss or gradient-norm spike, but so can a bad batch, an optimizer instability, a data-ordering defect, or a distributed-state mismatch. Robust systems therefore pause before the suspect update commits, preserve the input and worker evidence, and replay the step on known-good hardware. The system drains hardware only after that evidence implicates the device; otherwise, it repairs the data, optimizer, or synchronization path that produced the same symptom.

The operational question is therefore how long detection really takes once these layers interact.

18 **NCCL timeout**: NVIDIA's collective communication library exposes transport and RAS timeout controls such as `NCCL_IB_TIMEOUT` and `NCCL_RAS_TIMEOUT_FACTOR` (NVIDIA 2026b). Higher-level launch and distributed-training frameworks can add their own restart and operation-timeout behavior (PyTorch Contributors 2026c). Aggressive timeout settings accelerate failure detection but risk false positives during legitimate long collective operations on large models, forcing a trade-off between detection latency and training stability that has no universal optimum.

> **Systems Perspective 7.5: Realistic failure detection latencies**
>
> Failure detection includes more than the configured heartbeat timeout when the policy requires verification before recovery. The ranges in table 0.59 illustrate planning scenarios, not universal detection guarantees. Aggressive timeouts risk false positives (killing healthy-but-slow workers), while conservative timeouts delay real failure detection. A multi-stage policy can use an initial timeout to trigger investigation and a later threshold to trigger recovery. Its actual latency must be measured under the workload and failure conditions it is intended to handle.

Table 0.59: Production Failure Detection Latencies: Realistic detection times for process crashes, GPU hangs, network partitions, and silent data corruption, with the dominant cause of latency for each category, showing why static heartbeat timeouts alone are insufficient.

Failure Type	Typical Detection Time	Why
Process crash	5–30 seconds	Heartbeat timeout + verification retries
GPU hang	30–120 seconds	Must distinguish from legitimately slow kernel
Network partition	60–180 seconds	Must distinguish from temporary congestion
Silent data corruption	Minutes to hours	Requires statistical anomaly detection

Recovery procedures

Once a failure is classified, a cold-restart recovery path executes a coordinated sequence to restore consistency. The warm-restart alternative developed next preserves surviving processes when their state can be trusted.

1. Job termination: A `SIGTERM` is broadcast to all surviving workers. This cold-restart path tears down the affected training group so that no survivor continues using the old membership or partially completed collective state.
2. Resource reclamation: The scheduler marks the failed node as "draining" to prevent immediate rescheduling and requests a replacement from the spare pool.
3. Job restart: New containers are launched (from cache if available), and the training binary is re-initialized on all nodes.
4. Checkpoint loading: Each worker reads the state assigned to it from the distributed filesystem. When membership or parallelism changes, recovery remaps the saved shards to the new partitions.
5. State synchronization: Ranks handshake to establish a new communicator (for example, `ncclCommInitRank`), and workers verify they are all at the same training step.
6. Training resumption: The data loader restores its recorded position and sampling state, and the training loop resumes from the checkpoint step. A batch index alone suffices only when it reconstructs the same logical input stream.

Automatic recovery systems perform these steps without human intervention. Modern training frameworks integrate with cluster managers to automate parts of the sequence. DeepSpeed documents save/load routines for model and ZeRO optimizer checkpoints, which provide the durable state needed after failure (DeepSpeed Developers 2026a). PyTorch's `torchrun` elastic launch documents failure and membership-change behavior through its rendezvous mechanism,[19] the coordinator-backed protocol by which surviving workers agree on membership and ranks after a restart (PyTorch Contributors 2026c, 2026b).

Recovery validation tests whether the restored job behaves consistently with its recorded state. Parameter shapes, dtypes, and shard identities must match the manifest. A short replay or validation workload then checks loss and gradient statistics under the expected numerical tolerance; different batches need not reproduce the last prefailure loss. Immediate divergence is evidence to investigate the checkpoint, data state, and execution configuration, not proof that the snapshot is corrupt. Falling back to an earlier validated generation is appropriate when the newest state cannot be trusted.

Recovery must also prevent the failed ownership epoch from returning. A coordinator grants each worker-group incarnation a monotonically increasing epoch (a membership counter, unrelated to a training epoch over the dataset) and associates membership with a renewable lease. Every state-changing write carries that epoch as a fencing token. Before replacement writes proceed, the recovery protocol advances the enforced epoch at each protected resource, which rejects writes carrying an older token. The old worker then cannot publish a checkpoint or update job progress, even if it resumes after a long pause; rendezvous likewise admits only the current membership. A lease alone is insufficient because expiration changes the coordinator's ownership decision, not

[19] **Rendezvous**: From French "rendez-vous" (present yourselves), this coordination protocol lets restarted workers discover one another and establish a new group before training resumes. Recovery waits for the membership policy to be satisfied, so slow startup, delayed communication, and missing workers can extend this phase. Heterogeneity affects those delays but does not by itself imply a proportional latency law.

the old worker's ability to reach storage. Fencing enforces that decision at the resource boundary (Kleppmann 2016).

Retries complete the recovery contract. An operation may be retried automatically only when it is idempotent or carries a stable operation identifier that lets the receiver deduplicate repeated effects. Each attempt inherits the caller's absolute deadline rather than receiving a fresh timeout, and the system caps attempts with a retry budget shared across the request or recovery tree. Exponential backoff and jitter spread attempts in time, but they do not prevent overload if every layer retries independently. The budget therefore belongs at one retry-owning layer; exhausted budget returns a failure or invokes degradation instead of amplifying the original incident (Beyer et al. 2016; Nygard 2007).

Napkin Math 7.4: The recovery time budget

Problem: Consider a 175B parameter model training on 1,024 GPUs. The checkpoint size is approximately 2.45 TB (BF16 weights, FP32 master weights, and Adam moments at 14 bytes per parameter). Estimate the cost of a single failure event.

Setup: The recovery budget T_{recovery} has four terms.

- $T_{\textbf{detect}}$: 60 s (conservative heartbeat timeout with verification retries).
- $T_{\textbf{restart}}$: 3 min (scheduler queue time + container launch + Python import overhead + NCCL initialization).
- $T_{\textbf{load}}$: 24.5 s (this is the aggregate-shared-storage read of the full 2.45 TB checkpoint at 100 GB/s aggregate; with sharded local-NVMe reads at 5 GB/s, one GPU's 2.4 GB shard alone would load in under a second, but the GPUs of a node share its drive, so the node's 19.1 GB share takes about 3.8 s, and only on nodes that survived with their local copy).
- $T_{\textbf{warmup}}$: 2 min (JIT kernel compilation, data pipeline buffer fill, TCP connection re-establishment).

Total: $T_{\text{recovery}} = T_{\text{detect}} + T_{\text{restart}} + T_{\text{load}} + T_{\text{warmup}} \approx 6.4$ min per failure event.

Impact: For this recovery path, T_{recovery} is the operational MTTR term in the steady-state availability relation (perspective 7.1). It is not the whole cost of a failure. Every failure also discards the work done since the last completed checkpoint, on average half the checkpoint interval (figure 0.88), and the Young-Daly waste of equation 0.23 already counts that rework, so the figures below price only the recovery term. Recovery time optimization matters more as clusters grow. The GPU-only baseline from table 0.53 compares the two sizes on a common basis and understates both failure counts. On that basis, a 1,024-GPU cluster has MTBF of 49 hours and experiences about 0.49 failures/day, losing about 3 minutes daily, a modest 0.2 percent overhead. However, a 10,000-GPU cluster has GPU-only MTBF of 5 hours and experiences about 4.8 failures/day, losing about 31 minutes daily (2.1 percent overhead), equivalent to wasting roughly 5,127 GPU-hours every day (the daily lost minutes multiplied across all 10,000 GPUs).

Warm restart vs. cold restart

The recovery procedure described in section 19 is a cold restart: every process in the affected job group exits, and the group reloads state from a valid checkpoint. This simplifies recovery by avoiding dependence on surviving in-memory state, but it can discard useful state. After one GPU fails in the 1,024-GPU reference job, every surviving worker may retain reusable values; an interrupted update or silent corruption, however, can make some of those values unsafe to keep.

A warm restart preserves the state of surviving workers. When a rank fails, surviving ranks detect the failure but do not exit. They enter a waiting state, preserving loaded model weights and optimizer states in GPU memory. The scheduler replaces only the failed node. The new node joins, loads its partition of the state from disk (or receives it via broadcast from a peer), and the communicator is rebuilt. The replacement and survivors must agree on the same committed training step before resuming. A shard restored from an older checkpoint cannot be combined with survivor

shards that have advanced beyond it; the runtime must reconstruct the missing current state or roll the group back to a common recovery point. Training resumes only after that consistency check.

When the missing state can be reconstructed at the survivors' current step, warm restart avoids a full-cluster reload and repeated warmup. For the 1,024 GPUs example, that fast path avoids rereading the full 2.45 TB checkpoint through shared storage, whose cold-path T_{load} is 24.5 s. The replacement still needs state transfer and initialization, and all ranks wait until it is ready. If consistency instead requires a rollback, the recovery budget must include the corresponding survivor-state restoration and lost work.

The trade-off is software complexity. Survivor-preserving warm restarts require specialized application and runtime support for dynamic membership changes without leaking CUDA memory, corrupting shared state, or deadlocking during communicator reconstruction. PyTorch's elastic framework (TorchElastic) does not preserve worker processes across membership changes: it stops the surviving workers and starts a new worker group. DeepSpeed's documented recovery path is checkpoint-centered rather than a survivor-preserving warm restart. A deployment that implements a warm-restart fast path still needs cold restart as a safety net. The cold-restart range in table 0.60 brackets the 6.4 min budget computed above. The warm-restart range is a planning range for the fast path, which avoids the full-cluster reload and warmup; its actual duration depends on how quickly the replacement receives its state and the communicator is rebuilt.

Table 0.60: Cold vs. Warm Restart Trade-Offs: Cold restart kills every process and reloads from disk; warm restart preserves surviving workers and replaces only the failed node. Warm restart cuts recovery from minutes to tens of seconds for the typical single-node failure but introduces software complexity around dynamic membership management. Mature deployments can run warm restart as the fast path and cold restart as the safety net.

Aspect	Cold Restart	Warm Restart
Recovery time	4–10 minutes (full reload)	30–90 seconds (single node reload)
State guarantee	Clean: all state from checkpoint	Assumes surviving state is valid
Implementation	Simple: kill all, reload all	Complex: dynamic membership management
Failure during recovery	Retry cold restart	Fall back to cold restart
Best for	Correlated failures, SDC events	Single-node failures, GPU errors

Recovery automation pipeline

At the scale of 10,000+ GPUs, failures occur multiple times per day, so human operators cannot intervene manually on each incident. Recovery must be an autonomous control loop managed by the cluster control plane. Published reports from large training fleets describe multi-stage automation that classifies failures and selects the minimum viable remediation (Dubey et al. 2024; Kokolis et al. 2025; Zu et al. 2024).

The pipeline operates in four ordered stages:

1. Health monitoring daemon: Continuously scrapes GPU telemetry (ECC error counters, temperature, fan speed, NVLink status) alongside application metrics like training loss and step throughput, often from a sidecar container.
2. Failure classifier: Determines whether a signal indicates a fatal error (for example, NVIDIA Xid error 48: double-bit ECC error), a transient stall (for example, temporary network congestion), or a performance degradation (for example, thermal throttling).
3. Action selector: Chooses the cheapest response consistent with the affected state and communication group. A process hang on one rank usually requires restarting the whole communication group rather than one container, because every surviving rank still holds a communicator that includes the hung rank. A confirmed hardware fault requires draining the node and drawing a replacement from the spare pool, which is slower and consumes standby capacity. A network partition can justify a bounded wait that preserves in-memory state, but if the wait expires, replacement must fence the old ownership before accepting new writes.
4. Validation stage: Runs a recorded "canary batch" or validation workload under the expected numerical tolerance. Unexpected loss or gradient behavior triggers investigation of restored

state and execution configuration, with fallback to an earlier validated snapshot when the new state cannot be trusted.

This automation shortens mean time to recovery from the tens of minutes that a page-diagnose-repair cycle takes when a human is in the loop to minutes for the common failure types. The Llama 3 team reports that automated tooling handled nearly all of the 419 interruptions in its 54-day snapshot (Dubey et al. 2024). The classification stage is critical. Treating every failure as a cold restart wastes compute on transient issues, while treating a hardware failure as transient allows corrupted computation to continue.

Stragglers versus fail-stop failures

Definition 7.2: Straggler

Straggler is a worker in a distributed training job that processes tasks significantly slower than its peers, creating a synchronization bottleneck.

1. **Significance**: In a bulk synchronous parallel system, cluster throughput is bounded by the speed of the slowest rank. A single 10 percent performance drop on one node can reduce the effective compute capacity of thousands of nodes by 10 percent.
2. **Distinction**: The synchronization models of section 4 treat a straggler as a throughput problem; fault tolerance must also separate slow progress from a stopped participant. A straggler can produce correct results while delaying its peers. Slowness alone establishes neither incorrect values nor a failed process.
3. **Common pitfall**: A frequent misconception is that stragglers are caused only by "bad hardware." In reality, they are often caused by system jitter from background OS processes, network congestion, or thermal throttling that varies across the data center floor.

In synchronous training, a straggler sets the pace of the entire cluster, because AllReduce cannot complete until every rank has submitted its gradients.


For the simplified no-overlap straggler model, the step time becomes:

$$T_{\text{step,straggler}}(N) = \max(T_{\text{rank}_0}, T_{\text{rank}_1}, \ldots, T_{\text{rank}_{N-1}}) + T_{\text{comm}}(N)$$

Many stragglers are gray failures, the silent degradations of the chapter opening, seen from inside a synchronous job, and none of their common causes raises an explicit error. Thermal throttling reduces clock speed, degrading interconnect cables increase communication latency, OS background processes (memory scrubbing, log rotation) consume CPU cycles, and data loading from a congested network filesystem introduces variable I/O delays. A slow worker can continue meeting a liveness timeout while reducing training throughput, or become slow enough to trigger the same timeout as a failed worker. Progress measurements are therefore needed alongside liveness checks.

The challenge is distinguishing stragglers from failures. Stragglers should trigger *mitigation* (redistribute work, replace the slow node). Failures should trigger *recovery* (checkpoint-restart). Aggressive timeouts treat stragglers as failures, causing unnecessary job restarts that waste more compute than the straggler itself. Conservative timeouts waste compute waiting for stragglers that will never speed up.

Straggler mitigation strategies change either the work assignment or the execution resources. Dynamic load balancing moves work away from slow workers while preserving the intended update, whereas bounded staleness allows delayed gradients under an algorithm that tolerates them; its convergence cost depends on the workload and delay bound. Backup workers replicate selected tasks and accept one result per logical contribution, trading extra GPU cycles for a shorter wait without double-counting gradients. At the infrastructure boundary, proactive replacement uses hardware telemetry, such as rising operating temperatures or growing correctable-ECC error counts, to identify suspect components and replace them when the expected benefit exceeds migration and recovery costs.



One straggler stalls every healthy peer at the barrier.

A simple cost calculation shows why a severe straggler may be cheaper to replace than tolerate.

Napkin Math 7.5: The straggler tax

Consider a 1,024-GPU cluster where a normal training iteration takes 1 second. A single GPU enters a thermally throttled state, clocking down to 50 percent speed, and now takes 2 seconds to complete its computation.

Because AllReduce cannot complete until every rank has submitted its gradients, the other 1,023 healthy GPUs sit idle waiting for the straggler.

Impact:

- Normal step time: 1 second
- Straggler step time: 2 seconds
- Effective cluster speed: 1 step/2s = 0.5 steps/sec

A single failing device (0.1 percent of the hardware) has reduced the throughput of the entire cluster by 50 percent. At $3/GPU-hour, this straggler wastes $1,536/hour in idle compute.

Systems insight: Replacement is worthwhile only when the expected time saved exceeds recovery and replay costs. If the slowdown is expected to persist for the next K useful updates, whose step times are T_{slow} on the degraded allocation and T_{healthy} after replacement, the simplified break-even condition is $K(T_{\text{slow}} - T_{\text{healthy}}) > T_{\text{restart}} + T_{\text{replay}}$. The right side includes waiting for capacity and restoring state. A short-lived slowdown may clear before replacement pays off; false-positive detection and uncertain persistence also affect the decision. MTBF describes failure recurrence, not how long this slowdown will last.

Replacing a slow node while maintaining the original GPU count requires available capacity. An $N+1$ redundancy model reserves a hot spare for the isolation and promotion stages of figure 0.85, reducing allocation delay. Promotion still requires compatible resources, valid state, and communication-group reconstruction; an idle device alone does not guarantee recovery within seconds. A cold spare adds startup work, while a job without a reserved spare depends on the scheduler finding capacity or on repair. The hot spare buys shorter waiting time with devices that sit idle while the fleet is healthy. Fixed-size checkpoint-restart recovery restores the original resource count. Elastic recovery relaxes that requirement by allowing the job to continue with fewer workers when the remaining allocation can support it.

Checkpoint 7.5: Tuning detection and recovery

Verify your understanding of how detection latency and recovery strategy trade against one another:

- ☐ **Timeout tuning**: given the heartbeat timeout rule $T_{\text{timeout}} = H + k\sigma_d$, explain what failure mode is traded away when k is lowered from 5 to 3, and which failure mode worsens.
- ☐ **Warm vs. cold restart**: choose a warm restart or a cold restart for a single GPU failure in a 1,000-GPU job with surviving state intact, and identify two conditions that push recovery back toward the cold path.
- ☐ **Hot spare cost**: explain why a hot spare cuts recovery latency relative to detect-then-restart, including the standing cost the cluster pays to keep that spare available.
- ☐ **Straggler decision**: determine what governs whether to wait out a slowed node or kill it and recover onto healthy hardware.

Elastic Recovery

Suppose a 1,024-GPU training job loses an 8-GPU node to a hardware fault, but the cluster has no spare nodes available. A fixed-size recovery policy leaves the remaining 1,016 GPUs waiting until replacement capacity becomes available or the allocation is released. Elastic recovery allows the job to resize and continue with less compute, provided its state and parallel decomposition fit the smaller allocation.

Definition 7.3: Elastic training

Elastic training is the capability of a distributed training job to adjust its worker count across membership changes, potentially through a coordinated worker-group restart.

1. **Significance**: It converts a permanent capacity loss into a temporary interruption followed by reduced throughput. A pure data-parallel 1,024-GPU job that loses 8 GPUs retains 99.2 percent of its device count and may resume if the remaining devices can hold the state. Tensor- and pipeline-parallel jobs additionally need a feasible partition and compatible group sizes; retained device count does not guarantee the same fraction of throughput. The recovery policy must either preserve the effective batch size through additional accumulation or validate the optimization changes caused by a smaller batch.
2. **Distinction**: Unlike fixed-size checkpoint-restart recovery, which waits for replacement hardware to restore the original allocation, elastic recovery can restart or resume with a different worker count. The optimization loop may pause while membership, ranks, and state are re-established.
3. **Common pitfall**: A frequent misconception is that elasticity is "automatic." In reality, recovery requires coordinated adaptation: the training framework, the data loader, and the orchestrator must all synchronize their state to ensure that no data samples are lost or double-counted during the resize.

A small example shows the lifecycle in three phases (figure 0.90). Execution begins with a balanced four-node AllReduce ring at full throughput. When Node 3 drops out, the survivors pause at a rendezvous barrier and reload the last consistent checkpoint. The group then contracts into a three-node ring in which each worker takes a one-third larger data shard, resuming productive training at 75 percent throughput if the per-worker rate remains unchanged.

Recovery adaptation mechanisms

Shedding a lost node narrows the active ring instead of idling the whole allocation until replacement hardware arrives, so elastic recovery converts a job termination into a bounded capacity adjustment. The worker group may restart while the framework re-establishes membership, ranks, and state under the smaller resource allocation. When a failure reduces the worker count, the recovery path must adapt several training components before productive work resumes. Each adaptation addresses a specific consistency requirement that, if violated, would corrupt the model or waste computation.

Batch size adjustment is the first concern: with fewer workers, each worker must process more samples to maintain the global batch size, or the global batch size must be reduced. Reducing global batch size during recovery may require learning rate adjustment to preserve convergence properties.

Changing the global batch size changes the optimization regime as well as the amount of work per step. The linear scaling rule of section 5 multiplies the learning rate by the same factor as the batch size (Goyal et al. 2017), but its validation with warmup for growing batches does not establish a universal recovery rule. The same section's square-root rule offers another candidate policy, and equation 0.27 restates it for a resized job, with learning rate η and the batch ratio written as a worker-count ratio:

$$\eta_{\text{new}} = \eta_{\text{base}} \times \sqrt{\frac{N_{\text{new}}}{N_{\text{base}}}} \tag{0.27}$$

where N_{new} and N_{base} represent the resized and base counts of data-parallel workers, with per-worker microbatch size and accumulation count held fixed so global batch size scales directly with worker count. For a shrink, the square-root rule reduces the learning rate less than linear scaling does; that arithmetic does not establish which policy is more stable. Either policy requires validation for the optimizer, schedule, and workload. Preserving the global batch instead can avoid introducing this change in optimization regime.

Gradient accumulation offers that alternative: each surviving worker processes additional micro-batches before synchronization to maintain the original effective batch size. If worker count drops by half, doubling the accumulation steps preserves the number of examples per update and can retain the existing learning-rate schedule. Each worker then performs twice as much micro-batch computation per update, although communication and overlap determine the wall-time increase.

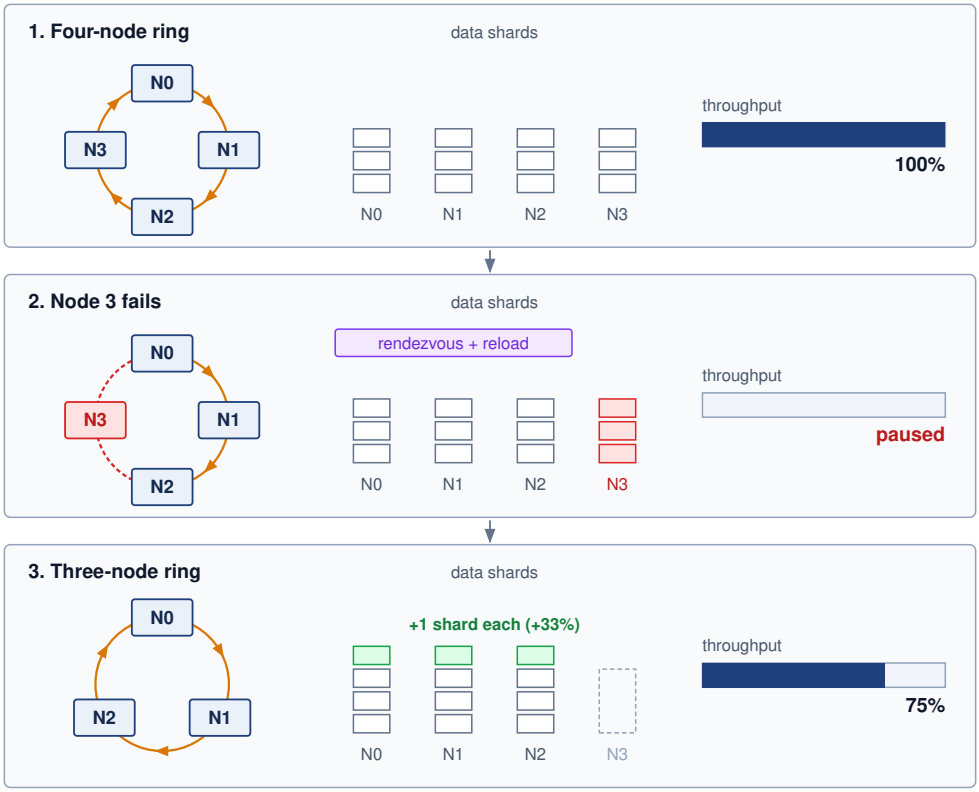


Figure 0.90: Elastic training recovery: Read the three phases top to bottom. Rather than restoring the original worker count before resuming, elastic training pauses when a node fails, reloads the last consistent checkpoint, re-forms the ring over the $N-1$ survivors, and redistributes the failed node's data shards among them. The job resumes at reduced throughput (75 percent here, assuming an unchanged per-worker rate), turning a hard failure into a temporary slowdown.

Equal batch size does not imply bitwise-identical updates or identical behavior from operations that depend on micro-batch statistics.

Data loader redistribution must agree with the recovered training step and new membership. When workers are lost, the loader reassigns the remaining logical input stream so that the resize itself neither omits samples nor counts them twice in an update. Replaying work discarded by checkpoint rollback is expected; duplicating contributions within the resumed stream is a different error. The saved data position and sampling state distinguish those cases.

State resharding adds further complexity when using sharded model parallelism (ZeRO/FSDP), because the loss of a worker can remove the only live copy of its state shard. A surviving replica can supply that shard; otherwise recovery must reconstruct it from sufficient retained information or reload a complete checkpoint generation. Only then can the system redistribute valid state across the surviving workers. Changing shard ownership alone cannot recover missing values.

Spot instance preemption as a failure class

Hardware faults are not the only event that removes workers from a running job. Cloud providers often price preemptible ("spot") instances below on-demand capacity, with the caveat that they can be reclaimed with little warning. Once workers vanish, recovery faces the same missing-state and membership problems as a hardware failure. An advance notice, when available, can allow a coordinated save or drain before departure and therefore changes the recovery opportunity.

Both fixed-size and elastic jobs can recover from preemption using checkpoints, but a fixed-size job must regain its required allocation before restarting. An elastic job can instead resume at reduced

scale if enough capacity remains and the training invariants survive the resize. Recovery still pays for detection, state restoration, and group reconstruction; repeated reclamations can erase the apparent price advantage. In a scenario where spot capacity costs $0.60/hour instead of $3.00/hour, the savings can outweigh the lost work and resizing delays; section 13 develops the full spot-versus-on-demand cost model.

Spot capacity makes worker departure frequent; federated training makes it the default.



Lighthouse 7.2: Archetype C (Federated MobileNet): Dropout as the normal case

Archetype C (Federated MobileNet) makes worker departure an expected part of training. Its phone-class clients train while charging, idle, and connected, so a client that disappears mid-round is an ordinary event rather than a fault to repair. The coordinator therefore selects more clients than a round needs and closes the round at a deadline. The round tolerates departures as long as enough compatible updates arrive; otherwise the coordinator abandons it (McMahan et al. 2017; Bonawitz et al. 2019). Model-version checks prevent updates computed against a replaced model from entering the current aggregate, the federated counterpart of fencing a stale epoch, while aggregation weights account for the examples contributed under the chosen learning algorithm. Version checks and weighting do not remove participation bias. Recovery must preserve the coordinator state needed to continue that algorithm, including the model, round position, and any persistent optimizer or sampling state, rather than assuming weights alone suffice. Section 14 develops the round design, including deadlines, participation requirements, and the bias that arises when some kinds of devices report less often than others.

Framework support for elastic recovery

The framework question is which resize invariants it can enforce automatically: group membership, shard ownership, data coverage, and batch math. The recovery adaptation mechanisms (batch size adjustment, learning rate recalibration, data loader redistribution, state resharding) must be implemented by the training framework, and frameworks differ in how much of this recovery logic they automate after a failure.

PyTorch Elastic (TorchElastic) uses agents to monitor workers and a rendezvous mechanism to establish group membership (PyTorch Contributors 2026c, 2026b). On a failure or membership change, TorchElastic stops all surviving workers, forms a new worker group, and starts its workers with new `RANK` and `WORLD_SIZE` assignments. It handles rank reassignment and communication-group reconstruction after restart, but leaves batch size, learning rate, and checkpoint semantics to user code.

DeepSpeed (Rasley et al. 2020) provides ZeRO-based distributed training and checkpointing building blocks for large models (DeepSpeed Developers 2026a). Its recovery model is checkpoint-based: after a failure, the job reloads from the last durable checkpoint, and Universal Checkpointing addresses portability across some changes in parallelism and topology (DeepSpeed Developers 2026b). The elastic behavior still depends on the surrounding launcher and resource manager rather than being made transparent by the framework alone.

Ray Train, built on Ray's actor model, provides a checkpoint-oriented recovery path for worker failure and node preemption. Ray can restart a worker group after a failure and resume from the latest available checkpoint, while the training function remains responsible for saving and loading sufficient state (Ray Project 2026).

Horovod Elastic builds on Horovod's data parallel training system (Sergeev and Balso 2018) with a documented elastic state API for worker additions and removals (Horovod Developers 2026). When the worker group changes, Horovod can reset ranks and reconstruct communication, while the training script remains responsible for convergence-sensitive choices such as learning-rate or batch-size policy.

The elastic training framework support summarized in table 0.61 compares the recovery automation and state management approaches across these frameworks.

Table 0.61: Elastic Recovery Framework Comparison: Frameworks differ in how they detect worker failures and how much of the recovery sequence (group reconstruction, state redistribution, batch size adjustment) they automate.

Framework	Failure Detection	Automatic Recovery	State Resharding	Cluster Integration
PyTorch Elastic	Rendezvous timeout	Yes	Manual	Kubernetes
DeepSpeed	External	Checkpoint-based	Deployment-dependent	External schedulers
Ray Train	Actor supervision	Checkpoint retry path	Checkpoint reload	Ray Cluster
Horovod Elastic	Driver heartbeat	Yes	Manual	Slurm, Kubernetes

While these frameworks automate the mechanics of recovery, deciding exactly which model state must be preserved and resharded remains a workload-specific engineering choice.

Model-specific training fault tolerance

The checkpoint and recovery strategies developed in section 13 and section 18 require adaptation because workloads lose different kinds of state when they fail. Section 8 priced those differences as failure costs; here they become checkpoint contents. The design question is therefore not simply how often to checkpoint, but which state variable would make a restart mathematically or economically wrong. For recommendation workloads, incremental checkpointing, tiered checkpointing, and embedding versioning can reduce the cost of preserving fresh state. Incremental storage can still reconstruct an exact generation from a base and its required deltas; accepting stale or approximate state is a separate choice. Table 0.62 turns the workload differences into a compact recovery map.

Table 0.62: Training Recovery State Invariants: Workloads require different checkpoint contents because they make different state variables quality-bearing. The correct recovery policy starts from the state that would make a restart wrong, then chooses sharding, incrementality, or domain-state capture accordingly.

Workload	State at Risk	Checkpoint Implication
LLM training	Optimizer state, curriculum position, document position, long-context schedule	Preserve the FP32 optimizer state where precision matters, shard writes with ZeRO/FSDP, move serialization off the critical path, and include the data-schedule position so the optimization trajectory resumes correctly.
Recommendation	Embedding freshness, feature-store version	Preserve fresh state with incremental checkpointing, tiered checkpointing, and embedding versioning; accepting stale or approximate state requires a separate recovery contract.
Vision	Augmentation seeds, shuffling order, batch-normalization statistics, progressive-resizing schedule	Capture the stochastic and normalization state that controls the input stream; weights alone are not enough to reproduce the training trajectory.
Scientific ML	Simulator state, search frontier, explored configurations, validation seeds	Treat the model, simulator, search process, and random state as one consistency unit so recovery does not duplicate exploration or invalidate comparisons.

The common pattern is that recovery correctness is broader than weight restoration. LLMs can reload weights but resume with the wrong curriculum position; recommendation models can reload dense parameters but serve stale embeddings; vision models can reload weights but alter augmentation or normalization state; and scientific models can reload a neural network while losing the simulator state that made the data meaningful.

Elasticity and checkpointing provide the necessary resilience for long-running batch training jobs, but the operational calculus changes completely once the model is deployed to users. The challenge shifts from protecting *weeks of batch computation* to protecting *milliseconds of real-time latency*.

Serving Fault Tolerance

When users ask a voice assistant to turn off the lights, they will not tolerate a five-minute pause while the inference server reloads from a checkpoint. Serving models presents a fundamentally

different challenge, because users expect millisecond-level responsiveness even when backend GPUs crash. The C^3 budget for fault tolerance shifts accordingly. Training pays for coordination in synchronization time so that a failure does not erase completed compute, while serving pays in standing redundant compute and in routing coordination so that a failure does not break a latency contract.

A serving replica is a runnable copy of the model that can accept requests; the routing layer chooses a replica, and a readiness check determines whether that replica can serve successfully. Replicas may share external state stores or keep request state in accelerator memory, so replacing compute does not necessarily replace the state a request needs. Serving fault tolerance asks how those mechanisms behave when replicas, GPUs, or state stores fail under live latency budgets. The focus here is narrower than a complete serving architecture: each mechanism is treated as a reliability boundary for real-time inference.

Stateless vs. stateful serving

The first serving decision is where request state lives, because that choice determines whether failover is a retry or a state-reconstruction problem. A stateless model worker retains no required per-session state between requests. It obtains the necessary context from the request or an external state store, so another ready worker can process the same request. A stateful application can therefore use stateless model workers, although its external store remains a reliability dependency.

The stateless pattern appears when the input itself carries all context: an image classifier processes one image, an object detector processes one frame, a single-turn text classifier processes one snippet, and an embedding service maps one input to one vector. Fault tolerance can then focus on replica health and request routing. Redundant replicas serve requests in parallel, load balancing sends traffic only to healthy replicas, health checks remove failed replicas from rotation, and automatic replacement starts a new replica when capacity falls. When a replica fails, in-flight requests to that replica can be retried elsewhere, because no quality-bearing session state has been lost.

Stateless serving offers the simpler architecture when the application permits it. However, many ML applications inherently require state across requests. Consider a chatbot: a single-turn question-answering system can operate statelessly, processing each question independently. A conversational assistant must preserve its history somewhere, but the model worker can still be stateless if each request carries the complete history or reads it from a durable external store. Worker-local state creates a stronger dependency when later requests rely on information available only at the selected replica.

Stateful serving appears when later work depends on retained session state. For a transformer, the key-value (KV) cache stores attention keys and values computed for earlier tokens so the worker can reuse them while generating subsequent tokens. This cache is derived state: if the authoritative token history and compatible model version remain available, a replacement can recompute it by processing that history again. Losing the history itself is a different failure because cache reconstruction no longer has its required input. Streaming speech recognition similarly maintains context from previous audio, recommendation sessions accumulate user context, and interactive editing maintains document state across edits. The fault-tolerance consequence is that failure loses quality-bearing state rather than serving capacity alone. KV cache loss requires reprocessing previous turns, session context loss forces users to repeat previous interactions, and accumulated user state loss degrades quality when context is unavailable. The mitigation choice follows the size, update rate, and quality value of that state: session affinity routes a session to the same replica, state checkpointing periodically saves session state, state replication maintains a standby copy, and graceful degradation keeps the service available at reduced quality if state cannot be recovered.

Table 0.63 contrasts stateless and stateful serving fault tolerance, showing how the fundamental difference manifests in every aspect of design, from request routing to recovery complexity.

↪ How the KV cache grows with sequence length and concurrency until it fills accelerator memory is developed in section 6.

Table 0.63: Stateless vs. Stateful Serving Fault Tolerance: State recovery adds work after failure detection. End-to-end failover also includes probe timeouts, routing, replacement readiness, and request retry; neither worker category implies a fixed latency.

Aspect	Stateless Serving	Stateful Serving
Request routing	Any replica	Session-affine replica
Failure impact	Retry on another replica	Potential state loss
Recovery complexity	Restart and load weights	Reload state + reconstruct context
Redundancy approach	Active-active replicas	Replicated state + standby
Work after detection	Route or retry to a ready worker	Recover required state, then route or retry

Regardless of whether the serving architecture is stateless or stateful, maintaining availability under these constraints requires deploying redundant capacity.

Redundancy and replication

Redundancy buys availability only when replica placement and spare capacity match the failure domain being defended against. Multiple copies of serving capability let the system continue operating when individual replicas fail.

Availability calculations

Serving redundancy is the parallel composition of section 4 applied to interchangeable replicas, with availability in place of survival probability. For a single replica with availability A_{single} (probability of being operational at any given time), equation 0.28 quantifies how multiple independent replicas achieve higher system availability:

$$A_{\text{system}} = 1 - (1 - A_{\text{single}})^k \tag{0.28}$$

where k is the number of replicas. For a service whose single replica is available 99 percent of the time, redundancy compounds as follows.

For a single replica, $A_{\text{single}} = 99\%$ corresponds to 3.65 days of downtime per year. Adding independent replicas changes the tail of the failure distribution quickly: two replicas give $A_{\text{system}} = 1 - (0.01)^2 = 99.99\%$, or 52.6 minutes of downtime per year, and three replicas give $A_{\text{system}} = 1 - (0.01)^3 = 99.9999\%$, or 31.5 seconds. The math is powerful, but it assumes independent failures and enough capacity on any surviving replica to meet the service target; shared power, shared networking, and shared software bugs reduce actual availability below these theoretical values.



Redundancy turns days of downtime into seconds.

Replication strategies

The availability equation says how much redundancy can help; the replication topology determines how that redundancy behaves under normal execution and sudden hardware loss. Two fundamental designs make opposite bets (figure 0.91). Active-active replication splits ingress traffic evenly across live replicas, one-third each for three, which keeps every device busy but requires spare headroom so the survivors can absorb a failed replica's share. Active-passive replication sends all traffic to a designated primary and keeps a pre-warmed standby whose weights remain loaded in accelerator memory, which makes failover fast at the expense of a device that serves nothing while the primary is healthy.

Geographic replication extends the same choice across regions. It protects against data-center or regional network failures, but requests routed to distant regions pay additional latency, and the active-active headroom problem reappears at regional scale. When a region fails, the surviving regions must absorb its traffic and, for stateful services, rebuild its sessions, so each region either carries spare capacity sized for the largest region it may absorb or accepts degraded latency during the failover. Traffic returns to a recovered region gradually, because its caches and warm replicas start empty and an abrupt shift back would overload it and trigger the same failover again. Multi-tier designs combine several replication policies at once: edge caches replicate for latency, regional serving clusters replicate for availability, and a global primary or coordination layer preserves consistency and freshness.

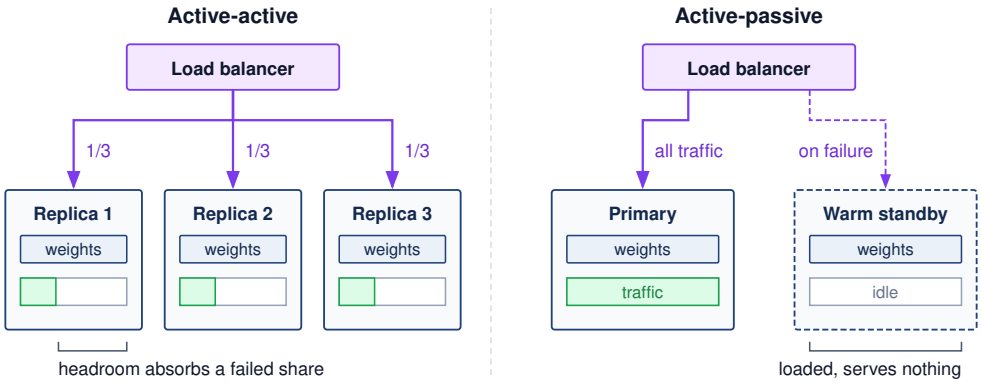


Figure 0.91: Serving redundancy strategies: Active-active (left) splits traffic across three replicas, each carrying about one-third, which uses every device but requires enough headroom for the survivors to absorb a failed replica's share. Active-passive (right) sends all traffic to one primary and keeps a warm standby with weights already loaded, which simplifies failover at the cost of capacity that serves nothing while the primary is healthy.

Replica placement and failure domains

Effective redundancy requires placing replicas in independent failure domains. Different machines tolerate individual machine failures; different racks tolerate rack-level failures from power or top-of-rack switch issues; different availability zones tolerate data-center-section failures; and different regions tolerate entire data-center failures. The independence level should match the availability requirement and cost constraint: regional replication is expensive because it duplicates compute and network capacity, but it is necessary when regional failure must not become user-visible downtime.

Placement only creates the possibility of recovery. The serving system still needs a control loop that notices the failure, removes the affected replica from traffic, and preserves enough state that the user-visible service continues with bounded degradation.

Failover mechanisms

When a replica fails, traffic must be redirected to healthy replicas, and the speed and reliability of that redirection determine how much of the failure users see. The mechanism decomposes into two questions: how the system decides that a replica can no longer serve, and what happens to stateful sessions already attached to it.

Health checking

Health checks decide when traffic should move, so they must evaluate liveness, readiness, and inference correctness. A liveness check confirms that the process responds and triggers a restart when it does not. A readiness check confirms that the replica can serve: its weights are loaded, its accelerator is initialized, warmup has completed, and dependencies such as feature stores are reachable. An inference check runs a known input through the model and compares the output with the expected result, catching the silent failure in which the process is healthy but its answers are wrong. The load balancer acts on these signals.

The probe parameters set the failover budget. With a 5 s check interval, a 2 s timeout, and a failure threshold of 3 missed probes, a crashed replica leaves rotation 12–17 s after it fails, depending on where the crash falls between probes. Every request routed to it in that window fails or waits for a client retry. Shortening the interval or lowering the threshold speeds failover but raises the false-positive rate, marking healthy replicas unhealthy during transient stalls and removing capacity exactly when load is high. A success threshold of 2 clean probes applies the same caution in reverse, holding a recovered replica out of rotation until it has proved stable.

↪ What each probe must test on an accelerator replica, from process liveness to a fixed-prompt inference check, is developed in section 11.

Session affinity and stateful failover

For stateful serving, session affinity routes all requests within a session to the same replica. Load balancers maintain session-to-replica mapping through sticky sessions implemented with cookies, headers, or IP hashing. Affinity preserves locality but supplies no replacement copy when that replica fails. Checkpointing saves session state periodically, replication copies it to a standby, and external systems such as Redis or Memcached move it outside the model worker. The external store still needs its own availability and durability contract. Accepting state loss is valid only when the service can reconstruct derived state from retained history or explicitly begin a reduced-context session.

The choice depends on state size, update frequency, and the quality impact of state loss; table 0.64 summarizes the trade-offs across the four common approaches:

Table 0.64: Stateful Failover Approaches: Recovery latency, state guarantees, and operational complexity distinguish four approaches to session-state failover. Checkpoint recovery may lose updates after the saved snapshot. Distributed storage can provide different consistency contracts, and synchronous replication provides its promised guarantee only under the specified acknowledgment and fault model.

Approach	Recovery Latency	State guarantee	Operational Complexity
State loss	Fast	None	Low
Checkpointing	Medium	Consistent snapshot; later updates may be lost	Medium
Synchronous replication	Fast	Strong	High
Distributed state	Fast	Configurable	Medium

Model-specific serving fault tolerance

Model-specific serving differences follow from what state is expensive to lose and how quickly the user needs a response. The policy question is therefore a state-loss budget: which state can be rebuilt, which state must be replicated, and which state may be degraded temporarily without violating the product contract. Table 0.65 maps that question across the three common regimes.

Table 0.65: Serving Recovery State Invariants: Serving fault tolerance starts from the state whose loss changes user-visible quality. LLMs protect live context, recommendation systems protect feature freshness, and vision services protect preprocessing and device correctness.

Serving workload	State expensive to lose	Fault-tolerance policy	Degradation path
LLM conversation	KV cache, conversation context, prefix state	Replicate or checkpoint high-value session state; regenerate only when the latency budget allows.	Rebuild from transcript, reuse cached prefixes, or ask for retry.
Recommendation	Fresh user features, item features, embeddings	Replicate feature stores, cache hot features, and monitor freshness as a reliability signal.	Serve stale or default features with measured quality loss.
Vision service	Preprocessing state, device health, edge input	Retry stateless requests on healthy replicas and fail closed on preprocessing or accelerator-health faults.	Use a smaller local model, defer prediction, or return low confidence.

The KV cache[20] can be substantial (gigabytes for long contexts across attention layers). Losing it requires recomputing attention state from the retained token history, which can take seconds to minutes; previously delivered text need not be generated again. During an in-flight response, recovery must also know which output tokens the client has already received so a retry does not silently duplicate or replace part of the response.


LLM serving choices trade KV-cache recovery latency against memory and storage overhead. The simplest strategy is to accept regeneration cost by rebuilding KV cache from conversation history after failure, but this can turn a long conversation into a multi-second or multi-minute restart. KV-cache checkpointing saves live state periodically and bounds the amount of regeneration, while KV-cache replication keeps a standby copy for fast failover at the cost of extra memory. Prefix caching, also offered as prompt caching, reuses state for common system prompts and shared context. A compatible cached prefix can reduce reconstruction work if it survives the failure and remains accessible to the replacement worker. Cache reuse alone does not establish a failover guarantee or preserve the session-specific history.

Recommendation serving protects freshness rather than conversational continuity. Recommendations depend on user and item features from feature stores, so feature-store unavailability can either degrade ranking quality or block recommendations entirely. The serving decision is the staleness budget: replicated feature stores keep recent features available across zones, local caches cover hot features, fallback to stale features accepts measured quality loss, and default features let the service return a lower-quality result when lookup fails. Real-time features such as recent user actions make freshness monitoring part of fault tolerance, because a pipeline that keeps serving old features is available operationally but wrong semantically. Large embedding tables may also sit behind dedicated embedding services, which need their own replication and failover plan.

Vision serving is usually closer to the stateless end of the spectrum because each image or frame can be retried on another replica. That simplicity changes where the checks belong. Thermal throttling threatens latency, while uncorrected memory errors threaten numerical validity; health policy must distinguish those consequences. Preprocessing checks must also prevent invalid resize, crop, color conversion, or normalization from producing apparently valid predictions. At the edge, disconnection can require a validated smaller local model, delayed nonurgent work, or abstention when the available computation cannot meet the prediction contract.

When redundancy cannot preserve full service, the remaining choice depends on the application contract. A validated reduced-capability response can preserve useful availability; if no such response is acceptable, the system must reject or defer the work. Graceful degradation makes the permitted reduction explicit before failure occurs.

[20] **KV Cache**: Stores key and value projections for all previous tokens across all attention layers, scaling as $2 \times N_L \times H_{\text{KV}} \times S \times d_{\text{head}} \times s_{\text{elem}}$. For a Llama-family 70B model with 80 layers, 8 key-value heads, 128K context, 128-dimension heads, and BF16 storage, the KV cache is about 43 GB per conversation; using 64 independent key-value heads would be about 344 GB. Losing this derived state requires replaying retained tokens to rebuild their attention state, rather than generating the conversation again. Reconstruction can exceed serving latency service level agreements (SLAs) even when a replacement replica is already available.



A retried image loses nothing; a lost conversation loses 43 GB of KV cache.

Graceful Degradation

During a major regional network outage, an e-commerce site suddenly loses access to its heavy, GPU-accelerated recommendation cluster. Rather than showing users empty pages or crashing, the site instantly switches to serving precomputed, generic popular items. The serving fault tolerance mechanisms developed in section 20 aim to maintain full service, but graceful degradation dictates what happens when those defenses are overwhelmed.

Definition 7.4: Graceful degradation

Graceful degradation is a fault tolerance strategy in which a system responds to resource exhaustion or component failure by deliberately reducing service quality (falling back to a smaller model, serving cached results, or returning partial outputs) rather than failing completely, maintaining measurable availability at reduced capability.

1. **Significance**: Graceful degradation converts total outage risk into a controlled quality reduction. A recommendation system can fall back from a large ranker to a collaborative-filtering model on GPU failure, maintaining request availability with a quality penalty that must be measured for that workload. The engineering calculation includes both the requests served and the utility lost during fallback.
2. **Distinction**: Unlike complete system failure (where the service returns errors to all requests), graceful degradation provides a managed transition through a predefined capability hierarchy in which each fallback level has known accuracy, latency, and resource characteristics that allow the system to continue satisfying SLOs at reduced quality.
3. **Common pitfall**: A frequent misconception is that degradation is automatic in well-designed systems. Graceful degradation requires explicit preengineering: fallback models must be preloaded or precomputed, switchover logic must detect the failure condition and trigger the transition without human intervention, and each degradation level must have been validated to actually satisfy its reduced SLO before it is needed in production.

Degradation dimensions

A degradation plan must name which service property will be sacrificed before an incident begins. Table 0.66 summarizes the main levers. The table is a pre-incident design checklist, not an outage-time brainstorming aid. Each sacrificed property needs a measured quality budget, an activation condition, and a recovery path before the failure occurs.

Table 0.66: Graceful Degradation Dimensions: Degradation plans choose which service property can be reduced while still returning a useful answer. Naming the dimension in advance prevents the system from treating every failure as a binary serve-or-crash decision.

Dimension	What the System Sacrifices	Typical Fallback
Quality	Model accuracy or ranking quality	Use a simpler model, such as a collaborative-filtering fallback for a multi-tower recommender.
Latency	Response speed	Batch more requests together to preserve throughput and model quality under high load.
Coverage	Result completeness	Return top-10 search results instead of top-100.
Freshness	Recency of computed results	Serve cached or stale candidates, such as hour-old news recommendations during an outage.
Feature completeness	Input richness	Use content features when user history or real-time context is unavailable.

These dimensions are not interchangeable. A search product may sacrifice coverage by returning fewer results while keeping freshness intact; a recommender may sacrifice freshness by serving cached candidates while preserving latency; and an interactive assistant may sacrifice quality by

using a smaller model while keeping the session alive. The correct fallback is therefore workload-specific. It follows the property whose temporary loss least harms the application and whose recovery path can be validated before the incident.

Graceful degradation strategies

The dimensions in table 0.66 become operational only when the service binds each sacrificed property to a specific fallback mechanism. The strategy ladder starts with model fallback when the primary inference path is too expensive or unavailable, then moves to feature fallback when input quality degrades, and finally to load shedding when demand exceeds capacity and the system must preserve the highest-value requests first.

Model fallback

Model fallback turns quality into an explicit availability lever by maintaining multiple model versions with different resource requirements. The primary model provides full capability at the highest resource cost, a secondary model reduces capability and resource demand, a tertiary model preserves minimal capability, and a static fallback serves precomputed defaults with no inference at all. When the primary path is unavailable or overloaded, the policy descends only as far as resource pressure requires, then returns upward after the primary path is healthy again.

An image classification cascade makes the trade-off concrete. The primary path might run a ViT-Large model with 307 million parameters and 88 percent ImageNet top-1 accuracy, fall back to EfficientNet-B4 with 19 million parameters and 83 percent accuracy under pressure, then fall back again to MobileNet-V3-Large with 5.4 million parameters and 75 percent accuracy when only minimal classification remains affordable. If even that path cannot meet the SLO, the service can return cached labels, a coarse category, or "classification unavailable" rather than blocking the request indefinitely. For that ladder to be real rather than aspirational, the production system must keep multiple models deployed, route requests to the appropriate level, monitor fallback frequency, and measure the quality impact of each level.

Recommendation and ranking systems use the same pattern when a complex deep learning model falls back to a top-n popularity list, a linear ranker, or a cached response during primary serving failures. Complex models often fight for the last mile of accuracy while simple heuristics provide the bulk of the utility, so the fallback path must be monitored as a first-class quality signal rather than treated as a silent failover. Otherwise the product appears healthy while quality is silently traded for availability.

Feature fallback

Feature fallback controls how much input quality the model may lose before the request must be blocked. When feature retrieval fails, validated population-level defaults or cached values can substitute for missing user or item features. A recommender might use genre-level item defaults for missing item attributes or the most recent cached value of a real-time signal. The model must have been trained or evaluated with those missing-feature semantics; an average embedding or a vector from another encoder is not automatically a compatible input. Approximate features are useful only when their representation and measured prediction quality satisfy the fallback contract.

The key design step is prioritizing features by their measured contribution to prediction quality. Table 0.67 illustrates a four-level policy in which critical features block the request, important features use defaults, useful features use cached values, and optional features can be omitted. Its quality-loss ranges are example policy budgets, not transferable properties of those feature categories; deployment requires measurements showing that each permitted fallback meets its budget.

Table 0.67: Graceful Feature Degradation Tiers: Features classified by importance to prediction quality, with the corresponding response when each tier is unavailable. Critical features block the request entirely; lower tiers allow the system to fall back to defaults, cached values, or omission with bounded quality impact. The tiers convert a binary "feature available or not" question into a four-step degradation ladder.

Tier	Example Features	Missing Action	Quality Impact
Critical	User ID, Item ID	Block request	Cannot serve
Important	User history, Item attributes	Use defaults	5–10% quality loss
Useful	Real-time context	Use cached	2–5% quality loss
Optional	Secondary signals	Omit	$< 2\%$ quality loss

When feature degradation alone is insufficient to maintain system stability under extreme load, the serving infrastructure must begin actively dropping requests.

Load shedding

Load shedding protects the system by sacrificing selected requests before overload spreads to every request. Random shedding is the simplest policy: drop a fraction of incoming requests and preserve enough capacity for the rest. Its weakness is that it treats all requests as equally valuable. Priority-based shedding turns quality-of-service degradation into an explicit policy by serving premium users before free users, revenue-generating requests before analytics requests, and interactive traffic before background batch work. The system is still degrading, but it is degrading according to a predeclared service contract rather than whichever queue happens to fill first.

Admission control applies the same idea at system entry points. It rejects requests that would exceed capacity rather than accepting work that will degrade every request already in the system. Circuit breakers extend the same protection to individual dependencies by failing fast when a model replica, feature store, or supporting service is unhealthy, so that one failing dependency cannot exhaust connection pools across the fleet; section 11 develops their states and the backpressure signals that accompany them.

Graceful degradation implementation

Implementation begins by turning the degradation ladder into a control loop. Tail-latency percentiles reveal delayed responses, dependency-specific error rates locate failed calls, resource utilization exposes pressure, and growing queues indicate a mismatch between arrivals and completions. These signals support entry and exit conditions for each degradation level. A trigger can justify load shedding before diagnosis is complete, but the signal alone does not establish the underlying cause.

Degradation triggers define conditions that activate degradation. Listing 0.1 illustrates three common trigger conditions that progressively activate fallback mechanisms based on latency, error rate, and feature store health.

Listing 0.1: Progressive Degradation Triggers: Conditions that activate graceful degradation based on tail latency, error rate, and feature store health. Each trigger activates a different fallback mechanism appropriate to the detected problem.

```
# Monitor tail latency for user-facing impact
if p99_latency > threshold:
    activate_model_fallback()  # Switch to faster, simpler model

# Track error rates to detect downstream failures
if error_rate > threshold:
    activate_circuit_breaker()  # Fail fast, prevent cascade

# Feature store slowdowns degrade recommendation quality
if feature_store_latency > threshold:
    activate_feature_fallback()  # Use cached/default features
```

Degradation should increase progressively as conditions worsen rather than switch at one cliff. The system can raise the fallback percentage gradually as load increases, then require sustained im-

provement before traffic returns to higher-capability paths. Hysteresis prevents oscillation between primary and fallback modes when the service hovers near a threshold.

Degradation monitoring and alerting

Because graceful degradation trades quality for availability, monitoring must make that trade visible rather than letting the system appear healthy while serving lower-fidelity results. The monitoring surface must expose how much service quality has been traded away. Table 0.68 turns that surface into an action map: fallback share reveals how often model quality was reduced, default-feature share reveals input-quality loss, drop rate reveals capacity protection, and the primary-vs-fallback quality gap reveals whether the degraded path remains acceptable. Its escalation thresholds illustrate one policy; the service's permitted degradation duration and quality loss must determine the deployed thresholds.

Table 0.68: Degradation Monitoring Action Map: Graceful degradation is safe only when the quality trade is observable. Each signal ties a degraded serving mode to the escalation and postincident question that prevent silent quality loss.

Signal	Quality trade exposed	Escalation rule	Postincident question
Fallback-model request share	Model capability reduced to preserve serving	Sustained activation beyond 5 minutes becomes a warning.	Did the fallback preserve enough user value?
Default-feature request share	Input richness reduced because dependencies lag	Severe degradation affecting over 50% of requests becomes critical.	Which feature dependency needs replication or caching?
Load-shed request rate	Coverage reduced to protect the service	Any growth after the circuit breaker opens triggers capacity investigation.	Was admission control early enough to prevent cascade?
Primary-vs-fallback quality gap	Product quality lost during the incident	Degradation beyond 1 hour escalates even when availability metrics look healthy.	Is the fallback path still a valid product experience?

After the event, postincident analysis should identify the root cause, evaluate fallback effectiveness, measure user and business impact, and define improvements that prevent recurrence. Implementing these fallback mechanisms safely requires deep visibility into the system's runtime state. When a complex recommendation pipeline begins degrading, operators must rapidly determine which microservice is failing, and that diagnosis depends on distributed debugging and observability.

Distributed Debugging and Observability

At 2:00 AM, latency on the flagship generative API spikes from 200 ms to 5 seconds, but CPU, memory, and network metrics all look perfectly normal. The latency breach can justify immediate mitigation under a predefined policy; choosing a targeted repair requires locating the stalled work across hundreds of microservices. Distributed debugging and observability provide the diagnostic capability required to locate these invisible bottlenecks.

Diagnostic challenges in distributed ML systems

Distributed ML debugging is hard because the evidence needed for recovery is split across timing, state, scale, and model behavior. Distributed systems exhibit nondeterministic behavior from multiple sources. Network timing variations change execution order, thread scheduling differences alter race conditions, GPU kernel execution order varies across runs, and floating-point operation ordering changes results. A bug that manifests on one execution may not reproduce on subsequent executions. These "Heisenbugs"[21] appear to disappear when observed.

Partial failures turn that nondeterminism into a recovery problem. A single machine can also suffer partial failures, but distribution adds independently progressing workers and communication paths: one component can stop while others continue, leaving peers uncertain whether it has failed or become unreachable. Scale then removes manual inspection as a viable debugging method: with thousands of components, automated tools must filter massive telemetry streams and identify the few signals that explain the incident. ML systems add model behavior to the same diagnostic problem because silent accuracy degradation produces wrong results without errors, numerical issues like NaN and infinity propagate through computation, data-dependent bugs manifest only for specific inputs, and learning causes expected behavior changes that can resemble bugs.

[21] **Heisenbug**: A pun on Heisenberg's uncertainty principle, popularized in Gray (1986)'s analysis of why production systems fail. Instrumentation perturbs timing, so observing the bug changes it. In distributed ML training, inserting gradient logging alters collective timing and can mask the very race that caused the silent corruption.

Observability pillars

Observability supports both immediate mitigation and investigation of the cause. Suppose a recommendation service suddenly violates its latency SLO while the model replicas still report healthy GPU utilization. Metrics establish the timing and scope of the symptom, traces show which service span consumes the request budget, and logs record events inside that service. Figure 0.92 connects these streams to operational decisions. A single signal can justify an action, such as shedding load when a queue exceeds its budget. Joining request and trace context with model versions, deployment tags, and time windows strengthens the diagnosis when several causes could explain the same symptom. Correlated evidence narrows those possibilities; it does not by itself prove the physical or software cause.

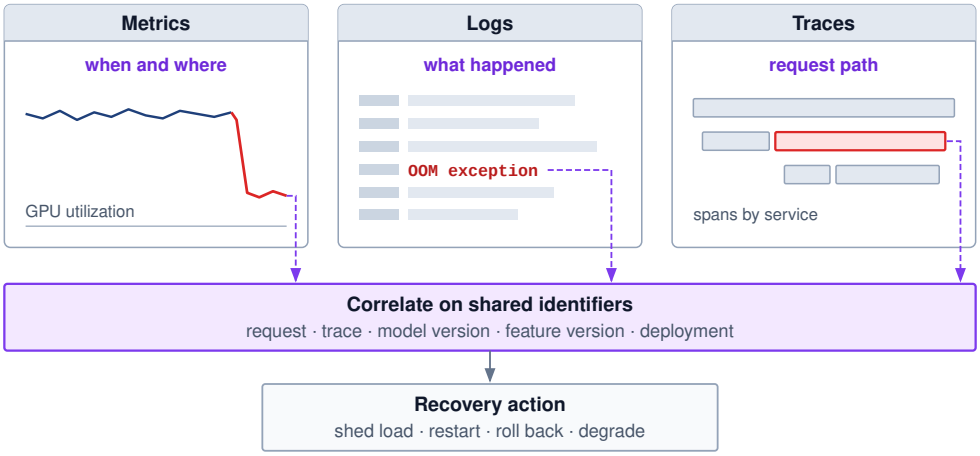


Figure 0.92: The three pillars of observability: Diagnosis of fleet failures can combine three signal types. Metrics reveal *when* and *where* a problem occurs (for example, GPU utilization drops). Logs provide the *what* through event context (for example, an out-of-memory exception). Traces expose the *request path* by linking events across the distributed lifecycle (for example, identifying the request that triggered the memory spike). A single signal can justify immediate mitigation; joining signals on shared identifiers strengthens diagnosis without proving the cause.

Metrics are the first evidence because they compress fleet behavior into time series that can trigger action. In ML fleets, useful metrics span infrastructure signals such as CPU and GPU utilization, memory allocation, network bandwidth, and storage I/O; application signals such as request rate, latency percentiles, error counts, queue depths, and cache hit rates; and ML-specific signals such as inference latency by model, batch utilization, feature retrieval latency, feature freshness, and prediction distributions for drift detection. A metric stream becomes fault-tolerance infrastructure only when an alert maps to a recovery decision. High p99 latency may trigger load shedding, a falling cache hit rate may trigger fallback features, and a sudden prediction-distribution shift may block a rollout before it corrupts user-facing decisions.

Logs provide the event context that a metric intentionally discards. Structured logging uses formats such as JavaScript Object Notation (JSON) with consistent fields, so incident tooling can search by service, request, model version, GPU, feature store, or trace identifier. Listing 0.2 shows a GPU memory allocation failure that records both the local failure context and the trace identifiers needed to connect the event to distributed metrics and spans.

Listing 0.2: Structured JSON Log Entry: A structured log entry for a GPU memory allocation failure, including trace and span identifiers for correlation with distributed traces and resource metrics for diagnosis.

```
{
  "timestamp": "2024-01-15T10:23:45.123Z",
  "level": "ERROR",
  "service": "inference-server",
  "trace_id": "abc123",
  "span_id": "def456",
  "message": "GPU memory allocation failed",
  "gpu_id": 3,
  "requested_bytes": 4294967296,
  "available_bytes": 2147483648
}
```

For fault tolerance, the important logging property is consistent correlation rather than the particular backend. Log levels should map incidents to escalation consistently across components, but the recovery system depends more on whether operators can query events by the same request, trace, model version, feature version, and deployment identifiers that appear in metrics and spans. Log aggregation is therefore useful because it preserves the join between local failure context and fleet-wide symptoms.

Traces show where latency or failure propagated across distributed components. A trace is the end-to-end journey of a request, a span is one operation within that journey, and context propagation carries the trace identity across service boundaries. A trace through an ML inference pipeline illustrates how these spans compose:

```
Trace: user-request-12345
|-- Span: api-gateway (5 ms)
|   `-- Span: auth-service (2 ms)
|-- Span: feature-service (15 ms)
|   |-- Span: user-feature-lookup (8 ms)
|   `-- Span: item-feature-lookup (12 ms)
|-- Span: inference-service (45 ms)
|   |-- Span: preprocessing (3 ms)
|   |-- Span: model-inference (40 ms)
|   `-- Span: postprocessing (2 ms)
`-- Span: response-formatting (1 ms)
Total: 66 ms
```

OpenTelemetry provides a standard API for distributed tracing. Backend systems like Jaeger, Zipkin, or cloud tracing services store and visualize traces. The durable requirement is not the particular tracing backend; it is preserving enough context to answer whether the fault lives in request routing, feature retrieval, model execution, postprocessing, or a dependency outside the model service.

ML-specific debugging

Operational signals are not enough when a computation is numerically valid but wrong for the model. ML systems also require specialized debugging capabilities.

Numerical debugging

Numerical debugging targets failures where tensors remain valid objects but contain invalid values. NaN detection[22] exposes values that can propagate through later arithmetic without a process crash. Listing 0.3 shows a minimal diagnostic check; the caller must act on the result to prevent publication of the affected output.

[22] **NaN propagation**: Many IEEE 754 arithmetic operations propagate a NaN operand, so an invalid gradient can contaminate dependent updates without stopping the process. The affected scope depends on the computation's data dependencies. Zero divided by zero and the logarithm of a negative real value produce NaNs; division of a nonzero finite value by zero or floating-point overflow can instead produce infinity, which may cause a later invalid operation. Checking only for a process crash therefore misses numerical failures.

Listing 0.3: NaN Detection: This check flags NaN output for diagnosis. The caller must block publication or choose a fallback; a logged request identifier refers to an input retained by the application for replay.

```
# Check tensor for NaN values
# (propagate from any corrupted computation)
if torch.isnan(output).any():
    log.error("NaN detected in output", request_id=request_id)
    # Caller must retain a replayable input reference and block or replace this output
```

During training, gradient statistics make numerical faults visible before they corrupt the whole run. Gradient norm detects explosion or vanishing, gradient distribution detects anomalies, and layer-wise gradients identify problematic layers.

Mixed-precision training[23] can introduce numerical issues. A dynamic loss scaler reduces its scale after detecting nonfinite gradients, indicating overflow or another invalid operation rather than proving underflow. Gradient magnitudes, skipped updates, and comparison with a higher-precision replay help distinguish range problems from other causes; ordinary FP16 rounding differences are not themselves faults.

[23] **Mixed-precision numerical issues**: FP16's positive finite range starts near 6×10^{-8} with subnormals and ends at 65,504; FP32's positive normal range spans approximately 1.2×10^{-38} to 3.4×10^{38}, with subnormals below it. Scaling loss before backpropagation and unscaling gradients afterward reduces underflow risk, while dynamic scaling can skip nonfinite updates and lower the scale. BF16 reduces range pressure relative to FP16 at the cost of lower significand precision, without eliminating overflow or invalid operations.

Data debugging and validation

Data bugs surface as valid-looking but wrong inputs, so debugging must verify semantic correctness at each pipeline boundary in addition to numerical validity. Validation checks expected format, shape, value ranges, required fields, and encoding before data reaches the model, catching malformed examples while the failure is still local to the input path.

Once the input passes those static checks, the system needs evidence about behavior over time. Distribution monitors track feature drift, null-rate changes, and outliers as they emerge, while transformation instrumentation logs intermediate shapes and statistics so teams can compare each stage against known-good data. Together, these signals separate a corrupted input path from a numerical failure inside the model.

Straggler detection and analysis

Definition 7.2 framed a straggler as a slow training rank that holds up a synchronous step. The same idea extends to serving once "peer" means any component on a request's path, so straggler diagnosis there asks which replica or service stage is slow enough to become a failure-equivalent bottleneck. A slow serving replica delays requests routed to it and can trigger retries under load; its effect on the service's tail percentile depends on its traffic share and the routing policy. A request that waits for several required parallel branches is instead bounded by the last required completion. Operation-level timing instrumentation measures time for each operation, enabling latency attribution across pipeline stages. Listing 0.4 wraps operations in context managers that emit per-span timing metrics, making it straightforward to compare performance across replicas.

Listing 0.4: Operation-Level Timing: Context manager instrumentation attributes latency to individual pipeline stages, enabling straggler detection by comparing the same span across replicas.

```
# Wrap operations in timing context managers for latency attribution
with timer("feature_lookup"):
    features = feature_store.lookup(
        ids
    )  # Often the latency bottleneck
with timer("model_inference"):
    predictions = model(features)  # Host submission time for asynchronous GPU work
```

For asynchronous GPU execution, the host span above measures submission time, not completed device work. Use device events around the relevant stream and wait for event completion before reporting GPU elapsed time. Compare like-for-like component timing across replicas using percentile analysis. p50 shows typical performance, while p99 shows tail latency. Comparing p99 across replicas identifies workers whose slow path has become a fleet-wide bottleneck.

The diagnosis must then separate the root causes that produce the same slow-worker symptom. Hardware issues include thermal throttling and memory errors, data skew means some inputs are slower to process, resource contention occurs when other processes consume resources, and network issues create slow connections to data stores.

Common failure patterns

Combining these observability streams helps detect recurring optimization pathologies. Figure 0.93 contrasts an idealized healthy loss trend with gradient explosion, premature plateaus, and NaN divergence. Real stochastic training need not decrease monotonically, so a transient rise alone does not establish failure. The useful diagnostic compares the observed change with expected variation and corroborating signals.

Training failures

A training-loss signature is useful because it narrows the hypotheses that recovery must test. The trajectories in figure 0.93 illustrate symptoms, including nonfinite values that need not crash the process. Table 0.69 pairs spike, plateau, and divergence patterns, plus the silent hang a loss curve cannot show, with a candidate cause and a first response. That pairing guides investigation without treating the curve as a unique diagnosis.

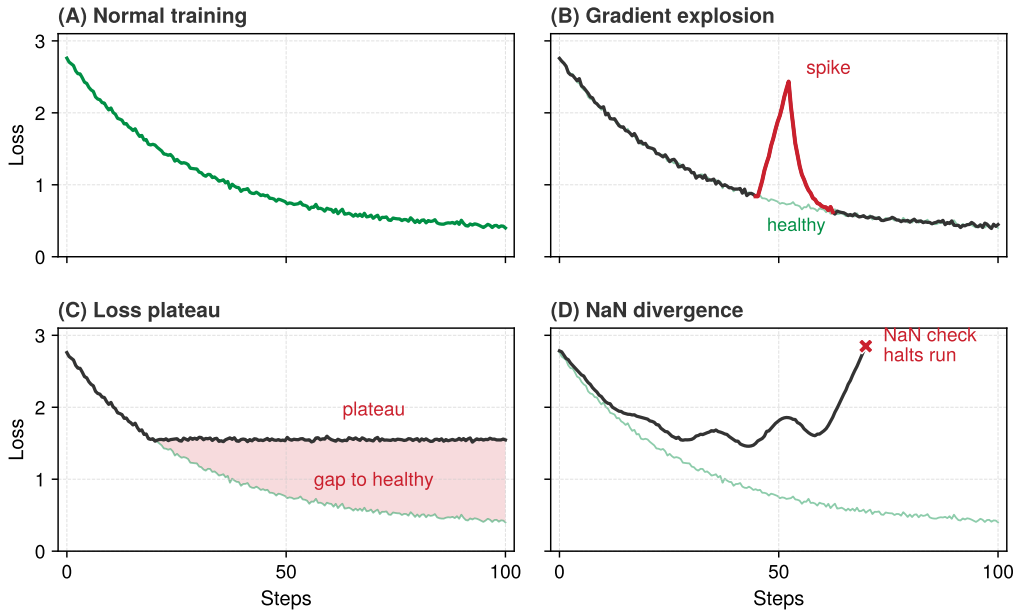


Figure 0.93: Training failure signatures: Common patterns of model loss over time that indicate underlying system or algorithmic failures. (A) Normal training. (B) Gradient explosion. (C) Loss plateau. (D) NaN divergence, ending where a nonfinite-value check halts the run; without such a check the process can keep running on NaN values rather than crash. Identifying these signatures automatically is essential for rapid recovery in autonomous training pipelines.

Table 0.69: Training Failure Response Map: Training-loss curves are operational evidence only when they lead to different recovery actions. The response map ties each signature to the failure class most likely to explain it and to the first action operators should take.

Signature	Likely Interpretation	Recovery Response
Spike followed by recovery	Transient input or numerical anomaly; the curve alone does not identify the cause	Preserve the suspect batch and step evidence, then replay before deciding whether to continue.
Spike followed by plateau	Optimizer instability, corrupted state, or a persistent data-path defect	Pause, replay from a known-good checkpoint, and compare input, optimizer, and worker evidence.

Signature	Likely Interpretation	Recovery Response
Gradual divergence	Data drift, numerical instability, corrupted state, or worker desynchronization	Compare per-rank telemetry and evaluation evidence; isolate hardware only when replay implicates it.
Hang without an error	Collective deadlock or crashed worker blocking synchronization	Use timeout detection and restart or reconstruct the worker group.

These diagnostic responses protect long-running batch workloads, but identifying failures in real-time user-facing systems demands an entirely different latency budget.

Serving failures

Serving failures require the same symptom-to-action mapping under much tighter latency constraints. Table 0.70 separates the common symptoms by what they reveal and what the serving system must do first.

Table 0.70: Serving Failure Response Map: Serving incidents must be classified quickly because every diagnosis competes with a user-facing latency budget. The table ties each symptom to the first operational response rather than treating all serving failures as generic errors.

Symptom	Likely Interpretation	Immediate Response
Latency spikes	Resource contention, garbage collection, cold caches, or model reloads	Check placement and capacity; repeated spikes usually mean the problem is no longer transient.
Rising error rates	Dependency failure, data-format change, or model bug	Investigate immediately because errors compound across dependent services.
Silent quality degradation	Model drift, feature degradation, or data-pipeline fault	Use quality monitoring beyond standard operational metrics.
Cascade failure	Timeout exhaustion, resource depletion, or error propagation from one failing component	Trip circuit breakers and preserve isolation boundaries before the failure spreads.

Cascade failures are particularly insidious because the root cause is obscured by the symptoms it generates. A concrete diagnosis shows how the three observability pillars work together to trace a cascade back to its origin.



Example 7.4: Diagnosing a cascade failure

Scenario: A recommendation system experiences sudden latency spikes.

Diagnosis: The three observability pillars narrow the failure path. Metrics reveal the symptom: p99 latency jumped from 45 ms to 800 ms at 14:32, with error rate increasing from 0.1 percent to 15 percent. Traces locate the delay in the feature-service span, which consumes 700 ms instead of the normal 12 ms, while model inference remains at 40 ms. Logs show repeated connection timeouts to the user embedding cache at 14:31, followed by requests bypassing the cache and reaching the embedding database directly. That evidence identifies cache unavailability and increased downstream demand; it does not yet distinguish a failed cache process from a network or resource problem.

Systems lesson: Cache unavailability can transfer enough demand to overwhelm the embedding database. A circuit breaker and a validated default-embedding path can limit that cascade while diagnosis continues. The fallback must also respect the quality budget and avoid sending the rejected demand to another saturated dependency.

Correlating metrics, logs, and traces allows operators to isolate failures and trigger automated remediations before an entire cluster is compromised. How these observability pipelines and fault tolerance strategies operate in practice, however, is best understood through real deployments. Production clusters running frontier models and global services illustrate how organizations translate theoretical reliability models into operational systems.

Case Studies

Published production systems make the chapter's scale lesson concrete, with failure detection, state preservation, and observability reappearing as checkpoint tax, topology reconfiguration, chaos testing, and elastic recovery. Public operational reports from Meta, Google, Netflix, and Microsoft reveal how organizations navigate these trade-offs when operating at fleet scale. Treat the operational numbers as reported magnitudes that reveal the design pressure, not as universal constants. Meta's Open Pre-trained Transformer (OPT-175B) training run on a 992-GPU cluster provides the first example, a run that had to absorb dozens of hardware failures without aborting.

Large-scale LLM training at Meta

The training of the Open Pre-trained Transformer (OPT-175B) at Meta provides a documented study of failure during a large deep-learning job (Zhang et al. 2022). Over two months on 992 NVIDIA A100 GPUs, the team reported at least 35 manual restarts and estimated 70 or more automatic restarts due to hardware failures (ECC memory errors, NCCL and InfiniBand network faults, lost GPUs), alongside the cycling of more than 100 hosts (Zhang et al. 2022; Meta AI Research 2022). Numerical instability created a separate recovery problem. These counts establish repeated interruption, but cycling hosts and restarting jobs are different events; their totals do not directly measure one common MTBF. The recovery design had to preserve progress while distinguishing failed execution resources from suspect optimization state.

During the OPT run, the team monitored progress through train-log freshness checks. The public logbook records a 15-minute modified-file threshold, later relaxed to one hour, as part of restart monitoring (Meta AI Research 2022). For a hang that raised no error, this threshold contributed to T_{detect}; polling and response delays could extend the wait before restart. The logbook illustrates the trade-off of equation 0.26 in operational form, since relaxing the threshold reduced sensitivity to delayed logs while allowing longer idle windows.

Recovery procedures also had to account for loss spikes associated with numerical instability. Unlike a fail-stop event, this symptom made recent model state suspect without identifying a failed device. The team combined rollback to an earlier checkpoint with a lower learning rate to recover from divergence (Meta AI Research 2022). The paper separately reports approximately 147 TFLOP/s per A100 (about 47 percent of dense FP16 peak) (Zhang et al. 2022); that execution-rate metric alone does not establish end-to-end useful throughput after interruptions and replay. The enduring lesson is the distinction between recovery paths. A failed device calls for replacement and restoration of valid state, while numerical divergence can require an older checkpoint and a changed optimization policy. Retaining checkpoint history makes that second path possible.

Google TPU pod resilience

Google's TPUv4 supercomputer combines configurable topology with recovery software. A pod contains 4,096 chips organized as 64 cubes of 64 chips, each arranged in a $4\times4\times4$ 3D mesh (Zu et al. 2024). Losing one chip removes $1/4096$th of pod capacity, but can interrupt an entire job that requires that participant. The recovery unit therefore exceeds the failed device.

War story 7.1 traced the recovery mechanism, in which the OCS fabric assembles healthy cubes into job-sized slices, reallocating spare cubes after machine outages and routing around unavailable links for supported OCS outage patterns. The published study adds the software that runs that loop, components including `libtpunet` and `healthd` for topology setup and health monitoring, and the operating statistics that show how often it runs.

The study reports 99.98 percent system availability, with hardware outages affecting approximately 1 percent of training jobs (Zu et al. 2024). Daily failure rates were 0.08 percent of TPU machines, 0.005 percent of ICI cables, and 0.04 percent of OCS units. Small daily fractions still add up across thousands of components, so the control plane absorbs a steady stream of reconfiguration events rather than an occasional emergency. The architectural lesson is to match each failure boundary to a feasible replacement or routing mechanism.

Netflix chaos engineering for serving dependencies

While training resilience focuses on long-running batch jobs, Netflix's published work on Chaos Engineering (Basiri et al. 2016) provides the serving-side contrast, and it is the production origin of

the injection discipline that section 13 applied to training. The premise is simple but operationally demanding. Because production systems have many interacting dependencies, teams should validate steady-state behavior by deliberately injecting failures instead of waiting for real incidents to discover whether fallbacks work.

For ML serving, the same discipline applies to feature stores, model-serving dependencies, caches, and fallback paths. A model endpoint can be healthy while a feature service is slow, stale, or unavailable; if the system lacks a tested fallback, a local dependency problem can become user-visible latency or degraded recommendations. Chaos tests make those assumptions executable by injecting latency, terminating dependencies, or forcing fallback paths in controlled conditions.

The recovery procedure for these injected faults centers on fallback hierarchies. If the primary deep learning model fails or times out, the serving system can switch to a lighter model, cached response, or simple popularity-based default. The systems lesson is that resilience in ML serving is not a static property but a continuous practice of active verification. A fallback path that is never exercised is documentation, not fault tolerance.

Microsoft DeepSpeed fault tolerance

Microsoft's DeepSpeed, already compared with other frameworks in table 0.61, illustrates the boundary between a training framework and the recovery control plane. Its ZeRO-based training and checkpointing primitives partition large-model state across workers (Rasley et al. 2020; DeepSpeed Developers 2026a; Rajbhandari et al. 2020). Losing a worker can strand its shard, so framework support must be paired with durable checkpoints and an orchestrator that restores a valid worker group.

This checkpoint-centered path does not imply in-memory repair. Universal Checkpointing supports selected parallelism and topology changes (DeepSpeed Developers 2026b), but the launcher chooses the replacement allocation and the training script preserves data coverage, batch size, and optimizer invariants. The end-to-end guarantee belongs to that combination, rather than to the framework alone.

Across these production case studies, three architectural patterns recur. First, detection speed belongs in the recovery budget. Meta's log-freshness threshold and Google's health monitors determine when recovery can begin, while Netflix's chaos experiments test detection and fallback for selected dependency failures. Checkpoint age and replication lag separately govern recoverable state. Second, the atomic unit of failure shapes the architecture. Google combines cube replacement with fault-tolerant routing, DeepSpeed-based jobs restore parameter shards from durable checkpoints, and Netflix validates service-dependency fallbacks. Third, fault tolerance is a spectrum rather than a switch. Exact state recovery trades normal-operation overhead against lost work and recovery time; graceful degradation additionally trades service capability against continued availability. Those distinct trade-offs help identify the misconceptions that follow.

Fallacies and Pitfalls

An infrastructure team might spend weeks hardening their storage layer against disk failures, only to have their entire training run destroyed by a subtle software bug in their PyTorch distributed backend. Fault tolerance for distributed ML systems involves counterintuitive mathematics and subtle trade-offs where conventional data center wisdom often fails.

Fallacy: *Hardware failures are the main concern.*

This intuition comes from traditional systems where disk failures, power outages, and network partitions dominate. In ML systems, hardware failures are only one part of a broader incident mix.

Long-lived, stateful ML jobs expose failure paths that hardware redundancy cannot cover. A malformed checkpoint path can make recovery impossible, a mismatched collective library can hang all ranks, an undersized shared-memory limit can crash data loaders, and a stale feature schema can silently corrupt training. Their relative frequency depends on the deployment, but even an infrequent software or configuration fault can destroy the same multi-day job that hardware redundancy was meant to protect.

Investing heavily in hardware redundancy while neglecting software robustness (input validation, gradual rollouts, configuration management) leaves many important failure modes unaddressed. The most reliable ML systems treat software bugs as inevitable and design defensively.

Pitfall: *Setting checkpoint interval by intuition.*

Organizations commonly set checkpoint intervals based on "feels right": "every hour seems reasonable" or "every 1,000 steps." The Young-Daly formula reveals these intuitions are often wrong. For the 1,000-GPU cluster of table 0.53, whose GPU-only MTBF is 50 hours, with a checkpoint write time of 5 minutes:

$$T^*_{\text{ckpt}} = \sqrt{2 \times 5 \times 3000} = \sqrt{30000} \approx 173 \text{ minutes}$$

The intuitive "every hour" checkpoints nearly three times more often than the expected-waste optimum. It reduces potential lost work, but the added write overhead outweighs that benefit under this model. A tighter RPO can still justify the shorter interval. The same hourly policy was too infrequent in the Young-Daly notebook, and both verdicts follow from one rule. The optimum scales as $\sqrt{T_{\text{write}} \cdot \text{MTBF}}$, so an hour is too long when a 24.5 s write meets a full-system MTBF of 3.87 hours, yet too short when a 5-minute write meets a GPU-only MTBF of 50 hours. If checkpoint time increases to 15 minutes (larger model, slower storage), the optimal interval stretches to 300 minutes, further still from the "every 15 minutes" that some teams adopt to "stay safe." The decision must balance expected waste with the recovery contract rather than treat either interval as universally correct.

Fallacy: *If each GPU is 99.99 percent reliable, a 10,000-GPU cluster is also 99.99 percent reliable.*

Reliability does not compose by averaging; it compounds by multiplication. The 9s-of-availability calculation (notebook 7.1) applied the independent-failure A^N_{GPU} rule to 10,000 GPUs at 99.99 percent availability and found every GPU simultaneously up only 37 percent of the time, so the cluster spends most of its life with at least one device down. Individual component reliability is necessary but nowhere near sufficient at fleet scale. System-level fault tolerance (checkpointing, elastic recovery, redundancy across failure domains) must be designed explicitly, not assumed to emerge from per-component MTTF.

Pitfall: *Using MTBF calculations as if failures were independent.*

The reliability equation $\text{MTBF}_{\text{system}} = \text{MTTF}_{\text{component}}/N$ assumes component failures are statistically independent. In production, however, failures correlate across common physical and operational dependencies. A shared power domain can fail an entire rack when an uninterruptible power supply faults, a shared top-of-rack switch isolates all attached accelerators, shared software bugs triggered by specific inputs crash all replicas simultaneously, and cooling failures induce clustered thermal throttling across adjacent chassis.

Correlated failures change two quantities that the simple MTBF equation hides: incident frequency and blast radius. A cluster with 1,000 independent GPUs each with 50,000-hour MTTF has a first-GPU-failure MTBF of 50 hours. If a shared power, cooling, or software hazard adds an incident rate 10 times larger than that independent first-failure rate, the effective incident MTBF drops to about 5 hours. Separately, a correlated incident may take out 10 GPUs at once, increasing recovery cost even if the independent GPU failure rate itself has not changed. Reliability engineering must identify and mitigate correlation through diversity: different power feeds, different network paths, different software versions in canary deployments.

Fallacy: *Component MTTF values predict individual failure timing.*

Engineers read a GPU MTTF of 50,000 hours and plan around a five-year replacement cadence per device. MTTF is a population mean, not a lifetime assigned to each component. A GPU with MTTF 50,000 hours might fail at 200 hours or last 100,000 hours. Under the chapter's independent constant-rate model, a fleet of 10,000 GPUs has an aggregate rate of approximately $10{,}000/50{,}000 = 0.2$ failures per hour, or roughly one failure every 5 hours. This planning model helps size recovery capacity and spare pools. It does not make device-health monitoring pointless: temperature, error history, and recurring anomalies provide condition-specific evidence that the population mean alone lacks.

Pitfall: *Ignoring restart overhead in checkpoint planning.*

The Young-Daly formula accounts for checkpoint save time, but practitioners often overlook the substantial overhead incurred during restart. In shared clusters, job scheduling delays to acquire replacement GPUs consume minutes before execution can even begin. Once allocated, distributed storage reads impose significant checkpoint loading latency, communication re-establishment requires NCCL ring topology reconstruction, and warmup time delays progress further while initializing kernels, refilling data pipelines, populating caches, and aligning optimizer schedules and model statistics with restored state.

Total restart time can be 3–5$\times$ checkpoint save time. A 5-minute checkpoint write and a 20-minute restart are separate costs: the write is paid when saving, while the restart is paid after failure, in addition to lost work since the last completed checkpoint. That recovery term should be included in the expected waste and recovery-SLO budget; it should not be added to T_{write} as though it were paid at every checkpoint unless a specific recovery-aware checkpoint model derives that dependency.

Fallacy: *Every failure should be handled as a full restart.*

Engineers often treat all failures as "node crashed, restart from checkpoint," but different failure modes require different responses. Transient stalls such as network congestion can permit a bounded wait or safe retry when state and the communication group remain valid; a brief fault can still require recovery if it corrupts state or leaves the group unusable. Permanent device loss requires replacement or a feasible resize, together with restoration of the missing state. Silent corruption requires a trusted recovery point, which may precede the latest checkpoint and therefore motivates checkpoint history retention. Persistent resource exhaustion (OOM, memory fragmentation) needs reconfiguration before restart; otherwise the job can crash again immediately. As section 4 details, misdiagnosing failure type wastes compute: restarting for a harmless stall discards useful work, while continuing from corrupted state can contaminate later updates.

Pitfall: *Assuming checkpoints are consistent without validating state.*

Modern frameworks checkpoint transparently, creating the illusion of automatic consistency. In practice, distributed checkpoints require cross-node coordination that can fail subtly across multiple dimensions. Rank desynchronization occurs when workers record different training steps, such as rank 0 snapshotting iteration 1000 while rank 1 captures iteration 1001. Similarly, transient storage failures can cause partial writes that leave behind truncated shards, sharded optimizer state lag leaves optimizer states misaligned with model weights when captured asynchronously, and in-flight gradients from incomplete AllReduce operations can produce ambiguous reduction boundaries.

Production systems must implement checkpoint validation: verify all shards exist, verify iteration numbers match, verify optimizer state matches model state. Organizations that discover corrupted checkpoints during recovery from a failure have no recourse except restarting from an earlier (potentially much earlier) checkpoint.

Fallacy: *Fault tolerance can be tested only when failures happen.*

Fault tolerance mechanisms are code paths that execute rarely during normal operation. Like disaster-recovery systems that go unvalidated until an outage strikes, unexercised recovery logic steadily accumulates bugs. Checkpoint restoration procedures fail because training never previously crashed to exercise them, fallback models remain unverified because the primary never went offline, and circuit-breaker thresholds quietly drift out of calibration against evolved traffic patterns.

Chaos engineering (intentionally injecting failures) replaces an assumption of correctness with evidence for the fault models and recovery paths exercised. Organizations that kill selected GPUs during controlled training tests, inject network partitions, and fail primary models can discover broken recovery paths before a production incident. Coverage still depends on injection location, duration, load, and failure combinations; passing one campaign does not establish resilience to every failure.

Pitfall: *Using elastic training as a substitute for checkpointing.*

Elastic training adjusts parallelism degree when workers fail, but resizing still requires a consistent recovery state. Reducing the active worker count requires redistributing model shards, optimizer states, and data assignments, often through checkpoint reload. Below some minimum viable size,

training becomes infeasible because the model no longer fits or the batch policy cannot be maintained; the job must wait for sufficient capacity before restoring. If a failure was caused by a software bug triggered by specific data, the bug persists in remaining workers. Elastic training is complementary to checkpointing, not a replacement. Resizing alone does not justify a lower checkpoint frequency: the recovery contract, failure rate, and checkpoint cost still determine that choice.

Fallacy: *Overhead budgets are fixed fractions of training time.*

Reference tables that show "pipeline bubble: 10 percent, checkpoint overhead: 5 percent, failure recovery: 3 percent" are easy to read as physical laws and pass through as line items in capacity plans. They are engineering targets, not constants. Pipeline bubble overhead depends on the number of microbatches and the interleaved schedule; elastic recovery can reduce waiting for replacement capacity while still restarting workers and restoring state; checkpoint overhead is a function of model size, storage bandwidth, and whether checkpointing is synchronous or asynchronous. Treating these numbers as fixed percentages leads to passive acceptance of avoidable inefficiency. The Young-Daly formula already shows that checkpoint cadence is a decision; the same is true of every other overhead listed in the reference tables.

Pitfall: *Adding GPUs without accounting for communication and recovery overhead.*

Capacity plans typically account for Amdahl's Law and AllReduce overhead but treat reliability as a fixed background condition. At extreme scale, each additional GPU increases the aggregate failure rate, which inflates the expected recovery and replay time per job. There exists a cluster size beyond which the time lost to failures and recovery exceeds the time saved by additional parallelism, and wall-clock training time increases rather than decreasing with N_{GPU}. This is the reliability version of diminishing returns and it applies on top of the Amdahl ceiling. The two effects must be modeled together. Starting from a single-node useful-compute rate, scaling efficiency accounts for distributed execution losses; a further retained-progress fraction can account for recovery and replay excluded from that measurement. Measured distributed model FLOPs utilization (MFU) already includes scaling losses over its measurement window, so multiplying it by scaling efficiency again counts those losses twice. Whole-run useful goodput must count only retained progress and include recovery time in the denominator; its reliability penalty generally grows with N_{GPU} under the independent-failure model.

Fallacy: *Silent data corruption is negligible because hardware has ECC.*

GPUs and memory systems include extensive error correction (ECC, CRC, parity), creating the intuition that silent data corruption is negligible. Large-scale CPU SDC and memory-error studies show that silent corruptions and memory faults still occur at fleet scale and can escape ordinary error reporting (Dixit et al. 2021; Sridharan et al. 2015). For a 10,000-GPU cluster, even rare per-device corruption events become operationally relevant because the system continuously executes enormous volumes of memory and arithmetic operations. ECC and link CRCs remain necessary layers, but they protect stored and transmitted bits rather than arithmetic, so they are not an end-to-end correctness proof for a training run. Silent corruption can produce loss spikes, gradient NaNs, or failed convergence, but none of those symptoms identifies hardware as the cause. End-to-end validation therefore combines checksums on data and checkpoint shards, cross-rank digests for agreement, redundant computation or replay where the risk justifies its cost, and statistical monitoring for model-level anomalies. The evidence must distinguish a bad batch, numerical instability, synchronization error, and corrupted hardware before the system drains a device or rolls back state.

Recognizing these fallacies prevents engineers from optimizing for the wrong failure modes. The core principles required to build resilient machine learning fleets follow from the quantitative reasoning developed throughout this chapter.

Summary

Fault tolerance turns the statistical expectation of hardware failure into a manageable operational routine. Individual component reliability compounds across thousands of devices, driving system-level MTBF from years down to hours. At fleet scale, systems must bound lost work and recovery delay through recovery that is automatic, fast, and minimally disruptive to training or serving.

In training, progress is only as safe as the last state the fleet can prove it can restore. Checkpointing bounds lost work, and the Young-Daly interval (equation 0.22) prices that bound against write cost, shrinking only with the square root of a falling MTBF. RPO and RTO turn the expected-value optimum into a service contract. A manifest published last defines which generation exists, and fencing at the resource boundary decides who may still write to it. The retries that recovery triggers stay safe only when each operation is idempotent, inherits its caller's deadline, and draws on one shared retry budget, so the response cannot amplify the incident. Elastic recovery then trades capacity for continuity, valid only while the data, batch-size, and optimizer invariants survive the resize.

Serving inverts the budget. Training can spend minutes restoring state that satisfies its optimization contract; an interactive request has milliseconds, so serving buys availability with ready replicas and decides in advance which state it will rebuild, replicate, or abandon. The KV cache is the clearest case, derived state that can be reconstructed from retained history only when the latency budget allows. When neither redundancy nor reconstruction fits that budget, graceful degradation keeps the service useful by sacrificing a named property that was validated before the incident.

Recovery depends on evidence about both the failure and the state being restored. A loss spike can originate in hardware, data, numerical behavior, or synchronization. Suspect state can justify a pause or rollback while investigation continues; attributing the cause to a device requires corroborating telemetry, replay, or integrity evidence. Restore drills and fault injection then test whether the selected response actually preserves valid state and meets its recovery budget. Passing those tests establishes evidence for the exercised fault model, rather than a guarantee against every failure.

Key Takeaways: Failure is normal operation

- **Scale makes failure routine**: A 10,000-GPU cluster encounters hardware failures every few hours under the chapter's component-rate assumptions; software must treat failure as a normal state.
- **Symptoms require evidence before recovery**: A loss spike or slow rank does not identify its cause. Correlate telemetry with replay or integrity checks, then use restore drills and fault injection to test the selected response against its stated fault model.
- **Checkpointing is the baseline**: Synchronous writes pause training; asynchronous writes can overlap storage I/O with computation, but require staging memory and a consistent, durably committed snapshot before recovery can use it.
- **Recovery is a contract**: RPO bounds lost progress, RTO bounds recovery delay, MTTR combines with MTBF to determine steady-state availability, a manifest identifies committed state, and fencing prevents an expired worker epoch from writing after replacement.
- **Checkpoint cadence balances two costs**: Under the first-order assumptions, $T^*_{\text{ckpt}} = \sqrt{2 \cdot T_{\text{write}} \cdot \text{MTBF}_{\text{system}}}$ balances checkpoint write overhead against expected rework; for the 175B running example on a 10,000-GPU cluster it lands near 13.8 min. The selected interval must also meet limits on lost progress; recovery delay needs its own budget.
- **Elasticity enables persistence**: Designing training jobs to be "elastic" (rebuilding communication groups and rebalancing data shards as traced in figure 0.90) can reduce waiting for replacement capacity. The runtime must preserve valid state and data coverage, and either preserve batch size or validate the changed optimization policy. Checkpoint cadence still determines how much work must be replayed.
- **Serving recovery follows the state budget**: Preserve authoritative history, then choose reconstruction, checkpointing, or replication for derived state according to the latency contract (table 0.64). A ready replacement provides useful service only when it can also recover the context the request needs.
- **Degradation is a designed mode**: When recovery cannot finish inside the latency budget, a fallback validated in advance (a smaller model, cached results, default features, or shed

low-priority load) keeps the service useful, provided monitoring exposes how much quality was traded away.


Fault tolerance makes the coordination tax a deliberate part of the execution budget. Section 4 works a complete coordination-bound diagnosis, attributing a large run's lost wall time to checkpoints, failures, pipeline bubbles, and scheduling. In the Fleet Law (equation 0.3), checkpoint pauses, detection timeouts, and restarts all land in the synchronization term $T_{\text{sync}}(N)$. The chapter's mechanisms spend Coordination (C_3) so that a failure does not erase completed Compute, and asynchronous checkpointing and warm restart earn their complexity by moving part of that synchronization cost into T_{overlap} or shrinking it outright. The useful comparison is between time spent preserving and validating state during normal operation and time lost reconstructing trustworthy execution after a failure. A cheaper recovery mechanism is valuable only when it still meets the workload's limits on lost progress, response delay, and degraded quality.



What's Next: From resilience to resource management

Keeping the fleet running despite inevitable hardware failures requires three layers: checkpointing preserves progress, elasticity absorbs node losses, and redundancy protects stateful serving sessions. Each layer also assumed a decision made elsewhere: a spare pool deep enough to replace a drained node, a hot spare held idle, spot capacity that may vanish, and replicas placed across independent failure domains. Those are allocation decisions, made while many jobs compete for the same fleet, from month-long training runs to hour-long experiments. A fault-tolerant cluster therefore still needs orchestration to decide which jobs run where, when to preempt, and how to share capacity fairly among them.

Fleet Orchestration

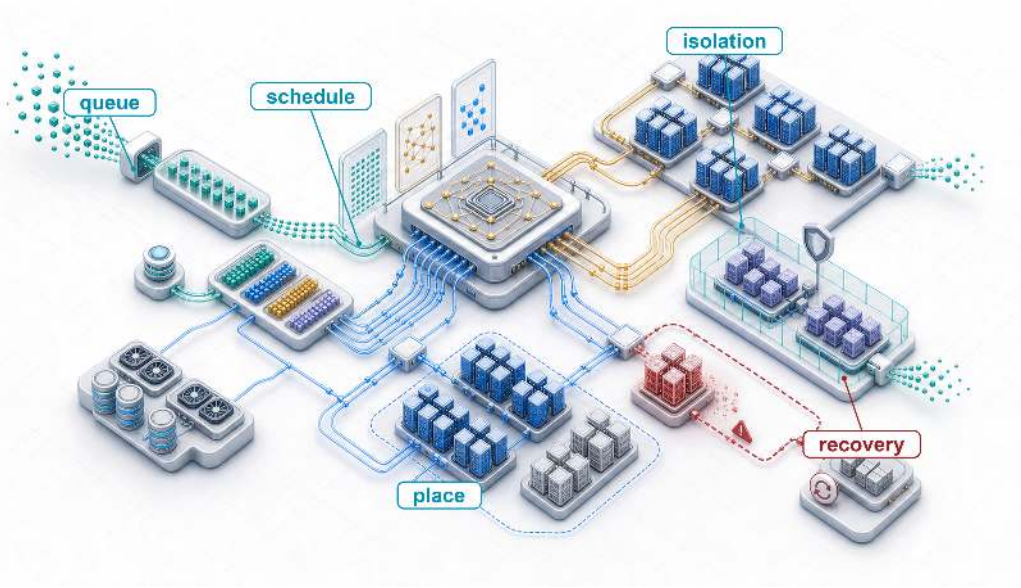

Purpose

Why can jobs wait while expensive accelerators sit idle?

A thousand idle accelerators still incur ownership or reservation costs while queued experiments make no progress. More hardware does not resolve that waste when available resources cannot form the groups that pending jobs need. Free devices may be scattered across machines with unsuitable connections, or several jobs may each hold resources while waiting for the rest. On one machine, improving execution usually begins with the work already running. Across a shared fleet, useful progress also depends on which work can start, how long it waits, and what other work its allocation displaces. A short experiment needs a timely result, a long training run needs continuity, and a serving workload needs capacity before requests miss their deadlines. Favoring any one claim without considering the others can leave the fleet busy while delaying the results it exists to produce. Interrupting a job can free capacity, but preserving its state and restoring progress consume time and bandwidth. Waiting for a better placement can accelerate execution while extending completion time. Fair access therefore cannot be judged from device counts alone, and high utilization cannot establish that capacity is being used well. The engineering challenge is to honor these competing claims under changing demand and uncertain resource availability, while keeping the allocation process itself reliable. In C^3 terms, orchestration pays coordination overhead to turn compute and communication capacity into useful progress while preserving fairness and latency headroom.

Learning Objectives

- Analyze scheduling objectives, fragmentation, and deadlock risks for distributed training jobs under shared fleet constraints
- Compare HPC, cloud-native, and hybrid orchestration paradigms for batch training and self-healing serving workloads
- Apply gang, bin-packing, and topology-aware placement policies across NVLink domains and switch hierarchies
- Design elastic training and preemption policies that trade throughput, recovery overhead, and spot-instance savings
- Evaluate ML-specific schedulers by their workload signals, fairness objectives, and required integration with the training runtime
- Design serving capacity, isolation, and multi-tenant quota policies that balance serving headroom, team guarantees, and borrowed capacity against training demand
- Diagnose utilization losses from quota hoarding, noisy neighbors, fragmentation, topology mismatch, and data starvation

The Scheduling Problem

Consider two research teams sharing a 1,000-GPU cluster: Team A submits a 512-GPU job that will run for a month, while Team B submits hundreds of 8-GPU experiments that each run for an hour. If the scheduler continually admits whichever jobs fit, Team B's small experiments can indefinitely block Team A's large training run. The scheduling problem is the challenge of navigating this multi-dimensional conflict between throughput, fairness, and cluster utilization.

Partitioning computation (chapter 15), synchronizing it efficiently (chapter 8), and recovering from hardware failures (chapter 12) solve the single-job scaling problem, but each of those mechanisms assumed that the job already held its accelerators. Fault tolerance assumed more than that. Its recovery paths drew on a spare pool deep enough to replace a drained node and on spot capacity whose loss the job could absorb, and neither exists unless something outside the job grants it, holds it in reserve, or takes it back. That something is orchestration, the policy that decides which jobs run, where they run, when one is preempted for another, and how competing demands share the fleet. A useful allocation must first be feasible, then worth granting under the fleet's fairness, latency, and cost objectives. That ordering motivates the progression from admission and packing constraints to control-plane designs, topology-aware placement, elastic and cost-aware policies, schedulers built around ML workload signals, and finally the serving and multi-tenant contracts under which many owners share one fleet. Training and serving draw on the same fleet, so the capacity envelope this chapter allocates is the one both depend on; how a serving system spends its share, request by request, is the subject of chapter 6.

In the Fleet Stack (shown in the margin), orchestration occupies the Reliability & Control row of the distribution band, but the infrastructure band beneath it constrains its decisions. The scheduler must account for GPU heterogeneity, NVLink topology, rack power limits, and network bisection bandwidth. When scheduling goes wrong, debugging can require examining all four bands to identify whether the root cause lies in infrastructure (hardware constraints), distribution (algorithm limitations), serving (workload mismatch), or governance (policy misconfiguration). Orchestration connects physical infrastructure to distributed algorithms, translating resource requests into placements that respect both hardware topology and organizational policy.

The same conflict grows with the fleet. Consider a research organization operating a 10,000-GPU cluster. A single pretraining run of a GPT-3-class 175B-parameter model (Brown et al. 2020), the running instance of Archetype A (GPT-4/Llama-3) throughout this book, can hold a 1,024-GPU allocation for weeks. Because the scaling laws of section 6 reward larger models trained on more tokens, each new generation of such runs asks for a larger gang held for longer, so the scheduler's hardest requests keep growing. Suppose enough jobs of that class are queued that together they ask for more GPUs than the cluster holds, alongside thousands of smaller experiments and inference

workloads all competing for the same resources. The system must decide which jobs run, when they run, and where they run. A first-come-first-served policy without backfilling or preemption can let large jobs occupy the cluster for weeks, delaying smaller experiments that researchers need to iterate quickly. A fair-share policy that divides capacity without respecting each job's minimum resource bundle can leave many partial allocations and no runnable large job. The scheduler must navigate a multi-dimensional trade-off space where every decision affects throughput, fairness, cost, and researcher productivity simultaneously.

The economic stakes make these decisions consequential at every scale. A continuously provisioned 10,000-GPU cluster, valued at the chapter's cloud-equivalent rate of $2/GPU-hour, represents $480,000 per day in capacity, whether the GPUs are computing useful work or sitting idle while jobs wait in a queue. If scheduling inefficiencies leave 30 percent of GPUs idle, that translates to $144,000 per day in unused capacity value, or about $52.6M annually. Holding useful work per active GPU-hour constant, improving utilization from 50 percent to 80 percent adds 3,000 fully utilized GPU-equivalents of productive capacity without purchasing additional hardware. That count measures the gain in useful work. Procurement planning asks a different question, namely how much hardware the gain replaces, and for that comparison the answer is 6,000 raw GPUs, because new GPUs run under the same scheduling policy would also reach only 50 percent utilization. Recovered capacity becomes cash savings only when it avoids purchases or billed resource time. Scheduling can therefore increase the useful work delivered by an existing investment, even when the fleet's immediate expenditure remains unchanged.

↩ Archetype A and its 175B-parameter running instance are established in section 11.

Workload semantics, rather than an ML-versus-high-performance computing (HPC) boundary, determine scheduling flexibility. Rigid synchronous jobs in both domains require a fixed set of co-scheduled ranks, whereas malleable jobs can make progress across a declared range of resource counts. Gang scheduling[1] represents the critical allocation constraint for a rigid training group: a job configured to require 1,024 GPUs cannot complete its distributed iterations with only half of them. Each collective requires participation from all ranks in its communication group, which may be a subset of the job. Ring and tree AllReduce schedules make this constraint physical: allocating a group of N GPUs but launching only $N-1$ leaves the collective unable to complete. Partial allocation can create deadlock when rigid jobs retain their incomplete allocations while waiting for resources held by one another. Malleable data-parallel training can instead vary its replica count at explicit reconfiguration boundaries, but tensor- and pipeline-parallel groups usually retain a rigid base allocation. The scheduler must therefore model each job's minimum viable gang and permitted resize points rather than infer rigidity from the workload's field.

If gang scheduling determines which resources must be available together, topology awareness via placement groups[2] determines how efficiently they can communicate. Tensor-parallel groups benefit from placement within a high-bandwidth NVLink domain; a placement across slower links must still meet the job's communication budget. Two allocations of the same size can therefore deliver very different useful throughput.

GPU heterogeneity is the third dimension. Many clusters contain mixtures of A100 and H100 accelerators with different compute throughput and interconnect bandwidth. Their training-throughput ratio depends on the workload, numerical precision, and communication path, so the scheduler needs measured performance and the applicable allocation cost. Memory capacity adds a hard admission test once pools differ in it. The common A100 and H100 variants both carry 80 GB of high-bandwidth memory (HBM), but smaller-memory variants of the same accelerator and older generations often share the fleet, and a job whose working set fits only the larger devices cannot run on the rest at any priority. The debugging example in section 17 returns to exactly such a mixed fleet. The scheduler must match workloads to appropriate hardware based on actual requirements, not user preferences, while maintaining high utilization across heterogeneous pools. When users request specific GPU types out of habit rather than necessity, the mismatch between requested and required resources can leave entire hardware pools idle while queues overflow on preferred hardware.

Job duration unpredictability compounds these challenges further. A training run may converge early and complete in days rather than weeks. Hardware failures may abort jobs unexpectedly, returning resources at unpredictable times. Hyperparameter searches may reveal early that certain configurations will not succeed, leading to voluntary termination. Fixed-step jobs with stable

1 | **Gang Scheduling**: Formalized by Ousterhout (1982) for parallel systems, where the "Ousterhout matrix" co-schedules related threads across processors in synchronized time slices. In a rigid ML training group, incomplete allocation prevents collective completion, so held resources can remain idle until the missing ranks launch. Without atomic allocation, under the chapter's cloud-equivalent $2/GPU-hour scenario, a 1,024-GPU job that has already acquired 900 GPUs while waiting for 124 more burns approximately $1,800/hour. Gang scheduling prevents the job from holding that partial allocation.

↩ Ring and tree AllReduce schedules, each of which completes only after every rank's contribution has been reduced, are established in section 8.

2 | **Placement Group**: A cloud-native abstraction that requests instances be placed within a high-bandwidth, low-latency network domain. For the ML Fleet, placement groups reduce placement scatter and may expose higher network limits than unconstrained placement. They do not guarantee workload-level bisection bandwidth: topology oversubscription, concurrent traffic, routing, and the collective pattern still determine delivered AllReduce bandwidth.

iteration times permit better release-time estimates than jobs whose stopping conditions or execution rates vary. Both ML and scientific computing contain these cases. The scheduler must distinguish an estimated completion time from an enforced runtime limit when deciding whether another job can safely use a temporary gap in capacity.

The interaction between these challenges creates combinatorial complexity. A scheduler must simultaneously handle gang scheduling constraints (atomic allocation), heterogeneous resources (capability matching), topology requirements (NVLink locality for tensor parallelism), priority and fairness policies (organizational equity), preemption decisions (which running jobs to interrupt), and cost optimization (spot vs. on-demand placement). Each dimension constrains the others: a topology-optimal placement may violate fairness policies, a cost-optimal spot placement may violate reliability requirements, and a fairness-driven allocation may fragment resources in ways that prevent gang scheduling.

These constraints define the central problem of orchestration: the scheduler is not merely packing jobs onto GPUs, but maintaining a consistent, economically useful view of a failing, heterogeneous fleet. The first step is to see why cluster scheduling is fundamentally harder than single-machine process scheduling. At fleet scale, placement stops being only an optimization challenge and becomes a distributed systems problem of keeping state coherent across thousands of machines.

Distributed Scheduling Complexity

A single-machine scheduler works inside one operating-system boundary, where three properties hold closely enough to design around: it observes resource state directly and consistently, its allocation decisions take effect atomically, and failures are nearly binary (the machine is up or it is down). Device faults and delayed cleanup still occur, but they do not hide behind a network. A cluster scheduler surrenders all three properties. It coordinates independent nodes through delayed messages and uncertain observations, so an authoritative allocation decision does not establish that every node has received or completed it, and several distributed systems problems emerge from that gap.

Partial failures pose the first challenge. A node can fail between allocation and job start, creating a gap between the scheduler's decision and its effect. The scheduler may successfully allocate 32 GPUs across 4 nodes, only to have one node fail before the job launches. The remaining 24 GPUs sit idle while the scheduler detects the failure, updates its state, and re-plans the allocation. Meanwhile, other jobs that could have used those 24 GPUs have already been placed elsewhere, potentially on suboptimal hardware. Before the first training step, recovery must repair allocation and launch state even though no new model progress exists to restore. Once execution begins, resource recovery must also coordinate with the framework's checkpoint and membership mechanisms.

Network partitions create a second problem. The scheduler may lose connectivity to a subset of nodes while those nodes continue operating normally. From the scheduler's perspective, their status is uncertain; from the nodes' perspective, jobs may still be running and producing useful work. Reallocating their GPUs risks double allocation if the partition heals while the old work still runs; waiting for reconnection leaves possibly healthy capacity idle. The partition's duration cannot be known in advance, so any fixed timeout is a guess about network behavior that may prove wrong. A timeout can trigger recovery, but it does not prove that the old execution has stopped. Reusing a GPU therefore requires confirmed cleanup or an enforced revocation of the old allocation. Restarting a job on reachable replacement nodes also requires fencing stale attempts from shared outputs. The recovery policy can choose how long to wait for reconnection, but each choice must preserve exclusive ownership where the workload requires it.

State inconsistency emerges as a third challenge that compounds the first two. Resource state may differ between the scheduler's view and reality on individual nodes. A GPU the scheduler believes is free may still be cleaning up from a previous job: flushing caches, deallocating device memory, running a zombie process from a failed container, or completing a CUDA driver reset after an error. Conversely, a GPU marked as "in use" may have been freed by a job that terminated between heartbeat intervals. This inconsistency means the scheduler operates on a model of cluster state that is always slightly stale, and the degree of staleness varies across nodes depending on heartbeat frequency, network latency, and the complexity of cleanup operations.

Ordering without global time presents the fourth fundamental issue. Allocation messages issued before and after a partition can arrive out of order. Logical timestamps can describe an order, but do not by themselves prevent conflicting ownership. The control plane must serialize conflicting allocation decisions, and the resource manager must reject stale allocation generations before acting on them. Otherwise, an old launch request can revive work after a newer allocation has taken ownership.

These four challenges echo the consistency, availability, partition-tolerance trade-off described by the CAP theorem.[3] CAP is a theorem about distributed data systems, not a literal proof about every scheduler, but the analogy draws attention to which allocation decisions remain safe when nodes cannot communicate. Slurm, an HPC workload manager, and Kubernetes, a container orchestration platform, both need authoritative allocation records and mechanisms that reconcile those records with execution. Optimistic concurrency permits schedulers to plan against potentially stale snapshots, then validate proposed changes before committing them. Rejecting a conflicting proposal costs scheduling work; accepting conflicting ownership would violate a different, essential invariant.

The control-plane tension becomes concrete when the scheduler interacts with the ML framework's own distributed coordination plane during a partition. A scheduler may decide that a subset of nodes is unavailable while workers on those nodes are still blocked inside a collective operation. That creates a brief window of conflicting intent: the scheduler wants to recover the allocation, but the training job has not yet converged on a new membership view. Elastic launch and rendezvous mechanisms such as TorchElastic reduce this ambiguity by using heartbeats and re-rendezvous so the framework can either reform a viable worker group or terminate cleanly, giving the scheduler a clearer recovery signal than an opaque collective timeout (PyTorch Contributors 2026c, 2026b). This layered coordination, with scheduler-level policy for coarse allocation and framework-level membership for workers, is the characteristic architecture of production distributed training clusters.

[3] **CAP (Consistency, Availability, Partition Tolerance) Theorem**: Conjectured by Brewer (2000) and proven by Gilbert and Lynch (2002), CAP establishes that no distributed data system can simultaneously guarantee Consistency, Availability, and Partition tolerance. For ML schedulers, use CAP as a design analogy rather than a product claim: the concrete policy question is how much uncertainty the control plane accepts before it allocates, reclaims, or reschedules expensive accelerators.

Admission, placement, and reconciliation

A scheduler control plane separates three decisions that a single queue can obscure. **Admission control** decides whether a job may enter the runnable set under quota, priority, gang, and safety constraints. **Placement** binds an admitted job to a feasible set of nodes while accounting for accelerator capability, topology, power, storage, and network capacity. **Reconciliation** compares desired allocations with observed node and job state, then starts, retries, evicts, or fences work until the two agree. Keeping these stages explicit makes it possible to distinguish admission denial from placement failure. Preventing duplicate ownership additionally requires versioned decisions and enforcement at the resources, so stale observations cannot authorize competing owners.

Control-plane architectures distribute these decisions differently (Hindman et al. 2011; Burns et al. 2016). A centralized scheduler serializes admission and placement against one authoritative state, which simplifies conflict handling but concentrates scheduling latency and failure impact. A two-level design offers resources to framework schedulers, gaining policy specialization at the cost of delayed or rejected offers. A shared-state design lets several schedulers plan concurrently against a common state and resolves conflicts through version checks or optimistic concurrency. In every design, reconciliation closes the loop. Node agents must enforce allocation generations and lease validity so that an old decision cannot revive after a newer placement has taken ownership.


Feasibility also extends beyond free accelerator count. Power-aware admission rejects or delays a placement whose worst-case draw would exceed a rack or facility envelope; relying on average draw risks correlated throttling when colocated jobs enter compute-heavy phases together. I/O-aware placement treats dataset-read and checkpoint-write bandwidth as reservable capacity, so a gang that fits in GPU memory does not start where concurrent input pipelines or checkpoint bursts will saturate the same storage path. These constraints can deliberately leave accelerators idle. The idle capacity is the cost of preserving the power and data-movement budgets required for the admitted jobs to make progress.

Failure Rates at Scale

At scale, failure is normal operation, not exceptional. Fault tolerance turned that principle into checkpoints, detection, and elastic recovery for a running job; for the scheduler, it means planning for failure in every allocation decision rather than merely tolerating it. Holding per-component

reliability constant, adding components increases the expected fleet event count. For an operating population maintained at N_{fleet} GPUs with independent, constant failure hazards, each with mean time to failure MTTF_{GPU} in hours:

$$\text{Expected GPU failures per day} = N_{\text{fleet}} \times \frac{24}{\text{MTTF}_{\text{GPU}}}$$



Failures become a cadence, one every 49 hours at 1,024 GPUs but 4.8 a day at 10,000.

With the per-GPU planning value of 50,000 hours used throughout this book, that is about 0.5 failures per day for every thousand GPUs. Under this model, the 1,024-GPU reference cluster averages one GPU failure every 49 hours, and a 10,000-GPU fleet averages 4.8 GPU failures every day. These are the GPU-only baselines that fault tolerance tabulated (table 0.53). Its full-system cascade for the 10,000-GPU fleet (section 4) adds PCIe and network failure domains and therefore yields a shorter interval between failures. The two figures answer different questions. The scheduler sizes spare capacity and replacement paths from the GPU-only count of devices it must replace, while job interruptions follow the full-system rate and depend on how each failure affects an allocation. A production example illustrates the operational burden: at sixteen times the reference cluster, the Llama 3 pretraining run on 16,384 H100 GPUs recorded 419 unexpected interruptions in 54 days, about one every 3.1 hours (Dubey et al. 2024).

The scheduler cannot treat the cluster as a static resource pool where resources, once allocated, remain available until voluntarily released. It must anticipate loss of allocated resources during execution and provide replacement capacity or rescheduling paths. The response depends on the fault and the validity of the surviving state. A transient disruption may permit recovery in place if the execution state remains usable; a persistent hardware failure requires replacement resources. Even a short disruption can force checkpoint recovery if the framework cannot safely continue (Tiwari et al. 2015).

When a node heartbeat is missed, the scheduler faces three recovery policies with different delay and capacity costs. It can wait to see whether the heartbeat resumes, though this delays recovery if the machine has permanently crashed. It can instead begin recovery promptly on replacement resources, provided stale execution is fenced before conflicting work resumes. An intermediate approach marks the node as suspect and prepositions replacement capacity while checking its status; this reduces launch delay if replacement becomes necessary, but holds capacity that could otherwise serve pending work. Whichever policy it picks, a timeout is evidence rather than proof of failure, so reuse of the node's GPUs still waits on fencing. Historical failure and recovery measurements set how long to wait and how much replacement capacity to hold. The recovery-time decomposition of fault tolerance (equation 0.25) shows where scheduler policy intervenes most effectively. Of its detection, restart, load, and warmup terms, the scheduler owns most of T_{restart}, the time to allocate replacement resources and launch processes, and that is the term its spare-capacity policy shortens. Waiting longer on a missed heartbeat lengthens T_{detect} in exchange for avoiding a needless restart, so the wait is worth extending only while a transient fault remains more likely than a permanent one.

↪ The same decomposition in scheduler-facing phases (detect, reschedule, reload, and replay of work since the last checkpoint) is developed in section 4.

These requirements connect the scheduler directly to checkpoint and recovery infrastructure. Scheduling decisions about spare capacity, preemption policies, and elastic training support determine how quickly the system recovers from statistically expected failures. A scheduler that reserves spare capacity or supports elastic recovery can restore throughput much faster than one that requires every failed job to wait for a full fresh allocation and reload. The reserve fraction follows from the measured failure rate and recovery time of the fleet's own workloads.

↩ Failure detection, recovery procedures, and spare pools are established in section 18.

Scheduling Objectives and Their Conflicts

Scheduling policies balance four objectives: throughput, fairness, latency, and cost efficiency. Throughput benefits from allocations that sustain useful work and amortize launch, interruption, and data-movement overhead; a large allocation helps only while the job scales effectively. Maintaining fairness demands an equitable distribution of resources across competing tenants to prevent a single dominant project from monopolizing the fleet; dominant resource fairness (Ghodsi et al. 2011) formalizes this balance by equalizing each tenant's largest normalized share across GPUs, CPU, and memory. Reducing queue latency helps short, interactive jobs complete promptly, but aggressive preemption can repeatedly interrupt long-running training. Pursuing cost efficiency introduces different costs for different policies: spot capacity risks interruption, off-peak scheduling

delays admission, and dense packing can increase interference. Each policy must be evaluated against useful work completed and the delays it imposes.

Fairness requires an outcome metric rather than an input quota rule alone. For job j, **slowdown** $S_j = (W_j + T_j)/T_j$ compares its queueing-plus-running time with its isolated runtime T_j, assuming the running time is unchanged by sharing; a one-hour job that waits nine hours has $S_j = 10$, even if its team eventually receives its nominal GPU share. When contention or resizing changes execution time, the numerator must instead use the observed queueing-plus-running duration while the denominator retains the isolated baseline. A scheduler should report the distribution of slowdown by user and job class, together with the age of the oldest pending feasible job. Dominant-share parity detects unequal resource allocation, slowdown exposes unequal delay, and the maximum feasible wait exposes starvation risk. These metrics separate a policy that is fair in allocated GPU-hours from one that is fair in the time users wait to obtain useful results.

The trade-off diamond in figure 0.94 illustrates these operational tensions among throughput, latency, fairness, and cost efficiency. Favoring a large unbroken allocation can delay short experiments, while repeatedly admitting short jobs can prevent a large gang from assembling. These conflicts depend on the workload and available capacity; improving one objective does not necessarily worsen every other objective. Resource-share fairness and completion-delay fairness therefore need separate measurements.

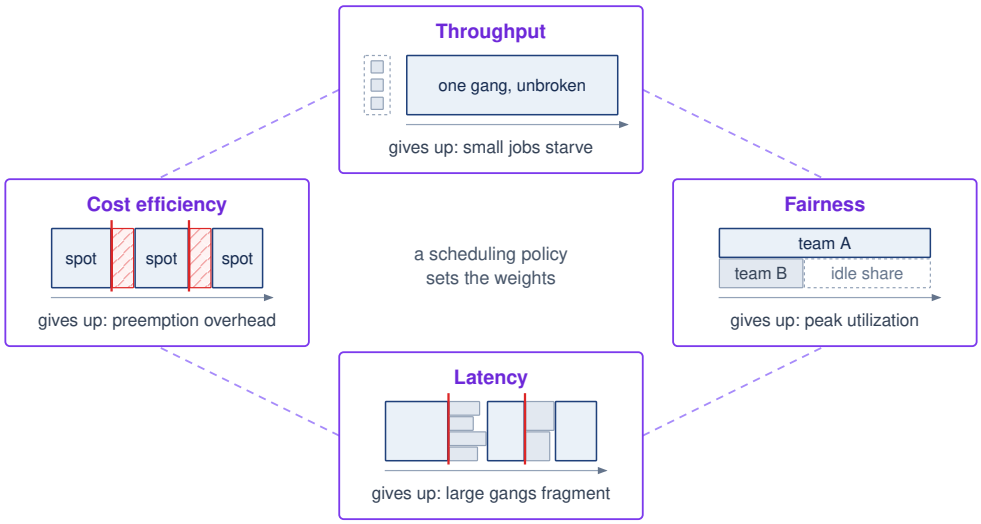


Figure 0.94: Scheduling trade-offs across competing fleet objectives: A four-way trade-off diamond (Throughput, Latency, Fairness, Cost Efficiency) illustrates the tensions governing cluster scheduling. Throughput favors long, unbroken runs; Latency favors aggressive preemption for interactive jobs; Resource-share fairness can constrain placement to equalize shares; and Cost Efficiency uses discounted, interruptible capacity. Each vertex sketches a four-GPU pool over time as that objective would schedule it and names a possible cost of favoring it; the conflicts depend on workload and available capacity.

Consider a 64-GPU fine-tuning run of the same 175B-parameter model, a far smaller allocation than its 1,024-GPU pretraining run. If it sustains high utilization for days, an uninterrupted allocation amortizes launch overhead across a long execution. Admitting it may nevertheless require draining 64 suitably placed GPUs, delaying smaller experiments. Conversely, repeatedly filling available gaps with short jobs can prevent the large job from assembling its required group. Preemption or resizing can recover flexibility only if the job supports the transition and its cost is acceptable. The policy must therefore compare useful throughput with completion delay for both job classes. In scheduler terminology, those choices often appear as quality-of-service classes: job-priority tiers that decide which objective wins when throughput, latency, fairness, and cost collide.

Napkin Math 8.1: The queuing theory of GPU clusters

To isolate the effect of runtime variability, consider an M/G/1 queue with first-come-first-served service. Kendall notation names the queue by its arrival process, service-time distribution, and server count: M for memoryless (Poisson) arrivals, G for a general service-time distribution, and 1 for a single server. Treating a fleet as one server means modeling its aggregate capacity as a single resource that works through one job at a time, with each job's service time equal to its GPU-hours divided by the fleet's GPU count. That mapping ignores gang packing and parallel admission, so it isolates the variability effect rather than predicting a real fleet's wait. Jobs arrive according to a Poisson process (λ_{arr}), and independent service times follow a general distribution (G) with mean $1/\mu$ and finite standard deviation σ. When offered load is below service capacity, the Pollaczek-Khinchine formula gives the steady-state expected waiting time in the queue (W_q):

$$\frac{W_q}{1/\mu} = \frac{\rho_{\text{serv}}}{1-\rho_{\text{serv}}} \cdot \frac{1+c_s^2}{2}$$

Here, $\rho_{\text{serv}} = \lambda_{\text{arr}}/\mu$ represents offered load relative to the model's service capacity, $1/\mu$ is the average job duration, and $c_s = \sigma\mu$ is the **coefficient of variation** of job duration. The right-hand side is therefore the waiting time expressed as a multiple of the average job duration; a fleet's measured GPU-busy percentage is not automatically this model's load.

An exponential service-time distribution provides a reference case, yielding $c_s \approx 1$. A mixed ML queue can have much greater variability when short debugging jobs measured in minutes share capacity with training runs measured in weeks. The representative $c_s = 3$ calculation in this callout captures that variability without claiming a universal fleet constant. The impact on wait times is multiplicative. For the scheduling argument here, the single-server multiplier is sufficient; section 4 develops an explicit single-server surrogate for batched serving and explains why multi-server, finite-buffer M/G/c/K systems require additional modeling.

At 80 percent utilization ($\rho_{\text{serv}} = 0.8$): with an exponential workload ($c_s = 1$), $W_q = 4\times$ the average job duration. With an illustrative high-variability workload ($c_s = 3$), $W_q = 20\times$ the average job duration. In this M/G/1 model, service-time variability multiplies waiting time at the same offered load. The example does not prescribe a universal GPU-utilization threshold or model gang placement directly. It explains why capacity planning needs the service-time distribution and queue-delay objective as well as average load.

Core Allocation Constraints

A scheduling objective can only choose among allocations that a job can actually run. Fairness must be computed across every resource a tenant consumes, a request must fit every dimension of the node that receives it, a rigid group must arrive whole, and the resources each job holds must not block one another. Each of these constraints narrows the feasible set before any objective selects within it.

Dominant-resource fairness allocation

Dominant-resource fairness (DRF) makes a multi-resource entitlement comparable by normalizing each tenant's allocation against fleet capacity and taking its largest share (Ghodsi et al. 2011). Consider the deliberately small cluster in table 0.71: 8 GPUs, 32 CPU cores, 256 GB of memory, and 80 Gb/s of network capacity. Tenant A's replica requires 1 GPU, 4 cores, 32 GB, and 10 Gb/s; Tenant B's distributed worker requires 2 GPUs, 2 cores, 16 GB, and 20 Gb/s.

Table 0.71: Worked DRF allocation: Progressive filling gives Tenant A four one-GPU replicas and Tenant B a pair of two-GPU workers. Both tenants reach a dominant share of 0.50 even though their CPU and memory allocations differ. GPUs and network are jointly saturated; CPU and memory remain available but cannot increase either allocation without exceeding a saturated resource.

Tenant	Allocation	GPU share	CPU share	Memory share	Network share	Dominant share
A	4 replicas	$4/8 = 0.50$	$16/32 = 0.50$	$128/256 = 0.50$	$40/80 = 0.50$	0.50
B	2 workers	$4/8 = 0.50$	$4/32 = 0.125$	$32/256 = 0.125$	$40/80 = 0.50$	0.50

For tenant i, define its dominant share as $d_i = \max_r(a_{i,r}/C_r)$, where $a_{i,r}$ is its allocation of resource r and C_r is fleet capacity for that resource. The calculation equalizes d_i, not every resource share. One A replica raises A's dominant share by $1/8$; one B worker raises B's by $2/8$. Progressive filling therefore grants roughly two A replicas for each B worker until both dominant shares reach 0.50. This is a fair policy target, but it is not yet a feasible placement. If B's two workers form one four-GPU gang, the four GPUs must become available atomically; if tensor parallelism requires one NVLink domain, four free GPUs scattered across nodes do not satisfy the allocation; and if the job requires 80 GB HBM accelerators, four incompatible GPUs do not count at all. A production scheduler therefore applies capability, gang, and topology constraints to the feasible set, then uses DRF to choose fairly among allocations that can actually run. The order is not a convenience. Feasibility comes before fairness (principle 14) because a fair share of accelerators on which the job cannot run delivers no progress to the tenant who holds it. When no equal-share placement exists, the scheduler should report the constraint causing the deviation rather than silently presenting an infeasible entitlement as service delivered.



Lighthouse 8.1: Lighthouse archetypes: Placement changes fairness

The same resource share has different meaning across the three lighthouse workloads introduced in section 11:

- **Archetype A (GPT-4/Llama-3)** needs a rigid, topology-compatible gang. Fractional allocations below its minimum parallel configuration deliver no progress, so fairness must include maximum feasible wait for a contiguous placement rather than GPU-hours alone.
- **Archetype B (DLRM at Scale)** couples accelerator memory to sparse-routing bandwidth. A nominal GPU allocation is infeasible when embedding shards or network capacity cannot follow it, so network and memory must enter the dominant share and placement must protect the serving-latency envelope.
- **Archetype C (Federated MobileNet)** schedules participation rather than data-center GPUs. Eligibility filters for power, connectivity, and device capability can systematically exclude parts of the population, so fairness must be audited through participation and outcome rates across device and user groups, not equal device counts in a round.

The common rule is to define the feasible bundle first and assess fairness over useful progress second. Treating every accelerator or client as interchangeable would conceal the constraint that makes each archetype difficult.

Bin packing

Bin packing[4] captures a basic placement problem: fitting jobs of varying sizes into fixed-capacity nodes. This problem is NP-hard in its general form, meaning no known algorithm finds optimal solutions in polynomial time. Practical heuristics such as first-fit decreasing and best-fit decreasing offer tractable choices, but their performance depends on job sizes and placement constraints. How much usable capacity a heuristic recovers in a heterogeneous ML fleet has to be measured against that fleet's job mix, because the classical guarantees cover only one-dimensional packing.

[4] **Bin Packing**: First-fit decreasing has a classical asymptotic $11/9$ approximation ratio for one-dimensional bin packing, with an additive constant in the finite-instance bound. That result does not guarantee the same ratio for ML placement with several resource dimensions, topology constraints, and indivisible gangs. A scheduler must evaluate its heuristic against feasible placements and the stranded capacity it leaves.

Consider a 64-node cluster with 8 GPUs per node, totaling 512 GPUs. If every job requires 6 GPUs within one node, only one such job fits per node, leaving 2 GPUs unused and reducing effective capacity for this workload to 75 percent. The remaining 2 GPUs per node cannot be combined across nodes into another feasible six-GPU allocation, although smaller compatible jobs could use them. With a mix of 1-GPU, 3-GPU, and 7-GPU jobs, fragmentation depends on the placement and the pending requests; total free capacity can exceed a waiting job's demand while no individual node has enough space. Figure 0.95 maps this stranded capacity across an 8×8 allocation grid: although 19 slots (30 percent of cluster capacity, dashed white cells) sit idle across nodes 0 through 7, active allocations (J1 through J15) leave every node partially occupied, blocking a pending 8-GPU job that requires an entire unfragmented node.

ML placement is a multi-dimensional packing problem. Jobs require GPUs together with CPU cores for data preprocessing, host memory for data loading and augmentation pipelines, local SSD storage for dataset caching, and network bandwidth for gradient synchronization. A job requesting 4 GPUs, 32 CPU cores, and 256 GB of RAM may not fit on a node that has 4 free GPUs but only 16 free CPU cores because other jobs have consumed the host CPU for preprocessing. The scheduler must simultaneously satisfy all resource dimensions, and the job fits only if every dimension has sufficient capacity on the selected node. A bottleneck in any one dimension can therefore strand capacity in the others.

Locality constraints further restrict placement beyond simple resource availability. A training job may require tensor-parallel groups to remain within NVLink-connected nodes when its communication budget cannot tolerate the lower per-endpoint bandwidth of the external fabric (450 GB/s per direction intra-node vs. 50 GB/s per port inter-node). On this topology, where NVLink does not connect the nodes, a job requesting "4 GPUs with NVLink connectivity" cannot use 2 GPUs from node A and 2 from node B, even if all 4 GPUs are individually available and the total capacity is sufficient. These topology constraints turn resource counts into a placement problem where which specific resources are available matters as much as how many. A capacity-feasible packing must also pass the job's locality constraints.

Schedulers address fragmentation through several complementary strategies, each targeting a different aspect of the problem. The first, backfill, lets smaller jobs run in the gaps while a large job waits for contiguous resources; section 5 develops it together with the reservation it must protect and the runtime estimates it depends on.

Periodic **defragmentation** migrates or preempts low-priority jobs to consolidate free resources into contiguous blocks, analogous to memory compaction in operating systems. The scheduler identifies nodes where partial allocations leave stranded resources, preempts the jobs occupying those resources, and re-schedules them on nodes where they can be packed more efficiently. The cost includes state transfer and restart, plus replay of work not captured by a valid checkpoint. A graceful checkpoint can preserve recent progress, but still takes time and storage bandwidth. The scheduler must weigh these costs against the benefit of starting large jobs sooner. Low-demand periods reduce the number of competing jobs affected by the move.

A third strategy, **over-subscription**, admits more demand than a capacity dimension can sustain simultaneously, but only where the resource is divisible and the scheduler can bound interference. Average activity of a GPU's streaming multiprocessors (SMs), its compute units, does not create fractional whole GPUs. A job that reserves device memory, requires an exclusive CUDA context, or belongs to a rigid gang still occupies its assigned device while kernels are idle. Statistical multiplexing can be safe for explicitly shareable CPU, network, storage, or partitioned GPU capacity when tenants have measured, weakly correlated peaks and enforceable limits. It is unsafe to convert 70 percent average GPU utilization into a 1.4× device overcommit ratio. Whole-device capacity should instead be recovered through preemption, elastic resizing, or an isolation mechanism such as Multi-Instance GPU (MIG) hardware partitioning or NVIDIA's Multi-Process Service (MPS), which lets several processes' kernels share one device, provided the scheduler models each mechanism's memory, compute, and fault-sharing contract explicitly. Both reappear with the serving workloads they suit best in section 15.

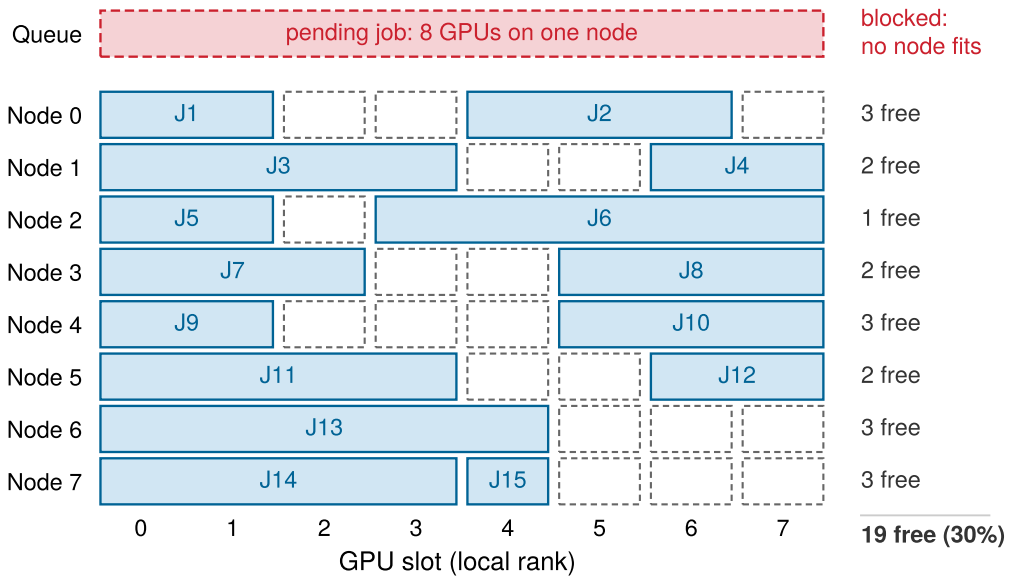


Figure 0.95: The fragmentation problem: A snapshot of an 8-node cluster (rows) with 8 GPUs each (columns). Blue blocks mark the slots each active job holds (J1 to J15); dashed white cells are free, and the count at the right of each row gives that node's free slots. Although 19 GPUs, roughly 30 percent of capacity, are free, every node still holds at least one busy slot, so the pending job above the grid, which needs a full node, cannot be placed. Fragmentation, not total capacity, sets what the scheduler can admit.

Gang scheduling

Partial allocation of rigid multi-GPU jobs creates a distributed scheduling failure mode in which two jobs each hold half the resources they need and block each other indefinitely while every allocated GPU sits idle. In the left panel of figure 0.96, jobs J1 and J2 each hold 4 of the 8 GPUs they require, and the whole pool stalls. Atomic gang scheduling (right panel) instead grants J1 all 8 GPUs as one allocation while J2 waits without holding any, which prevents this allocation deadlock.

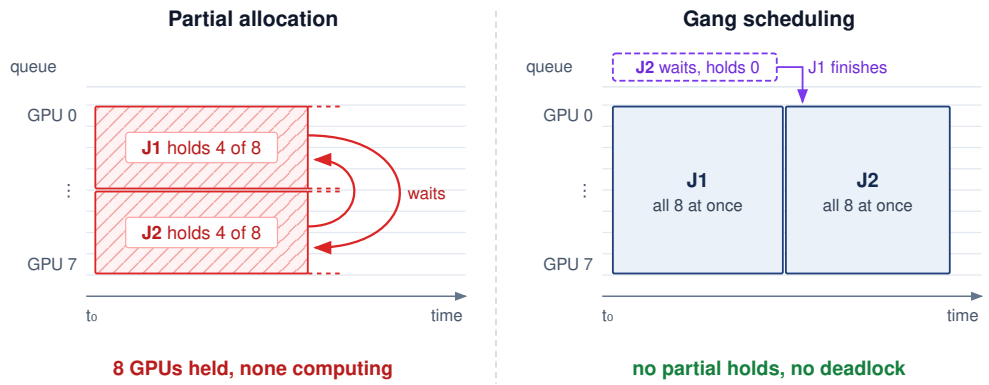


Figure 0.96: The distributed deadlock (hold and wait): In a non-gang scheduler (left), job J1 acquires half the cluster and waits for the rest, while job J2 acquires the other half and waits for J1 to release its GPUs. Neither can proceed, and 100 percent of the cluster sits idle. Gang scheduling (right) solves this by mandating atomic allocation: a job is either granted its entire N-GPU requirement simultaneously or it waits in the queue without holding any resources.

Definition 8.1: Gang scheduling

Gang scheduling is the ML cluster scheduling policy that atomically allocates the resources required by a job's minimum viable execution group, so a rigid group either receives its complete allocation or waits without retaining a partial one.

1. **Significance**: A rigid synchronous job configured for 1,024 GPUs but holding only 512 GPUs completes zero training steps, not half as many: each collective stalls until every rank in its communication group arrives, so the held GPUs consume power and capital at zero useful output. Without atomic allocation, two such jobs can each acquire half the cluster and deadlock, both at zero progress while consuming the full cluster's operating cost.
2. **Distinction**: Unlike a malleable service or parallel job that can make progress across a resource range, rigid synchronous training has step-function utility: the minimum viable gang or nothing. The distinction is a property of the execution graph, not of whether the workload is labeled ML, cloud, or HPC.
3. **Common pitfall**: A frequent misconception is that priorities or quotas alone solve this. Atomicity must extend to every co-scheduled resource the job needs to make progress (accelerators, high-bandwidth interconnect domains, network capacity for collectives); enforcing it at GPU granularity alone recreates the deadlock one resource layer down.

The partial-allocation pattern is a hold-and-wait deadlock[5] in which two jobs each hold half the cluster and neither can proceed. Its price is the whole allocation for as long as the cycle persists. At the scale of the chapter's reference workload, two 1,024-GPU gangs that have each acquired 900 GPUs from a pool too small to complete either one burn about $1,800 per hour apiece. The limiting case is two jobs that each request the entire cluster, the example OpenAI used to motivate group admission (war story 8.1). On the 10,000-GPU cluster, a deadlock that strands every device wastes $20,000 per hour at the chapter's rate while producing no progress for either job. Measured against the stake computed at the start of the chapter, raising utilization from 50 percent to 80 percent recovers about $144,000 per day in equivalent capacity value, so about 7 hours of such a deadlock erase a full day of that gain. Gang scheduling does not create the gain, but it protects it. For a rigid job J requiring N GPUs, the scheduler must grant all N GPUs atomically or leave the job queued without a partial allocation. This removes hold-and-wait for the resources covered by that allocation; it does not prevent later deadlocks in application code or auxiliary resources. Implementing atomic admission efficiently remains a central challenge in cluster scheduling algorithm design.

[5] **Hold-and-wait**: One of the four Coffman conditions (mutual exclusion, hold-and-wait, no preemption, and circular wait), all of which must hold for deadlock to occur (Coffman et al. 1971). Gang scheduling removes hold-and-wait through atomic allocation, which is why it prevents this deadlock by construction; the price is reduced packing flexibility.

Naive gang scheduling is wasteful in predictable ways. Atomic allocation means the waiting job holds nothing, yet a large gang will never assemble if every freed GPU goes to a smaller job. The scheduler therefore places a **reservation** for the job at the head of the queue, draining capacity toward it by declining to start new work on GPUs that the gang will need. If the cluster has 900 free GPUs and that job requests 1,024, the reservation keeps the 900 GPUs idle until 124 more become available, potentially wasting thousands of GPU-hours. Backfill scheduling addresses this by identifying jobs in the queue that can fit within the 900 available GPUs without delaying the large job's expected start time, an idea popularized in the ANL/IBM SP scheduling system (Lifka 1995). A 128-GPU job with an estimated runtime of 2 hours is a backfill candidate if the 124 additional GPUs needed by the large job will remain unavailable for at least 2 hours. Protecting the reservation requires an enforced runtime bound or a preemption contract that releases the backfill allocation in time, including any checkpoint and cleanup delay. The estimate identifies an opportunity; the release contract makes the reservation enforceable.

The accuracy of runtime estimates determines backfill effectiveness, and this creates a game-theoretic challenge. If users overestimate runtimes, fewer jobs appear to fit a backfill window. If they underestimate, the scheduler may need to preempt a backfilled job to honor the reservation, paying recovery costs and losing unsaved progress. A policy that kills jobs at their declared limit encourages conservative estimates. Tiresias (Gu et al. 2019), discussed in section 14, avoids duration estimates when setting priority by using observed resource consumption. That choice addresses

ordering under uncertainty, while reservation protection still needs an enforced runtime bound or release contract that says when a backfilled job will give its capacity back.

Gang scheduling removes the hold-and-wait deadlock, but another waiting pattern remains. Priority inversion can still strand reserved GPUs behind jobs that cannot finish their own exit path.

Deadlock prevention and detection



Priority inversion is a wait-for chain, not a root-failure tree.

Gang scheduling eliminates the hold-and-wait condition for the atomically allocated bundle, but it does not immunize the cluster against all forms of resource contention. Later requests for auxiliary resources can still create a cycle of dependencies. Priority rules can also prevent a resource holder from making progress without creating a cycle. Distinguishing these cases matters because breaking a deadlock and providing a starved job with enough resources to exit require different interventions.

Priority inversion occurs when a high-priority job waits on a low-priority resource holder whose progress other work delays. Consider the 64-GPU fine-tuning run of the 175B-parameter model, submitted at high priority. The scheduler has reserved 60 available GPUs, but the remaining 4 are held by a low-priority data processing job. Normally, the scheduler would preempt the low-priority job to satisfy the high-priority request. However, if a stream of medium-priority development jobs saturates the cluster's CPU or network bandwidth, starving the low-priority job of the resources it needs to checkpoint and exit, the low-priority job stalls. Its graceful release path cannot complete. The high-priority job waits for the low-priority job, which is effectively blocked by the medium-priority jobs. The 60-GPU idle block persists until the exit path receives resources or an enforced termination policy reclaims the remaining GPUs, potentially losing uncheckpointed work.



Priority inversion: the high-priority job waits on a low-priority holder that medium-priority work starves.

Definition 8.2: Priority inversion

Priority inversion is an ML cluster scheduling pathology in which a high-priority task is forced to wait for a lower-priority task to release a shared resource.

1. **Significance**: It ties the progress of a high-priority job, and the accelerators reserved for it, to the progress of the lowest-priority job in the wait-for chain. In ML clusters, this typically occurs when a low-priority job holding GPUs is starved of auxiliary resources (for example, bandwidth for checkpointing), preventing it from finishing and releasing the accelerators needed by high-priority workloads.
2. **Distinction**: Unlike standard queuing (where tasks wait their turn), priority inversion involves an active blockage: the high-priority task is ready to run but is transitively dependent on a task that the scheduler does not prioritize.
3. **Common pitfall**: A frequent misconception is that strict priority levels solve this. Raising the waiting job's priority does not supply the CPU or bandwidth that its lower-priority resource holder needs to exit; the preemption policy must protect that release path.

Prevention and detection address different parts of this problem. Atomic allocation prevents hold-and-wait for the resources included in the gang, while reserving checkpoint bandwidth allows a preempted job to complete its exit path. Timeouts instead bound how long the system waits before investigating or reclaiming an allocation; they do not prevent deadlock states from arising. Monitoring can trigger recovery when progress stops, but safe reclamation still requires enforcing the new ownership decision.

Detection, unlike exact placement search, is computationally cheap. Before feasibility filtering, a cluster with 10,000 GPUs and 500 pending jobs can have more than 10^{15} candidate allocations, which puts exhaustive allocation search out of reach. Detection instead works on a **wait-for graph**, a directed graph with one vertex per job and an edge from job A to job B whenever A waits for a resource that B holds. A cycle identifies a potential deadlock. It establishes deadlock when every edge is an unavoidable blocking dependency and no alternative resource allocation can let a member proceed. Finding a cycle in an already constructed graph takes time linear in its vertices and edges. The difficulty lies in construction. Resource state changes continuously across a distributed control plane, so the scheduler rarely holds a complete, current graph, and a cycle detected on stale state may already have resolved while a real one goes unseen.

Large-scale schedulers therefore supplement wait-for detection with mechanisms that preserve liveness under incomplete state. A **lease-based resource** gives every allocation a time-to-live; expiry authorizes reclamation only when the resource manager enforces revocation and cleanup before reuse. **Progress monitoring** checks advancement through signals such as completed-step counters, using GPU utilization and heartbeats as supporting observations rather than proof of useful work. When the scheduler must preempt a lower-priority job, **holistic preemption** reserves the CPU, network, and storage bandwidth needed for that job to checkpoint and exit cleanly; otherwise, the victim can be too starved to release the accelerators. False failure suspicions can cost useful work, but must not bypass the ownership checks required for safe recovery.

Heterogeneous gang scheduling

The homogeneous case uses a bulk synchronous parallel workload with N workers executing the same compute graph, but atomic allocation does not require identical workers. Some training workflows contain several roles with different resource profiles. In preference-training pipelines such as reinforcement learning from human feedback (RLHF), for example, one component may update the policy while another scores outputs or supplies reference behavior. The scheduler still sees one job, but the gang contains trainers, evaluators, and inference-style workers that need different GPU counts, memory footprints, and lifetimes.

> Systems Perspective 8.1: Routing over synchrony
>
> Heterogeneous gang scheduling extends atomic allocation to the roles that must coexist for a workflow to progress. A viable group might pair high-HBM nodes for memory-bound generation with compute-oriented nodes for policy updates. The orchestration problem then shifts from packing a homogeneous ring toward routing data: rather than reducing gradients among identical workers, the job streams rollouts from generation workers to the workers that compute policy updates, so placement must also support the data exchanged between those roles. Rollout and training stages may exchange work in batches or through a buffered pipeline; their measured production and consumption rates determine where queues grow or accelerators wait. The scheduler needs a minimum viable resource bundle and a supported scaling policy for each role, rather than an assumption that all workers are interchangeable or perfectly balanced.

Homogeneous and heterogeneous jobs share an allocation requirement: the scheduler must assemble a viable group before expecting progress. Backfill can use capacity while that group waits, provided runtime estimates or preemption contracts protect the reservation. Enforcing these policies requires a control plane that represents ownership and reconciles allocations after failures.

Orchestration Paradigms

A pending gang and a queue of small backfill jobs need both a policy for sharing capacity and a control plane that can enforce it. The policies just developed apply across platforms; the orchestration paradigm determines how the platform represents allocations and recovers when observed state diverges from them. Slurm, shaped by HPC batch systems, favors explicit resource requests and predictable allocation. Kubernetes, shaped by cloud-native service management, favors declared desired state and continuous reconciliation. The choice is therefore not Slurm vs. Kubernetes as products; it is which control model best matches the workload mix, failure behavior, and operational culture of the fleet.

The control-plane architectures in figure 0.97 contrast two control models. Slurm follows an imperative batch model: the user states the resources a job needs, and the central slurmctld dispatches that allocation through per-node slurmd daemons. Kubernetes follows a declarative model: the user states what should be running, and controllers reconcile observed state toward that declaration through the API server and node agents. Both platforms accept explicit resource requirements and track execution state, so the useful distinction is which lifecycle the platform manages directly: an allocated batch job or a collection of workloads maintained by controllers. That distinction shapes

how ML workloads are admitted, monitored, and recovered from failure, and distributed training still needs framework-level coordination under either model.

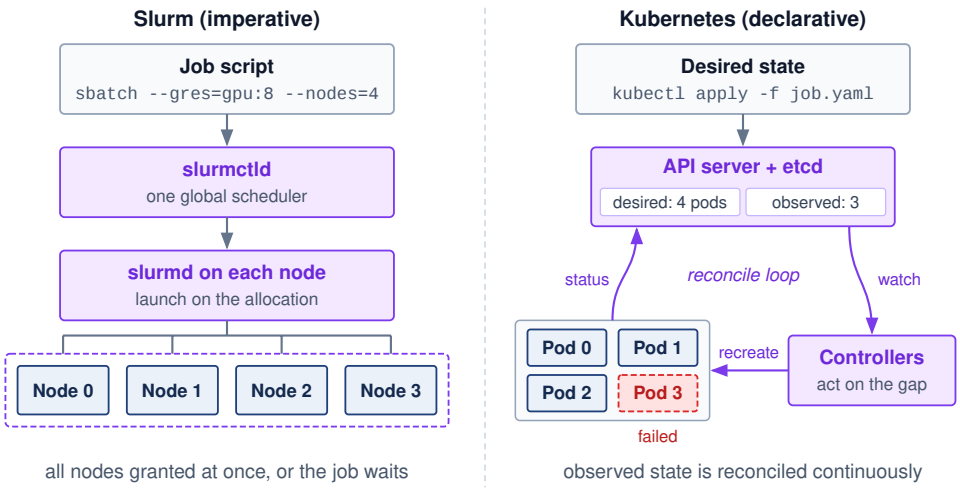


Figure 0.97: Architectural paradigms: Slurm vs. Kubernetes: Slurm (left) uses an imperative batch model where users submit explicit resource requests to a centralized controller (`slurmctld`) providing deterministic atomic allocation. Kubernetes (right) uses a declarative service model where controllers continuously reconcile observed cluster state in `etcd` against desired state specifications.

Slurm and HPC scheduling heritage

The Slurm Workload Manager[6] originated at Lawrence Livermore National Laboratory as a scalable, fault-tolerant resource manager for Linux clusters (Yoo et al. 2003). Its batch-oriented design fits the distinctive requirements of scientific computing: long-running jobs, expensive shared hardware, and users who can specify resource needs in advance. In ML infrastructure, the same model maps to GPU training through partitions for heterogeneous accelerator pools and predictable allocations for long-running distributed jobs.

Slurm's batch submission model makes resource requirements explicit. Users submit job scripts, and the scheduler allocates resources within eligible partitions according to policy and availability. A submission of `sbatch --gres=gpu:8 --nodes=4` requests 8 GPUs on each of 4 nodes, a 32-GPU allocation. The request supplies a capacity contract, but useful execution still depends on the selected hardware and the application's launch configuration. Overstating requirements strands resources; understating them can cause memory failures or poor performance.

Slurm's architecture consists of a central controller daemon (`slurmctld`) that maintains the global view of cluster state and makes scheduling decisions, and per-node daemons (`slurmd`) that manage local resources and execute jobs. This centralized architecture provides the authoritative allocation model discussed in section 3: the controller is the source of truth for resource assignments, reducing the risk of conflicting allocations. The cost is a potential single point of failure (addressed through active-passive failover) and a scheduling-throughput limit. As fleets grow, organizations may partition the cluster or federate schedulers to bound scheduling latency and failure impact.

A typical ML cluster configuration defines Slurm partitions by accelerator type and interconnect (table 0.72).

6 **Slurm Workload Manager**: Originally "SLURM," an acronym for Simple Linux Utility for Resource Management, the project dropped the acronym capitalization in 2012. Developed at Lawrence Livermore National Laboratory beginning in 2002, Slurm's centralized controller (`slurmctld`) maintains a single authoritative view of resource allocations. At very large scale, operators may partition fleets or federate schedulers to keep scheduling latency, policy isolation, and failure domains manageable.

Table 0.72: Slurm Partition Configuration: Partitions organize heterogeneous accelerators into logical pools matched to workload characteristics. NVLink-connected partitions support tensor parallelism, while PCIe partitions serve workloads that rely primarily on data parallelism. Separating inference and debug partitions prevents experimental workloads from impacting production serving.

Partition	GPUs/Node	Interconnect	Typical Use
dgx-a100	8× A100	NVLink + IB NDR	Large LLM training
a100-pcie	4× A100	PCIe + IB HDR	Medium training
inference	2× A10G	Ethernet	Model serving
debug	1× V100	Ethernet	Development

Within a partition, a request specifies both the number of GPUs a job needs and the **allocation shape**: how those GPUs are distributed across nodes. In Slurm, `--gres=gpu:N` or `--gpus-per-node=N` requests a per-node count, while `--gpus=N` requests a job-wide total. Whether the scheduler may split a node between jobs is a separate consumable-resource policy (Slurm's `select/cons_tres` plugin), and a node-exclusive policy strands the unused devices in the six-on-eight example of section 4. Shape decides communication. In an eight-GPU-per-node pool, a 16-GPU request that also fixes eight GPUs per node (`--gpus-per-node=8`) yields two fully populated nodes, whose NVLink domains follow from the node hardware rather than the count. A request for 16 GPUs with no per-node constraint gives the scheduler more freedom, so it can start sooner on partially occupied nodes, but it may spread the group across several of them. Whether that flexibility is useful depends on the parallelism configuration and its communication budget. Tensor-parallel groups with frequent exchanges may justify compact placement, while data-parallel groups with well-overlapped communication may tolerate a wider allocation.

The **fair-share scheduling** mechanism uses past consumption to influence future priority under contention. An illustrative heuristic combines base priority, the user's target fair share (F_{target}), recent actual consumption (F_{actual}), and a small stabilizing constant (ϵ_{stab}); it illustrates the feedback without reproducing Slurm's multifactor priority calculation:

$$\text{Priority}_{\text{effective}} = \text{Priority}_{\text{base}} \times \frac{F_{\text{target}}}{F_{\text{actual}} + \epsilon_{\text{stab}}} \tag{0.29}$$

With base priority and target share fixed, equation 0.29 lowers priority as recent consumption increases. Doubling consumption approximately halves this illustrative priority when the stabilizing constant is negligible. Actual admission also depends on other priority factors and feasible resources; low recent usage does not guarantee an immediate start.

The time decay of usage history determines how quickly the system "forgives" past heavy usage. A half-life of one week means that a researcher's heavy usage from two weeks ago contributes only 25 percent to their current usage calculation. Short half-lives make the policy more responsive to recent changes but can encourage alternating bursts of usage. Long half-lives retain the effect of a completed large project when its researchers return with smaller jobs. The useful decay window depends on the fleet's job durations and the period over which the organization intends to balance access.

Preemption policies enable high-priority jobs to reclaim resources from running workloads, and for ML training the reclaim must leave time to save state. Slurm expresses that time as a grace period. It signals the selected job (`SIGTERM`), waits the configured `GraceTime`, and only then kills it (`SIGKILL`); under `PreemptMode=REQUEUE` it can also requeue an eligible job to run again later. Neither the signal nor the requeue saves model state. The application must handle the signal, publish a valid checkpoint within the grace period, and restore it on restart. If termination precedes completion of that save, recovery uses the last valid checkpoint and replays subsequent work.

↩ Checkpointing for progress preservation, including the checkpoint interval and coordination patterns, is established in section 13.

Preemption improves access for high-priority work but can reduce overall useful throughput. Forced termination loses progress after the last valid checkpoint and adds restart and reload time. A graceful preemption can save that progress, but still incurs checkpoint and transition overhead. If checkpoint intervals are long (for example, hourly) and forced preemptions are frequent, replay can dominate the cost. A cooldown policy can limit repeated interruption, at the expense of delaying later high-priority requests.

Slurm's strengths for ML training include explicit batch allocations, configurable fair-share policies, and integration with MPI-based distributed training frameworks. A mixed training-serving fleet also needs a service lifecycle that maintains ready replicas as demand and failures change. Inside a batch scheduler, adding or removing an inference replica means submitting or canceling a job, a far heavier operation than a controller adjusting a replica count, and a failed replica stays down until something resubmits it. Operators must integrate replica health, replacement, and demand-driven scaling with the batch scheduler, or assign those responsibilities to a service orchestration platform.

Advanced Slurm configuration for ML

Once Slurm owns batch training, the remaining question is how much ML semantics the batch system can see. Standard partitions and fair-share policies schedule ordinary jobs; large-scale deep learning needs configuration that exposes sweep structure, asymmetric pipeline resources, hardware health at job boundaries, and the economic weight of different accelerator types.

A hyperparameter sweep is the opposite of a gang. Job arrays submit many trials as one record (for example, `--array=0-99`), and each trial reads its index from the `SLURM_ARRAY_TASK_ID` environment variable to select its configuration. Slurm schedules the elements independently, so individual trials become ideal backfill candidates that fill small gaps in capacity, while the array keeps submission and management overhead low without making the trials one indivisible gang.

Heterogeneous jobs carry the heterogeneous gang of section 6 into a batch allocation. One job can contain components with distinct resource requests, admitted together. The 64-GPU fine-tuning run of the 175B model, for example, could request 8 GPU nodes for training and 2 CPU-only nodes for on-the-fly tokenization as a single allocation, then launch training on the GPU component and data workers on the CPU component (`srun --het-group=0` and `--het-group=1`). This separation helps only if the data workers and transfer path sustain the training stage's consumption rate; a heterogeneous allocation exposes that choice but does not itself balance the pipeline.

Prolog and epilog scripts turn job boundaries into admission health checks. A prolog runs on each allocated node before launch and can check reported topology (`nvidia-smi topo -m`), ECC counters, and InfiniBand link status. A node that fails is drained and the job requeued elsewhere, preventing launch on hardware that failed those checks. An epilog can remove job-owned orphan processes and shared-memory segments (`/dev/shm`) and record final utilization. These checks reduce exposure to known faults; they do not establish delivered bandwidth or exclude all silent corruption. For the 64-GPU fine-tuning run, testing peer-to-peer throughput across the intended eight-GPU groups would provide evidence beyond the reported topology alone.

Finally, **trackable resources (TRES)** let accounting distinguish resource classes rather than count only CPU time. Configured billing weights can charge different amounts for different accelerators and feed that weighted usage into fair-share policy. The weights express an administrative valuation; they track economic cost only to the extent that the chosen values reflect it. Resource accounting and physical capacity enforcement remain separate responsibilities.

These extensions make Slurm more ML-aware while preserving its batch-scheduler model. Kubernetes starts from a different contract: users declare the desired state of services and jobs, and controllers continuously reconcile the cluster toward that state.

Kubernetes declarative container orchestration

Kubernetes is a common platform for ML infrastructure, particularly for organizations requiring unified management of training and serving workloads (Burns et al. 2016; Cloud Native Computing Foundation 2024). Its **declarative model** expresses a workload's desired state and uses control loops to reconcile observations with that state. The unit it places is the **pod**, one or more containers that share a node and a network identity, and its default scheduler places pods one at a time. The name collides with the hardware pod of section 11, the many racks joined under one fabric. A Kubernetes pod is a software unit that never spans more than one node, so a 64-pod training job is 64 container groups placed onto nodes, all of which can sit inside one hardware pod. Controllers above the scheduler give groups of pods a purpose: a Deployment keeps a set number of identical replica pods running, while a Job runs pods until they complete, retrying failures under a stated policy. The workload controller therefore determines what completion, replacement, or continued availability means.

Failure handling reveals the importance of the workload contract. Slurm can detect node failures and requeue eligible jobs when configured to do so. Kubernetes controllers maintain workload-specific goals, such as a Deployment's replica count or a Job's completion and retry policy. A replacement pod still has to be placed, become ready, and rejoin the distributed training run before progress resumes. Training operators can coordinate worker creation, while the framework remains responsible for valid state and group recovery. Both platforms therefore require an explicit agreement between allocation, process lifecycle, and application recovery.

Kubernetes' control loop architecture uses the controller pattern:[7] controllers observe and update API objects through the API server, which persists cluster state in etcd, a replicated key-value store. Those objects contain desired state and reported observations, not instantaneous physical truth. The pattern repeats at every level: the Deployment controller reconciles the number of pod replicas, the scheduler binds pending pods to nodes, the kubelet (the agent on each node) keeps its assigned containers running, and the node controller marks nodes that stop reporting. Each component acts independently and communicates only through API objects, which makes the system resilient to the failure of any single controller. The price of that independence is that their interactions require clear ownership and retry behavior, particularly when a failed node's last reported state no longer describes its execution.

Kubernetes needs an explicit resource representation before it can place GPU workloads. In the device-plugin model, **device plugins** expose accelerators as schedulable extended resources. The NVIDIA device plugin registers GPUs with the kubelet, enabling pod specifications that request GPU resources declaratively through the standard Kubernetes resource model. Listing 0.5 shows the resulting pod fragment.

7 **Controller Pattern (Reconciliation Loop)**: A "level-triggered" design reconciles the current desired and observed states rather than depending on every intermediate event. A restarted controller can resume from durable state if its actions tolerate retries and its observations expose unfinished work. Multiple controllers still need distinct responsibilities so that one controller's correction does not repeatedly undo another's.

Listing 0.5: Kubernetes GPU Allocation: Pod resource specification requesting GPUs through the NVIDIA device plugin. The `nvidia.com/gpu` resource name follows Kubernetes extended resource conventions, where the domain prefix identifies the device plugin vendor. This declarative syntax enables portable GPU workload definitions across any Kubernetes cluster with the NVIDIA device plugin installed.

```
# Kubernetes pod resource specification for GPU allocation
resources:
  limits:
    nvidia.com/gpu: 4  # Request exactly 4 GPUs for this pod
  requests:
    cpu: "32"
    memory: "256Gi"
```

When the device plugin exposes exclusive whole GPUs, a small model serving occasional requests can reserve a device while using only a fraction of its compute and memory capacity. Whole-device allocation suits workloads that need the capacity or isolation, but can strand resources for smaller workloads. The resource unit exposed by the plugin therefore matters: sharing or partitioning changes what the scheduler can allocate and what isolation each allocation receives.

Multi-Instance GPU (MIG)[8] technology addresses this inefficiency by partitioning A100 (80 GB) and H100 (80 GB) GPUs into hardware-isolated instances. Unlike software-based GPU sharing, such as time-slicing that context-switches several processes over one whole device, MIG dedicates memory, cache, and compute resources to each instance, reducing interference through those partitioned resources and limiting the noisy neighbor[9] effect. The A100 MIG profiles in table 0.73 show the scheduling consequence: a single physical A100 becomes several fixed-size resources that the device plugin can expose as independently schedulable accelerators.

8 **Multi-Instance GPU (MIG)**: Introduced with the A100 (2020), MIG partitions a single GPU into up to 7 hardware-isolated instances with dedicated memory controllers, L2 cache slices, and compute units (NVIDIA Corporation 2020). The isolation is enforced at the hardware level, not by time-slicing, reducing noisy-neighbor interference relative to software-only sharing. Changing the partition layout requires stopping affected GPU workloads; the scheduler must include that disruption when adapting profiles to a changing workload mix.

9 **Noisy Neighbor**: In GPU clusters, interference arises when one job's bursty network traffic or memory bus utilization slows down a co-located job on the same node. In synchronous training, a delayed flow can extend collective completion when it lies on the communication critical path, propagating one tenant's interference across a worker group.

Table 0.73: A100 MIG Profiles: Multi-Instance GPU configurations trade GPU memory and compute resources for increased sharing density. Each profile provides hardware-isolated resources, making MIG suitable for multi-tenant inference clusters where workloads from different teams or customers must not interfere. The streaming multiprocessor (SM) count determines compute throughput within each instance.

MIG Profile	GPU Memory	SM Count	Typical Workload
1g.10gb	10 GB	14 SMs	Small inference

MIG Profile	GPU Memory	SM Count	Typical Workload
2g.20gb	20 GB	28 SMs	Medium inference
3g.40gb	40 GB	42 SMs	Large inference
7g.80gb	80 GB	98 SMs	Training

Kubernetes' default scheduler places pods independently, so it does not supply the group admission that section 5 requires. Under that default, a 64-pod training job receives 64 separate placement decisions, with no guarantee that all will succeed. If the cluster has resources for 60 pods but not 64, those 60 can occupy capacity while the remaining 4 wait. The platform must therefore configure a group-level admission and placement contract for a rigid job. PodGroup-style abstractions give that contract a unit matching the job's minimum viable execution group rather than an individual pod.

The mechanism that closes this gap is group admission. A **PodGroup** declares a group's minimum runnable membership. The scheduler tentatively reserves a placement for each member as it finds one but binds none of them to nodes until the minimum membership is placed, and it releases every reservation if the attempt fails or times out. Admission and placement thereby become two decisions, with the group admitted only when placement has succeeded for enough of it. The Volcano[10] batch scheduler and the Coscheduling scheduler plugin both implement this pattern. Group admission does not make physical launches simultaneous; nodes can still fail or start at different times, so the framework must establish the communication group before training proceeds.

[10] **Volcano**: Volcano provides a scheduler with batch and gang-scheduling mechanisms. Pods select it through their scheduler name, so it can coexist with Kubernetes' default scheduler. The operational contract must account for interactions between schedulers sharing the same nodes; installing Volcano does not automatically transfer every workload's scheduling to it.

War Story 8.1: OpenAI's gang-scheduling example (2021)

Context: OpenAI scaled Kubernetes clusters to 7,500 nodes for workloads including GPT-3, CLIP, and DALL-E. Its account explains that MPI-coordinated optimizer groups needed all members scheduled before training could progress (Sigler 2021).

Mechanism: The account illustrates the risk with two experiments each requesting the entire cluster. Incremental pod placement could allocate half the capacity to each, leaving neither with a complete group.

Impact: In that example, both jobs hold capacity without making progress. It demonstrates the deadlock mechanism rather than documenting a particular pair of stalled production runs.

Fix: OpenAI reports adopting the coscheduling plugin to add group-aware admission to the Kubernetes scheduler.

Systems lesson: Distributed ML scheduling must encode the job's execution semantics. For MPI-style training, "some pods scheduled" is not partial progress; it is wasted allocation. Production schedulers need gang scheduling, quota controls, and workload-aware policies rather than generic pod placement alone.

Priority classes control scheduling precedence and preemption eligibility. A fleet might give inference higher priority than training to help protect serving service-level objectives (SLOs), but priority cannot replace ready capacity during a demand spike. With `preemptionPolicy: PreemptLowerPriority`, a pending pod can displace lower-priority pods when their removal makes placement feasible. With `preemptionPolicy: Never`, it retains queue precedence without initiating preemption and remains subject to higher-priority preemption. Termination, cleanup, and replacement startup take time. Training applications also need a checkpoint-aware shutdown path that fits the allowed grace period; assigning priorities does not create that path. The policy must balance serving readiness against repeated interruption of training.

Kueue[11] makes admission a separate control decision. It manages when workloads may consume quota, while a compatible scheduler binds their pods to nodes. The admission policy and placement policy must agree on resource types, group requirements, and topology. Separating these responsibilities lets each layer run its own policy, at the price of keeping the two consistent.

Kueue represents each team or project as a queue with a configured quota (a ClusterQueue) and groups queues into cohorts whose members may lend one another unused quota and reclaim it

[11] **Kueue**: Kueue separates workload admission from pod placement. Its all-or-nothing mechanisms include waiting for admitted pods to become ready and requeuing workloads that exceed the configured timeout. Aggregate quota admission alone does not prove that a gang fits the physical topology; the guarantee depends on the configured readiness, topology, and placement mechanisms.

according to preemption policy. A research queue might borrow production capacity off peak, but returning quota is only part of restoring service capacity. Borrowed work must release its resources, and the production workload must obtain a feasible placement and become ready. The reclaim policy must account for that delay rather than treating a quota transfer as instantaneous recovery.

Kubernetes ecosystem for ML training

Group admission handles one constraint that microservice orchestration leaves implicit and distributed training cannot. Four more remain. Workers must launch knowing their peers, collective traffic must avoid network layers built for request traffic, checkpoint writes need bandwidth rather than only storage capacity, and progress must be observable below the container. Operators and plugins add each constraint to the platform; the mechanism matters more than the product that happens to implement it.

Peer discovery is the job of the **training operator ecosystem**, which extends Kubernetes with job-specific resource types (custom resource definitions). In the Kubeflow Training Operator, a `PyTorchJob` declares the number of workers, the container image, and resource requirements; the operator creates the pods and injects the rendezvous address (`MASTER_ADDR` and `MASTER_PORT`), the group size, and each worker's rank (`WORLD_SIZE` and `RANK`), which the framework uses to form its communication group. If a worker pod fails, the operator can detect the deviation and create a replacement pod to restore the desired replica count, but training-state recovery still depends on the framework's checkpoint and rendezvous logic.

Collective traffic is the second constraint. The pod overlay network that the Container Network Interface (CNI) configures, designed for microservice requests, routes packets through software switching on the host CPU, which adds latency and caps bandwidth when it sits on the critical gradient-synchronization path. For bandwidth-sensitive training, **host networking** (`hostNetwork: true`) places pods in the host's network namespace, bypassing the ordinary pod overlay path. It does not itself allocate remote direct memory access (RDMA) devices or grant permission to use them; device exposure, resource requests, drivers, and access controls require separate configuration. Operators such as NVIDIA's Network Operator automate that exposure through RDMA device plugins and GPUDirect RDMA configuration, letting containerized workloads approach bare-metal interconnect performance once the rest of the stack is configured.

Checkpoint bandwidth is the third constraint, because storage integration must account for the checkpoint storm of definition 4.5, in which many workers write large amounts of state together. Kubernetes PersistentVolumeClaims (PVCs) request capacity on a configured storage system but do not reserve checkpoint throughput. A 1,024-GPU training job writing the 2.45 TB resumable checkpoint of the 175B model needs a measured write budget shared with other workloads. Backend bandwidth controls, client throttling, or staggered writes can limit interference; the platform must verify which controls the storage implementation enforces.

Visibility into progress is the fourth. The **observability stack** for training clusters combines general-purpose cluster monitoring with specialized hardware telemetry. Prometheus and Grafana provide the collection and visualization layer, while the Data Center GPU Manager (DCGM) exporter exposes granular GPU metrics: utilization, memory bandwidth, temperature, and ECC errors. These observations locate symptoms; correlating them with step progress, input waits, and communication traces distinguishes useful computation from stalls. Identifying which dependency limits a training job takes that correlation, not a utilization dashboard.

The 1,024-GPU pretraining run for our 175B model illustrates how these responsibilities fit together. One possible deployment defines a `PyTorchJob` with 128 worker pods, each requesting 8 GPUs. Host networking removes the pod overlay from the gradient path, and the Network Operator exposes each node's InfiniBand adapters to the workers through RDMA device plugins. A PVC backed by Lustre provides access to the 6 TB tokenized training corpus and a checkpoint path whose sustained bandwidth must be validated. DCGM metrics stream to Prometheus, supporting alerts on uncorrectable ECC errors and deviations from workload-specific communication baselines.

Paradigm trade-offs and selection criteria

Selecting a control plane requires matching its allocation and recovery contract to the workload mix. Rigid training groups need reliable atomic placement and checkpoint-aware interruption; serving

replicas need readiness checks and continuous recovery. Existing operational expertise and the cost of running a second control plane also shape the choice. A fleet dedicated to long, homogeneous training runs that use bare-metal collectives, operated by a team fluent in batch scheduling, gains most from Slurm's authoritative allocation and mature fair-share. A fleet that mixes training with always-on serving, and already runs cloud-native deployment and observability tooling, gains more from Kubernetes with a gang-admission layer added for its rigid jobs. The comparison that follows separates those requirements before the hybrid designs show how to divide ownership between systems.

The Slurm vs. Kubernetes trade-off organizes around the dimensions most relevant to ML workloads (table 0.74).

Table 0.74: Slurm vs. Kubernetes for ML Workloads: The two paradigms reflect different design philosophies optimized for different workload characteristics. Most production ML platforms use elements of both, with Slurm managing dedicated training clusters and Kubernetes managing inference serving and pipeline orchestration.

Dimension	Slurm	Kubernetes
Scheduling model	Imperative: user specifies exact resources and scheduler allocates them	Declarative: user specifies desired state, system reconciles continuously
Failure handling	Configuration-dependent requeue and checkpoint workflows	Self-healing through control loops
Gang/atomic multi-node start	Atomic job allocation plus backfill; Slurm "gang scheduling" specifically refers to time-slicing/preemption	Production clusters commonly use PodGroup-based support such as Volcano, Coscheduling, Kueue, or upstream alpha gang scheduling
Fair-share	Mature multi-factor priority with configurable decay	Kueue provides basic fair-share with ClusterQueue borrowing
Container overhead	None from a container runtime when jobs run directly on nodes	Configuration-dependent networking overhead and container startup time
Service management	No native support for long-running services	Native Deployment, rolling updates, health checks
Ecosystem	MPI, OpenMP, scientific computing libraries	Cloud-native, microservices mesh, observability stack

The gang-scheduling row of the table compresses a naming collision that is easy to miss. This chapter uses gang scheduling for atomic allocation of a whole execution group, which is the requirement distributed training imposes. Slurm reserves the name for the older, Ousterhout-style meaning of the term, in which co-scheduled jobs share nodes by time-slicing in synchronized rounds. Slurm provides atomic multi-node allocation under its ordinary job model, so the requirement is met even though Slurm's "gang scheduling" option means something else.

The choice of scheduling paradigm also reflects organizational trajectory. Teams starting with HPC-focused training infrastructure may begin with Slurm and add Kubernetes for serving. Teams starting from cloud-native application infrastructure may begin with Kubernetes and add HPC-oriented extensions (Volcano, Kueue) for training. Either path can reach a functional hybrid architecture, but the starting point determines which capabilities are strongest and which require the most investment to develop.

Hybrid architectures in practice

While the choice between Slurm and Kubernetes often appears binary, engineering organizations can deploy **hybrid architectures** that use the strengths of both systems. The relevant boundary again follows workload semantics rather than labels. Rigid, topology-sensitive jobs fit a batch scheduler's atomic allocation contract, while malleable services fit a reconciliation loop that adjusts replica count continuously. Some training jobs are elastic, and some serving replicas are rigid multi-accelerator gangs, so neither "training" nor "serving" selects a control plane by itself.

The **Kubernetes-over-Slurm** pattern wraps the HPC scheduler within a cloud-native control plane. Kubernetes manages the lifecycle of training jobs through custom operators while delegating batch admission and placement to Slurm. The central engineering problem is ownership: exactly one control plane must authorize each placement, while the outer controller reconciles lifecycle state without issuing a conflicting allocation. The arrangement combines a declarative management

surface with Slurm's batch and topology policies, but it also creates a cross-control-plane failure boundary that operators must fence explicitly.

The **Slurm-alongside-Kubernetes** pattern takes a coarser-grained approach, maintaining separate clusters for training and serving that draw from a shared pool of physical nodes. A meta-scheduler or capacity broker acts as an arbitrator, dynamically reassigning nodes between the Slurm partition and the Kubernetes cluster based on demand signals. During intensive training campaigns, nodes are drained from Kubernetes and joined to Slurm; during product launches or traffic spikes, the flow reverses. The primary challenge is the mode-switching cost: draining a node, changing its ownership and configuration, and admitting it to the other control plane takes much longer than an ordinary placement decision. This latency limits sharing to planned capacity shifts rather than second-by-second inference bursts.

A shared application runtime such as Ray provides task and actor abstractions for both training and serving. Ray's placement groups, unlike the cloud network-locality abstraction of the same name, reserve bundles of logical resources for work that must run together, and serving replicas can also require multi-device groups. Inside a shared runtime the workloads keep their different state, latency, and recovery requirements, so the platform must still coordinate Ray's logical allocations with the underlying resource manager and validate the isolation and recovery behavior needed by each workload.

Threading these patterns together, consider the lifecycle of our 175B parameter model. A hybrid platform can allocate the training gang through Slurm and later place serving replicas through Kubernetes. The orchestration boundary concerns resource ownership: the training job releases its allocation, and the serving control plane admits replicas against its own capacity and readiness requirements. Deciding whether the trained artifact is ready for production requires validation and release policy beyond the scheduler; section 6 develops those validation gates and rollout policies.

A hybrid platform is useful when its separate allocation contracts justify the additional ownership and recovery boundary. The cost to measure is the coordination between control planes, including node draining and reassignment, rather than a presumed performance advantage from either product name.



Systems Perspective 8.2: The convergence of HPC and cloud

HPC and cloud-native platforms increasingly address overlapping fleet requirements. Kubernetes has acquired queues, priorities, and gang admission through Volcano and Kueue, while Slurm has added a REST interface and container support. Batch admission, service reconciliation, and resource sharing can coexist in one deployment, and each guarantee of the separate systems survives the combination only where one layer clearly owns it. The durable design question is which layer owns each allocation and recovery decision, and how the other layers observe and respect that ownership.

The overlap in capabilities makes the paradigm choice a workload-specific design decision. Teams must establish the allocation and recovery guarantees they need before layering physical placement constraints on top of them.



Checkpoint 8.1: Scheduling paradigm trade-offs

Before the chapter turns to topology-aware placement, review the core trade-offs:

- ☐ **Gang scheduling**: explain why a rigid synchronous execution group needs atomic allocation, and why the scheduler must still reserve capacity for a waiting gang that holds no GPUs itself.
- ☐ **Slurm vs. Kubernetes**: compare authoritative allocation with desired-state reconciliation, and explain why either design must prevent duplicate ownership during a network partition.

- ☐ **Group admission**: explain why a default scheduler that places pods one at a time can strand capacity for a 64-pod training job, and how a PodGroup's minimum membership prevents it.
- ☐ **MIG partitioning**: explain how MIG changes the resource unit that the device plugin exposes, and which workloads gain from that smaller unit.
- ☐ **Backfill incentives**: explain why backfill scheduling depends on accurate job runtime estimates and why users have game-theoretic incentives to provide inaccurate estimates.

A control plane can now represent, admit, and reconcile an allocation, yet it still counts accelerators as if any group of the requested size were interchangeable. The same accelerator count can meet very different communication budgets depending on where the devices sit, so the next layer of the scheduler must weigh physical location as well as resource count.

Topology-Aware Scheduling

A scattered allocation can place frequent collective traffic on shared cross-rack paths, exposing latency or bandwidth limits that a more compact allocation avoids. The penalty is set by how much of the job's traffic crosses those paths and how much capacity the fabric provisions there, not by the rack count itself. The earlier feasibility rules already required compatible topology; topology-aware scheduling makes that requirement explicit in the placement objective, accounting for communication paths as well as raw compute.

The topology hierarchy

Modern GPU clusters exhibit a multi-level communication hierarchy, with different bandwidth and latency budgets across placement domains. This hierarchy is not an implementation detail that the scheduler can ignore; it is a physical constraint that affects training throughput for communication-intensive workloads. Understanding the hierarchy is essential for making placement decisions that translate allocated resources into useful work.

Within a single node, GPUs communicate via NVLink, providing 600 GB/s aggregate bidirectional bandwidth (300 GB/s per direction) per GPU on A100 systems and 900 GB/s (450 GB/s per direction) on H100 systems. This high-bandwidth, low-latency interconnect enables efficient tensor parallelism, where matrix operations are split across GPUs that must exchange intermediate results (activations and gradients) at every transformer layer. Whether these exchanges overlap computation depends on the tensor sizes and execution schedule; high local bandwidth improves the budget but does not guarantee near-ideal scaling.

Between nodes within the same rack or **leaf switch domain**, communication traverses an external fabric such as InfiniBand or RoCE. An NDR InfiniBand link provides 400 Gb/s, roughly 50 GB/s per direction. Compared per direction, the H100's NVLink rate is 9× the rate of one such port, the same NVLink-to-InfiniBand cliff as in section 7. Delivered job bandwidth also depends on how many ports each node has and how traffic spreads across them. Bucketed data-parallel gradient synchronization can overlap the remaining backward computation, reducing its exposed cost. Frequent tensor-parallel exchanges may be more sensitive to placement even when each exchange is smaller.

Between racks connected through **spine switches**, communication crosses additional switch hops, introducing both higher latency and potentially reduced effective bandwidth due to network congestion. Fat-tree topologies provide full bisection bandwidth in theory, while concurrent flows, routing inefficiencies, and switch buffer limitations can reduce delivered cross-rack bandwidth. Cross-rack communication also adds tail latency variability: while median latency may be only slightly higher, p99 latency can spike during congestion events, creating straggler effects in synchronous training where the slowest communicator determines the pace for all workers.

A 64-GPU job within one rack can avoid cross-rack paths that a spread allocation must use. It outperforms the spread allocation only when those paths add exposed latency or bandwidth contention; a non-blocking, uncongested spine need not reduce sustained throughput. The performance difference stems directly from the hierarchical communication analysis in section 9: a flat ring AllReduce runs at the speed of the slowest link in the ring, and cross-rack hops introduce both

↩ Bisection bandwidth and fat-tree network topologies are established in section 6.

higher latency and increased contention risk. For synchronous training, every iteration waits for the slowest worker to complete its AllReduce, so even occasional cross-rack congestion inflates the Fleet Law's communication term $T_{\text{comm}}(N)$ (equation 0.3) on every step it touches.

The scheduler must therefore model the cluster as a hierarchical graph with discrete bandwidth boundaries (figure 0.98). In the illustrated H100 fleet, per-direction bandwidth steps down from 450 GB/s across the NVSwitch inside a node to 50 GB/s per port under a leaf switch, and to roughly 12.5–25 GB/s per endpoint when balanced traffic saturates an oversubscribed spine. A node boundary can introduce a large bandwidth reduction, but a non-blocking rack or pod boundary need not reduce per-endpoint bandwidth. Oversubscription adds a separate constraint when traffic saturates shared uplinks. Topology-aware placement minimizes the communication cost of the job's actual traffic pattern rather than applying a fixed penalty to every boundary.

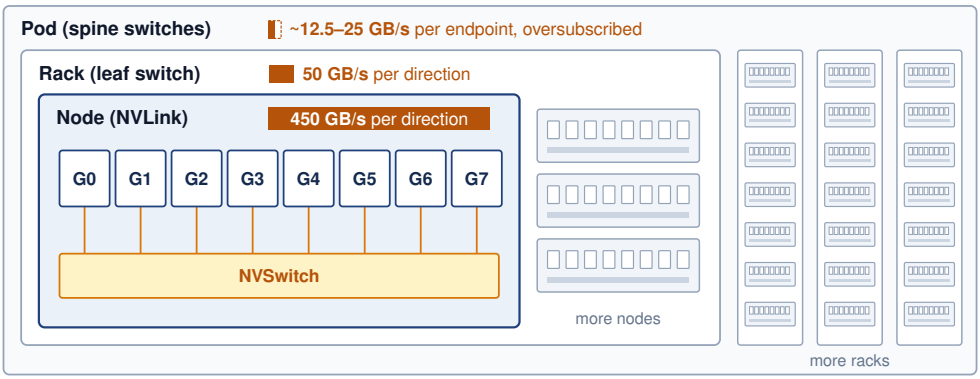


Figure 0.98: Physical topology hierarchy and bandwidth cliffs: Hardware boundaries dictate communication performance across three distinct domains. The example compares a 450 GB/s per-direction NVLink endpoint budget with a 50 GB/s per-direction external port. Under balanced load saturating a 2:1 to 4:1 oversubscribed spine, the external per-endpoint share falls to approximately 12.5–25 GB/s. A non-blocking spine need not impose this reduction. The bar in each domain's header draws its bandwidth on one shared linear scale.

For a 4-GPU collective group, the routing paths make that cost concrete (figure 0.99). In the illustrated contended fabric, scattering ranks across Rack A and Rack B forces a 3-hop leaf-spine-leaf path with about 12.5 GB/s of effective bandwidth per endpoint, a share of contended uplinks rather than a physical link rate. Consolidating all four ranks (G0–G3) under Rack A's leaf switch avoids those shared uplinks and provides about 50 GB/s per GPU under the example's load assumptions.

Placement algorithms

The illustrated 4× bandwidth difference between the 1-hop leaf path and the 3-hop spine route (figure 0.99) stretches the transfer component by the same factor when transfer time is bandwidth-dominated. Crossing a spine does not impose that ratio independently of load and topology. Whether communication exceeds computation also depends on the model and overlap schedule, and repeated exchanges can amplify the exposed cost. Topology-aware placement algorithms assign jobs to nodes that reduce this cost, turning resource packing into graph optimization over the physical topology. A simple **locality cost**, defined in equation 0.30, penalizes allocations spanning multiple topology domains:

$$\text{Cost}_{\text{locality}} = \sum_{i<j} w(d(g_i, g_j)) \tag{0.30}$$

where g_i and g_j are GPUs assigned to the job, $d(g_i, g_j)$ is their topological distance (0 for same node, 1 for same rack, 2 for different racks), and $w(\cdot)$ is a weighting function that increases with distance. The scheduler minimizes this score when selecting an allocation from the set of feasible placements. An illustrative heuristic assigns the following locality penalties: $w(0) = 0$ (same node, NVLink, no penalty), $w(1) = 1$ (same rack, one switch hop), $w(2) = 10$ (different racks, multiple switch hops).

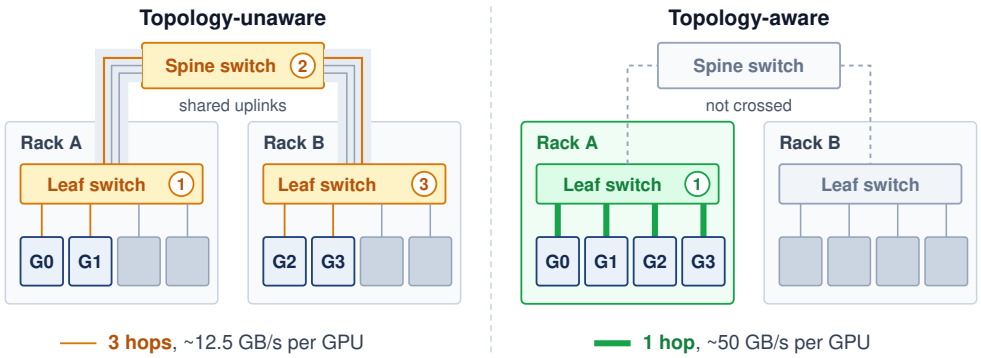


Figure 0.99: Topology-unaware vs. topology-aware placement: An illustrative 4-GPU job that permits inter-node placement and uses an oversubscribed cross-rack fabric, placed across two racks (left, topology-unaware) must traverse leaf-spine-leaf hops: 3 switch hops per AllReduce message at about 12.5 GB/s effective bandwidth. The same 4-GPU job packed within one rack (right, topology-aware) uses a single leaf switch: 1 hop at about 50 GB/s, roughly 4× faster. Blue squares are the job's GPUs; gray squares are GPUs held by other jobs.

These dimensionless weights are policy assumptions, not measured latency or bandwidth ratios. A deployment should calibrate them to its traffic and topology; an unweighted pairwise score also cannot distinguish heavily communicating rank pairs from pairs that rarely exchange data.

More sophisticated algorithms distinguish the communication requirements of different parallelism strategies. Frequent tensor-parallel activation exchanges favor a high-bandwidth, low-latency domain that meets the measured communication budget; that domain need not coincide with one server. Pipeline parallelism exchanges activations across stage boundaries rather than between every layer, but its tolerance for link delay depends on microbatch size and the pipeline schedule. Data-parallel gradient synchronization can overlap computation, making wider placement feasible when the exposed communication remains within budget. These patterns guide placement without establishing a universal ranking for every model or fabric.

Algorithm 0.3 combines the all-or-nothing gang constraint of section 5, the locality cost of equation 0.30, and an illustrative parallelism-to-topology mapping. Its enumeration expresses the decision conceptually: construct feasible rank mappings, score their allocations, and choose the lowest illustrative locality score, leaving the job queued when none fits. This surrogate does not guarantee minimum communication time or completion time. A fleet-scale implementation must restrict that search using heuristics rather than enumerate every allocation.

Algorithm 0.3 Topology-aware placement

Require: job requesting N accelerators with tensor-, pipeline-, and data-parallel groups; cluster topology with illustrative per-level locality weights $w(\cdot)$

Ensure: an all-or-nothing feasible placement with the lowest illustrative locality score, or the job stays queued

enumerate candidate slots: sets of N free accelerators that satisfy every resource dimension ▷ *gang: all or nothing*
retain only slots that admit a rank mapping satisfying the job's tensor-, pipeline-, and data-parallel communication constraints
if no feasible slot exists **then**
    leave the job queued without holding any accelerators ▷ *prevents hold-and-wait deadlock*
    return no placement
end if
for each feasible slot **do**
    use a feasible rank mapping: tensor-parallel ranks within an NVLink domain, pipeline stages within a rack, data-parallel replicas across racks where permitted
    score the slot by $\text{Cost}_{\text{locality}} = \sum_{i<j} w(d(g_i, g_j))$
end for
return the feasible slot of least $\text{Cost}_{\text{locality}}$ ▷ *minimum score among enumerated feasible placements; atomic allocation*

Applied to a whole job, the same reasoning ranks placement strategies. The latencies in this comparison are illustrative, not derived. They are constructed to stay above the ring-AllReduce bandwidth bound for the payload, and they show the order in which placement removes delay rather than values a reader could recompute from topology names. For a 0.5 GB gradient synchronization on 64 GPUs, random placement spans multiple racks and spine switches and takes an assumed 120 ms. Each successive strategy removes a source of delay that the previous one leaves. Confining the group to a single rack removes spine hops and reduces latency to 85 ms. Rail-optimized alignment maps ranks so that every member of each collective group sits at the same local GPU index and therefore on the same network rail (developed in section 12). Traffic that previously hopped between rails through the spine now stays within one rail's switches, which cuts latency to 40 ms. Topology-optimal placement additionally avoids leaf ports that other jobs are using and reaches 25 ms, a 4.8× reduction (figure 0.100, where each bar also carries its algorithm throughput). This ratio compares whole collectives under four assumed placements, so it need not match the link-bandwidth ratio of the two-rack paths above.

A **hierarchical placement** algorithm applies these constraints from the most restrictive communication domain outward. In the illustrated fleet, it places each tensor-parallel group within an NVLink-connected node, then places consecutive pipeline stages under the same leaf switch. It distributes data-parallel replicas across racks only when the resulting collective fits the external bandwidth budget. This alignment reduces costly boundary crossings, but placement alone cannot reserve the fabric's full bisection bandwidth against other jobs.

The computational cost of topology-aware placement is nontrivial. Evaluating all possible placements for a 256-GPU job across a 10,000-GPU cluster is combinatorially intractable. Production schedulers use heuristic approaches: greedy algorithms that build placements bottom-up (first fill NVLink domains, then fill racks, then spread across racks), tree-search algorithms with pruning that explore the most promising placements first, or scoring-based approaches that evaluate a sample of feasible placements and select the best. Long jobs can amortize a more expensive search, but frequent submissions, short jobs, and recovery bursts also consume scheduler capacity. The useful comparison is end-to-end completion time, including placement delay, rather than execution throughput alone.

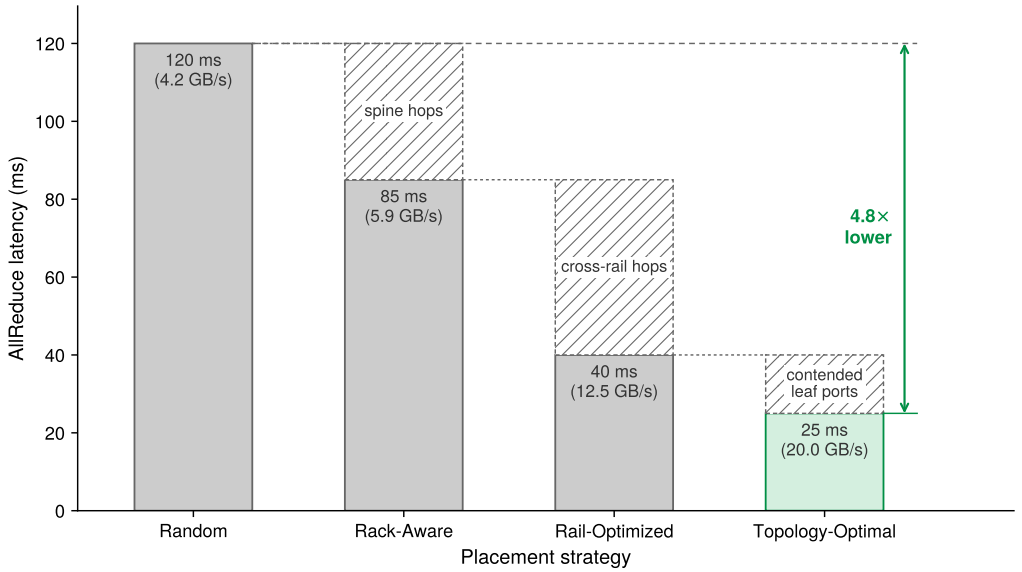


Figure 0.100: Topology placement impact: Assumed AllReduce latency across four placement strategies (Random, Rack-Aware, Rail-Optimized, and Topology-Optimal) for a 0.5 GB gradient sync on 64 GPUs. The assumed latency falls from 120 ms to 25 ms, a 4.8× ratio. Labels report payload divided by completion time (algorithm throughput), not physical link bandwidth. The dashed ghost above each bar names the source of delay that strategy removes.

Napkin Math 8.2: Placement impact on 3D-parallel training

Scenario: Consider a 256-GPU training job using 3D parallelism: 8-way tensor parallel, 4-way pipeline parallel, 8-way data parallel.

Good placement (topology-aware):

- Tensor parallel groups: 32 groups of 8 GPUs, each confined to one 8-GPU node (NVLink: 450 GB/s per direction)
- Pipeline stages: 4 consecutive nodes within the same rack (1 switch hop, InfiniBand: 50 GB/s per direction)
- Data parallel replicas: 8 racks (3 switch hops through leaf-spine-leaf paths)

Bad placement (topology-unaware):

- Tensor parallel groups split across 2 nodes (InfiniBand instead of NVLink)
- Pipeline stages scattered across racks (3 switch hops instead of 1)
- Data parallel replicas randomly distributed

Math: The tensor parallel communication alone illustrates the impact. With NVLink delivering 450 GB/s per direction, a 1 GB activation transfer takes approximately 2.2 ms. Over InfiniBand at 50 GB/s, the same transfer takes approximately 20 ms, a 9× slowdown.

Systems insight: This calculation prices only the tensor-parallel component of the bad placement. Splitting a tensor-parallel group across nodes makes each activation exchange 9× slower, and the group performs such exchanges at every transformer layer of every step, so the penalty multiplies with model depth rather than appearing once. How much of it reaches step time depends on how much of the exchange was hidden behind computation, and it is why hierarchical placement gives tensor-parallel groups the fastest tier first. The scattered pipeline stages and data-parallel replicas add their own penalties on top, and the scheduler must profile the complete job before assigning a throughput benefit to the placement.

Rail-optimized scheduling

In **rail-optimized topologies**, corresponding GPU positions across nodes connect through parallel network "rails." The design supplies separate paths that a suitable rank mapping can use concurrently. Balanced bandwidth depends on distributing traffic across those paths rather than concentrating it on a subset. Keeping a collective group on one rail avoids cross-rail transfers for that group, while the placement of other groups determines how much rail capacity it must share.

↩ Rail-optimized fabric architectures and rail-to-rail traffic isolation are established in section 8.

Rail-aware scheduling assigns corresponding model shards across data-parallel replicas to GPUs attached to the same rail. In the eight-GPU-per-node example, local GPU index i connects to rail i. Every replica's copy of shard i therefore stays at that local index on its selected node; the data-parallel replica rank varies across nodes, not across local GPU indices. The resulting collective can remain within the rail fabric. This removes cross-rail transfers for that group, but other groups or tenants can still contend for the same rail's links, so full dedicated bandwidth requires an explicit capacity and sharing contract.

Rail alignment therefore acts at two levels, and they belong to different components. Within a node it is a rank-mapping decision. The launcher or framework must give every member of a data-parallel group the same local GPU index on its node, which is what removes the cross-rail hops in the placement comparison above; a mapping that puts shard i at index i on one node and at another index elsewhere sends that group's traffic between rails. Across nodes it constrains the scheduler only when allocations are smaller than a node. When each replica's pipeline stage occupies a complete node and every node wires local GPU i to rail i, any free node already offers every rail, so rail alignment does not narrow which racks the scheduler can choose. With partial-node allocations, a job can receive different local indices on different nodes, and the scheduler must then choose GPU positions as well as nodes so that each group's members share a rail. Those positions can conflict with the tensor-parallel budget and the paths between pipeline stages when only particular GPU positions remain free, so the packing cost follows the allocation granularity and the available topology rather than an inherent conflict among the three parallelism dimensions.

Resolving these conflicts means matching each 3D parallelism dimension to the interconnect tier its traffic can tolerate (figure 0.101). Per-layer tensor-parallel activation exchanges stay on intra-node NVLink at 450 GB/s, pipeline stage boundaries cross intra-rack leaf switches at 50 GB/s, and the once-per-step data-parallel gradient synchronization spans the oversubscribed spine at roughly 12.5–25 GB/s. Even a single-node allocation can have meaningful topology constraints when GPUs occupy different interconnect, PCIe, or non-uniform memory access (NUMA) domains. Packing efficiency should therefore be optimized only among placements that satisfy the job's local and external communication contract.

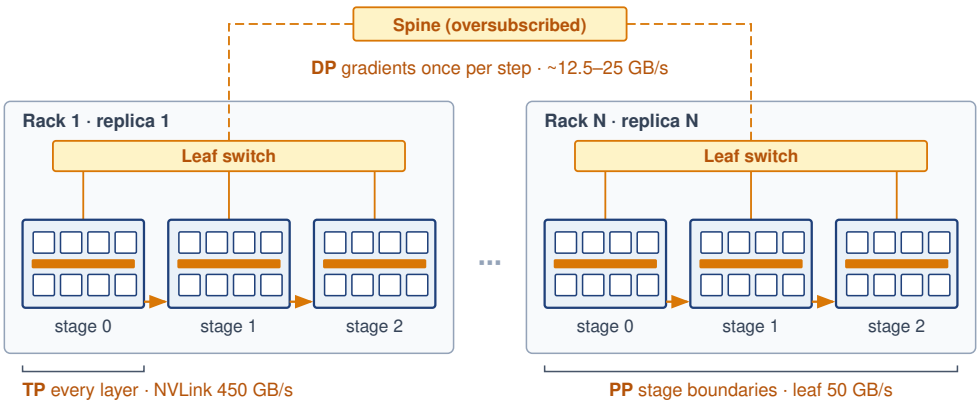


Figure 0.101: Hierarchical placement for 3D parallelism: This placement example maps distributed training dimensions to physical interconnect layers. Tensor parallelism (TP), which exchanges activations at every layer, stays inside a node on NVLink (450 GB/s); pipeline parallelism (PP) maps across adjacent nodes under one leaf switch (50 GB/s); and data parallelism (DP), which exchanges gradients only once per step, spans racks through the oversubscribed spine. Bandwidths are per direction, as in figure 0.98.

Topology discovery and dynamic adaptation

Static configuration files like Slurm's `topology.conf` or Kubernetes node labels provide a baseline map of the cluster. Runtime **topology discovery** supplements that map with information exposed by the operating system and device libraries. NCCL uses system topology information, including the PCIe hierarchy and network devices exposed through paths such as `/sys/class/infiniband`, to identify communication paths and network interface card (NIC) proximity. The discovered graph describes reported connectivity; health checks and traffic measurements must establish whether those paths deliver the expected performance.

Cluster topology is an operating state, not a fixed schematic. Hardware failures, maintenance windows, and thermal throttling change the paths and effective capacity available to the scheduler. A spine switch failure in a redundant Clos network can leave connectivity intact while removing capacity. The effect on our 175B parameter model's data-parallel AllReduce depends on rerouting, concurrent traffic, and how much bandwidth the job was using. If the failure increases exposed communication time, the scheduler must compare continuing at reduced throughput with the cost of moving to a healthier allocation.

A checkpoint-and-restart migration spends time saving state, releasing the old allocation, obtaining a new one, and restoring execution. Its value depends on measured transition cost and remaining work. If migration takes 10 minutes and restores throughput after a sustained 20 percent penalty, it pays back in less than an hour of subsequent training. That comparison assumes a healthy destination is available and the gain persists. A practical policy also accounts for queue delay and requires evidence that placement causes the slowdown, such as rising collective time on the affected path, before it moves the job.

Example 8.1: The limping switch

Scenario: A multi-node foundation model training job exhibits a 30 percent throughput drop while static topology maps show full bandwidth and GPU hardware health checks report green.

Diagnosis: A single leaf switch transceiver experienced high CRC error rates and packet retransmissions. Binary up/down probes passed, but reduced effective bandwidth on the affected path delayed AllReduce completion and therefore the training group.

Systems lesson: Binary health checks are insufficient for distributed training fabrics. Schedulers require performance-aware topology monitoring that tracks retransmissions and collective bandwidth, dynamically quarantining degraded network links.

War Story 8.2: Performance-aware health checks (2021)

Context: OpenAI's account of scaling Kubernetes describes automated health checks that remove misbehaving nodes from the schedulable pool (Sigler 2021).

Mechanism: Passive checks monitor reachability, disks, and GPU errors, but error codes do not expose every hardware or driver problem. Active GPU tests exercise the device before admitting ordinary workloads and periodically during its lifetime.

Fix: Nodes enter with a preflight taint, a node marking that repels ordinary pods, which blocks normal scheduling until the tests pass. Failed passive checks cordon a node; more serious failures can trigger eviction requests.

Systems lesson: Reachability alone is not a sufficient admission test. A scheduler needs health evidence that reflects the resources its jobs depend on, together with a policy for removing suspect nodes from placement.

The general scheduling idea is quarantine: when runtime evidence says a node, rack, or link is degraded, the scheduler should stop placing sensitive work there even if the nominal resource count still looks available. Kubernetes implements this pattern through taints and tolerations,[12] while

[12] **Taints and Tolerations**: Node taints can block scheduling of pods without matching tolerations. A toleration permits consideration of a node but neither requires placement there nor reserves it exclusively for training. Dedicated GPU pools also need controlled toleration assignment and placement constraints; removing existing workloads requires an eviction or drain policy appropriate to the taint's effect.

Slurm clusters commonly use drain states, node features, or partition rules. The complementary problem is how jobs adapt when available resources change dynamically. Rather than treating resource allocation as fixed for a job's lifetime, elastic training allows logical jobs to grow, shrink, and recover. Whether worker processes restart depends on the framework; TorchElastic restarts its worker group when membership changes.

Elastic Scheduling

When cluster demand fluctuates, rigid allocation creates two categories of waste. During off-peak hours, a job running on 256 GPUs cannot absorb idle resources to speed up training. During peak demand, the same job cannot release excess resources to accommodate higher-priority work without being fully preempted. The scheduler's only options are "let it keep all its resources" or "kill it entirely," with nothing in between.

Elastic scheduling expands this binary choice. The recovery mechanics of elastic training show how a distributed job can adjust its worker count, adapt its batch policy, and reconstruct its communication group after a failure. From the scheduler's perspective, the same capability solves a resource-allocation problem under fluctuating demand. A training job might start with 128 GPUs, scale up to 256 when resources become available, and scale back to 192 when higher-priority work arrives, provided each allocation supports a viable worker group. Resizing may pause training and restart workers from saved state. The scheduler therefore chooses among supported allocation sizes, each with a transition cost, rather than assuming uninterrupted progress at any resource level.

↩ Batch-size and learning-rate adjustment and communication-group contraction during elastic recovery are established in section 20.

The scheduler-framework contract

Elastic scheduling requires a well-defined contract between the scheduler and the training framework. For planned resizing, the scheduler and framework coordinate resource release through defined signals and an agreed adaptation window. Unexpected failures can bypass that window, so the framework must also recover from valid saved state. Its recovery path reconstructs communication groups and either preserves the global batch or applies a validated batch-size and learning-rate policy. The worker-membership lifecycle therefore behaves as a state machine centered on active training (figure 0.102). Idle GPUs trigger scale-up, preemptions trigger scale-down, and host timeouts or ECC errors divert ranks to worker replacement; each path returns to active training once the communication group is rebuilt or a spare node joins.

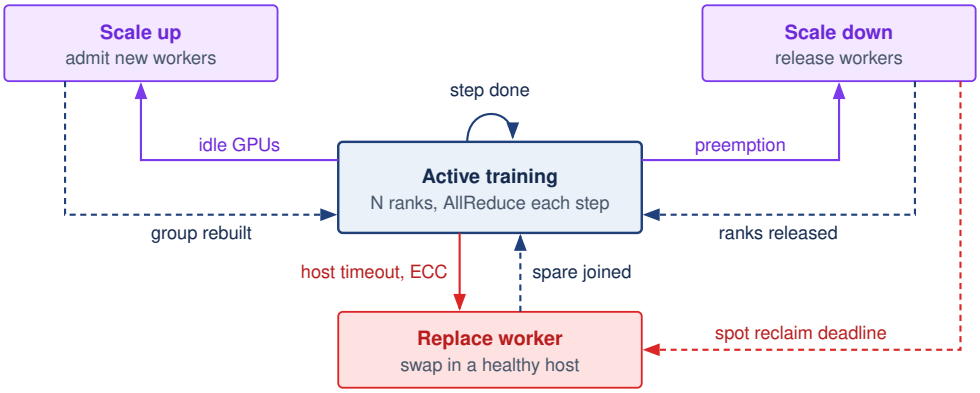


Figure 0.102: Elastic training worker lifecycle and state machine: The state machine governing dynamic worker membership. Active training loops on step completion and leaves that state along three paths: idle GPUs trigger scale up, a preemption for higher-priority work triggers scale down, and a host timeout or ECC error triggers worker replacement. Each path rebuilds the communication group and returns to active training (dashed arrows), and a spot reclamation deadline can force a shrinking job straight into replacement. Worker processes may restart during resizing, so recovery requires the application to restore valid training state.

From the scheduler's perspective, this contract is defined by three governing parameters: the elastic range, the transition cost, and the scaling efficiency curve. The elastic range, $[N_{\min}, N_{\max}]$,

specifies lower and upper worker bounds; the job's parallelism layout determines the valid allocation increments within them. The transition cost includes any checkpoint, restart, state redistribution, and rendezvous required by the runtime. Measuring the full interruption determines how frequently the scheduler can trigger reallocations before transition overhead wipes out any throughput advantage. Finally, the scaling efficiency curve quantifies the marginal throughput gained from each added worker, indicating whether assigning idle GPUs to this job yields more aggregate progress than holding them for an assembling gang-scheduled workload. Together, these parameters provide the scheduler with the quantitative bounds needed to resize jobs dynamically without treating elasticity as free capacity.

The scheduler must also account for the effect of worker count on global batch size ($B_{\text{global}} = B_{\text{per-worker}} \times N$), where the per-worker batch counts examples contributing to one optimizer update, including gradient accumulation. Holding the global batch constant requires each remaining worker to process more examples after a shrink. Larger microbatches consume more memory; additional accumulation steps extend the update time. Preserving the batch removes one source of optimization change but does not guarantee identical convergence. Allowing the global batch to change instead requires validating the learning-rate policy and resulting model quality, so throughput alone cannot determine the best allocation.

Frameworks like TorchElastic expose the worker-membership range in their launch configuration, as listing 0.6 illustrates.

Listing 0.6: TorchElastic Launch Configuration: The `--nnodes=4:16` range configures the elastic worker group to admit 4 to 16 nodes, or 32 to 128 workers. A separate cluster scheduler or operator must acquire, launch, and release nodes within that range.

```
# Launch elastic training with min 32 to max 128 workers
torchrun \
  --nnodes=4:16 \
  --nproc_per_node=8 \
  --rdzv_backend=c10d \
  --rdzv_endpoint=head-node:29500 \
  --max_restarts=3 \
  train.py
```

The `--nnodes=4:16` specification configures TorchElastic's rendezvous and worker-membership range as 4 to 16 nodes (32 to 128 workers with 8 processes per node). It does not acquire or resize cluster resources. A separate cluster scheduler or operator must place the nodes and start or stop elastic agents as capacity changes.

Systems Perspective 8.3: Elastic vs. rigid scheduling

Consider a congested cluster where a 128-GPU job waits 8 hours for a full gang allocation. This first comparison assumes throughput scales linearly with worker count, equivalent learning progress per processed example, and negligible resize overhead; the later scaling decision relaxes the throughput and transition assumptions.

Rigid scheduling: Wait 8 hours, then train for 24 hours at full throughput. Total wall-clock: 32 hours.

Elastic scheduling (min 32, max 128):

- Start immediately with 32 GPUs (throughput = 25 percent of full)
- At hour 2, when 64 GPUs free, scale to 64 (throughput = 50 percent)
- At hour 8, when the full gang frees and the rigid job would also start, scale to 128 (throughput = 100 percent)

Work completed during the 8-hour queue wait, in hours of full-scale training:

- Hours 0 to 2: 25 percent throughput $\times$ 2 hours = 0.5
- Hours 2 to 8: 50 percent throughput $\times$ 6 hours = 3

- Total: 3.5 hours of equivalent full-scale work

The elastic job completes in approximately 28.5 hours (8 hours of partial-scale training plus 20.5 hours at full scale), saving 3.5 hours compared to rigid scheduling. This improvement of about 11 percent comes entirely from using resources productively during what would otherwise be idle queue time.

The scheduler cannot treat every worker count as a valid elastic configuration. Model parallelism constrains the allocation increment when the resize policy keeps tensor and pipeline layouts fixed and adds or removes whole data-parallel replicas. For a 175B-parameter job that relies on 8-way tensor parallelism within each node and 8 pipeline stages across nodes, this policy operates at the granularity of a whole model replica of 64 GPUs. The pipeline depth of 8 is the smallest power of two at which each GPU's share of the mixed-precision Adaptive Moment Estimation (Adam) training state fits in its HBM when that state is not sharded across replicas. The feasible layout of chapter 15 instead uses a shallower pipeline and shards optimizer state across the data-parallel group with ZeRO (section 4). Keeping each replica's state self-contained costs memory, but it lets the scheduler add or remove a replica without redistributing every other replica's optimizer shards. The job can scale between 128 nodes (1,024 GPUs) and 32 nodes (256 GPUs) one replica at a time, changing the data-parallel degree. Removing a single GPU from a tensor-parallel group would instead require a new sharding layout and redistribution of training state. Changing the pipeline degree would also require repartitioning stages and rebuilding the pipeline schedule. A runtime that supports these transitions can expose them to the scheduler, but their feasibility and measured costs belong in the resize contract rather than following automatically from data-parallel elasticity.

The transition cost also constrains the scheduler's resize frequency. Each scaling event can interrupt useful work while the framework reconstructs its communication group and restores or redistributes state. The duration must be measured for the chosen runtime and checkpoint path. The scheduler must amortize this cost over the subsequent run duration, so small resize increments are only worthwhile if the job will run at the new scale for significantly longer than the transition window; section 13 shows the thrashing that results when a policy ignores this amortization.

Scheduler integration

The scheduler uses the declared $[N_{\text{min}}, N_{\text{max}}]$ range to choose when a job starts and how its allocation changes. Starting at the minimum can reduce queue delay; expanding into newly idle capacity can increase progress; shrinking can release borrowed capacity without terminating the logical job. Which of these wins depends on the job's scaling curve and transition cost, and the policies below compare the choices by the work completed over the same time window.


Each action must respect the framework contract. The most consequential of the three is **graceful preemption**: when higher-priority work arrives, the scheduler first shrinks an elastic job toward N_{min}, reclaiming whole replicas at the next resize boundary, and resorts to checkpoint-and-preempt only when the final viable group itself must yield. Quota borrowing across teams, developed in section 17, depends on this primitive whenever an owner reclaims capacity it lent. Scaling curves and transition costs determine whether the extra progress repays the disruption. Because batch changes can affect convergence, the test of a resize is time to target model quality, not throughput.

Elastic scaling policies

Adding resources to a running job does not always accelerate time-to-convergence. Communication and synchronization overhead limit throughput gains, requiring the scheduler to enforce elastic scaling policies based on empirical efficiency curves rather than resource availability alone. A job's scaling efficiency $\eta_{\text{scaling}}(k)$ compares observed throughput at k workers with the throughput predicted by ideal linear scaling from a reference allocation. With fixed global work per step, it typically passes through three regimes: a near-linear regime where per-worker computation dwarfs every fixed per-step cost, a sublinear regime where pipeline fill and drain and the unhidden part of gradient synchronization become a visible share of each step, and a saturation regime where those fixed costs rival the shrinking computation itself. Assigning available GPUs to a saturated job can yield less useful progress than serving queued work. The lower allocation bound answers a

different question. Below its **minimum viable scale**, a job may lack the memory or complete parallel groups needed to execute at all. A policy can impose a higher minimum to meet a deadline, even when a smaller allocation remains computationally efficient.

The 175B reference job shows these regimes with the chapter's own numbers. Modeled at a fixed global batch with the step-time decomposition of the Fleet Law (equation 0.3), its scaling efficiency falls from 87 percent at 256 GPUs to 83 percent at 1,024 GPUs and 69 percent at 4,096 GPUs (figure 0.103, panel a). Efficiency falls, yet quadrupling from 1,024 to 4,096 GPUs still raises throughput 3.3×, so a lower efficiency is a declining marginal return rather than a slowdown. Panel (b) locates the loss. Tensor-parallel communication shrinks along with each worker's computation, so its share of the step never rises above 11 percent. The decline comes instead from pipeline fill and drain and unhidden gradient synchronization, which take roughly fixed time per step while each worker's share of the batch shrinks. The pipeline bubble grows fastest of the three, for a reason the bubble fraction $(N_{\text{PP}}-1)/(m+N_{\text{PP}}-1)$ of section 5 makes explicit. With the global batch fixed, each added replica takes a share of the sequences, so the microbatch count m per replica falls while the stage count stays at 8, and the idle fraction rises. The shaded window from 256 to 1,024 GPUs is therefore a policy choice, not an interval derived from these efficiencies alone. A minimum allocation could follow from a completion deadline or the job's declared resource contract. It does not follow from insufficient per-worker computation at smaller scale, since with fixed global work fewer workers generally perform more work each. The upper limit likewise requires comparing additional useful progress with resize cost and the value of serving queued jobs. A real scheduler must obtain those inputs from profiling and the workload's quality target.



Throughput falls away from ideal linear scaling and saturates.

This logic extends to the temporal dimension, where the scheduler must weigh the immediate progress of a smaller allocation against waiting for a larger one. If a 512-GPU job can start immediately with 128 GPUs or wait for the full request, the better choice depends on the integration of throughput over time. The resize overhead (the cost of stopping, checkpointing, and restarting when the runtime requires them) must be amortized over the subsequent run duration. A policy of "opportunistic scaling" that resizes a job every time a single node becomes free can lose its throughput advantage to repeated interruptions, completing less useful work than a stable allocation.

Napkin Math 8.3: The elastic scaling decision

The comparison of elastic and rigid scheduling above assumed linear scaling and free resizing; this decision drops both assumptions. Consider a training job with a target batch size that requires 512 GPUs for the highest throughput among the configurations considered. Three scheduling strategies are evaluated over a window of 24 hours.

Given: Throughput at 128 GPUs is 1 epoch/hour (baseline). Throughput at 256 GPUs is 1.8 epochs/hour (90 percent scaling efficiency relative to that baseline). Throughput at 512 GPUs is 3.2 epochs/hour (80 percent scaling efficiency). Re-scaling cost is 10 minutes (0.17 hours) to checkpoint, re-shard, and restart.

Strategy 1 (immediate start, no scaling): The job starts immediately with 128 GPUs and runs for the full 24 hours. Total work: $24 \times 1.0 = 24$ epochs.

Strategy 2 (wait for the full allocation): The job waits in the queue for 4 hours until 512 GPUs become available, then runs for 20 hours. Total work: $20 \times 3.2 = 64$ epochs.

Strategy 3 (elastic step-up): The job starts immediately with 128 GPUs. After 4 hours, the capacity that lets Strategy 2 start frees up, but the elastic policy caps growth at 256 GPUs so that the remaining GPUs stay available to queued jobs. The job pauses, scales up, and resumes. Phase 1: $4 \times 1.0 = 4$ epochs. Phase 2: $(24-4-0.17) \times 1.8 \approx 35.7$ epochs. Total work: 4 + 35.7 = 39.7 epochs.

The elastic strategy completes nearly 1.7× the epoch-equivalent work of the immediate small-scale run, but still trails the full allocation by about 38 percent. That comparison counts this job's epochs, not the GPU-hours spent on them. Strategy 2 holds twice as many GPUs as Strategy 3 for most of the window and runs them at 80 percent scaling efficiency against Strategy 3's 90 percent, so the elastic job does more work per GPU-hour, and the GPUs it leaves free serve

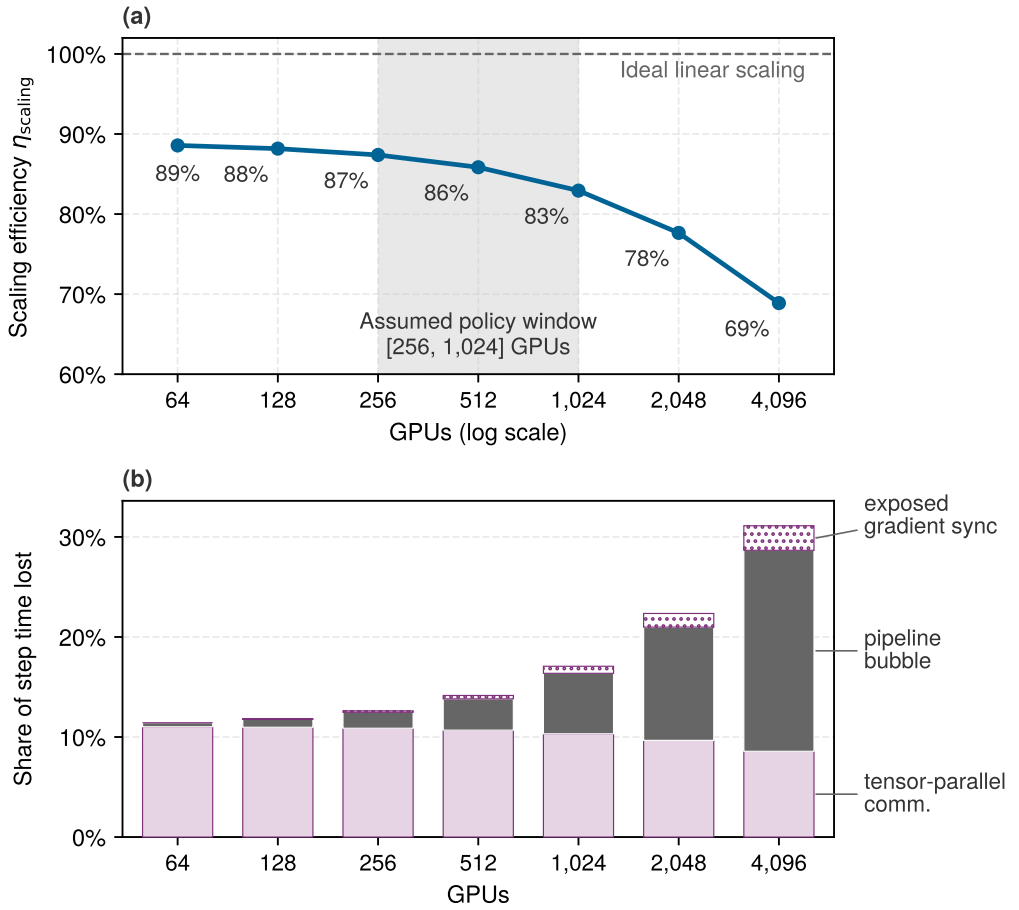


Figure 0.103: Modeled scaling efficiency and elastic operating range: (a) Scaling efficiency ($\eta_{scaling}$) of the 175B reference job from 64 to 4,096 GPUs, computed with 8-way tensor parallelism within each DGX H100 node, 8 pipeline stages, HDR InfiniBand, and a fixed global batch of 1,536 sequences. The shaded window is an assumed admission policy; efficiency alone establishes neither its minimum nor its maximum. (b) Share of each step lost to tensor-parallel communication, pipeline bubble, and exposed gradient synchronization. Lower efficiency does not imply that adding workers reduces throughput.

queued jobs. Which strategy wins therefore depends on whether the fleet values this job's completion time or the total work completed across all jobs. That gap shrinks when queue waits grow or peak capacity stays scarce; re-scaling overhead is only 10 minutes, so the step-up strategy keeps its lead over the immediate small-scale run unless slow checkpoint transfer or compilation stretches that tax beyond about 9 hours.

Placement and elasticity determine which allocations are feasible and how much useful progress they produce across competing jobs. Fleet economics adds the price of those choices. Every placement, preemption, and reservation consumes capacity that could serve another workload, so the scheduler must compare both useful progress and opportunity cost.

Cost Optimization

An idle accelerator in an enterprise fleet incurs operational costs every hour whether computing or blocked in a queue, turning placement and preemption decisions into direct financial trade-offs. The orchestrator translates this utilization-to-dollars relationship from section 24 into an online scheduling signal, balancing resource prices, reservation commitments, interruption risk, checkpoint

cost, and job deadlines to decide whether to admit, delay, preempt, or resize work. Capital planning, portfolio return, cost attribution, and lifecycle total cost of ownership are larger, slower decisions developed in section 19; the scheduler consumes their outcomes as prices and constraints.

At a fixed utilization, idle capacity grows linearly with fleet size, so the dollar cost of a scheduling inefficiency grows with every procurement (figure 0.104). At 10,000 GPUs operating at 50 percent utilization, annual waste reaches $87.6M under the chapter's $2/GPU-hour accounting scenario. Published measurements show that such underutilization occurs in production. Microsoft's Philly cluster study (Jeon et al. 2019) measured mean GPU utilization of approximately 52 percent. The 30 to 70 percent shaded band in the figure is an illustrative operating range for the cost model, not a universal empirical claim about all production clusters. Moving from 50 percent to 80 percent utilization on a 10,000-GPU cluster recovers over $52M annually in equivalent capacity value under this pricing scenario. That value equals the opening's annual waste at 30 percent idle for a simple reason. Both scenarios concern 30 percent of the same 10,000 GPUs at the same rate, so both price 3,000 GPU-equivalents of capacity, once as waste and once as recovery. Cash savings require avoiding billed usage or a planned purchase.

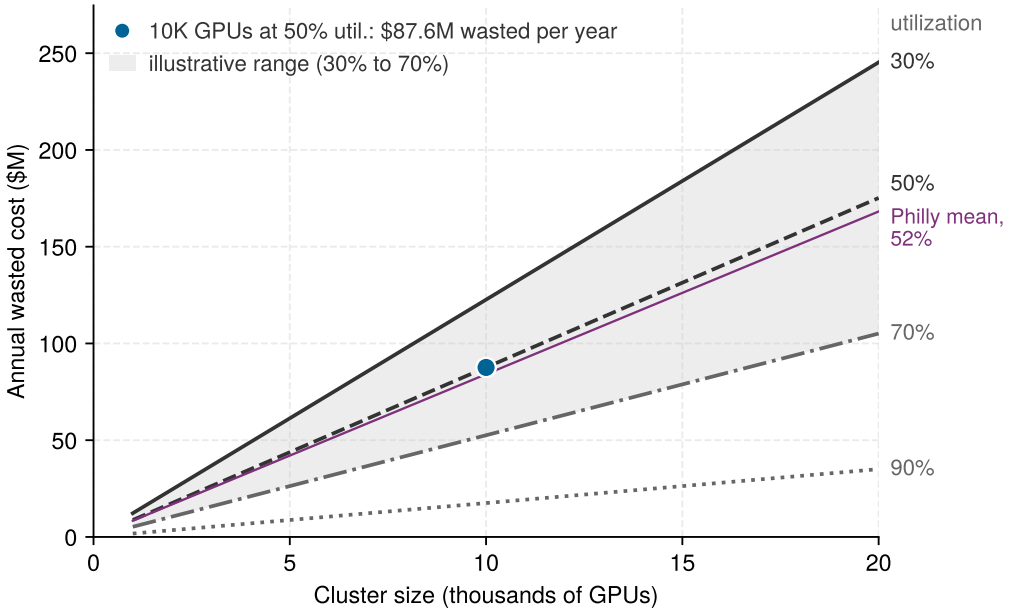


Figure 0.104: The cost of idle GPUs: Annual wasted cost as a function of cluster size for different GPU utilization levels, assuming $2/GPU-hour (cloud equivalent). The shaded region between 30 percent and 70 percent is an illustrative operating range for the scenario analysis. At 10,000 GPUs with 50 percent utilization, the model yields $87.6M in annual wasted capacity. The thin violet line traces the published Microsoft Philly mean GPU utilization of 52 percent across all cluster sizes; it is a utilization reference, not a measured cluster size or cost. Data source: Jeon et al. (2019).

The idle-capacity figure establishes the economic target; the remaining cost controls explain how the scheduler moves toward it. Interruptible capacity lowers the price of tolerant work, reservation and quota policy decide which jobs deserve scarce guaranteed capacity, and accountability mechanisms make idle GPUs visible to the teams that create demand.

Spot instances and preemptible VMs

Cloud providers sell spare capacity through spot instances[13] (AWS) or **preemptible VMs** (GCP), retaining the right to reclaim it. This chapter uses a 60 to 90 percent discount band for its pricing comparison; actual discounts depend on the resource and market. The reference interruption windows range from up to 30 seconds for GCP preemptible shutdown to 2 minutes for AWS stop or termination notices, with best-effort delivery rather than a guaranteed recovery interval. At the scenario rates of $0.70/GPU-hour instead of $2/GPU-hour, the worked comparison below shows

[13] **Spot Instances**: The scenario's 60 to 90 percent discount purchases reclaimable capacity, not a guaranteed interval for saving state. AWS's best-effort stop or termination notice targets 2 minutes, while GCP preemptible shutdown allows up to 30 seconds; AWS hibernation begins immediately. If a job's measured checkpoint time exceeds the reference 30-second window, a notice-triggered save cannot be its only recovery path.

how savings can exceed half the on-demand cost after accounting for its assumed interruption overhead.

The viability of spot instances for ML training depends on two factors that determine whether the discount translates into actual savings: the cost of each interruption (checkpoint overhead plus restart time plus lost work since the last checkpoint) and the frequency of interruption (which varies by instance type, region, time of day, and overall cloud demand). Equation 0.31 gives the **effective cost** of spot training:

$$C_{\text{effective}} = C_{\text{spot}} \times \frac{T_{\text{total}}}{T_{\text{productive}}} \tag{0.31}$$

where T_{total} is billed allocation time, including checkpointing, recovery, and work later discarded after an interruption, and $T_{\text{productive}}$ is the equivalent training time represented by retained progress. The ratio assumes a fixed allocation size and price, with unchanged useful throughput while training; variable allocations require summing the cost of each allocation interval. Waiting for replacement capacity extends completion time but contributes to billed time only while resources remain allocated. When checkpointing and interruption losses consume a small fraction of billed time, effective cost stays near the spot price. Frequent interruptions, expensive recovery, or substantial replay can instead erase the discount.

Spot savings and fault tolerance infrastructure are coupled. Fault tolerance mechanisms (frequent asynchronous checkpointing, fast checkpoint loading, elastic recovery) make spot capacity usable by lowering the cost of each interruption. Elastic training can resume a logical job with fewer workers after reclamation, provided the remaining allocation is viable, although the framework may still restart worker processes and restore checkpointed state, so elasticity reduces recovery cost rather than eliminating it. The same infrastructure therefore earns a double return. It protects against hardware losses, and it enables the deliberate use of interruptible capacity. Both benefits require measurement. The scheduler combines observed interruption rates, recovery costs, and retained training progress with resource prices to estimate whether spot savings repay the additional recovery infrastructure. The same evidence supports valuing protection against hardware failures; neither benefit follows from the discount or checkpoint mechanism alone.

Spot instance strategies for ML training

Spot capacity pays off only when an interruption rarely removes the whole job at once, so schedulers that use it diversify where capacity comes from instead of simply retrying on failure. Availability zone diversification reduces the probability of simultaneous fleet-wide reclamation. Cloud providers typically manage spot pools independently per availability zone (AZ). If a training job requires 1,024 GPUs, allocating them as a single block in one zone exposes the job to a complete stop if that specific zone's spot pool is reclaimed. Diversifying independent jobs or restart destinations across zones reduces exposure to one exhausted pool. Splitting a single synchronous gang across zones also changes its communication paths, so the scheduler must include cross-zone bandwidth, latency, and transfer costs before accepting that placement. The scheduler still must model correlation carefully: independent per-instance interruptions make large simultaneous losses unlikely, but pool-level or AZ-level reclamations can remove hundreds of GPUs at once and must be treated as elastic-shrink or failover events rather than ordinary isolated failures.

Instance type diversification expands the set of capacity pools a job can use, though availability across those pools can remain correlated. A job that requests only one instance type cannot use spare capacity in another pool. Accepting alternatives therefore requires a compatibility list that includes memory capacity, runtime support, communication paths, and measured throughput. An instance with more memory can still be an unsuitable substitute if its runtime support, communication paths, or throughput differ. The scheduler compares each feasible alternative's price and recovery cost per unit of retained progress; mixing devices within a synchronous gang also requires accounting for unequal worker speeds.

Spot capacity signals can guide placement but do not necessarily predict interruption frequency. For example, the AWS Spot Placement Score estimates the current likelihood that a capacity request will succeed in a region or availability zone; it explicitly does not predict interruption risk. A scheduler can use this signal to choose where to request capacity, but estimating interruptions per day

requires separate historical measurements for the instance type and region. If the resulting workload-specific recovery model shows that interruption overhead erases the discount, the scheduler should migrate the job to on-demand capacity or a different region.

Checkpoint frequency optimization for spot instances extends the reliability logic. The Young-Daly formula developed in section 13 models losses from unpredicted interruptions, whether caused by hardware failure or reclamation without a usable warning. Provider notices offer an additional opportunity to save state, using the reference windows of 2 minutes on AWS and up to 30 seconds on GCP preemptible VMs. A **two-tier checkpointing** approach combines periodic checkpoints, with an interval chosen for the workload's interruption model, and a best-effort checkpoint triggered by a notice. The notice-triggered checkpoint reduces lost work only if it becomes durable before reclamation. Otherwise, the job restores its last durable state, whether produced by a periodic, asynchronous, or incremental checkpoint, and replays subsequent work.

The same need for contingency planning becomes acute when spot interruptions are correlated rather than isolated.

> Systems Perspective 8.4: Correlated spot risk
>
> **Context**: Spot capacity is cheap because it is reclaimable. That risk is not independent across instances: cloud regions, instance types, product launches, and deadline cycles can create correlated demand.
>
> **Failure mode**: A fleet that concentrates all interruptible training in one region and one instance type can lose a large fraction of workers at once, even if each individual worker appears restartable.
>
> **Consequence**: Checkpointing handles isolated interruptions; it does not solve fleet-wide preemption when every retry targets the same exhausted pool.
>
> **Systems insight**: A robust scheduler diversifies compatible restart destinations, monitors interruption risk, and plans an on-demand fallback when spot capacity cannot meet the job's deadline or cost target. That fallback still depends on available capacity and the time needed to restore state.

Capacity reservation strategies

Organizations that rely on cloud infrastructure (or that think about on-premise infrastructure in economic terms) balance three tiers of compute capacity, each trading cost and commitment against availability and interruption risk, and each suited to a different class of workload (table 0.75).

Table 0.75: Cloud Capacity Reservation Tiers: Capacity tiers trade cost and commitment against availability guarantees and interruption risk, giving the scheduler a price ladder for routing workloads by urgency and restart tolerance.

Capacity tier	Cost and commitment	Availability and interruption risk	Best-fit workloads
Reserved capacity	Capacity reservation; price discounts require a separate purchasing contract.	Capacity assurance within the reservation terms; startup still takes time.	Predictable continuous workloads: 24/7 inference, scheduled training, CI and regression testing, jobs under service-level agreements (SLAs).
On-demand capacity	Full price with no long-term commitment.	Admission depends on available capacity; provisioning and startup add delay.	Urgent retraining, interactive debugging, and short-lived jobs that do not justify spot management.
Spot capacity	Discounted interruptible capacity.	Availability varies with cloud demand, and workers can be reclaimed.	Restart-tolerant jobs: hyperparameter sweeps, ablations, checkpointed pretraining, and exploratory research.

The constructed portfolio in figure 0.105 divides capacity into a reserved tier covering the steady 60 percent baseline, an on-demand band between 60 and 80 percent, and an interruptible spot tier serving peaks up to 92 percent. An organization with 60 percent steady-state utilization and 40

percent burst demand might reserve capacity for 60 percent of peak need, use on-demand for bursts whose deadlines tolerate admission and startup delay, and use spot for restart-tolerant work. These shares illustrate a policy rather than establish an optimal portfolio. The scheduler must match each workload's deadline and recovery contract to the capacity tier: reserved capacity can support the steady serving load or a training job's base allocation, while spot can support elastic replicas or independent experiments that tolerate reclamation. A peak in urgent demand cannot automatically be assigned to spot merely because it lies above the reserved band.

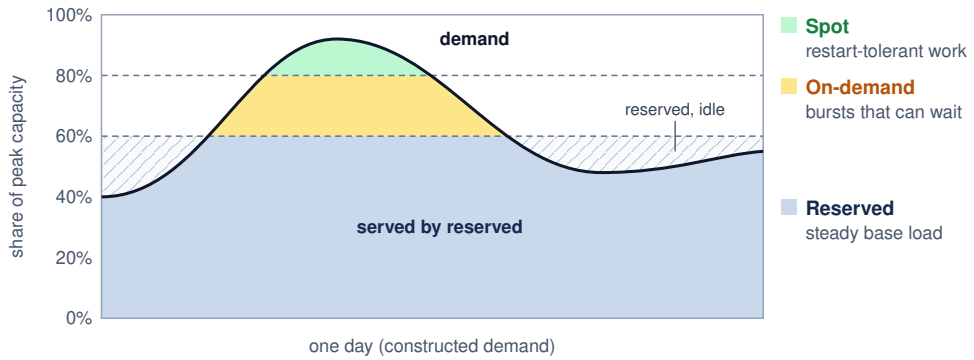


Figure 0.105: Capacity reservation tiers and portfolio optimization: This constructed portfolio combines reserved physical capacity, on-demand acquisitions, and interruptible workers. Reserved capacity covers the steady 60 percent base, on-demand the next 20 percent, and spot the peak; these shares and the demand curve are scenario assumptions. A discount commitment alone does not reserve capacity, and on-demand admission is not instantaneous. Schedulers map steady-state baseline demand to reserved capacity, diurnal spikes to on-demand instances, and restart-tolerant training to discounted spot pools. Hatching marks reserved capacity that is held while demand sits below it.

Systems Perspective 8.5: Spot vs. on-demand training

Consider training a 70B parameter model, a smaller workload than the chapter's 175B reference, on 512 GPUs for 14 days. The scenario fixes the event budget at 196 interruptions over the run and treats each as graceful, so no progress is replayed.

On-Demand: 512 GPUs $\times$ 336 hours $\times$ \$2/GPU-hour = \$344,064

Spot (65 percent discount, 5 percent checkpoint overhead, 14 interruptions per day of useful training with 30 minutes restart):

- Base cost: 512 GPUs $\times$ 336 hours $\times$ \$0.70/GPU-hour = \$120,422
- Checkpoint overhead: $5\% \times$ 336 hours = 16.8 hours
- Restart overhead: 196 interruptions $\times$ 0.5 hours = 98 hours
- Total time: 336 hours + 16.8 hours + 98 hours = 450.8 hours
- Total cost: 512 GPUs $\times$ 450.8 hours $\times$ \$0.70/GPU-hour = \$161,567

Savings: \$182,497 (53.0 percent), at the cost of approximately 34.2 percent longer wall-clock time.

The economics are compelling when fault tolerance infrastructure is already in place. Without checkpointing, a single interruption forces restart from scratch, potentially wasting days of compute and negating all savings.

Cost-aware scheduling policies

Cost-aware scheduling adds financial efficiency to the completion-time, utilization, and fairness objectives already introduced. The orchestrator evaluates three recurring classes of trade-offs: waiting versus running immediately, preempting existing tasks versus paying more for on-demand

capacity, and falling back versus shrinking elastically. For example, it might compare an immediate launch on reserved A100 GPUs with waiting two hours for spot H100 instances. If workload profiling and the price model predict twice the throughput at half the execution cost, the remaining question is whether those gains repay the delay and interruption risk. When capacity becomes constrained, the scheduler must balance preempting a low-priority hyperparameter sweep on reserved capacity against routing a high-priority training run to more expensive on-demand instances. When a provider reclaims spot instances, the policy compares replacing them with on-demand nodes against shrinking elastically. These choices require the costs of waiting, recovery, and displaced work as well as the price of the new allocation.

These decisions require the scheduler to model both the time-value of computation (the organizational cost of a 2-hour delay in researcher productivity, product launch schedules, or competitive position) and the financial cost of different resource allocations. Delaying a production model retrain by 2 hours might violate a service level agreement (SLA), while the same delay to an exploratory experiment can postpone a research decision or block dependent work. A workload class's delay tolerance is therefore a policy input grounded in its dependencies and deadlines, not an assumption that exploratory work has no time cost.

Production systems can define **cost policies** per workload class that encode these trade-offs as configuration rather than requiring per-decision human judgment. One policy places steady inference demand on reserved capacity and maintains ready replicas to meet its latency target; the reservation alone does not guarantee application availability or latency. Large training runs can combine a reserved minimum viable allocation with interruptible elastic expansion, requesting on-demand replacements when a deadline justifies the cost and capacity is available. Exploratory workloads with flexible deadlines can use spot capacity while accepting interruptions and variable completion times. These assignments express the organization's priorities rather than a universal mapping from workload type to purchasing tier.

The scheduler does not implement the organization's financial accounting system. It consumes the resulting price and policy signals: the marginal price of each capacity tier, the reservation a project may claim, the interruption risk it may accept, and the deadline it must meet. Showback, chargeback, and attribution belong to that accounting system; the scheduler uses their outputs only to rank feasible scheduling actions.

Total cost of ownership integration

Total cost of ownership (TCO) determines the price signals exposed to the scheduler, but it is not itself a scheduling mechanism. The orchestrator needs only the resulting per-resource opportunity costs and policy constraints, including whether capacity is owned, reserved, on demand, or interruptible.

↪ Tag-based cost attribution, shared-cost allocation, and chargeback are developed in section 20.

↪ The lifecycle TCO framework, which combines training, inference, data, and iteration costs, is developed in section 20.

Checkpoint 8.2: Cost-aware scheduling trade-offs

Before moving to ML-specific schedulers, review how the cost-optimization mechanisms interact:

- ☐ **Spot break-even**: identify the additional inputs needed to compute a break-even checkpoint interval for the 512-GPU, 14-day training job of the spot comparison above (65 percent spot discount, 14 interruptions per day, 30-minute restart overhead), including checkpoint duration, the interruption-rate clock, and lost-progress assumptions.
- ☐ **Double return**: explain why fault tolerance infrastructure has a "double return" for reliability and cost savings, and identify the minimum fault tolerance investment needed to make spot instances viable.
- ☐ **Reservation sizing**: starting from the constructed portfolio that reserves 60 percent of peak, identify the demand history, reservation terms, unit prices, and unused-capacity costs needed to decide whether raising the reserved share to 70 percent reduces total spending.

Spot pricing and reservation strategy reduce the cost of capacity, but they do not determine which competing job should receive it. Runtime uncertainty, unequal completion delays, and the cost of

interrupting an iteration remain even when prices are known. Resolving them requires signals from the workload itself, such as how much service a job has consumed, where its iteration boundaries fall, or how fast it is learning. A scheduler that tracks learning progress can optimize time-to-accuracy, the wall-clock time until a run reaches a target validation metric, rather than execution speed alone.

Custom ML Schedulers

A short experiment waiting behind a long training run can suffer even when every running job has an efficient placement. Improving that outcome requires a policy for deciding which job receives the next available resources. Custom ML schedulers use different signals to make that decision: consumed service can prioritize jobs without runtime estimates, iteration boundaries can make preemption cheaper, normalized finish time can expose unfair delay, and measured goodput can guide joint resource and batch-size changes. Only the last of these requires a model of learning progress; the others improve completion time, utilization, or fairness without predicting convergence.

Duration-agnostic scheduling (Tiresias)

Tiresias (Gu et al. 2019) addresses the fundamental problem identified in section 5: ML job durations are unpredictable, and scheduling policies that rely on exact duration estimates can make poor decisions when those estimates are unavailable or unreliable. Rather than fighting this information asymmetry, Tiresias eliminates the requirement for duration estimates entirely. It uses a two-dimensional attained service[14] scheduler that makes priority decisions based on what a job has already consumed, not what it claims it will consume. Jobs accumulate "service" based on GPU-time consumed, with priority decreasing as service increases. The two dimensions are time (how long the job has been running) and resources (how many GPUs the job uses), capturing both elapsed duration and resource intensity.

A discretized version groups jobs into service bins (illustratively, less than 1 GPU-hour, 1 to 10 GPU-hours, 10 to 100 GPU-hours, greater than 100 GPU-hours), giving lower-service bins higher priority. When job durations are heavy-tailed, a job that has consumed little service is likely to be short, so favoring low-service jobs approximates shortest-remaining-processing-time ordering without any runtime estimate. New jobs can receive service before long-running jobs, but their eventual duration remains unknown, and a high-priority gang still needs a feasible allocation. Tiresias also promotes jobs that have waited too long, trading some average-completion-time benefit for protection against starvation. The priority rule therefore replaces runtime prediction with an observable signal and an explicit waiting-time policy; it does not guarantee that every short job starts promptly.

The Tiresias evaluation reports lower average job completion time (JCT) on its testbed and trace-driven workloads (Gu et al. 2019). The result depends on job arrivals, sizes, and the comparison policy. Prioritizing low-service jobs can delay long-running jobs, so average completion time must be evaluated alongside starvation prevention and the delay experienced by each job class.

Iteration-aware scheduling (Gandiva)

Gandiva (Xiao et al. 2018) exploits repetitive training iterations to profile jobs and share GPUs. Its central mechanism is time-slicing at iteration boundaries. To give a GPU to another job, Gandiva suspends the running job at the end of a minibatch, copies its live GPU memory to host memory, and resumes another job on the device; switching back reverses the copy. Several jobs can therefore take turns on one GPU, and the same suspend-and-resume path lets Gandiva migrate a job to better-placed devices or pack compatible jobs onto one GPU when their combined memory fits. The boundary is the cheap place to switch because temporary activations have been released, so far less state must move than in the middle of a step. Weights, optimizer state, and runtime allocations remain, so each switch still costs a transfer proportional to that persistent state, and a job whose persistent state nearly fills the device cannot share it. The scheduler must measure memory demand, interference, and transition cost before admitting additional jobs.

Gandiva also implements **grow-shrink elasticity**, applying the allocation mechanism of section 13 to jobs that explicitly permit resizing. It expands eligible jobs into idle capacity and shrinks them when demand returns, using profiles to estimate which jobs benefit. The published implementation limits growth to one server and waits through an idle period before expanding. Its contribution

[14] **Attained Service Scheduling**: A discipline that uses consumed service to set priority when remaining work is unknown. Unlike shortest remaining processing time (SRPT), it cannot distinguish a newly arrived long job from a short one before either receives service. Its benefit depends on the workload distribution; protection against starvation remains necessary when new jobs repeatedly displace older ones.

is the connection between measured job behavior and resource control, rather than a claim that arbitrary training jobs can resize cheaply.

Finish-time fairness (Themis)

Equal GPU-time shares can produce unequal completion delays when workloads respond differently to placement. **Themis** (Mahajan et al. 2020) measures fairness in normalized finish time. Each application, which can contain related training jobs, compares its completion time in the shared cluster with its completion time on an isolated $1/N$ share of the cluster, where N is the number of applications contending for it. The ratio has the same form as the slowdown S_j defined with the scheduling objectives, except in its denominator. Themis divides by the completion time on a fair share of the cluster rather than by the isolated runtime on the job's own allocation, so a ratio of one means the application finished no later than its fair share would have allowed.

Themis targets the worst finish-time fairness ratio across applications. Its auction rounds offer available resources to applications farthest from fair completion, while allowing placement efficiency to influence the allocation within a round. With two applications whose current estimates are 1.2 and 2.0, the second is projected to finish twice as late as its fair share would allow, so it is offered the next round's GPUs first. The first application's ratio rises while it waits, and once it overtakes the second it moves to the front of later rounds. The signal is relative completion delay, not proximity to completion or GPU-hours already consumed.

Applications bid by reporting estimated finish-time fairness for candidate GPU subsets. These bids expose placement preferences rather than monetary willingness to pay. The auction trades short-term allocation efficiency against the long-term fairness objective, making the quality of completion-time and placement estimates part of the scheduler's operating assumptions.

Adaptive resource allocation (Pollux)

Pollux (Qiao et al. 2021) extends resource adaptation to include training hyperparameters. Gandiva already changes allocations; Pollux jointly considers allocation, batch size, and learning-rate scaling because a larger batch can use more devices efficiently while changing the amount of work needed to converge. The preferred configuration can therefore change with both cluster demand and the stage of training.

Pollux uses goodput to connect system throughput, measured in training examples per second, with statistical efficiency, which measures progress per example relative to a reference batch size. This is a third use of the word. The run-level goodput of section 11 discounts work lost to failures and restarts, and Google's ML Productivity Goodput multiplies program, runtime, and scheduling factors; Pollux's version instead discounts each example by the optimization progress it contributes at the current batch size. Statistical efficiency falls as the batch grows past the critical batch size of section 5, which is why more GPUs at a larger batch can raise throughput while lowering goodput. It estimates how allocation and batch changes affect both quantities, then uses those estimates to guide resource sharing across jobs. Additional GPUs are valuable only when their throughput gain survives the corresponding change in statistical efficiency and the cost of changing the allocation.

The Pollux evaluation reports average job completion times 37 to 50 percent lower than the state-of-the-art deep learning schedulers it was compared against, which do not make the same combined adjustment of resources and batch size (Qiao et al. 2021). The number belongs to that testbed and trace. Its durable lesson is the coupling: an allocation can increase samples per second while reducing progress per sample. The scheduler must estimate both effects and validate completion time at the same target quality, rather than transferring a reported improvement to a different workload.

Scheduler comparison framework

The comparison in table 0.76 links each policy objective to the observations and controls it requires. Consumed service can be obtained from resource accounting, while iteration timing and learning-progress estimates require closer runtime integration. The choice therefore turns on what the platform can observe and control, not on a ranking of scheduler sophistication.

Table 0.76: Custom ML Scheduler Comparison: A taxonomy of research schedulers based on the specific workload characteristic they exploit. Tiresias uses attained-service accounting, Gandiva profiles iterations, Themis estimates relative finish times and placement effects, and Pollux models goodput under allocation and batch-size changes.

Scheduler	Key Insight	Scheduling Signal	Optimization Target	Integration Requirement
Tiresias	Attained service informs priority	GPU-hours consumed	Minimize average JCT	Resource accounting and queue reprioritization
Gandiva	Iteration boundaries enable sharing	Iteration timing	Improve utilization	Runtime profiling and coordinated time slicing
Themis	Completion delay defines fairness	Normalized finish time	Improve worst fairness	Finish-time estimates and allocation auctions
Pollux	Batch size and allocation are coupled	Goodput	Maximize cluster goodput	Runtime resizing and batch-size adaptation

The table separates policies by what the platform must observe and control. Attained-service scheduling can work from accounting records, while iteration-aware sharing needs reliable timing profiles. Adaptive goodput policies require the training loop to accept allocation and batch-size changes. Additional control creates additional failure modes: inaccurate profiles can increase interference, and inaccurate learning-progress models can choose allocations that fail to improve convergence.

For our 175B parameter model, the practical distinction is whether the runtime supports those interventions at an acceptable transition cost. A policy that only changes queue priority needs less training-loop integration than one that resizes the execution group. The production discussion that follows evaluates that integration against the fleet's topology and recovery requirements.

The common lesson is to match the policy signal to the scheduling objective. Attained service addresses runtime uncertainty, iteration boundaries expose cheaper opportunities to interrupt work, normalized finish time measures unequal delay, and goodput couples resource allocation to learning progress. Only the goodput-based policy models convergence, and only the iteration-aware one lowers the cost of interrupting work. A platform should test the chosen policy against queue delay, starvation risk, and measured recovery cost before adopting it.

The challenge for production systems is incorporating these insights while maintaining the operational reliability, policy flexibility, and organizational governance that production environments require. Production platforms usually adopt scheduler ideas selectively because reliability, governance, heterogeneous hardware, and user policy constrain pure research designs.

From research to production

A research scheduler's evaluation establishes results for a particular workload, hardware configuration, and set of runtime controls. A production fleet must test whether its own conditions preserve those results. A cluster containing V100s alongside A100s and H100s, with both InfiniBand and Ethernet paths, can give the same allocation count different performance across placements. Jobs can also crash, hang, or exceed declared memory needs. Deploying a policy therefore requires integrating its decisions with admission, failure recovery, and the existing orchestrator, then measuring its benefit under the fleet's actual workload.

Consider applying adaptive allocation to our 175B-parameter model training run. The runtime must first expose viable resize configurations and their costs. A checkpoint-and-restart path can require persisting and restoring large optimizer state, while other state-transfer mechanisms impose different costs. Repeated resizing can consume the expected throughput gain before the job benefits from its new allocation. The policy should therefore compare predicted additional progress over the expected allocation duration with the measured transition tax, retaining a stable placement when resizing does not repay that tax. The decision follows the workload and cluster demand, not a universal training phase.

The production decision is whether a specialized policy improves marginal allocation enough to justify its operational burden, judged by the measures this chapter has already built: queue delay and slowdown, useful GPU-hours, preemption tax, and placement efficiency. Group admission settles whether a gang can start at all; the research schedulers answer the next question, which

feasible group to admit, and each imposes different requirements on the runtime. Selecting a policy therefore means matching its objective and assumptions to the fleet rather than choosing a single scheduler as universally best.

Checkpoint 8.3: Custom scheduler design space

Consider the trade-offs between the four research schedulers:

- ☐ **Estimate-free scheduling**: identify the information Tiresias sacrifices by eliminating runtime estimates, and describe when that sacrifice hurts scheduling quality.
- ☐ **Time-slicing limits**: identify workloads for which Gandiva's iteration-boundary time-slicing fails, and explain why.
- ☐ **Job starvation**: explain how waiting changes an application's finish-time fairness ratio in Themis, and why this differs from favoring jobs that are nearly complete.
- ☐ **Goodput-model risk**: describe the failure mode when Pollux's goodput model is wrong.

The training policies just compared balance completion time, fairness, utilization, and learning progress. Serving adds a different deadline: capacity must be ready before an arriving request exhausts its latency budget. That requirement makes provisioning delay and burst headroom central to how the fleet allocates capacity to serving.

Serving Capacity in the Shared Fleet

When an e-commerce platform launches a major sale, requests can arrive faster than its serving replicas can process them. A training job may tolerate waiting in the admission queue; a serving request misses its deadline while additional capacity is still starting. To the fleet orchestrator, serving is therefore a claim on accelerators that must be honored quickly and that competes with training gangs for the same devices.

The orchestrator's unit is the serving replica, a ready execution group with a loaded model that may occupy one accelerator, a device partition, or a multi-accelerator gang. A 175B-parameter model may make an eight-GPU tensor-parallel group the schedulable replica, and Archetype B (DLRM at Scale) imposes the same constraint through its embedding tables: a replica whose tables are sharded across several accelerators can serve only when every shard is placed. Each replica has a measured request-processing capacity at a specified workload mix and latency target, and that measured capacity is the quantity the orchestrator uses to size and place replicas. It decides how many such groups exist, where they reside, how they are protected from interference, and which lower-priority allocations yield when serving demand grows. Language models add a memory dimension to the claim. Each in-progress response retains per-token attention state, the key-value (KV) cache, whose footprint grows with context length and concurrency even though the weights stay fixed, so a replica can exhaust its memory before it exhausts its compute.

How many replicas to run at each moment is a control problem with its own signals and delays. Accelerator utilization alone does not identify the capacity needed to meet a request-latency target, and loading large models can delay a new replica's readiness. The controller must combine demand signals with measured startup time and ready reserve capacity; section 12 develops that control loop. For the orchestrator, the immediate consequence is that reclaiming a device from training does not instantly make it available for serving. Three fleet-level questions follow, namely how serving workloads share devices without unacceptable interference, when sharing pays for itself, and where the boundary between training and serving pools should sit.

Resource isolation

When multiple inference workloads share physical hardware, noisy-neighbor contention arises whenever one workload's resource consumption degrades another's execution speed. On GPUs, shared execution units can limit concurrent kernels, while saturated HBM interfaces constrain memory-bound work. Contending working sets can evict lines from the shared L2 cache, and simultaneous host-to-device transfers can compete for PCIe bandwidth. Aggregate power and

temperature limits can also reduce operating clocks. These mechanisms connect the placement decision to the request's critical path. A placement that fits every model in memory can still miss its service-level objective if sharing extends execution or queueing enough to exhaust the latency budget.

MIG sits at the strong resource-isolation end of this design space. Table 0.73 already showed the fixed profiles; the operational implication is that hardware partitioning reduces cross-workload interference but turns partition choice into a placement constraint. MIG is available on supported MIG-capable NVIDIA data-center GPUs, profiles may require draining affected workloads before reconfiguration, and fixed partition sizes may not match workload requirements. The memory-fit and sharing examples use the displayed device and profile capacities as conservative decimal-GB admission budgets, rather than as conversions of their modeled byte capacities. A workload that needs 15 GB of GPU memory leaves 5 GB of a 20 GB MIG instance budget unused or exceeds a 10 GB instance budget.

Software sharing offers different controls over execution, memory, and fault isolation; these do not form a single performance-versus-security scale. At the simplest level, **CUDA time-slicing** allows multiple processes to share a GPU by context-switching the compute resources. While flexible, it offers weak performance isolation because contexts compete for the entire device over time. NVIDIA's Multi-Process Service (MPS)[15] allows kernels and memory copies from different processes to overlap, reducing context-switch overhead and improving utilization when one process cannot fill the device (NVIDIA 2026c). In the shared-resource MPS configuration considered here, Volta and newer clients have distinct GPU virtual address spaces but compete for execution and memory-system resources. Additional partitioning controls depend on the hardware, software version, and selected mode, and those configured limits, not address-space separation, determine how much performance and fault isolation MPS provides.

GPU memory accounting must still prevent one model from consuming capacity reserved for another. A distinct virtual address space blocks direct addressing of another client's allocations, but it does not create a fixed memory-capacity partition. Without enforceable per-client limits, a memory leak or unexpectedly large batch can exhaust shared device memory and disrupt colocated workloads. MPS therefore fits mutually trusting workloads whose aggregate memory footprint and interference have been measured; MIG or full-device assignment fits stronger trust and predictability requirements.

At the CPU level, core pinning restricts inference processes to selected cores, reducing migrations that lose cache locality. For latency-sensitive workloads, `isolcpus` kernel parameters and `taskset` affinity can reduce scheduling interference, but affinity alone does not remove interrupts or other kernel activity. Combined with NUMA-aware[16] placement, CPU affinity can reduce interference and avoid unnecessary remote-memory traffic. The tail-latency benefit depends on the host topology and request path. For a request path limited by host-memory access, cache eviction, remote NUMA access, and address-translation misses can increase tail latency. CPU placement addresses those costs only when they lie on the critical path.

The GPU mechanisms form a spectrum from flexible software sharing (time-slicing and MPS) through hardware partitioning (MIG) to exclusive assignment, and each point gives up packing efficiency for isolation (table 0.77). For serving, the choice turns on interference and memory accounting; when colocated workloads belong to different teams, it also becomes a trust-boundary decision, which section 17 takes up with the rest of multi-tenant security.

[15] **CUDA MPS (Multi-Process Service)**: NVIDIA's runtime supports concurrent CUDA clients, with distinct virtual address spaces on Volta and newer GPUs. Its isolation contract depends on configured resource limits and partitioning support; the shared-resource mode used in this example does not reserve an independent hardware slice for each client. A deployment must also account for its fault domain, since address-space separation alone does not contain every GPU fault (NVIDIA 2026c).

[16] **NUMA (Non-Uniform Memory Access)**: Host-memory latency and bandwidth depend on which socket owns the memory and where the accelerator's PCIe connection terminates. CPU, memory, and device placement should therefore be evaluated together; a remote allocation can add inter-socket traffic, but its end-to-end inference penalty must be measured for the workload.

Table 0.77: GPU Virtualization Isolation Spectrum: GPU sharing mechanisms trade device-resource isolation against packing efficiency. External tenant isolation additionally depends on the host, driver, identity, network, and storage security boundaries.


Option	Isolation strength	Efficiency and flexibility	Suitable workload or trust boundary
Time-slicing	Separate contexts; shared performance and device fault domains.	Flexible; no spatial reservation.	Trusted, bursty jobs.
MPS	Separate address spaces; shared performance and GPU fault domains.	Concurrent kernels; configurable limits.	Mutually trusting jobs with measured demand.

Option	Isolation strength	Efficiency and flexibility	Suitable workload or trust boundary
MIG	Hardware-partitioned memory, cache, and compute.	Predictable; fixed profiles.	SLO-sensitive work; external tenants also need platform security controls.
Full device passthrough	Exclusive access to the GPU.	Strongest device isolation; lowest packing efficiency.	Jobs that saturate the device or forbid sharing.

GPU sharing economics

The decision to co-locate multiple models on a single GPU trades potential capacity savings against interference. Choosing **exclusive access** avoids competition from another device tenant but can leave capacity unused when one workload cannot fill the device. Production evidence suggests such stranded capacity is common. On NERSC's Perlmutter supercomputer, Li et al. (2023) found that 50 percent of jobs used less than 25 percent of their allocated GPU memory. Moving to **aggressive sharing** (via MPS or time-slicing) can admit more work, provided contention does not erase the gain or violate latency objectives. Exclusive device assignment still depends on the surrounding host, driver, identity, network, and storage controls for tenant security. The scheduler must therefore evaluate memory fit and measured service capacity together.

Using the same conservative admission budget, consider an A100 GPU with a 80 GB memory budget serving a 7B parameter model. The model weights in FP16 consume approximately 14 GB. With the scenario's assumed KV cache and activation overhead, the total runtime footprint is roughly 26 GB. Exclusive access leaves 54 GB (67.5 percent) of the memory budget unused at this load. That budget is reclaimable only to the extent that it exceeds required runtime and burst headroom. A MIG partition (for example, a `3g.40gb` profile) leaves roughly 35 percent of the assigned partition budget unused; the remaining device capacity is subject to valid partition combinations. Packing two such models onto the same 80 GB device through MPS consumes 52 GB, leaving 35 percent of the device memory budget unused under the same footprint assumption. Reducing the device count also requires enough compute and bandwidth headroom to preserve throughput and latency under concurrent demand; fitting the models in memory is only the first admission condition.



Sharing packs two tenants, cutting the unused memory budget from 67.5 percent to 35 percent.

This density introduces interference. When two workloads share execution and memory resources through MPS, their demands can overlap on SMs and memory bandwidth. A compute-bound model paired with a memory-bound model is a candidate for complementary placement because, in isolation, each saturates a different resource, but the bottleneck labels describe isolated behavior, not a guarantee of compatibility. Both workloads still use multiple resources, and concurrent demand can change the limiting resource. The scheduler must measure the pair's throughput and tail latency across its expected load range before treating memory density as usable capacity.

For a heterogeneous fleet, this logic dictates a bifurcated strategy. Our 175B parameter model requires about 350 GB just for FP16 weights; with the 80 GB per-device admission budget that means at least 5 GPUs before KV cache, activation buffers, runtime workspace, and tensor-parallel granularity are included. In practice, an 8-GPU tensor-parallel replica is the cleaner scheduling unit and is a candidate for exclusive access. Conversely, the dozens of 1B to 7B parameter support models, such as toxicity classifiers, query embedding encoders, and auxiliary generation models, are prime candidates for sharing. Packing these smaller models onto shared "utility nodes" liberates high-performance clusters for the heavy lifting of foundation model inference.

Napkin Math 8.4: GPU sharing ROI

Consider a fleet serving 100 distinct 7B models (26 GB footprint each) and 10 distinct 175B models (350 GB footprint each). Assume load testing has established that each proposed co-resident pair meets its throughput and tail-latency objectives with the required headroom and isolation. The memory-utilization percentages use the same conservative admission budgets. The example computes the resulting capacity reduction under the load-testing assumption; memory fit alone would not establish it.

Strategy A (exclusive access, one model per GPU): The 7B models require 100 A100 GPUs (80 GB each), achieving only 32.5 percent memory utilization (100 × 26 GB used out of 8000 GB total). The 175B models require 80 GPUs (10 models × 8 GPUs each for tensor parallelism). Total fleet: 180 GPUs.

Strategy B (MPS for small models, exclusive for large): Pack 2 models per A100 for the 7B models (2 × 26 GB = 52 GB, well within 80 GB), requiring only 50 GPUs at 65 percent memory utilization. The 175B models remain unchanged at 80 GPUs. Total fleet: 130 GPUs.

Under the load-testing assumption, sharing reduces the required fleet size by 27.8 percent (50 fewer GPUs). At $2/GPU-hour, the released capacity is worth approximately $876,000 annually at the scenario rate. It becomes a cash saving when the organization releases billed resources or avoids purchasing that capacity.

The training-serving resource boundary

Separate training and serving pools simplify capacity ownership but can leave useful work queued beside idle devices. Consider a serving pool reserved for peak traffic while a training pool remains backlogged. This **static partitioning** protects serving capacity from training demand, but unused serving resources cannot help the training queue. **Dynamic sharing** allows that borrowing only when the orchestrator can return ready serving capacity before it is needed. The mode-switching cost determines how much capacity can safely move between the pools.

Repurposing a GPU from training to serving can require saving training state, releasing the old allocation, launching the inference runtime, loading weights, and warming the replica. The orchestrator must measure the complete path to readiness, including any overlap between these operations. If that path takes minutes, reclaiming training capacity cannot cover a burst that exhausts the serving reserve in seconds. Forecasts can schedule transfers ahead of predictable demand, while already-ready headroom covers shorter bursts; the required reserve depends on forecast error and measured reclaim time.

Consider a daily traffic pattern with low demand at 3 AM, growth at 8 AM, a peak at 2 PM, and a decline at 10 PM. A forecast with a 30-minute lead allows the orchestrator to begin reclaiming training allocations at 7:30 AM, provided measured replica startup fits within that lead time. As traffic falls, it drains surplus replicas before returning their devices to training. Pricing that policy against a static split needs three quantities: what serving reserves, what it uses on average, and how much of the difference training can absorb without eroding the surge buffer. The example below assumes its surge buffer suffices; a production policy must size the buffer against its own burst distribution and forecast errors.

Napkin Math 8.5: The diurnal GPU shift

Consider a fleet of 1,024 GPUs managed under two regimes:

Scenario A (static partitioning): The serving pool reserves 400 GPUs. That reservation is the forecast peak of 283 GPUs plus a 117-GPU surge buffer that absorbs forecast error and bursts shorter than a replica's startup time, but average usage is only 150 GPUs (37.5 percent utilization). The training pool takes the rest of the fleet after the serving reservation and 6 GPUs held back as maintenance headroom, which leaves 618 GPUs, and its backlog keeps them at 100 percent utilization. Result: 150 GPUs + 618 GPUs = 768 active GPUs. Fleet utilization: 75 percent. The maintenance headroom stays unallocated in both scenarios.

Scenario B (dynamic sharing): Serving holds forecast demand (average 150 GPUs) plus the same 117-GPU surge buffer. Training reclaims the rest of the serving reservation, which is the unused 250 GPUs on average minus the buffer and averages 133 GPUs over the course of the day (the medium-blue band in figure 0.106). Because each role switch costs minutes, the orchestrator moves this capacity on the forecast rather than chasing individual traffic spikes. Result: serving (150 GPUs) + training (618 GPUs + 133 GPUs) = 901 active GPUs (the second training term is reclaimed serving capacity). Fleet utilization: 88 percent.

Dynamic sharing recovers 133 GPUs of effective capacity. At $2/GPU-hour, this creates approximately $2.3M per year in value without purchasing a single additional accelerator.

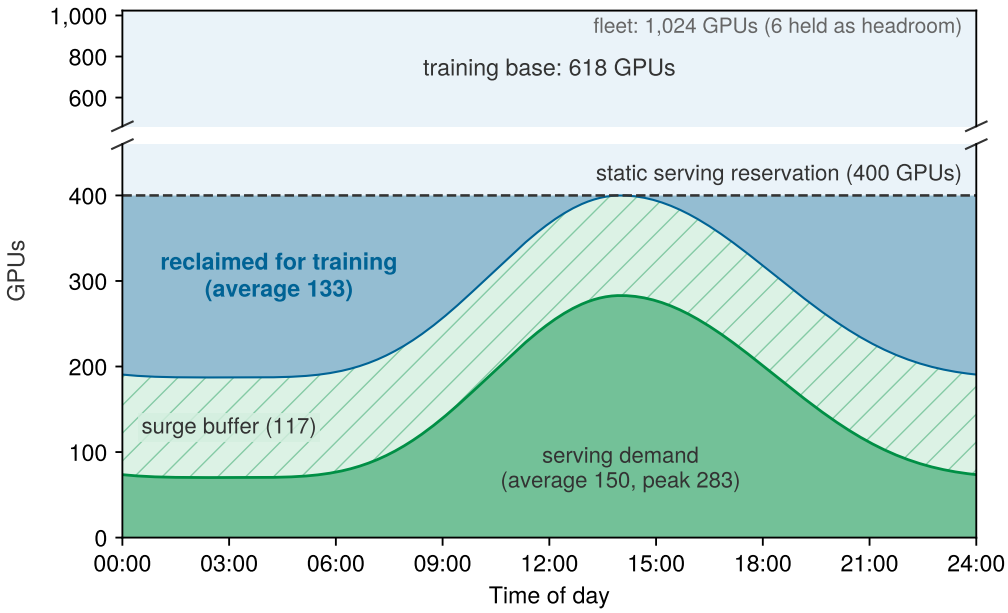


Figure 0.106: Training vs. serving diurnal GPU capacity shift: One day on the 1,024 GPUs fleet of the diurnal GPU shift notebook, drawn from the same numbers. Serving demand (green) averages 150 GPUs and peaks at 283 GPUs; the orchestrator keeps a 117-GPU surge buffer above the forecast, so the serving side never exceeds the 400 GPUs a static partition would reserve (dashed line). Everything between the buffer and that line returns to training, averaging 133 GPUs over the day, on top of the 618 GPUs training base. The remaining 6 GPUs of maintenance headroom at the top of the fleet are too thin to draw and are named in the upper panel. The shape of the daily curve is illustrative; its average and peak are the notebook's.

Safe sharing requires both a measured interference budget and an enforceable right to reclaim capacity. Isolation mechanisms address the first requirement; they do not decide which team owns a device or when a borrower must release it. That second requirement is an allocation contract across teams, and it applies to every pool the orchestrator manages, serving and training alike.

Multi-Tenancy and Quotas

When the computer vision team hoards 500 GPUs for a week while the natural language processing team sits blocked trying to push a critical bug fix to production, shared clusters devolve into a tragedy of the commons. Teams with the most aggressive job submission rates, the largest jobs, or the most persistent resubmission scripts consume disproportionate resources, while teams with more modest or intermittent needs find the cluster perpetually occupied. The result is organizational friction and underinvestment in slower-moving but potentially higher-value projects whose teams cannot compete for capacity on submission volume alone. A static serving reservation faces the same pressure from the other direction, since a training team that sees idle serving devices will want them.

Multi-tenancy and quotas turn organizational priorities into rules for resource allocation, borrowing, and reclamation that the scheduler can enforce. A quota defines an entitlement or a limit. Whether that entitlement becomes prompt, productive access depends on three further mechanisms developed below: borrowing that lends idle guarantees to other teams, reclamation and preemption that return them within a bounded time, and accounting that separates capacity a team holds from capacity it uses well.

Hierarchical fair-share

GPU quota allocation typically operates at the namespace or project level, defining how much of the cluster each team is entitled to use. The simplest approach allocates fixed GPU counts per team: Team A gets 500 GPUs, Team B gets 300 GPUs, Team C gets 200 GPUs. This approach is easy to understand and implement but leads to systematic underutilization when teams have variable workloads. If Team A's 500-GPU allocation sits 50 percent idle during a quiet period while Team B's queue overflows with urgent work, the cluster wastes 250 GPUs of capacity that rigid quotas forbid Team B from using. The alternative, allocating less quota to each team, creates a different problem: teams are blocked from running legitimate work during peak periods even when the cluster has overall spare capacity.

Hierarchical quotas, which Slurm expresses through its account hierarchy and fair-share accounting (equation 0.29) and Kueue through ClusterQueues grouped into borrowing cohorts, separate a team's guaranteed share from its maximum permitted allocation. In equation 0.32, Q_{team} denotes that maximum cap, not the guarantee; $Q_{\text{department}}$ is the department's total capacity limit, and $U_{\text{allocated}}$ is each sibling team's current allocation. Assuming those allocations remain within the department limit, the equation gives an admission ceiling before any reclamation:

$$Q_{\text{effective}} = \min\left(Q_{\text{team}},\, Q_{\text{department}} - \sum_{\text{other teams}} U_{\text{allocated}}\right) \tag{0.32}$$

The ceiling caps what a team may hold; it encodes neither fair-share weights nor guarantees. When demand exceeds capacity, the scheduler still applies its fairness policy, the dominant-resource calculation of section 4, to the feasible gangs that fit under each ceiling. Unused guaranteed capacity can be lent within the hierarchy: if Team A uses only 60 percent of its 500-GPU allocation, the remaining 200 GPUs become available to other teams within the same department.

Burst capacity and quota borrowing

Lending turns unused guarantees into burst capacity. Suppose a small team holds a guarantee of 64 GPUs but needs 256 for a weekend-long training run while a sibling team's guaranteed share sits idle. The small team may borrow idle whole devices up to its maximum quota. Those devices remain part of physical cluster capacity rather than becoming virtual capacity, and they carry lower preemption priority than owned resources. When the sibling team submits work that needs its guarantee, the scheduler reclaims the borrowed devices by preempting or shrinking the borrower's opportunistic jobs.

Borrowing is what allows a multi-tenant cluster to reach high utilization. Without it, organizations face a painful choice between reserving enough quota to handle each team's peak demand, which leaves capacity idle when peaks do not coincide, and allocating less, which blocks teams during peak periods even when reclaimable capacity exists elsewhere. Borrowing provides a reclaimable entitlement subject to the platform's response-time objective, safety headroom, and current physical capacity. A team entitled to 500 GPUs can reclaim borrowed devices according to that contract, but the scheduler must not promise an immediate 500-GPU allocation when failures, nonpreemptible reservations, or recovery headroom reduce reclaimable capacity.

Burst capacity therefore expands aspirational maxima and fair-share weights, not simultaneous guarantees. The sum of guarantees that the platform promises to honor concurrently must fit reclaimable physical capacity after nonpreemptible reservations and safety headroom. Teams may advertise higher maximums or weights because borrowed jobs yield when guaranteed demand returns, but those values are not guarantees. Fractional sharing is a separate mechanism that requires an explicit MIG, MPS, or time-slicing contract.


Reclamation couples quota policy to the checkpoint infrastructure. The admission controller separates guaranteed jobs, which run on the team's owned quota and face preemption only from higher-priority work, from opportunistic jobs, which run on borrowed capacity, yield first, and must checkpoint often enough that reclamation wastes little work. Elastic jobs soften reclamation further through the graceful preemption of section 13, shrinking one replica at a time toward their minimum viable allocation rather than terminating.

One policy for quota borrowing uses four tiers. Production serving (Priority 0) holds capacity protected from routine preemption. Production training (Priority 1) yields only under a defined serving-failover policy. Interactive and debug sessions (Priority 2) receive short execution limits to preserve iteration speed without indefinite resource occupation. Batch and research tasks (Priority 3) use surplus capacity and yield under their reclamation contract. These numbers label this example's tiers; they are not Kubernetes priority values, where larger integers indicate higher priority. The hierarchy establishes precedence, but deadline protection still requires feasible capacity and bounded reclamation time, while lower-priority work needs an explicit starvation policy.

As the over-subscription discussion in section 4 showed, a partly idle device is still a whole allocated device, so the safe burst limit follows from reclaimability rather than average SM utilization. The scheduler must measure how quickly borrowed jobs can checkpoint, shrink, or terminate; reserve the I/O and network bandwidth required for that transition; and bound the amount of opportunistic capacity that can be reclaimed within the guarantee's response-time objective.

Priority preemption cascades

When a high-priority job enters a saturated cluster, the scheduler must decide which running workloads to terminate to free up resources. This decision is rarely isolated. In tightly packed clusters, evicting a medium-priority job to accommodate a high-priority request often triggers a **preemption cascade**, where the evicted job immediately attempts to reschedule itself by displacing lower-priority workloads. The disruption multiplies with each level. If the urgent job displaces k medium-priority jobs and each of those, on rescheduling, displaces k lower-priority jobs, one admission interrupts $k + k^2$ jobs after two levels, every one of which pays the preemption tax quantified below and adds a checkpoint reload to the storage system at the same moment. Two dampening controls cap that growth. A rule that evicted jobs requeue without preempting anyone themselves stops the chain at the first level, so one admission costs at most k interruptions. A **preemption budget** limits how often any single job, or what fraction of capacity, may be displaced in a time window, which protects the jobs at the bottom of the priority order that every chain would otherwise reach.



Each eviction can evict again, so one admission reaches $k + k^2$ jobs.

The engineering cost of preemption extends beyond scheduling latency. The **preemption tax** depends on the exit path. A successful graceful checkpoint adds saving and restart overhead while preserving completed progress; a forced stop can instead discard work since the last durable checkpoint. Consider such a victim, a forced interruption of the 64-GPU fine-tuning run for our 175B parameter model. The scenario assumes lost work equivalent to 15 minutes of execution, followed by 20 minutes to reload optimizer state and 10 minutes of warmup as data pipelines refill and just-in-time (JIT) compilation and runtime initialization complete. The calculation prices replay and restart across the same allocation; it does not also charge for a successful final save.


Reconstructing the distributed data pipeline also belongs in the preemption contract. The checkpoint must preserve the sampling and loader state needed to resume the intended data order, alongside model and optimizer state. If the restart path omits that state, it can repeat or skip samples and lose exact replay of the training trajectory. A different shuffle order does not by itself prove statistical corruption, but the recovery policy must specify which changes are acceptable. The scheduler should therefore measure restoration and pipeline warmup as part of recovery cost, rather than assume that reloading model weights alone makes the job productive.

The resulting 45-minute tax combines discarded execution with reload and warmup time; it is not a measurement of continuous kernel activity after eviction. Spread over the run, it belongs to the Fleet Law's coordination term $T_{\text{sync}}(N)$ (equation 0.3), which counts scheduling decisions and failure recovery alongside barrier waits, so frequent preemption lengthens the average step exactly as frequent failure does. At \$2/GPU-hour, the scenario values each event at \$96 in allocation time. A low-priority run sits at the bottom of every cascade, so without a budget it can be struck many times a day. At the scenario's 12 forced preemptions per day, it loses 9 hours of equivalent allocation time, or 576 GPU-hours for this 64-GPU run. A per-job budget bounds that loss directly. When a budget binds, the scheduler must consider waiting, another placement, or a defined emergency exception. The trade-off is reduced recovery churn against delayed admission, measured under the workload's deadlines.

Resource accounting and observability

The 64 GPUs that sat idle for a weekend because a researcher forgot to cancel a reservation represent invisible waste in a multi-tenant cloud fleet. In a dedicated cluster, such waste is at least visible: the lights are on, but the fans are quiet. In a shared environment, the cost is hidden and compounds across thousands of jobs. Effective governance requires moving beyond simple "allocation" metrics to a tiered accounting model that distinguishes between what was requested, what was used, and what was useful.

Three tiers of measurement expose this gap between requested hardware and actual progress. Allocated capacity counts resources reserved for a job. Compute utilization measures hardware activity under a stated counter definition, which can include communication kernels or work later replayed. Productive utilization requires a workload-level measure of retained training progress or serving work that meets its objective, normalized to a declared reference rate. For example, a team allocated 500 GPUs might average 350 active-device equivalents (70 percent activity) while delivering 280 device-equivalents of useful work at the reference rate (56 percent of its allocation). These are time-averaged equivalents, not necessarily distinct sets of active and productive devices. The gap motivates profiling; it does not identify its cause or imply that necessary communication and recovery can all be eliminated.



Allocated, active, and productive capacity in GPU equivalents, each tier counting less than the one above.

Attribution in a shared fleet presents a control problem. Every admitted job needs an owner, project, workload class, and preemption contract so the scheduler can apply quota and recovery policy consistently. Kubernetes labels and Slurm accounts carry this scheduling identity.

This data feeds the utilization dashboard, the cluster operator's primary instrument for fleet health. This view must synthesize per-team utilization against quotas, queue depth by priority class, and the **fragmentation index**, a measure of free GPUs that cannot be allocated due to topology constraints. It must also track preemption rates, spot interruptions, checkpoint traffic, and the recovery overhead they induce. These measurements let the scheduler distinguish idle capacity it can reclaim from allocated capacity whose apparent idleness reflects communication, I/O, or a rigid gang dependency.

Automated anomaly detection turns these metrics into investigation triggers. A sudden spike in a team's consumption to $3\times$ its historical norm might reflect a runaway submission script or an intentional experiment. A growing queue can indicate insufficient capacity, but it can also reflect quota limits, fragmented placements, or a stalled dependency. A sudden power drop can accompany a shared storage stall, though job completions and changes in workload mix can produce a similar signal. Operators must correlate these alerts with admission decisions and job progress before changing capacity or policy.

> Systems Perspective 8.6: The three utilization metrics
>
> Each tier narrows the investigation. Low allocated utilization calls for checking demand, quotas, device health, and placement feasibility. Low compute utilization on allocated devices calls for tracing input supply, communication waits, and runtime execution. Low productive utilization despite busy kernels calls for comparing retained progress with replay, synchronization, and other overhead. The metric selects the next evidence to collect; it does not by itself select the remedy.

Security and namespace isolation

Multi-tenancy requires both fair resource allocation and security isolation to prevent teams from interfering with or observing each other's workloads. The stakes are real: ML models represent significant intellectual property, training data may contain sensitive information subject to privacy regulations, and the models themselves may encode proprietary business logic. Without proper isolation, a compromised or misconfigured workload in one team's namespace could access another team's model weights, training data, or inference traffic.

In Kubernetes environments, namespace separation provides an administrative boundary that must be reinforced by host, device, network, and storage controls. Role-based access control can restrict a team's Kubernetes API operations, including job submission and access to pod logs, within

its namespaces. Model artifacts in external storage require their own authorization policies, and cluster-wide scheduling controls require appropriately scoped permissions. Each boundary needs its own enforcement beyond namespace ownership.

Network policies restrict permitted traffic when the installed network plugin enforces them. A policy can allow communication among an admitted gang while denying unwanted cross-namespace connections, but it must cover the paths the workload actually uses. Ring AllReduce exchanges chunks along ring neighbors, while other collective algorithms use different peer patterns. Host networking and additional device interfaces require verification of the applicable enforcement boundary. Connection filtering does not encrypt gradient traffic; confidentiality on permitted paths requires separate controls. Egress restrictions can reduce exfiltration opportunities, subject to the same enforcement and coverage checks.

Across teams, the isolation spectrum of table 0.77 becomes a trust-boundary choice, because colocated workloads now belong to owners with different exposure to one another. Security in multi-tenant environments extends beyond simple resource fairness. Side-channel attacks on shared GPUs are a documented vulnerability; by monitoring contention on shared caches or memory controllers, a malicious tenant can infer the architecture or even data properties of a co-resident model. In sensitive environments, MIG or dedicated devices can strengthen device-resource isolation, but neither creates a complete external-tenant security boundary by itself. A multi-tenant platform combines device partitioning with VM or container isolation, IOMMU configuration, driver and runtime hardening, authentication and authorization, and network and storage controls. Single-organization workloads with a narrower trust boundary can use MPS or time-slicing when weaker fault and performance isolation is acceptable.

Quota governance and organizational dynamics

Schedulers manage immediate resource assignments, while **quota governance** determines the entitlements and limits those assignments must honor. Periodic **quota review cycles** compare observed use, forecast demand, and the cost of meeting each team's capacity promise. A team using only 40 percent of a 128-GPU guarantee does not necessarily block other teams if unused devices can be borrowed. The governance question is whether the guarantee remains justified and whether its reclamation contract lets the fleet use spare capacity productively between demand peaks.

The central tension in quota management is the **hoarding problem**. Teams can retain idle reservations to avoid queuing again when work becomes ready. For example, a workflow that pauses policy training while awaiting human annotations can leave its reserved accelerators unused. A training run delayed by unfinished tokenization can create the same pattern. These examples concern dependencies in particular workflows, not an unavoidable idle phase of all training. Utilization-based reclamation can release idle physical allocations to borrowers, provided the platform preserves any promised return time. Revising the team's longer-term guarantee instead requires comparing expected demand with observed use. Clear return contracts reduce the incentive to hold idle devices without making low activity alone grounds for breaking a capacity promise.

Quota accounting should remain close to the scheduling decision. GPU-hours charged against a reservation, borrowed share, or preemption class make the opportunity cost of hoarding visible and let the control plane reclaim idle guarantees.

A concrete quota scenario shows how quickly idle reservations become expensive.



Example 8.2: Quota hoarding

Scenario: A research team reserves a static block of 500 GPUs for an upcoming model refresh.

Diagnosis: Upstream data delays postpone training, but the team retains the reservation to ensure future availability. The GPUs sit idle for 3 weeks, accumulating $504,000 in capital waste while other teams' queues back up.

Systems lesson: An idle reservation should trigger a review of lending eligibility and future demand. The orchestrator can admit opportunistic borrowers under a bounded reclamation contract without changing the owner's guarantee. Reducing that guarantee is a separate governance decision; lending owned capacity does not turn it into cloud spot capacity.

The "use it or lose it" reclamation policy addresses the most visible symptom of quota hoarding, but it raises a second-order question: when idle capacity is lent to another team, the system must distinguish borrowed capacity (preemptible on short notice) from guaranteed reservations (protected by SLOs). Defining borrowing, preemption, and guaranteed tiers as first-class policy primitives is the core multi-tenancy design decision.

Checkpoint 8.4: Multi-tenancy design decisions

Consider a 2,000-GPU cluster shared between a research team (60 percent allocation) and a production team (40 percent allocation):

- ☐ **Idle reclamation**: decide whether the production team can borrow the research team's allocation while half of it sits idle, and describe the preemption behavior when the research team submits a large job.
- ☐ **Priority classes**: configure priority classes for a production inference workload that needs 100 GPUs with guaranteed latency SLOs and a research training job that can tolerate preemption.
- ☐ **Sharing contract**: explain why 65 percent average SM utilization does not justify whole-device overcommitment, then identify which measured resource and isolation constraints would make statistical multiplexing safe.

Even with isolation, quotas, and dynamic sharing in place, the cluster can still fall victim to systemic bottlenecks that defy simple monitoring. When utilization drops inexplicably despite full queues, operators must move from dashboards to systematic utilization debugging.

Debugging Cluster Utilization

A cluster dashboard shows average GPU utilization stuck at 60 percent, yet developers complain about three-day queue times for small debugging jobs. Hundreds of GPUs sit idle, but no jobs are starting. Bridging this gap between theoretical capacity and production reality requires methodical forensic analysis to untangle the interactions between hardware topology, scheduler policies, and user behavior. Part of the paradox is the queueing arithmetic of notebook 8.1. The $\rho_{\text{serv}}/(1-\rho_{\text{serv}})$ factor grows without bound as offered load approaches service capacity, so mean wait rises gently through moderate load and then steeply above 80 percent for small, mixed, and large workloads alike (figure 0.107, plotted on a logarithmic scale). The curves use the notebook's exponential reference case ($c_s = 1$), so they are the gentlest version of the effect. A mixed ML queue with the notebook's representative $c_s = 3$ multiplies every curve by the larger variability factor, shifting each one upward without changing where it bends. The curves also describe offered service load rather than allocated or kernel-active GPU percentages, and their 75 percent headroom marker is an illustrative choice rather than a universal cluster threshold. Queueing explains why a busy fleet waits. A fleet whose queue is full while devices sit idle is waiting for a different reason, and finding it requires looking past the dashboard.

The debugging method is to compare scheduler state with physical capability, inspect job requests against the actual hardware pools, and then test for a policy-infrastructure mismatch. A full queue and idle accelerators can coexist when the scheduler is honoring constraints that the dashboard has aggregated away. The cluster at the center of example 8.3 runs the heterogeneous hardware in table 0.78, accumulated across three procurement cycles.

Table 0.78: Cluster hardware inventory: Three procurement generations create distinct resource pools with different capabilities. In this inventory, A100 nodes have NVLink and the V100 pool uses PCIe. That difference changes tensor-parallel communication cost; it does not make tensor parallelism impossible on V100 devices.

GPU Type	Count	Memory	Interconnect	Nodes
A100-80 GB	400 GPUs	80 GB HBM2e	NVLink (600 GB/s)	50 nodes × 8 GPUs

GPU Type	Count	Memory	Interconnect	Nodes
A100-40 GB	424 GPUs	40 GB HBM2e	NVLink (600 GB/s)	53 nodes × 8 GPUs
V100-32 GB	200 GPUs	32 GB HBM2	PCIe Gen3 (15.8 GB/s)	50 nodes × 4 GPUs

Example 8.3: Debugging low GPU utilization

Scenario: A 1,024-GPU cluster reports 60 percent average utilization despite over 50 pending jobs in queue.

Diagnosis: Over-specification (users copying A100-80 GB templates for 35 GB memory jobs), pool fragmentation, and legacy V100 avoidance leave A100-40 GB and V100 nodes idle while large jobs wait for A100-80 GB allocations. The scheduler correctly enforced policies written for a homogeneous fleet that no longer matched the heterogeneous infrastructure.

Systems lesson: Surface-level diagnosis often mistakes policy-infrastructure mismatches for scheduling algorithm bugs. Updating scheduler policies to support automatic capability matching, dynamic memory profiling, and backfilling raises cluster utilization to 84 percent, recovering $7M in annual compute capacity; table 0.79 breaks that gain out pool by pool, using the allocated and active tiers of section 17.

Table 0.79: Utilization recovery results: Before the fix, A100-80 GB GPUs were almost fully allocated but less than fully active, while strict job templates stranded the other pools. Pool rows report allocated utilization, and for the A100-80 GB pool also the active share of its allocated GPUs; the A100-80 GB change is in that active share, the others in allocation. The cluster-wide row is the fleet's separately observed average utilization, so the pool rows are diagnostic signals that locate the loss rather than terms that add up to the total.

Pool	Before	After	Change
A100-80 GB	95% allocated, 72% active	89% allocated, 94% active	+22 pp
A100-40 GB	64% allocated	88% allocated	+24 pp
V100	0% allocated	71% allocated	+71 pp
Cluster-wide	**60%**	**84%**	**+24 pp**

For this capacity valuation, assume that each active GPU-hour delivers the same retained useful work before and after the policy change, including across hardware pools. Under that simplifying assumption, the observed utilization gain is equivalent to approximately 246 fully utilized GPUs of productive work (table 0.79). A heterogeneous production fleet must validate that conversion against workload progress and measured throughput in each pool. As at the start of the chapter, procurement planning compares the gain with the hardware it replaces, here 410 additional raw GPUs, because new devices under the old policies would also run at only 60 percent utilization. At $2/GPU-hour, that avoided purchase represents approximately $7M in annual recovered value, achieved through policy changes requiring zero additional hardware investment.

Common utilization anti-patterns

High-level metrics can hide the gap between reserved capacity and useful progress. A dashboard reporting 85 percent allocation says how much capacity is assigned, not how effectively jobs use it. Debugging requires comparing that allocation with hardware activity and workload progress, then correlating telemetry with execution timelines to test the suspected bottleneck.

A zombie job retains an allocation after its useful execution has stopped. In a distributed run training a 175B parameter model, a rank failure can leave a 128-GPU group idle if worker cleanup or

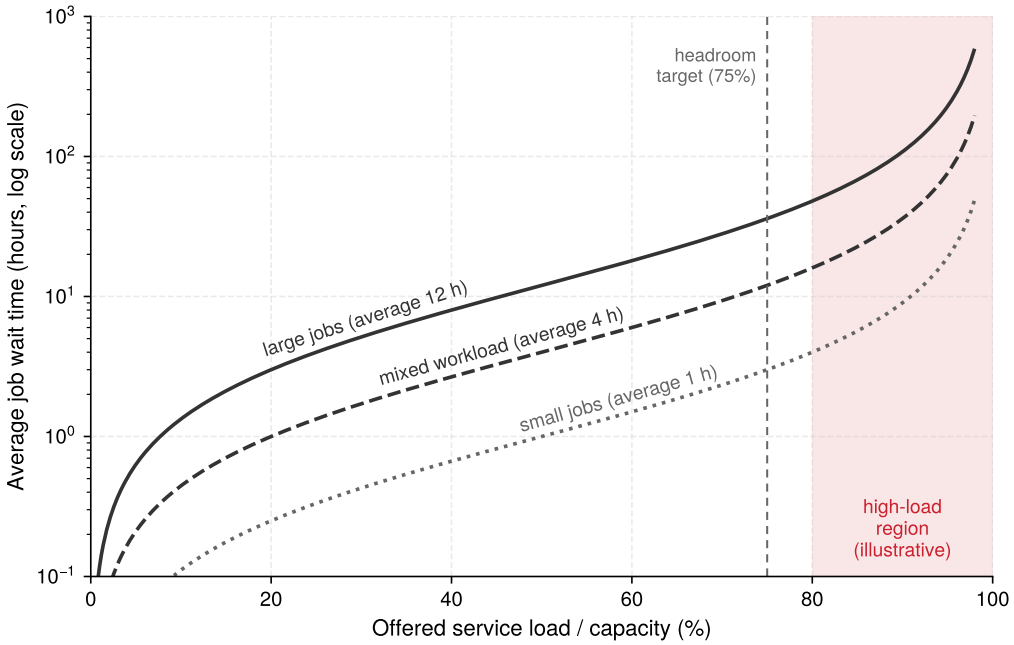


Figure 0.107: The utilization paradox: As cluster utilization approaches saturation (100 percent), job wait times increase hyperbolically and diverge near saturation, not linearly. The shaded region above 80 percent and the dashed 75 percent target illustrate headroom choices in this toy queue model, not measured GPU-utilization thresholds. Real queue delay also depends on job sizes, gang constraints, and arrival variability.

failure propagation does not complete. The surviving ranks may block inside a collective that will never finish, or a process left behind by a driver-level fault may resist reaping by the container runtime, so the devices stay allocated until a timeout or node-level remediation clears them. Persistent memory allocation combined with low SM activity is an investigation signal, not proof of a driver fault; valid input or communication waits can look similar. The operator must compare runtime health, step progress, and the workload's timeout contract, then verify that old workers have stopped before releasing or reassigning their devices.

The data starvation pattern manifests as a high-frequency sawtooth wave in GPU utilization, where the device oscillates between 100 percent load (forward/backward pass) and 0 percent load (waiting for the next batch). While the average utilization might appear acceptable at 60 to 70 percent, the GPU is effectively idling for a third of its life. This occurs when the CPU-bound data pipeline cannot sustain the throughput required by the GPU, a common scenario in computer vision where JPEG decoding and augmentation saturate host CPUs. The data stall ratio of equation 0.13 quantifies the loss as the fraction of each step spent waiting for input, and a timeline that aligns the idle intervals with input waits supports the diagnosis; utilization variance alone does not identify the cause. The remedy depends on whether decoding, storage, or transfer limits the input path.

A communication bottleneck can leave ranks waiting for collectives, though communication kernels can also keep SM activity high. Per-rank gradient traffic depends on gradient precision, sharding, and the parallelism layout, so the ratio of step time to compute-only time (forward plus backward passes in isolation) is a quicker first bound on exposed overhead. If total iteration time exceeds 1.5× compute-only time, non-compute overhead exceeds 0.5× compute time, which is material but not dominant. Setting $T_{\text{sync}}(N)$ and T_{overlap} to zero in the Fleet Law (equation 0.3) leaves $T_{\text{step}}(N) = T_{\text{compute}}/N + T_{\text{comm}}(N)$, under which communication exceeds per-device computation only when the ratio is greater than 2×. Real steps also contain synchronization waits and input stalls, so profiling must separate communication from those before the ratio is read as a communication diagnosis. Placement can reduce exposed communication when it improves the relevant paths.

Gradient accumulation can reduce synchronization frequency only when the runtime defers gradient exchange across accumulation steps.

Memory fragmentation can prevent admission even when aggregate free memory appears sufficient. An allocator requiring a large contiguous KV-cache region may fail to place a new sequence when free space is split across smaller regions. The diagnosis therefore depends on the allocator's requirements, rather than merely the percentage of HBM occupied. Comparing live token demand with reserved cache capacity helps expose unusable space. Paged cache allocation reduces the need for contiguous sequence storage. For the fleet scheduler, the allocator matters through its result, the number of concurrent requests a replica can hold, because that measured capacity sets how many replicas the serving envelope needs. Any throughput gain depends on request lengths, batching, and the allocator baseline.

↪ Paged KV-cache allocation and its effect on replica concurrency are developed in section 6.

The debugging example illustrates a broader principle that applies to every system across the fleet stack: scheduling systems are only as effective as the policies they implement, and policies must evolve alongside infrastructure. When infrastructure changes (new hardware generations are added, network topologies are upgraded, workload mixes shift from training-dominant to serving-dominant), the policies encoded in scheduler configuration, job templates, and organizational practices must be re-evaluated and updated. The most expensive scheduling bug is often not a software defect but a policy that was correct for the old infrastructure and was never updated for the new one.

This principle connects scheduling mechanics to fleet governance. Technical policies (GPU type matching, gang scheduling timeouts, preemption grace periods) interact with organizational policies (team quotas, priority hierarchies, cost allocation) and human behavior (job template reuse, resource request habits, queue submission patterns). Effective fleet orchestration requires attending to all three layers simultaneously.

Fallacies and Pitfalls

Those policy-infrastructure mismatches recur as a small set of misconceptions that can make an apparently healthy scheduler waste expensive fleet capacity. It is tempting to look at a cluster running at 98 percent utilization and declare victory, only to discover that researchers have stopped submitting jobs entirely because wait times have stretched into weeks. Each misconception below follows the same pattern, in which optimizing one visible metric degrades the outcome the fleet exists to deliver.

Fallacy: *More sophisticated scheduling algorithms always improve utilization.*

Engineers facing low utilization often reach for more advanced schedulers, assuming the algorithm is the bottleneck. As the debugging example in section 17 demonstrates, the root cause is frequently policy misconfiguration, not algorithmic limitation. A simple FIFO scheduler with correct policies (capability-based matching, backfill with timeouts, appropriate gang scheduling constraints) often outperforms a sophisticated scheduler with incorrect policies. Before upgrading the scheduler, audit the policies: confirm that users are not requesting resources they do not need, that heterogeneous resources are properly exposed, and that gang-scheduling timeouts are configured.

Pitfall: *Treating all GPU-hours as equal when measuring utilization.*

An unlabeled "GPU utilization" percentage can conflate allocation with activity or useful work. For example, 80 percent of fleet capacity might be allocated while 15 percent of the fleet waits in incomplete groups and another 5 percent waits for input, leaving at most 60 percent executing useful training in that snapshot. Such a breakdown comes from scheduler and runtime evidence, which an activity counter cannot supply. The allocated, compute, and productive tiers of section 17 keep these measurements distinct, with productive capacity tied to a stated workload objective and reference rate.

Fallacy: *Gang scheduling is always necessary for distributed training.*

Gang scheduling prevents partial-allocation deadlock for a rigid synchronous group, but the required group need not equal the job's maximum requested size. Asynchronous workers may progress independently, while elastic training can begin with its minimum viable gang and resize at supported boundaries. Independent hyperparameter trials can also run separately. The scheduler gains

flexibility by admitting the actual unit of progress, while preserving atomic allocation wherever synchronous dependencies require it. Changes to worker count or synchronization policy still require convergence validation.

Pitfall: *Setting static quotas based on peak demand.*

Organizations commonly set team quotas to handle worst-case demand, reasoning that teams need guaranteed access during crunch periods. If Team A's peak demand is 500 GPUs and Team B's is 300 GPUs, the cluster needs 800 GPUs with static quotas. In practice, peaks rarely coincide. A 600-GPU cluster can accommodate either peak when the other team's simultaneous demand leaves enough capacity, but it cannot guarantee both peaks concurrently. Hierarchical fair-share with borrowing uses that statistical opportunity only when the declared guarantees fit physical capacity and borrowed work can yield within the reclamation contract. In this example, sizing static quotas to the sum of the peaks provisions 200 GPUs, a quarter of the 800-GPU cluster, as guarantees that sit unused whenever the peaks do not coincide.

Fallacy: *Spot instances are always cheaper for training.*

Actual savings depend on the billed overhead each interruption adds, not on the scenario's 60 to 90 percent discount band. Consider 15-minute checkpoint overhead and 30-minute restart overhead, totaling 45 minutes of billed nonproductive time per event. If each event follows 2 hours of retained training progress, the nominal 65 percent discount becomes about 52 percent savings under the fixed-allocation model. This illustration assumes a successful save and no replay; a real interruption budget must also include discarded progress when the save cannot finish. The scheduler must separately account for unbilled capacity waits when evaluating deadlines. Sufficient billed overhead can erase the discount, regardless of the advertised rate.

Pitfall: *Ignoring topology when scheduling distributed training.*

Schedulers that ignore connectivity can place communication-intensive groups across paths with less available bandwidth or more contention. On a fleet with NVLink confined to each node, spreading a tensor-parallel group across nodes moves its traffic onto the inter-node fabric; other hardware can expose larger NVLink domains. Crossing a spine switch does not itself prove congestion, so the placement decision must compare effective path capacity and competing traffic. A measured throughput penalty accumulates over a long run and may exceed the delay of waiting for a more suitable allocation. The scheduler must weigh that gain against queue delay and fragmentation.

Pitfall: *Using elastic training to avoid gang-scheduling decisions.*

Elastic training complements gang scheduling by moving between viable execution groups. With a fixed 8-way tensor-parallel layout, each group still requires eight workers; changing the number of data-parallel replicas does not relax that requirement. A runtime that changes the tensor or pipeline layout must also redistribute state and establish a new viable group. The scheduler must honor the supported resize granularity, atomic admission requirements, and placement budget for each configuration. Elasticity adds feasible choices; it does not make an incomplete group productive or an arbitrary placement efficient.

Fallacy: *The scheduler needs no workload-specific validation.*

Scheduler configuration needs revalidation as workloads evolve. A preemption grace period that suffices for one model may be too short for another to save state, while placement weights suited to an earlier topology can strand capacity after an expansion. The constructed debugging example in section 17 raises utilization from 60 percent to 84 percent through policy changes without new hardware. That result illustrates the value of checking capability matching, gang admission, and recovery contracts; it is not a promised gain from tuning defaults. The operator must compare queue delay, retained progress, and service objectives before and after a policy change.

Pitfall: *Treating high utilization as proof of cluster health.*

A high allocated-GPU percentage does not establish that the cluster has enough headroom to admit new work promptly. The exponential-service case of notebook 8.1, an M/M/1 queue, shows the pressure near saturation, since mean queue wait divided by mean service time is $\rho_{\text{serv}}/(1-\rho_{\text{serv}})$, where ρ_{serv} is offered service load relative to service capacity. This model assumes Poisson arrivals,

exponential service times, and a single server; it does not turn a GPU-busy percentage into a prediction for a gang-scheduled fleet. Real headroom targets depend on arrival bursts, job sizes, placement constraints, and the queue-delay or serving-latency objective. The operator must measure those outcomes instead of applying a universal utilization threshold.

Recognizing these fallacies prevents platform teams from chasing false optimizations that look good on dashboards but degrade developer velocity. The core orchestration principles that successfully navigate these trade-offs share a common thread: they treat scheduling as an engineering discipline, not an administrative function.

Summary

Fleet orchestration transforms raw data center capacity into productive ML infrastructure by governing how silicon, bandwidth, and state interact across time and space. Orchestration spends Coordination, the third axis of C^3, so that Compute and Communication capacity turn into useful progress. In Fleet Law terms (equation 0.3), placement sets the communication term $T_{\text{comm}}(N)$ of every step, and preemption and recovery, amortized over the run, enter the coordination term $T_{\text{sync}}(N)$. Queue wait and gang admission are coordination costs too, but they delay the first step rather than lengthening any step, so they appear in end-to-end completion time rather than in the per-step law. Multi-tenancy and quota policy decide how much of that time allocated compute spends doing useful work. Hardware capability sets the feasible choices; the scheduler turns those choices into useful allocations by preserving ownership, coordinating recovery, and matching placement to workload demand.

Feasibility is the first filter. Gang size, topology locality, multi-dimensional fit, and accelerator compatibility decide which allocations a job can actually run, and only then can a fairness policy choose among them (principle 14). Quota borrowing extends the same reasoning across teams, since a guarantee is worth what the platform can reclaim within its response-time objective rather than the number printed on the quota.

Placement changes the physical paths available to a workload. Aligning model parallelism with the network hierarchy reduces exposed communication when placement is the binding constraint, but it cannot create fabric capacity that is not there. Elastic resizing and spot capacity widen the set of feasible choices by trading worker continuity for flexibility and price, and ML-aware schedulers sharpen the choice among them with workload signals such as attained service, iteration boundaries, finish-time ratios, and goodput. Every one of these levers pays a transition or integration cost that must be measured against the progress it buys.

At serving time, the fleet scheduler preserves a capacity envelope of indivisible replicas with SLO headroom and moves the training-serving boundary on measured demand, leaving request-level routing and batching to the serving system. When that envelope, the quotas around it, or the placements inside it go wrong, the symptom is usually a full queue beside idle accelerators, and the cause is more often a policy written for an earlier fleet than a defect in the scheduling algorithm.



Key Takeaways: Scheduling is systems engineering

- **Distributed scheduling is fundamentally hard**: Cluster scheduling must coordinate allocation ownership across machines despite partial failures, network partitions, and stale observations. Control planes balance prompt recovery against the risk of authorizing a replacement while an old worker still runs.
- **Gang scheduling prevents deadlock but reduces flexibility**: Gang scheduling gives rigid execution groups atomic resource allocation to prevent hold-and-wait deadlocks, while backfilling and elastic resizing recover flexibility within the job's minimum viable gang and transition constraints.
- **Fairness is measured over feasible bundles**: DRF equalizes each tenant's dominant normalized share across GPUs, CPU, memory, and network, but only among bundles that already pass gang, topology, and compatibility constraints (principle 14). Slowdown and maximum feasible wait test whether the resulting policy avoids delay and starvation, and a quota guarantee holds only as far as lent capacity can be reclaimed in time.

- **Topology determines performance**: Where GPUs are placed within the cluster hierarchy changes the communication paths available to a job. Locality can reduce exposed communication, but waiting for a compact placement also costs time; compare end-to-end completion rather than iteration throughput alone.
- **Scheduling signals must match the objective**: Workload characteristics support different improvements: attained service addresses runtime uncertainty, iteration boundaries reduce interruption cost, finish-time ratios expose unfair delay, and goodput guides adaptive allocation. Each policy requires validation against the fleet's workload mix and recovery costs.
- **Useful utilization creates economic capacity**: Reducing avoidable idle time can deliver more useful work from an existing fleet. Distinguish allocated, active, and productive capacity before valuing an improvement, and preserve the headroom required for recovery and latency targets.
- **Policies must evolve with infrastructure**: Scheduling algorithms are only as effective as the policies they implement. When infrastructure changes (heterogeneous hardware additions, topology upgrades, workload mix shifts), policies must be re-evaluated and updated.

The same placement decision makes the displacement of overhead (principle 13) concrete. Colocating a tensor-parallel gang keeps its collectives on NVLink and shrinks the exposed communication of every step, but the scheduler pays for that locality in coordination time while it waits for a feasible contiguous allocation. The bottleneck moves from collective bandwidth to queue delay or fragmentation rather than disappearing, so the right placement is the one that minimizes end-to-end completion time, not iteration time alone.



What's Next: From orchestration to optimization

The orchestrator counts serving capacity in replicas, and a replica that holds a full node of accelerators is allocated whether or not those accelerators do useful work. During autoregressive decode at small batch sizes, every new token streams the model's weights from memory again, so a fully allocated replica can leave most of its arithmetic units waiting on data. Communication stalls, input delays, and long chains of short host-launched kernels consume an allocation the same way. Performance engineering locates which of these limits binds on the request's critical path and tests whether a fix survives at the replica and fleet boundaries. The per-replica capacity it measures is the number this chapter's serving envelope divides demand by, so every gain inside a replica changes how many replicas the fleet must hold.

↪ The memory wall, roofline diagnosis, profiling, fusion, precision, and compilation, applied to the replicas and training steps this chapter allocates, are developed in chapter 17.

III

DEPLOYMENT AT SCALE

Part III

Deployment-at-Scale Principles

Parts I and II built the fleet, coordinated its distributed state, and executed the training run. Training, however, opens a model's lifecycle rather than completing it, and production deployment is where the model must repay its cost under real demand. Part III shifts the focus from the single, massive training run orchestrated across a dedicated cluster to the deployed fleet: the thousands of geographically distributed servers that answer requests in real time, the billions of edge devices that run and adapt models locally, and the operational machinery that keeps every deployed version accountable. The transition changes the engineering constraints. A training run must finish a coordinated workload; a deployed fleet must sustain useful throughput on a dynamic request stream while meeting latency targets, keep models current as data and devices change, and govern how each change reaches production.

A serving fleet depends on the runtime behavior of each replica, whose execution time and memory footprint determine how many requests it can accept and how much capacity the fleet must provision. Part III therefore begins with performance engineering, returning to the roofline of section 6, precision choices, and kernel execution to explain their consequences for fleet capacity and latency. Inference at scale uses that runtime foundation to coordinate request queues, batching, and distributed model state. Edge intelligence extends the argument to heterogeneous fleets with intermittent connectivity, including federated learning that coordinates training while data remains on participating devices. Production operations then governs rollout, monitoring, and recovery across the deployed fleet.

The principles below preview the constraints that each chapter of Part III makes quantitative, from the single serving replica through the edge fleet to the release process that governs them all. Autoregressive generation produces each new token from the preceding tokens; a key-value cache retains intermediate attention state so the system can reuse it. A serving replica is one deployed copy of the model, potentially spread across devices. The chapters turn these concepts into capacity and latency models rather than assuming that local efficiency alone guarantees an efficient fleet.

The first constraint is imposed by the mechanics of generation itself.



Principle 15: The autoregressive bottleneck

Invariant: In low-batch dense transformer decode, weight streaming often makes throughput memory-bandwidth bound because every decode step must stream the model weights from device memory to the compute units. Higher batch sizes amortize weight streaming, and key-value (KV) cache traffic shifts the binding constraint at long context.

Implication: Throughput initially improves with batch size by amortizing weight reads across requests, until per-device latency budgets, KV cache capacity, or sustained compute become the binding ceiling. Serving systems therefore need batching, cache-management, and memory-layout policies that keep bandwidth useful without violating latency SLOs.

The same accounting extends from device bandwidth to fleet economics. It also carries the volume's scaling thesis into serving. When quality is bought with test-time compute, by spending more computation on each query, the scaling curve that drove the training fleet moves into the request path, and its cost recurs with every request.

Principle 16: The serving cost dominance law

Invariant: For high-traffic production models, cumulative inference cost can exceed the one-time training cost over the model's lifetime.

Implication: Inference efficiency often becomes the dominant lifecycle optimization target. Optimization efforts (quantization, distillation, sparsity) should be focused on the inference path when traffic volume, product lifetime, and retraining cadence make serving cost dominate.

At scale, routing policy becomes another lever for protecting latency.

Principle 17: The power of two choices (P2C)

Invariant: In the idealized process that sequentially places R independent requests into R replicas, with each request sampling replicas independently and uniformly at random, querying two replicas and selecting the least-loaded one reduces the maximum load from the one-choice bound $\Theta(\log R/\log\log R)$ to $\Theta(\log\log R)$ with high probability.

Implication: Simple randomized load-balancing algorithms produce dramatically lower maximum-load bounds with $\mathcal{O}(1)$ coordination overhead. Under serving queueing assumptions, the lower maximum load translates into reduced tail latency at scale.

Moving learning onto phones and other battery-powered devices adds a constraint that no data-center scheduler faces. The device belongs to its user, so background learning runs only when the device can spare it.

Principle 18: The participation selection principle

Invariant: An edge device contributes to on-device or federated learning only in windows its admission policy accepts, when the predicted update energy fits the remaining energy slack, the added power stays within the thermal limit, and foreground latency still meets its deadline (equation 0.54). Those conditions correlate with hardware class, charging habits, and connectivity, so the population a shared model learns from is the admitted population, not the deployed one.

Implication: The admission policy that protects each device also selects the training population, which makes admission a fairness decision as well as a resource decision. A fleet must measure participation and completion rates per device and user cohort against the deployed population and correct the skew through stratified selection, participation quotas, or reweighting. Loosening admission is not a remedy, because it spends the energy, thermal, and latency budgets the policy exists to protect.

Whether a model is trained in the data center or across a population of devices, every change must eventually be released to the deployed fleet, and at fleet scale that release needs a single standard of evidence.

Principle 19: The evaluation contract principle

Invariant: At fleet scale, a release decision is valid only when all of its evidence refers to one versioned evaluation contract that pins the model and its dependencies, the workload, the metrics and statistical design, the acceptance thresholds, the rollback conditions, and the accountable owners. Reliability under that contract is a vector of budgets over availability, latency, freshness, and quality. With B_i denoting the fraction of observations that violate target


i divided by the violating fraction that target allows, the service is inside its reliability envelope only when

$$\max_i B_i \leq 1.$$

Implication: No single accuracy number can authorize a release. Averaging the dimensions would hide a quality regression behind perfect uptime, and evidence gathered on different datasets, load profiles, or configurations certifies no single candidate. Thresholds and rollback conditions are fixed before exposure, an exhausted budget in any dimension stops promotion, and a change that leaves the contract's validated envelope reopens the decision.

Part III takes the trained model from the cluster to the world. The path begins with performance engineering, which diagnoses where a replica's time goes before choosing among precision, kernel, and compilation changes, and so determines how much of the hardware's theoretical capacity the system can actually use. It then moves to inference at scale, where request batching, cache management, routing, and sharding turn single-device efficiency into fleet-level latency control. Edge intelligence extends this discipline to phone-class devices that adapt models locally and coordinate through federated learning under unequal memory, power, and connectivity budgets, while operations at scale closes the loop by monitoring the deployed fleet, coordinating platform ownership, and responding when production behavior diverges from design assumptions. Measured against the Fleet Law, these chapters shift from the training step to the serving request. Performance engineering shrinks the per-replica compute term and exposes the memory traffic hidden inside it, inference at scale trades batching against the queueing and routing delays that play the role of $T_{\text{sync}}(N)$, edge intelligence faces communication costs set by intermittent wireless links rather than a data-center fabric, and operations bounds the coordination cost of every rollout and rollback. Together, these chapters develop the operational discipline that turns a trained model into a durable production system.

Performance Engineering

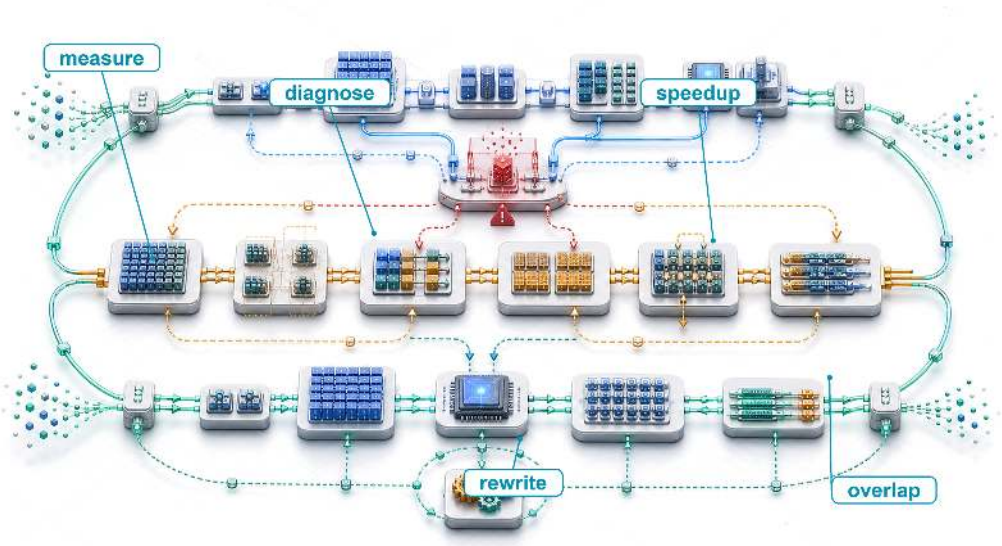

Purpose

Why can a fleet with abundant compute still fail to serve requests fast enough?

Expensive accelerators can spend much of a request waiting for data, software dispatch, or communication while their arithmetic units remain underused. Adding more machines may raise cost without removing the delay, and a faster isolated kernel may leave the request's critical path unchanged. The engineering stakes are useful serving capacity: how much work the existing fleet can complete while preserving latency and model quality. A configuration that answers one short request quickly may behave differently when many requests arrive with varied lengths and memory demands. Sharing work can improve throughput, but the extra state competes for memory and individual requests may wait longer. Reducing that state can admit more work only if the resulting computation remains accurate and the execution path can use the freed capacity. These interactions make optimization a question of measured constraints rather than a search for the fastest component. On one machine, a local improvement can be tested against a relatively contained execution path. Across a fleet, its value also depends on communication, synchronization, and the distribution of work across devices. The cost of a mistaken diagnosis grows when the same inefficient execution repeats across many replicas. Reaching useful capacity therefore requires matching numerical representations and execution schedules to the workload, then checking whether local savings survive along the complete request path. In C^3 terms, performance engineering makes compute gains accountable to the communication and coordination costs that determine sustained fleet throughput.

Learning Objectives

- Apply roofline analysis and execution traces to distinguish compute, memory, and launch limits
- Analyze prefill, decode, and batch-size regimes to predict latency-throughput behavior in LLM serving
- Diagnose serving bottlenecks using reproducible measurements at kernel, replica, and fleet boundaries
- Evaluate fusion, tiling, and graph replay against memory traffic, launch overhead, and resource limits
- Select precision, compilation, and runtime optimizations from bandwidth, quality, and deployment constraints
- Evaluate speculative decoding and sparse expert routing against acceptance, communication, and load-imbalance costs
- Construct a serving optimization plan that tests compute, communication, coordination, and quality trade-offs

The Memory Wall and Roofline Diagnosis

An H100 GPU capable of 989 TFLOP/s of dense FP16 Tensor Core compute can leave more than 99 percent of that compute idle during batch-one language-model decode. The processor is not short on arithmetic; it is starving for data. Each new token depends on the token before it, so every decode step must stream the model's weights from memory again to produce a single token. That is the autoregressive bottleneck (principle 15) in its most direct form, with no other requests sharing the cost of each weight read. Performance engineering operates inside that constraint: the memory wall, where moving bytes from memory to compute units can cap throughput long before Tensor Cores reach their advertised peak.

Partitioning, synchronization, recovery, and scheduling can put the workload on the right hardware and keep it alive. An orchestrator can hand a serving replica eight accelerators, yet nothing in that allocation guarantees that the replica completes enough useful work to justify its capacity. The orchestrator's own accounting already exposes the shortfall, because allocated capacity, hardware activity, and productive work are measured separately and can diverge widely, but that accounting cannot say where inside the execution path the missing work went. Across the multi-tier hierarchy of figure 0.15, performance engineering connects execution inside the Runtime & Serving row of the Serving band to the compute, communication, and coordination costs established across the physical and distribution tiers. A faster kernel matters when it shortens the request's critical path, releases memory for concurrent requests, or reduces the capacity needed to meet a service objective. The governing question is therefore which execution constraint limits useful fleet throughput, not which kernel can achieve the highest isolated speedup.

↩ The allocated, compute, and productive tiers of fleet resource accounting are established in section 17.

The recurring workload is an autoregressive language-model service. Its concrete instance throughout the chapter is a 70B-parameter model served on one node of eight H100 GPUs, a smaller instance of Archetype A (GPT-4/Llama-3) than that archetype's 175B reference model, sized so that a single tensor-parallel node forms one complete serving replica. It keeps the property that defines the archetype, a dense transformer too large for one accelerator, so even a single replica spans several accelerators through tensor parallelism and exchanges activations among them in every layer; separate replicas serve different requests.

↩ Archetype A and its 175B-parameter reference model are established in section 11.

A request first processes its input prompt in a prefill pass, then generates output tokens through successive decode passes. The key-value (KV) cache retains attention keys and values from the prompt and generated tokens so later passes can reuse them rather than recomputing them, though this shifts the bottleneck from compute to memory capacity and bandwidth as the cache grows. Time-to-first-token (TTFT) measures the delay from request arrival to the first output token, while inter-token latency (ITL) measures the gaps between subsequent tokens. Batching shares execution across active requests, but each request still consumes cache capacity and must meet its latency objective.

The estimates in this chapter are bounds and constructed budgets, and each names a limit worth testing. Measurement decides whether that limit binds. An end-to-end trace of the fixed workload first locates the exposed interval, whether waiting for input, communication, memory movement, computation, or host dispatch; only then do kernel counters and the roofline choose among fusion, precision, compilation, or algorithmic change, and the same measurement repeated after each change shows whether a local gain survives at the replica and fleet boundaries. The measurement contract in section 2 makes that comparison reproducible.

The Single-Machine Iron Law

The memory wall is one term in a larger budget. Equation 0.33 applies the single-machine iron law to local execution inside a replica, whose inter-device costs the Fleet Law accounts for separately. It decomposes execution time into three competing costs:

$$T = \frac{D_{\text{vol}}}{\text{BW}} + \frac{O}{R_{\text{peak}} \cdot \eta_{\text{hw}}} + L_{\text{lat}} \tag{0.33}$$

In overlapped execution, the roofline-style simplification replaces the sum of compute and data movement with the slower exposed term:

$$T \approx \max\left(\frac{O}{R_{\text{peak}} \cdot \eta_{\text{hw}}}, \frac{D_{\text{vol}}}{\text{BW}}\right) + L_{\text{lat}}$$

Here, D_{vol} is the data volume crossing the chosen memory boundary, BW is its bandwidth, O is the operation count, and $R_{\text{peak}} \cdot \eta_{\text{hw}}$ is the realized compute rate after accounting for hardware execution efficiency. The overhead term L_{lat} collects the exposed latency outside those compute and memory terms, and it has two parts. Host dispatch, meaning kernel launches and other software costs, belongs to each device's own execution. Exposed communication and synchronization arise only because the replica spans several devices. Local execution on each device and exposed inter-device delays together supply the service time of a replica; request queueing and routing add time outside that boundary. The roofline approximation asks which exposed term dominates at a given operating point. Increasing compute throughput for a memory-bound workload does not materially improve performance until the memory term is reduced. Eager framework execution can expose a large slice of the overhead term when the host submits many short kernels one at a time, a cost that section 2 quantifies and that graph compilation and replay later attack.

In the Fleet Law's terms, the data and compute terms together with the dispatch part of L_{lat} contribute to distributed local execution, whose unsharded reference time is T_{compute}, while the communication and synchronization part of L_{lat} becomes the Fleet Law's separate $T_{\text{comm}}(N)$ and $T_{\text{sync}}(N)$ terms. For a measured device shard, partitioning has already reduced the local workload; its execution time must not be divided by the device count again. Independent serving replicas process different requests, so adding replicas raises aggregate capacity without dividing the latency of one request. In the rest of the chapter, overhead means host dispatch unless communication is named. A local optimization therefore reaches the fleet through whichever of those terms it shortens.

CL

D

In batch-one decode, the data-movement term dominates the iron law.

Model compression changes either the work a model performs or the representation of its values, and this chapter takes up only the representation side. Pruning and distillation change the model itself and are model-design decisions. Quantization reduces the bytes per value without necessarily reducing the operation count, which makes it a performance-engineering lever; the chapter treats it as precision engineering. Either kind of compression saves time only when the implementation can exploit the smaller model or representation.

↩ The Fleet Law, which extends this single-machine iron law across N devices, is established in section 11.

Several levers map directly to those terms. When memory traffic dominates, operator fusion and tiling reduce the exposed data-volume term by eliminating intermediate high-bandwidth memory (HBM) round-trips. A fused sequence that keeps its intermediates in SRAM can shrink the exposed memory-access term dramatically; for long-sequence attention the traffic reduction can exceed an order of magnitude, as section 3 works out. Precision engineering attacks the same numerator from a different angle: FP8, INT4, and KV-cache compression (storing the per-token attention keys and values in fewer bytes) represent each value in fewer bytes, so the same physical bandwidth carries more useful model state.

Other levers change the overhead or compute terms. Graph compilation, including `torch.compile`, Accelerated Linear Algebra (XLA), and TensorRT, can reduce repeated host dispatch, fuse eligible operations, and plan memory across captured regions. Communication-computation overlap makes communication concurrent with independent useful work. Full hiding requires $T_{\text{comm}}(N) \leq T_{\text{compute}}/N$, the per-device compute time of the Fleet Law (equation 0.3), but the duration comparison alone is insufficient. The schedule must make that independent work ready in time, and resource contention must not erase the gain. When the whole communication interval is hidden, $T_{\text{overlap}} = T_{\text{comm}}(N)$ and communication adds nothing to the step; T_{overlap} can never exceed $T_{\text{comm}}(N)$, because only time actually spent communicating can be hidden. When communication outlasts the available compute window, the overlap term credits the part that was hidden. Algorithmic changes affect the work itself. Speculative decoding lets a small draft model propose several tokens that the full model verifies in one pass, and mixture of experts (MoE) activates only part of the model for each token; section 6 develops both.

Each technique attacks a different term, and this taxonomy guides optimization strategy: diagnose which term dominates (using the roofline model from section 17), then apply the technique targeting that term. A technique targeting a smaller exposed term can still help, but its end-to-end benefit is bounded by that term's share of execution time.

> Checkpoint 9.1: The single-machine iron law
>
> Verify understanding of system-level performance diagnosis:
>
> - ☐ **Memory-bound limit**: determine whether increasing the GPU's clock frequency (increasing FLOP/s) improves a memory-bound workload.
> - ☐ **Quantization term**: identify which term in equation 0.33 changes when quantization moves the representation from FP16 to INT4.
> - ☐ **Overhead term**: define the "Overhead" term in the iron law and explain why graph compilation targets it specifically.
> - ☐ **Compute-bound bandwidth**: evaluate the claim that memory bandwidth is irrelevant to the performance of a compute-bound system.
> - ☐ **Iron-law decomposition**: for a step that is 60 percent data movement, 30 percent compute, and 10 percent latency, estimate which single optimization buys the most wall-clock time, and what the iron law predicts once that dominant term is halved.

Triage starts outside the kernel. A missed latency or throughput target with low accelerator utilization points first to input, host, or communication stalls, because no kernel optimization helps an accelerator that is waiting for work. Only once the device is busy does the question become whether its kernels are compute-bound or memory-bound (figure 0.108). A busy GPU running a workload whose arithmetic intensity sits below the machine's ridge point, the intensity at which its bandwidth and compute bounds meet (section 17), routes to memory-bound remedies such as operator fusion or weight quantization.

The iterative diagnostic loop in figure 0.108 reinforces why profiling must precede optimization: every remediation pathway routes back into re-profiling the workload, ensuring that an engineering intervention targets the active limiter rather than an unexposed cost. A technique that changes a small or hidden term has limited influence on end-to-end time even if it produces a large local speedup. For serving, the missed target is a request-latency or throughput objective; for training, it is step time. Misdiagnosis wastes engineering effort and, worse, a performance intervention deployed without rigorous measurement can shift the system to an inferior operating point on its efficiency frontier.

The Efficiency Frontier

Diagnosis says which term to shrink; it does not say what the shrinking is for. The objective is a position on the **efficiency frontier**, the Pareto-optimal subset of the feasible configurations for a stated workload and resource budget. A configuration on this frontier cannot improve one measured

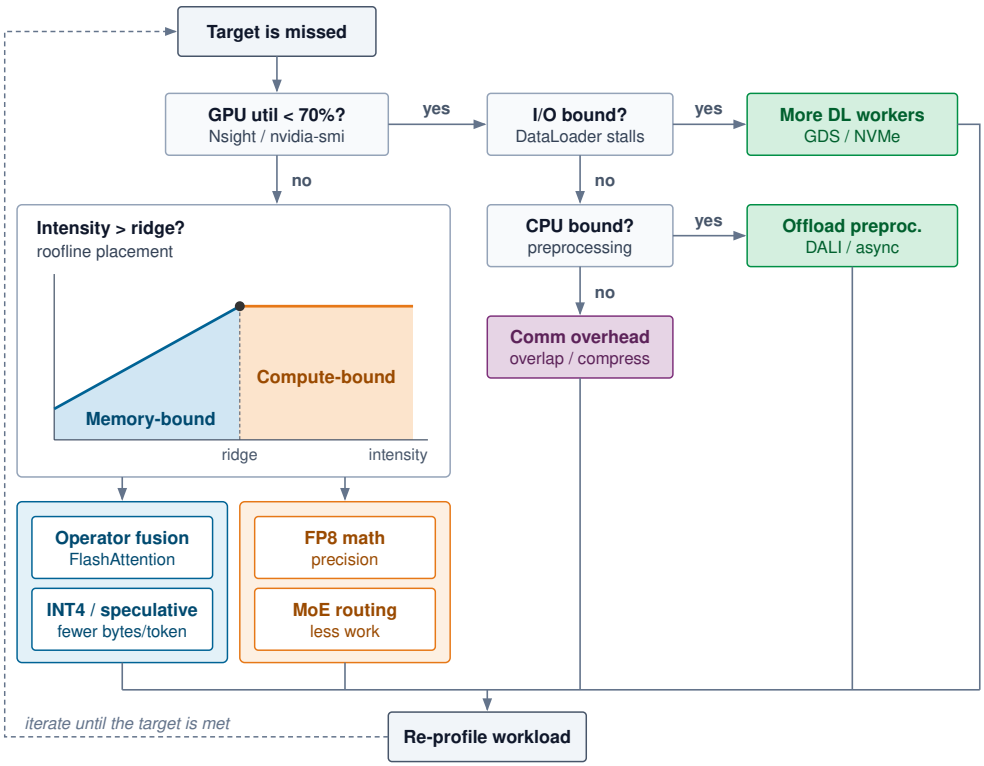


Figure 0.108: Iron law diagnostic flowchart: A troubleshooting flow that starts from a missed step-time or token-latency target and low accelerator utilization, branches through I/O, CPU, and communication-overhead checks, and classifies the workload as compute-bound or memory-bound at the leaves. Compute-bound paths point to lower-precision arithmetic and to reductions in active work such as MoE routing, whose saving becomes weight bytes rather than arithmetic in batch-one decode (section 6); memory-bound paths point to operator fusion, tiling, weight quantization, and speculative decoding. Overhead-bound symptoms (data loading, preprocessing, communication) are surfaced earlier in the flow and addressed before the final compute/memory classification.

dimension without sacrificing another within that set. Its most familiar picture is a two-dimensional projection, the curve of model quality against system throughput. Thompson et al. (2021) show why efficiency matters for deep learning: quality improvements have required rapidly increasing compute, the same appetite that the scaling laws quantify. Scaling laws set how much compute a quality target demands; performance engineering sets how much of the purchased compute becomes useful work, expanding the feasible set by making a quality level achievable at higher throughput. The deployment decision then selects an operating point that meets the application's latency, cost, and quality requirements.

The full frontier spans five measurable dimensions (table 0.80), and each one trades against at least one other.

↩ The power-law relation between compute and model quality that drives fleet growth is established in section 6.

Table 0.80: Efficiency frontier dimensions: Performance optimization balances measurable throughput, latency, cost, quality, and memory constraints rather than a single hardware-utilization number.

Dimension	How it is measured	What it constrains	Typical tension
Throughput	Tokens/second or requests/second	How much work the system completes per unit time	Larger batches improve throughput but often degrade latency
Latency	Time-to-first-token and inter-token latency	How quickly the system responds to individual requests	Lower latency can require smaller batches and higher per-token cost

Dimension	How it is measured	What it constrains	Typical tension
Cost	Dollars per million tokens	Economic efficiency of the system	Cheapest configurations may miss latency or quality targets
Quality	Perplexity, benchmark accuracy, or human preference	Accuracy and usefulness of model outputs	Precision reduction and speculation require quality guardrails
Memory	Peak GPU memory	Feasible batch size and sequence length	Larger contexts and batches consume capacity needed for model state

The dimensions in table 0.80 interact in nonobvious ways. Increasing batch size can improve throughput and cost efficiency while degrading latency. Reducing precision can lower memory demand and improve throughput but may degrade quality. Speculative decoding can improve latency but may increase per-token cost. The performance engineer's task is to navigate these trade-offs guided by the application's specific requirements.

An interactive chatbot might target time-to-first-token under 200 ms and inter-token latency under 50 ms, accepting a higher per-token cost to meet those illustrative limits. An offline document-summarization pipeline may instead prioritize completed work per dollar, subject to a deadline and a quality threshold. A quality-sensitive application can impose a stricter acceptance criterion while retaining its own latency constraints. These requirements select different feasible operating points; performance engineering must make the trade-off explicit before choosing an optimization.

For the recurring 70B deployment, a latency-oriented configuration might use small batches and speculative decoding to reduce the time a request waits for tokens. A throughput-oriented configuration might use larger batches and INT4 weights to amortize weight reads and free memory for concurrent requests. The larger batch raises aggregate throughput while lengthening each request's token intervals, and reduced precision is usable only if the model still meets its quality criterion. Once batching has been analyzed, section 2 prices both operating points in time and cost per token.

The Memory Wall

The efficiency frontier fixes the objective; memory bandwidth sets the first bound on reaching it. The wall itself is a hardware fact the replica inherits. Batch-one decode streams the active weights from HBM for about one multiply-accumulate per weight read, and on an NVIDIA H100 989 TFLOP/s of dense FP16 Tensor Core compute faces only 3.35 TB/s of peak HBM bandwidth. Performance engineering adds the kernel's view of that wall. Batching, sparse activation, and on-chip reuse all change the traffic, so the diagnostic question is how far a given kernel sits from the bandwidth bound and which of those levers can move it. The answer depends on the constraint each level of the memory hierarchy places on a kernel's schedule (table 0.81).

↩ The memory wall, HBM bandwidth per generated token, and the accelerator memory hierarchy are established in section 3.

Table 0.81: GPU memory hierarchy constraints: Faster GPU storage is smaller, closer to the compute units, and more explicitly managed, while HBM supplies capacity at much higher latency and energy cost.

Level	Scale on H100	Access cost	Optimization constraint
Registers	256 KB per SM across 132 SMs, about 33 MB total	One clock cycle	Private to each thread; FP32 accumulators can force register spilling to device-backed local memory, with cost determined by cache hits and misses; shared-memory spilling requires explicit compiler support
Shared memory (SRAM)	Up to 228 KB configurable shared memory per SM	About 29 clock cycles (~17 ns)	Shared within a thread block; operator fusion is profitable when intermediates fit here instead of returning to HBM
L2 cache	52 MB on-chip buffer	About 263 clock cycles (~150 ns)	Captures reuse automatically across SMs but cannot be explicitly managed by kernel authors

Level	Scale on H100	Access cost	Optimization constraint
HBM	80 GB at 3.35 TB/s bandwidth	About 300 ns per access	Supplies model and activation capacity, but reading the full device takes about 26 ms, far longer than real-time inference latency targets

Two consequences follow for kernel design. Register pressure becomes a first-class constraint in custom kernels, whether written in CUDA or in a tile-level language such as Triton (section 5), because tile size sets both arithmetic intensity and register demand. Data placement becomes the optimization target whenever HBM traffic limits execution: operator fusion removes intermediate round trips when a legal schedule can keep the values in registers or shared memory, tiling organizes reuse within limited SRAM (which is why on-chip reuse matters so much for attention), and precision engineering shrinks each trip's payload by representing values in FP8 or INT4 instead of FP16. Graph compilers apply supported versions of these transformations automatically. Each intervention must still be checked against launch overhead, dependencies, and on-chip resource limits, which can stop a low-intensity kernel before it saturates HBM bandwidth.

The roofline model

The memory wall becomes a diagnostic instrument once each kernel is placed on the roofline model[1] (Williams et al. 2009). A kernel with arithmetic intensity I attains at most $\min(R_{\text{peak}}, I \times \text{BW})$, and the ridge point $I_{\text{ridge}} = R_{\text{peak}}/\text{BW}$ separates the memory-bound side of this ideal envelope from its compute-bound side. The tighter ceiling bounds performance; a measurement below that ceiling still requires investigation of latency, dependencies, and implementation limits.

[1] **Roofline model**: The original paper framed the model for multicore CPUs (Williams et al. 2009); the same two-ceiling diagram extends directly to accelerators.

↩ The roofline model and the H100 ridge point are established in section 6.

Definition 9.1: Measured arithmetic intensity

Measured arithmetic intensity is the ratio of the floating-point operations a kernel actually executes to the bytes observed crossing a named memory boundary, such as HBM, during that execution (FLOP per byte).

1. **Significance**: It places a profiled kernel on the same roofline as the bandwidth (BW) and compute (R_{peak}) ceilings, so its distance below the algorithmic estimate exposes traffic that the algorithm did not require.
2. **Distinction**: Unlike *algorithmic intensity*, which counts the data movement an idealized algorithm requires under a stated memory model, measured intensity includes tiling, cache behavior, fusion, padding, and redundant transfers.
3. **Common pitfall**: Arithmetic intensity is not a fixed property of a model. Batch size can change algorithmic reuse, while fusion and tiling primarily change measured HBM intensity by keeping intermediates on chip. A roofline point is interpretable only when its FLOP convention and memory boundary match the ceilings on the same plot.

The H100's FP16 ridge, established in section 6, is the reference point for every placement that follows:

$$I_{\text{ridge}}^{\text{H100, FP16}} = \frac{989\ \text{TFLOP/s}}{3.35\ \text{TB/s}} \approx 295\ \text{FLOP/byte}$$

Below that intensity, the HBM bandwidth bound is tighter than the H100's FP16 compute bound. FP8 doubles the Tensor Core rate to 1979 TFLOP/s while bandwidth stays at 3.35 TB/s, so the ridge rises to about 590.7 FLOP/byte. If all counted operand traffic halves while the operation count stays fixed, arithmetic intensity doubles as well, preserving the kernel's position relative to the ridge. In that ideal comparison, lower precision raises the bandwidth-limited ceiling by moving more values per second. Actual gains depend on which tensors change precision and on conversion, scaling, and kernel costs.

The ridge also moves across hardware generations, because peak arithmetic has outgrown HBM bandwidth for the physical reasons section 3 develops. For diagnosis, the ridge column of table 0.82 matters more than the growth trend, because a kernel's regime can change with the hardware even when its intensity does not.

Table 0.82: The widening memory wall: Per-generation FP16 ridge points, the diagnostic consequence of compute outgrowing memory bandwidth (18× against 8.9× from V100 to B200). The ridge point has roughly doubled overall (V100 to B200), pulling more workloads into the memory-bound regime over time, though the per-generation movement is not monotonic (B200 sits slightly below H100).

GPU	Year	Peak FP16 (TFLOP/s)	HBM BW (TB/s)	Ridge Point (FLOP/byte)
V100	2017	125	0.9	139
A100	2020	312	2.04	153
H100	2022	989	3.35	295
B200	2024	2,250	8	281

At 200 FLOP/byte, an operation lies on the compute side of the V100 and A100 envelopes but on the bandwidth side for the H100 and B200, whose ridges sit roughly 2× above the V100's 139 FLOP/byte. That comparison holds intensity fixed; a different cache hierarchy or kernel can change the measured traffic as well. Reducing exposed memory traffic becomes more valuable when compute grows faster than bandwidth, but the applicable intervention still follows the measured limit. A hardware upgrade therefore calls for re-profiling rather than an assumed speedup.

Workload placement on the roofline

The following operations span three orders of magnitude in estimated arithmetic intensity. Their roofline positions identify candidate limits; the traffic assumptions explain what must be checked against a real implementation.

Large general matrix multiply (GEMM) operations expose substantial opportunities for data reuse. A square matrix multiplication of dimension 4096×4096 in FP16 performs approximately 137.4 billion FLOPs. Counting one read of each input matrix and one write of the output gives roughly 100.7 MB of traffic and an arithmetic intensity of approximately 1365.3 FLOP/byte. This idealized intensity sits above the H100's ridge point. Reaching the compute ceiling still requires a kernel whose tiling, instruction mix, and parallelism exploit that reuse; tile reloads can increase measured HBM traffic.

Element-wise operations expose much less reuse. For a Gaussian error linear unit (GELU) activation applied to a 4096×4096 tensor, the illustrative accounting assumes 5 operations per element and one load and store, yielding an arithmetic intensity of approximately 1.2 FLOP/byte. The operation count depends on the activation approximation and is not an instruction count for a specific kernel. The low intensity makes HBM traffic a candidate limit, while launch cost, nonlinear-function execution, and memory-access efficiency determine how closely the kernel approaches that bound.

Autoregressive large language model (LLM) decoding at batch size one is the kernel-level form of the whole-step decode placement in section 6. One dense matrix-vector product against a weight matrix of hidden dimension 4096 gives approximately 1 FLOP/byte, and a decode step streams many such matrices before cache reads, communication, and dispatch add time. The estimate covers the weight-streaming component, not every operation in a decode step. Recommendation serving in the style of Archetype B (DLRM at Scale) has a different low-intensity component: embedding lookups gather rows from large tables and perform little arithmetic on them. Memory-access latency, bandwidth, and any remote communication then matter more than Tensor Core peak throughput for that component.

↩ Archetype B's sharded embedding tables and their lookup-dominated serving path are established in section 11.

Attention's intensity depends on phase, implementation, and the traffic boundary. Counting the full score matrix, each head performs $4S^2 d_{\text{head}}$ FLOPs for its two matrix products. For the Llama 2 70B head dimension $d_{\text{head}} = 128$ and a sequence of $S = 2{,}048$ tokens, the unfused accounting writes and rereads the $S \times S$ score and probability matrices in FP16, $4S^2$ two-byte transfers beside the four $S \times d_{\text{head}}$ operand tensors. Dividing $4S^2 d_{\text{head}}$ FLOPs by $2(4S^2 + 4S d_{\text{head}})$ bytes gives about 60 FLOP/byte, and the quadratic traffic caps the ratio near $d_{\text{head}}/2$ however long the sequence grows.

An ideal tiled accounting retains scores on chip and counts one read each of **Q**, **K**, **V**, and one output write, four $S \times d_{\text{head}}$ tensors of 2-byte values. The ratio is $4S^2 d_{\text{head}}/(4 \times 2Sd_{\text{head}}) = S/2$, about 1,024 FLOP/byte. Finite SRAM and the tile schedule can require additional reads, so this value is an upper bound on intensity under that accounting rather than a prediction for every tiled kernel. For decode, counting one full KV-cache read per query head gives approximately 1 FLOP/byte. Grouped-query attention (GQA), which Llama 2 70B uses, lets 8 query heads share each cached key and value head, so one read of the cache can serve the whole group. If the implementation realizes that reuse, the corresponding estimate rises to about 8 FLOP/byte, still below the ridge.

Under these traffic assumptions, only batched GEMM and tiled prefill attention expose enough reuse to approach the compute-bound regime; every other example has a bandwidth ceiling below peak arithmetic throughput (table 0.83). That placement identifies where reducing bytes may help; profiling determines whether memory traffic is the exposed cost.

Table 0.83: Arithmetic intensity of common ML operations: Many transformer inference operations, aside from large batched GEMMs and tiled prefill attention, fall below the H100's ridge point, placing their ideal bound on the bandwidth slope. Attention rows use one head at a 2,048-token sequence with head dimension 128 in FP16. Performance engineering focuses on reducing the memory traffic of the memory-bound operations.

Operation	Arithmetic Intensity	H100 FP16 Regime	Primary Bottleneck
GEMM (4096×4096)	~1,365 FLOP/byte	Compute-bound	Tensor core throughput
Attention prefill, unfused	~60 FLOP/byte	Memory-bound	HBM bandwidth
Attention prefill, tiled	~1,024 FLOP/byte	Compute-bound	Tensor core throughput
Attention decode (KV read)	~1 FLOP/byte	Memory-bound	HBM bandwidth
Element-wise (GELU)	~1.2 FLOP/byte	Memory-bound	HBM bandwidth
LLM Decode (batch=1)	~1 FLOP/byte	Memory-bound	HBM bandwidth

The operations this chapter optimizes fall on both sides of the H100's FP16 ridge (figure 0.109). Batch-one decode and unfused attention prefill sit on the HBM bandwidth slope, while tiled prefill and large GEMM operations reach the Tensor Core ceiling. Each position identifies the tighter ideal bound, not measured performance at that bound; a kernel that runs below the envelope may first need better scheduling, locality, or parallelism before either peak resource rate becomes limiting.

The workload comparison explains why peak FLOP/s alone cannot predict small-batch decode performance. When weight streaming dominates, memory bandwidth limits token generation, while memory capacity constrains the requests that can be batched. Larger batches can reuse weights across requests and move the workload toward the compute ceiling; the serving regime determines how far that shift remains useful.

Serving Regimes, Batch Size, and Prefill-Decode

The weight-streaming estimate from workload placement is the source of the chapter's opening figure. Decoding LLM requests one at a time performs about one operation per byte of weights streamed, which leaves nearly all of an H100's FP16 compute idle during each decode step. Batching requests amortizes those reads across many tokens, but combining prompt processing and token generation without accounting for their different costs can increase latency. The serving regime, meaning how a system manages the batch dimension and divides prompt processing from token generation, shapes both weight reuse and interference between requests. These two features establish the workload conditions under which subsequent optimization techniques must be evaluated.

Batch size as the universal control knob

For memory-bound LLM serving, batch size is often the first performance lever to test, and also one of the most constrained. Increasing the batch size raises arithmetic intensity where requests reuse the same weights. For the weight-dominated portion of an LLM decode step, the following estimate is approximately linear in batch size:


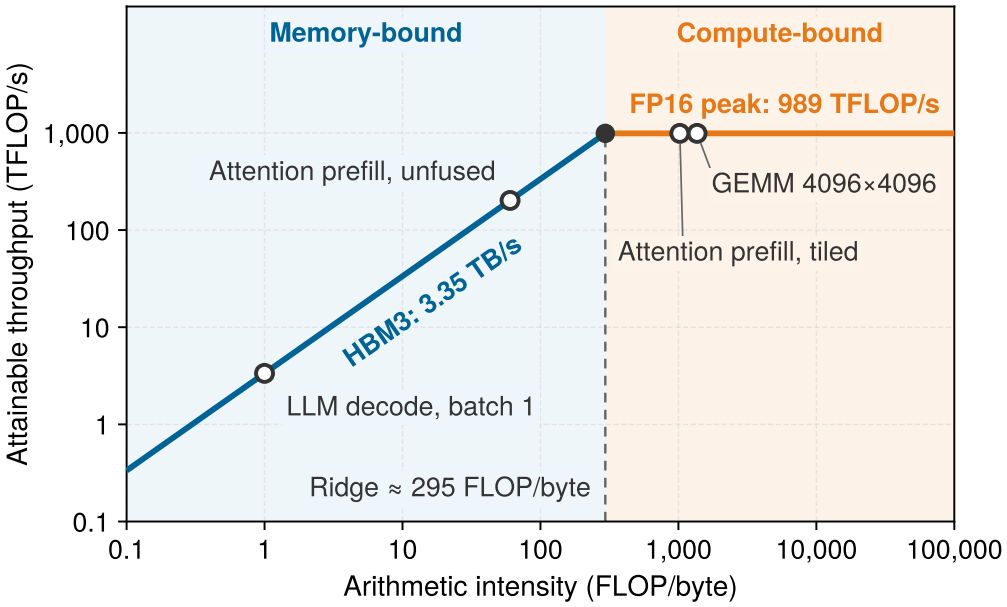


Figure 0.109: The roofline model: Attainable throughput versus arithmetic intensity on log-log axes for an H100. The blue slope is the HBM bandwidth bound (3.35 TB/s) and the orange ceiling is FP16 Tensor Core peak (989 TFLOP/s); they meet at the ridge point, roughly 295 FLOP/byte. Markers place four operations from the workload comparison at their FP16 intensities: batch-1 decode and unfused attention prefill sit on the slope, while tiled attention prefill and a large GEMM reach the ceiling. Markers show ideal bounds at the stated FP16 intensities, not achieved throughput.

$$I_{\text{decode}}(B) = \frac{2PB}{Ps_{\text{elem}} + Bd\,s_{\text{elem}}} \tag{0.34}$$

Here, P is parameter count, B is batch size, d is hidden width, and s_{elem} is bytes per element, assuming weights and activations share one precision. The numerator counts the whole model's arithmetic, while the activation term counts only one matrix's input vectors; even summed over every weight matrix, the activations stay far smaller than the Ps_{elem} weight bytes at the batch sizes considered here, so the shortcut does not change the estimate. This simplified weight-reuse estimate excludes KV-cache traffic and inter-device communication; it describes why batching helps before those other costs become binding. At batch size 1, the denominator is dominated by the weight term (Ps_{elem}), and $I_{\text{decode}} \approx 2/s_{\text{elem}} \approx 1$ FLOP/byte for FP16. At batch size 256, the weight term still dominates, but the same weight bytes are amortized across more requests, so $I_{\text{decode}} \approx 2 \times 256/s_{\text{elem}} \approx 256$ FLOP/byte, approaching the compute-bound regime.



Larger batches raise arithmetic intensity toward the ridge.

Batching moves weight-dominated execution toward the compute ceiling until cache traffic and memory capacity stop it. End-to-end serving reference values put model FLOPs utilization (MFU) at about 5 percent at batch size 1, against an illustrative large-batch value of about 40 percent. Both include prefill work, which is why the batch-one value sits above the pure decode bound that notebook 9.1 computes later in this section. With hardware, price, and useful work per token held fixed, that utilization ratio is a 8× reduction in cost per token, which is the economic reason serving systems are designed around batch size. A deployed service still has to measure its own prompt/decode mix, completed throughput, and latency together before planning capacity on that ratio.

The same economics can be priced on the recurring deployment, for the latency-oriented and throughput-oriented operating points of section 17, once the KV cache that the weight-reuse estimate omitted is added back. Take the FP16 weights of the 70B model, sharded across eight GPUs, and let every request hold a full 4,096-token KV cache. At batch one, each GPU streams about 17.7 GB per decode step, so a step takes at least 5.3 ms and the replica emits at most 190 tokens/s. At a batch of 32 requests, each GPU streams 22.9 GB, giving a step-time lower bound of 6.8 ms and an

aggregate output upper bound of 4,690 tokens/s. At $2.50 per GPU-hour, the corresponding cost lower bounds per million output tokens are $29 and $1.19. Their ratio is roughly 25×, while the step-time bounds differ by only 1.3×. The batched point buys a large cost reduction for a smaller latency penalty, and that asymmetry is the shape of the frontier trade-off.

This bandwidth-only cost ratio is larger than the 8× of the end-to-end MFU anchors above, mainly because the two comparisons count different work. Both bandwidth bounds count decode alone and assume every step streams at peak bandwidth with no launch, communication, or queueing delay, whereas the anchors' batch-one value already includes compute-dense prefill, which raises its utilization and so narrows the ratio. Realized ratios come from completed throughput and per-request latency recorded together at a stated offered load. One accounting rule matters when converting those measurements to cost: a tensor-parallel replica produces one shared output stream per request, so its aggregate token rate must not be counted once for every participating GPU.

Memory limits that reuse: active requests need KV cache for prompt and generated tokens, alongside model weights and runtime state. On the recurring deployment, 140 GB of FP16 weights exceed one H100's memory; sharding across the node leaves a 17.5 GB weight shard per GPU. Remaining capacity must cover cache, workspace, and runtime overhead. INT4 reduces the weight payload to a quarter of its FP16 size before metadata, and section 4 later prices how that saving and a compressed cache change batch capacity.

A serving scheduler can add new requests as others finish, provided demand and available memory permit admission. Local performance engineering supplies the capacity and execution-time measurements that make those decisions feasible. Weight quantization reduces shared model storage, while cache compression and allocation efficiency reduce the capacity needed for active requests. Section 6 develops the scheduler; the local point here is that memory savings can expand its feasible batch range without guaranteeing that the largest batch meets latency targets.

PagedAttention (Kwon et al. 2023) reduces allocation waste by storing KV cache in fixed-size blocks allocated on demand, rather than reserving contiguous space for the longest sequence each request might reach. Reserving 4,096 tokens for requests that average 500 leaves much of that reserved capacity unused. Block allocation lets other requests use capacity that would otherwise remain reserved, although partially filled blocks and runtime headroom still consume memory. The benefit is a larger feasible active-request set when allocation waste is the limiting factor.

PagedAttention and KV cache quantization address complementary sources of memory pressure. PagedAttention reduces memory waste from fragmentation, while quantization reduces memory usage from precision. Their joint batch-size gain depends on the model-weight footprint, request-length distribution, and scheduler headroom, so the two savings do not simply multiply.

↪ The PagedAttention allocator, its block table, and the KV-cache capacity it recovers from fragmentation are developed in section 6.

The prefill-decode decomposition

Modern LLM serving systems decompose each request into two distinct phases with fundamentally different performance characteristics. The distinction between these phases drives system architecture and optimization strategy.

The prefill phase processes the entire input prompt in parallel. If the prompt contains S tokens, the prefill phase executes a single forward pass over all S tokens simultaneously. The GEMM operations have shape $[S, d] \times [d, d]$, making the batch dimension equal to S. For a prompt of 1024 tokens, this is arithmetically intensive: the arithmetic intensity is approximately $2 \times 1024/2 = 1024$ FLOP/byte for FP16 weights, well into the compute-bound regime. This weight-reuse estimate places the example GEMM above the FP16 ridge point; it omits activation and output traffic. Short prompts, kernel shapes, and other operators can produce different limits, so prefill as a whole still requires profiling.

The decode phase generates output tokens one at a time, autoregressively. Each step has a batch dimension of 1 for a single request or the number of requests scheduled together for batched serving. The weight-streaming analysis in section 2 explains why dense batch-one decode often has a bandwidth limit, while cache traffic, launches, and communication can add further exposed costs.

The prefill-decode decomposition connects serving design to the two operational regimes mapped in figure 0.109. Long-prompt prefill GEMMs can have enough arithmetic intensity to place their roofline bound on the compute ceiling, while weight-dominated, low-batch decode usually has a bandwidth ceiling; prompt length, batch size, and kernel implementation determine how closely exe-

cution approaches each bound. A real serving system must handle both phases, often simultaneously across different active requests, so their competition for accelerator resources also matters.

Disaggregated serving addresses this interference by running prefill and decode on separate hardware pools. The roofline placement tells each pool what to buy. The prefill pool wants arithmetic throughput for its compute-bound GEMMs, while the decode pool wants memory bandwidth and capacity for weight streaming and KV cache, which also makes it the natural home for aggressive weight quantization. Each pool can then choose its own batch size and parallelism strategy for its latency target. The KV cache computed during prefill is transferred to a decode server, which handles the subsequent autoregressive generation. Separation therefore introduces a communication cost as it removes competition between the phases. Its benefit depends on whether the reduced interference and independent tuning outweigh cache-transfer time and waiting for capacity in either pool.

↪ Disaggregated prefill and decode pools, joined by a KV-cache transfer on the critical path, are developed in section 6.

The performance characteristics of each phase guide the choice of optimization. FlashAttention reduces attention's memory traffic mainly during prefill, because only prefill forms the full $S \times S$ score matrix that a tiled kernel avoids writing to HBM; a decode step has a single query row and no quadratic intermediate. Decode attention benefits from a different fused kernel, one that reads each cached key and value once and computes scores, softmax, and the weighted sum in a single pass rather than in separate kernels with their own launches and intermediate writes. Either kernel's effect on total latency still depends on how much of the forward pass attention consumes. Speculative decoding targets the decode phase. KV cache quantization reduces decode storage and read traffic, while its encoding cost begins when prefill creates the cache. Precision engineering can help both phases through different mechanisms. Supported FP8 kernels offer a higher compute ceiling for compute-bound prefill, while FP8 or INT4 weights reduce the bytes streamed during weight-dominated decode. The resulting speedup depends on format support, conversion overhead, and the costs left unchanged by the precision reduction; the model must also retain the required output quality.

For the recurring 70B replica, the decode phase's distance below the ridge can be priced in two steps: its arithmetic intensity, then the token rate that HBM bandwidth alone permits.



Napkin Math 9.1: The Roofline diagnostic

Problem: A 70B parameter LLM is deployed on 8× H100 GPUs with tensor parallelism. At batch size 1, each GPU holds approximately 8.75B parameters in FP16 (17.5 GB of weights). Each decode step reads its weight shard to produce one token. What is the achieved arithmetic intensity, and what is the theoretical maximum token generation rate?

Math:

Step 1: Arithmetic intensity. Each decode step per GPU: FLOPs $= 2 \times 8.75 \times 10^9 = 17.5$B FLOPs. Bytes loaded $= 8.75 \times 10^9 \times 2$ bytes $= 17.5$ GB.

$I = \frac{1.75 \times 10^{10}\ \text{FLOP}}{1.75 \times 10^{10}\ \text{bytes}} = 1$ FLOP/byte

At 1 FLOP/byte, the operation sits far below the H100 ridge point of ~295 FLOP/byte: deeply memory-bound.

Step 2: Token rate. Since the operation is memory-bound, performance is limited by bandwidth, not compute:

$T_{\text{decode}} = \frac{17.5\,\text{GB}}{3.35\,\text{TB/s}} \approx 5.2\,\text{ms}$ per token

Because all eight shards stream their weights in parallel and together emit one token per step, the bandwidth-only ceiling is approximately 191.4 tokens/s for the whole replica, not per GPU. In practice, overheads from KV cache reads and NVLink synchronization reduce this substantially below the ideal bandwidth-only limit.

Systems insight: At batch size 1, the bandwidth-only calculation reaches about 0.3 percent of the H100's FP16 peak FLOP/s, leaving idle the more than 99 percent of compute that opened the chapter. This is the decode-only bound; the end-to-end batch-one anchor of about 5 percent MFU sits higher because it also counts compute-dense prefill. Larger batches amortize weight reads across requests, quantization reduces the weight payload, and speculative decoding

seeks multiple accepted tokens per target-model pass. Each changes the weight-streaming budget, with additional costs to evaluate before claiming a speedup.

The decode calculation identifies weight streaming as a limit, while the prefill analysis exposes a different opportunity in attention intermediates. These are distinct sources of HBM traffic, and which one dominates depends on the deployed service's prompt and output lengths. Profiling must locate the exposed cost and establish a reproducible baseline before an optimization can be selected.

System Profiling

Suppose the recurring 70B replica misses its inter-token latency objective. Before any kernel is rewritten, the engineer needs to know which interval of the decode step is exposed: weight streaming, attention, element-wise work, collectives, or host dispatch. A kernel made several times faster changes nothing if the interval it shortens was small or already hidden behind other work. System profiling answers that question by showing where execution waits and which intervals an intervention could shorten. The candidate remedies mapped across the branches of figure 0.108 are hypotheses: fusion removes intermediate transfers, graph replay reduces repeated host submission, and precision reduction moves fewer bytes. Their detailed mechanisms follow the measurement method; selecting one first requires evidence that its target cost is exposed.

Systems Perspective 9.1: The physics of profiling (the Heisenberg effect)

Instrumentation adds work to a distributed ML system. Gathering high-resolution telemetry, such as tracking every CUDA kernel launch or memory allocation, consumes host cycles and memory and can introduce additional transfers or synchronization. In heavily optimized serving pipelines, profiling can induce the very latency spikes the engineer is trying to diagnose. This observer effect favors low-overhead telemetry for continuous monitoring and short, targeted traces for diagnosis. Detailed tracing in production requires a bounded collection window and an overhead budget; isolated runs are useful when they reproduce the relevant workload and contention.

The cost must be measured for the selected workload and collection settings. The PyTorch profiler and Nsight Systems can both perturb execution, and neither has a fixed overhead independent of the events collected; richer options, such as recording tensor shapes or allocation history, perturb more. An engineer should record the enabled options, compare instrumented and uninstrumented runs, and use traces to explain execution structure while measuring production latency with instrumentation overhead controlled.

The profiling hierarchy

Profiling levels are useful only if they guide the drill-down from symptom to intervention. ML system profiling partitions observability across four tiers, trading observational breadth for diagnostic detail. Figure 0.110 structures this descent from top-level application symptoms down to hardware root causes, tracing how diagnostic scope narrows from fleet-wide metrics over hours to streaming multiprocessor counters over microseconds.

The drill-down starts at the application level, where end-to-end metrics such as tokens per second, time-to-first-token, p99 latency, and GPU utilization reveal whether the user-facing system meets its target. Framework profiling then associates time with model operations and exposes scheduling, data-transfer, and collective-communication dependencies. Kernel profiling narrows the diagnosis to execution intervals, launch gaps, and overlap opportunities. Hardware counters complete the chain: tools such as NVIDIA Nsight Compute report achieved memory bandwidth, occupancy, and instruction mix for a selected kernel. Distributed scope cuts across these levels. Application metrics describe the fleet outcome, while synchronized traces across ranks identify imbalance before an engineer drills into one rank's kernels.

For example, an application trace may reveal missed token-latency targets; framework traces across ranks may then expose a lagging collective. Kernel timelines distinguish late arrival from

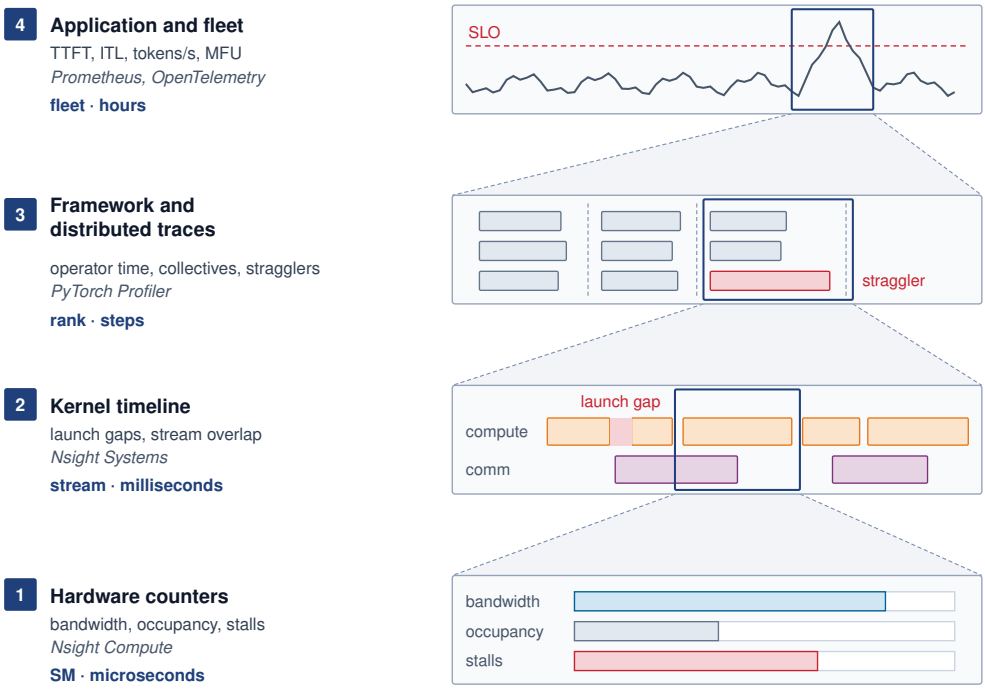


Figure 0.110: The profiling hierarchy: Diagnosis descends from the application symptom to the hardware root cause. Each rung names the evidence that level exposes and a representative tool; the navy label under each tool gives the scope and time scale one sample covers, and each highlighted window expands into the trace below it. Each lower level trades breadth for the detail needed to isolate a root cause.

slow communication, and hardware counters test whether the preceding computation suffered from memory stalls or register pressure. Tensor Core use is also a measurement question: matrix alignment can affect kernel efficiency, but a misaligned shape does not universally force a fallback to scalar CUDA Core instructions. Library version, datatype, hardware, and kernel selection determine the executed path. Inspecting the instruction mix is more reliable than inferring that path from tensor dimensions alone.

Key performance metrics

Metrics are not interchangeable; each answers a different bottleneck question (table 0.84). Model bandwidth utilization (MBU), achieved memory bandwidth divided by peak bandwidth, is the decode counterpart of MFU. Together they diagnose useful hardware work, TTFT and ITL diagnose serving latency, and throughput exposes capacity under batching. Reading the wrong one hides the bottleneck: a decode path at a few percent MFU can be running its memory system near saturation.

Table 0.84: Performance metrics and their diagnostic use: Each metric measures a different layer of the system, so choosing the wrong metric can hide the real bottleneck. Target values in the last column are illustrative planning thresholds, consistent with the interactive example in section 17; each service sets its own.

Metric	Definition	Best diagnostic use	Caveat or target
MFU	Fraction of hardware peak FLOP/s productively used by model computation	Training efficiency across memory limits, launch overhead, communication wait, and software overhead	40–60% is common in well-tuned LLM training; above 60% is excellent

Metric	Definition	Best diagnostic use	Caveat or target
Hardware FLOPs Utilization (HFU)	Executed arithmetic rate, including recomputation, divided by peak FLOP/s	Separating useful model work from overhead such as activation recomputation	Usually exceeds MFU; the gap includes recomputation that may be necessary for memory feasibility
Time-to-first-token (TTFT)	Latency from request arrival to the first generated token	Interactive serving responsiveness, including queueing, prefill, and initialization	Below 500 ms is generally acceptable; below 200 ms feels responsive
Inter-token latency (ITL)	Time between consecutive generated tokens during decode	Perceived generation speed after the first token	Below 50 ms supports comfortable reading; real-time speech may require below 25 ms
Throughput	Tokens/second for the system, or tokens/second/GPU for per-device efficiency	Aggregate serving or training capacity under batching	Large batches improve throughput but increase per-request latency; section 4 covers the queueing trade-off
Model Bandwidth Utilization (MBU)	Achieved memory bandwidth divided by hardware peak bandwidth	Memory-bound inference, especially decode workloads	Low MFU with high MBU, as in the small-batch decode of notebook 9.1, marks a memory-saturated path rather than an inefficient one

Using the roofline for diagnosis

The metric choice in table 0.84 reflects the fundamental bottleneck shift between training and inference. MFU is usually the right training-efficiency lens, while MBU is often the right inference-efficiency lens when decode is limited by HBM traffic. The roofline model from section 17 becomes a diagnostic tool when combined with profiling data. Diagnosis follows three steps:

1. Measure the achieved FLOP/s and memory bandwidth for a kernel using Nsight Compute.
2. Compute measured arithmetic intensity from executed FLOPs and observed bytes at the same memory boundary used for the bandwidth ceiling (FLOP/byte). Compare it with the algorithmic estimate to expose extra traffic.
3. Plot the measured performance against the roofline ceiling.

The plotted position then sorts the kernel into one of three cases, provided the ceilings match its datatype and operations. A kernel far below both ceilings has an execution problem rather than a resource limit, because dependencies, instruction mix, memory-access latency, or too little parallel work keep it from either peak. A kernel near its bandwidth ceiling gains little from faster arithmetic; only moving fewer bytes, through fusion or lower precision, moves it. A kernel near its compute ceiling can be helped only by doing less arithmetic or by a faster supported execution format or device. The roofline narrows the search, while the trace and counters establish which cost an intervention can actually remove.

Consider an illustrative profiling result: a LayerNorm kernel on an H100 reports 5 TFLOP/s of achieved compute and 2.8 TB/s of achieved memory bandwidth. Its arithmetic intensity is 5 TFLOP/s / 2.8 TB/s $\approx$ 1.8 FLOP/byte. The H100's ridge point is approximately 295 FLOP/byte at FP16. Since 1.8 FLOP/byte is far below 295 FLOP/byte, the roofline places the kernel's bound on the bandwidth slope. Its achieved 2.8 TB/s (83.6 percent of the H100's 3.35 TB/s peak bandwidth) shows that the kernel is already close to the bound the roofline assigns it. Faster arithmetic cannot help, and even a perfect memory schedule could recover only the small gap between that utilization and peak bandwidth. The material gains come from moving fewer bytes: fusion can eliminate an intermediate HBM round-trip, and a supported lower-precision representation can reduce bytes per element, provided either change preserves the required numerical behavior.

PyTorch profiler workflow

The PyTorch Profiler is most useful when application metrics show a slowdown but the responsible layer is still unknown. Its role is to narrow a global symptom to a layer, kernel family, or synchronization point before a heavier tool is used. It wraps an iteration loop to capture detailed traces with minimal code modification. Here the loop is the replica's decode loop, one forward pass per step over the active batch; a training loop is profiled with the same schedule:

```
import torch
from torch.profiler import (
    profile,
    schedule,
    tensorboard_trace_handler,
)

# Profile 2 warmup steps + 3 active steps
with profile(
    activities=[
        torch.profiler.ProfilerActivity.CPU,
        torch.profiler.ProfilerActivity.CUDA,
    ],
    schedule=schedule(wait=1, warmup=2, active=3, repeat=1),
    on_trace_ready=tensorboard_trace_handler("./profiler_logs"),
    record_shapes=True,
    profile_memory=True,
    with_stack=True,
) as prof:
    for step in range(6):  # 1 wait + 2 warmup + 3 active
        with torch.inference_mode():
            # One decode step: a forward pass over the active
            # batch that reads and extends each request's KV cache
            next_tokens = decode_step(model, active_batch, kv_cache)
        prof.step()
```

The `schedule` parameter defines a warmup period during which the profiler collects events but discards the results, reducing the influence of profiler startup on the retained trace. Application warmup is a separate requirement: just-in-time (JIT) compilation, memory allocation, and CUDA context initialization must settle before a steady-state measurement. A fixed number of profiler warmup steps does not guarantee that this has happened. Check iteration times and compilation activity before choosing the measurement window; include startup costs separately when they matter to the deployment.

The resulting trace, viewable in TensorBoard or Chrome's trace viewer, matters only insofar as each view maps to an intervention, and table 0.85 pairs each view with the experiment it suggests.

Table 0.85: Profiler views and interventions: PyTorch profiler views are useful when each visual signal points to a concrete next experiment.

Trace view	Diagnostic signal	Likely intervention
Kernel timeline	CUDA kernels, their duration, GPU idle gaps, and unexpectedly long kernels	Fuse operators, use CUDA Graphs, or investigate long kernels with Nsight Compute
Memory timeline	Allocation and deallocation spikes or gradual memory growth	Reuse buffers, plan allocations, or investigate leaks
CPU-GPU synchronization	Points where the CPU waits for the GPU, or the GPU waits for CPU launch work	Remove blocking synchronization and reduce launch overhead
Communication events	NCCL collective duration relative to compute kernels	Tune overlap, bucket sizing, or parallelization strategy

Timeline analysis with Nsight Systems

NVIDIA Nsight Systems narrows a profiler's layer-level finding to the CPU, GPU, and communication timeline. A short trace of training or inference iterations reveals whether host submission leaves

launch gaps, whether communication serializes execution, and which kernels warrant deeper inspection:

```
nsys profile --trace=cuda,nvtx,osrt,cudnn,cublas \
    --output=llm_profile \
    --force-overwrite=true \
    python3 inference_server.py --num-steps=5
```

The `--trace` flags control which activities are recorded. The `cuda` flag captures kernel launches and memory operations. The `nvtx` flag captures NVIDIA Tools Extension (NVTX) ranges emitted by application instrumentation or an enabled framework profiling context; it does not itself add module annotations. The `cublas` and `cudnn` flags capture library-level operations, which helps identify whether a GEMM is using cuBLAS or a custom kernel. The command is useful because these rows expose whether the bottleneck is launch overhead, communication serialization, or kernel implementation.

The resulting `.nsys-rep` file is opened in the Nsight Systems graphical user interface, which presents a multi-row timeline. Four rows carry the most diagnostic weight.

The CUDA HW row shows the actual kernel execution on the GPU. Each colored bar represents a kernel, with width proportional to execution time. A gap without kernel activity is a reason to inspect the surrounding transfers, host work, dependencies, and request arrivals. It represents a recoverable delay only if useful work could have run during that interval. For a saturated inference pipeline, unexplained gaps can expose an optimization opportunity; under light load, waiting for the next request may be expected.

The CUDA API row shows CPU-side CUDA API calls (kernel launches, memory allocations, synchronization). A long API interval may reflect launch overhead, a blocking synchronization, allocation, or waiting on device work. Identify the API and correlate its interval with GPU activity before diagnosing a CPU launch bottleneck. Graph replay helps when repeated host submission creates exposed launch gaps.

The NCCL row (for distributed workloads) shows collective communication operations. Comparing the NCCL row with compute-kernel intervals reveals whether communication overlaps with useful computation. Concurrent bars establish overlap in time, but not a net speedup: communication can contend with compute for device resources. Compare end-to-end duration with the baseline to establish whether concurrency actually removed exposed time.

The NVTX row shows the ranges emitted by the selected instrumentation. Explicit module-level annotations can associate intervals with names such as `Linear`, `LayerNorm`, or `Attention`. This connects low-level kernel names, cryptic strings that encode the target architecture, data types, and tile shape (an `sm90_xmma_gemm_...` prefix marks a Hopper GEMM, for example), to the model-level operations that produced them.

Five patterns reveal the most diagnostic information from an Nsight Systems trace. Table 0.86 maps each visual pattern to the bottleneck question it answers.

Table 0.86: Nsight timeline diagnostic patterns: Timeline patterns connect visual structure to utilization, fusion, overlap, allocation, and arithmetic-efficiency questions.

Timeline pattern	Diagnostic question	Optimization direction
Kernel execution vs. idle gaps	How much of the trace is useful GPU execution rather than waiting?	Investigate launch overhead, CPU stalls, or input starvation
Distribution of kernel durations	Are many short kernels fragmenting the workload?	Try fusion, CUDA Graphs, or compiler capture
NCCL alignment with CUDA HW rows	Does communication overlap with computation?	Tune bucket sizes, scheduling, or parallelization layout
Memory allocation spikes	Are tensors being materialized or allocated repeatedly?	Add memory planning, buffer reuse, or fused kernels
GEMM vs. non-GEMM time	How much execution is useful matrix arithmetic vs. overhead?	Move non-GEMM work into fused kernels or reduce memory traffic

Common bottleneck patterns

Recurring trace patterns provide hypotheses that profiling can test. Table 0.87 connects each visual signature to a likely cause and a candidate intervention. Before applying the intervention, verify that the suspected cost lies on the execution path that determines the missed target; similar-looking traces can arise from different dependencies.

Table 0.87: Common bottleneck trace patterns: Diagnostic map from trace signature to likely cause, intervention, and trade-off. The table is most useful after the profiler has already localized the bottleneck to launch overhead, memory movement, communication, load balance, allocation behavior, or input preparation.

Trace Pattern	Likely Cause	Primary Intervention	Trade-Off to Check
Small gaps between many kernels	Kernel launch overhead dominates	Graph compilation with `torch.compile`, CUDA Graphs, or fusion	Compilation warmup and debugging complexity
Large memory spikes	Unfused operators materialize intermediate tensors	FlashAttention or custom Triton fusion	Numerical validation and kernel maintenance
Low FLOP/s with high bandwidth	Memory-bound operations dominate	Precision reduction, batching, or algorithmic changes	Accuracy, cache pressure, and quality guardrails
NCCL bars during GPU idle gaps	Communication is serialized rather than overlapped	Overlap collectives with independent work (section 6), such as DistributedDataParallel (DDP) gradient overlap in training	Bucket size, schedule complexity, and synchronization
Some GPUs wait for stragglers	Uneven work distribution, such as expert imbalance in MoE models	Rebalance work across ranks: even tensor-parallel splits, or expert capacity limits for MoE (section 6)	Routing quality and utilization balance
Repeated large allocations	Buffers are recreated rather than reused	Memory planning, preallocated buffer pools, or activation recomputation	Recompute cost and allocator behavior
Periodic GPU utilization drops	CPU preprocessing or tokenization is not pipelined	More data workers, preprocessing services, or pretokenized datasets	Storage cost and data freshness

A full decode trace shows how several of these smaller bottlenecks can combine into the dominant loss. The example uses a 7B model on one GPU rather than the recurring 70B replica, so that no collective enters the trace and every interval belongs to a single device.

Example 9.1: The profiler detective

Scenario: A 7B parameter LLM running autoregressive generation on an H100 GPU at batch size 1 achieves 84 tokens/s, falling below the 239 tokens/s memory-bandwidth decode ceiling.

Diagnosis: Nsight Compute shows the primary FP16 GEMM operates efficiently (2.8 TB/s bandwidth), but Nsight Systems reveals that 58 percent of step time is spent in unfused LayerNorm/GELU kernels, sampling, and CPU launch gaps across 120 launches per layer. Some of this interval performs required model work; the trace must distinguish that work from avoidable launches and intermediate transfers.

Systems lesson: Systematic profiling reveals bottlenecks where intuition fails. Optimizing GEMM kernels yields diminishing returns when accumulated launch overhead and unfused element-wise operations consume over half the step duration; kernel fusion via `torch.compile` or Triton is a candidate for reducing the exposed launches and transfers. The end-to-end measurement must establish how much time it saves, since fusion does not eliminate all non-GEMM work or guarantee attainment of the decode roofline.

The profiling feedback loop

Effective performance engineering follows an iterative cycle: profile, diagnose, optimize, verify. Engineers frequently neglect the verification step. After applying an optimization, reprofiling confirms whether the intervention relieved the active limiter or merely exposed a secondary bottleneck—the classic waterbed dilemma of computer systems.

A common trap is optimizing based on microbenchmarks rather than end-to-end traces. A kernel that achieves a 2× speedup in isolation may yield only a 5 percent gain in end-to-end throughput if its interval was not on the critical path, or if data dependencies serialize execution. Rigorous evaluation demands measuring impact at the application boundary (tokens per second, step time, tail latency percentiles) alongside kernel-level metrics. The same measurement discipline governs rollout risk, because a change that looks local can consume a global resource once it reaches production traffic. In ML serving, the analogous risk is an input shape the tests never exercised, such as an unusually long prompt whose prefill occupies a replica's compute and cache far longer than the typical request. A well-documented case of an execution cost that escaped this verification step and became a fleet-wide failure comes from outside ML.

War Story 9.1: The regex that saturated the edge (2019)

Context: Cloudflare's web application firewall evaluates rules on HTTP/HTTPS traffic across its global edge (Cloudflare 2019).

Mechanism: A rule deployed on July 2, 2019 caused excessive regular-expression backtracking and drove the CPUs serving HTTP/HTTPS traffic to nearly 100 percent utilization across the network. A previously removed CPU-use protection, missing performance tests, and a global rollout allowed the local computational cost to become a fleet-wide failure.

Impact: The resulting 27-minute outage disrupted proxying, content delivery, and firewall service. Traffic through the network dropped by about 82 percent, and users received 502 errors.

Fix: Disabling the firewall globally restored traffic; the offending change was then removed and the firewall re-enabled after testing. The postmortem reported restoring CPU-use protection and plans for performance tests, staged rule deployment, and a regular-expression engine with runtime guarantees.

Systems lesson: Correct outputs do not establish acceptable execution cost. For ML serving, the analogous discipline is to test expensive input shapes, bound admitted work, and stage performance-sensitive changes so a regression can be detected before it reaches the fleet.

Profiling turns optimization from guesswork into a discipline guided by quantitative evidence. A trace from one device, however, cannot show how a fleet behaves.

Measurement at Scale

When scaling from 8 GPUs to 1,024 GPUs, new sources of overhead emerge that are invisible in local traces. Fleet measurements determine whether optimizing a local kernel is warranted in the first place. A profiler can explain why one kernel stalls; it cannot by itself say whether thousands of accelerators are converting power, memory bandwidth, and network time into useful model progress. Several examples in this section are training jobs rather than serving replicas, for a deliberate reason: every synchronous training step waits for all ranks, so fleet-level loss shows up there directly and at the largest scale. The same accounting applies to the collectives inside the recurring tensor-parallel serving replica, only across eight devices instead of thousands.

Collecting detailed traces from every GPU makes the measurement itself a scaling concern. At a fixed event rate and collection configuration, trace volume grows with the number of GPUs. If a 5-second Nsight Systems trace for one GPU occupies 500 MB, the same window across 1,024 GPUs would produce about 512 GB. This illustrative volume motivates selecting the ranks and intervals needed to answer a diagnostic question rather than collecting every event continuously.

Production systems address this through hierarchical profiling. At the top level, application metrics such as MFU, throughput, and step time detect degradation, while per-rank timing and device

telemetry help locate it. Their collection frequency must keep monitoring overhead within budget. Targeted profiling then captures a short window from ranks selected to test a hypothesis, including different pipeline stages or data-parallel groups when relevant. Comparing a suspected straggler with an otherwise similar rank is often more informative than tracing an arbitrary representative GPU.

Another approach is statistical profiling, where a sampling policy selects a small fraction of kernels for detailed timing. Aggregating samples across training steps can estimate the kernel-time distribution with less collection overhead than full tracing. The estimate depends on adequate coverage of ranks and execution phases; rare stalls can remain absent even from a large sample. The approach is analogous to the sampling profilers (like Linux `perf`) used in traditional systems engineering, adapted for the GPU context.

Intermittent stragglers challenge both short traces and sampled profiles: an accelerator typically runs at expected speed but periodically falls behind due to thermal throttling, hardware degradation, transient network congestion, or host runtime pauses such as memory reclamation and garbage collection. In synchronous execution, a step finishes only when its slowest rank does, so a rank running 10 percent slow during an episode can delay every rank in its communication group by up to that same 10 percent; the fleet-level throughput loss is that synchronization penalty weighted by episode frequency. Continuous per-rank execution timers reveal these tail latency outliers and trigger targeted tracing. Correlating slow intervals with accelerator hardware telemetry, network packet counters, and host runtime event logs then distinguishes the root straggler from the peer ranks that merely idle at collective barriers waiting for it.

Fleet measurement also needs a reproducible measurement contract, one that covers both the local execution boundary and the global efficiency metrics that capture computation, communication, and hardware variability. Without a shared contract, two measurements cannot support an optimization claim. Benchmark suites formalize this principle by fixing workload, quality, and measurement rules before comparing systems (Mattson et al. 2020; Reddi et al. 2019). The contract, whose fields table 0.88 pairs with the failure each one prevents, fixes the workload envelope, including model, input and output length distributions, batch or concurrency, data distribution, and quality criterion; records hardware topology, accelerator clocks and power limits, software versions, precision, and compiler settings; and states the timing and synchronization boundaries. Cold-start compilation and cache-filling trials must remain separate from warmed steady-state trials. Each reported point needs repeated trials with a dispersion statistic, an output-equivalence or quality check, and latency percentiles at a named offered load. Without those controls, a speedup can come from different work, different machine state, asynchronous timing, or a shifted quality or service-level objective (SLO) rather than from the proposed optimization.

Table 0.88: Reproducible performance measurement contract: Every optimization result fixes workload, correctness, system state, timing, and statistical reporting before comparing implementations.

Contract field	Evidence to report	Failure prevented
Workload and correctness	Model revision; representative input/output distributions; batch or concurrency; quality or output-equivalence gate	Comparing different work or accepting an invalid numerical shortcut
System state	Device and topology; clocks and power limit; software, compiler, precision, and kernel versions	Attributing a hardware or configuration change to the optimization
Timing boundary	Included setup; device synchronization; warmup; cold-start and steady-state definitions	Under-timing asynchronous execution or hiding compilation
Load generation	Open- or closed-loop mode; intended and achieved arrival rates; completed throughput; concurrency; errors and timeouts; duration	Hiding overload when the generator reduces arrivals during a stall
Statistical report	Trial count; median or mean; dispersion; tail percentiles	Promoting a favorable single run

Systems Perspective 9.2: The load generator is part of the measurement

An open-loop load generator schedules requests independently of responses. A closed-loop load generator issues replacements only as earlier requests finish. The modes hold attempted arrivals and outstanding work fixed, respectively.

At 100 requests/s, a 1 s open-loop schedule contains 100 requests. At concurrency one, the closed loop records 1 slow completion but issues no replacements, omitting 99 waiting-time samples. This coordinated omission makes overload look less severe.

The correct mode reproduces the target workload. Reporting intended load, achieved arrivals, completed throughput, concurrency, latency, errors, timeouts, and duration together exposes any generator feedback that conceals the queue.

The fleet efficiency metric

Hardware utilization reports how often GPUs are busy, but it does not distinguish model arithmetic from recomputation or time spent waiting within communication operations. Fleet measurement therefore needs the useful-work metric that table 0.84 already listed, MFU, which counts only the "useful" FLOPs the model architecture requires. What matters at fleet scale is how that metric aggregates across devices and what it hides. Its comparisons across software stacks and parallelization strategies hold only when the workload, FLOP-counting convention, and hardware peak definition stay fixed.

Definition 9.2: MFU

MFU is the fraction of the hardware's theoretical peak throughput (R_{peak}) consumed by FLOPs that directly advance model training or inference, excluding overhead from recomputation, padding, and synchronization.


1. **Significance**: At fleet scale, MFU aggregates across all nodes. Communication overhead, load imbalance, and pipeline bubbles tend to lower it relative to a comparable local run, although changes in batch size or memory feasibility can alter that comparison. A one-percentage-point MFU increase across 10,000 identical GPUs adds useful throughput equivalent to 100 GPUs at peak. Realized cost savings depend on whether the recovered capacity displaces hardware or shortens paid runtime.
2. **Distinction**: Unlike hardware utilization (which reports how often the accelerator is "busy"), MFU relates the model's reference FLOP rate to hardware peak. It excludes recomputation and padding from useful work even when they support a feasible or faster implementation; quality and convergence require separate checks.
3. **Common pitfall**: A frequent misconception is that high GPU utilization implies high efficiency. A system can show 90 percent hardware utilization while achieving 30 percent MFU when busy intervals include communication or arithmetic that runs far below peak. MFU exposes the gap but does not explain its cause; traces and other metrics must guide the optimization decision.

With MFU defined as useful work rather than raw busyness, the loss between a single node and the fleet becomes a number, here for the recurring 70B model in training.

↩ Model FLOPs utilization is established as the compute-axis efficiency measure in section 11.

Napkin Math 9.2: The scaling tax

Problem: A 70B parameter model achieves a local node baseline of 65 percent MFU on a single 8-GPU node. When training scales to 128 GPUs, the step time increases to 245 ms, dropping fleet performance to 48 percent MFU. The single-node baseline assumes optimizer state offloaded to host memory, since full training state for a 70B model exceeds one node's HBM. What relative MFU loss appears at fleet scale under these constructed assumptions?



Fleet MFU falls below the single-node baseline.

Math: Both MFU figures come from the same ratio, the useful FLOPs a step performs divided by the FLOPs the cluster could execute at peak in that step's wall time:

$$\text{MFU} = \frac{O_{\text{useful}}}{N \times R_{\text{peak}} \times T_{\text{step}}}$$

For the fleet case, a step performs 14.9 PFLOP of useful work, while 128 GPUs $\times$ 989 TFLOP/s per GPU $\times$ 245 ms of wall time could execute 31 PFLOP at peak; the quotient 14.9 PFLOP $\div$ 31 PFLOP $\approx$ 48 percent. The same substitution on the single node yields 65 percent, and the scaling tax is $1 -$ Fleet MFU/Local MFU, giving 26.2 percent.

Systems insight: The 26.2 percent scaling tax measures the relative efficiency change under these assumptions. It does not isolate network cost: workload shape, parallelism, offload, kernel efficiency, and synchronization can all change the ratio. A scaling regression therefore requires a matched measurement contract and trace evidence before attributing the loss to the network.

Detecting scaling regressions

Local resource costs can become exposed delays at scale. A small increase in memory demand may cross an allocation threshold, while a longer host pause on one rank can hold up a synchronized step across the fleet. Communication changes can separately increase network contention. These mechanisms require different evidence, so a local memory regression alone does not diagnose a network-buffer problem. Table 0.89 organizes the tests that connect local changes to distributed behavior before a full-fleet rollout.

Table 0.89: Scaling regression test tiers: Fleet performance testing moves from small canaries to production baselines and gray-failure detection so that local changes are checked against distributed behavior.

Testing tier	What it measures	Regression caught
Small-scale canaries	Model behavior on 8 and 64 GPUs to establish a scaling efficiency curve	Code changes that look harmless on one GPU but bend the curve before full-fleet launch
Fleet baseline comparison	Every production run's MFU against the reference baseline for that model architecture	Architecture, compiler, or configuration changes that reduce useful fleet work
Gray failure detection	Distribution of step times across the fleet	Straggler nodes, such as one 10% slower node that can reduce synchronous data-parallel MFU by 10%

The gray-failure row of table 0.89 applies the same straggler arithmetic, since a synchronous data-parallel step runs at the pace of its slowest node. The same measurements also explain why benchmark numbers cannot be copied directly into production capacity plans.

Systems Perspective 9.3: Benchmark vs. reality: The hero run tax

Benchmark results, including MLPerf submissions, describe performance under a specified workload and measurement protocol. A carefully tuned result is a useful reference, but its operating conditions may differ from those of a production service. Capacity planning requires comparing those conditions with the intended deployment rather than treating the reported throughput as an unconditional capacity guarantee.

Production capacity must account for costs that the reference measurement does not already include. Metrics collection, logging, checkpointing, and health monitoring can consume resources; contention and hardware variability can add further delays. Their combined effect must be measured without counting costs already present in the benchmark a second time. As a planning scenario, if useful throughput is 10–20 percent below the rate that implied 30 days of training, the same work takes approximately 33.3–37.5 days. This is a sensitivity calculation, not a universal production penalty.

The measurement contract makes optimization results comparable across the node and fleet boundaries. A trace dominated by intermediate transfers or repeated host launches motivates fusion and replay; dominant weight traffic motivates precision reduction. The following mechanisms each change one part of that measured budget, and their value must be checked against the same workload, quality criterion, and service objective.

Operator Fusion and Kernel Engineering

Consider the simple sequence of operations $\mathbf{Y} = \text{LayerNorm}(\text{GELU}(\mathbf{XW} + \mathbf{b}))$. Separate kernels write and reread intermediate tensors through global memory, creating traffic that can dominate the element-wise and normalization work. Operator fusion combines compatible operations so that intermediate values remain in registers or shared memory. The opportunity is to remove transfers and launches; whether the entire sequence fits profitably into one kernel depends on its reduction dependencies and on-chip resource requirements.

> Systems Perspective 9.4: Analogy: The short-order cook
>
> Imagine a kitchen where one chef chops vegetables, puts them in the fridge (HBM), then another chef takes them out to boil them, puts them back in the fridge, and a third chef takes them out to plate them. This is unfused execution: the bottleneck is not the cooking but the constant walking to the fridge.
>
> Operator fusion assigns the recipe to a single chef who keeps the ingredients on their cutting board (SRAM/Registers) and performs all three steps consecutively without ever returning to the fridge until the final dish is ready.

The kernel launch problem

Each GPU kernel launch involves overhead: the CPU must prepare launch parameters, dispatch to the GPU command queue, and the GPU must schedule thread blocks across its streaming multiprocessors (SMs). For a small element-wise operation on an accelerator such as an H100, this overhead runs to several microseconds per launch, a time during which a memory-bound kernel might have already completed its useful work. When a transformer layer comprises dozens of small operations (add, multiply, normalize, activate), the cumulative launch overhead becomes significant. The exposed share depends on how the framework dispatches. In eager execution a Python loop and the framework dispatcher submit each kernel in turn, but not every launch traverses the Python global interpreter lock (GIL), the lock that serializes Python bytecode execution; asynchronous runtime threads, compiled regions, and native extensions can submit work outside that path.

Each unfused kernel also materializes an output in global memory. For the sequence $\mathbf{Y} = \text{LayerNorm}(\text{GELU}(\mathbf{XW} + \mathbf{b}))$, a simplified traffic model assumes these reads and writes reach HBM; cache reuse can reduce the actual off-chip traffic. The GEMM kernel reads $\mathbf{X}$ and $\mathbf{W}$ from HBM, computes $\mathbf{XW} + \mathbf{b}$, and writes the intermediate result $\mathbf{Z}_1$ back to memory. The GELU kernel then reads $\mathbf{Z}_1$, evaluates $\text{GELU}(\mathbf{Z}_1)$, and writes a second intermediate tensor $\mathbf{Z}_2$. Finally, the LayerNorm kernel reads $\mathbf{Z}_2$, applies normalization, and writes the final output $\mathbf{Y}$.

Intermediate tensors $\mathbf{Z}_1$ and $\mathbf{Z}_2$ each occupy the same memory as the output $\mathbf{Y}$. For the Llama 2 70B shape (hidden dimension 8192) at a batch of 2048 tokens in FP16, each intermediate tensor is 33.6 MB. The unfused execution materializes 67.1 MB of intermediate tensors, corresponding to 134.2 MB of HBM traffic if each write and reread reaches that boundary. A fused kernel can avoid these transfers by keeping the needed tiles of $\mathbf{Z}_1$ and $\mathbf{Z}_2$ in registers or shared memory within the SM. Figure 0.111 illustrates this idealized contrast; it does not require the complete intermediate tensors to fit on chip at once.

By retaining intermediates within registers and shared memory, the fused pipeline in figure 0.111 eliminates four one-way transfers between the SM and HBM (the red write and read passes for $\mathbf{Z}_1$ and $\mathbf{Z}_2$). Including one read each of $\mathbf{X}$ and $\mathbf{W}$ and one write of $\mathbf{Y}$, the stated dimensions yield a 1.7× byte reduction, ignoring the small bias and normalization vectors. Cache reuse, tile reloads, and workspace can change actual traffic.

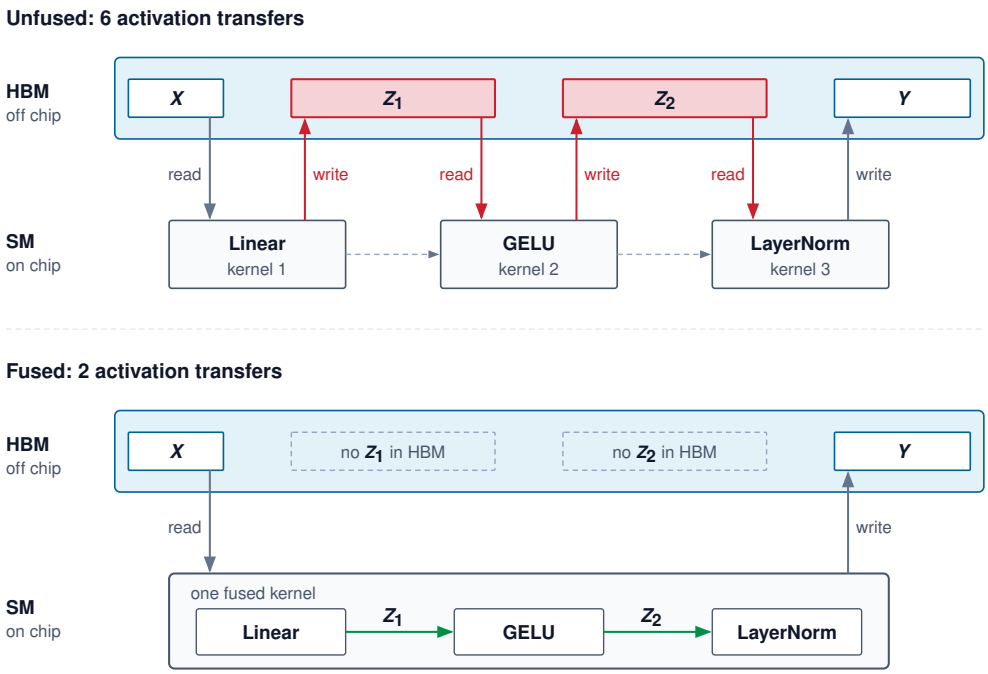


Figure 0.111: Operator fusion before and after: The diagram counts activation transfers. Separate kernels write and reread the intermediates $\mathbf{Z}_1$ and $\mathbf{Z}_2$ (red), while the fused kernel passes them between stages on chip, leaving only the read of $\mathbf{X}$ and the write of $\mathbf{Y}$. Weight reads and small parameter vectors are not drawn. Transfer counts alone do not determine total byte savings when tensors differ in size.

Launch overhead creates a second opportunity. Suppose an eager transformer decoder layer issues 30 separate kernels at 5–10 µs per launch. The host then spends 150–300 µs on dispatch. The same layer's bandwidth-only GPU time in the batch-one 70B example is about 65 µs, making exposed submission time a plausible limiter. Host dispatch can overlap GPU execution, so these totals alone do not establish the length or placement of launch gaps. A launch-bound trace must show that submission leaves useful device work waiting. Fusion reduces the number of launches, while graph replay (section 2) reduces repeated submission overhead for the kernels that remain.

Fusion nevertheless has a resource ceiling. A larger fused kernel keeps more live values in registers and often reserves more shared memory per thread block. Either demand can reduce the number of resident warps, lowering occupancy and the latency-hiding capacity of the SM; excessive register demand can also spill values into local memory backed by the cache hierarchy or HBM. Fusion is profitable only when the avoided launches and HBM intermediates outweigh this loss of occupancy, spill traffic, and any duplicated computation. Kernel evaluation must therefore compare measured HBM bytes, register and shared-memory use, achieved occupancy, spill transactions, and end-to-end time rather than treating fewer launches as sufficient evidence.

Fusion categories

Fusion is profitable when the HBM traffic it removes is worth the kernel complexity it introduces. The three common categories differ by that trade-off: how much data movement they eliminate, how much synchronization they require, and how often a compiler can apply them automatically.

Element-wise fusion sits at the low-complexity end: consecutive element-wise operations (add, multiply, activation functions) combine into a single kernel. For pure operations with compatible iteration spaces, fusion can preserve the same per-element dependencies. Aliasing, side effects, multiple consumers, and numerical requirements can constrain legality or profitability. Deep learning frameworks commonly perform element-wise fusion automatically for supported patterns.

When the sequence includes a reduction, the fusion decision becomes more constrained. Reduction fusion combines an element-wise operation with a subsequent reduction (such as summing elements for a loss function, or computing mean and variance for layer normalization). Threads can use warp-level shuffle instructions or shared memory to combine partial results within a block. Reductions that span blocks may need additional synchronization or an intermediate buffer. When the reduction and its producer fit a compatible schedule, fusion can avoid writing and rereading the prenormalization tensor; that saving depends on the reduction shape and kernel design.

Operator-specific fusion uses custom kernels designed for a particular sequence of operations, such as fused attention or fused GEMM-bias-activation. The kernel architect must reason about data flow, shared memory allocation, and thread scheduling simultaneously. This specialization can remove an intermediate representation that dominates memory demand: FlashAttention, for example, avoids materializing the quadratic attention workspace and keeps the online softmax state linear in sequence length.

To estimate the opportunity, consider each category applied to a transformer layer with hidden dimension 8192, a batch of 2048 tokens, and FP16 values. Fusing a bias-GELU-dropout chain can eliminate two intermediate tensors of 33.6 MB each, avoiding 134.2 MB of traffic per layer under the same HBM accounting assumptions. Across 80 layers, the modeled saving is about 10.7 GB per forward pass. Reduction fusion targets prenormalization tensors and intermediate statistics when their dependencies permit it. Operator-specific attention fusion removes the quadratic score and probability matrices, making it especially valuable when those matrices dominate memory demand. These savings cannot simply be added when candidate fusions eliminate overlapping intermediates. The resulting end-to-end speedup must be measured because remaining traffic and kernel resource use can change the bottleneck.

CUDA graphs for launch overhead amortization

An orthogonal technique for reducing the overhead term in the iron law is CUDA graphs.[2] While operator fusion combines multiple operations into fewer kernels, CUDA Graphs amortize repeated CPU submission of a stable kernel sequence.

In standard PyTorch execution, each kernel launch requires the CPU to push a command to the GPU's command queue, and section 2 put that cost at 150–300 µs per decoder layer. For the 80-layer 70B example, host-side kernel submission alone totals roughly 12–24 ms per forward pass, and whatever part of it the GPU cannot hide behind running kernels lands on the critical path. That total is several times the 5.2 ms bandwidth-bound decode step computed in notebook 9.1, which is why eager decode, submitted one kernel at a time, can be launch-bound before it is bandwidth-bound.

CUDA Graphs address this by recording a sequence of GPU operations (kernel launches and memory copies) into a replayable graph. The recording happens once during a warmup phase. On subsequent iterations, one replay request submits the recorded graph and avoids rebuilding the launch sequence operation by operation. Replay still incurs host, driver, graph-launch, synchronization, and device scheduling costs, so the saved fraction must be measured for the captured region.

The benefit can be substantial when short kernels leave visible CPU launch gaps, but it shrinks when long kernels or data movement already dominate wall time. The relevant comparison is the end-to-end captured region before and after replay, including warmup and any uncaptured work, rather than the number of launches alone.

The constraint is structural rather than numerical. A graph executable replays captured nodes and dependencies against referenced storage, while supported graph updates can change a bounded set of node parameters (NVIDIA Corporation 2026). Variable sequence shapes, changing batches, conditional expert routes, and allocation patterns may therefore require multiple graph variants or leave dynamic regions in ordinary stream execution. Decode often presents more reusable operation shapes than prefill, but that advantage depends on the runtime's bucketing and capture strategy.


Operator fusion and CUDA Graphs attack different sources of exposed time: fusion removes kernels and intermediate traffic, while graph replay reduces repeated host submission for the kernels that remain. When a trace attributes a material fraction of end-to-end time to CPU launch gaps and the workload admits stable capture, replay becomes a candidate intervention; profiling after capture must confirm that the gap moved rather than assuming all noncompute overhead disappeared.

[2] **CUDA graphs**: Graph capture records a sequence of GPU work and its dependencies for later replay (NVIDIA Corporation 2026). Replay requires a capture-compatible operation graph and valid referenced storage; it does not require numerically identical results. Dynamic control flow, shapes, or allocations can instead require graph variants, graph updates, or uncaptured regions. Repetitive decode shapes are often easier to capture than heterogeneous prefill shapes.

FlashAttention and tiled attention primitives

Standard self-attention computes $\text{Softmax}(\mathbf{QK}^T/\sqrt{d_{\text{head}}})\mathbf{V}$, where $\mathbf{Q}$, $\mathbf{K}$, and $\mathbf{V}$ are matrices of shape [sequence length×head dimension]. The naive implementation materializes the full $S\times S$ attention matrix $\mathbf{A}=\mathbf{QK}^T$ in HBM, where S is the sequence length. For $S=8192$ and FP16 precision, this matrix alone consumes $8192\times 8192\times 2\approx 134$ MB per attention head, so the quadratic score tensors run to several gigabytes per layer. The simplified HBM-traffic accounting compares HBM-visible bytes for a 64-head Llama-style layer under explicit traffic assumptions.

FlashAttention (Dao et al. 2022) reformulates attention using tiling. Instead of materializing the full $S\times S$ attention matrix, it processes $\mathbf{Q}$, $\mathbf{K}$, and $\mathbf{V}$ in small blocks that fit in on-chip SRAM. The algorithm loads tiles of $\mathbf{Q}$, $\mathbf{K}$, and $\mathbf{V}$, computes partial attention scores, and maintains running statistics (online softmax) to produce the exact result without ever storing the full attention matrix in HBM.



In this scenario, tiling cuts HBM traffic about 65×.

The reduction in HBM traffic can be dramatic. For a sequence length of 8192, 64 heads, and head dimension 128 in FP16, the simplified naive estimate writes and reads the score and probability matrices and moves $\mathbf{Q}$, $\mathbf{K}$, $\mathbf{V}$, and output once, totaling approximately 34.9 GB for the full layer, or 545.3 MB per head. The idealized FlashAttention lower bound counts one read of $\mathbf{Q}$, $\mathbf{K}$, and $\mathbf{V}$ and one output write, totaling approximately 536.9 MB for the full layer, or 8.4 MB per head. The resulting 65× ratio is a scenario comparison, not a claim about allocated memory or realized kernel traffic; actual traffic depends on tile reloads and the implementation schedule.

The key insight behind FlashAttention is the online softmax trick, which processes scores incrementally in a single pass and so makes tiling possible for an operation that appears to require global information. Standard softmax computes $\text{softmax}(s_i)=e^{s_i}/\sum_j e^{s_j}$, but for numerical stability it first subtracts the global maximum: $\text{softmax}(s_i)=e^{s_i-m}/\sum_j e^{s_j-m}$ where $m=\max_j s_j$. Finding this global maximum seems to require seeing all scores first, which would force materializing the full $S\times S$ matrix.

The online algorithm avoids this by maintaining running statistics that are updated incrementally as each tile is processed. When processing tile t, the algorithm executes four steps:

1. Computes a local block of scores $\mathbf{A}_{\text{block}_t}=\mathbf{Q}_{\text{block}}{\mathbf{K}_{\text{tile}_t}}^T$.
2. Updates the running maximum: $m_{\text{new}}=\max(m_{\text{old}},\max(\mathbf{A}_{\text{block}_t}))$.
3. Rescales the previous running sum and output: multiply by $e^{m_{\text{old}}-m_{\text{new}}}$ to correct for the updated maximum.
4. Computes the local softmax contribution using m_{new} and accumulates into the running output.

After processing all tiles, divide the accumulated weighted numerator by the running softmax denominator. This normalization yields the same mathematical attention result as the standard algorithm, up to floating-point roundoff. The rescaling step (step 3) is the critical innovation: it allows the algorithm to "fix up" previous partial results when a new tile reveals a larger maximum value. The algorithm is exact in the mathematical sense, but floating-point execution order can still change the last few bits relative to an unfused implementation.

The cost of tiling includes additional rescaling, reductions, and scheduling work. Avoiding HBM traffic can outweigh those costs when transfers are exposed on the critical path, but a memory-bound baseline does not make extra arithmetic free. Scalar throughput, reduction dependencies, register pressure, and occupancy can become the new limits. The kernel must therefore be evaluated on its measured traffic and complete execution time.

FlashAttention achieves this traffic reduction by staging matrix blocks across the memory hierarchy, as mapped in figure 0.112: instead of materializing the quadratic $S\times S$ score matrix in off-chip HBM, the kernel streams $\mathbf{Q}$, $\mathbf{K}$, and $\mathbf{V}$ tiles into on-chip storage and evaluates softmax statistics online. Consider illustrative 128×128 tiles. The input payload includes a block of $\mathbf{Q}$ ($128\times 128\times 2\approx 32.8$ KB), a block of $\mathbf{K}$ ($128\times 128\times 2\approx 32.8$ KB), and a block of $\mathbf{V}$ (32.8 KB), totaling approximately 98.3 KB. This input payload is smaller than the H100's 228 KB of shared memory per SM, but it is not the complete kernel working set: accumulators, softmax state, and buffering also consume registers or shared memory. The tile score $\mathbf{S}_{ij}=\mathbf{Q}_i\mathbf{K}_j^T$ is computed and consumed on chip; it is never materialized as a full HBM tensor. The illustrative schedule iterates over $8192/128=64$ column

tiles for each of 64 row tiles, reloading tiles as required. The quadratic $S \times S$ score and probability matrices are never materialized: the persistent per-head tensors are **Q**, **K**, **V**, **O**, and $\mathcal{O}(S)$ softmax statistics.

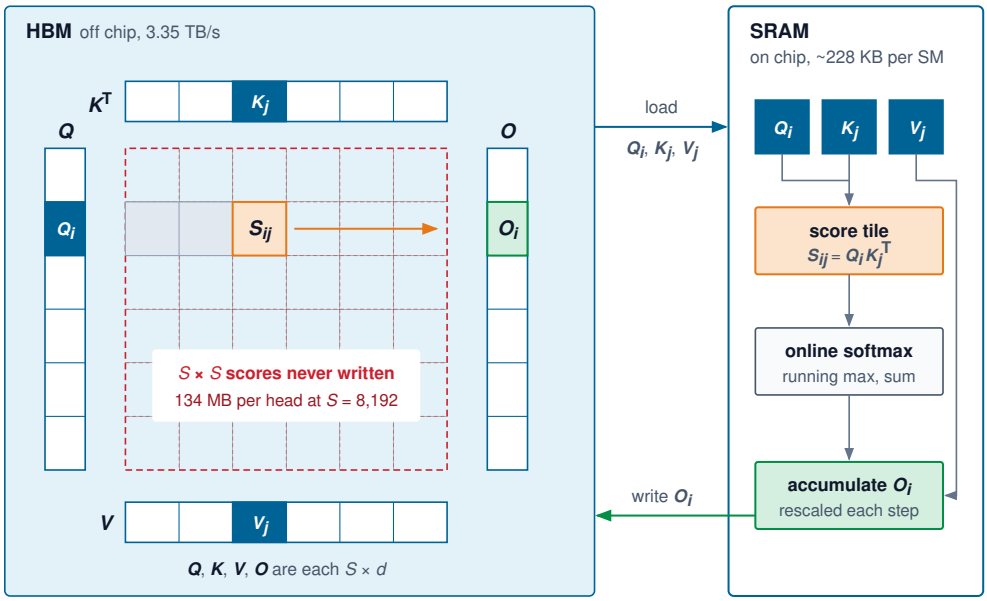


Figure 0.112: FlashAttention memory hierarchy tiling: Block-by-block scheduling of Q, K, and V matrices loaded into on-chip shared memory (SRAM). Attention scores are computed and rescaled online without materializing the quadratic $S \times S$ intermediate matrix in off-chip HBM, keeping persistent attention workspace linear in sequence length for fixed head dimension. HBM traffic still depends on SRAM capacity and tile reloads.

FlashAttention-2 (Dao 2023) further optimizes the algorithm for GPU architectures with many streaming multiprocessors by restructuring the parallelism pattern. The original FlashAttention parallelizes over batch and head dimensions, meaning each thread block handles one (batch, head) pair and iterates over the full sequence. FlashAttention-2 additionally parallelizes over the sequence dimension of the query matrix, distributing work across thread blocks more efficiently and achieving better occupancy. It also reduces the number of non-GEMM FLOPs by restructuring the rescaling operations and exploiting the asymmetry between the Q loop (outer) and K/V loop (inner).

Newer FlashAttention-family kernels target Hopper-era hardware features such as FP8 Tensor Cores and the Tensor Memory Accelerator, a hardware path for asynchronous bulk tensor movement between HBM and shared memory. The systems principle is the same as the original algorithm: as the hardware exposes faster movement and lower-precision execution paths, the attention schedule must be rewritten to use those paths without materializing the quadratic workspace.

The original breakthrough made memory movement part of the algorithmic cost model. Attention still requires matrix multiplication, but reducing its arithmetic alone does not address the cost of materializing and rereading large intermediate tensors. FlashAttention instead trades a small amount of extra arithmetic, the online rescaling and backward-pass recomputation, for the elimination of quadratic HBM-resident state.

Example 9.2: The FlashAttention breakthrough

Scenario: Standard Transformer attention materializes a full $S \times S$ attention score matrix in high-latency GPU HBM, creating a quadratic memory and bandwidth bottleneck as sequence length S grows (Dao et al. 2022).

Diagnosis: Materializing attention intermediates creates memory traffic that an arithmetic-only analysis misses. FlashAttention restructures attention via block-by-block tiling and online softmax, holding intermediate state on chip to compute attention without writing the $S \times S$ matrix to global memory.

Systems lesson: FlashAttention demonstrates I/O-aware algorithm design: eliminating quadratic HBM intermediates can improve runtime even when backward execution recomputes values. The commonly quoted 2–4× wall-clock speedup is not a general prediction for long-context workloads; measured gains depend on sequence length, hardware, the baseline kernel, and whether the timing covers attention alone or the complete model.

The 65× ratio measures traffic, the bytes moved through HBM. Eliminating the quadratic intermediate also frees capacity, the bytes that must be resident at once, and that second quantity grows differently with sequence length. Standard attention's workspace rises as $\mathcal{O}(S^2)$ while FlashAttention's rises as $\mathcal{O}(S)$, so the gap widens with every doubling of context (figure 0.113); the much larger ratios on that plot are capacity ratios and should not be read as traffic or speed. The freed capacity matters for serving because prefill and decode often share a replica. While a long prompt is being prefilled, its score workspace occupies HBM alongside the KV cache of every request already decoding, so removing that workspace leaves room for the scheduler to admit more concurrent requests.

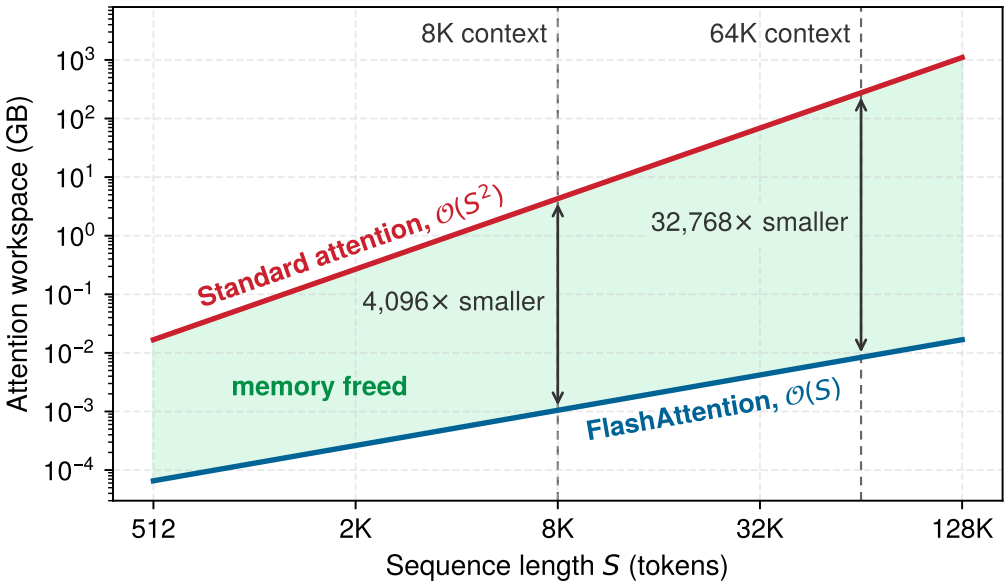


Figure 0.113: FlashAttention memory savings: Attention workspace for 32 FP16 heads grows as $\mathcal{O}(S^2)$ when standard attention materializes the $S \times S$ score matrix in HBM, but only as $\mathcal{O}(S)$ when FlashAttention keeps running softmax statistics instead. The green gap is memory freed for KV cache, activations, or larger batches, and it widens with every doubling of context. Its ratios compare resident workspace (capacity), not the HBM traffic ratio quoted in the text.

FlashAttention reduces the memory wall within a single GPU by tiling across the SRAM-HBM boundary. For sequence lengths that exceed the memory capacity of a single GPU, the same tiling principle extends across multiple GPUs via Ring Attention (Liu et al. 2023). Distributing the sequence blocks across a ring of accelerators and overlapping communication with computation enables Ring Attention to handle context windows that would be impractical on single-GPU configurations.

↩ Ring Attention's rotation of key/value blocks around a ring of accelerators, and its overlap condition, are established in section 8.

Checkpoint 9.2: FlashAttention mechanics

Verify understanding of memory-aware attention:

- ☐ **Sequence-length scaling**: explain why avoiding quadratic intermediates creates a larger potential benefit for longer sequences (for example, 32K) than for short sequences (for example, 512), and identify remaining limits that can prevent a larger measured speedup.
- ☐ **Online softmax storage**: identify whether the "online softmax" statistics in the FlashAttention algorithm reside in HBM, L2 Cache, or SM SRAM.
- ☐ **FLOPs unchanged**: evaluate the claim that FlashAttention reduces the total number of floating-point operations (FLOPs) required for attention.
- ☐ **Memory to batch size**: explain how removing the $\mathcal{O}(S^2)$ prefill workspace can raise the number of requests a replica that mixes prefill and decode can admit.

Precision Engineering

Fusion reduces the number of trips through HBM; precision engineering reduces the payload of each trip. Moving FP16 weights through HBM consumes twice as many bytes as FP8. For bandwidth-bound kernels, shrinking weights from 2 bytes to 1 byte can roughly halve weight-read traffic and increase effective memory bandwidth. The engineering decision is where numerical noise can be tolerated to reduce bandwidth pressure and where quality demands higher precision. The quantization techniques in this section apply reduced precision to efficient inference at scale.

↩ FP8 as a training-time format, with distinct roles for E4M3 and E5M2, is established in section 5.

Outliers and block-wise quantization

The first inference-side precision decision is how to shrink weights while preserving the information needed for model quality. INT8 uses the same payload width as FP8, while INT4 reduces that payload further; their numerical ranges and supported execution paths differ. LLM quantization must also account for outlier features. In the models studied by Dettmers et al. (2022), a small number of hidden dimensions (about 0.1 percent of features) exhibited activation magnitudes roughly 3–20× larger than the rest. Uniform per-tensor quantization can either clip large values or widen the range to include them, reducing resolution for smaller values. Weight tensors face a related problem when a few large weights determine the scale for the entire tensor. Block-wise quantization limits that weight-side effect, while the runtime and calibration techniques that follow address activation outliers.

Definition 9.3: Block-wise quantization

Block-wise quantization is an ML quantization scheme that partitions a weight tensor into nonoverlapping groups of b_{block} elements and assigns each group its own scale. An affine scheme uses $s_i = (x_{\max,i} - x_{\min,i})/(2^b - 1)$ together with an offset or zero point; a symmetric scheme centers the range at zero and needs only scale metadata. The metadata examples below assume symmetric scale-only quantization.

1. **Significance**: With block size $b_{\text{block}} = 64$ and $b = 4$ bits, weights compress from 16 bits to 4 bits (a $4\times$ memory reduction) while each FP16 scale adds $16/64 = 0.25$ bits per weight. This yields an effective bit-width of 4.25 bits per weight: 6.25 percent overhead relative to the INT4 payload, or about 1.6 percent of the original FP16 weight size.
2. **Distinction**: Unlike per-tensor quantization, which applies a single scale across the entire weight matrix and forces that scale to accommodate outlier values at the cost of wasting precision on the majority of near-zero weights, block-wise quantization contains outlier damage within individual blocks, preventing a single extreme value from degrading quantization fidelity for the whole tensor.
3. **Common pitfall**: A frequent misconception is that block size is a free hyperparameter. Smaller blocks ($b_{\text{block}} = 32$) can improve local range resolution but double the scale metadata overhead vs. $b_{\text{block}} = 64$. At $b_{\text{block}} = 16$, the scale adds 1 bit per weight: 25

percent overhead relative to the INT4 payload, or 6.25 percent of the original FP16 weight size. The effect on model quality and kernel speed must be evaluated rather than inferred from block size alone.

The metadata price stays small across formats. An INT8 scheme with one FP32 scale per 128 weights adds $32/128 = 0.25$ bits per weight, about 3 percent of its payload, so block-wise scaling isolates outliers without the bandwidth penalty of a higher-precision format. Figure 0.114 isolates this dynamic-range protection across an eight-weight sample containing a single outlier (58.7). Under per-tensor scaling (left), the outlier dictates a coarse scale factor ($s \approx 0.462$) that forces six of the seven small weights to round to zero. Partitioning the tensor into four-element blocks (right) confines that coarse scale to the second block, allowing the uncorrupted first block to adopt a fine scale ($s_1 \approx 0.00165$) that preserves full INT8 resolution.

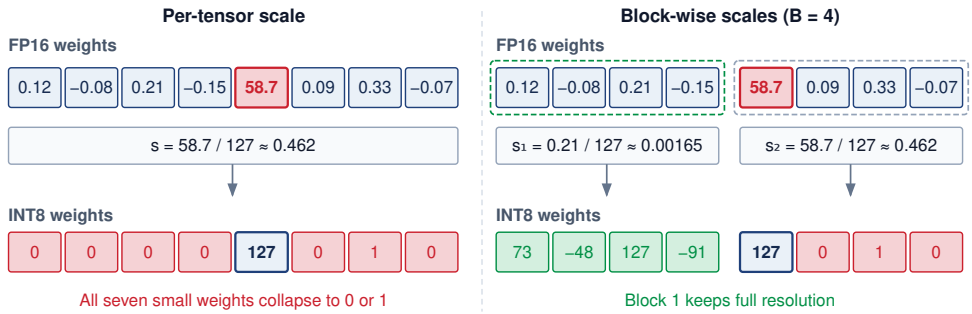


Figure 0.114: Block-wise versus per-tensor quantization: Under per-tensor scaling (left), one outlier weight sets the scale for the whole tensor, so six of the seven small weights round to zero and the seventh rounds to one. Under block-wise quantization (right), each group of weights gets its own scale: the block without the outlier keeps full INT8 resolution, while the small weights that share the outlier's block are still crushed. Smaller blocks confine the damage further at the cost of more scale metadata.

Block-wise scaling contains weight outliers inside the stored format. Activation outliers, and the rounding error that low-bit weights accumulate, call for methods that act at other stages. The four methods below all work post-training, without retraining the model. GPTQ, AWQ, and SmoothQuant prepare the model offline from a small calibration set, while LLM.int8() acts at runtime; section 3 takes up the alternative of training with quantization when post-training quality falls short. LLM.int8() handles outliers at runtime by decomposing a matrix multiplication into two parts: selected outlier dimensions processed in FP16 and the remaining dimensions processed in INT8. A magnitude threshold identifies the outlier dimensions, and the two matrix products are combined to produce the output. This mixed path preserves higher precision where uniform quantization would introduce disproportionate error. Its quality benefit must be weighed against the runtime cost of identifying outliers and executing the separate paths.

Generative Pre-trained Transformer Quantization (GPTQ) (Frantar et al. 2023) moves error compensation into weight calibration. It uses second-order information, an estimate from calibration activations of how sensitive the layer's output is to each weight, to guide layer-wise reconstruction, adjusting remaining unquantized weights to compensate for errors introduced by weights already quantized. The result can support low-bit representations, including INT4, without treating each weight's error independently. Its quality depends on the model, bit width, grouping, and calibration data; the reconstruction objective is a proxy for the eventual task-level quality criterion.

Activation-Aware Weight Quantization (AWQ) (Lin et al. 2024) uses activation magnitudes to guide weight scaling rather than GPTQ-style second-order reconstruction. Weights associated with large activations can contribute disproportionately to output error. AWQ protects these salient weights through channel scaling before group quantization, using calibration activations to choose the scales. This provides another route to low-bit weight storage; comparison with GPTQ requires the same model, bit budget, calibration conditions, and held-out quality evaluation.

SmoothQuant (Xiao et al. 2023) redistributes quantization difficulty between activations and weights before inference. Its calibration exploits activation outliers that concentrate in particular channels. A per-channel scaling transformation divides activations by a smoothing factor and multiplies the corresponding weights by that factor, preserving the matrix product before rounding. Reducing activation range can make the weights harder to quantize, so the smoothing choice balances the two errors. This enables W8A8 (weight-8-bit, activation-8-bit) execution with compatible INT8 kernels; quality and speed still depend on calibration and the target implementation.

These techniques place the outlier-handling cost in different stages: runtime decomposition, weight calibration, or a preprocessing transformation. The choice must satisfy both the quality budget and the execution path available on the target hardware. An INT4 weight representation can save HBM traffic even when a GPU kernel dequantizes it for FP16 arithmetic; an INT8 representation can also use integer arithmetic when a compatible kernel and device support it. The later weight-only and weight-activation comparison separates these bandwidth and compute benefits.

Each of these methods trades some calibration or runtime cost for bandwidth, and at the extreme end of the deployment spectrum quantization moves from an optimization to a physical necessity. A mobile or federated deployment provides that limiting case. When the device has only a few gigabytes of memory shared with the rest of the phone, or far less below that, precision is no longer a tuning knob after the model is chosen; it is part of the feasibility test.



Lighthouse 9.1: Archetype C (Federated MobileNet): Precision as feasibility

For Archetype C (Federated MobileNet), smartphone-class devices with power budgets of roughly 2–10 W, about 3 W sustained with brief bursts toward 10 W, precision is part of the feasibility test: the model's weights, activations, and any local training state must fit beside the rest of the phone's workload, and INT8 or INT4 weights often decide whether an on-device model fits at all. Microcontroller-class sensors sit at an extreme below Archetype C, where a live FP16 working set that exceeds a 256 KB SRAM budget cannot reside on the device at all; smaller models or weights streamed from nonvolatile storage require a different accounting. Binary neural networks and 1-bit quantization push this to the extreme, representing weights as single bits (+1/-1). While this trades significant accuracy, it reduces the weight memory footprint by 16× relative to FP16 (32× relative to FP32). These storage ratios exclude metadata and activations; device energy savings require a supported execution path and measurement of the complete workload.

Post-training vs. quantization-aware training

When a post-training recipe misses the quality budget, the precision decision shifts from calibration to training cost. The trade-off between Post-Training Quantization (PTQ) and Quantization-Aware Training (QAT) centers on the balance between engineering effort and model fidelity. PTQ starts from trained weights and avoids a gradient-based retraining loop. Methods such as GPTQ and AWQ use calibration activations to guide weight quantization, although they optimize different criteria. Their cost depends on model size, calibration data, and implementation. Reducing precision further can increase quality loss, so a recipe that works at INT8 does not establish that INT4 or INT3 will meet the same requirement. Evaluation must cover the intended tasks and input distribution, using held-out data rather than the calibration set alone.

When PTQ fails to meet quality thresholds, QAT offers another way to adapt the model to the target precision. Simulating low-precision rounding during the forward pass and approximating gradients during the backward pass via the straight-through estimator (STE)[3] allows the network to adjust its weights in response to quantization error. The training recipe must match the intended inference representation closely enough for that adaptation to transfer, and the resulting model still needs to pass the quality gate.

QAT introduces training costs: forward and backward passes, trainable state, and data suitable for adapting the model. The hardware and runtime requirements depend on which parameters are updated and how long training continues. Adapter-based quantized fine-tuning can reduce trainable state by freezing a quantized base model and updating small low-rank adapter matrices, pairs of thin matrices whose product is added to a frozen weight matrix so that only the thin pair

[3] **Straight-through estimator (STE)**: Rounding has zero gradient almost everywhere, so backpropagation through a quantized layer would otherwise stall. The STE, discussed by Bengio et al. (2013) for hard stochastic neurons, passes the upstream gradient through the rounding step as if rounding had not happened. It is a heuristic that works well in QAT practice, not a convergence guarantee.

is trained. It can improve task performance under that representation, but using a quantized base does not by itself make the procedure QAT for the final deployed model. Merging or requantizing adapters can change the numerical path, so quality must be checked after the intended deployment conversion.

In many deployment environments, a practical workflow follows a two-stage approach: deploy with PTQ first when it meets quality requirements, then apply QAT or adapter-based quantized fine-tuning if the PTQ model fails at the target precision. This sequence minimizes engineering effort while preserving the option of higher quality when needed.

Weight-only vs. weight-activation quantization

The final precision choice is whether the optimization should stop at the weights or include activations as well. Weight-only quantization, as used by GPTQ and AWQ, stores weights at reduced precision while retaining higher-precision activations. In a common INT4 implementation, the kernel dequantizes weights to FP16 during the GEMM and performs matrix arithmetic on FP16 Tensor Cores. The storage format therefore reduces weight capacity and read traffic without implying INT4 arithmetic throughput. This is a useful candidate for weight-dominated, small-batch decode, provided the saved traffic outweighs unpacking and dequantization costs.

Weight-activation quantization (SmoothQuant, FP8 training) reduces both weights and activations to lower precision, enabling the GEMM to execute using lower-precision arithmetic (INT8 Tensor Cores, FP8 Tensor Cores). This provides both bandwidth and compute benefits but is more challenging to implement without quality degradation, because activation distributions are more dynamic and harder to quantize than weight distributions.

The roofline placement determines which benefit is exposed, which gives a working rule. At small batch sizes, where decode streams weights below the ridge, weight-only INT4 attacks the binding term by cutting weight bytes, and leaving the arithmetic in FP16 costs little because arithmetic is not the binding term. At large batch sizes or in prefill, where execution approaches the compute ceiling, weight-activation FP8 raises that ceiling, which weight-only formats cannot do. Neither format has a universal advantage in speed per unit of quality loss. Hardware support, matrix shapes, cache traffic, and calibration quality all affect the comparison. A serving system can use different formats at different operating points, but each configuration must be evaluated against the same quality criterion and its own latency and throughput requirements.

The same precision problem extends to the KV cache, which determines whether weight savings become larger batches. In decode, weights may be compressed aggressively while per-request cache state still grows with sequence length, so a precision change that leaves the cache untouched may fail to move the serving bottleneck. Numerical compression reduces the bytes stored per cached key or value, while GQA, met earlier as a source of decode-attention reuse, reduces how many key-value heads must be cached for each layer. GQA is a model-architecture choice, not a precision switch that can be applied unchanged to any checkpoint. Both mechanisms matter because the scheduler admits requests against the combined memory footprint of weights plus active cache state. The KV cache capacity calculation isolates the local capacity effect, holding serving policy fixed and excluding quantization metadata, runtime workspace, and admission headroom. Its batch sizes are capacity bounds under those assumptions.

↪ KV cache quantization and grouped query attention as serving-memory techniques are developed in section 6.



Napkin Math 9.3: The precision dividend

Problem: A 70B parameter model is served on 8× H100 GPUs. The model weights in FP16 consume 140 GB (17.5 GB per GPU). KV cache at FP16 consumes 1.34 GB per request. How does quantizing weights to INT4 and KV cache to INT8 change the maximum batch size?

Math:

Step 1: Baseline capacity in FP16. Before optimization, weights consume 17.5 GB per GPU, leaving 85.9 GB minus 17.5 GB = 68.4 GB per GPU for the KV cache. With an FP16 KV cache requiring 1.34 GB total per request (approximately 0.17 GB per GPU), the system supports a maximum batch size of approximately 407 requests.

Step 2: Optimized capacity with INT4 weights and INT8 KV cache. Quantizing weights to INT4 compresses the per-GPU footprint by 4/16 to 4.4 GB, expanding available cache memory to 85.9 GB minus 4.4 GB = 81.5 GB per GPU. Compressing the KV cache to INT8 simultaneously reduces the per-request footprint to approximately 0.67 GB total (0.08 GB per GPU). Dividing the expanded cache capacity by the halved footprint yields a maximum batch size of approximately 971 requests.

Systems insight: Precision engineering changes serving economics by enabling larger batch sizes. Larger batches amortize the fixed cost of weight loading, shifting operations from memory-bound toward compute-bound. The calculated capacity gain is 2.4×; converting that headroom into throughput requires measuring the larger batch against compute, cache-read bandwidth, and latency limits.

Precision engineering reduces the payload needed to represent values; operator fusion can eliminate transfers of intermediate values altogether. Their combined memory savings can make a configuration feasible even when either technique alone is insufficient. For example, FlashAttention avoids quadratic attention intermediates, while INT8 KV cache compression reduces the remaining cache payload relative to FP16. Their latency gains need not multiply: conversion costs and a shift to a different bottleneck can limit the combined speedup. Because these patterns recur across stable layer structures, the next question is when a compiler can apply the transformations across the whole model graph.

Graph Compilation

After precision and fusion expose repeatable optimization patterns, graph compilation asks whether those patterns are stable enough for the compiler to own. Manually authoring fused CUDA kernels for every layer permutation across rapidly evolving architectures is an impractical burden for human developers. A graph compiler analyzes the model's computational graph and generates optimized, hardware-aware machine instructions, transforming high-level PyTorch code into specialized kernels when shape stability and replay volume justify the compilation cost.

Systems Perspective 9.5: Hardware-software co-design

Compilation also determines where values live and which execution units perform the work. A target-specific backend chooses matrix tiles, places intermediates within the memory hierarchy, and maps operations to supported arithmetic units. Different accelerator backends make different choices because their arrays, instruction sets, and storage resources differ. These mappings implement the model's numerical contract; any precision changes or reordered reductions must remain within that contract. Hardware-aware compilation therefore joins algorithmic structure to the resource limits established by profiling.

The compilation pipeline

A graph compiler transforms high-level model definitions into optimized hardware instructions across four progressive tiers: graph capture, graph-level optimization, target-aware operator fusion, and code generation. The transformer feed-forward network block in figure 0.115 traces one lowering through PyTorch's compiler, `torch.compile`, whose three components section 4 introduces. Its capture front end, TorchDynamo, records the subgraph; a decomposition step (AOTAutograd) exposes GEMM-bias primitives; and its code generator, TorchInductor, groups the first GEMM with GELU and selects a fused epilogue alongside separate GEMM and normalization kernels. The four-operation, three-kernel path is one illustrative outcome, and the trace shows the counts a real model and backend produce.

In the graph capture stage, the compiler constructs a representation of operations and tensor dependencies. The illustrated FFN block forms a directed acyclic graph with four primary nodes and associated parameter tensors. Capturing a Python execution path may specialize the graph to assumptions that must be checked on later calls. Symbolic dimensions can accommodate changing

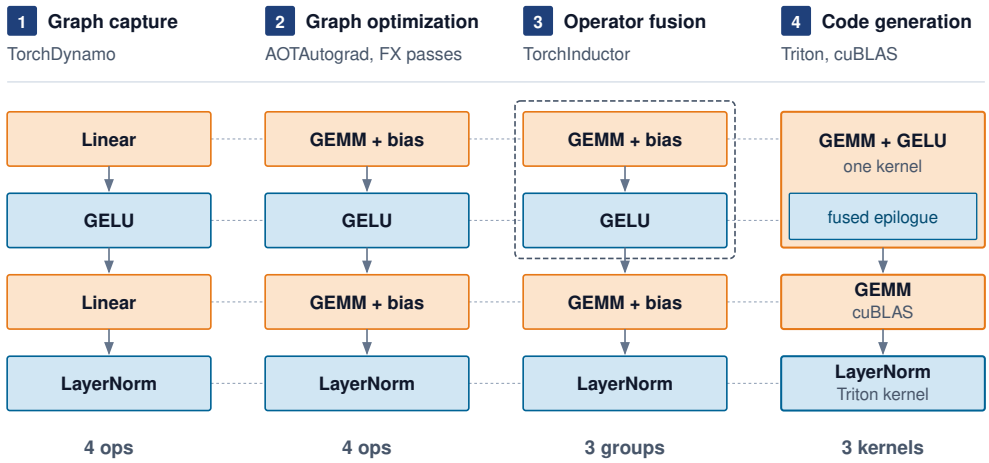


Figure 0.115: Deep learning compilation pipeline: The four-stage lowering flow from eager Python bytecode through graph capture (TorchDynamo), graph-level optimization (AOTAutograd decomposition and FX passes), target-aware operator fusion (TorchInductor), and code generation with autotuned GPU kernels (Triton and cuBLAS). Each column traces the same feed-forward block: bias additions fold into the GEMMs, GELU fuses into the first GEMM as an epilogue, and four captured operations lower to three kernels. Orange marks the compute-heavy GEMMs and blue the element-wise and normalization operations whose cost is memory traffic, so fusion folds a blue operation into an orange kernel as its epilogue.

tensor sizes, but do not by themselves represent arbitrary data-dependent branches or loops. Those require supported control-flow constructs, separate captured regions, or execution outside the compiled region.

During graph-level optimization, the compiler applies algebraic simplifications and operation rewriting. It identifies that the bias addition in the first `Linear` layer is a candidate for folding into the matrix multiplication kernel. It also recognizes that the `GELU` activation is an element-wise operation that depends only on the output of the first `Linear`. Exposing these dependencies prepares the graph for fusion and kernel selection. A smaller graph alone does not establish a speedup, because its nodes may represent operations with very different costs.

The operator fusion pass identifies compatible operations that can share a kernel and avoid intermediate transfers. For the FFN block, the compiler can fuse the `GELU` activation into the tail of the first `Linear` kernel when the GEMM supports that epilogue. The second `Linear` lies between `GELU` and `LayerNorm`, so those two operations are not an adjacent fusion pair. Instead of materializing the intermediate result of the first `Linear` and rereading it for `GELU`, the fused epilogue consumes the values on chip. The HBM saving depends on tensor sizes and cache behavior, while profitability also depends on the fused kernel's resource use.

The memory planning pass determines when to allocate and free tensors. Without optimization, a transformer might allocate separate buffers for every intermediate activation. The compiler analyzes tensor lifetimes, recognizing that, absent a residual connection, the input to the first `Linear` is dead once that `Linear` has consumed it, and reuses the same physical memory addresses. For inference and other forward-only workloads, this buffer reuse can turn peak temporary memory from the sum of many layer-local buffers into the maximum live working set. Training activations that must be saved for the backward pass require checkpointing or rematerialization; ordinary buffer reuse cannot make those saved tensors disappear. Memory planning also interacts with operator fusion: fusing two operations eliminates the intermediate tensor between them, which both removes the HBM traffic and removes the memory allocation. The compiler must reason about both effects jointly to make profitable decisions.

The kernel selection pass maps each fused operation to an available implementation. For the first `Linear-GELU`, the compiler may select a cuBLAS or CUTLASS GEMM with a compatible activation epilogue; the second `Linear` remains a GEMM, and `LayerNorm` requires reduction and normalization work. The illustrated path reduces 4 kernels to 3 by eliminating one intermediate materialization.

Other shapes or backends may choose different boundaries, including separate kernels when fusion is unavailable or unprofitable.

torch.compile

For workloads already written in PyTorch, `torch.compile` is the least disruptive compiler intervention. It tries to capture enough static graph to fuse memory-bound regions while preserving PyTorch's dynamic Python execution model. It operates through three components: TorchDynamo for graph capture, AOTAutograd for graph-level preparation, and TorchInductor for code generation. AOTAutograd lowers the captured graph into primitive tensor operations, the decomposition stage of figure 0.115, for inference and training alike; for training it also constructs the backward graph ahead of time so the backward pass can be compiled too.

TorchDynamo operates at the Python bytecode level,[4] a design choice that distinguishes it from earlier tracing approaches. `torch.jit.trace` records tensor operations executed on example inputs, while `torch.fx` symbolic tracing executes with proxy values. Each has restrictions on the Python behavior it can represent. TorchDynamo intercepts Python frame evaluation to capture supported tensor computation. Python constructs it cannot capture, including some data-dependent control flow and unsupported operations, can cause a **graph break**. In the default configuration, execution may return to Python and resume capture in a later region. Requiring a single full graph instead makes an unsupported break an error. Larger captured regions create more optimization opportunities, but preserving program behavior takes precedence over capture size.

TorchInductor lowers the captured graph into generated kernels and calls to existing libraries. Common paths include Triton for GPU kernels and C++/OpenMP for CPU kernels. Triton provides a Python-like language that exposes tiling and fusion while its compiler maps the specified work onto GPU execution resources. TorchInductor can fuse supported element-wise patterns and select implementations using heuristics or autotuning, depending on the operation and configuration. These choices make the generated code and its measured behavior the evidence for which optimizations occurred.

A minimal example illustrates the usage:

```
import torch

def transformer_block(x, w1, w2, ln_weight, ln_bias):
    """Unfused transformer FFN block."""
    h = x @ w1  # Linear projection
    h = torch.nn.functional.gelu(h)  # Activation
    h = h @ w2  # Output projection
    # Layer normalization
    mean = h.mean(dim=-1, keepdim=True)
    var = h.var(dim=-1, keepdim=True, unbiased=False)
    h = (h - mean) / torch.sqrt(var + 1e-5)
    h = h * ln_weight + ln_bias
    return h

# Compile the function-TorchDynamo traces, TorchInductor optimizes
compiled_block = torch.compile(transformer_block)

# First call triggers compilation; subsequent calls use compiled code
output = compiled_block(x, w1, w2, ln_weight, ln_bias)
```

In this example, `torch.compile` exposes opportunities to fuse GELU with compatible surrounding work and to combine normalization steps. The actual kernel boundaries depend on shapes, backend support, and compiler decisions. Model code remains standard PyTorch; inspecting the generated kernels and comparing warmed execution against the eager baseline establishes what the compiler achieved.

XLA and TPU optimization

XLA pays for performance with static structure. Used as the backend for JAX and TensorFlow, it generates the high-level optimizer intermediate representation that targets multiple backends, including Google Tensor Processing Units (TPUs), NVIDIA GPUs, and CPUs. Within a selected

[4] **TorchDynamo bytecode interception**: CPython's frame-evaluation hook (PEP 523, introduced in Python 3.6) lets TorchDynamo intercept Python execution and capture supported tensor operations. Capture still depends on supported program behavior and guards that validate specialization assumptions. Its integration with CPython makes interpreter-version compatibility part of the deployment contract.

compilation region, XLA can optimize across operations and layers rather than preserving eager execution boundaries. Whole-program compilation describes the scope available to those optimizations; it does not require every host-side activity in an application to enter one graph.

That view also supports compiler-directed partitioning through General and Scalable Parallelization for ML Computation Graphs (GSPMD), where SPMD denotes the single program, multiple data execution model. Sharding annotations describe how tensors are distributed, and the compiler propagates those choices through the graph and inserts communication such as AllReduce or AllGather. PyTorch interfaces such as `DistributedDataParallel` or `FullyShardedDataParallel` expose another way to express distributed execution; they are not the only available interfaces. The important distinction is which partitioning and communication decisions the programmer specifies and which the compiler derives. Compiler assistance reduces implementation work, but the resulting communication volume and layout still require evaluation.

For TPU hardware, XLA maps matrix multiplication onto systolic arrays and chooses layouts and schedules suited to the target generation. Hardware units of 128×128, as used in several TPU generations, motivate alignment and padding choices; array dimensions are generation-specific. Padding can improve hardware mapping while adding arithmetic, so useful model throughput remains the relevant outcome. Comparing a tuned TPU run with a less-tuned GPU run does not isolate a compiler benefit: workload, precision, topology, and optimization effort must also be controlled.

The trade-off for XLA's performance is compilation latency and rigidity. Compilation cost depends on the size and structure of the compiled region in either stack. In JAX, new argument shapes, dtypes, or static argument values can require a new specialization; previously compiled signatures can reuse cached executables. This makes XLA excellent for steady-state production workloads where the graph is static and the model runs for days or weeks, but challenging for research environments involving dynamic shapes or rapid experimental iteration. The choice between `torch.compile` and XLA often follows the hardware and software stack: NVIDIA GPU workflows commonly start from PyTorch, while TPU workflows commonly use JAX or TensorFlow with XLA.

TensorRT inference optimization

NVIDIA TensorRT specializes an inference graph for a target device and a declared range of inputs. The absence of a backward pass lets it plan tensor lifetimes without retaining activations for gradients, while the inference graph exposes opportunities for fusion and kernel selection. Quantization is a separate choice within that workflow. A quantized model may arrive with explicit scales and conversion operations; calibration on representative data can supply scales when the selected quantization path requires them. Calibration is therefore not a mandatory step for every TensorRT engine.

Mixed-precision quantization requires deciding which tensors and operations can use reduced precision without exceeding the quality budget. Representative calibration data helps select ranges, but does not prove that every layer tolerates the same format. Explicit quantization encodes the intended conversions in the graph, and TensorRT optimizes within that numerical contract. The input graph must also represent inference behavior, with training-time dropout and running-statistic updates disabled. Shape profiles and tensor lifetimes then guide kernel specialization and memory planning.

TensorRT uses kernel autotuning to compare available implementations, called tactics, under the builder's settings and resource constraints. The search depends on the operation and shape profile; timing caches can reuse prior results rather than benchmarking every candidate again. The selected tactics form part of the TensorRT engine's specialization to its deployment. That specialization can improve performance, but its advantage over another compiler must be established on the same workload and quality contract, including shapes away from the tuning point.

The trade-off for TensorRT's aggressive optimization is reduced flexibility and high compilation cost. Build time depends on model size, tactic search, and hardware. By default, an engine targets a particular hardware and shape profile; compatibility modes can broaden supported hardware, and dynamic-shape profiles admit a declared range. Changes outside the engine's supported contract require a new build. This makes TensorRT a common fit for stable, high-volume production

deployments, while `torch.compile` is often a better fit for development and lower-volume services where rapid iteration matters more than extracting the last percentage of throughput.

The Triton language

Between hand-written CUDA and fully automated graph compilers sits Triton,[5] a Python-based language for writing GPU kernels. Triton occupies a middle ground: the programmer specifies the algorithm (tiling strategy, fusion pattern) while Triton handles low-level concerns (thread block scheduling, memory coalescing, shared memory management).

A tile-level GELU kernel illustrates the programming model. Even this single activation is a small fusion, because the tanh approximation chains a cube, a multiply-add, a tanh, and a final scale that eager code written operation by operation would run as separate kernels with intermediate writes:

```
import triton
import triton.language as tl

@triton.jit
def fused_gelu_kernel(
    input_ptr,
    output_ptr,
    n_elements,
    BLOCK_SIZE: tl.constexpr,
):
    # Each program instance handles BLOCK_SIZE elements
    pid = tl.program_id(0)
    offsets = pid * BLOCK_SIZE + tl.arange(0, BLOCK_SIZE)
    mask = offsets < n_elements

    # Load input tile from HBM into registers
    x = tl.load(input_ptr + offsets, mask=mask)

    # Fused GELU computation (tanh approximation)
    # GELU(x) = 0.5 * x * (1 + tanh(sqrt(2/pi) * (x + 0.044715 *
    # x^3)))
    x_cubed = x * x * x
    inner = 0.7978845608 * (x + 0.044715 * x_cubed)
    gelu = 0.5 * x * (1.0 + tl.math.tanh(inner))

    # Store result back to HBM
    tl.store(output_ptr + offsets, gelu, mask=mask)
```

The programmer thinks in terms of tiles (`BLOCK_SIZE` elements), not individual threads. Triton compiles this to Parallel Thread Execution (PTX), NVIDIA's virtual instruction set, and from there to streaming assembly (SASS), the native machine code of a specific GPU generation, handling thread-to-data mapping, memory coalescing, and register allocation automatically. This makes it feasible for ML engineers (rather than GPU specialists) to write custom fused kernels when the automatic compiler misses a fusion opportunity.

The next step extends the same pattern across operators. For `y = LayerNorm(GELU(x))`, separate GELU and LayerNorm kernels write and then reread the GELU output. A fused implementation can avoid that round trip when the normalization reduction and its temporary state fit the selected tile schedule. Actual HBM traffic depends on the reduction implementation, cache reuse, and register pressure; the runtime benefit must be measured rather than equated directly with the byte reduction.

The performance-engineering consequence is that Triton turns many custom fusion opportunities into compiler output. When `torch.compile` identifies a fusion opportunity that requires a custom kernel, TorchInductor automatically generates Triton code for the fused operation. Many fusion benefits therefore come through a single `torch.compile` call, without hand-written Triton code. For advanced cases where the compiler's heuristics miss the bottleneck, hand-written Triton kernels provide a middle ground between the accessibility of PyTorch and the performance of hand-tuned CUDA.

[5] **Triton**: Introduced by Tillet et al. (2019) as an intermediate language and compiler for tiled neural-network computations, and later developed at OpenAI; the key design decision was making the tile, not the thread, the fundamental programming abstraction. This choice directly mirrors the tiling strategy of FlashAttention: the programmer reasons about blocks of data that fit in SRAM, and the compiler maps those blocks to GPU threads and shared memory. This abstraction reduces exposure to low-level CUDA concerns such as warp divergence, bank conflicts, and coalescing while preserving control over the memory hierarchy decisions that determine ML kernel performance.

Compilation modes and backends

Because most fusion and replay benefits reach PyTorch workloads through `torch.compile`, its mode setting is usually the first compilation decision a deployment makes. Mode selection is an amortization decision, since additional search is useful only when repeated execution recovers its cost. The `default` mode provides a baseline for comparing compilation time and warmed performance. The `reduce-overhead` mode targets eligible launch-bound regions and can use CUDA Graphs (section 2) to reduce repeated submission, sometimes at additional memory cost. The `max-autotune` mode expands the search over supported kernel implementations; it does not guarantee that every operation is tuned or that the resulting graph is faster for every input. Compare build time, memory demand, and execution across the expected shape distribution before choosing a mode.

Backend choice follows the same constraint: the more stable and deployment-specific the workload, the more specialization it can support. TorchInductor combines generated kernels with library calls. Export through `torch.export` produces a graph with an explicit contract, but deployment runtimes require compatible conversion paths and supported operators. TensorRT integrations and Open Neural Network Exchange (ONNX) Runtime use their respective import workflows; an exported graph is not automatically interchangeable among them. Correctness, shape coverage, and measured performance must be checked after conversion.

The value of the longest search, `max-autotune`, can be priced from a profile breakdown of where a decode step spends its time. A single-GPU budget again keeps collectives out of the accounting, so the scenario uses a 13B model on one H100.



Napkin Math 9.4: The compilation dividend

Problem: Consider an illustrative batch-one inference budget for a 13B-parameter model stored in INT4, with FP16 arithmetic after dequantization. Assume the eager implementation processes 120 tokens/s on a single H100. The constructed time budget assigns 35 percent of step time to element-wise kernels (LayerNorm, GELU, residual additions) and 15 percent to launch overhead. These are scenario inputs, not measured performance; the INT4 weight footprint avoids implying a physically impossible full-FP16 streaming rate. Applying `torch.compile` with the `max-autotune` mode, estimate the new throughput.

Math:

Step 1: Identify the addressable overhead. Element-wise kernels (35 percent) and launch overhead (15 percent) total 50 percent of execution time. The scenario assumes that `torch.compile` reduces element-wise time by 70 percent through fusion and removes most exposed launch overhead. These assumed reductions define a candidate outcome to verify with profiling.

Step 2: Estimate postcompilation time. Starting from an original time per token of $1/120 = 8.33\,\text{ms}$, compilation leaves the GEMM time unchanged at $8.33 \times 0.50 = 4.17\,\text{ms}$. Fusion reduces element-wise execution time by 70 percent to $8.33 \times 0.35 \times 0.30 = 0.87\,\text{ms}$, while launch optimizations eliminate 80 percent of launch overhead down to $8.33 \times 0.15 \times 0.20 = 0.25\,\text{ms}$. Summing these components yields a new time per token of $4.17 + 0.87 + 0.25 = 5.29\,\text{ms}$, or approximately 189 tokens/s.

Systems insight: Under these assumptions, `torch.compile` yields a 1.58× modeled speedup without changing GEMM time. The GEMM then accounts for 79 percent of the step, making it the next interval to inspect. Its measured compute, bandwidth, and shape efficiency determine whether precision, batching, kernel selection, or another intervention can shorten it.

Compilation overhead and trade-offs

Compilation is worthwhile when repeated executions recover the build and warmup cost before the model or its execution shapes change. Build costs span orders of magnitude, from seconds or minutes of `torch.compile` warmup to tens of minutes for a TensorRT engine of a 70B model, so the break-even replay count differs just as widely. Long-running training jobs and high-volume services offer many reuses; short-lived model versions and heterogeneous requests may not. The compilation dividend above makes the break-even concrete.

In that scenario, compilation saves about 3.0 ms per generated token. A `max-autotune` search of about 15 min, the mode the dividend assumed, is repaid after roughly 300,000 tokens, or about 26 min of continuous single-stream generation at the compiled rate. A default-mode build of about 1 min would need only about 20,000 tokens if it captured the same saving. Repayment depends on the number of executions that reuse the artifact, not simply on how many days the model remains deployed. Frequent recompilation or low demand can prevent the longer search from paying back. Table 0.90 summarizes how the common compilation paths trade build cost against shape flexibility.

Table 0.90: Compilation trade-offs: Deeper specialization raises build cost and narrows the shapes a compiled artifact accepts, so the right path depends on how long a model version and its shape distribution stay fixed. Build costs are orders of magnitude for a large model, not measurements.

Compilation path	Build cost	Shape flexibility	Specialization depth	Typical fit
`torch.compile` (default)	Seconds to minutes	High; graph breaks and recompiles on new shapes	Element-wise fusion, memory planning	Development and changing models
`torch.compile` (autotune)	Minutes to tens of minutes	Moderate; tuned per shape bucket	Autotuned tiles and launch configurations	Stable shapes with long replay
XLA (JAX)	Minutes per shape signature	Low; new shapes or dtypes respecialize	Whole-region fusion, layout, and sharding	Static-graph training and TPU serving
TensorRT engine	Tens of minutes for a large model	Low; declared shape profiles only	Per-kernel tactic search, calibrated precision	Stable, high-volume inference

Graph breaks, the capture interruptions introduced by unsupported program behavior, divide the regions over which a compiler can fuse operators and plan memory. Many small regions can therefore retain the launch and transfer costs that motivated compilation. Refactoring unsupported control flow can enlarge those regions, but the maintenance cost belongs in the optimization decision.

Shape specialization creates a related trade-off. Kernels specialized for a narrow shape range can exploit more fixed information, while symbolic dimensions or a broader supported range accommodate variable batches and sequence lengths. The appropriate choice follows the production shape distribution and replay frequency, which also determine how much autotuning effort is justified.


Graph compilation applies supported rewrites and hardware mappings across captured regions. Its scope depends on the transformations it implements and the numerical contract it must preserve. Larger changes to model execution, such as proposing several tokens before verification or activating only selected experts, introduce additional algorithmic choices. Their benefits and correctness conditions must be understood before a compiler can implement them effectively.

Algorithmic Performance Transformations

Fusion, precision engineering, and graph compilation optimize the same dense computation by moving fewer bytes, using narrower formats, or letting compilers reorganize kernels. Algorithmic transformations change the work itself. Speculative decoding attacks the memory-bound decode loop by trying to accept multiple tokens per target-model pass, while MoE attacks dense-model cost by activating only the experts a token needs. Both techniques can improve the iron-law budget, but both can also create new bottlenecks if their extra control logic, communication, or imbalance exceeds the work they remove.

Speculative decoding

Speculative decoding is a latency optimization that breaks the sequential bottleneck of autoregressive generation by using a smaller draft model to predict multiple tokens, which are then verified in parallel by the target model (Leviathan et al. 2023; Chen et al. 2023). The performance-engineering relevance is arithmetic intensity: a single target-model forward pass can process K candidate tokens for roughly the same weight-streaming cost as one token, the same reuse that batching buys in equation 0.34 but drawn from one request's future tokens, shifting the decode operating point from the memory-bound slope toward the roofline ridge.



Verifying K draft tokens in one pass moves decode up the slope toward the ridge.

Figure 0.116 aligns the execution timelines of standard and speculative generation along a shared time axis. Where standard decoding uses four separate target-model passes to generate four tokens, the smaller draft model proposes tokens T_1 through T_4 sequentially, and the target evaluates those positions in a single forward pass. In the illustrated round, three tokens (T_1–T_3) are accepted, while the first rejected token (T_4) is replaced by T_4' via residual sampling. The shorter timeline assumes that drafting, verification, and correction together cost less than the target passes they replace.

The transformation is useful only when the draft model is accurate enough and cheap enough. If too many draft tokens are rejected, the target model still loads its weights but accepts little useful work. If the draft model is too expensive, its own sequential passes consume the time that one-pass verification saved. Batching changes the calculation as well: at large batch sizes the decode phase is already closer to compute-bound, so the marginal benefit of speculation shrinks. This chapter uses speculative decoding to show how an algorithm can alter the performance equation; section 6 treats it as a serving policy with admission control and service level agreement (SLA) consequences.

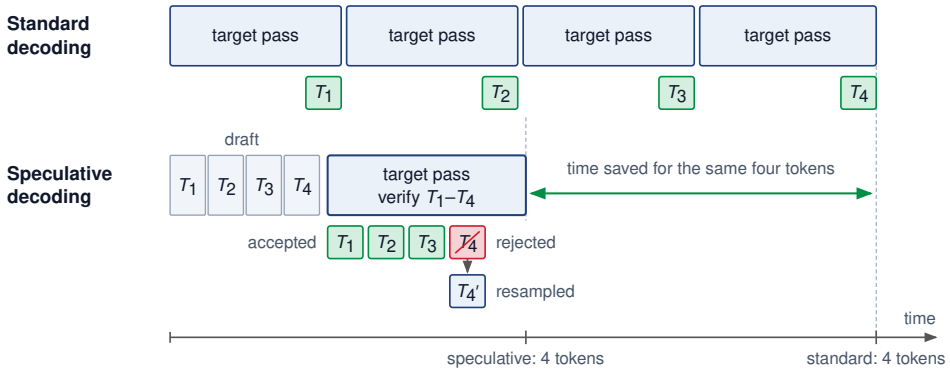


Figure 0.116: Speculative decoding process: Instead of generating tokens sequentially with the large target model, a small draft model proposes a sequence of K tokens. The target model verifies all K tokens in a single parallel forward pass. Drafted tokens that pass the acceptance test are emitted together; the first rejected token triggers a corrected sample and discards the remaining draft.

Algorithm 0.4 makes the acceptance test precise: after the single target-model pass, each drafted token is accepted with probability $\min(1, p_\theta/q_\phi)$, and a rejection resamples from the normalized positive residual $(p_\theta - q_\phi)_+$, so the emitted sequence is distributed exactly as the target model would have produced unaided. That correctness guarantee is what lets speculative decoding trade draft-model compute for latency without shifting the output distribution.

Algorithm 0.4 Speculative decoding

Require: target distribution $p_\theta(\cdot \mid \cdot)$; draft distribution $q_\phi(\cdot \mid \cdot)$; prefix $y_{1:t}$; draft length K
Ensure: one or more new tokens distributed as p_θ

for $i = 1$ to K **do**
  draft $\hat{y}_{t+i}$ from $q_\phi(\cdot \mid y_{1:t}, \hat{y}_{t+1:t+i-1})$
end for
run p_θ once on the prefix plus all K drafts to obtain target distributions for the drafted positions and final next-token position
for $i = 1$ to K **do**
  $a_i \leftarrow \min\left(1, \frac{p_\theta(\hat{y}_{t+i} | y_{1:t}, \hat{y}_{t+1:t+i-1})}{q_\phi(\hat{y}_{t+i} | y_{1:t}, \hat{y}_{t+1:t+i-1})}\right)$
  accept $\hat{y}_{t+i}$ with probability a_i
  if $\hat{y}_{t+i}$ is rejected **then**
    sample one corrected token from the normalized positive residual $(p_\theta - q_\phi)_+$
    emit accepted draft tokens and the corrected token; discard the remaining draft; start a new round
  end if
end for
if all K drafts were accepted, emit them and sample one extra token from the target distribution

The payoff can be stated in one quantity. Under a simplified model in which each drafted position is accepted independently with probability α_{acc}, a round emits its accepted prefix plus one target-sampled token (the correction at the first rejection, or the extra token after full acceptance). Equation 0.35 gives the expected output of one verification round with K drafted tokens:

$$\mathbb{E}[N_{\text{emit}}] = \sum_{i=0}^{K} \alpha_{\text{acc}}^{i} = \frac{1 - \alpha_{\text{acc}}^{K+1}}{1 - \alpha_{\text{acc}}} \tag{0.35}$$

With $K = 5$, an acceptance probability of 0.78 yields about 3.5 tokens per target pass, while an acceptance probability of 0.5 yields only about 2. The target model streams its weights once per round in both cases, so the amortized weight traffic per emitted token differs by nearly a factor of two before draft cost is even counted.

Speculative decoding pays off when the complete draft-and-verify round costs less per emitted token than ordinary target decoding. Rejections shorten the accepted prefix, but acceptance rate alone does not determine that cost: drafting, verification, cache management, and sampling all contribute. The serving system must therefore tune draft length and draft-model choice against measured latency and throughput under the same output-distribution requirement.

Mixture of experts

A mixture-of-experts architecture can increase total parameter capacity without activating every feed-forward parameter for every token (Fedus et al. 2022; Lepikhin et al. 2021). Sparse activation changes the relation between total parameters and per-token arithmetic, but it does not guarantee higher quality or lower latency than a dense model at a fixed resource budget. The comparison must hold model quality, batch and sequence distributions, hardware topology, and service objectives constant.

A standard MoE transformer layer replaces the feed-forward network with multiple parallel "expert" FFNs and a lightweight Router (also called a gating network) that selects which experts process each token. That architecture shifts the performance problem from dense matrix throughput to routing, memory residency, and load balance. When experts are distributed across GPUs, expert parallelism places different experts on different devices, and an AllToAll exchange moves each token's hidden state to its assigned expert before returning the result. The active-parameter savings are valuable only if that routing traffic and any expert imbalance remain smaller than the dense compute they replace.

A per-token estimate separates arithmetic savings from routing costs, and which saving counts depends on the regime. Because the recurring 70B model is dense, the estimate uses Mixtral 8x7B

(A. Q. Jiang et al. 2024), which routes each token to 2 of 8 experts, each holding about 176 million parameters per layer. In batched serving and prefill, where execution approaches the compute ceiling, the saving is arithmetic. Compared with evaluating every expert, routing skips about 2.1 GFLOP per token per layer, equivalent to 2.1 µs at H100 FP16 peak compute. The modeled dispatch-and-combine payload is 32.8 KB in FP16, and dividing by peak NVLink bandwidth gives 73 ns, roughly 29× less than the skipped compute. Bytes are therefore not the binding routing cost; the fixed cost of each exchange is. With the scenario's assumed two-launch cost of 10 µs per layer, a layer repays its routing overhead only when it routes about 5 or more tokens at once, which batched serving and prefill supply easily. In batch-one decode, below the ridge, the saving is bytes instead. At FP16 each parameter costs two FLOPs and occupies two bytes, so the unselected experts' weights amount to about as many gigabytes per layer as the skipped work has GFLOPs, and streaming that many bytes at HBM bandwidth takes far longer than the exchange's microseconds of launch. Achieved AllToAll bandwidth, topology, and expert imbalance move both crossovers, and neither comparison sets MoE against a dense model of matched quality.

For performance engineering, the local question is whether active-parameter savings exceed the costs of routing and communication over the workload envelope. A complete evaluation documents the total expert pool, active experts per token, expert capacity limits, token routing skew, dispatch and combine communication volume, AllToAll exchange duration, dropped or rerouted tokens, and the achieved output quality alongside latency. Sparse activation improves the iron-law budget only when inactive experts stay off the critical path and routing does not create a larger communication or straggler term.

Overlap on the Device: Streams, Contention, and Tensor-Parallel Collectives

The recurring 70B replica spans eight GPUs, so every decode step contains collectives. In a tensor-parallel inference pass or a multi-GPU training step, an accelerator can finish local computation and then wait for an AllReduce to combine activations or gradients. Overlap shortens that exposed wait by running communication alongside independent computation on the same device. The collective algorithms and the layer-by-layer gradient schedules that create the opportunity belong to the communication layer; this section asks the device-level question of how much communication remains on the critical path once dependencies, stream ordering, and contention for the same SMs and memory bandwidth are accounted for.

↩ Layer-by-layer gradient overlap and bucket fusion are established in section 10.

Consider a 70B model with tensor parallelism across 8 H100 GPUs, using two AllReduce operations per layer in the forward pass, one after attention and one after the FFN. Approximate per-rank collective traffic as $2 \times d \times B \times 2$ bytes at FP16 (where $d = 8192$ for Llama 2 70B and B is batch size). At batch size 1, this gives $2 \times 8192 \times 1 \times 2 = 32.8$ KB per AllReduce. Dividing by 450 GB/s of per-direction NVLink bandwidth yields an ideal transfer term of 72.8 ns. The assumed launch overhead of 5 µs is roughly 70× larger. At batch size 1, the collective is therefore dominated by fixed software and protocol cost rather than bandwidth, and a faster link would barely shorten it. Peak link bandwidth alone poorly predicts small-message collective latency; launch, protocol, and synchronization costs must be measured.

At batch size 64, the modeled traffic per AllReduce grows to $2 \times 8192 \times 64 \times 2 = 2.1$ MB, giving a bandwidth-only term of 4.7 µs. Adding the assumed launch overhead gives 9.7 µs before other collective costs. The scenario estimates local execution from weight streaming: each GPU reads its 219 MB share of a layer's FP16 weights in 65 µs at peak HBM bandwidth, then assigns half that time, 33 µs, to each interval between AllReduces. This modeled interval is about 3.4× the communication estimate, so at batch 64 a window exists in duration. Whether the schedule can use it is a dependency question.

The duration comparison gives an upper bound on the overlap opportunity. A consumer cannot use an activation before its reduction completes, so a tensor-parallel schedule also needs independent work or a legal chunking scheme to fill that interval. Total compute time alone does not prove that the communication can be hidden. Training gradient synchronization supplies the contrasting case, for two reasons. Its payload is the whole gradient tensor rather than one activation vector, so the collective is bandwidth-bound and the overlap question becomes quantitative. Its dependencies are also looser, because completed gradient buckets can communicate while later backward kernels

compute other gradients. The next calculation therefore switches from activation exchanges to ring AllReduce over the gradient tensor.

Quantifying the overlap opportunity

The potential benefit of communication-computation overlap depends on the relative magnitudes of communication and computation time, which vary dramatically across system configurations.

Consider an 8-billion-parameter model trained on 8 H100 GPUs within a single node connected by NVLink at 900 GB/s aggregate bidirectional bandwidth (450 GB/s per direction). Assume data-parallel replicas with optimizer state offloaded so that each device can hold its weights, gradients, and activation working set. The timing window below includes forward, backward, and gradient synchronization only; optimizer updates and offload transfers require additional accounting. The gradient tensor contains 16.1 GB of FP16 values. Per the ring AllReduce analysis in section 8, synchronization transfers $2 \times (N-1)/N = 1.75\times$ the gradient volume, taking approximately 62.5 ms at NVLink bandwidth. The forward pass computation takes 83.1 ms and the backward pass computation (at 40 percent MFU) takes approximately 166.3 ms.

Without overlap, the modeled timing window requires 311.9 ms (83.1 ms + 166.3 ms + 62.5 ms). Under ideal overlap, with gradient buckets ready early enough and no resource interference, the AllReduce is fully hidden behind the backward pass, reducing that window to 249.4 ms (83.1 ms + 166.3 ms), a 1.25× improvement. Sufficient independent backward work provides the time in which communication can be hidden. The separate normalized scenario in figure 0.117 holds computation at 100 units while increasing assumed communication cost as GPU count rises from 8 to 1,024. Its hidden fraction falls from roughly 90 percent to roughly 18 percent, and the exposed communication makes the modeled window roughly five times longer. These are constructed operating points, and the payload need not grow for the window to close. Slower effective communication, whether from topology, contention, or a lower-bandwidth link such as PCIe Gen5 at 64 GB/s per direction instead of NVLink at 450 GB/s, can exhaust the overlap window even when the payload is unchanged.

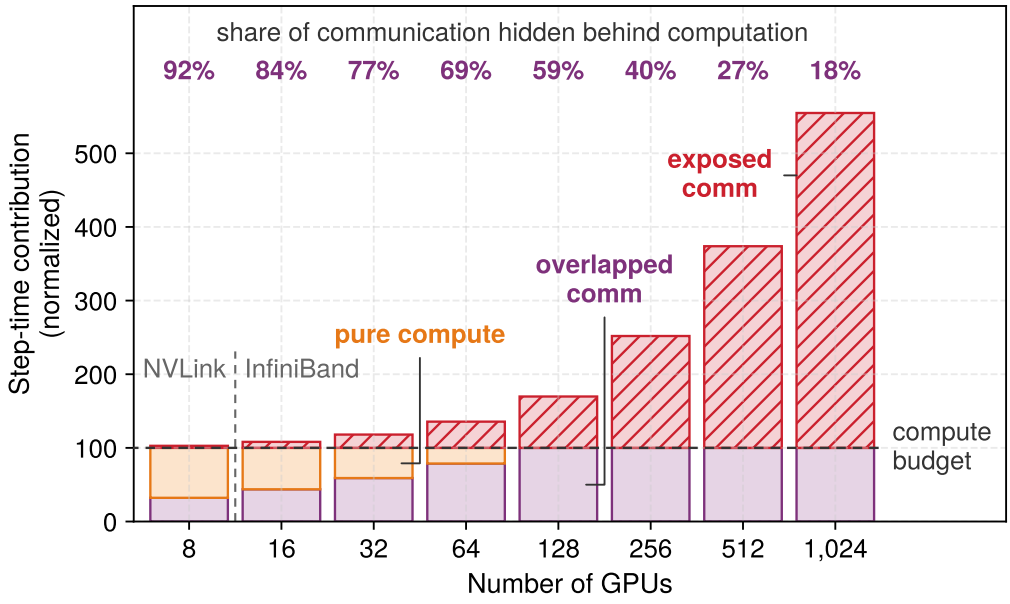


Figure 0.117: The overlap budget: This illustrative normalized scenario holds the computation budget at 100 units as GPU count increases from 8 to 1,024. Communication overhead grows with scale, leaving more communication exposed above the fixed compute budget. The row of percentages above the bars reports the fraction of communication hidden behind computation, which falls from roughly 90 percent to roughly 18 percent.

CUDA streams and asynchronous execution

The mechanism enabling overlap on NVIDIA GPUs is CUDA streams. A CUDA stream is an ordered sequence of GPU operations (kernel launches, memory copies, NCCL collectives) that execute sequentially within the stream but can execute concurrently with operations in other streams. The application maintains two distinct streams: a compute stream for matrix multiplications and element-wise kernels, and a communication stream for NCCL operations. The workflow proceeds by launching a compute kernel on the first stream and immediately triggering an asynchronous communication call on the second:

```
compute_stream = torch.cuda.Stream()
comm_stream = torch.cuda.Stream()
producer_stream = torch.cuda.current_stream()
# Inputs are ready on producer_stream; gradients do not alias A or B.
compute_stream.wait_stream(producer_stream)
comm_stream.wait_stream(producer_stream)
A.record_stream(compute_stream)
B.record_stream(compute_stream)
gradients.record_stream(comm_stream)

with torch.cuda.stream(compute_stream):
    output = torch.matmul(A, B)  # Non-blocking compute

with torch.cuda.stream(comm_stream):
    work = dist.all_reduce(gradients, async_op=True)
    work.wait()  # Establish completion on the current communication stream

torch.cuda.synchronize()  # Wait for both to complete
```

Separate streams make concurrent execution possible, but do not reserve independent hardware resources. A GEMM and an NCCL operation can compete for SM execution capacity, memory bandwidth, and cache while the interconnect carries data. Their allocation across SMs depends on the kernels, collective implementation, and launch configuration. A fixed count of communication blocks therefore does not imply an equal fractional loss of compute throughput. Engineers must evaluate any slowdown in concurrent computation against the communication time removed from the critical path; temporal overlap on a timeline alone does not establish a net speedup.

Effective overlap requires both timely submission and correct dependencies. For data-parallel training, DDP's bucketed gradient reduction already provides both, launching each ready bucket's AllReduce in a consistent order across ranks while later backward kernels run. Code that schedules collectives on its own streams must provide the same guarantees explicitly.

Custom side streams require explicit reasoning about readiness and storage lifetime. PyTorch enqueues operations on the current stream, which is the default stream unless another has been selected. A producer-consumer dependency can be enforced with `event.record()` / `event.wait()` or an appropriate stream wait; without that ordering, a consumer may read an unfinished tensor. For copies, `non_blocking=True` can avoid a host-side wait where supported, but does not by itself guarantee device-side overlap. Memory type, transfer direction, and dependencies still matter. An explicit `record_event()` can mark producer completion, while allocator stream tracking or equivalent lifetime management prevents storage reuse before side-stream consumers finish. Readiness and lifetime are separate obligations, and both must hold before interpreting the timing as a valid optimization.

Fusion, precision, compilation, speculative decoding, MoE, and communication overlap each predict a different change in the execution trace. A shorter kernel, fewer bytes, or overlapping streams counts as an improvement only if the end-to-end measurement confirms useful work completed sooner under the same constraints. The optimization playbook combines these mechanisms into experiments ordered by the bottleneck that the current trace exposes.

Optimization Playbook for Large Language Models

Consider an unoptimized 70-billion parameter PyTorch model deployed to serve interactive requests under a strict per-token latency objective. The optimization sequence begins with baseline end-to-end

measurement, followed by roofline classification to isolate the primary bottleneck. A memory-bound decode path and a launch-bound path require different initial interventions. The playbook therefore orders experiments by the exposed time each can remove, with a new measurement after every change; the worked deployment below illustrates one such sequence.

The diagnostic sequence

Optimization begins by measuring the whole workload before touching individual kernels. End-to-end throughput, an Nsight Systems trace, and MFU from section 2 identify where execution falls short of its target. Roofline placement then estimates the compute and bandwidth limits for dominant kernels, while counters and dependency traces test which cost is exposed. For memory-bound, compute-bound, and communication-bound workloads, table 0.91 maps the diagnosis to candidate interventions. The engineer selects an intervention targeting the measured limiter, applies it, and reprofiles before attempting subsequent optimizations; classifying a system by generic workload category without trace evidence risks optimizing an unexposed cost.

Table 0.91: Optimization paths by primary bottleneck: Diagnostic map from bottleneck class to candidate interventions. Apply one change, validate its result, and reprofile before selecting another.

Primary bottleneck	Typical setting	Candidate interventions
Memory-bound	Inference, especially token decode	Reduce precision to raise effective bandwidth; fuse operators to eliminate intermediate HBM traffic; compile the graph to expose fusion opportunities; consider an algorithmic change only when its workload and quality trade-offs fit the diagnosis.
Compute-bound	Prefill, large-batch decode, and large-batch training	Ensure Tensor Cores are in use; apply graph compilation for kernel selection and memory planning; consider FP8 for 2× compute throughput; overlap communication so compute does not idle.
Communication-bound	Tensor-parallel replicas and distributed training at scale	Overlap tensor-parallel collectives with independent work, and gradient communication with the backward pass; compress gradients or use reduced-precision communication; restructure pipeline schedules so stage-to-stage communication is hidden under useful compute; use topology-aware placement to minimize cross-node traffic.

The order matters. The triage of figure 0.108 screens data-loading stalls, host preprocessing, and communication overhead before it classifies kernel regimes, because a kernel intervention cannot help an accelerator that is waiting for work. The diagnostic sequence then closes by applying and verifying the selected intervention: implement the highest-impact optimization, reprofile, confirm the improvement, and restart from roofline classification with the new profile, since the bottleneck may have shifted.

Combining techniques

Production systems combine techniques because no single intervention covers every term in the iron law. An optimized language-model kernel path may combine tiled attention, lower-precision weight or cache representations, graph compilation, and replay. The durable question is which intervention changes measured bytes, operations, or launch time at the active bottleneck; named frameworks are implementations of those mechanisms rather than the organizing principle.

The serving layer adds admission, cache-state, routing, batching, and SLO controls. This chapter retains only their physical inputs: how batch and sequence shape change arithmetic intensity, how speculative verification changes exposed work, and how precision or kernel structure changes memory capacity and execution time. The distinction prevents a favorable local kernel result from being mistaken for a serving-policy result at a named offered load.

The speedups from these techniques are not additive; they interact in ways that demand careful sequencing. For instance, INT4 reduces the weight payload relative to FP16 by 4× before metadata, while leaving other traffic unchanged. That reduction may shift weight-dominated execution toward a compute limit. Further cache compression could still help capacity or attention traffic, but its latency benefit must be measured at the new operating point. The profile-optimize-verify loop is essential because each intervention changes which cost remains exposed.

The interaction between optimizations creates a dependency graph that the performance engineer must navigate. Some combinations are synergistic: tiled attention removes intermediates, and lower-precision cache storage frees memory for larger batches. Other combinations overlap: a compiler mode may already use graph capture for eligible regions, so an additional capture layer may save little while complicating memory management. Still other combinations conflict: speculative decoding often benefits low-batch, memory-bound decode, whereas larger batches consume the compute headroom that makes verification inexpensive. Only an end-to-end measurement under the contract in table 0.88 can classify a combination as synergistic, redundant, or conflicting for the target workload.

A practical heuristic is to try a low-cost intervention that addresses the measured bottleneck before adding new algorithmic machinery. In the batch-one 70B scenario that follows, precision comes first because the weight-reading GEMM interval is the largest item in the budget. When stable-shape execution instead exposes launch overhead, `torch.compile` is a candidate; when weight capacity or traffic dominates, INT4 or FP8 weights may address the limit. Calibration prepares the representation, while held-out evaluation establishes whether its output quality is acceptable. FlashAttention-family kernels target attention traffic when they support the model's attention variant and precision. INT8 cache entries halve the FP16 cache payload before metadata, potentially admitting larger batches. Speculative decoding is another candidate when verification can use spare compute, with added costs for drafting and serving integration. Implementation effort varies with the existing stack, so this sequence is a hypothesis to test rather than a universal ranking.

This candidate sequence favors lower implementation cost when multiple interventions address the same bottleneck. A measured capacity or bandwidth limit takes precedence over that convenience, and reprofiling can change the order or eliminate a later step entirely.

Checkpoint 9.3: Optimization strategy

Test the ability to design an optimization plan:

- ☐ **Top optimizations**: given an LLM serving workload at batch size 1 that achieves 25 percent of peak bandwidth, identify the additional trace evidence needed to choose among precision reduction, fusion, and launch-overhead reduction.
- ☐ **FP8 on comm-bound**: explain why faster FP8 arithmetic alone may leave the dominant communication cost unchanged, and identify when reducing communication payload precision would change that conclusion.
- ☐ **Profiling workflow**: describe the iterative profiling workflow and explain why verifying each optimization is as important as applying it.
- ☐ **Compile pitfalls**: identify a scenario where applying `torch.compile` would degrade performance.

Optimization of a 70B LLM serving pipeline

Consider a 70B-parameter model on a node of eight H100 GPUs connected by NVLink. This constructed example illustrates budget accounting, not benchmark results. The scenario assumes batch size one, a fixed context length, and a decode step that emits one token. All intervals are exposed, nonoverlapping contributions on the same request critical path. The illustrative objective is a decode step below 50 ms; prefill latency, quality, and loaded throughput require separate measurements before deployment.

Baseline measurement

The deployment uses FP16 weights and tensor parallelism across 8 GPUs. Its weights occupy 140 GB, or approximately 17.5 GB per GPU. The maximum batch size also depends on cache capacity and serving policy; it cannot be inferred from weight storage alone.

The assumed baseline decode budget is 85 ms, about 16× the bandwidth-only step of 5.2 ms computed in notebook 9.1. That gap, not the weight-streaming floor, is what eager dispatch, unfused kernels, and exposed synchronization must explain; the intervals below apportion the whole budget

among those causes. The budget assumes a runtime that already hides part of host submission behind running kernels, so its exposed launch and runtime interval of 10.2 ms sits below the 12–24 ms that one-kernel-at-a-time submission would cost per forward pass (section 2). Table 0.92 keeps every round on that same absolute-time boundary. In an actual Nsight Systems trace, overlapping work must not be counted twice when constructing this budget.

Table 0.92: Constructed decode budget: Assumed nonoverlapping critical-path intervals for one request. Each column sums to its decode-step duration; none is an empirical performance claim.

Exposed interval (ms)	Baseline	After precision	After fusion and replay
GEMM	34	18.7	18.7
Attention	20.4	20.4	15.3
Element-wise operations	10.2	10.2	3.4
AllReduce	10.2	10.2	10.2
Launch and runtime overhead	10.2	10.2	2
Total	**85**	**69.7**	**49.6**

Round 1: Precision engineering

The first experiment targets weight-read traffic. INT4 quantization reduces the raw weight representation relative to FP16, although scale metadata, dequantization, and kernel choice affect runtime. Assume that quality validation succeeds and that exposed GEMM time falls by 45 percent, with all other intervals unchanged. The resulting step takes 69.7 ms, still above the objective. A large local reduction has removed only the corresponding fraction of the baseline's GEMM interval.

INT8 KV cache compression is a separate candidate. The capacity calculation in section 4 estimates its storage benefit, but that benefit does not establish an attention speedup. Applying it requires another quality check and a new profile; the first-round column grants it no unmeasured latency benefit.

Round 2: Fusion, fused decode attention, and graph replay

The second experiment targets exposed attention, element-wise work, and launch gaps. Assume a validated fused decode-attention kernel, the single-pass kernel over the KV cache described in section 2 rather than prefill-style tiling, reduces the attention interval by 25 percent, fusion reduces element-wise work to 3.4 ms, and graph replay reduces launch and runtime overhead to 2 ms. These are scenario assumptions, not guaranteed effects of any kernel library or of `torch.compile`. In practice, each intervention would be tested separately before the combined configuration is retained.

The total becomes 49.6 ms, meeting the illustrative batch-one decode objective while still sitting about 9× above the bandwidth-only floor, so the objective is met with most of the original gap still in place. Communication remains 10.2 ms, unchanged in absolute time even though its share of the shorter step grows. Spread across the 160 AllReduces of an 80-layer step, that interval implies about 64 µs of exposed time per collective, against roughly 5 µs of launch and transfer in the estimate of section 6, or about 0.8 ms per step. That estimate covered only launch and transfer, leaving out the protocol and synchronization costs it flagged for measurement; in this constructed budget, those unmeasured costs account for the difference. A trace that attributed them would make communication the next experiment. Communication's larger share of the step reflects the shorter total, not slower collectives. This result says nothing yet about time to first token or throughput under concurrent arrivals.

Round 3: Speculative decoding

Speculation offers a different way to amortize target-model execution. Assume a draft model proposes $K = 5$ tokens in 4 ms, target verification takes the round-two decode duration, and each candidate is independently accepted with probability $\alpha_{\text{acc}} = 0.78$. Verification cost and acceptance are workload assumptions that must be measured for a real draft/target pair.

Applying equation 0.35, the scenario emits 3.52 tokens per round on average. Dividing draft-plus-verification time by that expectation gives 15.22 ms per emitted token, an amortized 3.26-fold improvement over the round-two duration. Tokens arrive in blocks; this average does not establish the longest visible pause or an inter-token latency percentile.

The gain belongs to batch one. Larger batches consume the spare compute that made verification cheap, and locating the batch size at which speculation stops paying requires measuring the same budget at several batch sizes, the measurement the speculative-decoding pitfall in section 6 calls for.

Case study synthesis

The budget exposes bottleneck displacement without attributing a system improvement to an isolated kernel speedup. Precision changes one interval; fusion and replay change others; speculation changes the amount of output per round. Their benefits must be composed on a shared accounting boundary, with quality preserved.

This sequence produces candidate execution configurations for the serving fleet. To accept one for production, the engineer must replace the illustrative intervals with measurements, preserve the request-length distribution and offered load, and verify latency and completed throughput together. Memory capacity can permit a larger batch, but neither that capacity nor a faster batch-one path demonstrates that the service meets every objective simultaneously.

Fallacies and Pitfalls

An engineering team upgrades an inference cluster from A100 GPUs to H100 GPUs, expecting a 3× latency reduction based on peak arithmetic specifications, only to find that small-batch decode accelerates merely by the ratio of the two memory bandwidths. The trap is pervasive: assuming that peak arithmetic throughput dictates inference latency when the workload is bound by memory bandwidth.

Fallacy: *More FLOP/s means faster inference.*

Weight-dominated, small-batch decode often has a memory-bandwidth limit. A GPU with 2× the peak FLOP/s and unchanged memory bandwidth leaves that roofline bound unchanged. Actual inference performance also depends on achieved bandwidth, cache behavior, kernel efficiency, launch overhead, and communication. Equal advertised bandwidth therefore does not guarantee equal throughput, just as higher peak FLOP/s does not guarantee faster decode. Hardware comparisons must use the intended workload and its measured bottleneck.

Pitfall: *Planning FP8 adoption as an automatic training-time halving.*

On the chapter's H100 example, FP8 offers twice the FP16 peak arithmetic rate and halves the payload of values converted from FP16. Those are opportunities, not a prediction that the full training step becomes twice as fast. Conversion and scaling add work, some tensors retain higher precision, and launch or communication costs may remain exposed. A communication-bound step can still benefit from shorter exposed computation, but its unchanged communication floor limits the gain. The trace must establish which intervals the precision change actually shortens.

Fallacy: *The largest kernel is the whole performance problem.*

The profiler detective in Example 9.1 illustrates this pitfall. Engineers naturally focus on the single largest kernel, which is often the GEMM in a transformer layer. When the GEMM is already near-optimal, however, the remaining performance budget is distributed across dozens of smaller operations: normalization, activation, attention scoring, KV cache management, and kernel launch overhead. Collectively, these "small" operations can consume more than half of total execution time. Graph compilation and systematic fusion address this long tail more effectively than further GEMM optimization.

Pitfall: *Applying speculative decoding without considering batch dynamics.*

Speculative decoding can reduce latency in a measured low-batch, memory-bound regime when the draft model is cheap, its proposals achieve a high acceptance rate, and the target has spare compute for batched verification. Verification is never free; its exposed cost depends on draft length, acceptance, batch and sequence distributions, and the target kernel's operating point. As batching

consumes compute headroom, the same configuration can cross from a gain to a loss, while variable accepted lengths introduce additional scheduler work. This chapter establishes how to measure that crossover for a fixed workload and machine; applying the resulting curve under changing offered load and service objectives is a matter of admission policy.

Fallacy: *MoE expert count is a free scaling knob.*

Increasing the number of experts in an MoE model can increase total parameters without proportionally increasing active per-token arithmetic, which resembles a free scaling knob. More experts still increase parameter memory and placement pressure, and a distributed placement exposes dispatch and combine communication. The realized cost depends on experts selected per token, token-to-expert skew, expert capacity, topology, and batching; no universal expert-count threshold determines when the design loses. The optimization is justified only when a matched-quality comparison shows that active-compute savings exceed routing, imbalance, and communication costs over the intended workload envelope.

Pitfall: *Using graph compilers as a substitute for kernel analysis.*

Graph compilers remain limited by their implemented transformations, cost models, and fusion heuristics. FlashAttention illustrates why an engineer must understand the algorithm and memory hierarchy even when a compiler generates the final kernels. Speculative decoding and MoE routing likewise introduce choices about verification, quality, and communication that ordinary fusion does not settle. Inspecting generated execution and evaluating those choices remain necessary; successful compilation alone does not establish that the workload is well optimized.

Fallacy: *The lowest supported precision is always the best precision.*

Aggressive quantization (INT4 weights, INT4 KV cache, FP8 activations) can degrade model quality in ways that are difficult to detect with standard benchmarks but visible to users. Perplexity on a held-out dataset may change by less than 1 percent, but the model may produce subtly worse responses for edge cases, rare languages, or complex reasoning tasks. The disciplined approach is targeted quantization: evaluating per-layer sensitivity under representative workloads and restricting lower bit-widths to robust tensors. KV caches, intermediate activations, endpoint layers, and attention logits all require empirical evaluation rather than a speculative sensitivity ranking. Calibration on a representative dataset, followed by evaluation on diverse quality benchmarks, is essential before deploying any quantized model to production.

Pitfall: *Measuring throughput without measuring quality.*

A model serving system that generates 200 tokens/second is not twice as good as one generating 100 tokens/second if the first system achieves that throughput by using INT4 quantization that degrades answer quality by 15 percent. Performance metrics must always be reported alongside quality metrics. The correct optimization target is the Pareto frontier of throughput vs. quality, not throughput alone.

Fallacy: *A single profiling run is sufficient to characterize performance.*

ML system performance can change over time. Thermal or power limits can reduce sustained clock speeds, changing allocation patterns can increase memory fragmentation, and cluster traffic can alter network contention. These effects are workload- and configuration-dependent rather than inevitable penalties of a fixed size. Cold-start behavior also differs from warmed execution. Reliable characterization measures the relevant phases separately and samples sustained operation often enough to capture variability that affects the service or training objective.

Pitfall: *Optimizing for average case while ignoring tail latency.*

A serving system might report mean inter-token latency of 30 ms and p99 inter-token latency of 500 ms over the same measurement window and request mix. The mean hides the slow intervals, while p99 describes a percentile rather than a worst-case bound. Traces should test whether those intervals arise from host pauses, allocation stalls, collective delays, or queueing. Preallocated buffers, graph replay, or scheduling changes help only when they address the observed cause. Measure the resulting latency distribution at the same offered load and verify that improving one request class does not make another miss its target.

Summary

Performance engineering closes the gap between a model's theoretical efficiency and its hardware implementation by systematically optimizing the terms of the single-machine iron law (equation 0.33), which governs total execution time T by data movement (D_{vol}/BW), compute execution ($O/(R_{\text{peak}} \cdot \eta_{\text{hw}})$), and the overhead term (L_{lat}). On modern accelerators like the NVIDIA H100, where the FP16 ridge point of the roofline model sits at 295 FLOP/byte, small-batch autoregressive decode is often bound by the memory wall (D_{vol}/BW).

Fusion and precision act on data movement (D_{vol}/BW) through different mechanisms. Operator fusion avoids intermediate HBM transfers, while FlashAttention tiles attention into SRAM without materializing the quadratic $\mathcal{O}(S^2)$ score and probability matrices. Its persistent workspace grows as $\mathcal{O}(S)$, but actual HBM traffic includes tile reloads. The simplified 8K sequence example gives a 65× traffic ratio under its idealized accounting assumptions. Lower-precision weights and cache state reduce payload size D_{vol} and can expand feasible batch capacity.

The two parts of the overhead term (L_{lat}) call for different interventions. For host dispatch, graph compilers fuse eligible operations and plan memory, while CUDA Graphs amortize host submission for stable captured regions. Exposed communication, which the Fleet Law separates as $T_{\text{comm}}(N)$, shrinks through communication-computation overlap only when independent work is ready and resource interference does not erase the gain.

Algorithmic transformations change the work itself, and which term they shrink depends on the regime. Speculative decoding obtains multiple emitted tokens from one target-model verification pass, amortizing one weight stream over several tokens and so shrinking the data term per emitted token in memory-bound decode. Mixture-of-experts routing limits active per-token FLOPs O while expanding parameter capacity, shrinking the compute term in batched execution and the weight bytes read in batch-one decode. Their benefit depends on whether draft work, routing, communication, and imbalance cost less than the work they remove.

The case study in section 6 combines these mechanisms as a sequence of hypotheses, each requiring a new profile. Precision savings can enable larger batches, which change arithmetic intensity and the opportunity for speculation. The useful result is a measured execution envelope at a stated workload and quality level; separate low-batch latency and batched-throughput measurements do not establish simultaneous service-objective compliance. That envelope, a replica's measured capacity at a stated workload mix and latency target, is also the quantity the fleet orchestrator uses to size and place serving replicas.

In the Fleet Law's terms (equation 0.3), the unsharded local-execution reference T_{compute} includes data movement, computation, and host dispatch. Fusion, precision, compilation, and algorithmic change shorten the distributed local-execution term T_{compute}/N, while communication-computation overlap enlarges T_{overlap}. The chapter therefore spends its effort on the Compute (C_1) axis and its co-design boundary with Communication, and those gains reach the fleet only when the Communication and Coordination terms do not absorb them.

↩ The serving replica's measured capacity as the fleet orchestrator's unit of placement is established in section 15.

Key Takeaways: Match the software to the silicon

- **Bytes often bind small-batch decode**: The chapter's weight-streaming example sits below the FP16 ridge point of 295 FLOP/byte. Larger batches and prefill can change that regime, so the active workload determines whether reducing HBM traffic or improving compute execution helps.
- **Locality and replay address different costs**: Operator fusion and FlashAttention avoid intermediate transfers; CUDA Graphs reduce repeated host submission. The 8K attention example gives a 65× ratio under simplified traffic assumptions, while actual traffic and speedup depend on the implementation.
- **Precision buys bandwidth with risk**: FP8, INT8, and INT4 increase effective bandwidth and batch capacity only when outliers, scale factors, and quality checks are managed. Quantization is a systems contract between numerical format, kernel implementation, serving memory, and acceptable model behavior.

- **Algorithms change the workload's operating point**: Speculative decoding and mixture-of-experts change the work performed per emitted token, but add draft, routing, AllToAll, and load-balancing costs. Savings count only when useful work completes sooner under the same quality and service constraints.
- **Reprofiling tests whether gains survive**: Bottleneck displacement makes each optimization a new experiment. Compare the same workload, timing boundary, quality criterion, and offered load before and after a change; kernel gains become fleet gains only when the complete execution path improves.

Hardware is sold by its theoretical peak (R_{peak}) but paid for by the sustained throughput it achieves under memory bandwidth (BW) and software overhead (L_{lat}) constraints. The chapter turned the autoregressive bottleneck (principle 15) from a statement about weight streaming into a budget, in which batch-one decode has a bandwidth-only floor and the distance between a measured step and that floor is what dispatch, unfused kernels, and exposed communication must explain. The case study also showed the displacement of overhead (principle 13) inside a single replica, since shortening the compute intervals left the AllReduce time unchanged and enlarged its share of the step.


The working rule is to place a step against its floor before choosing a lever, then to measure again after each change, because the next limiter is often the cost that the last optimization left untouched. The hardware sets the ceiling; that loop of measurement and correction determines how closely production software approaches it.

What's Next: From execution limits to serving policy

The measured execution envelope gives a serving controller the cost and capacity of each replica it can deploy. Serving runs for a model version's whole operational lifetime, so that per-replica cost recurs with every request, and at high traffic it can outgrow the one-time cost of training (principle 16). The controller still must decide which requests to admit, where to route them, how much cache state to retain, and when to change batch size or add replicas as offered load varies. Those decisions determine whether gains from fusion, precision, compilation, and speculation become useful fleet throughput while preserving service objectives.

↪ Fleet-scale serving policies, cache retention, and SLO protection are developed in chapter 6.

Inference at Scale

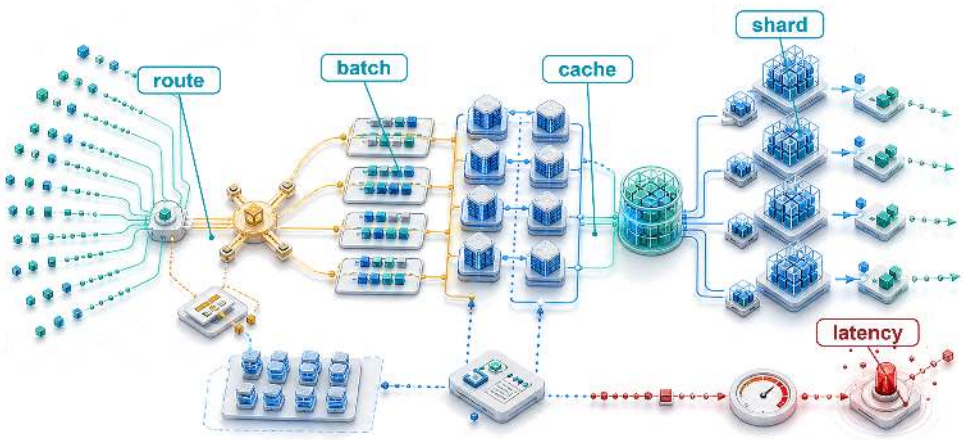

Purpose

Why can lifetime inference cost dwarf training cost?

Training is paid for each model version; serving continues throughout that version's operational lifetime. A model trained for millions of dollars may serve billions of requests, each consuming compute, memory, network, and energy. At high traffic, recurring inference expense can exceed the original training cost by orders of magnitude. Milliseconds of latency and small differences in accelerator utilization then compound across the service's lifetime. A fast prediction measured on an otherwise idle machine does not reveal how the same model behaves when requests arrive together, vary in length, and compete for memory. Work can spend longer waiting than executing, while an apparently busy fleet produces responses that arrive too late to be useful. Keeping extra machines ready protects response time but incurs cost during quiet periods; admitting more work improves utilization only while the service can still meet its promises. Failures sharpen this tension because displaced requests consume the spare capacity intended to absorb demand changes. Continuing to accept work during overload can worsen the shortage when delayed requests trigger retries that compete for capacity. The engineering decision is therefore how much useful work the fleet can sustain at an acceptable cost while preserving response quality and timeliness. The answer depends on the request mix and service requirements, so a gain for one workload may become a loss for another. In C^3 terms, compute reuse must pay for communication and coordination without exhausting the user's latency budget.

Learning Objectives

- Estimate lifetime serving cost from traffic volume, deployment duration, and measured per-request cost
- Select batching, scheduling, and per-request compute-budget policies for vision, LLM, recommender, and streaming workloads
- Analyze attention-cache capacity, fragmentation, and decode-time policies under workload-dependent serving constraints
- Compare sharding, disaggregation, and quantized serving designs using communication, memory, and quality constraints
- Evaluate routing, load balancing, and isolation controls against tail latency and noisy-neighbor risks
- Design autoscaling and multi-region routing policies that balance cold starts, cost, and SLO compliance
- Synthesize serving architectures that manage C^3 trade-offs across request, replica, service, and platform layers

The Economics and Architecture of Inference

IMAGINE a language model that costs $5 million to train over two months. Once deployed to a global user base serving thousands of queries per second, that same model can consume $5 million in inference compute every week. Inference is no longer a temporary batch job. It is a continuous, latency-sensitive service.

Performance engineering ends with a measured execution envelope, the cost and deliverable capacity of one replica once operator fusion, precision engineering, and graph compilation have done their work. Serving policy determines how that execution capacity is shared under externally arriving work. A faster forward pass supplies a better service rate, but it does not determine how long requests wait to join a batch, which replica receives them, which requests receive scarce cache space, or when the fleet needs another replica. These decisions connect the local execution toolkit to user-visible performance under load.

↩ The replica's measured execution envelope, and the fusion, precision, compilation, and speculation levers that shape it, are established in chapter 17.

The service contract makes that distinction measurable. Offered load is the work arriving at the endpoint, including requests the service may reject; admitted load is the work it accepts. A service-level objective (SLO) specifies the required outcome over a measurement window, such as a latency percentile or successful-request fraction. For language models, request rate alone is insufficient because prompt and output lengths determine different amounts of work. Capacity comparisons must therefore hold the request mix and SLO fixed while measuring how much offered work completes successfully within the targets.

An admitted request passes through routing, preprocessing, queueing, batch formation, model execution, and response delivery. Figure 0.118 traces this traversal across the host CPU and accelerator boundaries: the host manages admission, tokenization, and detokenization, while the GPU executes the prompt prefill pass and iterative KV-cache decode loop, mapping noncompute serving overhead against the time-to-first-token (TTFT) and time-per-output-token (TPOT, the average gap between streamed tokens) latency budgets. For an autoregressive model, prefill processes the prompt and builds cached attention keys and values; decode extends that KV cache as it generates subsequent tokens. Waiting before prefill delays the first token, while competition during decode delays the stream. The scheduler must budget both delays alongside execution time. Batching and cache management govern work within a replica, sharding changes the replica's capacity, and routing and autoscaling distribute demand across replicas.

↩ The prefill-decode decomposition, with prefill's high arithmetic intensity and decode's weight-streaming regime, is established in section 2.

Distribution adds placement and coordination decisions to the local serving problem. Load balancing[1] must distribute requests across replicas with different amounts of unfinished work and available memory. Request routing must also account for model-specific characteristics: recommendation systems with large sharded embedding tables require different placement strategies than language models that generate responses token by token. When demand changes faster than new

[1] **Load balancing for inference**: Request service times can span milliseconds to tens of seconds as models, prompt lengths, and generated outputs vary. Queue-aware routing exposes that remaining work more directly than assignment counts alone.

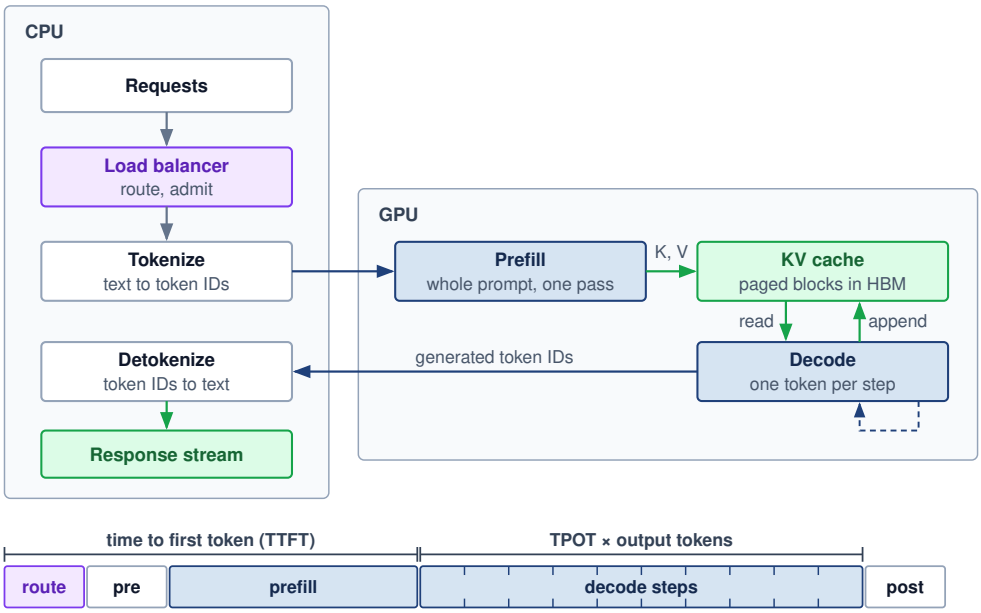


Figure 0.118: End-to-end inference pipeline: One language-model request crosses between CPU and GPU twice. The load balancer routes and admits it and the CPU tokenizes it; prefill then processes the whole prompt in one pass and writes its keys and values to the KV cache, and decode reads and appends that cache one token per step before the CPU detokenizes the stream. The strip orders one request's latency, with illustrative segment widths. Everything up to the end of prefill counts against time to first token, and the routing and CPU segments are serving-tax work that spends latency budget outside GPU compute.

replicas can become ready, routing alone cannot restore capacity. Autoscaling, spare capacity, and admission limits must work together to protect the service's latency targets.

Training and serving place costs on different timelines. A model version's training expense can be amortized over its deployment, while serving capacity must follow recurring demand. An e-commerce recommendation service, for example, must accommodate peak shopping traffic without paying for an unnecessarily large idle fleet during quiet periods. Both training efficiency and serving efficiency matter, but the serving decision must also account for when requests arrive and how long they can wait. Building such a service requires three linked decisions: when distribution becomes necessary, how the architecture meets latency targets under varying load, and how resource utilization stays high enough that serving cost does not erode the value the model creates. The worked scenarios that follow size these decisions with stated inputs: registry values for real hardware and models, and labeled scenario assumptions for traffic, prices, and latency budgets. They show how a mechanism scales, not what any named deployment measured.

Limits of Single-Machine Serving

Memory, throughput, and latency limits motivate different forms of distribution. Exceeding one device's capacity may require several devices within one machine; crossing the machine boundary adds network costs. Table 0.93 categorizes these constraints and candidate strategies, whose necessity depends on the permitted precision, placement, and service contract.

The first signal is memory exhaustion, which occurs when model parameters, key-value caches, or embedding tables exceed single-device capacity. A single NVIDIA H100 GPU provides 80 GB of HBM3[2] memory; section 4 records the provenance of this capacity figure and the other canonical hardware constants used throughout the analysis that follows. For an illustrative mixture-of-experts model with ~1.8T parameters, FP16 weights alone require ~3.5 TB. Keeping all those weights resident on accelerators requires multiple devices regardless of request volume; quantization and offloading change that placement constraint. Recommendation systems with trillion-parameter embedding

2 **HBM3 capacity and bandwidth**: The H100 combines 80 GB of 3D-stacked DRAM with 3.35 TB/s of bandwidth, compared with 2.04 TB/s for HBM2e on the A100. Capacity determines whether model and cache state fit; bandwidth bounds memory-bound decode throughput.

tables face similar constraints: Meta's DLRM architecture[3] stores embedding tables that require multiple terabytes of memory.

Beyond memory constraints, throughput limitations emerge when request volume exceeds single-machine capacity even with optimal batching. Consider a recommendation system serving 100,000 queries per second with a 10 ms latency budget. If single-machine throughput peaks at 10,000 QPS, no amount of optimization on that machine can satisfy demand. Horizontal scaling across multiple replicas becomes mandatory.

Finally, latency requirements can motivate distribution even when memory is sufficient. A 70-billion parameter model requires approximately 140 GB of weight memory in FP16, exceeding a single 80 GB H100-class GPU before KV cache is considered. Quantization or larger-memory hardware can make a single-device configuration feasible, yet its execution time may still exceed the request budget. Sharding the model across multiple GPUs can divide computation and weight traffic, but it adds communication and synchronization. Because sharding shortens compute-bound prefill and bandwidth-bound decode by different amounts, the latency benefit must be measured for each phase against its own target.

[3] **DLRM (Deep Learning Recommendation Model)**: Meta's 2019 reference architecture combines dense features processed by multilayer perceptrons (MLPs) with sparse features represented by embedding lookups (Naumov et al. 2019). This separation permits different placement strategies; it does not require embeddings on CPUs and MLPs on GPUs. Production recommendation characterizations show why this structure matters for serving: embedding-heavy recommendation models create memory-access and capacity constraints that differ from dense convolutional neural network (CNN), recurrent neural network (RNN), or large language model (LLM) inference (Gupta et al. 2020).

Table 0.93: Triggers for distributed inference: Each constraint type indicates different distribution strategies. Memory constraints require model sharding; throughput constraints require replication; latency constraints may require either depending on whether the bottleneck is compute or memory bandwidth.

Constraint	Single-Machine Limit	Example Workload	Distribution Strategy
Memory	80 GB (H100)	Illustrative MoE (~3.5 TB FP16)	Tensor/pipeline parallelism
Throughput	~10K QPS (vision)	100K QPS RecSys	Horizontal replication
Latency	Forward pass > SLO	500 ms LLM TTFT	Model sharding

Memory, throughput, and latency triggers all become user-visible once an interactive endpoint starts streaming. Time to first token (TTFT) determines when the user sees a response begin, while time per output token (TPOT) determines whether the rest of the response arrives at a readable pace. TPOT is the average of the time between tokens (TBT), the gap between successive streamed tokens, which is the per-gap quantity chapter 17 called inter-token latency (ITL). A stream can meet its TPOT target while a single long TBT gap still stalls the reader, so this chapter states average cadence as TPOT and per-gap tail targets as TBT. Protecting both first-token delay and stream cadence is why inference reverses many of the optimization priorities from training.

Checkpoint 10.1: Distribution strategy selection

Verify your understanding of when to move from single-machine to distributed inference:

- ☐ **Shard vs. replicate**: for a 13B model (26 GB weights) that fits on a single A100, select model sharding or horizontal replication when throughput requirements double.
- ☐ **Latency floor**: for a real-time speech-to-text service where TBT is the primary bottleneck, determine whether data-parallel replication reduces this latency.
- ☐ **Mandatory sharding**: explain why a 175B model requires multiple 80 GB GPUs when all FP16 weights must remain accelerator-resident, regardless of request volume.
- ☐ **Latency trigger**: identify when a latency target forces distribution and when added network, serialization, coordination, or queuing overhead can erase the benefit.

Training Versus Inference Fundamental Inversion

The contrast between training and inference centers on the unit of useful progress. Training evaluates throughput together with convergence over a run; interactive serving evaluates completed requests against quality and latency targets. Offline inference can also prioritize throughput, while training still loses progress to stragglers and stalls. The distinction is therefore which delays violate the

workload's contract, not whether one activity cares about time and the other does not. Table 0.94 summarizes the priorities of long-running training and interactive serving across six system aspects.

Table 0.94: Training vs. inference system requirements: The fundamental inversion from throughput to latency optimization ripples through system design, state management, batch formation, and failure recovery.

Aspect	Distributed Training	Distributed Inference
Primary metric	Throughput (samples/hour)	Latency (p99 ms)
Acceptable variance	Hours	Milliseconds
State management	Checkpoints (periodic)	Session state (continuous)
Batch formation	Large, controlled	Request-driven, variable
Failure tolerance	Restart from checkpoint	Redirect if capacity and state allow
Cost structure	Fixed duration, variable rate	Variable duration, fixed SLO

A training iteration that takes 2 seconds instead of the usual 1 second delays progress; repeated slow iterations can materially extend the run. An interactive request that takes 2 seconds against a 100-millisecond target misses its contract immediately, even if later requests finish quickly. Aggregate training progress and per-request serving deadlines expose different consequences of the same delay. The serving architecture must therefore control individual waiting times as well as total completed work.

State management differs fundamentally. Training maintains model state (parameters, optimizer states) that evolves gradually and can be captured in periodic checkpoints. Inference may maintain session state across requests, but authoritative conversation history and user context differ from derived key-value caches. The history must survive according to the service contract; a lost KV cache can be rebuilt from that history at the cost of repeated prefill. Retaining the cache across turns is a performance choice, developed in the architecture dimensions that follow.

Failure handling follows those different contracts. Training can restore a checkpoint and repeat lost work, with recovery time charged against the run's completion target. Interactive serving has less time to recover an individual request. Redirecting work to a healthy replica requires spare capacity and recoverable request state; substituting a smaller model requires an acceptable quality fallback. SLOs define which failures and delays the service may tolerate. Recovery mechanisms reduce user-visible disruption only when their added work fits within that contract.

The Serving Tax of Distributed Execution

Distributing inference adds transfers and coordination to a request that already spends time in host processing and queues. This "serving tax" is the exposed work outside model execution that consumes the request's latency budget. Its size depends on which components the request crosses and which costs can overlap.

Network communication contributes setup and transfer time at each cross-machine dependency. Synchronization between GPUs can expose that cost when the next operation needs a remote result. For an illustrative path with four sequential exchanges taking 50–500 microseconds each, the exposed contribution is 200 microseconds to 2 milliseconds. Actual collective time also depends on payload, topology, contention, and the number of communication rounds; a generic network round-trip time cannot be charged once per collective without checking its implementation.

Serialization can add host work when a service converts structured data into a wire representation and reconstructs it at the receiver. Protocol Buffers, JSON, and Python's `pickle` provide different representations and implementation paths, so their cost must be measured for the actual payload and runtime. Tensor transfers within a sharded model need not pass through the same object-serialization path as a service request. Formats such as FlatBuffers and Cap'n Proto[4] permit access to wire-format data in place, avoiding a separate unpacking step when the consumer supports that representation. They do not eliminate network transfer or every downstream copy.

Load balancing adds a routing decision and sometimes another forwarding hop. Examining request metadata, consulting replica state, and forwarding to the selected backend consume time

↩ The α-β model, which splits each transfer into a fixed startup latency plus a bandwidth-dependent term, is established in section 6.

4 **Zero-copy serialization**: Formats such as FlatBuffers and Cap'n Proto can access wire-format data in place, avoiding a separate parse-allocate-copy cycle. The benefit depends on payload size, language runtime, and whether downstream operators can consume the same buffer representation.

before execution begins. The measurement must separate decision time from waiting and transport so that a slow routing path is not mistaken for a slow model.


Coordination overhead emerges when a request fans out to several services and joins their results. Independent feature or model calls can run concurrently, but a dependent ranking stage must wait for the inputs it needs. The critical path therefore includes exposed coordination and the slowest required branch rather than the sum of every branch's runtime. Queuing delay ($L_{\text{lat,queue}}$) adds another cost whenever work arrives while the required resources are busy, even when average arrival rate remains below average service capacity.

The serving tax must be measured on the same request boundary as model execution. Equation 0.36 decomposes that latency, with each term counting an exposed contribution so concurrent work is not counted twice:

$$L_{\text{lat,total}} = L_{\text{lat,infer}} + L_{\text{lat,network}} + L_{\text{lat,serialization}} + L_{\text{lat,coordination}} + L_{\text{lat,queue}} \tag{0.36}$$

An illustrative budget shows why the decomposition matters. If an interactive request has a 100 ms target and model execution takes 70 ms on an idle replica, routing, transfers, serialization, coordination, and queueing must all fit in the remaining 30 ms; the four sequential exchanges above can already claim up to 2 ms of it before any request waits for a busy replica. The measured contribution determines the intervention. Co-location can remove a network hop, fewer dependent exchanges can reduce startup costs, and a faster link can shorten large transfers. Queueing instead requires controlling admitted work or increasing usable capacity. Each choice spends resources to recover latency budget, connecting the request-level diagnosis to lifetime serving cost.

Serving Cost Dominance in Production



At this traffic, one year of serving costs about nine times the training run.

The serving tax quantified in equation 0.36 consumes a fraction of the latency budget per request. The true economic impact of inference emerges when evaluating cost over a model's entire operational lifetime. The serving cost dominance principle (16) states that serving cost can dominate training cost by orders of magnitude because a model version incurs training expense before deployment while serving expense recurs with traffic. Both activities can consume purchased or rented infrastructure; the distinction here is expense timing, not financial capitalization. A quick cost calculation makes the multiplier concrete.

> **Napkin Math 10.1: The serving cost multiplier**
>
> **Problem**: A team has spent $2,000,000 training a 70B parameter model and now serves it to 1,000,000 daily active users, each making 50 requests/day. Is training or serving the dominant cost over 1 year?
>
> **Math**:
>
> 1. **Training Cost**: $2,000,000 (One-time).
> 2. **Metric**: Annual inference volume is 10^6 users $\times$ 50 reqs $\times$ 365 days $\approx$ 18.25B requests/year.
> 3. **Cost per Request**: Assume a 70B model on H100 costs $\approx$ $0.001/request (input + output).
> 4. **Annual Serving Cost**: 18.25B requests $\times$ $0.001/request = $18,250,000.
>
> **Systems insight**: Serving costs 9.1× more than training in the first year alone. A 10 percent reduction in cost per request, at unchanged request volume and service quality, saves about $1.8M in the first year, nearly paying for the original training run.

For one model version at a fixed query rate and average cost per served query, equation 0.37 combines training expense with recurring serving expense:

$$C_{\text{total}} = C_{\text{train}} + C_{\text{serving}} \times T_{\text{deployment}} \times \lambda_{\text{arr}} \tag{0.37}$$

where C_{train} is the one-time cost to train the model, C_{serving} is the cost per query served, $T_{\text{deployment}}$ is the deployment duration in appropriate time units, and λ_{arr} is the query rate. The rate must

count the same served queries used to estimate unit cost. That cost must include the chosen serving boundary, including idle or reserved capacity when it is billed. Changing traffic mix, fleet size, or price requires evaluating separate intervals rather than treating one unit cost as constant throughout deployment.

The same leverage can hold across application categories with different cost structures. In the chapter's illustrative recommendation scenario, a DLRM trained for $12,000 ($3000 hardware for 1,000 GPU-hours at $3/GPU-hour, plus 3× additional engineering cost for data and experimentation) and served at 10,000 QPS for 730 days accumulates 6.31×10^{11} lifetime queries. At the assumed $10/million queries, those queries cost $6,307,200 to serve, producing a 525.6× ratio in this scenario. Table 0.95 gives sensitivity ranges for several illustrative workload envelopes rather than market-price estimates:

Table 0.95: Illustrative training and serving cost ranges: Independent sensitivity ranges for training a model version and serving it for a year. A cost ratio requires a paired training-and-serving scenario; it cannot be inferred from matching endpoints of independent ranges. A deployment must substitute measured traffic and a consistent accounting boundary.

Application	Training Cost	Annual Serving Cost
Recommendation (high QPS)	$10K–$100K	$1M–$10M
Search ranking	$100K–$1M	$10M–$100M
LLM API	$1M–$100M	$10M–$1B
Internal analytics	$1K–$10K	$10K–$100K

The cost structure motivates serving optimization: a reduction in cost per completed request yields recurring savings if workload volume and service quality remain fixed. Lower latency alone does not ensure that billed capacity or other costs fall. Figure 0.119 uses constructed cost curves to illustrate how unit cost can change with daily request volume. Against its assumed price of $0.05 per 1,000 tokens, the optimized curve crosses near 2×10^5 requests per day, while the unbatched single-GPU curve crosses beyond 3×10^7 requests. These crossings follow from the assumed curves, not measured profitability or guaranteed effects of INT4 and continuous batching. A deployment needs its own token mix, occupied capacity, and complete cost boundary to establish a break-even point.

The cost ranges in table 0.95 give a static comparison; figure 0.120 instead accumulates assumed monthly serving expense over a 36-month deployment. Its crossover occurs when the serving portion equals the initial training expense, not when total deployment cost first exceeds training cost. In the plotted recommendation scenario, that happens within days; in the 70B LLM scenario, it takes roughly six weeks. These timings follow from the specified expenses, not from model size or user count alone. A larger training expense, lower traffic, or shorter deployment can change which activity dominates. The comparison motivates evaluating serving efficiency early while keeping workload and quality fixed. For generative LLM services, serving-specific designs can improve throughput, cost, and power use (Patel et al. 2024).

Inference Beyond LLMs

Large language models present distinctive serving challenges, but they are only one part of production inference. In large consumer platforms, recommendation and ranking workloads can dominate AI inference cycles and capacity (Gupta et al. 2020; Hazelwood et al. 2018). Vision and image processing, NLP and LLM workloads, fraud detection, ads, and other classification tasks create additional serving demands. Table 0.96 compares representative pressures: sparse lookup for recommendation, batch efficiency for fixed-shape vision, weight and cache traffic for LLM decode, and incremental deadlines for speech. These are starting points for diagnosis; the active bottleneck still depends on the model, input shape, and deployment.

Recommendation traffic illustrates why request volume must be derived from application behavior. A page load, scroll, or click can trigger ranking or retrieval, so one browsing session can produce many inference requests. A language-model application may likewise issue several model calls for one user action or run background tasks without an explicit query. Capacity planning therefore counts the model work triggered by each interaction rather than treating user count as request rate.

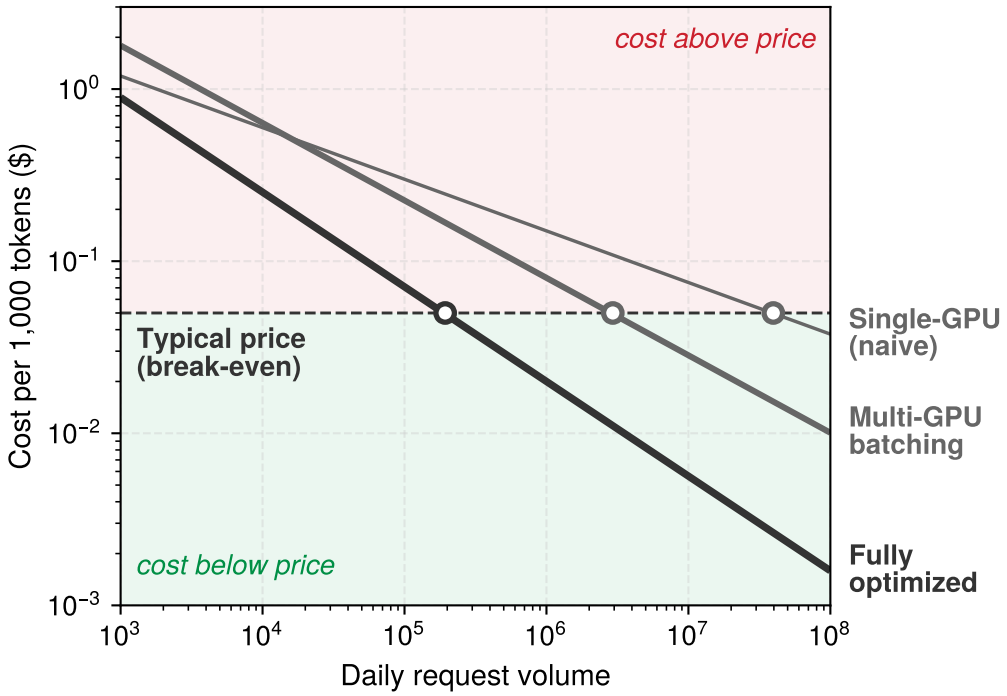


Figure 0.119: The serving cost curve: Constructed unit-cost curves cross an assumed price line at different request volumes. The optimized curve crosses earlier under these assumptions; the crossings do not establish measured profitability or guaranteed savings from quantization and batching.

Workload structure also determines which techniques can help. Embedding sharding addresses the memory demands of large recommendation models, while their sparse access patterns make lookup locality a central design concern (Naumov et al. 2019; Gupta et al. 2020). Feature store architectures add a related requirement: the serving path must retrieve the inputs the model expects within its latency budget. Continuous batching and KV cache management instead address variable-length autoregressive work. Text-to-image systems such as DALL-E provide one multimodal model example (Ramesh et al. 2021), but multimodal serving volume and latency targets remain product-specific.

Table 0.96: Production inference landscape: Different model types create different serving pressure, latency requirements, and optimization challenges. The table is a qualitative workload map rather than a universal traffic-share distribution. Technique selection must match the specific workload.

Model Type	Serving Pressure	Latency Target	Key Challenge
Recommendation/ranking	High volume in consumer platforms	$<$ 10 ms p99	Embedding lookup
Vision (CNN)	Workload-dependent	20–100 ms	Batch efficiency
LLM	High cost per request	100 ms–10s	Memory bandwidth
Speech/Audio	Stream-driven	Real-time	Sequential decode
Multimodal/text-to-image	Emerging and product-specific	Varies	Cross-modal coordination

The Serving Hierarchy

The optimization techniques organize into a serving hierarchy ordered by scope, from one request up to a shared multi-tenant platform. Each level owns a different bottleneck and measurement boundary, so an optimization that helps one level can leave another unchanged. The request level

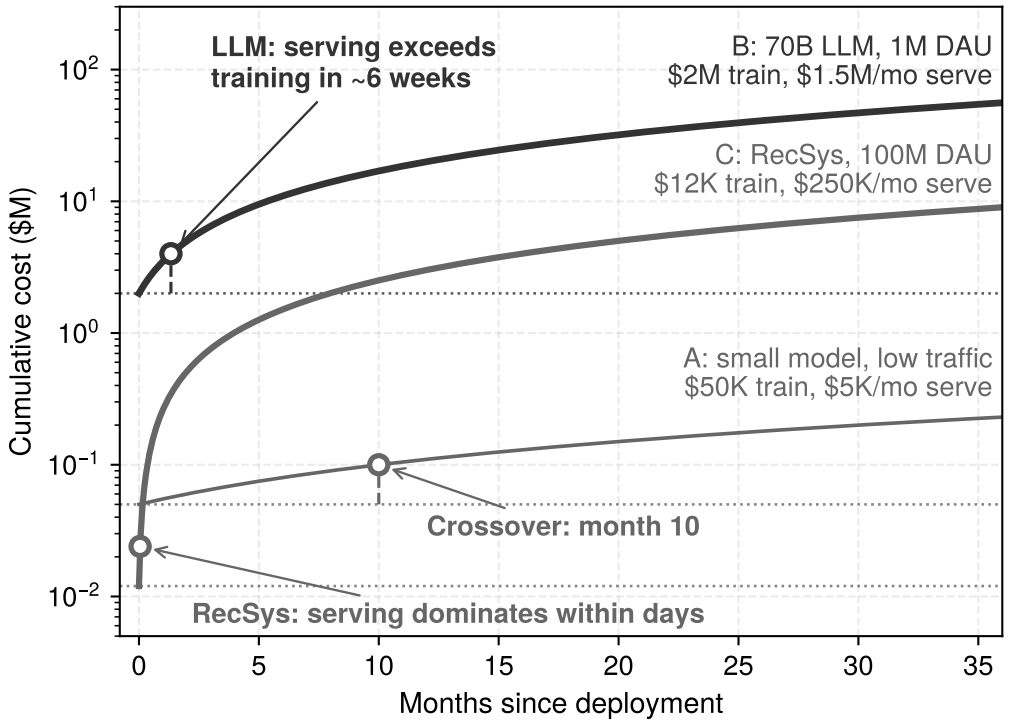


Figure 0.120: The serving cost crossover: Cumulative total deployment cost (initial training plus ongoing serving) for three scenarios. Vertical markers (scenarios A and B) indicate when the serving portion equals the one-time training cost. In the two high-traffic scenarios, serving expense matches training expense within weeks or days. In the low-traffic scenario, training expense remains larger over the plotted period. These differences follow from the specified training costs, traffic, and unit serving prices.

follows one request through preprocessing, batch-formation waiting, response caching, and model execution, where the target is the latency a user sees. The replica level looks inside one model instance, where GPU utilization, KV-cache memory management, kernel efficiency, and model optimization determine how much useful throughput that replica can deliver before it saturates. The service level then works across many replicas of the same model, using load balancing, request routing, and autoscaling to turn individual replicas into aggregate capacity. The platform level works across services and tenants, where resource allocation, multi-tenancy, scheduling, and placement decide whether a shared serving fleet remains efficient without allowing one workload to degrade another.

Each level supplies a different measurement boundary. Table 0.97 associates request latency, replica throughput, aggregate service capacity, and cross-tenant efficiency with the controls most directly responsible for them. Their effects still cross boundaries: batching can increase replica throughput while adding request delay, and replica placement can change both communication cost and service capacity. The hierarchy helps locate the decision without treating its metric in isolation. In C^3 terms, batching and cache management improve compute reuse, sharding introduces communication, and routing, isolation, and autoscaling coordinate the resources that make those gains usable.

Table 0.97: Serving hierarchy optimization targets: Each level of the serving hierarchy targets distinct performance metrics, from per-request latency at the request tier to aggregate resource efficiency at the platform tier.

Level	Optimization Target	Key Techniques
Request	Per-request latency	Dynamic batching, response caching

Level	Optimization Target	Key Techniques
Replica	Throughput, utilization	KV-cache paging, kernel fusion
Service	Aggregate capacity	Load balancing, routing, autoscaling
Platform	Resource efficiency	Multi-tenancy, scheduling, placement

Checkpoint 10.2: The serving hierarchy

Verify your understanding of where specific optimizations sit within the serving hierarchy:

- ☐ **Replica level**: identify the hierarchy level at which KV-cache paging reduces GPU memory waste, and explain why that raises concurrent request capacity rather than single-request latency.
- ☐ **Caching level**: distinguish response caching, which shortens one request's path, from KV-cache paging, which raises a replica's capacity, and place each in the hierarchy.
- ☐ **Load balancing**: identify why load balancing belongs at the service level and explain how its choice of replica can affect both aggregate goodput and a request's queueing delay.
- ☐ **Isolation level**: evaluate the claim that multi-tenancy and resource isolation are primarily request-level concerns.

The chapter climbs the hierarchy in that order, while allowing a few techniques to cross levels. A survey of the architectural dimensions along which serving systems differ comes first. Batching then sets how long each request waits to share execution, the request-level decision that also feeds replica throughput. KV-cache layout, decode-time optimizations, and the disaggregation of prefill and decode into separate pools decide how many requests a replica can hold, and adapter state, weight quantization, and model sharding change the replica's memory and compute budget. Load balancing turns replicas into a service, multi-tenancy and isolation govern the shared platform, autoscaling changes how much capacity the platform holds, and global placement extends the same decisions across regions. Precision is an input to every capacity calculation that follows: reducing weight precision frees resident memory, whereas reducing KV precision lowers the memory required per active sequence. These are separate budgets. Section 6 compares the serving trade-offs of these representation choices before sharding divides a replica across devices.

↩ Reduced-precision representations for weights, activations, and the KV cache, and the quantization methods that produce them, are established in section 3.

Serving Architecture Dimensions

A recommendation system that processes 100,000 embedding lookups per second across a sharded feature store requires a different serving architecture from a 70-billion-parameter language model generating tokens one at a time. Framework choice alone does not explain the difference. The workloads impose distinct constraints on batching, memory management, scheduling, and deployment topology. This section lays those dimensions out as a map, naming each decision and its alternatives briefly and using specific frameworks as examples rather than as the subject of study. The sections that follow develop the mechanisms behind each entry (continuous batching, paged KV memory, chunked prefill, disaggregation, session caches) together with their costs, and return to this map when they choose among them.

Throughput-latency trade-offs in batching

Batch formation sets the throughput-latency operating point. Static batching groups a fixed number of requests and suits predictable, fixed-shape inputs. For autoregressive language models, iteration-level admission lets new requests replace completed sequences instead of waiting for the longest sequence in a batch; Orca introduced this scheduling approach (Yu et al. 2022), and vLLM combines it with paged KV-cache management (Kwon et al. 2023). Recommendation systems with sharded embeddings can use feature-parallel batching to group sparse lookups by destination while also batching whole requests for dense computation. The common decision is which unit of work to

group: whole requests, decode iterations, or feature lookups. Section 5 develops the mechanisms and their capacity trade-offs.

Memory management evolution from preallocation to paging

Serving systems differ fundamentally in how they manage accelerator memory, and this difference determines the maximum concurrent request capacity.

Definition 10.1: KV cache

KV cache is a per-request LLM inference memory buffer that stores key and value attention tensors for processed prompt and generated tokens. It avoids recomputing those tensors for the prefix; each new query still performs attention against the cached state.

1. **Significance**: Compared with recomputing full-prefix attention for each new token, caching changes the attention work from $\mathcal{O}(S^2)$ to $\mathcal{O}(S)$ in sequence length for full attention with fixed model dimensions. Retaining that state costs memory proportional to context length and the number of active sequences, potentially exceeding the weight footprint. Section 4 derives the fundamental sizing math.
2. **Distinction**: Model weights are shared across requests using the same model, while each sequence has its own logical KV state. Physical storage can still be shared for compatible common prefixes. The scheduler must budget for distinct retained state and its growth, rather than assume every request needs a wholly separate copy or that sharing removes the capacity limit.
3. **Common pitfall**: A frequent misconception is that reducing model size proportionally reduces serving memory. In practice, the KV cache dominates HBM at long contexts, so a quantized 70B model can still be capacity-bound at batch sizes the weights alone would easily admit.

Preallocated memory management can reserve a fixed cache budget at admission for the prompt plus the permitted output. With a 4,096-token output allowance, a maximum-size reservation sets aside room for those additional tokens even if generation stops after 50. Prompt state consumes capacity as well. This policy makes future growth predictable, but the unused reservation cannot serve another request until it is released. Its waste depends on the gap between reserved and realized total sequence lengths.

Paged memory management, inspired by operating system virtual memory, allocates memory in fixed-size blocks (pages) and maps logical sequence positions to physical memory locations through a block table. As a request generates tokens, new physical blocks are allocated on demand. When generation completes, blocks no longer referenced by another request or retained for later reuse can return to the free pool. PagedAttention is the canonical design, and section 6 develops what removing contiguous per-sequence reservations does to fragmentation.

The memory management strategy changes admissible batch capacity by reclaiming space that contiguous preallocation leaves unused. Lower cost per request follows only when the recovered capacity produces more completed requests within the same latency and quality contract.

Scheduling policies across FCFS, preemption, and priority

The scheduling policy determines which requests receive GPU time and in what order. This decision matters when some requests require 50 output tokens and others require 4,000. First-come-first-served (FCFS) scheduling orders admission by arrival time, but that order does not require executing each request to completion before starting another. In a serial or full-batch-barrier implementation, long requests can cause head-of-line blocking. An iteration-level scheduler can admit requests in FCFS order while advancing several sequences together. Tail latency then depends on available slots, cache capacity, and the amount of work admitted ahead of a request.

Preemptive scheduling allows the system to stop allocating decode iterations to one request so that another can run. Preemption is practical at token boundaries, but it is not free. The scheduler must retain the request's KV pages in high-bandwidth memory (HBM), swap them to host memory,

or discard them and repeat prefill when the request resumes. A useful victim policy compares those three costs with the waiting request's remaining deadline rather than preempting at a fixed generation length. Retaining state consumes scarce capacity, swapping consumes interconnect bandwidth, and recomputation consumes prefill compute; under heavy load, rejecting low-priority work can cost less than repeatedly moving or rebuilding its state.

Priority-aware scheduling gives eligible high-priority requests precedence at scheduling boundaries. A production API might classify revenue-generating customer requests as critical, internal batch processing as standard, and free-tier traffic as best-effort. Already-running kernels and shared resources can still delay critical work; admission limits and reserved capacity must complement priority ordering.

Deployment topologies from single GPU to disaggregation

The deployment topology maps model computation and state to physical hardware. A single-GPU deployment keeps execution local and avoids inter-device communication, provided weights, cache, and runtime state fit together. A 13B model's FP16 weights (26 GB) leave most of an 80 GB H100 for KV state, whereas a 70B model's 140 GB cannot be resident on one device at FP16. That makes a single device a useful baseline for models of the first kind, but not necessarily the lowest-latency design. Multiple devices can shorten execution enough to repay communication, while a model that fits at a short context may exceed one device's capacity at higher concurrency. Topology selection therefore needs both a memory budget and measured execution times for the intended workload.

Multi-GPU tensor parallelism shards each layer's weight matrices across multiple GPUs connected by high-bandwidth interconnect (NVLink at 900 GB/s bidirectional [450 GB/s per direction] on H100). Each GPU computes a partial result for every layer, and an AllReduce operation synchronizes the partial results before the next layer. This topology distributes an accelerator-resident model that exceeds one device's memory. Ideal compute time falls with parallelism degree, but communication, imbalance, and kernel efficiency limit realized latency reduction. The model sharding section (section 7) analyzes the communication overhead quantitatively.

A third topology separates the two phases of a request. Prefill and decode can run on different pools of accelerators, each sized for its own token rate, with the prompt's KV cache transferred from the prefill pool to the decode pool (Zhong et al. 2024). Whether that separation pays depends on how many bytes the transfer moves, so section 6 develops it once KV-cache sizing is in hand. Chunked prefill (section 6) is the colocated alternative, interleaving slices of a long prompt with ongoing decode steps on the same worker (Agrawal et al. 2024).

Every topology is judged by the same capacity metric. **SLO goodput** is the rate of completed requests that meet the stated TTFT and TPOT targets. It is the serving counterpart of the useful-progress goodput that coordination protects in training (section 11). A request that misses its contract counts for nothing, however busy the accelerators were while serving it, so increasing arrivals without completing more requests within those targets does not increase useful capacity.

Stateful versus stateless architectural trade-offs

A serving system's statefulness determines what must be preserved when requests move between replicas. Vision inference and individual embedding lookups can expose stateless interfaces because they need no session history from an earlier request. A ready replica with the required model and data can then accept a rerouted request. Adding replicas still requires loading that state, distributing traffic, and checking downstream capacity; failure recovery also requires spare capacity and a policy for retrying interrupted work. Statelessness removes session-state migration from these operations, but does not remove their resource costs.

↩ Stateless and stateful failure recovery mechanics are established in section 20.

An autoregressive request is stateful while it is generating because its KV cache belongs to that in-flight sequence. Cross-request statefulness is optional. An API may send the full conversation history with every turn and rebuild KV state during prefill, making any replica eligible for the next request. A serving platform may instead retain a completed turn's KV state as a session cache, reducing repeated prefill at the cost of replica affinity, cache lifetime management, and recovery complexity. Sticky routing is an optimization for that retained cache, not a correctness requirement of autoregressive models.

The scaling divide is therefore an interface and cache-policy decision. Every live generation needs request-scoped state, but the service decides whether state survives the request boundary. Stateless cross-turn service can rebuild state from the supplied history, paying repeated prefill rather than requiring the previous replica's cache. Session-cached service saves prefill work but must drain, migrate, or rebuild cached state during scaling and failure. Neither interface makes an interrupted generation free to recover. The architecture should choose affinity only when measured cache-reuse value exceeds the resulting imbalance and recovery costs.

Architectural comparison

Table 0.98 summarizes how the batching, memory, scheduling, topology, and state dimensions interact across the major workload types. Its entries are candidate combinations for the illustrated constraint regimes. A model class alone does not prescribe a scheduler or topology; the choice also depends on model size, request mix, available hardware, and service targets.

Table 0.98: Serving architecture dimensions by workload type: The rows identify candidate design choices along five architectural dimensions. The workload's state, scheduling, and hardware constraints guide selection; the service contract determines whether a combination supplies useful capacity.

Dimension	Vision/Embedding	LLM (Autoregressive)	Recommendation
Batching	Static/dynamic (uniform inputs)	Continuous (variable outputs)	Feature-parallel (sharded embeddings)
Memory	Preallocated (predictable)	Paged (variable KV cache)	Distributed (embedding tables)
Scheduling	FCFS (uniform cost)	Preemptive (high variance)	Priority-aware (SLO tiers)
Topology	Single-GPU replicas	Tensor/pipeline parallel	Hybrid CPU-GPU sharding
State	Stateless	Request state; optional session cache	Stateless or session features

Checkpoint 10.3: Serving dimensions

Verify your understanding of how workload constraints drive architectural choices:

- ☐ **LLM vs. vision**: explain when variable request lengths make preemptive scheduling useful and which KV-state costs can outweigh its benefit.
- ☐ **State boundary**: distinguish request-scoped KV state from an optional cross-turn session cache and explain when sticky routing earns its imbalance cost.
- ☐ **RecSys standard**: identify the lookup and placement characteristics that favor feature-parallel batching for a recommendation workload.
- ☐ **Memory pressure**: identify which dimension (batching, memory, scheduling, topology, state) is primarily affected when quantization reduces model or KV-cache size.

The architectural dimensions determine which serving system to select for a given workload. Rather than comparing frameworks feature by feature, an engineer identifies the workload's position along each dimension (batching pattern, memory profile, scheduling requirements, deployment topology, and statefulness) and selects the system that matches. The optimization techniques in this chapter operate within this architectural framework, each addressing a specific dimension.

Batching Strategies at Scale

A stream of hundreds of disparate chat requests arrives at an inference server every second. Processing them one by one leaves much of the GPU idle, starved for work between small decode steps. Waiting to gather a large static batch forces the first request in line to endure unacceptable latency. Batching at scale therefore needs policies that group requests as they arrive without violating tail-latency deadlines.

Processing multiple requests together shares weight reads and kernel launch overhead across more useful work. The resulting service-rate gain can reduce queueing, but waiting to form a batch adds delay; the net effect on request latency depends on load. Single-machine serving applies this insight through dynamic batching, which collects requests within a time window before processing them together.

At scale, batching must also account for workload structure. A policy suited to uniform vision inputs can leave slots unused during variable-length generation, while grouping sparse embedding lookups solves a different problem from batching dense execution. The unit of reusable work determines which policy is worth evaluating.

Although recommendation workloads often dominate consumer inference volume (section 5), batching strategies are presented in order of conceptual complexity: vision (straightforward batching), LLMs (continuous batching with KV cache), and recommendation (feature-parallel batching with distributed embedding). This ordering builds understanding progressively, even though production systems frequently encounter recommendation workloads first. The taxonomy that follows matches batching strategies to model characteristics, providing quantitative analysis of when each approach applies and what performance to expect.

Batching characteristics across model architectures

Batching efficiency depends on how computation scales with batch size relative to memory and communication constraints. The execution timeline in figure 0.121 separates waiting to form a batch from waiting for the accelerator to become available. Unbatched serving adds no batch-formation delay, but later requests can still queue behind earlier forward passes. Static batching consolidates all four illustrated requests into one pass, adding formation delay and padding to accommodate different input lengths. Dynamic batching closes formation windows at fixed time intervals (Δt), producing two passes with two requests each in this example. The window limits intentional formation delay; it does not bound total queueing when ready batches arrive faster than the server can execute them.

For vision models, including convolutional neural networks (CNNs) and vision transformers (ViTs) processing fixed-size images, arithmetic work grows approximately in proportion to batch size. Requests share model weights, but activations and other per-request state still grow with the batch. Increasing batch size can therefore improve weight reuse and GPU utilization until compute capacity, memory capacity, or the latency budget becomes limiting. Static or dynamic batching exploits this reuse; the largest feasible batch is not necessarily the best operating point for an interactive service.

For LLMs in the decode phase, small batches perform little computation relative to the bytes required to load active model weights. In this regime, memory bandwidth binds. Larger batches reuse each weight load across more tokens, increasing arithmetic intensity until compute, KV-cache traffic, or the latency budget limits further throughput gains. For the same reason, small-batch decode does not inherit a new accelerator generation's headline compute improvement. Across the generations from Volta to Blackwell, peak compute climbs 18× while memory bandwidth expands by only 8.9×; figure 0.122 shows what that hardware divergence means for serving, where generation throughput tracks the slower curve whenever weight streaming dominates at small batch sizes.

↩ The accelerator trajectory behind this divergence, with compute outpacing memory bandwidth from one generation to the next, is established in section 3.

For recommendation systems, embedding lookup can limit throughput before dense computation does. Grouping sparse accesses can improve locality and distribute lookup work across shards, while batching the dense stages can improve matrix multiplication throughput. The serving policy must account for both stages and the communication between them rather than infer the bottleneck from the model category alone.

The physics and efficiency curves of batching

Batch size is the single-replica control knob that moves a workload along the roofline, raising arithmetic intensity by reusing each weight read across more requests. At fleet scale the same knob also sets how long arriving work waits. Batching trades the reuse of weights and execution overhead against longer service times and additional request state. A model relating batch size (B), batch service time $(T_{\text{svc}}(B))$, and batched service rate $(\mu_{\text{eff}}(B))$ exposes that trade-off. Selecting an operating point also requires the arrival pattern, memory budget, and latency target.

↩ Batch size as the control knob that moves decode toward the ridge point on one replica is established in section 2.

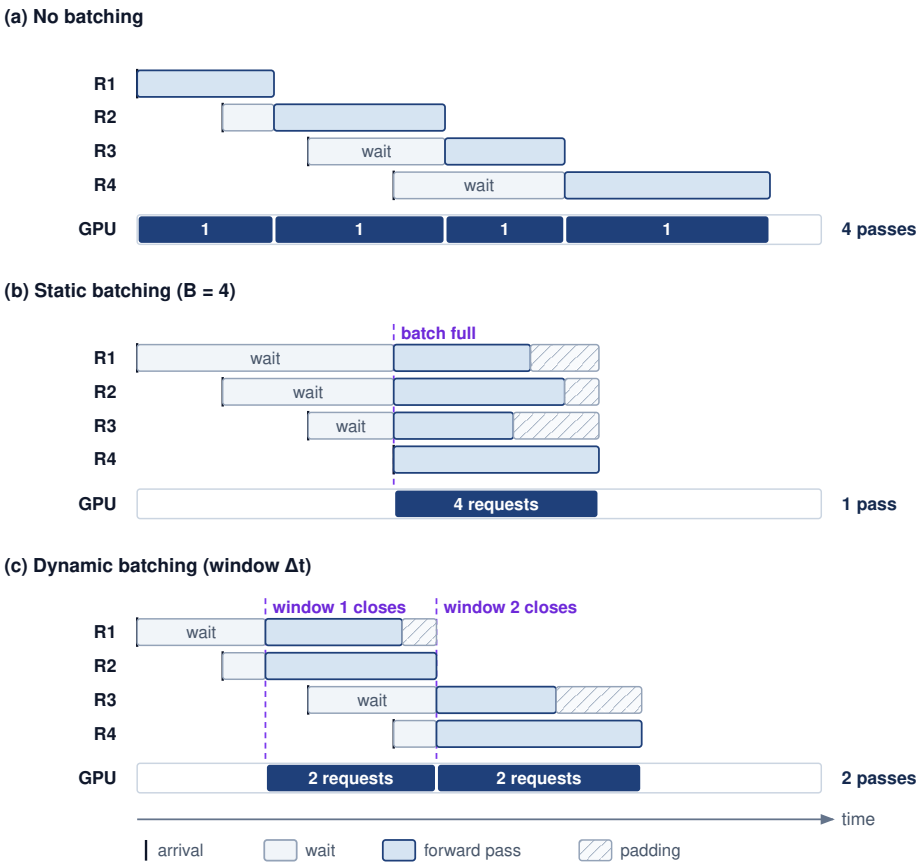


Figure 0.121: Batching strategies compared: Four requests of different lengths arrive one time unit apart under three policies; the timings are illustrative. (a) Without batching, each request receives its own forward pass, so later arrivals queue behind earlier ones and the GPU runs four passes. (b) Static batching holds every request until the batch of four is full, then runs one pass padded to the longest request; early arrivals pay the longest wait. (c) Dynamic batching dispatches whatever has arrived when a short window closes, limiting intentional formation delay in this timeline while sharing each pass between two requests. Waiting for an occupied worker remains a separate source of delay.

The first model isolates batch execution. Here $T_{\text{svc}}(B)$ is the service time once a batch begins execution; it excludes queueing and batch formation. Keeping the measurement boundary explicit prevents an execution-time improvement from being mistaken for an end-to-end SLO guarantee.

The service-time equation decomposes batch execution time into fixed overheads (kernel launch, memory loading) and variable costs (compute per sample):

$$T_{\text{svc}}(B) = T_{\text{fixed}} + B \times t_{\text{req}}$$

In this formulation, T_{fixed} captures costs paid once per batch, such as loading weights from HBM and kernel launch latency, while t_{req} denotes the marginal cost of adding one request, such as the compute time for that sample. Treating these terms as constants is a local approximation for a fixed workload and execution regime. Kernel changes, cache traffic, and resource saturation can alter the measured curve as batch size grows.

The throughput equation describes the system's capacity:

$$\mu_{\text{eff}}(B) = \frac{B}{T_{\text{svc}}(B)} = \frac{B}{T_{\text{fixed}} + B \times t_{\text{req}}}$$


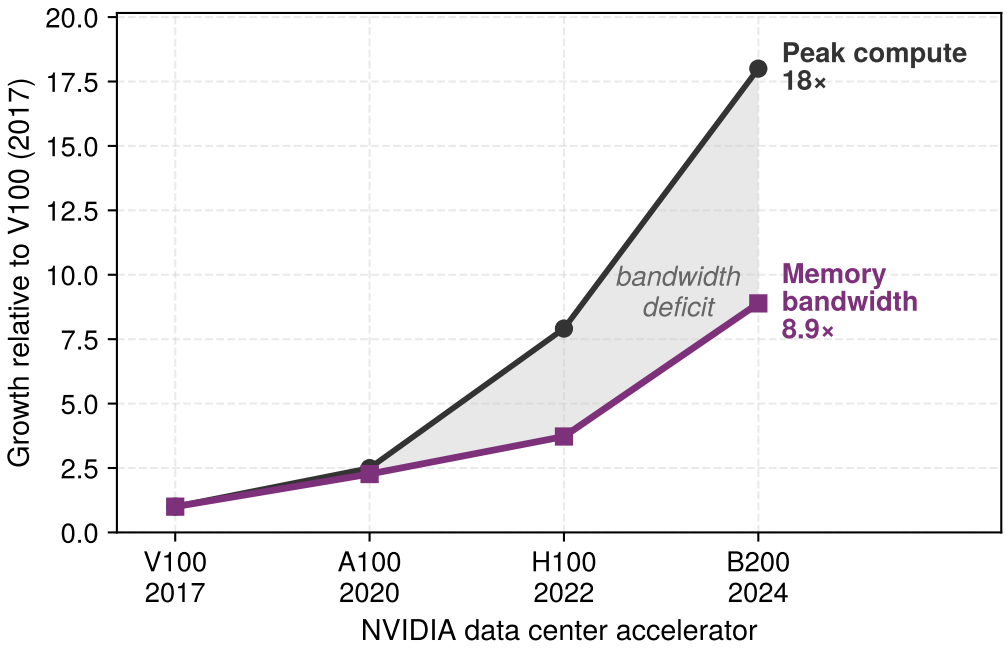


Figure 0.122: Decode inherits the bandwidth deficit: Peak compute and memory bandwidth for four accelerator generations, normalized to the V100. Compute rises 18× against bandwidth's 8.9×. In weight-bandwidth-bound decode, each iteration loads the active weights and reuses them across its output tokens; at fixed batch size, bandwidth growth constrains the gain. These hardware ratios are not measured workload speedups. Specifications come from the MLSysIM hardware registry.

The resulting batching efficiency curve shows diminishing returns from amortizing overhead. For small batch sizes (B), T_{fixed} dominates service time, so increasing B shares that cost and raises throughput substantially. As B grows, the relative contribution of T_{fixed} shrinks and the model approaches its asymptotic rate $1/t_{\text{req}}$. This limit alone does not identify whether compute or bandwidth binds on the actual device. The knee of the curve, where fixed and variable costs become comparable, is a useful candidate operating point. It is not an optimum independent of the service contract; a tight latency budget may require a smaller batch, while a throughput-oriented workload may benefit from a larger one.



Throughput saturates toward $1/t_{req}$; past the knee, each larger batch buys less.

The execution-only feasibility condition is $T_{\text{svc}}(B) \leq \text{SLO}$. In a live service, execution receives only the budget remaining after routing, queueing, batch formation, and response delivery. The batch-size decision must therefore use that remaining budget rather than consume the full SLO. The following example contrasts a vision workload with a relatively high t_{req} and an LLM decode workload with a high T_{fixed} from weight loading, showing how those measured costs change the tuning decision.

Napkin Math 10.2: The batching efficiency curve

Problem: An engineer optimizes two services: a vision model (ResNet) and an LLM (70B). At what batch size does each hit the "knee" of its efficiency curve?

Math: The knee occurs where the variable compute cost $(B \times t_{\text{req}})$ starts to exceed the fixed overhead (T_{fixed}).

1. **Vision Model** $(T_{\text{fixed}} = 2\text{ ms}, t_{\text{req}} = 1\text{ ms})$:
   - Knee: $B \approx 2\text{ ms}/1\text{ ms} = 2$.

- **Result**: This simplified latency model reaches its first overhead-amortization knee at a small batch. It does not locate hardware saturation; measuring throughput at larger batches tests whether additional concurrency still helps.

2. **LLM Decode** ($T_{\text{fixed}} = 40$ ms, $t_{\text{req}} = 0.5$ ms):
   - Knee: $B \approx 40\ \text{ms}/0.5\ \text{ms} = 80$.
   - **Result**: The larger fixed cost in this decode example moves the overhead-amortization knee to a larger batch.
   - **Where 0.5 ms comes from**: It is an assumed marginal cost per added sequence, dominated by reading that sequence's own KV state at a moderate context length. Unlike the weight stream, that read is private to each sequence, so it grows with batch size instead of being shared.
   - **Where 40 ms comes from**: It is roughly the time to stream the model's 140 GB of FP16 weights through one H100's 3.35 TB/s of HBM bandwidth, the aggregate weight traffic of one decode step expressed in single-device time. No single H100 holds those weights. The reference replica of section 2 spreads them over eight GPUs, which divides both T_{fixed} and t_{req} by the tensor-parallel degree and leaves their ratio, and therefore the knee, unchanged.

Systems insight: Because streaming the weights is the dominant per-step cost of decode, the system has not reached the efficiency knee until batch size 80. The knee depends on the ratio of fixed to per-request cost, not on how many devices share them, which is why sharing weight reads across concurrent requests matters at every replica size. The batch a service actually runs also depends on context length, cache capacity, kernel efficiency, and the latency target; continuous batching and paged allocation are the mechanisms that let a replica reach it.

Across model architectures, table 0.99 summarizes candidate batching strategies and representative constraints. Vision and long-prompt prefill can emphasize compute utilization, small-batch decode can emphasize weight bandwidth, and sharded recommendation can emphasize embedding access. Speech introduces deadlines tied to the input stream. These are starting points for measurement, not fixed bottlenecks or batch-size requirements for every model in a category.

Table 0.99: Batching strategy by model type: Each model class requires a distinct batching policy (from static/dynamic in vision to continuous in LLM decode and feature-parallel in recommendation) matched to its dominant hardware bottleneck. Typical batch sizes are operating ranges set by latency budgets and KV-cache capacity; they may fall below or above the workload-specific overhead-amortization knees illustrated in notebook 10.2, which mark where fixed costs stop dominating rather than where batching stops paying.

Model Type	Batching Strategy	Typical Batch Size	Key Constraint	Throughput Scaling
Vision (CNN)	Static/Dynamic	32–256	GPU compute	Near-linear to 64+
LLM (prefill)	Dynamic	1–64	GPU compute	Sub-linear
LLM (decode)	Continuous	Tens–hundreds (KV-limited)	Memory bandwidth	Log-linear
RecSys	Feature-parallel	1000–10000s	Embedding lookup	Depends on sharding
Speech	Streaming	1	Real-time	N/A (latency-bound)

Translating these batch-level equations into system-wide capacity planning requires a classical result from queuing theory: Little's Law,[5] which relates concurrency, throughput, and latency in any stable system.

[5] **Little's Law**: The identity holds for any stable system regardless of the arrival or service distribution, which is why it survives the bursty, variable-length traffic of inference. Because it relates averages, it bounds neither maximum service capacity nor tail latency.

Theorem 10.1: Little's Law for inference

Concept: In any stable queuing system, the average number of requests in the system (Q_{req}) equals the arrival rate (λ_{arr}) multiplied by the average time a request spends in the system (T_{lat}).

$$Q_{\text{req}} = \lambda_{\text{arr}} \cdot T_{\text{lat}}$$

Application: Concurrency planning. This idealized service counts only batch formation, queueing, and execution in its end-to-end latency; routing and response delivery add no delay. Assume the mean latency given below and full execution batches of the stated size. A percentile SLO cannot generally be substituted for the mean in Little's Law.

- **Target Throughput** (λ_{arr}): 1,000 requests/sec
- **Assumed mean latency** (T_{lat}): 100 ms (0.1 s)

Mean in-flight work (Q_{req}): $1000 \times 0.1 = 100$ concurrent requests

Capacity Planning: If a single GPU replica executes batches of 8 in 80 ms, and the fleet targets at most 80 percent mean service utilization:

1. Replica Throughput $= 8/0.08 = 100$ req/s
2. Throughput-only lower bound $= \lceil 1000/100 \rceil = 10$ replicas
3. Illustrative headroom-sized replica count $= \lceil 1000/(0.8 \times 100) \rceil = 13$ replicas

Verification: Maximum executing positions $= 13$ replicas $\times$ 8 batch positions $= 104$. These positions do not include requests waiting for execution or batch formation. Under the assumed fixed batch service time, Little's Law on the execution boundary gives 80 requests executing on average; the remaining 20 of the assumed mean in-flight population are waiting or accumulating. The throughput-only lower bound would run at the stability boundary; the utilization-sized candidate runs at about 76.9 percent service utilization. The assumed mean latency still needs validation, and this arithmetic does not prove a percentile latency SLO; that requires an arrival/service model or a measured load test.

This stability boundary can be measured faithfully only when the load generator preserves the workload claim. The contract in section 2 distinguishes a fixed external arrival process from fixed-concurrency testing because response-paced generation can reduce arrivals during a stall and make the system appear to have more headroom than it does. The distinction between throughput capacity and latency capacity is exactly what queuing theory formalizes.

↪ The mean queuing delay under a batched M/G/1 surrogate, and how utilization headroom and batch size trade against latency, is developed in section 4.

Static and dynamic batching for vision models

Vision models represent the simplest batching case because inputs have uniform size (after preprocessing) and computation follows a predictable pattern. Single-machine batching principles apply directly, with scale introducing considerations of batch formation across multiple replicas.

Static batching collects exactly B requests before processing. A full batch can improve weight reuse and kernel efficiency, but fullness alone does not establish maximum GPU utilization. Without a timeout or partial-batch dispatch policy, the first request can wait indefinitely if too few additional requests arrive.

Dynamic batching collects requests for a maximum time window T_{window} or until reaching maximum batch size B_{max}, whichever occurs first. For Poisson arrivals with rate λ_{arr}, equation 0.38 organizes expected request latency into queueing, formation, and execution contributions:

$$\mathbb{E}[T_{\text{lat}}] = \mathbb{E}[L_{\text{lat,queue}}] + L_{\text{lat,form}} + T_{\text{svc}}(B) \tag{0.38}$$

where $\mathbb{E}[L_{\text{lat,queue}}]$ is the expected queuing delay, $L_{\text{lat,form}}$ represents mean batch formation delay (up to T_{window}), and $T_{\text{svc}}(B)$ represents mean inference time over the realized batch sizes B. Queueing here excludes time already counted as batch formation. The two waiting terms respond differently to load. Under Poisson arrivals the mean inter-arrival gap is $1/\lambda_{\text{arr}}$, so a higher arrival rate fills a

batch faster and reduces formation delay. Queueing for a busy replica can nevertheless grow as arrival rate approaches service capacity; the batching timeout does not cap that queueing delay. The worked example that follows evaluates the capacity gained by spending part of the latency budget on batch formation.

Example 10.1: Dynamic batching for ResNet-50

Scenario: A vision classification service receives requests at 5,000 QPS with a 50 ms p99 latency SLO across 10 replicas, so each replica sees 500 QPS. One image served alone takes 5 ms. The scenario assumes that a batch of about 5 images executes in 8 ms and a batch of about 10 in 12 ms, because a batch shares weight reads and kernel launches across its images.

Diagnosis: Each utilization below is the per-replica arrival rate multiplied by the service time one request consumes. Option A serves every image alone, which overloads the replica ($\rho_{\text{serv}} = \lambda_{\text{arr}} \times T_{\text{svc}} = 500 \times 0.005 = 2.5$ utilization). Option B holds a 10 ms batching window, which collects about 5 requests (arrival rate $\times$ window). Their batch runs in 8 ms, so each request consumes 1.6 ms of execution, and utilization falls to $\rho_{\text{serv}} = 500 \times 0.0016 = 0.8$. The wider 20 ms window of Option C collects about 10 requests whose batch runs in 12 ms, or 1.2 ms each, reaching $\rho_{\text{serv}} = 500 \times 0.0012 = 0.6$ and a further 33 percent of per-replica capacity. Both options leave service headroom. Whether they also meet the p99 SLO depends on the window plus the queueing delay each utilization implies under the service's real arrival pattern, which utilization alone does not determine.

Systems lesson: Dynamic batching is effective when the latency budget has unused slack. The serving policy converts latency headroom into throughput, but requires careful tuning to prevent SLO violations.

At scale with multiple replicas, batch formation can occur either at individual replicas or at a centralized batching layer. Replica-local batching has each replica independently form batches from its assigned traffic. This avoids a shared batching stage, but splitting a light arrival stream among many replicas can leave each waiting to fill its batch. Centralized batching pools arrivals before dispatching formed batches, potentially shortening formation waits, at the cost of an additional network hop and a shared scheduling bottleneck. Load balancing helps local batching, but equal request counts do not guarantee equal work or reproduce the formation benefit of pooling arrivals. The choice depends on arrival density, request compatibility, and replica service times.

↪ A procedure for this tuning, from fitting the service-time model to checking the p99 target, is developed in section 4.

Continuous batching for large language model (LLM) inference

The autoregressive bottleneck (principle 15) governs this regime: at small batch sizes, decode is typically bandwidth-bound because each iteration streams active model weights while generating only one token per sequence. Batching shares those weight reads across multiple requests. As the batch grows, compute or KV-cache traffic can become the binding constraint, so bandwidth-bound decode is an operating regime rather than a property of every serving configuration.

Definition 10.2: Continuous batching

Continuous batching is a serving strategy that updates batch membership at iteration boundaries, allowing new requests to enter without waiting for every request in the original batch to finish.

1. **Significance**: It reduces padding waste by refilling completed slots at iteration boundaries. Throughput gains require waiting requests, available KV-cache capacity, and scheduling overhead small enough to preserve the benefit.
2. **Distinction**: Unlike static or dynamic batching (which group requests at the request level), continuous batching operates at the Iteration Level, reshaping the active batch between decode iterations.

3. **Common pitfall**: Continuous admission must coordinate scheduling with KV-state ownership and lifetime. A Dynamic Memory Manager such as PagedAttention improves space utilization, but paging is not required: an implementation can recycle fixed-capacity request slots, at the cost of unused reserved space.

Autoregressive language models expose the limitation of fixed-membership batching. If new sequences cannot join until the entire batch finishes, completed requests leave capacity unavailable to waiting work. The Orca system (Yu et al. 2022) removed that barrier. Updating membership at iteration boundaries enables slot reuse. Once a request completes, another can enter if its prompt has been processed and sufficient cache capacity is available. The scheduler must account for that preparation rather than treat every replacement as a decode-only operation.

Consider a fixed-width batch of 8 sequences. If one sequence completes after 10 tokens while others require 100 tokens, its slot contributes no useful output for 90 iterations. If the kernel continues executing padded work for that slot, the fraction of wasted compute attributable to it is:

$$\text{Wasted compute} = \frac{(100-10)\times 1}{100\times 8} = 11.25\%$$

The waste grows with the spread of output lengths, a dependence that section 6 turns into a formula. A kernel that skips completed sequences avoids their padded arithmetic, but a fixed-membership policy still prevents waiting requests from using the vacated capacity. Algorithm 0.5 states the continuous-batching scheduler as a decode loop with a prefilled waiting queue. Completed requests release their pages in this simplified policy, eligible waiting requests enter freed slots, and the next kernel runs over the updated active set. For Archetype A workloads (GPT-4/Llama-3), refilling slots lets more useful tokens share each weight read. The gain comes from reusing transferred weights, not merely from saturating bandwidth, which a smaller batch may already do.

↩ Archetype A (GPT-4/Llama-3), the autoregressive transformer whose serving must stream billions of weights for every generated token, is established in section 11.

Algorithm 0.5 Continuous batching decode scheduler

Require: prefilled waiting queue Q; active set A; KV-cache page allocator; active-token capacity C_{tok}; batched decode kernel
Ensure: generated tokens for completed requests; a continually refreshed active batch

```
while the service is running do
    admit requests from Q while capacity and free KV-cache pages remain; allocate state, append to A
    reserve pages for the next decode step; preempt requests that do not fit
    run one batched decode kernel over the remaining sequences in A
    append each sampled token; extend its KV-cache pages
    remove completed or length-limited sequences from A; return their pages to the allocator
    if HBM pressure exceeds the policy threshold then
        move low-priority sequences from A to the paused set; page their KV-cache to CPU DRAM
    end if
    fill freed capacity from Q, or resume paused sequences whose pages now fit
end while
```

Admitting, completing, and refilling slots on every iteration lets waiting work use capacity released before the longest sequence finishes. The illustrated preemption path adds HBM-to-CPU-DRAM transfers under memory pressure, so recovered capacity must repay both scheduling and state-movement costs. Figure 0.123 depicts the opportunity in slot-iterations: fixed membership leaves only 20 of 32 productive, while continuous admission fills all 32 under the illustrated arrival and capacity assumptions. Prefill and decode cells do not necessarily take equal time. Slot occupancy therefore measures the opportunity; the realized throughput gain depends on how much longer the inserted prefill cells take than the decode steps they share an iteration with.



Figure 0.123: Static vs. continuous batching: In static batching (a), completed slots cannot be reused until the longest request finishes, although completed responses may already be released. Continuous batching (b) admits waiting requests into freed slots at iteration boundaries, starting each with a prefill step. Over the eight iterations shown, 20 of 32 slot-iterations do useful work under static batching and all 32 under continuous batching; the hatched idle slots are the capacity recovered when arrivals and cache capacity permit.

Quantifying continuous batching

The execution schedules contrasted in figure 0.123 raise a quantitative question: how much capacity can slot reuse recover? Static batching leaves slots idle until the longest sequence in a batch finishes, while continuous batching can refill those slots at iteration boundaries. Counting useful and unused sequence-iterations in a fixed batch bounds that opportunity; arrivals, KV-cache admission, prefill scheduling, and scheduler overhead determine how much of it a continuous batch actually recovers.

The waste function for traditional batching

The 11.25 percent example of one early-finishing sequence generalizes to any mix of output lengths. For this waste model, traditional batching (also called static batching) retains a fixed batch width through all decode iterations until the longest sequence completes. Assume equal compute cost per sequence-iteration, including padded work for completed requests. For batch size B with output lengths $\{S_1, S_2, ..., S_B\}$, the total compute performed under those assumptions is:

$$O_{\text{traditional}} = B \times S_{\max} \times c_{\text{decode}}$$

where $S_{\max} = \max_i(S_i)$ and c_{decode} is the compute cost per decode iteration per sequence. However, the useful compute is only:

$$O_{\text{useful}} = \sum_{i=1}^{B} S_i \times c_{\text{decode}}$$

Equation 0.39 defines the waste ratio that quantifies the inefficiency:

$$W = 1 - \frac{O_{\text{useful}}}{O_{\text{traditional}}} = 1 - \frac{\sum_{i=1}^{B} S_i}{B \times S_{\max}} = 1 - \frac{\bar{S}}{S_{\max}} \tag{0.39}$$

where $\bar{S}$ is the mean output sequence length. This reveals that waste depends entirely on the ratio of mean to maximum output length within the batch. For uniform output lengths ($\bar{S} = S_{\max}$), waste is zero. For highly variable lengths, waste can exceed 50 percent.

Serving variable-length outputs in LLMs

Consider a GPT-class model serving four concurrent requests with the generation lengths shown in table 0.100 (in tokens):

Table 0.100: Concurrent request generation lengths: Four concurrent requests on a GPT-class model with varying prompt and output lengths. The 4× spread in output length (50 to 200 tokens) drives the batching waste analyzed in this section: a static batch of four pads every request to the longest, wasting compute on the three shorter requests until the longest finishes generating. Prompt length sets each request's prefill work, and the total is the number of tokens its KV cache holds when it finishes; both matter for admission, while the decode-slot accounting below uses only the output lengths.

Request	Prompt Length	Output Length	Total Tokens
R1	100	50	150
R2	80	200	280
R3	120	100	220
R4	90	150	240

Napkin Math 10.3: Continuous batching waste calculation

Problem: Four LLM requests with unequal output lengths share a four-slot batch. Assume fixed decode-iteration time and no queueing. How much of the batch's slot time does fixed membership leave unused, how much of it can continuous admission hand to new requests, and what happens to the original requests' latencies?

Variables:

- Decode time per iteration (batch of 4): 20 ms
- Maximum output length in batch: 200 tokens (R2)
- Mean output length: $(50 + 200 + 100 + 150)/4 = 125$ tokens

Slot accounting under fixed membership: The batch keeps all four slots until R2, the longest request, finishes.

- Total decode iterations: 200
- Total batch time: 200×20 ms $= 4{,}000$ ms

The waste ratio in equation 0.39, one minus the ratio of mean to maximum output length, measures the slot time that finished requests leave idle:
$W = 1 - \frac{125}{200} = 1 - 0.625 = 37.5\%$
The fixed-width schedule contains $4 \times 200 = 800$ "sequence-iterations" but only 500 are useful. These counts measure executed work only if the kernel continues processing completed slots; otherwise they measure useful work relative to the schedule's available slots.

Continuous admission: Sequences depart at the iteration where they complete, and eligible new requests take their slots without delaying the original requests under the fixed-iteration-time assumption.

- Iteration 50: R1 completes $\rightarrow$ slot freed, new request R5 can join
- Iteration 100: R3 completes $\rightarrow$ slot freed, new request R6 can join
- Iteration 150: R4 completes $\rightarrow$ slot freed, new request R7 can join
- Iteration 200: R2 completes

Response latency, a separate effect: The fixed-membership schedule in this comparison deliberately withholds all four responses until R2 completes its 200 tokens. Static batch membership alone does not require that barrier.

- Completion times with the barrier:
  - R1 completes useful work at iteration 50, but waits until iteration 200 $\rightarrow$ latency = 4,000 ms

  - R2 completes at iteration 200 → latency = 4,000 ms
  - R3 completes useful work at iteration 100, but waits until iteration 200 → latency = 4,000 ms
  - R4 completes useful work at iteration 150, but waits until iteration 200 → latency = 4,000 ms

Latencies with immediate release under continuous admission (assuming no queuing delay):

- R1: 50×20 ms $=$ 1,000 ms (4× improvement over traditional)
- R3: 100×20 ms $=$ 2,000 (2× improvement)
- R4: 150×20 ms $=$ 3,000 (1.33× improvement)
- R2: 200×20 ms $=$ 4,000 (no improvement for longest request)

Average latency comparison

- Traditional: 4,000 ms (all requests)
- Continuous: (1,000 ms + 2,000 + 3,000 + 4,000) / 4 = 2,500

Result: Under fixed membership, only 500 of the 800 sequence-iterations do useful work. Continuous admission hands the rest to R5, R6, and R7, which start generating at iterations 50, 100, and 150 instead of waiting for a new batch, so the same 200 iterations now advance seven requests rather than four. Releasing each response on completion separately reduces the original requests' average latency by 37.5 percent, numerically matching the unused-slot ratio, and static batching that released responses on completion would obtain the same original-request latencies.

Systems insight: Response release and slot reuse are separate decisions. Removing a response barrier helps the requests already in the batch; only continuous admission recovers the stranded iteration capacity diagrammed in figure 0.123, and that recovered capacity is what raises a replica's throughput.

Efficiency regimes for continuous batching

The continuous-batching analysis relates recoverable slot capacity to the gap between a batch's longest and average output lengths. Let $\text{CV} = \sigma/\mu$ be the coefficient of variation of output lengths. For the idealized fixed-width schedule, suppose the longest request in a batch is roughly k standard deviations above the mean. The factor k is an assumption about the batch rather than a property of the workload, because a larger batch draws more samples and pushes its maximum further into the tail. With immediate refill and unchanged iteration time, the corresponding capacity ratio is:

$$\text{Improvement} \approx \frac{S_{\max}}{\bar{S}} = \frac{\mu + k\sigma}{\mu} = 1 + k \cdot \text{CV}$$

where k specifies how far the batch maximum lies above the mean. The expression is therefore a scenario ceiling, set jointly by the workload's CV and the assumed k, on the opportunity from filling otherwise unused slots. Scheduler overhead, KV-cache pressure, and refill gaps reduce the recovered fraction; changes in kernel efficiency or memory policy require a broader comparison. In the table that follows, the CV and k columns are the inputs, and $1 + k \cdot \text{CV}$ is the ceiling they set. The speedup column is an assumed realized fraction of that ceiling, chosen to sit below it, and the waste column restates that assumed speedup as the equivalent effective waste through speedup $\approx 1/(1 - W_{\text{effective}})$. Neither column is a measurement or an independent result. Together they show how much of the ceiling a scheduler would have to recover to reach a given gain, which is the quantity a load test should measure.

Table 0.101 applies this accounting across workload types, including retrieval-augmented generation (RAG) (Lewis et al. 2020):

Table 0.101: Continuous batching benefit by workload type: Higher output-length variance (CV) raises the ceiling on improvement from continuous batching. The k values are assumed, so each $1 + k \cdot \text{CV}$ ceiling is a scenario value, and the speedups are assumed values held below it rather than measurements; the waste column is the effective waste those speedups imply. Workloads with predictable output lengths (code completion) have little to recover, while highly variable workloads (RAG with documents of varying length) have the most.

Workload Type	CV	k	Waste (Trad.)	Speedup (Continuous)
Code completion	0.3	2.5	16.7%	1.2×
Chat (short responses)	0.6	2	33.3%	1.5×
General text generation	1	2.5	50%	2×
Creative writing	1.5	3	64.3%	2.8×
RAG with variable docs	2	2.5	71.4%	3.5×

The systems pattern is straightforward: continuous batching is most valuable when output lengths are unpredictable, mixed workload types share the same cluster, request volume is high enough to refill vacated slots, and latency SLOs make early completion valuable. It provides minimal benefit when output lengths are uniform, as in classification or embedding generation, when batch sizes are too small for slot reuse to matter, or when request volume is too low to refill vacated slots.

The ceiling depends on k, which the coefficient of variation alone does not set. The full length distribution and batch size determine how far a batch's maximum lies above its mean, while arrivals, KV-cache admission, prefill scheduling, and scheduler overhead determine how much vacated capacity can be recovered. Serving teams must therefore compare policies under the same arrival trace, latency objective, and memory budget. Example 10.2 connects slot reuse to the memory-management choices of a published system.

Example 10.2: Continuous batching in vLLM

Scenario: An LLM serving engine (vLLM) manages autoregressive generation for incoming requests with highly variable output sequence lengths (Kwon et al. 2023).

Diagnosis: Fixed batch membership leaves completed slots unavailable to waiting requests. Continuous admission reuses that capacity, while paged allocation reduces unused cache reservations. The published vLLM design uses arrival order to prioritize requests, preempting later arrivals first under memory pressure. It considers both swapping cache state to CPU memory and recomputing that state when a request resumes.

Systems lesson: Continuous batching decouples batch membership from request-level boundaries. The paper reports 2–4× higher throughput at comparable latency than FasterTransformer and Orca in its evaluated workloads. This is a system comparison, not an isolated measurement of slot reuse. Paged cache management contributes by reducing memory waste and permitting larger active batches.

Implementation complexity trade-offs

The same variability that makes continuous batching valuable also makes it harder to operate. Its performance benefits come with implementation complexity that systems engineers must weigh.

Memory management must support overlapping request lifetimes. A simple fixed-membership implementation can reserve cache regions when a batch forms and release them together. Continuous admission must instead track which request owns each region and when that space becomes reusable. Fixed-capacity slots can support this policy, but they retain unused reservations; paging allocates space more incrementally at the cost of block tables and allocation bookkeeping. Completed state may also remain cached for reuse, so request completion and physical deallocation need not coincide.

Scheduler decisions also become more frequent. A simple fixed-membership policy checks whether a batch is full or its timeout has expired; continuous admission additionally tracks completions, available cache capacity, and eligible waiting requests at iteration boundaries. A constant-time readiness check is $\mathcal{O}(1)$, while scanning all active sequences is $\mathcal{O}(B)$ per iteration. These describe particular operations, not the total complexity of either scheduler. Both policies must manage request metadata, and the cost of priority selection or preemption depends on the data structures and policy used. Because continuous admission repeats this work at every decode iteration, it must stay small relative to a decode step or it erodes the throughput that slot reuse recovers. Engines therefore keep the per-iteration path short and can prepare the next iteration's batch on the host while the accelerator executes the current one.

Kernel design must also adapt. Batched GPU kernels traditionally assume fixed batch composition. Continuous batching requires kernels that handle variable-length sequences efficiently, often through techniques like packing multiple short sequences into shared attention masks or using specialized memory layouts that support dynamic batch membership.

Table 0.102 summarizes these trade-offs:

Table 0.102: Traditional vs. continuous batching trade-offs: Continuous batching provides significant throughput gains for variable-length workloads at the cost of implementation complexity. For uniform-length workloads, the complexity overhead may not justify adoption.

Dimension	Traditional Batching	Continuous Batching
Implementation effort	Low (standard frameworks)	High (custom scheduler, kernels)
Memory overhead	Fixed allocation	Dynamic + fragmentation mgmt
Scheduler work	Once per batch	Every decode iteration
Debugging complexity	Deterministic behavior	State-dependent, harder to trace
Throughput (variable)	Baseline	Up to $1 + k \cdot \text{CV}$
Throughput (uniform)	Baseline	~1.0× (no improvement)

For new LLM serving deployments, continuous batching frameworks like vLLM, TensorRT-LLM, or Text Generation Inference provide mature implementation paths. The decision becomes whether to adopt these frameworks or build custom serving infrastructure. For organizations with existing traditional batching systems, the migration cost must be weighed against the workload's output length variance using table 0.101.

Even with mature serving frameworks, diagnosing tail latency anomalies requires systematic investigation across the system stack. The following constructed p99 regression illustrates how to investigate infrastructure, execution, and serving layers. Its latency observations and mitigation outcome are scenario assumptions; only the transfer-time estimates are computed from payload and bandwidth.

Example 10.3: Debugging high p99 latency

Scenario: An LLM serving system exhibits high tail latency: p50 = 100 ms and p95 = 180 ms maintain SLO, but p99 spikes to $T_{\text{lat,p99}} = 500$ ms against a 200 ms target despite a monitored GPU utilization of 85 percent.

Diagnosis: The system runs across 4 A100 GPUs linked via PCIe Gen4 (32 GB/s per GPU) rather than NVLink. For a 100 MB payload, the bandwidth-only transfer estimate is $T_{\text{comm}}(N) \approx 3.1$ ms over PCIe versus 0.17 ms over NVLink. Collective startup, topology, and contention can add time. The service still runs an older request-level batching server rather than an iteration-level engine, with max batch size 32 and timeout 50 ms, so a batch holds its members until its longest generation finishes. The scenario assumes that 5 percent of batches experience head-of-line queuing delay $L_{\text{lat,queue}}$ as short requests wait behind long generations.

Systems lesson: The latency distribution motivates tracing both candidates. A transfer paid by every request contributes to every latency percentile, but its service-time cost can also amplify tail queueing near saturation. In this scenario, traces showing stable transfer times too small

to explain the additional delay, together with short requests waiting behind long generations, identify the fixed-membership barrier as the immediate cause. Continuous admission removes that barrier; prefill scheduling, cache capacity, and other waits still require measurement. Until the server can be replaced, the following policy reduces output-length variation within request-level batches:

1. **Request classification**: Classify requests by expected output length (short: under 50 tokens, medium: 50 to 200 tokens, long: over 200 tokens)
2. **Differentiated batching**: Limit short batches to 8, medium to 16, long to 32

Grouping requests by expected length shrinks the spread of output lengths inside each batch, which is the quantity equation 0.39 says drives both waste and waiting. The scenario assumes a post-mitigation p99 latency of $T_{\text{lat,p99}} = 185$ ms; a real service confirms it by replaying the same arrival workload and measuring the tail.

Chunked prefill and prompt-decode interleaving

Continuous batching admits work at iteration boundaries, but in production workloads, requests arrive with widely disparate prompt lengths. The prefill-decode decomposition already placed the two phases on opposite sides of the ridge point. Once continuous batching admits new prompts onto a worker that is decoding other streams, that difference stops being a property of each phase and becomes a scheduling conflict between them. Recalling the weight-traffic approximation makes the size of the conflict explicit.


During the prefill phase, the engine computes key-value representations across all prompt tokens (S_{prompt}) concurrently. Because all prompt tokens are processed in parallel, the linear projection general matrix multiply (GEMM) operations operate on large sequence dimensions ($M = S_{\text{prompt}}$). For a projection layer with hidden dimension d, arithmetic intensity scales with prompt length:

$$I_{\text{prefill}} \approx \frac{2 \cdot S_{\text{prompt}} \cdot d^2}{2 \cdot d^2} = S_{\text{prompt}} \quad \left[\frac{\text{FLOPs}}{\text{byte of weights loaded}}\right]$$

↩ The ridge point that separates compute-bound from bandwidth-bound execution is established in section 6.

Under this weight-traffic-only approximation, increasing S_{prompt} beyond the accelerator's ridge point moves the projection's roofline ceiling to the compute limit. Reaching that ceiling still depends on kernel efficiency; attention, other memory traffic, and communication can limit the complete prefill phase.

In contrast, the subsequent decode phase generates a single token per sequence sequentially. At the decode batch sizes this chapter considers, from tens of sequences up to the knee near 80 in notebook 10.2, the arithmetic intensity $I_{\text{decode}} \approx B_{\text{dec}}$ stays below the ridge point, placing the weight projections in a memory-bandwidth-bound regime under this approximation. Each decode iteration streams the active weights from HBM and reuses them across the batch. Larger batches and growing KV-cache traffic change that balance.



Long-prompt prefill reaches the compute ceiling; decode stays on the bandwidth slope.

Definition 10.3: Chunked prefill

Chunked prefill is an LLM serving mechanism that divides long prompt evaluations into discrete token chunks of size at most C_{chunk}, interleaving prefill computation with ongoing decode iterations within a shared token budget.

1. **Significance**: It limits the prompt-decode interference problem where monolithic prefills stall active decode streams for hundreds of milliseconds, giving the scheduler control over how much prefill work can lengthen the TBT of active streams. Meeting interactive streaming service-level objectives (SLOs) still requires measuring the resulting tail latency.
2. **Distinction**: Unlike continuous batching with monolithic prefill (which prefills each prompt in one uninterrupted pass before the worker returns to decoding), chunked prefill treats prefill as a multi-step iterative process co-scheduled alongside memory-bound decode tokens.

3. **Common pitfall**: Sizing the chunk budget C_{chunk} too small incurs kernel launch and attention mask overheads, degrading overall prefill throughput. Sizing it too large allows prefill compute to monopolize execution time, causing TBT tail spikes.

With an unchunked prefill policy, the scheduler processes an incoming prompt through the model before returning to decode work. A full prefill comprises many layer kernels; the interference arises from scheduling that whole operation without interleaving other requests' decode steps, not from assuming one indivisible kernel spans the entire prompt evaluation.

This delay lands in the TBT of requests already decoding on the same worker. A long response can dilute an isolated stall in its average TPOT, even though the user experiences a conspicuous gap. Repeated prefills or short responses can make the average deteriorate as well. Prioritizing the incoming prompt's time to first token can therefore consume the streaming-latency budget of requests already decoding. The measured prefill duration and the endpoint's TBT target determine whether interleaving is necessary.

The chunked prefill scheduling mechanism

To limit this interference, chunked prefill (definition 10.3, used by Sarathi-Serve (Agrawal et al. 2024)) partitions prompts into chunks of at most C_{chunk} tokens. A candidate range such as 256–512 tokens must be tested against the model, hardware, and streaming deadline rather than treated as a universal setting. A prompt of length S_{prompt} requires at least $\lceil S_{\text{prompt}}/C_{\text{chunk}} \rceil$ scheduling iterations; a smaller residual token budget can require more.

In each iteration, the scheduler constructs a hybrid batch combining active decode requests with prefill chunks under a global iteration token budget N_{budget}, a count of tokens rather than a time, as formulated in equation 0.40:

$$B_{\text{dec}} + \sum_{i \in \mathcal{P}_{\text{active}}} C_i \leq N_{\text{budget}} \tag{0.40}$$

where B_{dec} is the number of active decode tokens and C_i is the number of prompt tokens allocated to waiting prefill request i, so every term counts tokens. The simplified loop assumes admission control reserves sufficient KV-cache capacity and a future decode slot for each admitted request, keeping the decode count within the iteration budget even after prefills are promoted. Each waiting request contributes at most one chunk per iteration, with its committed prompt offset unchanged until execution completes. Algorithm 0.6 formalizes this iteration-level hybrid scheduling loop.

Algorithm 0.6 Chunked prefill and hybrid batch scheduler

Require: waiting prefill queue $\mathcal{Q}_{\text{prefill}}$; active decode set $\mathcal{D}$; iteration token budget N_{budget}; maximum chunk size C_{chunk}
Ensure: generated tokens for decode requests; incremental KV-cache construction for prefills

while serving engine is active **do**
  $B_{\text{dec}} \leftarrow |\mathcal{D}|$
  $N_{\text{rem}} \leftarrow N_{\text{budget}} - B_{\text{dec}}$
  $\mathcal{B}_{\text{prefill}} \leftarrow \emptyset$
  for each R_i in a snapshot of $\mathcal{Q}_{\text{prefill}}$, in queue order **do**
    if $N_{\text{rem}} > 0$ **then**
      $o_i \leftarrow R_i.\text{offset}$
      $C_i \leftarrow \min(C_{\text{chunk}}, N_{\text{rem}}, R_i.\text{prompt_length} - o_i)$
      $\mathcal{B}_{\text{prefill}} \leftarrow \mathcal{B}_{\text{prefill}} \cup \{(R_i, o_i, C_i)\}$
      $N_{\text{rem}} \leftarrow N_{\text{rem}} - C_i$
    end if
  end for
  run hybrid forward pass using each prefill slice $R_i[o_i : o_i + C_i]$ and the decode set $\mathcal{D}$
  append newly generated tokens for all $R \in \mathcal{D}$
  remove completed decode requests from $\mathcal{D}$ and release their KV blocks
  for $(R_i, o_i, C_i) \in \mathcal{B}_{\text{prefill}}$ **do**
    update prompt offset: $R_i.\text{offset} \leftarrow o_i + C_i$
    if $R_i.\text{offset} = R_i.\text{prompt_length}$ **then**
      promote R_i from $\mathcal{Q}_{\text{prefill}}$ to $\mathcal{D}$
    end if
  end for
end while

Weight-loading amortization via decode piggybacking

Executing prefill and decode tokens together in shared projection operations amortizes weight loading across both phases, an effect termed **decode piggybacking**. Alternating separate prefill and decode operations limits scheduling interference but does not by itself establish this weight reuse.

In a small-batch isolated decode step, streaming the model parameters (M_{weights} bytes) from HBM to registers achieves low arithmetic intensity because only B_{dec} tokens share the weight reads. Memory bandwidth then limits how much work the compute units can sustain, leaving arithmetic capacity available for a larger shared projection.

In a hybrid iteration, the model weights loaded from HBM into on-chip cache and registers are simultaneously reused for both the compute-dense prefill chunks ($\sum_i C_i$ tokens in total) and the memory-bound decode tokens (B_{dec} tokens). Ignoring attention-state traffic, communication, and scheduling overhead gives the projection-only lower-bound estimate in equation 0.41:

$$T_{\text{step}} \gtrsim \max\left(\frac{M_{\text{weights}}}{\text{BW}_{\text{mem}}}, \frac{2 \cdot (B_{\text{dec}} + \sum_i C_i) \cdot P_{\text{model}}}{R_{\text{peak}}}\right) \tag{0.41}$$

where P_{model} is the active parameter count, BW_{mem} is HBM memory bandwidth, and R_{peak} is peak accelerator compute throughput. These quantities must describe the same device or shard. Balancing the total prefill token allocation against weight streaming can amortize weight-loading cost across both phases, but this lower bound cannot guarantee $T_{\text{step}} \leq \text{SLO}_{\text{TBT}}$. Chunk sizing must leave room for the omitted costs and be validated against measured tail latency under the intended workload.

Example 10.4: Sarathi: Chunked prefill implementation

Scenario: An LLM inference server receives a mix of long input prompts ($10{,}000+$ tokens) and interactive short decode requests (Agrawal et al. 2024).

Diagnosis: When the worker schedules a full long-prompt prefill before returning to decode, that prefill can occupy execution for hundreds of milliseconds and create a TBT spike for active streams.

Systems lesson: Chunking moves the cost of a long prompt rather than removing it. At 512 tokens per chunk, a 10,000-token prompt needs at least $\lceil 10{,}000/512 \rceil = 20$ iterations to finish its prefill. With this prompt as the only prefill request, active streams share each decode iteration with at most one of its chunks, while the prompt's own time to first token stretches across those 20 iterations. Multiple waiting prompts can contribute additional chunks within the total iteration budget. The chunk budget sets that exchange between other streams' TBT and the long prompt's TTFT, so it must be tuned against both measured tails.

The batching strategies examined so far expose different sources of reusable capacity. Fixed-shape vision inputs make request grouping straightforward, although execution capacity and deadlines still limit batch size. Autoregressive generation adds variable request lifetimes and growing KV state, requiring the scheduler to coordinate iteration membership with memory admission. The binding resource can change within either workload. What changes the batching policy is the combination of work shape, state lifetime, and service contract.

Recommendation systems add the placement of sparse state to this decision. *Sparse embedding lookups* can dominate memory access and communication in an embedding-heavy workload even when *dense matrix multiplications* account for much of the arithmetic. A single request may issue thousands of lookups across shards of tables holding billions of entries before the ranking head combines the results. Grouping those accesses by feature type and destination can improve locality, complementing request batching in the dense stages.

Feature-parallel batching for recommendation systems

Recommendation batching starts by grouping work around embedding locality rather than request shape. Figure 0.124 traces this feature-parallel pipeline: an incoming request splits across user, item, and context feature types to query sharded embedding tables concurrently, after which a gather barrier concatenates the retrieved representations for the dense MLP ranking head.

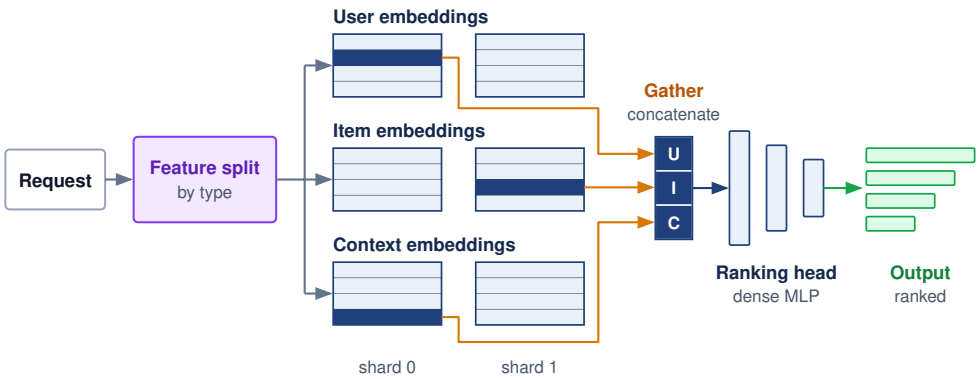


Figure 0.124: Feature-parallel batching pipeline: Requests are batched by feature type (Users, Items, Context) and dispatched to specialized embedding servers in parallel. The retrieved embeddings are then concatenated and processed by the dense ranking head. This architecture enables scaling to trillions of parameters by decoupling embedding storage from dense compute.

Recommendation systems expose the same scheduling principle through sparse and dense computation paths. Sparse feature lookup retrieves embeddings for user, item, and context features, while dense feature processing transforms continuous inputs. These paths can execute concurrently before feature interaction combines their representations, often through attention or factorization. A ranking head then produces final scores. The interaction stage must wait for its required inputs, making a slow embedding shard part of the request's critical path.

When sparse embedding access dominates latency, feature-parallel batching groups lookups by feature type and destination across requests. This organization exposes parallel work at the embedding shards while preserving the association needed to reconstruct each request for ranking:

```
Request 1: [user_id_1, item_ids_1, context_1]
Request 2: [user_id_2, item_ids_2, context_2]
Request 3: [user_id_3, item_ids_3, context_3]

Feature-parallel view:
User embeddings:  [lookup(user_1), lookup(user_2), lookup(user_3)]  → parallel
Item embeddings:  [lookup(items_1), lookup(items_2), lookup(items_3)]  → parallel
Context features: [process(ctx_1), process(ctx_2), process(ctx_3)]  → parallel

Then: Combine features per request for ranking
```

Feature-parallel batching is natural when embeddings are sharded across servers: each embedding server handles lookups for its shard across all requests in the batch. At hyperscale request volumes, this turns feature sharding into a serving strategy rather than a storage detail.

Example 10.5: RecSys batching at hyperscale

Scenario: A hyperscale recommendation service handles 10 million QPS, querying 5,000 embedding lookups per request across 1,000 shards.

Diagnosis: The assumed distribution of requests requires 50 million lookups/sec per shard. That rate is the capacity target each shard's lookup service must sustain. Accumulating requests over a 1 ms window forms batches of 50K lookups per shard, creating an opportunity to deduplicate, reorder, or coalesce lookups. Batching alone does not make random addresses sequential.

Systems lesson: Shard-level batching exploits sparse feature locality, but its benefit depends on cache hits, access distribution, and the amount of work each shard receives. The formation window spends part of the 5.2 ms end-to-end latency budget; measured lookup and communication times must fit in what remains alongside the dense stages.

Streaming inference for real-time applications

Streaming workloads constrain how long batching may delay new input. Speech recognition, video analysis, and robotics process an ongoing sequence of observations, so each result must arrive in time for its application. Batching across ready streams can still improve efficiency if it respects those deadlines.

Streaming inference processes inputs incrementally rather than waiting for the complete recording or interaction. Illustrative input cadences include 10–20 ms audio chunks for speech recognition, 30–60 FPS video, and 100–1000 Hz sensor or control updates in robotics. These rates specify how often work arrives, not a universal inference deadline. Buffering, frame selection, and batching must follow the application's latency and freshness requirements.

A streaming service must sustain the arrival rate while meeting the latency budget for each accepted input. The end-to-end processing path includes:

$$T_{\text{streaming}} = T_{\text{capture}} + T_{\text{transfer}} + L_{\text{lat,infer}} + T_{\text{action}}$$

where the sum must fit the end-to-end latency budget. A pipelined implementation must also sustain the input arrival rate; its slowest stage must process frames at least as quickly as they arrive. The end-to-end budget may span several frame intervals, as the speech example illustrates.

Example 10.6: Streaming speech recognition pipeline

Scenario: A real-time streaming speech-to-text pipeline processes 20 ms audio frames under a strict 100 ms end-to-end latency budget (5 frames max delay).

Diagnosis: Waiting for a large batch from one stream can consume its latency budget before inference begins. The pipeline processes frames incrementally ($T_{\text{streaming}} = T_{\text{capture}} + T_{\text{transfer}} + L_{\text{lat,infer}} + T_{\text{action}}$), overlapping audio capture with acoustic model evaluation. Ready frames from independent streams can share execution if the additional waiting and service time still fit the budget.

Systems lesson: Streaming inference requires both timely results and enough throughput to prevent accumulating backlog. Incremental pipelining supports these goals; whether batching helps depends on the available deadline slack and the number of ready streams.

Adaptive batching strategies

Once batching is workload-specific, fixed parameters become fragile. Production systems therefore adapt batching behavior to current conditions.

Traffic-adaptive batching adjusts the batch window based on arrival rate:

$$T_{\text{window}} = \min\left(T_{\max}, \frac{B_{\text{target}}}{\lambda_{\text{arr}}}\right)$$

When traffic is high, the window shrinks because the target batch size fills quickly. When traffic is low, the window extends but is capped to bound batch-formation delay. This cap does not bound the separate wait for a busy replica.

SLO-adaptive batching takes a complementary approach, monitoring latency percentiles and adjusting parameters aggressively:

```
if P99_latency > 0.9 * SLO:
    reduce B_max by 20%
    reduce T_window by 20%
elif P99_latency < 0.5 * SLO:
    increase B_max by 10%
    increase T_window by 10%
```

The feedback loop is a tuning heuristic, not a guarantee of latency headroom. Reducing batch size can shorten execution while also reducing service capacity and increasing queueing under heavy load. Feedback delay and noisy percentile estimates can cause oscillation, so the controller must be evaluated with the intended arrival trace and overload policy. Request-aware batching adds another dimension by considering request characteristics. For LLMs, prompt length can guide padding and prefill budgets, while estimated output length can guide grouping. Prediction errors and priority choices must be included when evaluating tail latency.

Production runtimes expose controls for this trade-off. NVIDIA Triton Inference Server uses `max_batch_size` to cap batches, `max_queue_delay_microseconds` to bound additional waiting for batch formation, and optional `preferred_batch_size` values for particularly efficient execution profiles. Preferred sizes do not create a separate queue for each batch size. The runtime forms a supported batch from queued requests when an instance is available; priority queues and overload policy are separate controls.

Table 0.103 gives an illustrative load-test pattern. Larger batches can absorb rising traffic until offered load approaches execution capacity; after that, longer queues need an admission or scaling response.

Table 0.103: Illustrative dynamic-batching load test: Scenario assumptions demonstrate rising batch size and the onset of overload. At the last row, completions fall below arrivals; those operating conditions cannot sustain a stationary queue without admission control.


Traffic Level	Assumed Avg Batch Size	Assumed Avg Latency	Assumed Throughput
100 QPS	2.1	8 ms	100 QPS
500 QPS	6.3	12 ms	500 QPS
1000 QPS	12.4	18 ms	1000 QPS
2000 QPS	24.1	28 ms	1980 QPS

The batching strategies to this point focus on scheduling work under a chosen request budget. Output length remains uncertain, but the service can already cap generation. Reasoning-heavy inference makes that budget an explicit quality-cost decision: the service may allocate additional tokens or candidate evaluations when the expected benefit justifies their latency and capacity costs. This extends the scheduling question from when requests run to how much work they may consume.

The logic wall and test-time compute scaling

Test-time scaling turns reasoning into a serving resource. The scaling laws that motivate the fleet were first measured for pretraining, where quality improves as a power law in parameters, data, and training compute. The same pattern has a third regime in which quality rises with the compute spent on each query at inference time. For a serving fleet that regime moves the scaling curve out of the training cluster and into the request path. Every increment of quality bought this way is paid on every request for the lifetime of the deployment, the recurring cost that the serving cost dominance law (principle 16) already prices. A request may issue more generated tokens, internal chain-of-thought (CoT) tokens, or search steps before producing the answer. Whether that extra work buys quality is an empirical question. Capability studies describe abilities that appear abruptly with scale (Wei et al. 2022), while later analysis cautions that some apparent jumps are artifacts of the metric chosen (Schaeffer et al. 2023), so a serving budget should rest on measured quality gains for the workload rather than on the expectation of a jump.

From a serving-systems perspective, the relevant shift is the work issued per request. Additional reasoning consumes accelerator time and can extend both latency and KV-cache residency. Increasing test-time work does not necessarily change the bottleneck of each decode step. It instead requires a policy for the number of generated tokens, candidate solutions, or search steps a request may consume. The logic wall is the point at which serial reasoning tokens exhaust a request's latency budget, or its share of fleet capacity, before additional reasoning stops improving the answer. A harder task may justify more work, but additional work does not guarantee a correct answer. Adaptive batching decides when requests run together; test-time compute allocation decides how much work each request is allowed to issue.



Reasoning through 128 serial tokens turns a 100 ms answer into 12.8 s.

↩ Test-time scaling, the lifecycle regime that spends compute per request rather than per training run, is established alongside the empirical scaling laws in section 8.

Napkin Math 10.4: Scaling reasoning depth

Problem: Calculate the latency impact of a model that uses 128 "Thinking Tokens" to solve a complex math proof vs. a standard answer.

1. **Standard response**: 1 token answer = 100 ms.
2. **Reasoning response**: 128 of internal search/CoT before the answer.
3. **The latency**: 128 $\times$ 100 ms = 12.8 seconds.

Systems insight: The per-token time is a round figure chosen for easy arithmetic, more than ten times the batch-one decode step of the reference 70B replica in section 2. What the calculation teaches does not depend on it. Serial reasoning tokens multiply latency by the ratio of reasoning tokens to answer tokens, whatever each token costs, so a faster replica shortens both responses in proportion and leaves the 128-fold expansion intact. Against a direct answer of many tokens rather than one, the ratio shrinks accordingly; against a one-token answer it is largest. A search step that evaluates several candidates in parallel adds compute and KV residency without

adding the same serial latency, which is why reasoning budgets must be stated in both time and capacity. At fleet scale, compute allocation weighs the measured quality gain against both the request deadline and the capacity the additional work consumes.

Variable work per request closes the batching story: continuous and adaptive batching handle variation the system observes, while test-time compute is variation the system chooses. **Dynamic compute allocation** assigns per-request compute budgets based on task difficulty, latency tolerance, and fleet load rather than applying a fixed decode budget to every prompt. With both the batching mechanism and the per-request compute budget now on the table, the remaining task is to decide which combination a given workload should run.

Selecting a batching strategy

The selection problem is to match the batching mechanism to model shape, traffic variance, and latency budget. That match depends on where in the request path the latency budget is spent.

Checkpoint 10.4: Batching strategy trade-offs

Verify your understanding of different batching mechanics:

- ☐ **Static vs. continuous**: for a vision service with highly uniform input sizes and predictable traffic, select static batching or continuous batching.
- ☐ **Waste ratio**: explain when refilling completed slots can eliminate the static-batch padding waste ($1 - \bar{S}/S_{\max}$), and why low arrivals or KV-cache pressure prevent perfect slot reuse.
- ☐ **Adaptive batching**: explain when shrinking the formation window reduces waiting without sacrificing throughput, and why it cannot resolve overload when arrivals exceed service capacity.
- ☐ **RecSys bottleneck**: in feature-parallel batching for RecSys, identify whether the primary fleet-stack bottleneck is the GPU's Tensor Cores or the distributed Embedding Store's memory bandwidth.
- ☐ **Batching limit**: explain why free HBM, not Tensor Core compute, often caps the achievable batch size for long-context LLM serving.

The end-to-end traversal diagrammed in figure 0.118 provides the final operational check on batching selection: noncompute stages such as host serialization, queuing, and network routing consume a substantial fraction of the latency budget, so batch formation and execution must be budgeted across the full pipeline rather than against accelerator runtime alone. The following questions identify candidate policies; memory admission, arrivals, and the remaining latency budget determine their usable settings:

```
Is it autoregressive text generation?
|- Yes → Continuous batching with chunked prefill
`- No → Is it real-time streaming speech/video/robotics?
        |- Yes → Streaming pipeline with minimal or no batching
        `- No → Do embedding lookups dominate latency?
                |- Yes → Feature-parallel batching (RecSys)
                `- No → Dynamic batching with adaptive parameters
```

The strategies in table 0.104 expose different tuning decisions: batch size for static execution, waiting time for dynamic batching, admission and iteration work for continuous batching, lookup grouping for sharded embeddings, and deadline-compatible grouping for streaming. Continuous batching responds to variable completion times; it does not make output lengths uniform. Each policy must be evaluated against both useful throughput and its latency budget.

Table 0.104: Batching strategy parameters: The parameter each strategy tunes (batch size, formation window, chunk size, accumulation window, or pipeline depth) follows from its goal, from raw throughput for static batching to the real-time deadline for streaming.

Strategy	Key Parameters	Tuning Goal
Static	Batch size	Maximize throughput
Dynamic	Window, max batch	Balance latency vs. throughput
Continuous	Chunk size, max batch	Minimize decode latency variance
Feature-parallel	Accumulation window	Match embedding shard capacity
Streaming	Pipeline depth	Meet real-time deadline

Batching policy and memory admission are coupled. In a full-attention deployment that retains active KV state on the GPU, every admitted sequence consumes cache capacity as its context grows. A schedule with room for more decode work can therefore run out of memory before it reaches its execution limit. Managing that state is the next step in determining useful concurrency.

Memory and Decode-Time Management

As a full-attention LLM generates a 2,000-word essay, each new token attends to representations of earlier tokens. The KV cache retains the keys and values needed for that attention, with a per-request footprint that grows as generation proceeds. Large contiguous reservations can leave HBM reserved but unused or create gaps too small for another reservation. Admission can then fail even though the stored attention state occupies less than the available capacity.

Two classes of techniques meet at this boundary. KV-state capacity techniques, such as PagedAttention and prefix caching, decide where attention state lives and how much fragmentation the memory manager tolerates. Decode-time latency techniques, such as speculative decoding, change how much target-model work is needed per emitted token. Speculative decoding is not KV-cache compression; it trades extra draft-model state, target-model verification, and scheduler complexity for lower TPOT under the same memory budget. Prefill-decode disaggregation treats the attention state as a payload, because separating the two phases means moving each request's cache between pools. Capacity accounting and adapter locality then determine how retained KV state and task-specific weights share the remaining memory budget.

Wherever they can, the calculations that follow share one reference replica, the 70B model on one eight-GPU H100 node that performance engineering established, with FP16 weights split eight ways. A few leave it on purpose to make a single point, and each says so where it does. The attention layout matters even more, because it sets the bytes cached per token. Grouped-query attention (GQA) with eight KV heads, the layout of the Llama-family 70B models, caches one eighth the state of a 64-head multi-head attention baseline, so each calculation names its hardware and attention layout, and numbers from different calculations compare only after conversion to the same configuration.

↩ The reference serving replica, a 70B model on one eight-GPU H100 node, is established in section 17.

The KV cache wall and memory capacity

Increasing batch size in LLM serving can encounter the KV cache wall before execution resources are fully used. The capacity model in figure 0.125 leaves the reference replica to show the wall on a single device. It combines an idealized 35 GB weight payload for a quantized 70B model with its full-attention, eight-KV-head GQA state on one H100, using a conservative decimal budget matching its nameplate label. This illustrative budget differs from the registered byte capacity used in the node estimator below. With the illustrated cache dimensions and precision, a batch of 8 reaches the memory boundary at roughly 17K tokens per sequence. Quantization metadata, runtime buffers, and other allocations reduce the capacity available in an actual deployment, so the plotted boundary is an optimistic sizing limit.

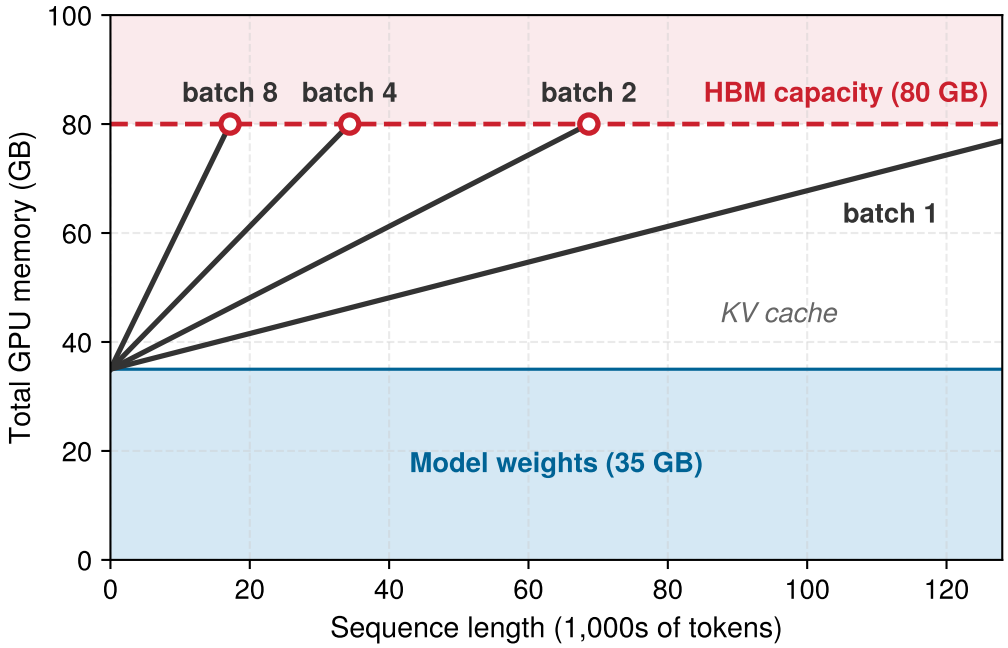


Figure 0.125: The KV cache wall: Total GPU memory usage for a 4-bit quantized 70B model (35 GB weights) on an 80 GB H100. While the model fits easily at small context lengths, the KV cache (sloped lines) eventually consumes all remaining HBM. At 128K context, a batch size of 2 is physically impossible on a single GPU (35 GB + 84 GB exceeds 80 GB), forcing the system to either reduce batch size, change the state representation, or distribute the state across devices.

The visualization explains why weight fit alone does not establish serving capacity. A long-context request can consume nearly all remaining memory in the illustrated configuration, leaving little space for other active sequences. Sharding can add headroom, but its communication cost must be weighed against alternatives such as lower concurrency or a smaller cache representation. The effect of a 128K context depends on the model's cache dimensions and precision, not on context length alone.

The capacity model behind the figure, weight bytes plus per-token KV bytes multiplied by every token held, turns into an explicit batch-size limit for a production node.

Napkin Math 10.5: KV-cache capacity estimator

Unlike the conservative decimal budgets used in the illustrative comparisons, this estimator retains the registered byte capacity when summing the node's HBM. Converting its display units does not change that byte count.

Problem: A deployment serves an illustrative 70B-class GQA model with 128K context support (FP16 weights $\approx$ 141.2 GB) on an 8$\times$ H100 node (640 GB total HBM). The goal is to determine the maximum batch size for a context length of 128K tokens.


Formula:

$$m_{\text{token}} = 2 \times N_L \times H_{\text{KV}} \times d_{\text{head}} \times s_{\text{elem}}$$

$$M_{\text{total}} = M_{\text{weights}} + M_{\text{KV}}, \qquad M_{\text{KV}} = B \times S \times m_{\text{token}}$$

Parameters:

- $N_L = 80$, $H_{\text{KV}} = 8$ for the assumed GQA architecture, $d_{\text{head}} = 128$.
- $s_{\text{elem}} = 2$ bytes (FP16).
- Context $= 131{,}072$ tokens.



A dozen 128K-token requests exhaust the whole KV budget.

Step 1: Calculate memory per token.

$$m_{\text{token}} = 2 \times 80 \times 8 \times 128 \times 2 = 327,680 \text{ bytes} \approx 0.33 \text{ MB/token}$$

Step 2: Calculate cache per request.

$$131,072 \text{ tokens} \times 0.33 \text{ MB/token} \approx 42.9 \text{ GB/request}$$

Step 3: Determine max batch size. Available Memory for KV = 687.2 GB (Total) - 141.2 GB (Weights) - 20 GB (System) = 526.0 GB.

$$\text{Max Batch} = \left\lfloor \frac{526.0}{42.9} \right\rfloor = 12$$

Systems insight: Even with grouped query attention (GQA), whose shared key-value heads the 8-head count in this calculation already reflects, each 128K-context request consumes tens of gigabytes of KV state. This configuration therefore admits only a limited number of concurrent long-context requests. PagedAttention can recover allocation waste, but cannot shrink the attention tensors counted here. Increasing concurrency beyond that limit requires changing the memory budget, cache representation, or placement of state.

The fragmentation problem

Traditional memory allocation for KV cache preallocates contiguous memory for each sequence based on maximum expected length. This creates two forms of waste.

Internal fragmentation wastes memory within each allocation. Sequences shorter than the reserved capacity leave the unused portion idle. If the output reservation holds 4,096 tokens but the average output uses 100 tokens, 97.6 percent of that output reservation goes unused. Prompt state consumes additional space; this calculation does not give the unused fraction of the combined prompt-and-output allocation.

External fragmentation compounds this problem across allocations. As sequences complete and new ones start, memory becomes fragmented into noncontiguous free blocks. Even with sufficient total free memory, no single block may be large enough for a new maximum-length allocation.

Consider a simplified example with 8 memory slots and maximum sequence length of 4. Fixed-size reservations first create internal fragmentation:

```
Time 0: Allocate Seq A (slots 0-3), Seq B (slots 4-7)
        [A][A][a][a][B][B][B][b]
        lowercase = reserved but unused
```

External fragmentation can arise when the allocator also permits smaller contiguous reservations. In a later state, two sequences occupy two slots each, leaving separated gaps:

```
Time 1: Active Seq C and Seq D leave two 2-slot gaps
        [ ][ ][C][C][ ][ ][D][D]

Time 2: Try to allocate Seq E (needs 4 contiguous slots)
        [ ][ ][C][C][ ][ ][D][D]  <- Total free slots = 4, largest block = 2

Result: enough total free capacity exists, but no contiguous block is large enough.
```

Under variable sequence lengths, the two effects compound. The vLLM authors measured roughly 60 to 80 percent of reserved KV-cache memory going unused in the prior serving systems they studied, capacity that could otherwise have admitted more sequences (Kwon et al. 2023).

PagedAttention

The fragmentation example exposes the allocator failure: enough KV-cache capacity can exist in aggregate while no contiguous block is available for the next sequence. PagedAttention fixes that

serving problem by treating KV-cache storage like virtual memory rather than a single preallocated slab.

The shift changes the allocation problem, because capacity no longer has to be reserved as one contiguous block before the request starts, and that change alone can multiply the number of requests that fit before any byte of state is compressed.

Systems Perspective 10.1: Analogy: The inefficient hotel

Imagine a hotel storage room with 100 lockers. Each guest may bring up to 10 suitcases, but currently every guest has only one suitcase.

Under maximum-size reservation, the manager reserves 10 lockers for each guest. Ten guests exhaust the 100-locker budget while occupying only 10 lockers; the other 90 remain reserved but unused.

With on-demand allocation, each suitcase receives any free locker, and a directory records which lockers belong to each guest. At the current one-suitcase occupancy, the room can accommodate 100 guests. Additional suitcases still consume real capacity; allocation does not remove the storage limit.

Definition 10.4: PagedAttention

PagedAttention is an LLM serving memory management technique that applies virtual memory principles to KV cache allocation, storing attention states in noncontiguous, fixed-size physical blocks.

1. **Significance**: It eliminates external fragmentation within the fixed-block pool and bounds internal waste to the unused portion of each sequence's final block. Recovering capacity from contiguous preallocation permits larger concurrent batches; the throughput gain depends on sequence lengths, demand, and the serving bottleneck.
2. **Distinction**: A contiguous allocation must find a sufficiently large free region; supporting later growth may require reserving extra space or relocating the allocation. PagedAttention uses a block table to map logical sequence indices to physical memory pages, allocating blocks as the sequence grows without requiring adjacent free space.
3. **Common pitfall**: A frequent misconception is that PagedAttention speeds up *individual token math*. In reality, it is a capacity optimization: it improves *system-level efficiency* by allowing larger batch sizes, though it adds a small indirection overhead for the block-table lookups.

PagedAttention (Kwon et al. 2023), introduced in vLLM, applies virtual memory concepts to KV cache management. Instead of contiguous allocation, the KV cache is divided into fixed-size pages, using 16-token blocks in the original paper's default configuration, and sequences are allocated pages on demand. Figure 0.126 contrasts this physical fragmentation against virtualized memory management: whereas contiguous reservation strands non-adjacent free slots when earlier sequences finish, PagedAttention uses a per-sequence block table to map logical token pages to scattered physical HBM slots on demand. The block size fixes how many tokens each page holds, so a sequence's pages need not form one contiguous allocation run.

Beyond the fragmentation bounds in the definition, paging gives two further capacity advantages. Sequences grow page by page without worst-case preallocation, and common prefixes across requests can share physical pages directly in memory. Together, these properties turn KV cache capacity into a schedulable resource rather than a fixed per-request reservation. The price is indirection, because custom attention kernels must gather keys and values from noncontiguous blocks through each sequence's block table. Recovered capacity also raises throughput only when demand fills it. Allocator occupancy is not a throughput measurement, since throughput still depends on decode work, prefill interference, and the latency budget.

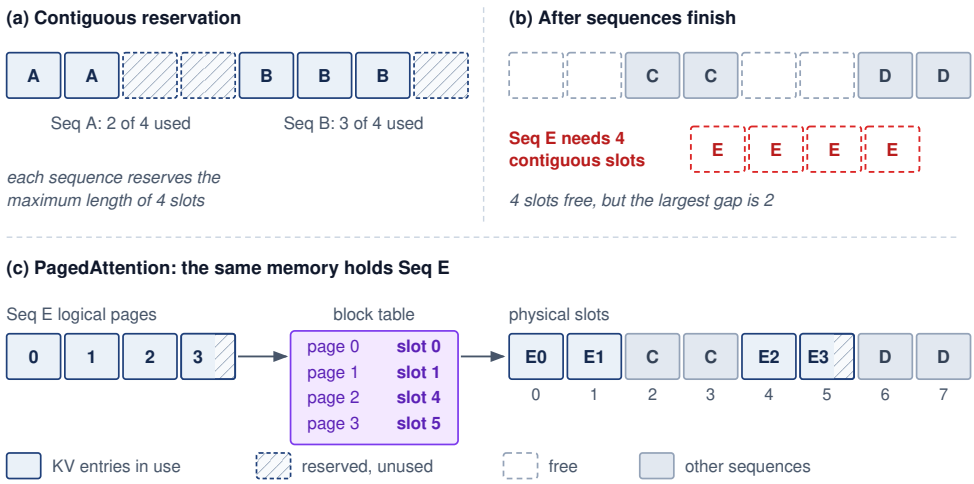


Figure 0.126: KV cache fragmentation and the PagedAttention solution: The panels replay the eight-slot example from the text. (a) Contiguous reservation holds the maximum length of four slots per sequence, so the slots Seq A and Seq B never fill sit idle (internal fragmentation). (b) After sequences finish, four slots are free but the largest contiguous gap is two, so Seq E, which needs four contiguous slots, cannot be admitted (external fragmentation). (c) PagedAttention maps Seq E's logical pages through a block table onto any free physical blocks, so the same memory now holds it; only the unfilled tail of its final block remains unused.

Prefix caching

Many LLM workloads share common prefixes across requests. System prompts like "You are a helpful assistant…" are prepended to every request. Few-shot examples use the same examples for many queries. Document context involves multiple questions about the same document. Recomputing these shared prefixes wastes both compute (prefill) and memory (duplicate KV cache entries).

Prefix caching shares KV cache entries across requests with compatible common prefixes. Reuse requires the same token prefix and the same model computation, including any task-specific weight adapter and other inputs that affect the cached state. The cache key must distinguish those conditions, and the service must restrict sharing to the permitted users or tenants. Matching visible text alone is insufficient. Figure 0.127 diagrams valid block-level sharing: logical tables for independent requests map common prefix tokens to physical blocks B0–B5, skipping their repeated prefill work while storing request-specific suffix state separately.

With PagedAttention, prefix caching uses copy-on-write semantics, in which shared blocks stay shared until a request must write into one, and that request then receives a private copy. Three requests that share a system prompt map their first six logical pages to the same physical blocks:

```
System prompt → Physical blocks [0, 1, 2, 3, 4, 5]

Request A page table: [0, 1, 2, 3, 4, 5, 10, 11]  <- shares prefix blocks
Request B page table: [0, 1, 2, 3, 4, 5, 12, 13, 14]  <- shares prefix blocks
Request C page table: [0, 1, 2, 3, 4, 5, 15]  <- shares prefix blocks
```

All three requests reference the same physical blocks for the system prompt. In this block-aligned example, their distinct suffixes occupy new blocks. If a shared prefix ends partway through a block, appending a different suffix writes into a shared block, which is exactly the copy-on-write case, so that request receives a private copy or another representation that preserves the shared contents. The savings can be substantial when many concurrent requests share a compatible system prompt; notebook 10.6 quantifies them for a typical chatbot deployment.

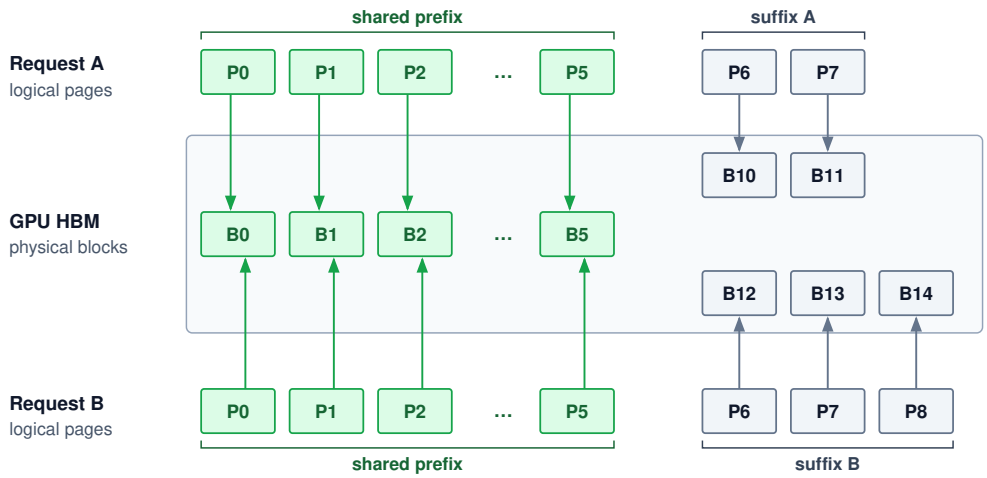


Figure 0.127: Prefix caching via block sharing: PagedAttention enables efficient prefix caching by allowing multiple sequences' block tables to point to the same physical blocks for shared content. In this example, the System Prompt is stored in blocks 0-5. Request A and Request B map their first 6 logical pages to these same physical blocks, storing only their unique suffixes in new blocks. This dramatically reduces memory usage and prefill computation for workloads with shared context.

Napkin Math 10.6: Prefix caching at scale

Scenario: A chatbot service uses a 2,000-token system prompt and serves 1,000 concurrent users. The illustrative model uses multi-head attention with 80 layers, 64 KV heads of dimension 128, and FP16 state. These full-width KV assumptions differ from the grouped-query attention of Llama-70B.

Without prefix caching:

- KV cache per user: $2000 + 500$ (avg response) $= 2{,}500$ tokens
- Total KV cache: 2,500 tokens $\times 1000 \times 2 \times 80 \times 8192 \times 2 = 6.6$ TB

With prefix caching:

- Shared prefix: 2,000 tokens (once)
- Unique per user: 500 tokens
- Total: $(2000 \times 1) + (500 \times 1000) = 502{,}000$
- Memory: $502{,}000 \times 2 \times 80 \times 8192 \times 2 = 1.3$ TB

Result: Prefix caching yields a 79.9 percent memory reduction in KV cache, a roughly 5× capacity ratio for this fixed request population. Actual admitted concurrency also depends on other memory use, generation lengths, and latency limits.

Systems insight: Prefix caching pays off when the prefix hit rate is high because many requests share a long prefix. Table 0.105 uses illustrative hit-rate envelopes to show where the technique changes serving capacity and where it does not; production sizing must derive the distribution from a request trace.

Table 0.105: Illustrative prefix-caching sensitivity: Assumed prefix hit rates and resulting KV-cache memory savings for three workload shapes. The values demonstrate sensitivity rather than population-wide norms; a serving team must measure exact-prefix reuse and prefix length on its own traffic.

Workload	Prefix Hit Rate	Memory Savings
Chatbot (same system prompt)	95%+	70-80%
Document QA (same doc)	80-90%	50-70%
General API (diverse)	20–40%	10–30%

KV cache compression and architectural optimization

Paged allocation in section 6 reduces unused reservations, while prefix sharing in section 6 avoids duplicate state. The next techniques reduce the bytes needed to represent that state. The calculation here uses a 64-KV-head multi-head attention (MHA) baseline so the grouped query attention subsection can isolate the head-count reduction as a separate architectural lever. For a 70B parameter model with 80 layers, 64 heads, head dimension 128, and sequence length 4096 in FP16, the KV cache requires:

$$\text{KV cache} = 2 \times 80 \times 64 \times 128 \times 4096 \times 2 \approx 10.7 \text{ GB (FP16)}$$

A single request's KV cache alone consumes a substantial fraction of the H100's 80 GB of HBM. For a batch of 8 concurrent requests, the KV cache would require 85.9 GB, leaving no room for model weights or runtime state. Quantization reduces bytes per cached element, while architectural optimization can reduce the number of cached elements. These complementary levers change different factors in the capacity calculation.

KV cache quantization

Reducing the size of cached values through lower precision provides direct memory savings. Weight-only quantization reduces weight precision while keeping activations in high precision. While effective for storage, this does not reduce the KV cache. KV cache quantization explicitly targets the activations, storing cached keys and values in INT8, FP8, or even INT4.

Storing the cache payload in INT4 reduces it to approximately 2.7 GB per request, a 4× reduction before quantization metadata and any higher-precision residual state. Recovered memory can admit more sequences, but throughput depends on kernel support, conversion costs, and the latency target. Quality must also be evaluated for the intended contexts. Cached keys and values also have different distributions from the model weights and from each other. Keys tend to carry channel-wise outliers, which favors quantizing them per channel, while values lack that channel pattern and can be quantized per token.

Grouped query attention (GQA)

Grouped query attention (Ainslie et al. 2023) changes the number of key-value heads cached per layer, while quantization changes bytes per cached element. GQA is a model architecture choice established through training or checkpoint adaptation, not a serving switch that discards heads from an unchanged model. Holding the other cache dimensions fixed, the representative comparison of 64 KV heads under MHA with 8 under GQA gives an 8× reduction:

$$\text{KV cache (GQA)} = 2 \times 80 \times 8 \times 128 \times 4096 \times 2 \approx 1.3 \text{ GB (FP16)}$$

At 1.3 GB, the GQA cache occupies less memory than the 10.7 GB required by MHA in this comparison. Combining GQA with INT8 KV cache quantization reduces the payload further, but per-request size still grows with context length. The architectural and numerical changes each require quality evaluation; recovered capacity permits additional sequences only while their execution remains within the service budget.

Napkin Math 10.7: The precision dividend with a full-width cache

Notebook 9.3 computed this dividend for the reference replica's eight-head GQA cache. Repeating it with the 64-head MHA baseline, whose requests carry eight times more KV state, separates what the attention layout changes from what precision changes.

This comparison uses a conservative decimal HBM budget of 80 GB per GPU, matching the nameplate label rather than the registered byte capacity used by the node estimator.

Problem: A team serves a 70B model on 8× H100 GPUs. Weights in FP16 consume 140 GB (17.5 GB/GPU). KV cache at FP16 consumes 10.7 GB per request. How does quantizing weights to INT4 and KV cache to INT8 change the maximum batch size?

Before optimization (all FP16):

- Weights: 17.5 GB/GPU
- Available for KV cache: 80 GB − 17.5 GB = 62.5 GB/GPU
- KV cache per request: 10.7 GB ÷ 8 ≈ 1.34 GB/GPU
- Maximum batch size: ⌊ 62.5 GB divided by 1.34 GB ⌋ ≈ 46 requests

After optimization (INT4 weights, INT8 KV cache):

- Weights: 17.5 GB $\times(4/16) = 4.38$ GB/GPU (INT4)
- Available for KV cache: 80 GB − 4.38 GB = 75.62 GB/GPU
- KV cache per request (INT8): 5.4 GB ÷ 8 ≈ 0.67 GB/GPU
- Maximum batch size: ⌊ 75.62 GB divided by 0.67 GB ⌋ ≈ 112 requests

Systems insight: The two layouts yield the same multiplicative dividend, because each maximum batch is free memory divided by per-request cache, and precision changes both quantities by the same factors whatever the head count. The layout sets the absolute count, and at either precision the MHA replica admits roughly an eighth as many requests. In both layouts, compressing the cache does more for admission than compressing the weights, since halving per-request state doubles the count while INT4 weights free only the weight share of each GPU. At serving scale the recovered headroom is an admission budget, not yet throughput. The scheduler converts it into completed requests only while the larger batch still meets TPOT, and the counts here omit runtime allocations and headroom, so they are optimistic upper bounds on what admission control should allow.

Speculative decoding as a serving policy


Speculative decoding pairs a small draft model proposing K tokens with a target model verifying them in one parallel forward pass. With the exact acceptance-and-correction sampling procedure, the emitted sequence preserves the target distribution. Approximate verification rules do not inherit that guarantee. The draft acceptance rate α_{acc} determines how much proposed work survives, while drafting and verification costs determine whether it saves time. At fleet scale, the scheduler must also decide when to enable speculation, how its memory cost interacts with admission, and whether it improves the endpoint's SLO-compliant capacity.

The latency benefit depends on accepted progress relative to drafting and verification time. When the draft model proposes K tokens, high acceptance rates allow the target model to verify and emit multiple tokens in a single forward pass. When acceptance drops, rejected tokens are discarded while drafting and verification still cost time; generation can become slower than ordinary decoding. With the simplified constant, independent acceptance probability at each draft position used in that analysis, the expected number of tokens emitted per round, including the correction token, is $\frac{1-\alpha_{\text{acc}}^{K+1}}{1-\alpha_{\text{acc}}}$, which collapses toward 1 as acceptance falls. The following calculation assumes $K = 5$ draft tokens, a draft step 20× faster than a target decode step, and a verification pass costing the same as one target decode step. Holding those costs fixed isolates sensitivity to acceptance:

↩ The draft-and-verify mechanics of speculative decoding are established in section 6.

Evaluating this model across representative acceptance regimes illustrates how sharply returns depend on draft accuracy: high acceptance ($\alpha_{\text{acc}} = 0.9$) yields an expected 4.69 tokens per verification

round for a 3.7× speedup, medium acceptance ($\alpha_{\text{acc}} = 0.7$) delivers 2.94 tokens per round for a 2.4× speedup, and low acceptance ($\alpha_{\text{acc}} = 0.5$) drops progress to 1.97 tokens per round, yielding a modest speedup of 1.6×.



Speedup shrinks quickly as draft acceptance falls.

Acceptance depends on the draft-target pair, sampling policy, and request distribution. The preceding calculations are sensitivity cases, not fixed acceptance rates for chat, reasoning, or code generation. A serving fleet must measure acceptance and useful token throughput for its actual traffic before selecting a speculation policy, and that policy must answer three serving concerns: memory, the SLO, and change over time.

The first concern is memory. The draft model is not free state. It requires memory for weights, and each in-flight request that uses it reserves additional draft KV state. Pairing a 7B draft model with a 70B target adds roughly 14 GB of FP16 weights per replica plus per-request draft cache. When colocated with the target, this *speculation tax* competes directly with the KV-cache admission budget developed in section 6: every gigabyte reserved for the draft is unavailable to target requests. Under a binding memory limit, that reservation lowers maximum concurrency. Placing the draft on separate devices preserves target memory at the cost of additional hardware and communication. The admission controller and the speculation policy therefore require a joint capacity and latency evaluation.

The second concern is which service-level objective the endpoint must meet. At sufficient acceptance, speculation can reduce TPOT; draft execution and cache residency can also reduce admission capacity. Neither latency nor aggregate-throughput benefit follows from the endpoint label alone. The scheduler should compare SLO-compliant goodput with and without speculation under the intended load. TTFT needs separate measurement because draft setup and prefill can add work before the first response token.

The third concern is that acceptance and load change over time. A scheduler can enable speculation when measured TPOT or goodput improves, then disable it when verification cost outweighs accepted-token progress. Disabling draft execution alone does not free resident draft weights; recovering that capacity requires unloading them, and releasing draft KV pages requires ending or migrating the associated speculative state. Alternative draft mechanisms change this budget: self-speculative decoding reuses the target model, Medusa (Cai et al. 2024) adds prediction heads, and lookahead decoding avoids a separate draft model. Each requires its own quality, acceptance, and resource evaluation.

Prefill-decode disaggregation

Chunked prefill keeps prefill and decode on one worker and bounds how much prompt work lands between decode steps. Disaggregation takes the other route and gives each phase its own hardware. The KV-cache sizing of section 6 now supplies what that choice costs, because the cache a prefill builds is exactly the payload the decode pool must receive.

Figure 0.128 partitions the serving pipeline into specialized physical tiers. In the illustrated long-prompt, small-decode-batch regime, prefill is compute bound while decode is memory-bandwidth bound. Separate pools can therefore emphasize compute throughput for prefill and memory bandwidth for decode, with a remote direct memory access (RDMA) KV-cache transfer connecting the phases (Zhong et al. 2024). Separation prevents the two phases from competing on the same accelerator and permits independent parallelism and capacity plans. The transfer and queueing at each pool still contribute to request latency, and different batch or context sizes can change which resources bind.

The disaggregation decision therefore depends on a quantitative contract, not on the phase labels alone. If prefill produces M_{KV} bytes of attention state and the usable inter-pool bandwidth is β, then the handoff consumes at least

$$T_{\text{handoff}} = \alpha + \frac{M_{\text{KV}}}{\beta}, \tag{0.42}$$

where α includes transfer setup and queueing for the operating point being evaluated; it is not a fixed network latency once load changes. The payload term sets the scale. A 128K-token request on the GQA model of notebook 10.5 carries tens of gigabytes of KV state, so moving it over a single 450 GB/s NVLink direction takes on the order of a hundred milliseconds, and an inter-node link takes

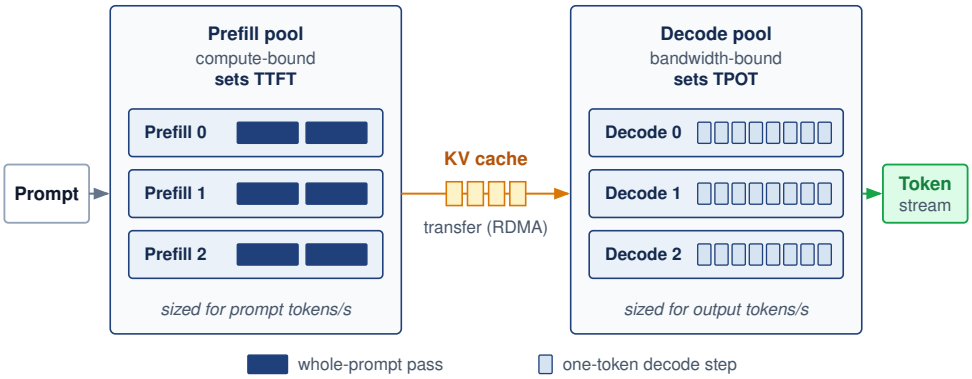


Figure 0.128: Disaggregated Serving Architecture: A long-prompt, small-decode-batch regime separates compute-bound prefill instances from memory-bandwidth-bound decode instances, mediated by RDMA KV-cache transfer. Because prefill sets time to first token and decode sets time per output token, each pool is sized for its own token rate. Other batch and context sizes can change the binding resources.

longer still. Spreading the transfer across a tensor-parallel group divides that time only when each device has its own path to its counterpart in the decode pool. Because M_{KV} grows linearly with prompt length, the long prompts that make disaggregation attractive are also the prompts whose handoff costs most, and that cost lands on TTFT.

Equation 0.42 therefore makes placement part of the service contract. The prefill pool must sustain the admitted prompt-token rate, the decode pool must sustain the admitted output-token rate, and both pools need headroom for the request-length distribution. Disaggregation earns its transfer tax only when eliminating phase interference and balancing the two pools raises SLO goodput. Otherwise, colocated chunked prefill avoids the additional handoff and pool coordination.

Memory management best practices

Effective KV-cache management begins with capacity accounting rather than an eviction policy. The serving process first reserves memory for weights, activations, runtime overhead, and safety headroom, then treats the remaining HBM as a managed pool for active sequences:

```
Available GPU memory = Total - Weights - Activations - Overhead
KV pool size = 0.9 * Available  # Leave 10% headroom

Max concurrent sequences = KV pool size / (avg_seq_length * per_token_cache)
```

That budget estimates how many sequences can coexist, but an average length does not reserve space for future growth. Admission must account for the admitted requests' remaining budgets. LRU eviction can reclaim retained prefix blocks that no active request references. Reclaiming an active sequence's state instead requires a preemption decision, made with the victim policy of section 5. What capacity accounting adds is the observation that freeing the most bytes is not necessarily the cheapest recovery, because the largest sequence is also the most expensive to swap or rebuild.

Example 10.7: KV cache memory hierarchy

Scenario: A multi-tenant LLM serving system experiences KV-cache HBM exhaustion (80 GB limit) during peak concurrency.

Diagnosis: Pure HBM allocation limits node concurrency to 50 active sequences in this scenario. Implementing a 3-tier memory hierarchy (HBM → CPU DRAM → Non-Volatile Memory Express (NVMe) SSD) allows swapping inactive sequence pages to CPU DRAM or NVMe. The illustrative swap budgets of 1–5 ms and 10–50 ms, respectively, require validation for the bytes

transferred, effective bandwidth, and contention; they are not fixed properties of the storage tiers.

Systems lesson: In this scenario, multi-tier paging raises retained sequence capacity from 50 to 500, while the active HBM-resident set remains limited to 50. Suspended sequences must be restored before execution resumes under this policy. The extra retention does not establish a throughput gain; restoration costs must fit the affected requests' deadlines. Streaming active state from another tier would be a different execution policy with transfer costs on the decode path.

Adapter state and locality

KV-cache management accounts for the attention state of concurrent sequences; adapter serving adds another claim on the same memory budget. A low-rank adaptation (LoRA) adapter is a user- or task-specific weight delta that must be available when its request executes. LoRA modifies a shared base model without copying all of its weights. For 10,000 users with distinct adapters to the same 140 GB base model, sharing the base avoids storing a complete model per user. The serving process can keep the base resident while loading the adapters needed by active requests. Whether adapter storage or transfer becomes limiting depends on the active adapter mix, ranks, and reuse.

Systems Perspective 10.2: The context switch of machine learning

Adapter locality becomes a performance constraint when a scheduled request needs weights that are not resident. Loading those weights from host memory resembles part of an operating-system context switch: execution must wait for the required state unless transfer overlaps other useful work. An adapter already in HBM need not be transferred from the host on every generation step. Coordinating admission with adapter placement can reduce these stalls, while grouping requests by adapter can improve reuse at the cost of waiting for compatible work. The policy must balance locality against the latency and fairness of less frequent adapters.

Multi-LoRA serving and batched adapter execution

In multi-tenant environments, thousands of fine-tuned adapters share a single base foundation model. For a linear projection layer with base weights $\mathbf{W}_0 \in \mathbb{R}^{d_{\text{out}} \times d_{\text{in}}}$, an adapter k parameterizes the forward transformation using low-rank decomposition matrices $\mathbf{A}_k \in \mathbb{R}^{r_k \times d_{\text{in}}}$ and $\mathbf{B}_k \in \mathbb{R}^{d_{\text{out}} \times r_k}$ with rank $r_k \ll \min(d_{\text{in}}, d_{\text{out}})$ (typically $r \in \{8, 16, 64\}$), as formulated in equation 0.43:

$$\mathbf{y} = \mathbf{x}\mathbf{W}_0^T + \frac{\gamma_k}{r_k}\mathbf{x}\mathbf{A}_k^T\mathbf{B}_k^T \tag{0.43}$$

where $\mathbf{x} \in \mathbb{R}^{1 \times d_{\text{in}}}$ is a row vector, $\mathbf{y} \in \mathbb{R}^{1 \times d_{\text{out}}}$, and γ_k is a fixed scaling factor, the hyperparameter usually written α in LoRA papers and renamed here because α already denotes startup latency and draft acceptance in this chapter. Each adapted projection adds $r_k(d_{\text{in}} + d_{\text{out}})$ parameters instead of a full $d_{\text{in}}d_{\text{out}}$ weight matrix. The resident adapter budget therefore depends on which layers are adapted, their dimensions and ranks, precision, and the number of simultaneously loaded tenants.

However, serving requests with heterogeneous adapters in a single continuous batch introduces a critical execution dilemma between batch efficiency and kernel dispatch overhead.

Grouping requests by adapter reduces the distinct adapter state needed for a batch. For low-traffic adapters, however, waiting for a large compatible group increases formation delay, while dispatching immediately can leave a small batch. An adapter receiving dense traffic may benefit from grouping. The difficulty is retaining that locality without preventing requests for different adapters from sharing base-model execution.

Packing requests with different adapters into one batch allows the base projection $\mathbf{X}\mathbf{W}_0^T$ to execute as a shared dense GEMM. A naive implementation then dispatches separate small kernels for each request's adapter $(\mathbf{A}, \mathbf{B})$. Hundreds of such launches per layer can make host dispatch and launch latency significant; an illustrative per-kernel cost ($\sim$ 3–5 µs per kernel) accumulates even when each

adapter performs little arithmetic. Small kernels can also leave GPU streaming multiprocessors (SMs) underused. The following batched operation removes the need for one launch per request.

Definition 10.5: Batched gather-matrix-vector multiplication (BGMV)

Batched gather-matrix-vector multiplication (BGMV) is a GPU kernel operation that batches matrix-vector products across heterogeneous adapters, dynamically gathering adapter weights from a memory pool according to a per-token adapter index vector.

1. **Significance**: It reduces per-request kernel launch overhead in multi-adapter serving, allowing heterogeneous adapters to share kernel launches. The remaining overhead depends on adapter ranks, batch composition, and memory locality.
2. **Distinction**: A single dense GEMM applies one weight matrix across its input rows. BGMV gathers the adapter-specific weight slice for each element, combining heterogeneous matrix-vector products in one kernel operation.
3. **Common pitfall**: Batched execution does not itself solve allocation waste. Loading and unloading differently sized adapters can fragment a contiguous allocator. Paged adapter storage addresses that separate problem, provided the execution kernels support its layout.

Systems such as Punica (Chen et al. 2024) and S-LoRA (Sheng et al. 2024) resolve the execution dilemma through two architectural mechanisms (definition 10.5):

Batched gather-matrix-vector (BGMV) kernels Instead of launching separate kernels for every request, batched or segmented gather-matrix-vector operations group heterogeneous adapters within each projection. Down-projection and up-projection can use separate kernels; Punica distinguishes shrink and expand operators (Chen et al. 2024).

For input activations $\mathbf{X} = [\mathbf{x}_1; \mathbf{x}_2; \ldots; \mathbf{x}_B] \in \mathbb{R}^{B \times d_{\text{in}}}$, the scheduler constructs an integer mapping vector $\mathbf{m} \in \mathbb{Z}^B$ where $\mathbf{m}[i] = k(i)$ denotes the adapter ID assigned to request i. The mathematical dataflow for each token is:

1. **Gather**: Select token activation $\mathbf{x}_i$ and the adapter pointer from $\mathbf{m}[i]$.
2. **Down-projection**: Compute the vector-matrix product $\mathbf{z}_i = \mathbf{x}_i \mathbf{A}^T \in \mathbb{R}^{1 \times r}$. Because $r \ll d_{\text{in}}$, this intermediate is smaller than the input activation; its physical placement depends on the kernel.
3. **Up-projection**: Multiply $\mathbf{z}_i$ by $\mathbf{B}^T \in \mathbb{R}^{r \times d_{\text{out}}}$, yielding the adapter delta $\Delta \mathbf{y}_i = \frac{\gamma}{r} \mathbf{z}_i \mathbf{B}^T$.
4. **Accumulation**: Add $\Delta \mathbf{y}_i$ to the output of the base model projection $\mathbf{y}_i = \mathbf{x}_i \mathbf{W}_0^T + \Delta \mathbf{y}_i$.

By gathering adapter weights within batched kernels, BGMV avoids dispatching a separate kernel for each request's adapter. The gain must be measured against the actual adapter mix; irregular access and small ranks can still limit achieved bandwidth.

Unified paged adapter memory management S-LoRA (Sheng et al. 2024) jointly manages adapter weights and KV state in a unified GPU memory pool. Its page holds a vector along the shared hidden dimension, rather than a fixed operating-system-sized byte allocation. Adapter matrices $\mathbf{A}_k$ and $\mathbf{B}_k$ occupy noncontiguous pages, allowing adapters of varying ranks ($r \in \{8, 16, 32, 64\}$) to share capacity with growing KV caches. Paging reduces fragmentation; both kinds of state still consume the same finite pool.

The published design keeps adapters in host memory and uses the waiting queue to predict which weights the next batch will need. Prefetching overlaps adapter transfers with current execution when sufficient time and free GPU memory are available. A cache miss whose transfer cannot be hidden still delays the affected request.

When scaling across multiple devices, S-LoRA aligns adapter inputs and outputs with the base layer while communicating low-rank intermediates (Sheng et al. 2024). With the weight orientation in equation 0.43, Megatron's column-parallel and row-parallel conventions describe $\mathbf{W}_0^T$. Two meanings of "rank" meet here, so *device* below means a tensor-parallel GPU, and the LoRA rank stays r_k.


In a column-parallel layer, $\mathbf{W}_0$ and $\mathbf{B}_k$ are split across devices along their output rows, and $\mathbf{A}_k$ along its r_k rows. Each device computes its slice of the r_k-dimensional intermediate $\mathbf{xA}_k^T$, an AllGather assembles the full intermediate on every device, and each device multiplies it by its local slice of $\mathbf{B}_k^T$ to produce its share of the output.

In a row-parallel layer, $\mathbf{W}_0$ and $\mathbf{A}_k$ are split along their input columns, and $\mathbf{B}_k$ along its output rows. Each device computes a partial r_k-dimensional intermediate from its input slice, and an AllReduce sums those partials. Each device then computes its slice of the adapter output, adds it into the matching positions of its base-layer partial output, and joins the base layer's final AllReduce.

This layout reduces adapter replication but does not eliminate communication. Its additional collectives operate on rank-dimensional intermediates; the final output assembly shares the base layer's collective. The trade-off is lower adapter memory per rank against added synchronization.

KV pages and adapter deltas share HBM with the base weights. Even when long contexts make the cache larger than the weights, reducing the weight footprint can release capacity for those other allocations. Weight quantization addresses this part of the budget, with numerical quality and execution cost determining how much of the storage saving becomes useful serving capacity.

Weight Quantization for Serving



INT4 turns a two-GPU model into a one-GPU candidate.

Weight quantization for serving is a bottleneck-selection decision. Reducing precision can turn a 140 GB FP16 weight payload into a 35 GB INT4 payload, potentially making a model that previously needed multiple GPUs resident on one. The ideal payload reduction is 4×; metadata, runtime buffers, and KV state still enter the deployment's memory budget. Quality loss is not fixed by bit width, and reduced storage does not guarantee proportional speedup. Both must be measured for the deployed representation and workload.

> **Systems Perspective 10.3: Quantization as a serving constraint**
>
> In serving systems, quantization is not merely a model-compression technique; it changes the binding resource. Post-training quantization can shrink a deployed model without retraining, while quantization-aware training spends training effort to preserve accuracy at lower precision. The systems question is which constraint the lower-precision representation relaxes: GPU memory capacity, HBM bandwidth during decode, accelerator instruction support, or cost per served token.

↩ The trade-off between post-training quantization and quantization-aware training is established in section 3.

Quantization reduces numerical precision of model weights and activations, decreasing their memory footprint by 2–4×. Reducing weight traffic can improve bandwidth-bound decode, provided kernel support and dequantization overhead preserve the saving. The serving decision is which quantity should shrink: resident weights for fit, bytes moved per decode step for bandwidth, activations for prefill throughput, or the precision path supported by target hardware. Serving at scale also introduces distinct challenges: a deployment team may need post-training quantization without the original training corpus, quality must be preserved across diverse inputs, and hardware deployment targets vary from data center GPUs to edge accelerators. Lack of the original corpus does not imply data-free calibration; the methods that follow may still require representative deployment inputs. Production inference therefore starts from a decision model rather than from the methods. Table 0.106 ties each method family to the serving constraint it relaxes, and the subsections that follow take the methods in that order, recording for each only what changes when it is deployed: calibration cost, kernel path, and the evaluation a serving team must run.

Table 0.106: Serving quantization decision model: Quantization methods are useful only when they relax the resource that binds the serving system. The method family follows from the bottleneck: fit, bandwidth, prefill compute, or outlier robustness.

Binding serving constraint	Representation change	Method family	Risk to test before rollout
Model does not fit in memory	Quantize weights only	GPTQ, AWQ	Calibration mismatch and quality regression
Decode is bandwidth-bound	Reduce bytes read per token	W4A16 weight-only paths	Kernel support and KV-cache headroom

Binding serving constraint	Representation change	Method family	Risk to test before rollout
Prefill is compute-bound	Quantize weights and activations	SmoothQuant W8A8	Activation outliers and INT8 hardware path
Outliers block low precision	Change the coordinate basis before quantization	Rotation-based methods	Transform overhead and limited runtime path

LLM-specific quantization challenges

Large language models can exhibit activation ranges that make low-precision deployment difficult. The outlier activation problem arises when a few hidden-dimension channels carry magnitudes far larger than typical values (Xiao et al. 2023). A coarse scale loses resolution for smaller values, while a narrow range clips large ones. This trade-off is not unique to language models, but its channel structure motivates the methods below. Section 3 develops the outlier mechanism and the algorithms that answer it (LLM.int8(), GPTQ, AWQ, and SmoothQuant); the subsections that follow keep only what each method changes for a serving deployment.

For a serving deployment the consequence is that no single INT8 scale suits both the outlier channels and the typical values, which is why the methods that follow differ, each protecting a different part of the serving contract.

GPTQ layer-by-layer weight quantization

GPTQ (Frantar et al. 2023), which uses second-order error compensation, is the weight-only choice when deployment needs 4-bit compression after training and can afford calibration data. Its serving value is that the model gets smaller without a full retraining run.

GPTQ rounds weight columns while compensating the remaining columns using statistics collected from calibration inputs. Calibration and error compensation are offline costs paid when producing the quantized artifact, rather than on each serving request. Their duration depends on model size, calibration workload, hardware, and implementation; a fixed sample count is not a general deployment requirement. The resulting artifact still requires suitable inference kernels, and its quality must be tested when production inputs differ from the calibration distribution.

Table 0.107 identifies the measurements needed to evaluate a GPTQ deployment:

Table 0.107: GPTQ evaluation contract: Nominal bit width alone does not determine quality, compression, or speed. Report the deployed representation and measured workload rather than extrapolating fixed values across model sizes.

Measurement	Comparison contract
Quality change	Same model, task, and evaluation data before and after quantization
Memory reduction	Include scales, zero points, packing, and runtime buffers
Quantization time	State calibration data, hardware, and implementation
Serving performance	Compare SLO-compliant throughput at the same workload

GPTQ provides weight compression without a full retraining run, using a layer-local reconstruction objective to control error. That objective does not guarantee task quality after errors propagate through the complete model. Calibration coverage, quantization settings, and the deployed kernel path therefore belong in the evaluation alongside artifact size.

AWQ activation-aware weight quantization

Activation-aware weight quantization (AWQ) (Lin et al. 2024) approaches weight-only compression through activation statistics. It scales selected weight channels before quantization, applying the inverse scale to their inputs, often through a preceding operation. This protects salient channels without GPTQ's sequential error-compensation procedure. Calibration cost and quality still depend on the model and data. If the scale cannot be fused into the deployed graph, an additional runtime operation spends some of the latency saving; it does not by itself erase the smaller weight footprint.

Table 0.108 compares the methods' error-control mechanisms and calibration roles, then the deployment check each requires; both need the same quality evaluation on the target model and task.

Table 0.108: AWQ vs. GPTQ: The methods use different calibration mechanisms. Quality, calibration time, and serving speed require comparison on the same model, data, precision, and runtime; neither column implies a universal ranking.

Aspect	GPTQ	AWQ
Error control	Approximate second-order error compensation	Activation-guided channel scaling
Calibration role	Estimate layer-input statistics	Identify salient channels and select scales
Deployment check	Supported packing and inference kernels	Supported packing, fused scales, and kernels

The engineering choice follows the measured quality budget and deployed kernel path, not a fixed quality or calibration-speed ordering.

SmoothQuant activation-weight migration

SmoothQuant (Xiao et al. 2023) targets W8A8 deployments where activation quantization matters, especially compute-bound prefill. Its per-channel rescaling transfers part of the activation range into the weights while preserving the full-precision layer calculation. Subsequent rounding to INT8 still introduces error. Folding scales into existing operations can avoid separate scaling kernels, but realized overhead depends on the deployed graph and kernels. Calibration must test the resulting ranges because production activation extremes can differ from those used to choose the scales.

In the W8A8 deployment regime, SmoothQuant enables INT8 quantization for both weights and activations. Table 0.109 bounds what each 8-bit path can buy relative to the FP16 baseline:

Table 0.109: W8A8 SmoothQuant vs. weight-only quantization: Ceilings derived from bytes per weight and the H100's INT8-to-FP16 peak ratio, not measured speedups. Both schemes halve weight bytes, so both can at most halve weight traffic in bandwidth-bound decode. Only W8A8 moves prefill onto INT8 Tensor Cores. Realized gains and quality loss depend on kernels, calibration, and the request mix.

Configuration	Weight bytes	Prefill compute ceiling	Decode weight-traffic ceiling	Quality
FP16 (baseline)	1×	1×	1×	Baseline
W8A16 (weights only)	Reduced 2×	1× (FP16 math)	Up to 2×	Measure vs. FP16
W8A8 (SmoothQuant)	Reduced 2×	Up to 2× (INT8 Tensor Cores)	Up to 2×	Measure vs. FP16

The critical distinction is which ceiling binds. Among these configurations, W8A8 enables INT8 matrix multiplication, with the illustrated 2× peak ratio providing a compute ceiling rather than a measured prefill speedup. Both quantized schemes halve the weight payload. If weight reads dominate decode, activation quantization does not further reduce that traffic, although it can change other memory and compute costs. Quantization and dequantization also add work. The end-to-end benefit therefore depends on the prompt/output mix, batch sizes, and measured execution path.

Rotation-based quantization

Traditional quantization methods (GPTQ, AWQ, SmoothQuant) address quantization error through compensation or rescaling. Rotation-based quantization (Ashkboos et al. 2024) changes the coordinate basis so large values are less concentrated in a few channels. This can make lower precision viable without retaining designated outlier channels in higher precision.

The magnitude of an individual coordinate depends on the chosen basis. An appropriate rotation can redistribute a large coordinate across many components while preserving the full-precision computation through corresponding weight transformations. This redistribution does not guarantee uniform values or negligible rounding error for every input; the resulting quantized model still requires quality evaluation.

QuaRot (quantization with rotation)

QuaRot uses orthogonal Hadamard transforms to redistribute large coordinates before low-bit quantization.[6] The transform can be chosen without calibration data, but the full weight-quantization pipeline may use calibrated GPTQ. Orthogonal transformations preserve the full-precision calculation when corresponding weight and activation transforms are applied consistently; quantization still introduces approximation. Runtime rotations add work, so the serving decision compares measured quality and goodput on the target kernel path.

Table 0.110 contrasts two outlier-management mechanisms. The listed precision targets are evaluated operating points, not universal limits or guarantees.

Table 0.110: QuaRot vs. SmoothQuant: Calibration requirements belong to the complete quantization pipeline. Quality and speed must be measured for the selected model, bit widths, and implementation.

Aspect	SmoothQuant	QuaRot
Calibration	Activation statistics for scales	Rotation is data-free; GPTQ weight quantization uses calibration
Evaluated target	W8A8	W4A4
Runtime work	Scaling can be fused	Some rotations remain online
Outlier handling	Transfers scale between activations and weights	Redistributes coordinates

Table 0.111 lists what a like-for-like quality comparison across these precision choices must report for a 70B-class model:

Table 0.111: Quantization quality comparison contract: Perplexity or task-accuracy change must be measured on the same model, evaluation data, and runtime for every precision choice. The rows record what each comparison must report, not results.

Method	Precision	Report against the FP16 baseline
FP16	W16A16	Baseline perplexity and task accuracy on the target data
SmoothQuant	W8A8	Quality change, with the calibration set stated
GPTQ	W4A16	Quality change, group size, and kernel path
QuaRot	W4A4	Quality change, online-rotation overhead, and kernel path

The QuaRot authors report that rotation keeps W4A4 quality close to FP16 on the models they evaluate, which is what makes 4-bit activation quantization a serving candidate at all (Ashkboos et al. 2024). Its 4-bit weights *and* 4-bit activations cut memory for the quantized tensors by roughly 4× relative to FP16, but its quality relative to GPTQ's 4-bit weight-only path must still be measured on the deployment's own model and task. Learned-rotation variants optimize the rotation matrices themselves to reduce quantization error, adding offline optimization cost; the learned rotations are not a guarantee of globally optimal quality. Rotation methods extend low-precision choices, but the useful trade-off depends on measured quality, transform overhead, and the deployed kernel path.

Hardware-deployment co-design

Hardware and software support determine which quantization savings reach the serving workload. Native low-precision arithmetic can raise compute throughput, but a weight-only kernel can also save HBM capacity and traffic by reading packed weights and converting them on chip. The arithmetic format and the resident storage format need not be identical.

Table 0.112 summarizes NVIDIA Tensor Core precision support across Ampere and Hopper:

[6] **Hadamard Rotation in QuaRot (Quantized Rotation)**: QuaRot transforms activations as $\mathbf{X}' = \mathbf{X} \cdot \mathbf{H}$ and weights as $\mathbf{W}' = \mathbf{H}^T \cdot \mathbf{W}$, where $\mathbf{H}$ is an orthogonal Hadamard matrix, computed structurally without being stored. Orthogonality preserves $\mathbf{XW} = \mathbf{X}'\mathbf{W}'$, so the layer output is unchanged. The outlier-spreading effect is concrete: a vector $[1000, 1, 1, 1]$ with one extreme value becomes roughly $[502, 500, 500, 500]$ after the transform, so no single coordinate dominates the quantization range.

Table 0.112: Tensor core precision support and peak ratios: Native precision support across NVIDIA Ampere and Hopper Tensor Cores. The 2× ratio at INT8 and FP8 compares peak arithmetic throughput on those native paths, not measured serving speed. A100 provides native INT4 Tensor Core operations, although realized LLM speedup still depends on framework and kernel support; H100 INT4 deployment remains software/framework-dependent, and native FP4 first appears in Blackwell.

Format	Ampere (A100)	Hopper (H100)	Peak ratio vs. FP16
FP16	Yes	Yes	1×
BF16	Yes	Yes	1×
INT8	Yes	Yes	2×
FP8 (E4M3)	No	Yes	2×
INT4	Yes (native Tensor Cores)	Software/framework-dependent on H100; native FP4 is a Blackwell feature	workload-dependent

For batch-one decode dominated by weight reads, the following proportionality estimates throughput using the active model weights as the byte count. It omits KV-cache traffic and execution overhead and does not describe aggregate throughput at arbitrary batch size:

$$\text{Decode throughput} \propto \frac{\text{Memory bandwidth}}{\text{Model size in bytes}}$$

In the ideal memory-bound case, reducing FP16 weights to 4-bit values cuts weight traffic by 4×, but realized decode throughput depends on kernel support, dequantization overhead, KV-cache precision, batch shape, and whether HBM bandwidth is truly the bottleneck. The value of 4-bit serving is therefore strongest when it increases model residency or batch capacity, and throughput gains should be validated on the target serving workload.

The mapping in table 0.113 gives candidate configurations based on runtime support and the resource being constrained. W4A16 can reduce resident weight memory, W8A8 can exploit INT8 arithmetic, and FP8 can use a supported native path. Hardware capability narrows the choices but does not select the winner; the quality target and measured workload determine which representation is useful.

Table 0.113: Quantization deployment configurations: Mapping from quantization scheme to deployment target and supporting frameworks. W4A16 is common for consumer and memory-constrained deployments; W8A8 unlocks INT8 Tensor Core throughput; FP8 is the native low-precision path on H100/H200-class deployments; W4A4 is an aggressive compression target with more limited framework support.

Quantization	Best For	Framework Support
W4A16 (GPTQ/AWQ)	Consumer GPUs, memory-constrained	vLLM, TensorRT-LLM, llama.cpp
W8A8 (SmoothQuant)	INT8 accelerators, high throughput	TensorRT-LLM, ONNX Runtime
FP8	H100/H200 deployments	TensorRT-LLM
W4A4	Research, extreme compression	Limited

Runtime contract for quantized serving

Production serving frameworks determine whether a quantized artifact retains its intended memory and execution advantages. Expanding the entire model into resident FP16 weights can forfeit capacity savings, while converting packed weights inside a kernel can preserve reduced HBM storage and traffic. The serving stack must therefore report the resident representation and kernel path, budget KV state around actual allocations, and expose quality and latency regressions. Table 0.114 summarizes these responsibilities; the distinction between full-model expansion and on-chip conversion is essential when interpreting its dequantization warning.

Table 0.114: Quantized serving runtime contract: Framework-specific APIs differ, but every production path has to preserve representation, choose supported kernels, plan memory, and validate quality under the deployed traffic mix.

Runtime responsibility	Why it matters
Preserve the quantized artifact	Full-model expansion into resident FP16 forfeits the reduced weight storage and traffic.
Select compatible low-precision kernels	Unsupported operators fall back to slower or higher-precision execution.
Plan memory around weights and KV cache	The capacity gain matters only if the freed memory becomes useful batch headroom.
Validate quality and latency together	A lower-bit path that meets latency but fails task quality is not a serving win.

Weight quantization reduces the weight allocation, while PagedAttention reduces waste in allocating KV state. Ignoring other allocations gives the following optimistic concurrency estimate. A usable integer limit must round down after reserving runtime buffers, quantization metadata, and safety headroom; sharded deployments must satisfy the budget on every device:

$$\text{Max batch} = \frac{\text{GPU Memory} - \text{Quantized Weights}}{\text{KV Cache per Sequence}}$$

This comparison uses a conservative decimal HBM budget matching the A100 nameplate label, rather than the registered byte capacity used by the node estimator. A 70B model with 4-bit weights requires approximately 35 GB, leaving 45 GB on an 80 GB A100 for KV cache. With FP16 KV cache at about 2.6 GB per 1K-token sequence for the MHA baseline, this supports about 17 concurrent 1K-token sequences before other runtime overheads. With FP16 weights, the same 70B model would not fit on one A100 at all, so weight-only quantization changes both feasibility and batch capacity.

Quantization selection guidelines

The final selection must satisfy memory, quality, and latency requirements together. Native support makes a precision path a candidate; it does not establish the model's quality at that precision. Nor is there a universal quality ordering between 4-bit weight-only and 8-bit weight-and-activation quantization. Evaluate both against the same task baseline, retaining the reference representation when alternatives fail the quality budget. For compute-bound prefill, W8A8 offers the illustrated 2× INT8 compute ceiling. For decode dominated by weight reads, W4A16 can cut the weight payload by up to 4×, provided conversion and other costs leave a useful saving. Latency-sensitive and throughput-oriented services can benefit from either path under suitable workloads.

These precision choices affect cost per million useful tokens. The residency calculation above is what makes fewer GPUs possible at all, because INT4 weights shrink the resident payload enough for a 70B replica to fit on fewer devices. Table 0.115 isolates the effect of GPU count by assuming equal per-GPU prices and the same completed token rate across three configurations. Under that contract, reducing the number of billed GPUs reduces cost proportionally. The calculation does not establish that the smaller replicas sustain the same rate or meet the same quality and latency targets:

Table 0.115: Quantization impact on serving cost: Estimated cost per million tokens at three configurations. At equal unit prices and unchanged useful token throughput, halving the GPU count halves the cost; halving it again brings the per-million-token cost to one quarter of the FP16 baseline. The cost savings come almost entirely from fewer GPUs rather than from per-GPU throughput gains.

Configuration	Cost per 1M tokens (estimated)
FP16 on 8× A100	$2.40
AWQ 4-bit on 4× A100	$1.20
AWQ 4-bit on 2× A100	$0.60

The illustrated 2–4× cost reduction follows from the assumed device-count reduction at unchanged useful throughput. If the smaller replica completes fewer qualifying tokens per second, cost per

token falls by less and can increase. A deployment comparison must therefore combine billed replica cost with measured SLO-compliant output under the same quality contract.

Precision moves the capacity wall without removing it. A 175-billion-parameter model still needs about 87.5 GB for its 4-bit weight payload alone, more than one 80 GB H100 holds before KV state and runtime allocations. Keeping that representation accelerator-resident requires distributing it across devices. Offloading to host memory is another placement choice, but introduces transfers that must fit the latency budget. Sharding addresses the capacity problem while adding communication and coordination to each replica.

Model Sharding for Inference

Quantization shrinks the representation; sharding keeps it and divides it instead. When a deployment must retain the 70B model's FP16 weights in accelerator memory, or when even the quantized state exceeds one device, multiple GPUs hold partitions and execute together as one logical replica. The resulting design adapts tensor and pipeline parallelism from training, but must evaluate their communication and scheduling costs against inference deadlines.

Memory and latency triggers for model sharding

Model sharding for inference addresses memory capacity and execution latency through different mechanisms. Table 0.116 identifies the constraints that motivate each candidate strategy; the timing analysis determines whether parallel execution repays its communication cost.

The first driver is memory capacity. If the selected representation must remain in accelerator memory but does not fit on one device, the replica needs multiple devices. For a model with P parameters at precision b bits, equation 0.44 gives the weight payload before metadata and runtime state:

$$M_{\text{weights}} = P \times \frac{b}{8} \text{ bytes} \tag{0.44}$$

Applied to the 70B model in FP16 (16 bits), equation 0.44 recovers the payload quoted since section 2:

$$M_{\text{weights}} = 7 \times 10^{10} \times \frac{16}{8} = 140 \text{ GB}$$

The result exceeds the 80 GB capacity of an H100 GPU, establishing a weight-only lower bound of 2 shards for an accelerator-resident replica. KV state, buffers, replication within the chosen partition, and uneven placement can require a larger degree.

The second driver is latency. Even when a model fits in memory, sharding can reduce latency by parallelizing computation. Equation 0.45 is the Fleet Law (equation 0.3) applied to a single inference request, separating the compute term that sharding divides from the communication and synchronization terms it adds:

$$T_{\text{step}}(N) = \frac{T_{\text{compute}}}{N} + T_{\text{comm}}(N) + T_{\text{sync}}(N) - T_{\text{overlap}} \tag{0.45}$$

where N is the number of devices in the sharding group, $T_{\text{comm}}(N)$ is the communication overhead, $T_{\text{sync}}(N)$ is synchronization overhead, and T_{overlap} is communication hidden behind useful compute. In the common no-overlap simplification with negligible extra synchronization, this reduces to $T_{\text{compute}}/N + T_{\text{comm}}(N)$. Sharding provides latency benefit only when the nonoverlapped overhead is smaller than the time saved through parallelization.

Table 0.116: Sharding triggers: Minimum degree follows from the actual state representation, per-device capacity, and workload. A model family name alone does not determine the required number of shards.

Sharding Trigger	Capacity or timing contract	Candidate strategy
Memory (weights)	FP16 weight bytes plus runtime state exceed one device	Tensor or pipeline

Sharding Trigger	Capacity or timing contract	Candidate strategy
Memory (KV cache)	Context, concurrency, KV heads, and precision exceed cache budget	Tensor/cache partitioning
Memory (embeddings)	Resident table state exceeds one storage/serving shard	Embedding sharding
Latency	Parallel compute savings exceed added communication and synchronization	Tensor parallelism

Tensor parallelism

Tensor parallelism (Shoeybi et al. 2019) distributes individual layers across multiple devices, enabling parallel computation within each layer. The column-row partitioning scheme introduced for training applies here: splitting the first feed-forward linear layer by columns and the second by rows requires one AllReduce for that feed-forward sublayer. The attention output requires another, giving two AllReduce operations per transformer block in the scheme analyzed here. For transformer models, the primary target is the attention mechanism and feed-forward layers, which contain the majority of computation.

The multi-head attention computation naturally partitions across attention heads. For a model with N_{heads} attention heads and tensor-parallel degree N_{TP}, an even partition assigns $N_{\text{heads}}/N_{\text{TP}}$ heads per device when the head count is divisible by that degree. With GQA, the smaller number of KV heads can require a different partition or replicated KV state. The local attention calculation for the evenly partitioned case is:

↩ Column-row tensor partitioning and its two AllReduce operations per transformer block are established in section 7.

$$\text{Attention}_i = \text{softmax}\left(\frac{\mathbf{Q}_i\mathbf{K}_i^T}{\sqrt{d_{\text{head}}}}\right)\mathbf{V}_i \text{ for heads } i \in \{1, \ldots, N_{\text{heads}}/N_{\text{TP}}\}$$

Each device applies its shard of the attention output projection to its local heads. An AllReduce operation then sums those projected partial outputs across devices. The reduction combines contributions to the same output coordinates, rather than summing unrelated head outputs directly. Its latency includes collective startup and coordination as well as payload transfer over the interconnect.

The feed-forward layer (typically two linear transformations with activation) partitions along the hidden dimension, with the first linear layer split by columns and the second by rows, so the activation between them never leaves its device.

The communication pattern for tensor-parallel inference follows a two-phase synchronization per layer. Figure 0.129 diagrams this execution flow across two GPU ranks, isolating how column-row GEMM decompositions confine cross-device synchronization to two AllReduce barriers over NVLink, one after the multi-head attention projection and one after the feed-forward layer.

The inference time with tensor parallelism follows equation 0.46:

$$T_{\text{inference}} = \frac{T_{\text{compute}}}{N_{\text{TP}}} + 2 \times T_{\text{allreduce}}(M) \tag{0.46}$$

Equation 0.46 is the per-layer instance of equation 0.45. Here T_{compute} is the sequential compute time of one layer rather than of the whole request, N_{TP} is the tensor-parallel degree, and M is the full activation payload contributed by each rank to each AllReduce (the message size M of the ring AllReduce cost model derived in section 8 and recalled with the other collective costs in section 8). Compute is ideally divided across ranks; the partial activation output still has the full reduced shape, (tokens in the step) × (hidden width) × (bytes per element). The factor of 2 accounts for the two AllReduce operations per transformer layer (attention and feed-forward).

↩ Hiding tensor-parallel collectives behind compute on one node, and what that overlap can and cannot recover, is established in section 6.

Example 10.8: Tensor parallelism for Llama-70B

Scenario: An engineering team deploys Llama-70B (70B parameters, FP16 footprint 140 GB) across an 8-GPU H100 node with NVLink (Touvron et al. 2023).

Diagnosis: The calculation assumes 30 ms of serial layer compute as a reference, independent of the devices required to hold the weights: 12 ms for attention and 18 ms for the feed-forward

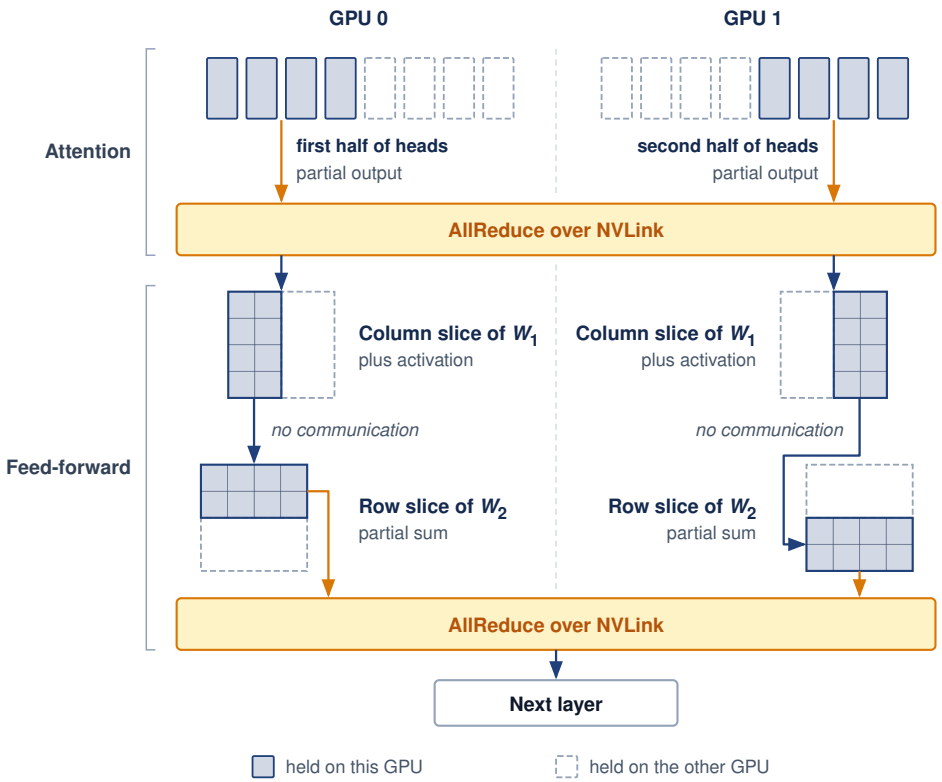


Figure 0.129: Tensor parallelism for inference: Computation is distributed across devices by splitting tensor operations. Attention heads are partitioned across GPUs, requiring an AllReduce operation to synchronize results. Feed-forward networks use a column-row splitting strategy that requires only one AllReduce synchronization per block. This partition can reduce latency when saved compute exceeds communication cost. The illustrated two-collective layer uses a fast local interconnect; its NVLink label is aggregate bidirectional bandwidth, not the per-direction transfer rate.

block. That reference describes a long-prompt prefill, in which every prompt token passes through the layer in one step, so it is far larger than one layer's share of a decode step on the reference replica. Ideal eight-way division gives 1.5 ms and 2.25 ms, and the two AllReduce operations of equation 0.46 add an assumed 0.3 ms each, for 4.35 ms per layer.

Systems lesson: The illustrative eight-way model gives a 6.9× reduction relative to its serial-compute reference (prefill time reduced from 2,400 ms to 348 ms). The entire shortfall from the ideal 8× is the two collectives, a fixed cost per layer that dividing compute cannot shrink. Their share of the layer therefore grows as per-device compute falls, which is why a decode step, with far less compute per layer than this prefill reference, feels the collective cost most.

Pipeline parallelism for inference

Pipeline parallelism distributes layers across devices sequentially, with each device handling a subset of layers. Unlike tensor parallelism, there is no synchronization within a layer, only between pipeline stages.

For inference, pipeline parallelism creates bubbles differently than in training. Figure 0.130 contrasts single-request latency against pipelined throughput: executing an isolated request serially across four GPU stages leaves three accelerators idle at every step, whereas maintaining multiple in-flight requests fills the pipeline and amortizes the initial bubble across steady-state token delivery.

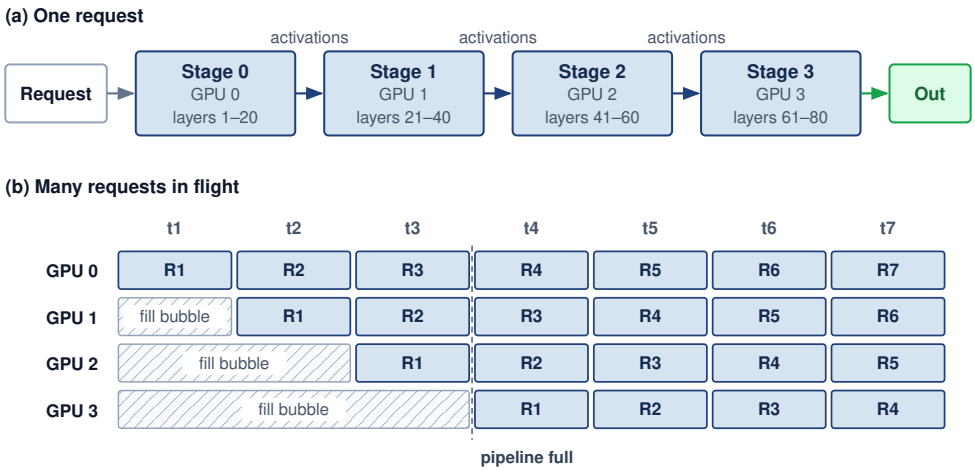


Figure 0.130: Pipeline parallelism bubbles: (a) An 80-layer model split into four stages passes one request's activations from stage to stage, so splitting the layers alone does not shorten its sequential computation; it must still traverse all four stages. (b) With many requests in flight, later stages idle during the fill bubble, and from slot t4 onward every stage is busy and one request leaves the pipeline per slot. Pipeline parallelism therefore suits throughput-oriented serving better than latency-critical interactive serving.

For a single request, pipeline staging does not parallelize the dependent layers. If stage execution times are unchanged, the request still pays their sum plus transfers, so staging alone provides no execution-latency reduction. A comparison against a memory-constrained implementation that offloads weights can differ because keeping stages resident changes those execution costs.

Pipeline parallelism instead scales throughput by sustaining multiple concurrent requests across execution stages, as tracked in the steady-state schedule of figure 0.130(b). Once the pipeline reaches saturation, throughput is limited by the slowest stage. For N_{PP} balanced stages with negligible transfer overhead, this is N_{PP} times the throughput of executing the whole model sequentially on one device, not N_{PP} times a single stage's throughput. An individual request still traverses every stage, so its execution latency remains approximately the sum of the stage times.

Pipeline parallelism is particularly appropriate for inference when memory constraints require sharding across devices but latency targets are relaxed, when aggregate throughput matters more than individual request latency, or when inter-device network bandwidth is limited to point-to-point communication rather than high-speed AllReduce fabrics.

Table 0.117 captures the trade-offs between these two sharding approaches:

Table 0.117: Pipeline vs. tensor parallelism: Key trade-offs between layer-internal tensor splitting (can reduce single-request latency when compute savings exceed collective cost) and inter-layer pipeline staging (overlaps concurrent requests but introduces pipeline bubbles). Throughput is relative to sequential execution of the whole model on one device; per-layer AllReduces keep tensor parallelism below the $N_{\text{TP}}\times$ ideal, and balanced, full pipelines approach $N_{\text{PP}}\times$.

Aspect	Tensor Parallelism	Pipeline Parallelism
Single-request latency	Compute term reduced up to $N_{\text{TP}}\times$	No reduction from overlapping this request alone
Throughput	Below $N_{\text{TP}}\times$ (AllReduce cost)	Up to $N_{\text{PP}}\times$ (pipelined)
Communication pattern	AllReduce (bandwidth-intensive)	Point-to-point (latency-sensitive)
Memory efficiency	Activations replicated	Activations passed along
Complexity	Higher (requires custom kernels)	Lower (layer-level partitioning)

The decision starts with capacity feasibility, then compares latency and throughput on the available topology. Tensor parallelism can shorten layer execution when that saving exceeds its collective cost. Pipeline parallelism distributes resident layers with transfers between stages, but needs concurrent work and balanced stage times for high throughput. Neither a fast interconnect nor a relaxed deadline alone establishes the best choice; the request mix and measured execution costs determine the useful partition.

Expert parallelism for MoE models


Mixture-of-experts (MoE) models, such as DeepSeek-V3 or Mixtral, introduce unique serving challenges beyond those of dense models. In an MoE transformer layer, the feed-forward network is replaced by multiple parallel "expert" sub-networks and a lightweight router that selects a subset of experts for each token.

With fixed expert dimensions and a fixed number selected per token, adding experts grows total parameter capacity without proportionally increasing expert arithmetic per token. Routing, shared layers, and communication still contribute work. Expert parallelism places different experts on different GPUs to distribute their storage and execution. It is a placement choice when the model and workload require multiple devices, rather than an intrinsic requirement of every MoE model.

MoE economics and capacity planning

MoE serving separates two capacity measures. The *total parameter count* sets the weight-storage requirement at the chosen precision, while the *active parameter count* estimates the weight-related arithmetic and traffic for each token. Neither count includes all runtime costs. An accelerator-resident deployment must accommodate inactive experts as well as active ones, even though each token uses only a subset.

The following comparison isolates weight-related costs at batch size 1. Streaming all weights of a dense 400B FP16 model moves 800 GB per step. Counting only DeepSeek-V3's 37B active parameters gives approximately 74 GB in FP16, a 10.8× reduction in weight bytes per token. The proportional estimate of weight-related arithmetic is 10.8× lower. These are payload and arithmetic comparisons, not equivalent-quality model comparisons or measured speedups; cache traffic, expert placement, routing, and communication affect realized latency.



MoE keeps every expert resident but activates few per token.

The trade-off is resident capacity: keeping all experts on accelerators avoids fetching inactive experts when routing changes. Offloading can reduce that resident footprint but adds transfer and scheduling costs. DeepSeek-V3's full model in FP16 requires approximately 1342 GB, requiring many devices if the entire FP16 weight set remains accelerator-resident.



Napkin Math 10.8: MoE capacity planning

This comparison uses a conservative decimal budget of 80 GB per GPU, matching the H100 nameplate label rather than the registered byte capacity used by the node estimator.

Problem: A team deploys DeepSeek-V3 (671B total parameters, 37B active per token) for a chatbot application. The model uses FP8 weights (1 byte per parameter). The cluster has 8-GPU nodes, each with 8× H100 GPUs (80 GB HBM per GPU, 640 GB per node). How many nodes are needed, and what is the per-token decode latency?

Math:

1. **Memory**: Total weight memory = 671 GB. A single node (640 GB) is insufficient. 2 provide 1,280 GB in aggregate. The remaining capacity must still accommodate KV state, metadata, buffers, and any replicated weights on each device.
2. **Latency**: Count 37B active parameters (37 GB) per decode step. If their reads were evenly distributed across 16 GPUs, each would read about 2.3 GB. At the stated 3.35 TB/s HBM bandwidth, $T_{\text{read}} \approx 0.69$ ms. The scenario adds 0.3 ms for routing. Expert placement and token routing do not guarantee this balance, especially at batch size 1.
3. **Floor**: The simplified sum is ≈ 1.0 ms/token, corresponding to 1,000 tokens/s at batch size 1 under these assumptions. It is an optimistic estimate, not a measured rate or a

rigorous latency bound; compute, KV traffic, synchronization, and imbalance remain unmodeled.

Systems insight: Sparse activation separates resident parameter capacity from the work selected for one token. Planning an accelerator-resident 671B model therefore requires both a per-device memory budget and a timing model for the actual expert placement. Dividing total active bytes by device count does not establish that every device can contribute bandwidth equally.

Expert parallelism and load balancing

Distributing MoE models across GPUs introduces expert parallelism: each GPU holds a subset of experts, and tokens are routed to the GPU holding their assigned expert. In an MoE layer, a gating network selects k_{experts} experts (out of N_{experts} total) for each token:

$$\text{Output} = \sum_{i \in \text{top-}k} p_{\text{gate}_i} \cdot \text{Expert}_i(\text{input})$$

↩ Top-k_{experts} gating, and why sparse activation separates parameter count from per-token work, are established in section 6.

An even expert placement assigns each device N_{experts}/N experts, where N is the number of expert-parallel devices. Figure 0.131 traces the path for a token: a top-2 softmax gating router selects expert destinations, an AllToAll dispatch sends the token representations to those ranks, and an AllToAll gather returns outputs for weighted recombination. An expert not selected by this token may process another token in the batch, so the illustration does not imply that every unselected device is idle.

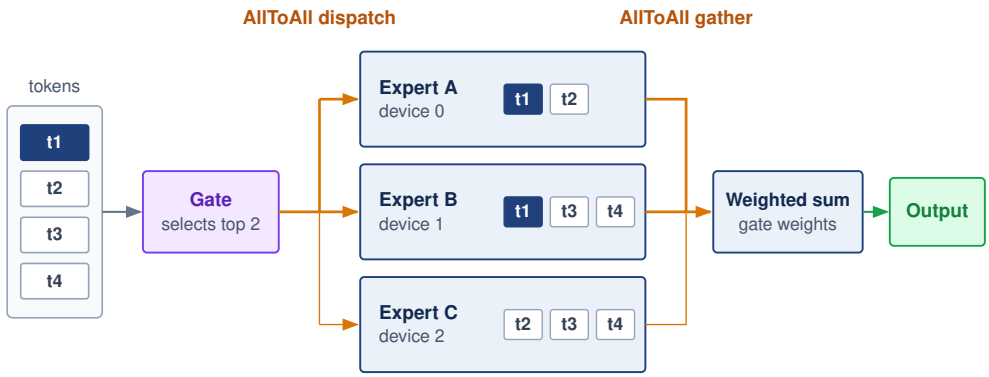


Figure 0.131: Mixture-of-experts (MoE) routing: Expert parallelism distributes "experts" across different devices. For each token, a gating mechanism selects the top-k_{experts} experts. An AllToAll communication step dispatches tokens to the devices hosting their selected experts, the selected experts process the tokens in parallel while experts unselected by this token may serve other tokens, and a second AllToAll step gathers the results for the weighted sum. Distributed expert capacity adds all-to-all communication overhead.

The communication pattern differs from tensor parallelism. AllReduce delivers a combined reduction result (*same data to all devices*) and maps onto ring or tree schedules whose per-link traffic is fixed by the message size. Expert parallelism instead uses AllToAll to deliver routed token representations (*different data to different devices* based on routing), so the bytes each link and receiver carries depend on which experts the router selects; the host of a popular expert can become an incast point for many senders. If some experts receive more work, their hosts can determine completion time while less-loaded hosts wait. Balancing the number of stored experts does not guarantee balanced token traffic.

Training and serving offer different controls over this imbalance. An auxiliary loss can encourage more balanced expert use during training without guaranteeing balance on future traffic. An expert capacity factor limits accepted tokens relative to an even allocation; 1.25× is an illustrative setting,

not a universal requirement. Dropping excess work or rerouting it to another expert changes the model computation and requires quality validation. Expert buffering instead retains excess work for later execution, spending latency and queue capacity. These controls trade quality, waiting, and utilization rather than guaranteeing that routing remains balanced.

Routing failure modes

Router behavior affects both system performance and model quality. Expert collapse concentrates training traffic on a small subset of experts, leaving other experts undertrained despite their storage cost. Unstable assignments can also hinder specialization. At serving time, a changed input distribution can alter expert popularity and create hotspots without any change to the stored model. Token dropping skips selected expert work when a capacity limit is exceeded; in implementations that retain only the residual path for dropped assignments, the resulting computation differs from the uncapped model. Its quality impact must be evaluated along with any throughput improvement.

These failure modes follow from the basic MoE serving trade-off:[7] computation is dynamically routed to different experts based on input, so the routing pattern becomes a systems workload rather than only a model-internal choice. Popular models like Mixtral (A. Q. Jiang et al. 2024) use MoE to achieve high capacity with lower inference cost.

[7] **MoE (Mixture-of-Experts) Serving Trade-Off**: Only a subset of experts activates per token (2 of 8 in Mixtral, 8 of 256 routed experts in DeepSeek-V3). Keeping all weights accelerator-resident gives a total-to-active weight ratio of roughly 3.6× (Mixtral) to 18× (DeepSeek-V3). Expert parallelism distributes that storage while adding token-routing communication; offloading is an alternative that trades resident capacity for weight transfers.

Example 10.9: Expert parallelism for Mixtral-8x7B

Scenario: Mixtral-8x7B (46.7B total parameters, ~12.9B active per token) is served across a 4-GPU group using top-2 routing.

Diagnosis: Replicating all 8 experts on every GPU requires the full 93.4 GB FP16 weight set per device, more than one 80 GB H100 holds. Placing 2 experts on each GPU (4-way expert parallelism) cuts each device's share to about 25.8 GB, the shared attention layers plus its local experts, but every MoE layer now needs an AllToAll dispatch and gather to move tokens to the devices that hold their selected experts.

Systems lesson: Expert parallelism trades AllToAll communication for per-GPU parameter memory. The trade pays only when the collective, repeated at every MoE layer, fits inside the decode budget that the smaller resident footprint makes possible.

Expert parallelism couples state placement to input-dependent access. Embedding-heavy recommendation models face a related problem: entity popularity determines which stored vectors receive traffic. Their sharding strategy must therefore balance storage and lookup load, just as expert placement must account for both resident weights and routed tokens.

Embedding sharding for recommendation systems

Recommendation systems typically contain embedding tables that dwarf dense model weights in size. Meta's DLRM reference architecture uses model parallelism over embedding tables to mitigate memory constraints while scaling dense layers separately (Naumov et al. 2019). At production scale, this embedding-heavy structure requires sharding strategies distinct from tensor or pipeline parallelism.

Row-wise sharding partitions embedding tables by row (entity ID):

$$\text{Shard}_s = \{\mathbf{e}_j : \text{hash}(j) \bmod N_{\text{shards}} = s\}$$

Each shard contains approximately $N_{\text{entities}}/N_{\text{shards}}$ embeddings, where N_{entities} is the total number of entities and N_{shards} is the shard count.

Column-wise sharding partitions each embedding vector across devices:

$$\mathbf{e}_j = [\mathbf{e}_j^{(0)}, \mathbf{e}_j^{(1)}, ..., \mathbf{e}_j^{(N_{\text{shards}}-1)}]$$

Each device stores a slice of every embedding. Hybrid sharding combines both approaches: the hottest embeddings are replicated or column-sharded to spread their heavy access, while the long tail uses row sharding. The choice of embedding sharding strategy depends on lookup patterns and communication overhead. Table 0.118 compares row-wise, column-wise, and hybrid approaches:

Table 0.118: Embedding sharding strategies: Comparison of row-wise, column-wise, and hybrid embedding placement strategies, balancing lookup locality against network communication collectives and memory load balancing.

Sharding Strategy	Lookup Pattern	Communication	Best For
Row-wise	Single device per lookup	AllToAll gather	Uniform access patterns
Column-wise	All devices per lookup	AllGather	Hot embeddings
Hybrid	Varies by embedding	Mixed	Production RecSys

The trade-off is locality against load balance. Row-wise sharding keeps each embedding vector whole on one device, while column-wise sharding spreads its dimensions across devices. Both require returning the pieces needed by the consuming request, but placement alone does not prescribe a collective: the runtime can use shard RPCs or collectives according to where inputs and outputs reside. Figure 0.132 illustrates AllToAll and AllGather realizations of these layouts. Hybrid placement can replicate or column-partition hot embeddings while row-sharding the cold tail, trading additional storage and communication against concentrated lookup load.

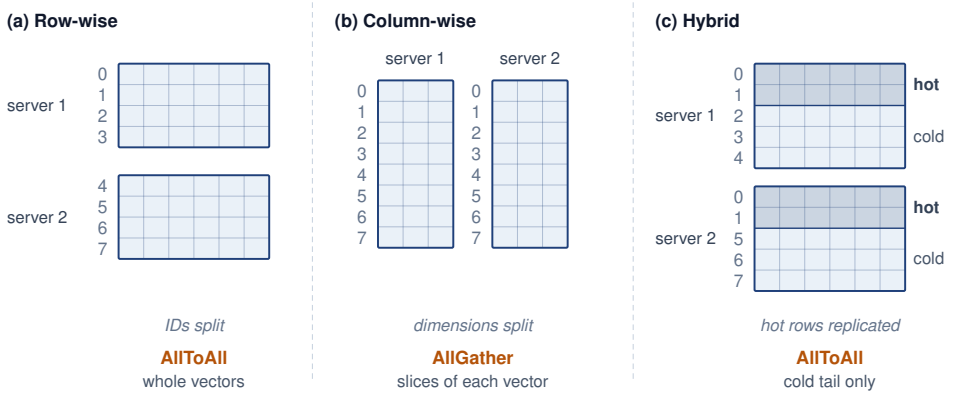


Figure 0.132: Embedding sharding strategies: Row-wise sharding places complete embedding vectors on specific servers based on entity ID, requiring a network gather for lookup. Column-wise sharding splits each vector across all servers, allowing parallel local lookups followed by an AllGather, which is efficient for popular "hot" embeddings. Hybrid sharding combines these approaches, using replication or column sharding for hot items and row sharding for the "cold" long tail to balance load and memory.

The following Archetype B scenario combines row-wise, column-wise, and hybrid sharding. The 100 TB platform-wide resident budget deliberately sits well above the 10 TB-plus embedding tables of a single Archetype B model, so that the sharding arithmetic is stressed at the upper end of the regime.

Lighthouse 10.1: Archetype B (DLRM at Scale): Embedding sharding budget

Consider an Archetype B recommendation workload with a large entity catalog and a smaller resident embedding tier:

Scale:

- Resident embedding budget (platform-wide): 100 TB
- Entity catalog: 10 trillion identifiers
- Embedding dimension: 128–256
- Shards: 1,000+ servers

The arithmetic of these bullets is the design constraint. A dense INT8 table with 10 trillion entities and 128 dimensions would require at least 1,280 TB, while 100 TB across the same entity count averages only 10 bytes per entity, a fraction of one 128-byte vector. Most entities therefore cannot hold a resident vector at all. The resident tier keeps the frequently accessed subset, and the long tail lives in another tier or a compressed representation, which is exactly the split the sharding strategy below is built around.

Sharding strategy:

The tier percentages below describe the admitted resident population, not the full entity catalog. Replica bytes count against the platform-wide resident budget, so the admitted population and replication scope must be chosen together.

- **Hot embeddings** (top 1 percent by access frequency): Replicated within selected shard groups
- **Warm embeddings** (next 10 percent): Column-sharded with 8-way parallelism
- **Cold embeddings** (remaining 89 percent): Row-sharded with consistent hashing

Each inference request requires approximately 5,000 embedding lookups. A deliberately naive sequential implementation would issue one RPC per lookup; the batched design instead applies several optimizations. Batch accumulation collects lookups for 1 ms. Lookup deduplication removes duplicate entities across requests. Shard-aware batching groups lookups by destination shard. Parallel dispatch sends batched requests to all shards simultaneously. Streaming assembly reconstructs embeddings as responses arrive.

Illustrative before-and-after assumptions for sequential dispatch versus parallel shard batching appear in table 0.119:

Table 0.119: Illustrative embedding lookup comparison: Assumed latency and bandwidth compare sequential per-lookup RPCs with shard-batched parallel dispatch. One dispatch wave still contains multiple network requests; it does not mean one RPC to the entire fleet.

Metric	Without Optimization	With Optimization
Sequential dispatch waves	5,000 individual RPCs	One parallel wave; multiple shard RPCs
Lookup latency	50 ms	2 ms
Network bandwidth	10 Gbps	40 Gbps (burst)

The lighthouse lesson is that sparse embedding placement and lookup coordination can dominate DLRM-scale serving even when dense arithmetic has spare capacity. The illustrated workload motivates measuring shard traffic and lookup latency before adding dense compute.

Hybrid sharding strategies

Production systems often combine multiple sharding strategies because no single axis satisfies every inference constraint. Hybrid sharding composes memory capacity, latency, and communication requirements: one axis may keep weights resident, another may reduce per-token latency, and a third may route sparse components without forcing dense layers onto the wrong device. Three recurring combinations illustrate the pattern:

Tensor and pipeline parallelism combine when models require both memory distribution and latency reduction:

```
8 GPUs organized as 2 by 4 (pipeline stages by tensor parallel):

Stage 0 (Layers 1-40):  TP across GPUs 0,1,2,3
Stage 1 (Layers 41-80): TP across GPUs 4,5,6,7
```

The four-way tensor split can cut per-layer compute time by up to $4\times$, while the two pipeline stages complete the eight-way memory distribution; pipelining adds no per-request latency benefit of its own.

Expert and tensor parallelism combine for MoE models where individual experts are large:

```
Mixtral with large experts:

- Expert parallelism: Distribute 8 experts across 8 GPU groups
- Tensor parallelism: Each expert spread across 2 GPUs
- Total GPUs: 16
```

Embedding and dense parallelism serve recommendation models with both large embeddings and large dense components:

```
DLRM-scale model:

- Embedding sharding: 1,000 shards across CPU servers
- Dense model: 8-way tensor parallel across GPUs
- Communication: Embeddings gathered to GPU, processed, returned
```

Hybrid sharding buys fit or latency by adding new communication patterns at every boundary between shards. The next question is whether the communication tax stays inside the latency and throughput budget.

Communication overhead analysis

The practical speedup from sharding depends critically on communication efficiency. Each sharding strategy has characteristic communication patterns with different bandwidth and latency requirements.

Equation 0.47 quantifies AllReduce communication time for tensor parallelism, where data is combined from all devices with the result available on all devices.

$$T_{\text{allreduce}} \approx 2(N-1)\alpha + \frac{2(N-1)}{N} \times \frac{M}{\beta} \tag{0.47}$$

where N is the number of devices, M is the collective payload size, α is startup latency, and β is the interconnect bandwidth. The factor of 2 accounts for the ReduceScatter and AllGather phases. Section 8 derives this ring-AllReduce cost from its two-phase schedule and shows its bandwidth-optimal $2(N-1)/N$ scaling, showing that the per-rank bandwidth volume approaches a constant multiple of the payload while the ring startup term still grows with device count.

Equation 0.48 expresses the simpler point-to-point communication for pipeline parallelism, where data flows from one device to the next.

$$T(n) = \alpha + \frac{n}{\beta} \tag{0.48}$$

where n is the point-to-point payload size, α is the network latency, and n/β is the transfer time. Equation 0.49 captures the more complex AllToAll communication for expert parallelism, where each device exchanges distinct data with every other device.

$$T_{\text{alltoall}} = (N-1) \times \left(\alpha + \frac{M/N}{\beta}\right) \tag{0.49}$$

The AllToAll expression assumes equal-size peer exchanges scheduled in pairwise rounds. Skewed expert traffic, network contention, or a different collective algorithm can change its timing. Across all three models, usable bandwidth β and startup latency α provide an initial communication budget, not a complete prediction of request latency. The chosen topology and collective implementation must sustain that budget under the intended concurrent load.

↩ AllToAll schedules, and why skewed destination traffic makes them harder to bound than AllReduce, are established in section 10.

Communication overhead depends heavily on the interconnect technology. Table 0.120 records the physical bandwidth, latency, and intended scope of each candidate interconnect:

Table 0.120: Datacenter interconnect specs: Bandwidth, latency, and intended scope for NVLink, PCIe Gen5, InfiniBand HDR, and 100G Ethernet, establishing the physical limits that bound achievable sharding speedups.

Interconnect	Bandwidth	Latency	Use Case
NVLink (H100)	900 GB/s	500 ns	Intra-node TP
PCIe Gen5	64 GB/s	1 µs	Intra-node (no NVLink)
InfiniBand HDR	200 Gb/s (25 GB/s)	7 µs	Inter-node
Ethernet 100G	100 Gb/s (12.5 GB/s)	50 µs	Inter-node (commodity)

Table 0.121 translates those bandwidths into AllReduce time for an 8-way tensor-parallel layer (an illustrative 8 MB payload per AllReduce, independent of a particular batch or sequence shape) as a fraction of the 30 ms serial prefill-layer reference from example 10.8. In a real step the payload is the layer's output activation, so it grows with the number of tokens in the step just as the layer's compute does; the table holds both fixed so that only the interconnect changes the share:

Table 0.121: AllReduce cost by interconnect: AllReduce time for an 8 MB activation across NVLink, InfiniBand, and 100G Ethernet, with each as a fraction of a 30 ms transformer-layer budget, using a bandwidth-only ring model with startup latency omitted. The percentages concern one collective, not the full layer or end-to-end request.

Interconnect	AllReduce Time	Share of 30 ms Layer
NVLink	0.03 ms	0.10%
InfiniBand	0.56 ms	1.9%
100G Ethernet	1.12 ms	3.7%

The table isolates bandwidth cost, and against a 30 ms prefill layer even commodity Ethernet looks affordable. Two omissions reverse that impression. First, the startup and synchronization terms are absent. The 0.3 ms per collective assumed in example 10.8 is an order of magnitude above the bandwidth-only NVLink time here, so if that assumption holds, nearly all of it comes from startup, synchronization, and launch costs rather than transfer. Second, decode divides a much smaller per-layer compute time across the group while still paying two collectives per layer for every generated token. In that regime the fixed per-collective latency in table 0.120, not bandwidth, sets the overhead share, and that decode regime is why tensor-parallel groups are normally kept inside one NVLink domain.

Each NVLink generation[8] has raised this intra-node ceiling.

[8] **NVLink and tensor-parallel overhead**: A faster NVLink generation raises the local communication ceiling, but the realized tensor-parallel overhead still depends on message size, collective implementation, topology, and how much computation can overlap the transfer.

Sharding strategy selection

The choice of sharding strategy depends on model architecture and deployment priorities. Table 0.122 evaluates each approach across four critical factors:

Table 0.122: Sharding strategy selection guide: Evaluation of tensor, pipeline, expert, and embedding sharding across latency targets, throughput priorities, interconnect constraints, and implementation complexity.

Factor	Tensor Parallel	Pipeline Parallel	Expert Parallel	Embedding Shard
Latency priority	Compute savings exceed collectives	No staging-only reduction	Routing-dependent	Lookup-dependent
Throughput priority	Collective-limited	Full, balanced pipeline	Balanced expert traffic	Balanced lookup load
Interconnect limited	Poor fit	Good fit	Moderate	Good fit
Implementation effort	High	Low	Moderate	High

Strategy selection starts from the deployment bottleneck. Tensor parallelism is a candidate when reduced layer execution can repay frequent collectives; pipeline parallelism distributes layers and can sustain throughput when enough concurrent work fills the stages. Expert and embedding sharding distribute sparse state while adding routed communication. These choices can be combined, but each must fit the per-device memory budget and the measured latency contract.

Once a replica's memory footprint and execution capacity are established, demand determines how many replicas the service needs. The next decision is where to send each arriving request. Routing must account for work already in progress and reusable state, so that replica capacity becomes useful fleet capacity.

Load Balancing and Request Routing

Suppose ten model replicas are serving traffic when a request for a 5,000-word document summary arrives. Assigning it to an overloaded replica adds waiting and can increase interference for work already admitted there. The effect depends on admission, batching, and priority policies. Round-robin assignment does not inspect those differences in remaining work. A state-aware router uses memory and queue information to choose a feasible destination, while limiting the cost and staleness of its observations.

> Lighthouse 10.2: Archetype B (DLRM at Scale): The tail at scale
>
> Archetype B (DLRM at Scale) uses p99 ≤ 100 ms as its illustrative latency target. At 10^7 QPS, an event probability of 10^{-4} implies an expected 1,000 such events per second. This count motivates examining the tail, but does not identify its cause. Two-choice routing can reduce imbalanced queuing delay $L_{\text{lat,queue}}$; traces must establish whether queueing, inference time $L_{\text{lat,infer}}$, or another component drives the misses.

Load balancing principles


Load balancing serves two primary goals that sometimes conflict: latency minimization and utilization maximization. Latency minimization routes requests to the replicas that can serve them fastest, considering current queue depth and processing time; utilization maximization spreads load evenly to avoid both idle replicas and overloaded replicas. The tension arises because latency-optimal routing may concentrate load on fast replicas, reducing their performance and leaving other replicas underutilized.

Evaluation therefore requires complementary signals for latency and fleet balance. Queue lengths reveal accumulated requests, but service times and scheduling order determine how long those requests wait. Estimated work per replica and its variance are more informative when request costs differ. Utilization spread reveals idle and saturated replicas, while decision overhead measures the cost of computing the routing choice. These signals must be evaluated alongside completed-request tail latency and admission outcomes; balanced counts alone do not establish a healthy service.

Round-robin and random assignment

The simplest load-balancing strategies assign requests without considering server state. Round-robin sends request 1 to server 1, request 2 to server 2, and so on, which gives perfect distribution only when servers are homogeneous and request processing times are identical. Random assignment selects a server uniformly at random for each request; with many requests it converges to an even mean distribution, but its variance is higher than round-robin. Both strategies are reasonable baselines for identical servers, yet production serving rarely satisfies that assumption. Heterogeneous GPU generations, different memory configurations, variable request sizes, warmup behavior, and replicas nearing memory limits all make the state of the server fleet matter.

A static placement model isolates the imbalance caused by random choice: place R equal-size jobs sequentially into R initially empty bins, without departures. With uniform independent choices, the expected maximum bin occupancy follows the classical balls-into-bins result (Mitzenmacher 2001) in equation 0.50:



Two-choice routing flattens the tail imbalance of random placement.

$$\mathbb{E}[\text{max bin occupancy}] = \Theta\left(\frac{\log R}{\log\log R}\right) \tag{0.50}$$

Here R counts both jobs and bins. The asymptotic expression does not predict a finite serving queue at a given fleet size: arrivals, departures, job sizes, and service rates are absent from this model. The power of two choices (principle 17) changes the occupancy tail using one additional probe.

The power of two choices

A foundational result in load balancing theory (Mitzenmacher 2001) shows that querying just two random servers before making a routing decision provides exponentially better load distribution than random assignment.[9]

[9] **Balls into bins (power of two choices)**: The quoted bounds concern R equal jobs placed in R empty bins without departures. Dynamic serving requires a queueing model or workload measurements.

The procedure is deliberately small, but the load signal must match the serving workload. The destination must atomically admit or reject the request because probe results can become stale; a rejection requires bounded retry or overload handling. For a homogeneous vision fleet, current queue length may be enough. For an LLM fleet, active tokens, estimated remaining decode work, and KV-cache pressure better approximate the work a replica has already accepted. Algorithm 0.7 states a representative routing loop: probe two replicas, compare normalized work, and route without polling the whole fleet.

Algorithm 0.7 Power-of-two choices request routing

Require: eligible replica set $\mathcal{S}$; request r; positive capacity weights w_s; per-replica work signal W_s (queue length, active tokens, predicted work, or KV-cache occupancy); finite attempt budget
Ensure: an admitting replica for r, or an overload rejection
for each allowed attempt **do**
  if $\mathcal{S}$ is empty **then**
    return overload rejection
  end if
  sample two candidate replicas s_a, s_b from $\mathcal{S}$ with replacement ▷ *capacity-weighted*
  query W_{s_a}, W_{s_b}; estimate incremental work $\hat{c}(r)$ (expected output tokens or KV pages)
  $u_s \leftarrow (W_s + \hat{c}(r))/w_s$ for $s \in \{s_a, s_b\}$ ▷ *post-admission load*
  $s^\star \leftarrow$ candidate with smaller u_s ▷ *ties: cache affinity*
  if $s^\star$ atomically admits r and reserves its local capacity **then**
    return $s^\star$
  end if
end for
return overload rejection

Two probes avoid an all-replica scan. The practical algorithm uses predicted work and capacity weights; it is a serving heuristic, not the uniform static placement process. For the latter process, choosing the less occupied of two independently sampled bins gives equation 0.51:

$$\mathbb{E}[\text{max bin occupancy}]_{\text{two choices}} = \Theta(\log\log R) \tag{0.51}$$

This asymptotic contrast motivates limited probing. It supplies neither an exact queue length for a finite fleet nor a latency guarantee for variable-length inference requests.

Theorem 10.2: Power-of-two choices load-balancing bound

For R equal-size jobs placed sequentially into R initially empty bins, without departures, uniform random placement has maximum occupancy $\mathcal{O}(\log R/\log\log R)$ with high probability. Choosing the less occupied of two independent uniform candidates reduces this to $\mathcal{O}(\log\log R)$.

The bound shows that limited probing substantially improves maximum occupancy in this static model. Two probes avoid the R-probe cost of examining every bin. Applying the idea to serving requires a load signal that reflects remaining work and available capacity; the theorem does not establish near-optimal latency for changing queues, heterogeneous replicas, or stale measurements.

The mechanism is the suppression of repeated unlucky placement. If m of R bins have occupancy at least k, one uniform probe hits that set with probability m/R, whereas two independent probes both hit it with probability $(m/R)^2$. This observation explains the static tail improvement; it does not remove the need to account for service times and stale load signals in a live fleet.

Weighted and adaptive load balancing

When replicas have different service capacities, equal request rates produce different utilization. In a mixed A100 and T4 fleet, the lower-capacity replicas reach saturation first as demand increases; equal routing does not imply overload at every arrival rate. Weighted assignment accounts for measured capacity by allocating the following long-run request share to each server:

$$\Pr(\text{route to server } i) = \frac{w_i}{\sum_j w_j}$$

where w_i is the weight, or capacity, of server i. Weighted two-choices applies the same idea to tail control: sample two servers with probability proportional to their weights, compare current load relative to capacity, and route to the lower relative load. The weighted-routing example makes this policy concrete for mixed GPU hardware.

Example 10.10: Heterogeneous GPU cluster

Scenario: A serving cluster mixes 10 H100 GPUs (1000 QPS each) and 20 A100 GPUs (600 QPS each), processing 15,000 QPS target traffic.

Diagnosis: Unweighted round-robin routes equal request counts (500 QPS) to all nodes, leaving H100s underutilized (50 percent) while leaving less latency headroom on A100s (83.3 percent). Weighted routing assigns H100s a weight of 4.5 percent and A100s a weight of 2.7 percent, balancing utilization across tiers (68.2 percent vs. 68.2 percent).

Systems lesson: Heterogeneous inference clusters require capacity-weighted routing. Equal request volumes produce unbalanced load when hardware tiers have different service rates.

Static weights handle known capacity differences, but production replicas also change over time. Adaptive load balancing adjusts weights dynamically based on observed performance:

```
For each server i:
    latency[i] = exponential_moving_average(observed_latency)
    weight[i] = 1 / latency[i]  # Inverse latency weighting
```

Inverse latency weighting reduces traffic to replicas whose observed latency rises. That observation mixes server condition with request cost: a replica receiving longer generations can appear slow even when its hardware is healthy. Delayed measurements can also make weights oscillate as traffic shifts. The heuristic therefore needs evaluation against comparable request classes, measurement lag, and overload behavior before its weights can be treated as capacity estimates.

Least-connections load balancing

An alternative to random selection is routing to the server with the fewest active connections or requests. Least-connections uses an active-request count in the model considered here, incrementing on dispatch and decrementing on completion. This accounts for unfinished requests that round-robin does not inspect, but a connection carrying multiple requests needs different bookkeeping.

The policy improves routing only to the extent that the count represents the work and capacity competing at each replica.

The challenge is maintaining accurate connection counts in a distributed system. A centralized counter gives a single source of truth but can become a bottleneck. Distributed counters with gossip scale better but may route using stale information. Sampled least-connections combines the idea with two choices by probing only a subset of servers and choosing the minimum. Connection counts are themselves a proxy. Two in-flight LLM requests can differ fiftyfold in remaining decode work, from a 10-token reply to a 500-token essay, so active tokens or estimated remaining work track load more faithfully than the count of open requests.

No routing policy wins on every axis. Random and round-robin assignment have low decision overhead but ignore work in progress. Two-choice routing samples load state, while least-connections tracks outstanding requests at the cost of maintaining current counts. Neither counts nor limited probes fully describe remaining work when request costs vary widely. Which policy meets a tail target is an empirical question, evaluated with the same arrival trace, request-length mix, and replica capacities.

Consistent hashing for stateful routing

Many inference workloads maintain state that benefits from routing affinity. An LLM service may retain completed-turn KV state as a session cache, recommendation sessions may carry user context and recent interactions, and streaming inference may depend on model state from previous frames. For these workloads, routing the same user or session to the same server can avoid cache misses and state reconstruction. A stateless LLM API that receives the full conversation on every request does not require this affinity; it may still use prefix-aware routing when a reusable prefix happens to be cached.

Consistent hashing[10] (Karger et al. 1997) maps requests to servers based on a hash of the routing key (user ID, session ID):

$$\text{server}(\text{request}) = \arg\min_{s \in \mathcal{S}_{\text{srv}}} \text{distance}(\text{hash}(\text{key}), \text{hash}(s))$$

where $\mathcal{S}_{\text{srv}}$ is the set of servers mapped onto the ring, and each request routes to the nearest server clockwise.

For fixed ring membership, consistent hashing sends the same key to the same server. Membership changes affect only part of the ring. With balanced equal-capacity assignments and uniformly distributed keys, adding a server moves an expected $1/(N+1)$ fraction of keys, while removing one affects its expected $1/N$ share. Virtual nodes help smooth uneven ranges, but popular keys can still concentrate traffic even when key counts are balanced. For session-cached LLM serving, affinity increases the chance of reaching reusable state. That benefit must outweigh additional waiting; overload routing, failure, eviction, and remapping can still require repeated prefill.

[10] **Consistent hashing**: The ring-based algorithm was introduced for distributed caching (Karger et al. 1997) and later used in large-scale content delivery. Its limited-remapping property later made it useful wherever membership changes should preserve cache locality.

Example 10.11: Consistent hashing for KV cache affinity

Scenario: A multi-turn LLM chat service routes user queries across a cluster of inference replicas without session affinity.

Diagnosis: A subsequent turn sent to a replica without compatible cached history must repeat prefill for the uncached prefix. Routing without affinity increases that risk but does not force a miss on every turn. With fixed membership, consistent hashing maps a user ID to the same replica and preserves unaffected mappings when membership changes. Retaining valid cached state on that replica is a separate requirement.

Systems lesson: Consistent hashing improves KV-cache locality across multi-turn sessions without requiring a full key remap during scaling. It reduces redundant prefill when the preferred replica remains healthy and timely, but overload routing, eviction, failure, and the remapped fraction still require cache transfer or reconstruction.

The same stateful routing machinery becomes a correctness boundary when cached state is user-specific.

War Story 10.1: When cache state crossed users (2023)

Context: ChatGPT used Redis Cluster through the redis-py client to cache user information and conversation titles in a high-volume serving system (OpenAI 2023).

Mechanism: Under an Asyncio connection-pooling race condition, canceled requests left unread responses in recycled connection buffers, causing subsequent requests to receive cache data belonging to previous users.

Impact: On March 20, 2023, OpenAI took ChatGPT offline after a bug allowed some users to see another active user's conversation titles. Further investigation found possible exposure of payment-related information for a subset of active Plus subscribers during a nine-hour window; full credit card numbers were not exposed.

Fix: OpenAI sent the Redis maintainers a patch for the redis-py cancellation path and added redundant checks that the data returned from the cache belongs to the requesting user.

Systems lesson: Stateful inference infrastructure needs isolation guarantees around caches, connection pools, and routing keys. A cache is part of the serving correctness boundary, not merely an optimization.

Request routing for sharded models

A sharded replica is one routing destination even though several devices execute the request. The external router selects the shard group; the group's execution plan determines the internal communication established in section 7. A tensor-parallel group runs every layer on all of its devices and joins their partial results with AllReduce (figure 0.129), presenting one destination whose latency already includes those collectives. Pipeline groups instead admit requests at the first stage and forward activations along the fixed stage sequence diagrammed in figure 0.130; the router must account for the group's service capacity rather than treat each stage as an independent replica. In expert-parallel architectures, the gating network in figure 0.131 routes tokens dynamically across internal expert destinations after the external router has selected the replica, so expert imbalance and replica imbalance require different controls.

Figure 0.133 diagrams this two-tier scaling topology: an external load balancer distributes incoming queries across independent multi-GPU shard groups using round-robin, two-choice, or session-affinity policies, while intra-node NVLink AllReduce synchronization remains strictly encapsulated within each replica node.

KV cache in distributed settings

Routing a request to a shard group, or moving a conversation to a different group, decides where its KV state lives. The sharding strategies of section 7 fix that placement inside a group. Pipeline parallelism keeps each layer's cache on the stage that owns that layer, so tensor parallelism is the case that reshapes cache management, and migration is the case that moves it between groups.

Under tensor parallelism, the KV cache is sharded across devices along with attention heads. Each device stores cache for its subset of heads. A multi-head attention layout spreads many KV heads across the group, while grouped-query attention with eight KV heads leaves one per device in an eight-way group.

```
8-way tensor parallelism, 64 KV heads (MHA):
Device 0: KV cache for heads 0-7
Device 1: KV cache for heads 8-15
...
Device 7: KV cache for heads 56-63
```

Cross-device reuse requires compatible cache content and placement. Matching tensor-parallel configurations can align the head partitions, but the receiver must also use the same model state, prefix inputs, cache representation, and logical token positions. A different partition requires redistribution rather than direct shard reuse. Equal parallelism degree alone does not establish cache validity.

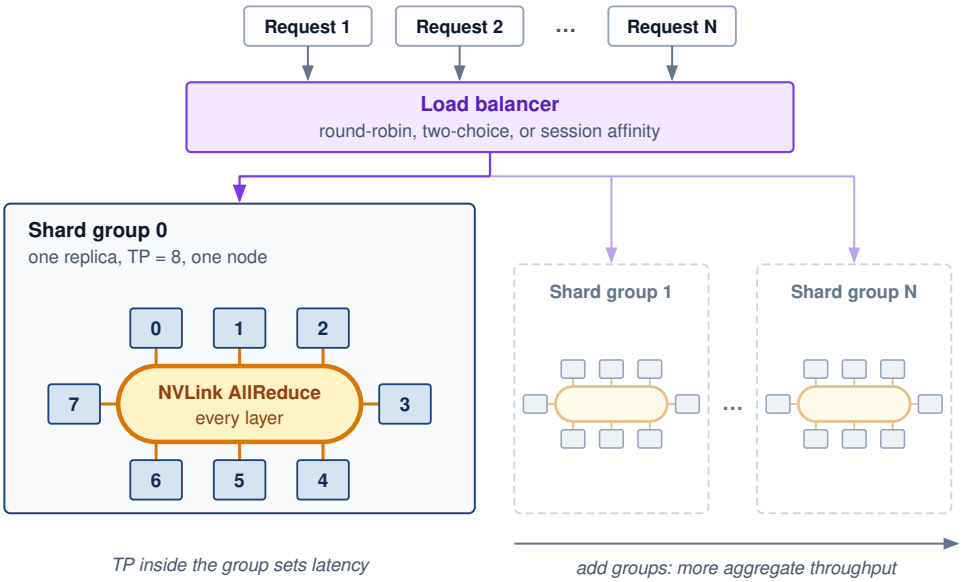


Figure 0.133: Horizontal scaling with shard groups: The load balancer treats each shard group as a single logical inference server and chooses among groups by round-robin, two-choice, or session-affinity routing. Within a group, eight GPUs hold the tensor-parallel weight shards and join partial results with an NVLink AllReduce inside every layer, which the router never sees. Adding ready groups raises aggregate capacity; the group's internal parallelism affects per-request latency.

KV cache migration presents a further challenge. When the router moves a conversation to a different replica because of failure or rebalancing (routing keyed on a hash of the session ID, the consistent-hashing scheme developed in section 10), the service must either transfer available KV state or rebuild it. Transfer requires a reachable source or a saved copy; after an unrecoverable replica failure, the service rebuilds from authoritative conversation history:

```
Migration options:
1. Rebuild: Re-run prefill on new replica (cost grows with context length)
2. Transfer: Send KV cache over network (cache bytes / link bandwidth)
3. Hybrid: Transfer if small, rebuild if large

Decision threshold:
if cache_size_bytes/network_bandwidth < prefill_time:
    transfer()
else:
    rebuild()
```

For Llama 3 70B with GQA and a 4,096-token context, KV cache is about 1.3 GB total per sequence, or about 168 MB per device under 8-way tensor parallelism. At 100 Gb/s (12.5 GB/s), the bandwidth-only estimate for one shard is roughly 13 ms, while sending the full cache over one such link takes about 107 ms. The prefill approximation counts 5.8×10^{14} FLOPs ($2 \times 7.1 \times 10^{10}$ parameters $\times$ 4,096 tokens), giving roughly 180 ms on the tensor-parallel group at the assumed 40 percent utilization. Transfer is faster in this comparison, but achieving the per-shard time for the whole group requires concurrent links with sufficient aggregate bandwidth. Shared network bottlenecks, source availability, cache conversion, and destination queueing can change the decision. Long-context attention adds rebuild work omitted from this approximation, so measured transfer and prefill times should determine the policy.

The shard group boundary also defines readiness. A group can accept work only when the devices, model state, and cache capacity required for its execution plan are available, so the load balancer needs a health signal for the serving replica as a whole.

Health checking and failover

Load balancers can route around failure only if the health signal matches the failure mode. Health checks separate liveness, readiness, and inference correctness. On an accelerator replica, each tier must test a different part of the serving state, because a process that is alive may still be unusable when its weights are not loaded, its memory pool is exhausted, or its first request will trigger a long warmup. The probes therefore escalate from cheapest to most realistic:

```
GET  /health/live       -> 200 (process alive) or timeout (process dead)
GET  /health/ready      -> 200 (weights loaded, device initialized) or 503
POST /health/inference  -> 200 with valid output for a fixed test prompt, or error
```

Readiness checks can detect unloaded weights, incomplete warmup, or insufficient admission capacity even while the process remains alive. An inference probe additionally exercises the execution path and can compare a fixed prompt's output or logits against expected bounds. Passing that probe does not establish correctness or capacity for every request shape, so production errors and latency remain necessary health signals. Failover then depends on the detected failure, available replacement capacity, and whether affected KV state can be transferred or must be reconstructed.

Circuit breakers and backpressure

When a GPU inference server slows down, routing more requests to it can turn a local problem into a fleet-wide failure. Consider an illustrative rise in service time from 50 ms to 500 ms. Queues accumulate, client timeouts generate retries, and rerouted work consumes neighboring replicas' headroom. The cause might be a stalled dependency, device degradation, or resource contention. The load balancer needs a policy for withdrawing an unhealthy replica while controlling the displaced load.

The circuit breaker pattern (Nygard 2007) limits repeated work sent to an unhealthy destination. In the closed state, the server receives normal traffic. When the configured error, timeout, or latency threshold is exceeded, the breaker opens and requests fail fast or become candidates for rerouting. After a recovery interval, a half-open state admits limited probes, closing on recovery or reopening on failure. Figure 0.134 shows these transitions. Opening a breaker does not create replacement capacity: rerouting must respect admission limits and retry budgets or it can overload the surviving replicas.

Backpressure propagation complements the breaker by making overload visible upstream. When queue depth crosses a threshold, the server returns a signal such as `503 Service Unavailable`; the load balancer marks the replica as degraded and routes fewer requests to it. If all replicas become degraded, the system shifts from routing control to admission control, rejecting some requests at the edge rather than accepting work it cannot serve within the latency SLO; load-shedding policies decide which requests to reject first. Circuit breakers isolate unhealthy replicas; backpressure tells the rest of the system to slow down before retries amplify the failure.

Backpressure works only when the request contract propagates through the whole serving graph. The gateway converts the client timeout into an absolute deadline and every downstream stage subtracts elapsed time before admitting more work. If the client disconnects or the deadline expires, cancellation must reach queued CPU work, accelerator batches, retrieval calls, and streamed output. A canceled request that remains in a continuous batch is zombie work: it consumes KV pages and decode bandwidth while producing no useful response. Some kernels cannot be interrupted mid-launch, so cancellation commonly takes effect at the next batch or token boundary; the scheduler must measure that cancellation lag rather than promise instantaneous preemption.

The same request identifier must connect routing, queueing, prefill, decode, cache allocation, and response streaming. A useful serving trace records admitted and rejected requests, queue delay, TTFT, TPOT, input and output tokens, cache pages, batch membership, preemptions, cancellations, and fallback decisions. Aggregate accelerator utilization cannot distinguish useful work from late or canceled work. SLO goodput and the wasted-token rate close that gap. SLO goodput reports how much completed work met its contract. The **wasted-token rate** is the fraction of generated tokens spent on requests that were canceled, timed out, or delivered after their deadline, the execution the system performed after the result had lost value.

↩ Liveness, readiness, and inference-correctness probes, the failover time their settings bound, and stateful failover are established in section 20.

↩ Load shedding, model fallback, and the other strategies that trade quality for availability are established in section 21.

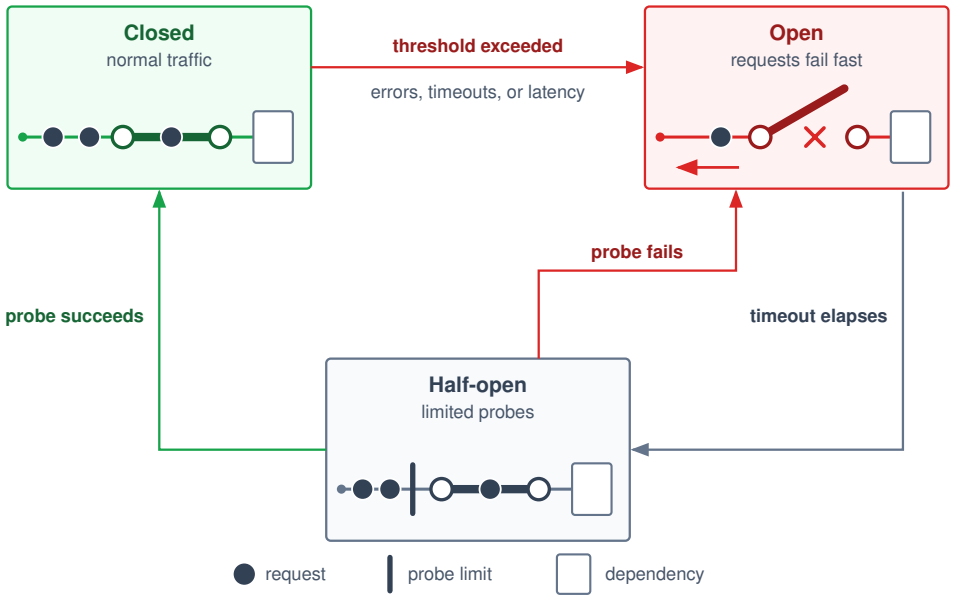


Figure 0.134: Circuit breaker states: The circuit breaker protects the system from cascading failure. Closed: normal operation. Open: error threshold exceeded; all requests fail fast to prevent resource exhaustion. Half-open: after a timeout, a limited number of requests are allowed through to probe the dependency's health. Success resets to closed; failure returns to open.

A saturated LLM fleet operating under severe KV cache pressure has three workload-specific relief options. Engines can apply context eviction through an explicitly supported sliding-window or approximate policy with a quality check, or truncate retained history and recompute its state. Silently dropping old KV entries is not equivalent to recomputing a shorter conversation, because later cached states already depend on the earlier context. Disabling speculative execution reduces draft work, but reclaiming its memory also requires unloading draft weights and releasing the associated cache state. Finally, fallback routing can send eligible requests to a smaller model with available capacity, provided that model meets the application's fallback quality contract.

These options change latency, resource use, or model behavior in different ways. The application must specify which changes are acceptable at each pressure tier. Context truncation can remove information essential to an answer, and a smaller model can fail the task's quality requirement. In those cases, an explicit rejection can be preferable to an apparently successful but unacceptable response.

Routing relies on estimates of replica capacity, but shared hardware can make that capacity change when another workload becomes active. Critical production models may share a cluster or device with experimental models and developer endpoints. Protecting the serving contract under that interference requires multi-tenant isolation in addition to routing.

Multi-Tenancy and Isolation


Consider a critical customer-support chatbot running on the same GPU server as an experimental computer vision script. If the experimental workload monopolizes the PCIe bus or memory bandwidth, the chatbot can miss its latency target. Sharing saves capacity only when the resulting interference remains within each service's contract. Fleet quotas, fair-share hierarchies, and priority preemption decide how much of the cluster a serving system receives; the problem here is controlling contention among the tenants who share that allocation, request by request.

↩ Fleet quotas, hierarchical fair-share, and the priority classes that govern preemption are established in section 17.

The multi-tenancy challenge

Sharing a serving pool can raise utilization and reduce separately provisioned capacity when tenant demand peaks occur at different times. This statistical-multiplexing gain weakens when bursts are correlated, and shared resources introduce interference even when aggregate demand fits. Pooling therefore needs both a demand model and enforceable isolation.

A burst from one tenant can delay others through shared KV-cache capacity, network bandwidth, and accelerator time. The pool must preserve each tenant's data boundary and service contract; different SLOs can require different admission limits, reservations, or placements. Noisy-neighbor effects come first because they directly connect shared-resource contention to those latency contracts.



One tenant's burst can degrade every workload sharing the pool.

Noisy neighbor problems

The noisy neighbor problem occurs when one tenant's workload degrades performance for others sharing the same infrastructure. The interference manifests across three resource dimensions simultaneously.

GPU memory contention can limit admission before compute capacity is exhausted. Consider three tenants sharing a 60 GB KV pool with nominal 20 GB shares. Without enforced limits, one tenant's long-context requests can raise its allocation to 45 GB. In the scenario, the others lose capacity from 200 concurrent sequences each to 75, a 62.5 percent reduction. That is a concurrency loss, not a proportional throughput prediction; the effect depends on their execution regime and preemption costs. Egress bandwidth and accelerator time are additional shared resources whose contention must be measured alongside memory occupancy.

↩ The device-level interference channels of shared accelerators (memory bandwidth, cache hierarchy, host-device interconnect, and thermal dissipation) are established in section 15.

Example 10.12: Quantifying noisy neighbor impact

Scenario: An inference platform serves 10 tenants on shared H100 GPUs at 100 QPS each under a 50 ms p99 SLO. Tenant 3 bursts to 500 QPS, 5× its baseline.

Diagnosis: Without quotas, contention raises pool-wide p99 into the 22 ms to 45 ms range in this scenario, eroding every tenant's headroom while remaining within the stated target. With quotas, Tenant 3 is limited to 120 QPS and the other tenants retain 15 ms p99. Throttling turns Tenant 3's excess into rejected or delayed requests, which are judged against Tenant 3's own contract rather than spread across the pool.

Systems lesson: Shared capacity raises utilization only when it is coupled with isolation. Quotas turn pool-wide erosion of latency headroom into an admission decision confined to the tenant that caused it; without them, a larger burst or a tighter SLO turns the same erosion into violations across the pool.

Resource quotas and fair sharing

Resource quotas limit what each tenant can consume, preventing any single tenant from monopolizing shared resources. Hard quotas turn shared serving into admission control. Request rate and concurrency bound arrival pressure, while input tokens, output tokens, KV-cache pages, accelerator time, and egress bytes bound the work performed after admission. A single scalar quota cannot protect all of these resources because two requests can have the same count but differ by orders of magnitude in prompt length or generated output. Listing 0.7 shows representative gates so a tenant can be throttled at the scarce resource boundary instead of degrading the whole batch.

Listing 0.7: Multidimensional Resource Quotas: A snapshot check compares prospective resource use with tenant limits. Atomic reservation and scheduler enforcement are separate requirements.

```
class TenantQuota:
    max_concurrent_requests: int  # e.g., 100
    max_kv_cache_mb: int  # e.g., 20,000
    max_qps: int  # e.g., 1,000
    max_input_tokens_per_minute: int
    max_output_tokens_per_minute: int
    max_batch_tokens: int  # e.g., 50,000


def check_quota_snapshot(tenant_id, request):
    quota = get_quota(tenant_id)
    usage = get_usage(tenant_id)

    if usage.concurrent + 1 > quota.max_concurrent_requests:
        return RateLimitError("concurrent request limit")
    if usage.kv_cache_mb + request.reserved_kv_mb > quota.max_kv_cache_mb:
        return RateLimitError("memory limit")
    if usage.requests_last_second + 1 > quota.max_qps:
        return RateLimitError("rate limit")
    if usage.input_tokens + request.input_tokens > quota.max_input_tokens_per_minute:
        return RateLimitError("input-token limit")
    if usage.output_tokens + request.max_output_tokens > quota.max_output_tokens_per_minute:
        return RateLimitError("output-token limit")

    if request.prefill_chunk_tokens > quota.max_batch_tokens:
        return RateLimitError("prefill chunk exceeds batch-token limit")

    return None  # Snapshot is eligible; no resources have been reserved.
```

This listing assumes that `reserved_kv_mb` includes the requested prompt and output-token budget, and that usage counters include outstanding reservations in their stated time windows. A passing snapshot is not an admission guarantee: simultaneous callers can observe the same free capacity. Production admission must check and reserve resources atomically, roll back failed admissions, and release reservations on completion or cancellation. The batch scheduler separately enforces the aggregate batch-token limit. Quotas protect the resources they account for; shared compute, networking, and control-plane contention still require isolation and measurement.

Soft quotas permit borrowing unused capacity while preserving an enforceable share when demand rises. The unit of account matters: equal request counts can hide large differences in prefill work, output length, and retained state. Input and output tokens therefore need separate accounting, with memory and concurrency limits alongside them. The progressive-filling approach in section 4 reduces to max-min fairness when only one divisible resource constrains the allocation. For three tenants demanding 30,000, 20,000, and 80,000 output tokens/sec from an idealized 100,000-token/sec pool with equal token costs, the allocation is 30,000, 20,000, and 50,000. Coupled prefill, decode, and memory constraints require joint feasibility checks; independent fair allocations do not automatically compose into a feasible service.

Priority scheduling

The priority-aware scheduling listed among the serving dimensions (section 5) becomes an isolation tool once its classes map to tenants and service tiers. Fleet priority classes govern preemption across allocations; request priority applies inside a serving allocation. Table 0.123 illustrates a policy that combines precedence with reservations. Those reservations must be provisioned and enforced separately: priority alone cannot create capacity, interrupt every running kernel, or guarantee a deadline under unbounded critical traffic.

Table 0.123: Priority scheduling classes: Three-tier priority hierarchy for multi-tenant inference. Critical traffic gets 100 percent reserved capacity and can preempt any lower class; standard traffic shares capacity proportionally and can preempt best-effort; best-effort runs on leftover capacity with no guarantees.

Class	Use Case	Preemption	Resource Guarantee
Critical	Revenue-generating	Can preempt lower	100% reserved
Standard	General traffic	Can preempt best-effort	Weighted share
Best-effort	Background, batch	Cannot preempt	No guarantee

The scheduler sorts incoming requests by priority class, then by arrival time within each class. When a new critical request arrives, it jumps ahead of all standard and best-effort requests in the queue, so revenue-generating traffic does not queue behind background batch jobs, although work already running on the accelerator can still delay it.

Preemption extends this principle to requests already in flight, but priority does not make state movement free. The retain, swap, recompute, or reject choice of section 5 still decides how a displaced request's KV state is handled; priority adds an input to that choice rather than replacing it. A priority class determines who may be displaced, while remaining service time, state size, and deadline slack determine which victim is cheapest. Ignoring those costs lets aggressive preemption consume more capacity than it releases.

Bulkhead pattern

The bulkhead pattern[11] (Nygard 2007) partitions resources so exhaustion or failure in one allocation has a limited effect on others. The boundary may be a logical concurrency pool, a separate process, or dedicated hardware; each contains different failure modes. The pattern is named after ship compartments intended to contain flooding.

Dedicated replicas separate more resources than request limits inside one process. Figure 0.135 assigns distinct compute and memory pools to tenant groups, so an engine crash or exhausted local allocation in the standard tier need not stop the gold-tier engines. Shared networking, storage, and control-plane services can still carry interference across that boundary.

[11] **Bulkhead limits**: A divider isolates failure only if it closes the relevant boundary. The Titanic's incomplete bulkheads allowed water to cascade between compartments; similarly, a soft quota cannot isolate shared memory or bandwidth that remains globally exhaustible.

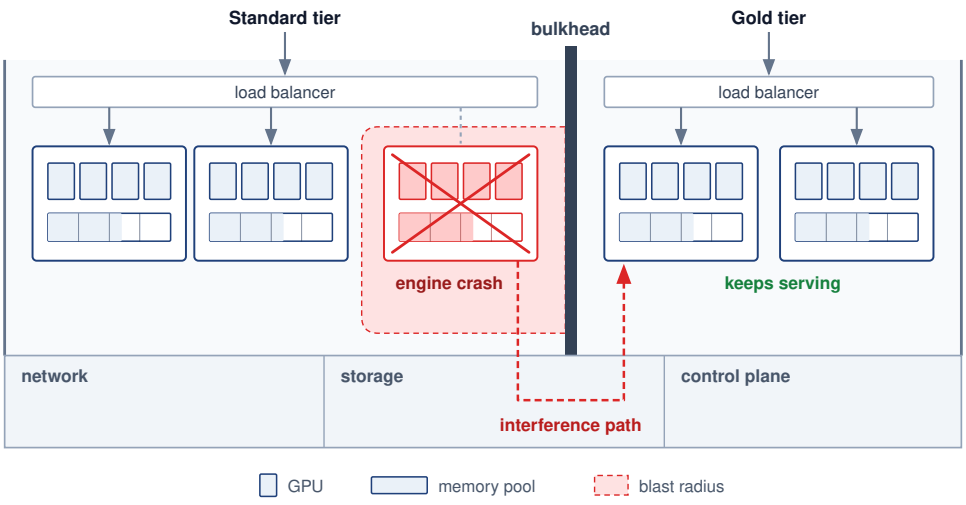


Figure 0.135: Bulkhead isolation patterns: To prevent cascading failures in multi-tenant systems, bulkheads isolate resources. Deployment-level bulkheads (shown) assign dedicated physical replicas to high-priority tenants, separating their compute and memory pools. Request-level bulkheads enforce strict concurrency limits within shared processes. Shared networking, storage, and control-plane dependencies remain possible paths for interference.

Deployment-level bulkheads isolate the named compute and memory resources for premium tenants. They do not remove shared network, storage, power, or control-plane failure domains. The trade-off is lower pooling efficiency and additional operational overhead from dedicated infrastructure.

Request-level bulkheads limit work admitted within a shared process. Example caps of 8,000 input tokens, 2,000 output tokens, and 30 seconds of execution constrain request size and duration when the scheduler enforces them. They still need concurrency limits, resource reservations, and cancellation handling; a token cap alone does not bound interference or isolate a process crash.

Crash containment follows the process or hardware boundary, not the request quota. A malformed request that crashes a shared worker can interrupt every tenant using that worker. Service tiers requiring stronger fault isolation therefore need placement boundaries that match that requirement.

Example 10.13: Bulkhead configuration for API tiers

Scenario: An LLM API platform serves Enterprise, Professional, and Free service tiers across shared and dedicated hardware.

Diagnosis: Unpartitioned pools allow Free-tier bursts or shared-worker failures to affect Enterprise requests. The example assigns Enterprise to dedicated GPU pools with a 99.9 percent availability target, allocates 70 percent of the remaining shared capacity to Professional, and caps Free at 30 percent best-effort capacity. Meeting that target still requires reliability evidence for the dedicated pools themselves.

Systems lesson: Bulkheads concentrate isolation overhead where business requirements dictate. Hardware partitioning reduces cross-tenant compute and memory contention. SLO compliance still depends on sufficient capacity, admission policy, shared dependencies, and failure handling.

Multi-tenant isolation limits the blast radius of excess demand, but it does not create capacity. Once protected queues approach their latency budgets, the service needs a control loop that can add replicas before admission begins to fail.

Autoscaling and Capacity Control

A serving autoscaler that reacts only to average accelerator utilization can scale in the wrong direction. Decode can saturate memory bandwidth while arithmetic units appear idle, long prompts can consume prefill capacity before request count rises, and queued work can violate an SLO while fleet-wide utilization remains moderate. The control signal must represent outstanding work relative to phase-specific service capacity. Every replica the controller adds is also a claim on accelerators that training jobs may hold, so fleet-level arbitration with training bounds how quickly and how far serving can grow.

↩ The arbitration between serving replicas and training jobs for shared accelerators, including the minutes-long cost of switching a device between them, is established in section 17.

For a conventional fixed-cost model, queueing delay and request rate per ready replica can guide scaling. Autoregressive serving also needs prompt-token and output-token rates, KV occupancy, and measured phase service rates. A colocated replica must satisfy all phase requirements; disaggregated prefill and decode pools need separate counts and a feasible transfer budget. SLO goodput measures useful supply, but rejected work and backlog must remain visible as unmet demand. A latency threshold can detect deterioration after a model change, yet controller timing and headroom still need validation. Adding replicas also depends on their startup delay. Changing an existing accelerator allocation may require a restart or state migration, depending on the runtime and execution plan.

Scale-up and scale-down require asymmetric evidence. Scale-up acts on sustained queue growth, forecast demand, or declining deadline slack because cold-start delay makes late reactions expensive. Scale-down requires low demand over a longer window, enough spare capacity to survive one replica failure, and a drain plan for in-flight requests and any optional session cache. This hysteresis prevents oscillation in which replicas repeatedly load large weights, accept work, and terminate before amortizing startup cost.

The controller also needs observability that distinguishes demand from impaired supply. Request rate, input and output tokens, queue age, TTFT, TPOT, deadline misses, admission rejections, ready

replicas, model-load failures, and per-phase service rate form the minimum feedback set. Without replica readiness and service-rate measurements, an autoscaler can respond to a sick replica by adding cold replicas indefinitely while the original failure remains hidden.

Example 10.14: Cold start timeline for Llama-70B

Scenario: An autoscaling engine provisions a Llama-70B replica during a traffic surge, using an H100-based allocation large enough for its FP16 weights, cache, and runtime state.

Diagnosis: The scenario's sequential startup estimate is 6.7 minutes ($T_{\text{cold-start}} = T_{\text{provision}} + T_{\text{load}} + T_{\text{warmup}}$): 1 minute for provisioning, 4.7 minutes to fetch 140 GB of artifacts at the assumed 0.5 GB/s, and 1 minute for device loading and warmup. Cached artifacts or overlapping phases can shorten this path; scarce capacity and shared storage can lengthen it. If existing headroom cannot absorb the surge, newly requested replicas arrive too late to protect short deadlines.

Systems lesson: Cold-start latency depends on artifact size, effective storage bandwidth, provisioning delay, compilation, and warmup. The controller must measure this distribution and begin provisioning far enough ahead that its high percentile fits inside the forecast horizon.

Example 10.15: Predictive scaling for traffic

Scenario: A commercial chatbot service faces predictable diurnal traffic patterns, ramping from 500 QPS at night to 3,000 QPS at peak.

Diagnosis: A controller that waits for the morning ramps at 06:00 and 09:00 UTC before requesting capacity must cover the assumed 7-minute startup interval with existing headroom or admission limits. Without enough ready capacity, queues grow while replicas start. Forecasting can shift that wait ahead of the expected demand.

Systems lesson: Predictive autoscaling converts demand forecasts into planned pre-warming windows (table 0.124). Starting 30 minutes ahead of the expected ramps exceeds the modeled startup time. Readiness still depends on actual provisioning and warmup, and forecast errors can leave the fleet short or idle. Reactive correction and an overload policy remain necessary.

Table 0.124: Predictive scaling schedule: Per-time-bucket scaling actions, active replicas, and replicas in cold-start warming for the chatbot workload.

Time	Action	Replicas Active	Replicas Starting
05:30	Scale up	5	+10 warming
06:00	Traffic ramp	15	-
08:30	Scale up	15	+15 warming
09:00	Peak traffic	30	-
17:00	Scale down	20	-10 terminating
20:00	Scale down	10	-10 terminating
00:00	Scale down	5	-5 terminating

Systems insight: Against an assumed reactive peak of 45 replicas, the forecast-based peak of 30 is a 33 percent reduction in peak replica count at equal unit cost. The reactive controller over-provisions because it reacts to a queue that has already formed and must add capacity for the backlog as well as the demand. Peak count is only part of the bill. Total spending counts replica-hours, including the pre-warming window, so the forecast pays only when the replica-hours spent warming ahead of demand are fewer than those the reactive overshoot would consume.

Example 10.15 illustrates the opportunity to prepare capacity before demand arrives. Figure 0.136 depicts a forecast that anticipates the surge, while the reactive curve starts later and temporarily lacks capacity. Whether that deficit produces queueing, rejection, or missed deadlines depends on admission and existing headroom. The predictive curve illustrates a successful forecast, not a guarantee that future demand or startup time will match it.

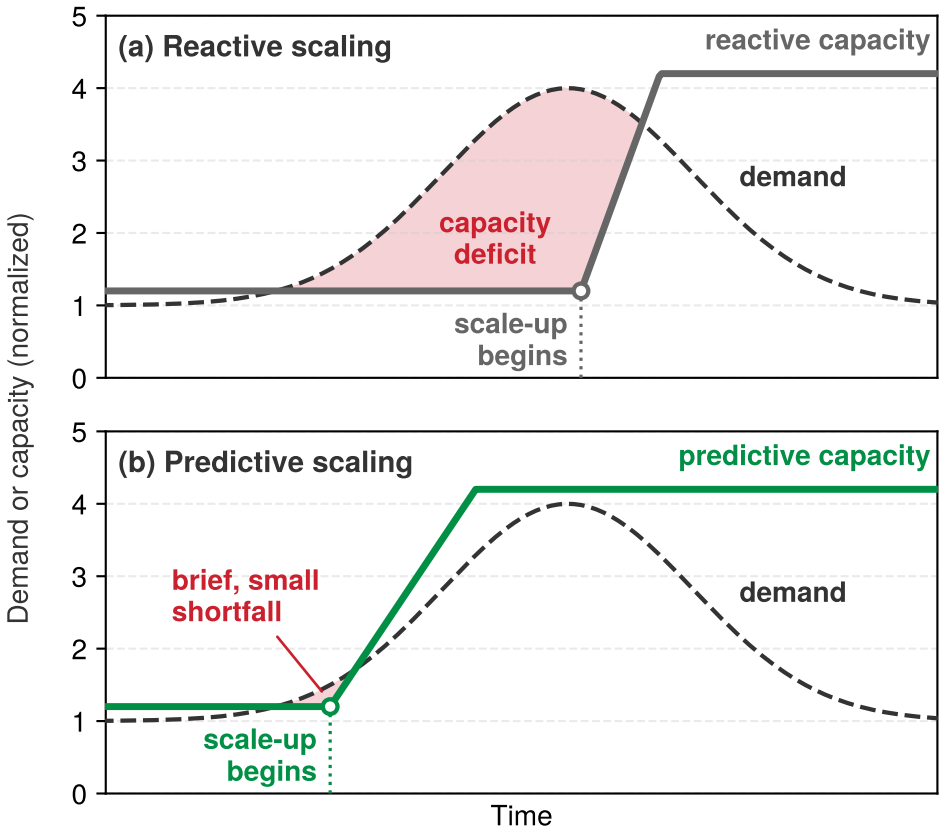


Figure 0.136: Predictive vs. reactive scaling: Reactive scaling (gray line) responds to traffic spikes after they occur, leaving a capacity deficit (red region) during cold start in this scenario. Predictive scaling (green line) anticipates traffic and begins provisioning before the spike peaks, shrinking that deficit to a brief, small shortfall at onset in the illustrated forecast. Its early ramp does not eliminate every interval when demand exceeds capacity.

Warm pool management

Maintaining prewarmed replicas buys readiness before demand arrives. Warm pool sizing begins with the total capacity needed during the provisioning delay, then subtracts capacity already ready to serve. If peak demand doubles and the chosen headroom factor is 1.5, the target is three times baseline capacity, assuming unchanged per-replica throughput. Partly prepared replicas count only if they can become ready before that capacity is needed. The expression Pool size $\times$ GPU cost/hour $\times$ Idle fraction estimates the hourly cost attributed to idle GPU capacity; it excludes busy capacity and non-GPU resources. Table 0.125 distinguishes readiness levels and their activation costs:

Table 0.125: Tiered warm pool readiness levels: Readiness trades activation delay against idle resource cost. Actual delay and billing depend on the deployment. Cold capacity is subject to quotas and physical availability.

Tier	State	Activation requirement	Cost while waiting
Hot	Model running on allocated GPU	Route admitted work	Allocated GPU and service resources
Warm	Capacity allocated; runtime partly prepared	Finish initialization and validation	Allocated resources remain billable
Cold	GPU not allocated	Acquire capacity, load, and warm up	Artifact storage; no allocated GPU

When a traffic spike hits, the controller routes work to ready replicas, activates prepared capacity, and requests additional instances if needed. Pool sizing must cover the measured provisioning delay and include an overload policy for capacity that cannot be acquired in time.

Scaling response time analysis

The scaling response budget is the sum of the control loop's detection, decision, provisioning, and warmup delays. Equation 0.52 makes those phases explicit:

$$T_{\text{response}} = T_{\text{detect}} + T_{\text{decide}} + T_{\text{provision}} + T_{\text{warmup}} \tag{0.52}$$

Table 0.126 decomposes each term and identifies its primary optimization path:

Table 0.126: Scaling response time components: The four phases of a scaling event with illustrative durations and their primary optimization lever. Provisioning dominates this example; a deployment must measure its own critical path, which may instead be dominated by artifact loading.

Component	Duration	Optimization
Detection	10–60s	Reduce metrics interval
Decision	1–5s	Faster autoscaler
Provisioning	30s–5min	Warm pools
Warmup	5–30s	Precompilation

Provisioning can dominate the illustrated budget, making already allocated capacity valuable. The earlier large-model example also shows that artifact loading can dominate startup; the relevant term is the one measured on the deployment's critical path. Finer-grained metrics can reduce detection delay but increase noise, while prepared scaling decisions and precompiled engines reduce other costs. A warm pool removes only the phases already completed at its stated readiness level.

Spot and preemptible instances

Discounted interruptible capacity[12] enters serving through the same purchasing tiers that fleet capacity planning uses (table 0.75): reserved capacity for the steady baseline, on-demand capacity for bursts, and spot capacity for work that tolerates revocation. None of these tiers makes a replica immune to failure, so the serving question is whether a revoked replica can drain, reroute, or recompute its requests without violating their SLO. The provider's warning window is the binding constraint.

Spot termination handling is a race against the provider's warning window. Listing 0.8 orders the shutdown path so new work stops first, in-flight work drains while time remains, recoverable state is persisted, and the load balancer stops sending traffic before the instance disappears.

12 **Spot-instance economics**: Equation 0.31 derives the effective cost of preemptible capacity from its productive fraction. For inference, revocation can also destroy in-flight requests and KV-cache state, so the productive fraction must be charged for draining, rerouting, and restoring capacity.

Listing 0.8: Spot Termination Handling: Graceful shutdown sequence that stops admission, deregisters from the load balancer, drains in-flight requests, and persists recoverable state.

```
async def handle_spot_termination():
    # Received 2-minute warning
    # 1. Stop admission and remove the replica from routing
    stop_accepting_requests()
    deregister_from_loadbalancer()

    # 2. Complete in-flight requests (if possible)
    await complete_inflight(timeout=90)

    # 3. Save state for resumption elsewhere
    save_kv_cache_to_storage()

    # 4. Terminate gracefully
    shutdown()
```

The gateway in figure 0.137 separates traffic by its tolerance for capacity revocation. SLO-critical work uses the non-spot pool, while eligible best-effort work can use interruptible capacity. Routing still depends on readiness and available headroom. An eviction notice triggers draining when time permits; requests that cannot finish need a permitted retry, reconstruction, or rejection path.

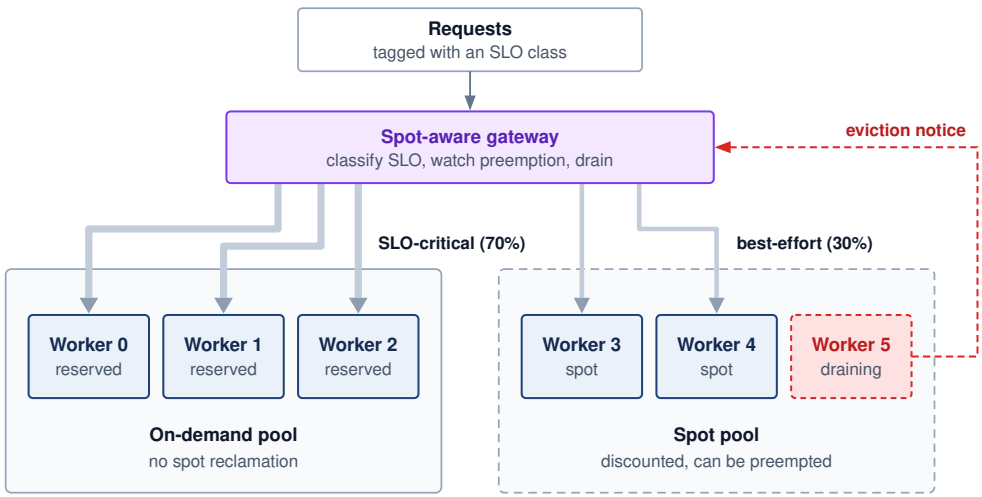


Figure 0.137: Spot-aware traffic distribution: The gateway classifies requests by SLO and routes 70 percent of traffic, the SLO-critical share, to on-demand replicas that face no spot reclamation, and 30 percent, the best-effort share, to discounted spot replicas that can be preempted. When a spot worker receives an eviction notice, the gateway stops routing to it while it drains, and best-effort requests tolerate occasional retries. The traffic split is illustrative; cost savings depend on provisioned capacity, discounts, retries, and idle headroom.

Savings under this split depend on provisioned GPU-hours, discounts, retries, and reserve capacity rather than on the traffic share, and spot capacity changes none of the fault-tolerance requirements of the SLO-critical path.

Global Inference Infrastructure

A fleet confined to one region can batch, shard, route, isolate, and autoscale well, yet a user in Sydney still pays roughly a 200 ms round trip to a US-East deployment before any of that machinery acts, and a regional outage removes every replica at once. Extending resource isolation and failure boundaries beyond one data center introduces placement decisions at geographic scale. Distance, regional failures, and data-placement requirements can motivate regional replicas, caches, or a

centralized service with an explicit network budget. Figure 0.138 illustrates three tiers: edge points of presence for reusable responses, regional gateways for authentication and routing, and GPU clusters for model execution. Its 10 ms, 50 ms, and 2 s budgets are scenario targets, not measured performance or universal deadlines. The application must define whether its execution budget governs first response, individual tokens, or completion of the entire request.

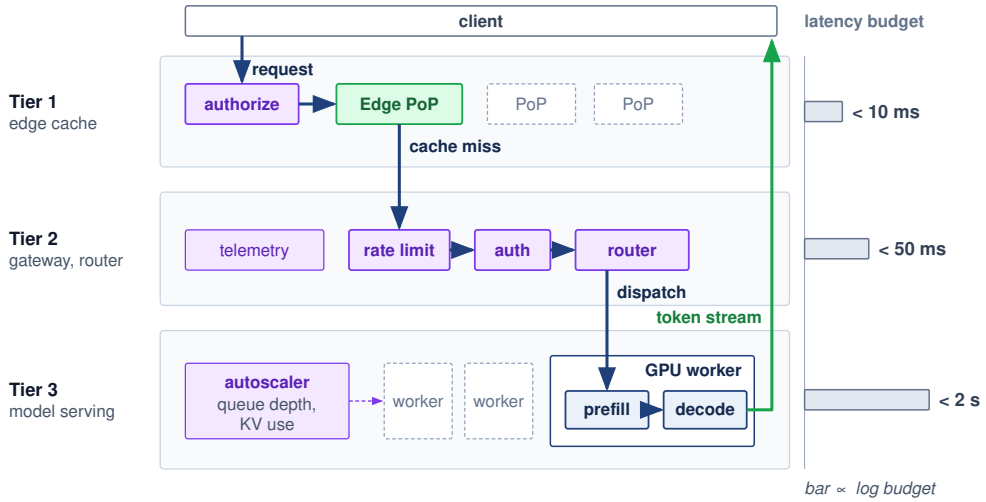


Figure 0.138: Serving deployment stack: A cache miss crosses three tiers before reaching a model replica. Tier 1 edge points of presence (PoPs) enforce authorization and reuse eligibility before answering repeated requests from cache; a miss passes to Tier 2, where the gateway applies rate limits and authentication and the router picks a destination; Tier 3 GPU workers run prefill and decode while an autoscaler sizes the fleet from queue depth and KV cache use. Tokens stream back up through the tiers to the client. The per-tier latency budgets on the right, drawn on a log scale, are illustrative.

Drivers for multi-region deployment

Single-region deployment couples every user to the same geographic site and regional failure domain. Network round-trip time (RTT) adds a latency floor for distant users. Table 0.127 gives illustrative regional timings; actual paths, access networks, and congestion require measurement:

Table 0.127: Network RTT by user location: A single US-East deployment imposes a 75 to 200 ms RTT on European, Asian, and Australian users, an order of magnitude above the local-region floor. Sequential calls that cross this boundary can add repeated wide-area delay. Regional replicas can reduce that exposed delay when placement policy, workload volume, and available capacity justify them.

User Location	RTT to US-East	RTT to Local Region
New York	10 ms	10 ms
London	75 ms	10 ms
Tokyo	150 ms	10 ms
Sydney	200 ms	10 ms

Network delays compound when a request makes sequential calls across the distant boundary; multiple model calls inside one backend region do not each pay another client-to-region RTT. Regional replication can shorten that path and separate failure domains. Data-placement policies also constrain eligible destinations. The General Data Protection Regulation permits international transfers under specified conditions rather than requiring blanket EU-only processing; applicable law and contractual commitments must be translated into explicit placement rules. Regional replicas, edge caches, and cross-region sharding then trade capacity, communication, and coordination within those rules.

Global load balancing with regional replicas

In figure 0.139, a global load balancer selects among regions that satisfy placement policy, readiness, and capacity requirements. Measured network latency helps choose among those eligible destinations; geographic proximity alone does not determine completion time. A shared registry supplies versioned artifacts to the independent regional replicas.

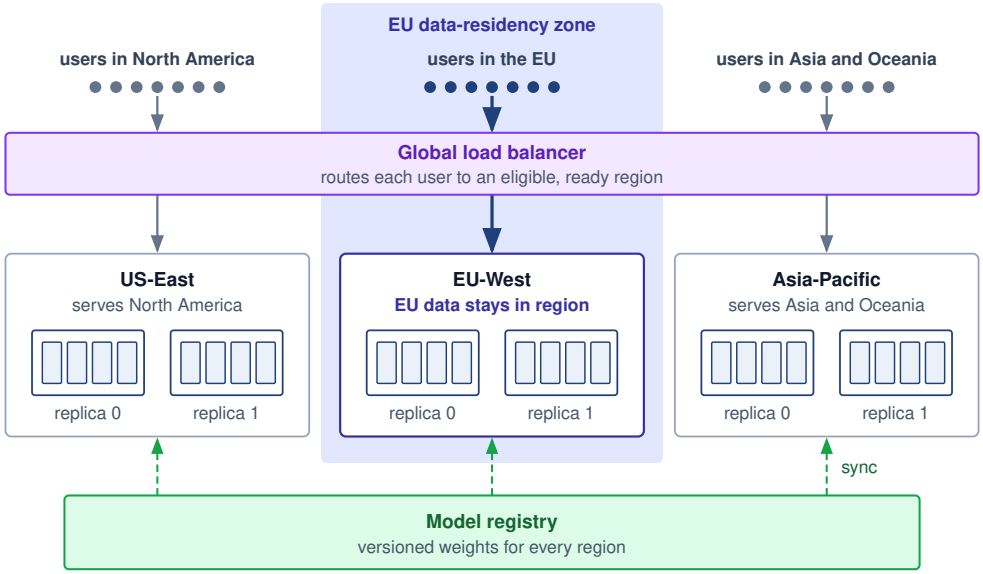


Figure 0.139: Global load balancing across inference regions: A global load balancer routes each user to an eligible region with suitable latency and ready capacity (table 0.127 gives the round-trip times this avoids). Each region (US-East, EU-West, Asia-Pacific) runs independent replicas of the same model, and EU requests can stay in the EU to meet data-residency rules. A shared model registry supplies versioned weights to every region. If a region fails, the load balancer reroutes its users only to destinations that still satisfy placement, readiness, and capacity requirements.

The illustrative RTT comparison shows why nearby replicas can reduce network delay, but actual savings depend on the measured user-to-region paths. Replication also creates a version-management obligation. Push-based synchronization sends artifacts to each region, while pull-based synchronization lets regions fetch them after notification or polling. Neither mechanism alone guarantees consistent serving versions. Artifact verification, readiness gates, and coordinated activation determine when a region may serve the new version; hybrid synchronization combines push notification with pull verification.

During a rollout, regions may serve different versions. The application must decide whether that is acceptable and whether a request or session needs version pinning. A region-by-region canary deployment limits initial exposure to a small traffic share, such as 1 percent. Its observation window follows the required sample count, traffic diversity, and release criteria, not a fixed number of hours. At a 1 percent share, a region must route enough requests through the canary to detect the regressions its gates test for. Each expansion needs its own error-rate, latency, and quality gate, with compatible prior artifacts retained for rollback.

↪ The canary stage-duration calculation, which sizes the observation window from the required sample count and the canary's traffic share, is developed in section 8 (equation 0.62).

Edge caching with central inference

Caching responses at the edge can avoid repeated central inference when a stored response remains valid for the incoming request. Before returning a hit, the edge must enforce authorization and match the relevant model version, conversation or retrieval context, generation policy, and freshness requirements. Identical visible queries do not necessarily permit the same answer, and fresh-sample semantics may prohibit reuse. Figure 0.140 shows the hit and miss paths with an illustrative 10 ms

hit budget. A miss reaches the central cluster; only responses eligible for reuse should enter the edge store.

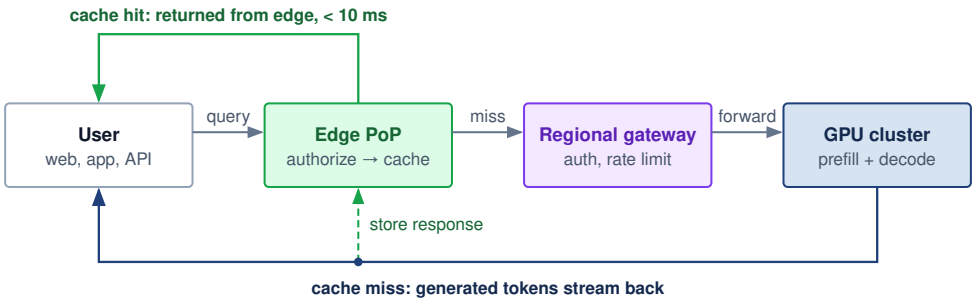


Figure 0.140: Cache hit and cache miss paths at the edge: A query first reaches the nearest edge point of presence (PoP). After enforcing authorization and reuse eligibility, the edge targets a cache-hit response in under 10 ms without touching a GPU. On a miss, the request passes through the regional gateway to the central GPU cluster, which runs prefill and decode. Generated tokens stream back to the user, and a response eligible for reuse can be stored at the edge for later queries. The saving depends on the rate of requests eligible for reuse; open-ended generation may offer few such requests.

The two paths in figure 0.140 highlight the latency difference: cache hits avoid the backend round-trip, while misses incur it. Effectiveness depends on request repeatability across workloads such as autocomplete, FAQ chatbots, open-ended chat, and code generation. Table 0.128 supplies illustrative hit-rate envelopes for sensitivity analysis; an actual design must derive hit rate and correctness from production traces.

Table 0.128: Illustrative edge-cache hit-rate envelopes: Assumed cache-hit ranges for four workload shapes. These values are scenario inputs, not universal workload statistics. Trace-derived repeatability, response validity, and latency saved determine whether caching is worthwhile.

Workload	Cache Hit Rate	Suitability
Autocomplete	60–80%	Excellent
FAQ chatbot	40–60%	Good
Open-ended chat	5–15%	Poor
Code generation	20–40%	Moderate

Semantic caching[13] (caching based on embedding similarity rather than exact match) can improve hit rates for open-ended workloads.

[13] **Semantic caching**: A similarity lookup can reuse responses beyond exact string matches, but it adds retrieval work and can return an invalid answer when superficially similar queries require different responses. The similarity threshold therefore trades cache coverage against correctness.

Cross-region model sharding

Cross-region model sharding places communication on the request's execution path. Pipeline stages can reside in separate regions, but every dependent stage crossing then pays the inter-region transfer cost. In an illustrative comparison of 75–150 ms network delays with 1–5 ms stage computation, a 10–100× slowdown is possible; it is not a model-independent ratio. Such placement needs a reason strong enough to justify that cost, such as unavailable colocated capacity, and must be evaluated against the actual stage layout and deadline.

Because cross-region sharding is so costly on the steady-state path, most production designs keep inference co-located and use other regions for resilience. The cross-region question therefore shifts from splitting one request across regions to deciding how quickly traffic can move when a region fails.

Cross-region failover

When a region becomes unavailable, failover must choose a healthy destination permitted to process the request and able to absorb its work. Listing 0.9 illustrates a simplified timeout fallback. A production policy must also preserve the request's remaining deadline, version requirements, and data-placement constraints when selecting the secondary region.

Listing 0.9: Active-Active Failover: A bounded retry policy selects eligible regions and limits each attempt to the remaining request deadline.

```
# Eligibility includes placement, version, readiness, and capacity.
def route_request(user_region, request):
    attempted = set()
    for attempt_budget in (2.0, 5.0):
        remaining = request.deadline - monotonic_time()
        regions = eligible_regions(request, excluding=attempted)
        if remaining <= 0 or not regions:
            break
        region = nearest_region(user_region, regions)
        attempted.add(region)
        try:
            # The endpoint atomically admits work and enforces the deadline.
            return call_region(region, request,
                               timeout=min(attempt_budget, remaining))
        except (Timeout, RegionUnavailable, AdmissionRejected):
            # Cancel abandoned work; retries require replay-safe semantics.
            cancel_attempt(region, request)
    return unavailable_or_deadline_exceeded(request)
```

Rerouting is only part of regional failover. The destination needs accessible, authoritative conversation history to reconstruct lost KV state and enough headroom for both reconstruction and continuing traffic. If the required history is unavailable or cannot be processed there under the placement policy, a healthy replica alone cannot restore the session.

↩ Regional headroom, session rebuilding, and the gradual return of traffic to a recovered region are established in section 20.

Cost optimization across regions

GPU pricing varies by provider, contract, region, and time. Table 0.129 uses a hypothetical price snapshot to show how placement can balance cost against latency requirements; it must not be used for procurement:

Table 0.129: Hypothetical regional price and latency snapshot: Scenario prices and RTTs illustrate a placement calculation. Both inputs are time- and provider-specific; a deployment must refresh them from its contract and measured network paths before making a routing decision.

Region	H100 Spot Price	On-Demand	Latency to US Users
US-East	$2.50/hr	$4.00/hr	10–50 ms
US-West	$2.30/hr	$3.80/hr	30–70 ms
EU-West	$2.80/hr	$4.20/hr	75–100 ms

Cost-aware routing compares eligible regions for latency-tolerant work (listing 0.10). GPU price alone is insufficient: transfer charges, startup and idle capacity, retries, and achieved useful throughput determine the cost of completing the workload. Deadline and data-placement constraints must filter destinations before that comparison.

Listing 0.10: Cost-Aware Routing: The router filters eligible destinations before comparing completion cost for low-priority work or proximity for interactive work.

```
def route_batch_request(request):
    # Filter by placement, version, readiness, capacity, and deadline.
    regions = eligible_regions(request)
    if not regions:
        return no_feasible_destination(request)
    if request.priority == "low":
        return lowest_completion_cost_region(request, regions)
    return nearest_region(request.user_location, regions)
```

Time-of-day routing can reduce batch cost when regional price differences exceed data-transfer and coordination costs. Savings require a workload-specific calculation, and interactive traffic must retain its own latency budget.

Regional placement completes the serving hierarchy, from one request's batch slot to a fleet that spans continents. The design cases that follow show how these techniques combine when a service must meet specific cost and latency targets.

Case Studies

These four design cases are illustrative composites rather than descriptions of named companies' internal deployments, and their request rates, latency budgets, hardware allocations, and update cadences follow the chapter's scenario convention. Each case binds on a different constraint: embedding scale, variable-length generation, cascade cost, or multimodal freshness. Orca and vLLM supply the previously cited scheduling and memory-management mechanisms; the scenarios combine those ideas with routing, sharding, and admission control.

Embedding-heavy recommendation serving

An embedding-heavy recommendation service binds on sparse lookup rather than dense forward-pass compute. This scenario models feeds, advertising, and content ranking with a large distributed embedding store.

The operational scale explains why embedding locality dominates the architecture: the service processes billions of requests per day under a p99 budget below 10 ms for the ranking service, nested inside the roughly 100 ms end-to-end tail target of Archetype B (DLRM at Scale), spanning hundreds of distinct model variants over an entity catalog comprising trillions of unique sparse features.

The serving stack separates sparse lookup from dense ranking:

```
User request → Feature collection → Embedding lookup → Model inference → Response

                    |                    |                   |
                    v                    v                   v
             Feature Store        Embedding Servers      GPU Inference
             (CPU, DRAM)         (CPU + SSD, 1000s)     (GPU, 100s)
```

The hybrid sharding strategy in lighthouse 10.1 supplies the sparse path: replication protects hot entries, column sharding spreads warm-entry access, and row sharding places the cold tail. Feature-level batching then combines lookups across requests. The remaining design decision is where each stage runs. In the GPU-CPU hybrid architecture, memory-rich CPU servers serve sparse embeddings while GPUs execute dense ranking. Table 0.130 connects that placement to the end-to-end latency budget.

Table 0.130: Illustrative hybrid CPU/GPU architecture: Illustrative hardware-workload mapping for the recommendation scenario. CPU + SSD handles the bandwidth-bound sparse path; CPU handles low-arithmetic-intensity feature processing; GPU handles the compute-dense ranking forward pass. The component budgets exclude queueing and response delivery; their sum alone does not establish the p99 target.

Component	Hardware	Latency	Throughput
Embedding lookup	CPU + SSD	2 ms	50M lookups/s
Feature processing	CPU	1 ms	10M ops/s
Dense ranking	GPU	1.5 ms	100K infs/s

The serving lesson is that recommendation latency is often dominated by embedding lookup rather than dense model inference. Feature-parallel batching and a hybrid CPU-GPU architecture match the hardware to the sparse and dense halves of the workload, which sets up a contrast with GPT-style API serving where request variance and autoregressive state dominate.

A multi-model generation API

A multi-model generation API binds on request variance: short prompts, long-context requests, and different model sizes share capacity while users expect predictable TTFT. The infrastructure serves GPT-class models to large developer and application workloads while maintaining quality of service across diverse workloads.

The operating scale explains why continuous batching and admission control dominate the infrastructure: the platform serves millions of requests per hour under a time-to-first-token target below 2 s, hosting models that range from billions to hundreds of billions of parameters with context lengths reaching up to 128K tokens.

The serving stack separates routing, scheduling, cache management, and shard groups:

```
API Gateway → Rate Limiting → Request Router → Model Cluster → Response Streaming

                    |
                    v
          +-------------+
          | Model Pool  |
          | +---------+ |
          | | Large   | |
          | | 8×H100  | |
          | +---------+ |
          | +---------+ |
          | | Smaller | |
          | | 4×A100  | |
          | +---------+ |
          +-------------+
```

The main design decision is to prevent long prompts from blocking decode service for everyone else.

An Orca-style design uses continuous batching to refill completed slots. Chunked prefill limits interference from long prompts by interleaving prompt chunks with ongoing generation. The TTFT target must be validated across prompt lengths; admitting a 128K-token prompt does not imply that it meets the short-request latency target. Table 0.131 contrasts the three approaches:

Table 0.131: Batching strategy comparison: Slot reuse and prefill interference are separate concerns. Continuous batching addresses the first; chunking gives control over the second. Neither mechanism alone establishes utilization or latency numbers.

Batching Strategy	Slot reuse	Long-prompt interference
Static batching	Waits for batch completion	Monolithic prefill can delay decode

Batching Strategy	Slot reuse	Long-prompt interference
Continuous batching	Refills at iteration boundaries	Monolithic prefill can still delay decode
Continuous + chunked	Refills at iteration boundaries	Limits prefill work per iteration; tail latency still needs measurement

The tensor-parallel degree must satisfy weight and KV-cache capacity while leaving enough latency budget for communication. This scenario allocates eight H100 GPUs per large-model shard group connected via high-speed NVLink for intra-node communication, with consistent hashing at the gateway to maintain session affinity and enable compatible cross-turn KV cache reuse. The eight-device allocation is a design choice to validate against the model, precision, and admitted context lengths, not a requirement of GPT-class models in general.

To prevent noisy neighbors from exhausting capacity, the illustrative API applies hierarchical rate limiting across multiple granularities: per-API-key request arrival limits, per-API-key token-per-minute consumption limits, organization-level capacity quotas, and global model capacity ceilings.

A possible capacity policy shifts resources between models based on queue depth, subject to model-loading delay and each service's minimum allocation:

```
if large_model_queue_depth > threshold:
    # Migrate some smaller-model capacity to the larger model
    reallocate_cluster_capacity(from="smaller-model", to="large-model", fraction=0.2)
```

LLM APIs are governed by variance control. Continuous batching reuses execution slots, prefix caching avoids compatible repeated work, and multi-tier rate limiting bounds admitted demand. Their combined effect on latency still depends on prompt scheduling and available capacity. Search ranking faces a different shape of the same problem. Many cheaper models must cooperate under one strict deadline.

Search ranking under a deadline

The search-ranking scenario binds on cascade cost: each query coordinates many smaller models under one end-to-end latency budget rather than serving one large model. The ensemble combines specialized models for query understanding, document relevance, and result ranking.

The operational scale motivates a cascade architecture: the system must process billions of searches per day under a strict end-to-end latency target of less than 200 ms, evaluating thousands of candidate documents per query across dozens of specialized models. Screening candidates with cheaper models reserves the expensive ranking budget for a smaller set.

To meet this latency budget while evaluating thousands of documents, the ranking cascade diagrammed in figure 0.141 screens candidate pools across four progressively expressive tiers: early lexical and approximate-nearest-neighbor (ANN) embedding retrievers discard 99 percent of candidates within a 10 ms budget, reserving compute-intensive cross-attention transformers for the final top 100 items. This saving creates a recall constraint. A relevant document discarded upstream cannot be recovered by a more accurate downstream ranker, so each stage's candidate budget must be evaluated for retained relevant items as well as latency.

The central design decision is progressive refinement: rather than running one expensive model on all candidates, this scenario uses a ranking cascade. Table 0.132 shows the trade the cascade makes: each stage spends a larger latency budget on a smaller candidate set, so the expensive L3 ensemble is affordable only because L0 through L2 have already cut the candidates by four orders of magnitude.

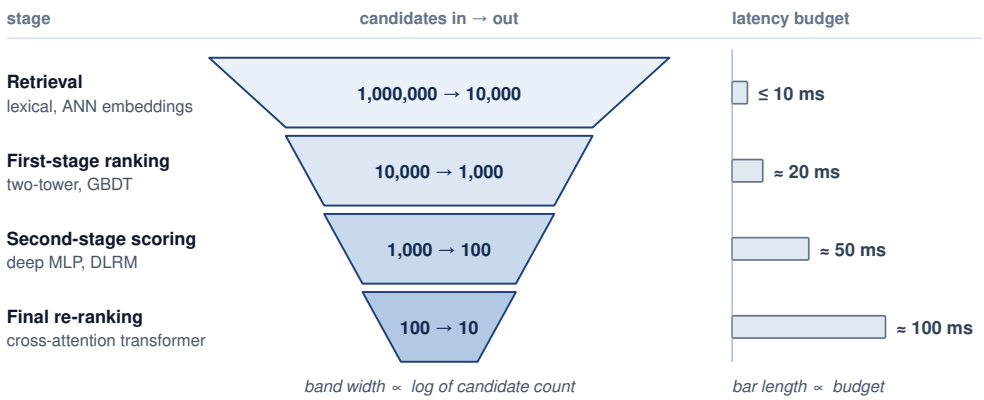


Figure 0.141: Ranking cascade architecture: To optimize latency and cost, search and recommendation systems use a cascade of increasingly complex models. Early stages (Retrieval) filter millions of candidates down to thousands using fast, cheap heuristics. Later stages use expensive, high-precision models only on the most promising candidates.

Table 0.132: Illustrative ranking cascade: Each stage evaluates fewer candidates with a more expensive model. The final stage has the largest latency allocation in this scenario; candidate reduction makes that expense affordable.

Stage	Model Complexity	Candidates	Latency Budget
L0 (Retrieval)	Embedding lookup	1,000,000 → 10,000	10 ms
L1 (First pass)	Linear model	10,000 → 1,000	20 ms
L2 (Second pass)	Small transformer	1,000 → 100	50 ms
L3 (Final rank)	Large ensemble	100 → 10	100 ms

The cascade reduces final L3 evaluations by 10,000× compared to running L3 on all candidates. If the stage budgets are treated as additive model work and L3 cost scales linearly with candidate count, the L3 allocation implies 1 ms per candidate. Applying L3 to the full million-candidate set would then consume about 1000 s of model work, while the cascade budget sums to 180 ms. The resulting reduction is roughly 5,600× under these assumptions. This accounting estimate is not a measured latency speedup; batching and parallel execution can change elapsed time without changing the candidate count.

A deadline-constrained ranking ensemble can use speculative execution when it has a validated fallback-quality policy. Here, speculation means launching candidate ranking work in parallel under a deadline, not draft-token verification for LLM decoding:

```
# Instead of sequential:
#   q1 = model1(query)
#   q2 = model2(query)
#   q3 = model3(query, q1, q2)

# Speculative parallel:
async_q1 = async model1(query)
async_q2 = async model2(query)
async_q3 = async model3(query, predicted_q1, predicted_q2)

# Use actual results if they arrive in time, otherwise use speculative
```

Search ranking deployments can run ranking models on Tensor Processing Units (TPUs).[14] Their matrix execution, memory bandwidth, and supported numerical formats must match the ranking workload. Pod interconnect topology varies by generation and configuration; a distributed ranker must account for its actual collective communication costs rather than assume one topology or a guaranteed serving benefit.

[14] **TPUs for inference**: Systolic-array execution can provide a regular timing profile for fixed-shape ranking workloads. Tail latency still depends on batching, input preparation, communication, and queueing around the accelerator.

Each sub-request carries a deadline, and workers prioritize by deadline proximity:

```
Worker queue: [Doc1: 50 ms left] [Doc2: 30 ms left] [Doc3: 80 ms left]
                                    ↑ Process first

If deadline will be missed:
  Return cached/default result rather than timing out
```

The serving lesson is that ranking cascades reduce cost by spending expensive models only on a shrinking candidate set, at the risk of losing relevant items upstream. Deadline propagation and priority scheduling expose the remaining time budget; meeting it also requires sufficient capacity and a validated fallback when work cannot finish. Custom hardware can improve predictability when the workload matches the accelerator, but the next case adds a freshness constraint that hardware alone cannot solve.

Multimodal recommendation and freshness

The multimodal recommendation scenario binds on freshness under a tight ranking SLO: video understanding is expensive, new content arrives continuously, and user modeling remains online. It combines video understanding (vision) with user modeling (recommendation) for personalized content ranking, creating a multimodal inference challenge where different model types must coordinate.

The operating scale explains why clear online/offline separation matters: the system handles millions of video rankings per second under a tight p99 latency target below 50 ms, ingesting millions of new videos daily across video, audio, text, and user interaction signals.

The serving stack separates content and user paths:

```
User request → User embedding → Candidate videos → Video understanding → Ranking

                    |                 |                  |
                    v                 v                  v
              User Tower        Video Cache        Vision Models
            (Transformer)     (Pre-computed)      (On-demand)
```

The scenario separates user understanding (online) from content understanding (offline) through a two-tower architecture with caching.[15] Table 0.133 contrasts the online and offline tower update cadences:

Table 0.133: Illustrative two-tower update cadence: User and video towers run on different cadences: user features change second-to-second and must run inference online; video features change much more slowly and are precomputed in hourly batches. This asymmetric scheduling is the design that takes vision inference out of the critical path for almost every request.

Tower	Update Frequency	Latency	Compute
User tower	Real-time	5 ms	GPU (online)
Video tower	Hourly	N/A	GPU (batch)

Video embeddings are precomputed and cached, eliminating vision inference from the critical path for most requests. A newly uploaded video without a cached embedding needs an explicit policy: process it before admitting it to recommendations, serve a validated fallback, or run vision inference on demand if the request budget permits. The hourly refresh cadence alone does not meet the shorter ingestion targets below; those targets require a separate path for new content.

The online path below separates candidate generation from a later dense reranker. Its user-tower budget is distinct from the reranker budget:

```
User features → CPU preprocessing (1 ms)
              → Embedding lookup (2 ms, CPU+DRAM)
              → User tower (5 ms, GPU)
              → Dense reranking (10 ms, GPU)
              → Response formatting (1 ms)
```

[15] **Two-Tower Architecture**: Encodes user features and item features through separate neural networks ("towers") into embeddings, then scores via dot product. The serving advantage: item embeddings can be precomputed offline and cached, reducing online candidate generation to the user tower forward pass and vector similarity search. Search latency depends on index size, placement, and the required recall. The trade-off is reduced model expressiveness from late interaction, since the towers cannot attend to each other's features during encoding.

New video content is processed with different priorities, as table 0.134 shows:

Table 0.134: Illustrative video ingestion priority tiers: Three-tier SLA for video ingestion. High-follower-count creators get a five-minute SLA to maximize content freshness for their audience; standard uploads get 30 minutes; bulk imports get two hours of slack so the system can absorb them during quiet periods.

Priority	SLA	Use Case
Critical	5 min	Creator with large following
Standard	30 min	Normal uploads
Background	2 hours	Bulk/imported content

The priority scheme allocates scarce ingestion capacity to time-sensitive content first. Meeting the stated targets still requires capacity for the corresponding arrival rates; priority changes who waits when demand exceeds capacity, rather than eliminating the wait.

The scenario combines multiple understanding modalities through late fusion, which combines independently computed modality embeddings or scores near the end of ranking rather than running one joint model over all raw modalities:

```
Video embedding (512d) -+
Audio embedding (256d) -+- Concat → Fusion MLP → Final embedding (256d)
Text embedding (256d)  -+
```

Late fusion separates the modality computations, but their outputs remain inputs to the fusion model. Updating one modality's model can change the meaning or distribution of its embeddings even when their dimensions stay fixed. Each update therefore needs compatibility validation and, when that contract changes, regeneration of cached embeddings or adaptation of the fusion model.

The serving lesson is that freshness requires separating online and offline work. Two-tower architectures make aggressive caching possible because item embeddings can be refreshed asynchronously, while priority-based processing spends the freshest compute where it has the largest user impact.

Cross-cutting observations

Across these cases, the common pattern is specialization instead of a universal serving stack. Systems separate embedding and retrieval from ranking and generation, use hybrid CPU-GPU architectures to match hardware to workload characteristics, cache at multiple levels while accepting staleness, progressively refine candidate sets to avoid expensive work on unlikely items, and propagate deadlines so quality/latency trade-offs stay explicit under pressure. Table 0.135 identifies the primary technique and key innovation from each system. The four differ precisely because each is specialized to its own workload; that specialization is the shared pattern, not a contradiction of it.

Table 0.135: Case study summary: Serving techniques and architectural choices across the four illustrative workload scenarios.

System	Primary Technique	Key Innovation
Recommendation	Embedding sharding	Feature-parallel batching
Generation API	Continuous batching	Chunked prefill
Search	Ranking cascade	Speculative execution
Multimodal	Two-tower caching	Multimodal fusion

The case studies show why serving architectures must be adapted to their workloads. Applying conventional web-service assumptions to GPU-bound systems creates the fallacies and pitfalls examined next.

Fallacies and Pitfalls

A DevOps team applies their standard web-server load balancing rules to a new fleet of GPU inference nodes, only to watch tail latency explode because they ignored the extreme variance of autoregressive token generation. Web services also face variable work and queueing, but an inference fleet adds model residency, accelerator scheduling, and per-sequence state to those familiar concerns. The fallacies below arise when a serving design ignores these constraints or treats one optimization as a complete solution.

Fallacy: *Inference at scale is synonymous with LLM serving.*

The misconception, reinforced by LLM-centric discourse, leads to over-focus on LLM-specific techniques while ignoring the broader inference landscape. Published characterizations of large consumer platforms show recommendation and ranking models consuming most AI inference cycles, while vision, fraud detection, and classification models account for much of the rest (Gupta et al. 2020; Hazelwood et al. 2018). A practitioner who only understands continuous batching and KV cache management is unprepared for the feature-parallel batching and embedding sharding that dominate high-volume recommendation inference. Technique selection must match the actual workload.

Pitfall: *Using training infrastructure for production serving.*

Training and serving have different requirements. Training balances aggregate throughput with convergence and time to solution; interactive serving must also satisfy per-request latency targets under external arrivals. Its batch size therefore depends on the workload and waiting budget. Interactive streaming may admit little batching, while bandwidth-bound LLM decode can benefit from many concurrent sequences. Training can resume from checkpoints after an interruption; serving needs a recovery policy that accounts for in-flight requests, retries, and the availability target. Hardware can be shared or repurposed, but a training configuration does not establish serving readiness. Batching, routing, and capacity management must be evaluated against the serving contract.

Fallacy: *Continuous batching solves the whole LLM serving problem.*

Continuous batching reuses slots released by completed requests, but it addresses only one dimension of the problem. Prefill can remain a bottleneck for long contexts because scheduling subsequent decode iterations does not remove the quadratic attention work of full-attention prefill. Section 6 demonstrates that KV cache memory, not compute, often limits batch size. Network bandwidth between sharded model components can dominate latency for large models. The value of continuous batching depends on the workload; slot reuse alone does not resolve these other constraints.

Pitfall: *Sizing the fleet by average throughput.*

Average throughput alone does not establish capacity for bursts. With unchanged work per request and service capacity, a 25 percent traffic increase from 80 percent utilization reaches 100 percent utilization, leaving no spare capacity to absorb variance. Whether the resulting queue violates an SLO depends on burst duration, the waiting budget, and admission policy. Cluster-level cold starts can delay relief for multiple minutes. Capacity planning must therefore account for peak load, burst duration, ready headroom, and the work the service can defer or reject.

Fallacy: *Load balancing does not matter much for inference.*

Simple load balancing strategies like round-robin can distribute request counts while leaving work uneven. The static placement analysis in section 9 motivates two probes, but its occupancy bounds do not predict production queue lengths. Serving comparisons must preserve arrivals, request lengths, cache affinity, and replica capacity. Work-aware routing earns its place when it improves measured tail latency without excessive coordination cost.

Pitfall: *Ignoring the serving tax.*

Distributed inference adds network round-trips and shard coordination to the serialization, routing, and queueing costs that can already surround a single-machine model. This serving tax depends on deployment topology and load. In the illustrative budget of section 4, 70 ms of model execution leaves only 30 ms for every other stage of a 100 ms request target, and queueing alone can consume

that remainder as load rises. A kernel benchmark measures only the first term of equation 0.36; the serving latency is the measured sum along the complete request path.

Fallacy: *More GPU memory always means larger batch size and higher throughput.*

Larger GPU memory raises throughput only when the extra capacity supports useful work within the latency budget. Even when memory bandwidth is saturated, a larger decode batch can increase tokens per second by sharing weight reads across more sequences. That gain stops when compute, per-sequence KV-cache traffic, or the SLO becomes binding. The bottleneck hierarchy distinguishes these limits.

For an H100 with 80 GB memory and 3.35 TB/s HBM3 bandwidth, capacity and transfer rate are separate limits. More capacity may admit additional sequences, but the resulting batch must still meet compute, bandwidth, and latency budgets. Once extra sequences no longer improve useful throughput within those budgets, adding memory alone cannot help. Capacity planning therefore measures the bottleneck at the intended batch size and context length rather than assigning one permanent bottleneck to the model.

Pitfall: *Neglecting multi-tenancy isolation until production.*

In development and staging, single-tenant deployments work well. In production, noisy neighbors cause sudden, unpredictable performance degradation that is difficult to diagnose and resolve. A tenant bursting to $5\times$ normal traffic can degrade latency for all other tenants on shared infrastructure. As emphasized in section 11, resource quotas, priority scheduling, and bulkhead isolation must be designed into the system from the start, not retrofitted after production incidents.

These pitfalls identify what a serving evaluation must test: traffic variance, cost per completed request within the SLO, and interference across tenants. Correct technique selection must be followed by measurement under the intended load and failure conditions.

Summary

Inference at scale turns trained models and distributed hardware into a service under continuously arriving work. Training optimizes aggregate progress over a run; serving must also meet user-visible latency targets while paying recurring operating costs. The useful capacity of the fleet is the work it completes within its service contract, not the work its accelerators execute in isolation. Test-time compute sharpens the point. When quality is bought by spending more compute per query, the scaling curve that drove the fleet's growth moves into the request path, and every increment of quality is paid again on every request.

Serving performance depends on the balance between compute and memory bandwidth. In the terms of the single-machine iron law recalled in section 11, long-prompt prefill can be compute-bound (O/R_{peak}), while small-batch decode is often bandwidth-bound (D_{vol}/BW). Each decode iteration reads active weights and the sequences' KV state; batching shares weight reads across more tokens, whereas longer contexts increase KV traffic. Single-replica efficiency (η_{hw}) therefore depends on phase, batch size, and context length. Variable output lengths make fixed batch membership waste capacity after shorter requests finish.

To maximize throughput under memory-bandwidth constraints, modern serving architectures co-design the memory hierarchy and the iteration scheduler. Continuous batching recovers idle slots by inserting new requests at token boundaries; PagedAttention reduces physical memory fragmentation through fixed-block allocation while retaining partial-page waste; and prefill/decode disaggregation assigns prompt processing and token generation to separate hardware pools sized around their measured compute, memory, and communication costs.

When model state exceeds device memory, sharding spreads a replica across accelerators; when demand exceeds a replica's service capacity, additional replicas supply aggregate throughput. In Fleet Law terms, sharding divides the compute term T_{compute}/N of equation 0.45 but adds communication and synchronization ($T_{\text{comm}}(N), T_{\text{sync}}(N)$) governed by interconnect latency floors (α) and transfer bandwidth (β). Replication, routing, isolation, and autoscaling add coordination costs through probes, admission decisions, and capacity changes, and multi-region placement adds wide-area round trips and cross-region failover to the same budget; transferring model or session state also consumes communication bandwidth. Their aggregate capacity and tail control require

headroom and sometimes idle replicas. Across the serving hierarchy, the engineering objective is to increase useful completed work while preserving the latency and reliability contract under load.

Key Takeaways: Serving capacity is constrained by its contract

- **Serving cost recurs throughout deployment**: Training is paid per model version, while inference expense accrues with traffic (principle 16). In the chapter's high-volume recommendation scenario, lifetime serving cost reaches 525.6× the training cost, making efficiency a recurring economic lever.
- **Tail latency governs architecture**: Batching, sharding, caching, and autoscaling must improve useful capacity within workload-specific service targets. Aggregate throughput is insufficient when queueing, first-token delay, or slow token delivery makes completed work miss its contract.
- **Decode turns memory into capacity**: Long-prompt prefill often binds on compute, while small-batch decode rereads active weights and expands private KV state token by token (principle 15). Continuous batching, PagedAttention, prefix reuse, and KV compression matter because they convert scarce HBM bandwidth and memory into admitted requests.
- **Model class sets the primitive**: Vision models benefit from predictable static or dynamic batches, recommenders from feature-parallel embedding sharding, and LLMs from iteration-level scheduling. A fleet scheduler must match the workload shape instead of applying one universal batch-size rule.
- **Distribution always sends a bill**: Sharding, routing, isolation, and failover buy capacity or resilience while consuming communication and coordination budgets. Power-of-two choices (principle 17) illustrates the value of limiting coordination: routing can use a small number of probes rather than polling every replica.


The serving cost dominance principle (16) makes local efficiency valuable only when the service can turn it into useful capacity. Memory released by quantization may admit more sequences, but those sequences still compete for execution time and can push the endpoint beyond its latency budget. The economic comparison therefore holds the request mix, quality requirement, and service targets fixed before asking whether a change lowers the cost of completed work.

What's Next: From data center to edge

The serving designs developed here coordinate accelerator replicas under data-center memory, network, and availability assumptions; even the global stack's edge points of presence only answer from cache and leave model execution in the clusters. Many applications also run models on smartphones and other personal devices, where sustained power is a few watts, memory is shared with foreground work, and connectivity is intermittent. When those devices must also adapt to local data, the fleet has to decide where learning happens, which device updates it accepts, and how a population improves a shared model without collecting raw examples.

↪ On-device adaptation under device resource budgets and federated learning across device populations are developed in chapter 16.

Edge Intelligence

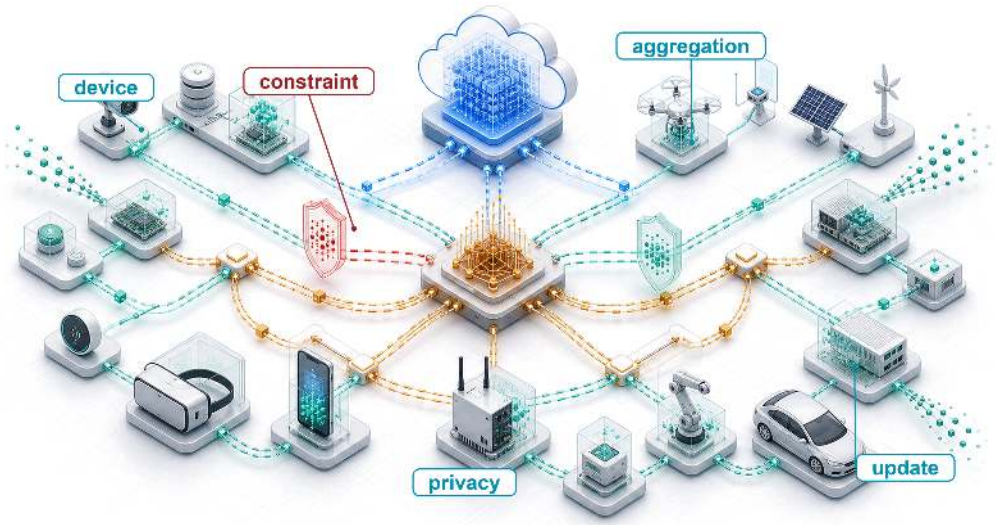

Purpose

When does learning need to move from the data center to the devices it serves?

A model trained in a data center encounters new conditions when deployed to a user's device. Vocabulary, lighting, acoustics, and usage patterns may differ from the distributions that shaped its parameters, and the gap can widen as behavior evolves. Centralized training cannot anticipate every context, while privacy constraints or limited connectivity may prevent local observations from reaching it. Learning where the data is produced can improve local behavior, but running predictions offline does not by itself justify training there. Adaptation must provide enough benefit to justify its memory, battery, and thermal costs without disrupting the device's primary work. A training job that fits on an idle phone may become unacceptable when the user starts another application. Even successful local learning leaves a fleet problem: improvements must be evaluated across devices whose capabilities, data, and availability differ. A policy that accepts updates only from well-connected devices may improve measured results while neglecting users whose devices rarely qualify. Making one device learn efficiently therefore does not establish that a population can learn reliably or that exchanging model updates protects private information. The engineering decision joins the value of local adaptation with the cost of participation and the evidence needed to trust shared improvements. In C^3 terms, compute must fit each device, communication must carry useful updates within limited connectivity windows, and coordination must preserve a representative learning population despite dropout and unequal resources.

Learning Objectives

- Contrast centralized cloud training, on-device learning, and federated learning by analyzing their data flow, privacy properties, and operational trade-offs
- Quantify edge-device training overhead relative to inference-only deployment across memory, compute, and energy
- Derive an admission condition for background adaptation from energy, thermal, and foreground-latency slack
- Select model adaptation strategies by comparing memory footprints, expressivity, and adaptation quality for specific device capabilities
- Select data-efficiency methods for limited local data while evaluating forgetting risk and storage cost
- Design federated learning systems that aggregate privacy-preserving updates while managing heterogeneous data, communication efficiency, and stragglers
- Explain the operational controls needed for on-device learning: device-aware deployment, distributed validation, privacy-preserving monitoring, and rollback across heterogeneous populations

The Edge Learning Paradigm

IMAGINE a voice assistant trained on millions of generic audio samples in a cloud data center. When deployed, it may struggle with a regional accent or household vocabulary. Without local adaptation, its performance can decline as usage diverges from the training distribution. **Edge intelligence** places inference, adaptation, and coordination on or near the devices that observe the data, allowing models to respond to local context under power, memory, privacy, and connectivity constraints.

The serving fleet already has to meet latency targets despite failures and uneven demand. At the edge, the operator also loses control over when a device has power, connectivity, or spare memory. The unit of design remains the fleet, but its participants can disappear between selection and completion. Local adaptation matters here because its cost determines which users can contribute to population learning.

↩ Serving fleets that hold latency service-level objectives (SLOs) through replica failures and uneven demand are established in chapter 6.

Definition 11.1: On-device learning

On-device learning is the local training or adaptation of machine learning models directly on deployed hardware, using data that remains on the device; a local update needs no server connection, although sharing its result does.

1. **Significance**: It enables personalization and continued adaptation where connectivity is intermittent or raw data may not leave the device. In single-machine iron-law terms, each update adds backward and optimizer work to the compute term $O/(R_{\text{peak}} \cdot \eta_{\text{hw}})$ that foreground inference also needs, and it draws on a separate battery and thermal budget that equation 0.54 makes explicit.
2. **Distinction**: Unlike edge inference, which only executes a fixed model, on-device learning runs a local optimization loop (forward and backward passes plus parameter updates) that requires more memory and compute than the forward pass alone.
3. **Common pitfall**: A frequent misconception is that on-device learning requires training from scratch. In reality, it is almost always **on-device adaptation**, which fine-tunes a small subset of a pretrained base model's parameters to fit the data distribution of a local environment.

Consider one federated round for the voice assistant. A coordinator selects eligible devices and distributes a shared model version and a bounded training policy. Each selected device trains on local examples when its policy admits background work, then returns a model update tagged

with the starting version. Some devices lose connectivity or exhaust their resource allowance. The coordinator closes the round according to its deadline and participation requirements, combines compatible updates, evaluates the candidate shared model, and publishes an accepted version for later download. Local personalization can remain on the device instead of entering that aggregate.

This round has the shape of Archetype C (Federated MobileNet), with phone-class clients, private local data, and intermittent availability, and it exposes the C^3 trade-off before any adaptation method is chosen. The Fleet Law (equation 0.3) gives it a time budget, with one change of reading. In a data center the compute term divides one job's work across N devices; here every selected device trains its own copy on its own data, so the term is set by local training on the slowest device the round still waits for rather than divided by N. The communication term is the update transfer over a wide-area uplink, the synchronization term is the wait for enough participants to report, and the overlap term credits whatever downloading and training proceed concurrently. More local compute can reduce the frequency of communication, but devices then need longer uninterrupted training windows and their models can drift toward different local distributions. Short deadlines improve coordination speed while excluding slow participants. The fleet must therefore account for whose updates complete, rather than merely how many devices were selected. Device budgets, adaptation methods, and data reuse determine the work inside the round; aggregation and scheduling determine whether that work improves the shared model. A round of this kind, repeated across a population, is federated learning.

↩ Archetype C (Federated MobileNet), the phone-class federated workload with private local data and intermittent availability, is established in section 11.

Definition 11.2: Federated learning

Federated learning is a decentralized training paradigm where distributed devices collaboratively train a shared model using local data while exchanging only model updates (gradients or weights).

1. **Significance**: It transforms the constraint of data locality into a privacy feature. Within the Fleet Law (equation 0.3), federated learning is constrained by wide-area bandwidth (BW) in its communication term and by the extreme heterogeneity of the fleet, where device-specific efficiency (η_{hw}) and availability can vary by orders of magnitude.
2. **Distinction**: Unlike centralized training, where data is moved to the compute, federated learning moves compute to the data. Raw training examples can remain local, but model updates, participation metadata, and protocol messages still cross the device boundary and may carry personal information.
3. **Common pitfall**: A frequent misconception is that federated learning is "inherently private." In reality, model updates themselves can leak information through gradient inversion attacks, which search for inputs whose gradient matches a submitted update and so reconstruct training examples, requiring additional protections like differential privacy or secure aggregation.

Keeping raw examples local reduces one source of exposure, but an update can still reveal information about the examples that produced it. Secure aggregation lets the coordinator obtain a combined update without inspecting each client's contribution under the protocol's trust assumptions. Differential privacy[1] bounds how much a specified user's or record's participation can change the released result, usually by limiting contributions and adding calibrated noise. Neither protection follows automatically from federation. Their costs and assumptions belong in the round design alongside dropout handling and communication.

A smartphone predicting user text input, a smart home device responding to household routines, and an autonomous vehicle interpreting local driving conditions can all encounter variation underrepresented in centralized training data. The smartphone encounters user-specific linguistic patterns. The smart home device observes seasonal changes and household routines. The vehicle faces road conditions, weather patterns, and traffic behaviors that differ from its training environment.

Such gaps make a case for on-device learning (definition 11.1). A gap is a case, not a verdict; whether local training is necessary, and whether a given update improves behavior, are questions the rest of this chapter answers with measurements. Machine learning then moves from centralized

[1] **Differential Privacy**: A mathematical framework that bounds information leakage by adding calibrated noise to computations. In edge learning, that noise becomes a systems cost because noisier updates usually require more rounds or more data to reach the same utility.

↪ Differential privacy definitions, noise mechanisms, and privacy accounting are developed in section 25.

training to distributed learning across heterogeneous devices, each operating under local constraints. Within the fleet stack, this pushes computation toward the limits of device power, memory, and thermal capacity. Hardware capability contributes to on-device adaptation feasibility alongside the algorithm and runtime: the mobile accelerator scaling tracked in figure 0.142 shows throughput climbing from under 1 TOPS on the A11 Bionic to 35 TOPS on the A17 and A18 Pro, a step in 2023 that is partly a change in rating precision (INT8 versus earlier FP16). That growth expanded the forward inference budget, which is not yet a training budget.

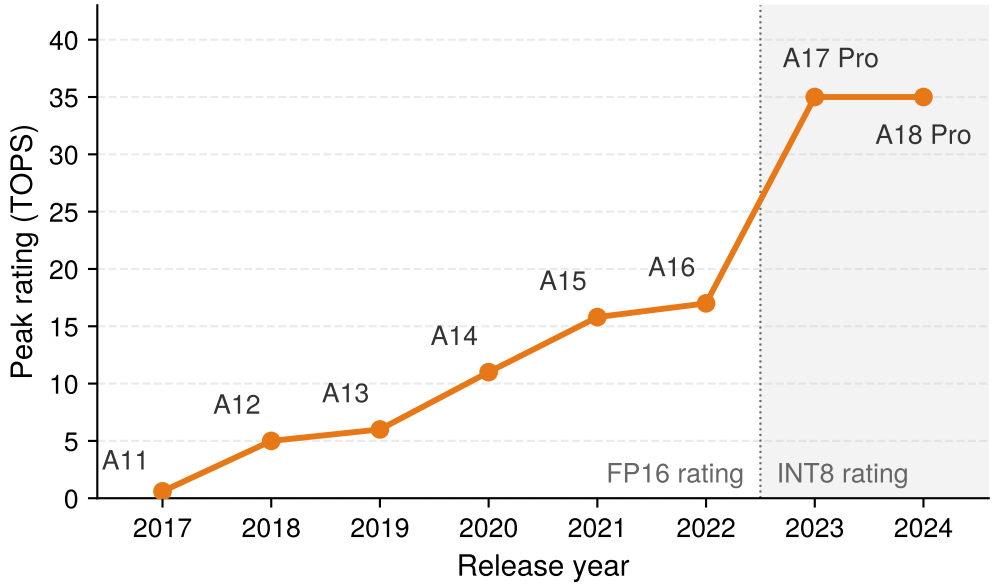


Figure 0.142: Mobile NPU performance scaling: Throughput of Apple's Neural Engine by release year, rising from under one TOPS in 2017 to roughly thirty-five by 2024 with a sharp step at the 2023 generation, much of which reflects Apple's switch from FP16 to INT8 ratings. These inference-oriented peak ratings do not establish training throughput or backward-operator support.

Local adaptation requires a feasible execution path for both prediction and learning. Backpropagation adds gradient computation and update state to the forward computation, but the total cost depends on which parameters train and which representations can be reused. A specialized accelerator can expand the inference budget without executing any backward operator. The feasibility test is therefore the actual update path. It identifies which processor runs each backward and optimizer operator, including any fallback to the CPU or GPU, and measures time, memory, and energy for that path under foreground load (section 12 sets out the steps once the hardware has been introduced). Later sections apply this test rather than restating it.

Systems Perspective 11.1: The silicon dividend of a dedicated NPU

The gap between running a model on a generic mobile CPU and on a dedicated NPU is best understood as a "silicon dividend" rather than a marginal speedup. Published NPU profiles vary by silicon generation and workload, so this callout uses explicit scenario assumptions rather than a benchmark: a 20× latency improvement and a 60× energy-efficiency improvement relative to the modeled MobileNetV2 baseline (1.883 ms per inference on the CPU).

The dividend belongs to the operators the NPU actually executes. An update adds backward and optimizer work that costs roughly one to two more forward passes, because the backward pass computes gradients with respect to both activations and weights. If the runtime cannot place those operators on the NPU, they fall back to the CPU. The forward pass may still collect its 20× dividend, but CPU backward work and transfers between processors can dominate

the complete update. The resulting speed and energy depend on that mixed execution path. An inference-dominated product and an adaptation-dominated one can therefore see very different returns from the same silicon, and only the traced update path says which case a deployment is in.

The transition to on-device learning introduces fundamental tension in machine learning systems design. While cloud-based architectures use abundant computational resources and controlled operational environments, edge devices must function within severely constrained resource envelopes. Memory ranges from a few gigabytes on phones down to hundreds of kilobytes on microcontrollers, sustained power ranges from a few watts down to milliwatts, and network connectivity may be intermittent or entirely absent. When a local model operates in a safety-critical loop, these constraints become life-safety engineering problems.



Lighthouse 11.1: Archetype C (Federated MobileNet): The edge power wall

These constraints run through Archetype C (Federated MobileNet), where learning happens on phone-class devices whose power budget spans roughly 2–10 W, a few watts sustained with brief bursts toward 10 W, and which must share that budget with the user's foreground work. Privacy and policy constraints often forbid moving raw examples off the device, and even where transfer is permitted, a mobile uplink and battery rarely afford shipping raw data to the cloud. Data locality is therefore both a policy requirement and a bandwidth and energy constraint. Quantized training, sparse updates, and federated coordination are the strategies that let Archetype C learn within that envelope. Microcontroller-class sensors with hundreds of kilobytes of memory and milliwatt budgets sit at an extreme below Archetype C, and this chapter treats them as such.

Navigating this architectural tension begins with identifying which resource limits the proposed update. Inference compression can help the base model fit, while selective updates, data reuse, and scheduling address the additional costs of learning. These choices must be evaluated together because saving weight storage does not necessarily shorten the backward pass or create a safe training window.


The consequences reach beyond technical optimization into every phase of the machine learning lifecycle. Models transition from predictable versioning patterns to continuous divergence and adaptation trajectories. Performance evaluation shifts from centralized monitoring dashboards to distributed assessment across heterogeneous user populations. Privacy preservation becomes a core architectural requirement that shapes system design decisions rather than a downstream compliance concern.

Motivations and Benefits

Machine learning systems have traditionally relied on centralized training pipelines. Large-scale distributed infrastructure allows models to be developed and refined on centrally managed datasets (Dean et al. 2012). Once trained, these models can be deployed to client devices for inference, creating a clear separation between the training and deployment phases. While this architectural separation has served many use cases well, it imposes significant limitations in applications where local data is dynamic, private, or highly personalized.

On-device learning challenges this established model by enabling systems to train or adapt directly on the device, without relying on constant connectivity to the cloud. The shift reflects changing application requirements and user expectations that demand responsive, personalized, and privacy-preserving machine learning systems.

Consider a smartphone keyboard that uses local gradient updates to adapt to a user's vocabulary and typing patterns. In the illustrative device profile, an update requires 50 MB–100 MB for activations and optimizer state, against a background-memory allowance of 200 MB–300 MB. The actual allowance depends on the operating system, device, and foreground workload. At the selected operating point, the update consumes 25 percent of that allowance before other application state is



One gradient update claims a quarter of the background-memory allowance.

counted. The design decision is how much learning can fit in the remaining budget while preserving responsive typing; the device's total installed RAM does not answer it.

Four key considerations motivate the shift from centralized to decentralized learning (T. Li et al. 2020): personalization, latency and availability, privacy, and infrastructure efficiency. Personalization matters when deployed models encounter usage patterns and data distributions that their training environments represent poorly. Local adaptation can refine behavior using user-specific data, including linguistic preferences, physiological baselines, sensor characteristics, or environmental conditions. High inter-user variability motivates testing this approach against a fixed model with local context; the measured quality difference determines whether changing weights is worthwhile.

Latency and availability constraints determine where an update can run and how soon it can become useful. In edge computing scenarios, connectivity to centralized infrastructure may be unreliable, delayed, or intentionally limited to preserve bandwidth or reduce energy consumption. When adaptation is justified, local learning permits updates during disconnected periods. The update must still fit the device's resource budget, and its completion deadline is separate from the response deadline for foreground inference.

Privacy considerations provide a third compelling driver. Many applications involve sensitive or regulated data including biometric measurements, typed input, location traces, or health information. Local learning can reduce privacy exposure by keeping raw data on the device and limiting transmission to centralized systems. This can simplify compliance engineering, but it does not by itself establish adherence to regulations such as the General Data Protection Regulation (GDPR), the Health Insurance Portability and Accountability Act (HIPAA) (U.S. Department of Health and Human Services 2026), or region-specific data sovereignty laws.

Infrastructure efficiency provides economic motivation for distributed learning approaches. Centralized training pipelines require backend infrastructure to collect, store, and process user data from potentially millions of devices. Shifting learning to the edge distributes computation and can reduce raw-data ingestion. The resulting savings must be compared with device energy, repeated model transfers, and coordination overhead; whether moving work off the server lowers end-to-end cost depends on that whole sum, not on the server bill alone.

Alternative Approaches and Decision Criteria

On-device learning demands significant engineering investment that may not always be justified. Simpler alternatives can often achieve comparable results with lower operational overhead, and premature adoption introduces complexity without proportional value.

Table 0.136 compares three alternatives that often satisfy personalization and adaptation requirements without local training complexity.

Table 0.136: Alternatives to On-Device Learning: Simpler personalization mechanisms can satisfy many adaptation requirements without local gradient updates, so on-device learning should be reserved for cases where privacy, latency, connectivity, or measured quality requirements rule out these options.

Alternative	Mechanism	When it fits
Feature-based personalization	Store user preferences, interaction history, and behavioral features locally, then feed those features into a static model rather than adapting model weights.	News recommendation systems can store topic preferences and reading patterns locally, then combine those features with a centralized content model.
Cloud-based fine-tuning with privacy controls	Fine-tune centrally on data authorized for transfer, with access controls and, where required, a specified differential-privacy mechanism. Federated analytics and secure aggregation (Bonawitz et al. 2017) can support aggregate statistics but do not themselves provide centralized training examples.	Centralized updates fit when authorized data transfer, update latency, and the specified privacy guarantees meet the application requirements.
User-specific lookup tables	Combine global models with personalized retrieval mechanisms by maintaining a lightweight table for frequently accessed local patterns.	Personalization benefits are needed with minimal computational and storage overhead.

In the cloud-fine-tuning row, differential privacy is the mechanism that bounds information leakage while adding noise that can require more rounds or more data.

The decision to implement on-device learning should follow evidence that simpler alternatives cannot meet the deployment requirements. Restrictions on transferring training data or unreliable connectivity may favor local updates when adaptation is needed.

Latency is the requirement most often mistaken for such evidence. For applications whose foreground deadlines are shorter than the network round-trip time, cloud inference is architecturally infeasible. Camera processing under 33 ms, voice response under 500 ms, AR/VR motion-to-photon latency under 20 ms, or safety-critical control under 10 ms all face network round-trip times typically ranging from 50 to 200 ms. When the network cannot meet the foreground deadline, inference must remain local. A fixed model also executes offline, however, so the deadline settles where the model runs and leaves open where it learns. Local training earns its engineering investment only when a measured adaptation gain justifies its added resource and operational costs.

Knowledge Transfer as the Adaptation Foundation

These motivations are grounded in the broader concept of knowledge transfer, where a pretrained model supplies representations useful for a new task or domain. Reusing those representations reduces what the device must learn from local examples. The benefit depends on what the tasks share, much as experience with one musical instrument helps with some aspects of another. A model pretrained in the cloud can adapt with limited local updates when its representations retain the distinctions the new task requires. If a new input modality or objective requires features the base model does not provide, a small local update may be insufficient.

Transfer is the starting point for the adaptation methods in section 12. When pretrained representations carry the distinctions a personal typing vocabulary, an individual gait, or a drifting sensor needs, bias-only updates, adapters, and head-only training can learn a small correction while freezing most of the network. When that premise fails, head-only adaptation cannot recover distinctions absent from its fixed features. Earlier-layer adapters or broader updates may learn them, but their added state, computation, and data requirements must fit the device budget.

Real-World Application Domains

The motivations for on-device learning appear across consumer technologies, healthcare, industrial systems, and embedded applications, but each domain must justify adaptation against its simpler alternatives. Mobile input prediction provides a concrete example. A smartphone keyboard encounters personal vocabulary and changing typing patterns that may be poorly represented in its released model. Local training can use those observations for personalization or contribute updates to a shared model; these are separate objectives. Google's Gboard,[2] for instance, employs federated learning to improve shared models across a large population of users while keeping raw data local to each device (Hard et al. 2018).

Figure 0.143 contrasts two interactive inference-time prediction strategies: next-word prediction ranks discrete candidate tokens ("favorite," "address," "schedule") in the suggestion bar, whereas Smart Compose generates multi-word inline ghost text ("ail address") through on-the-fly rescoring directly inside the input buffer. Both mechanisms personalize the immediate interaction through local context; longer-lived model improvement occurs separately when federated training aggregates eligible on-device updates.

Wearable and health monitoring devices introduce a different personalization problem. These systems use data from accelerometers, heart rate sensors, and electrodermal activity monitors to track user health and fitness. Individual physiological baselines and sensor placement can affect predictions, motivating calibration or local adaptation. Evaluation must distinguish useful personalization from learning away a change the application is meant to detect. A monitor that adapts to a user's steadily rising resting heart rate has normalized the very signal it exists to flag. Keeping observations local reduces raw-data transfer; whether the adapted model is more accurate is a separate measurement against held-out outcomes.

Voice interaction technologies present another important application domain with unique acoustic challenges. Wake-word detection[3] and voice interfaces in devices such as smart speakers and earbuds must recognize voice commands quickly and accurately even in noisy or dynamic acoustic environments.

[2] **Gboard (2017)**: One of the first widely reported commercial federated learning deployments at mobile scale. Published reports showed that keyboard models could improve from aggregated on-device updates while raw typed text remained local. The systems consequence is durable: compressed updates and privacy mechanisms make cross-fleet learning possible over constrained mobile networks without centralizing raw keystrokes.

[3] **Wake-Word Detection**: An always-on detector incurs inference cost throughout the listening period, even when no keyword occurs. Published keyword-spotting results on dedicated neural processors, plotted in figure 0.147, spend on the order of 30 to 160 μJ per evaluation, so the energy budget is set by how often the detector evaluates over the listening period as much as by the cost of any one evaluation. Local personalization adds a separate update cost and earns its place only if evaluation shows an acceptable trade-off between missed keywords, false activations, and energy use.

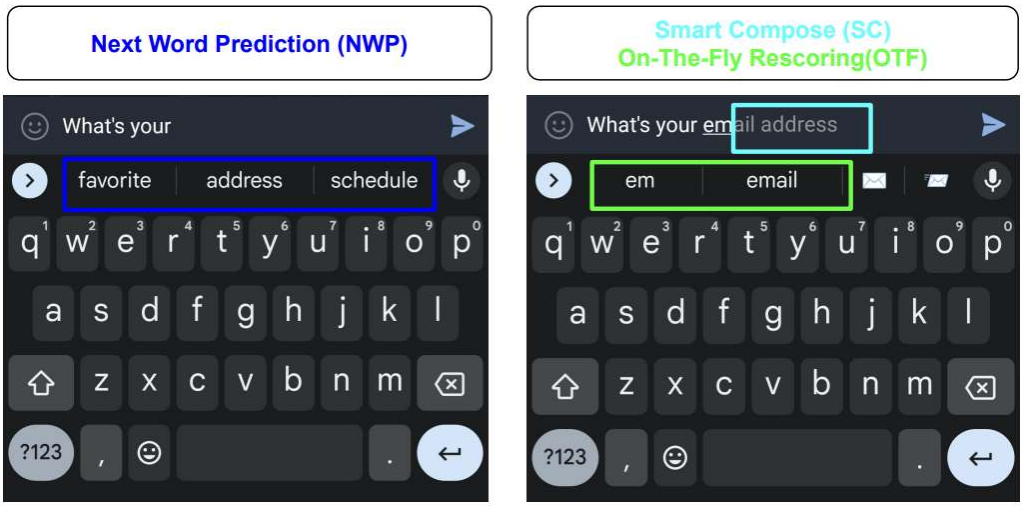


Figure 0.143: On-device prediction strategies: Gboard performs next-word prediction and Smart Compose rescoring locally at inference time. These request-time mechanisms use local context without sending each keystroke to a central server; asynchronous federated training is the separate process that improves shared model parameters from eligible on-device updates.

These systems face foreground latency requirements, such as an end-to-end response target under 500 ms and a wake-word detection target below 100 ms. Those targets constrain inference and the interference permitted from background learning. Local adaptation addresses a separate quality objective: reducing false activations and missed detections for a user's voice and acoustic environment. Far-field microphone configurations and room acoustics motivate that adaptation, but its value must be measured while preserving foreground response times.

Industrial IoT and remote monitoring systems expose the availability side of the decision. In agricultural sensing, pipeline monitoring, or environmental surveillance, connectivity to centralized infrastructure may be limited, expensive, or unavailable. Local inference permits continued detection while disconnected. Local learning adds the ability to adjust thresholds or track seasonal trends, provided the update preserves the distinction between expected variation and anomalies. The consequences of missed detections make validation and a recoverable baseline part of the adaptation design.

Embedded computer vision systems, including robotics, AR/VR, and smart cameras, combine substantial visual processing with the tight foreground budgets illustrated in section 2: a 33 ms frame interval at 30 FPS, a sub-20 ms motion-to-photon target, or a sub-10 ms control deadline. The appropriate deadline depends on the application. On-device adaptation can recalibrate a model to new lighting conditions, object appearances, or motion patterns, but it spends resources needed by that foreground pipeline. A useful update must improve validated behavior without exhausting the latency margin that made local inference viable.

Each domain turns a possible adaptation benefit into a resource decision. Mobile keyboards must fit update state alongside typing; wearables must budget energy across repeated updates; voice and vision systems must preserve foreground deadlines. Disconnected sensors must decide whether a fixed model remains adequate or local change justifies learning. Section 5 establishes the feasibility tests, and three pillars then organize the response. Model adaptation restricts what a device updates (section 12), data efficiency extracts reliable signal from scarce local examples (section 13), and federated coordination decides when compatible local updates can improve a shared model (section 14). The common requirement is validated learning within the device's resource and disclosure limits.

Architectural Trade-Offs Between Centralized and Decentralized Training

Centralized training collects data on managed infrastructure and releases validated model versions to devices. Local adaptation instead changes a device's model using observations that may be

unavailable centrally. Hardware, software, power, and connectivity then vary across the learning population, so an operator must coordinate model versions and evaluate updates from intermittently participating clients (Bonawitz et al. 2019).

A returning device may hold an old model or fail to apply a release. Signed updates, functional checks, deployment telemetry, and rollback therefore form part of the learning protocol (Bonawitz et al. 2019). The central decision is how much state to share across devices. Centralized training, local-only adaptation, and federated coordination are architectural choices that can coexist in one deployment.

Local-only adaptation specializes a model to its user's observations, which are often non-IID[4] and noisy. Sharing that specialization requires an explicit boundary between personal state and the parameters intended to improve the population model.

Federated coordination adds population learning by periodically aggregating updates to shared parameters. A deployment must specify which parameters enter the aggregate and which remain personal; averaging every local adaptation would erase that distinction. Data locality limits raw-data transfer, while separate privacy controls govern the updates that leave each device.

The three architectures therefore differ in what crosses the device boundary, not in how advanced they are (figure 0.144). Local-only learning sends nothing, centralized training sends raw examples, and federated learning sends only model updates $\Delta\theta$ while receiving the shared weights θ.

4 **Non-IID (Not Independent and Identically Distributed)**: Samples may be dependent or drawn from different distributions; in a device fleet, user-specific label and feature distributions can make local updates conflict. Such distributions can degrade federated averaging relative to independent and identically distributed (i.i.d.) baselines (Zhao et al. 2018). The observed failure determines whether to change local work, aggregation, or personalization rather than prescribing one remedy for every non-IID population.

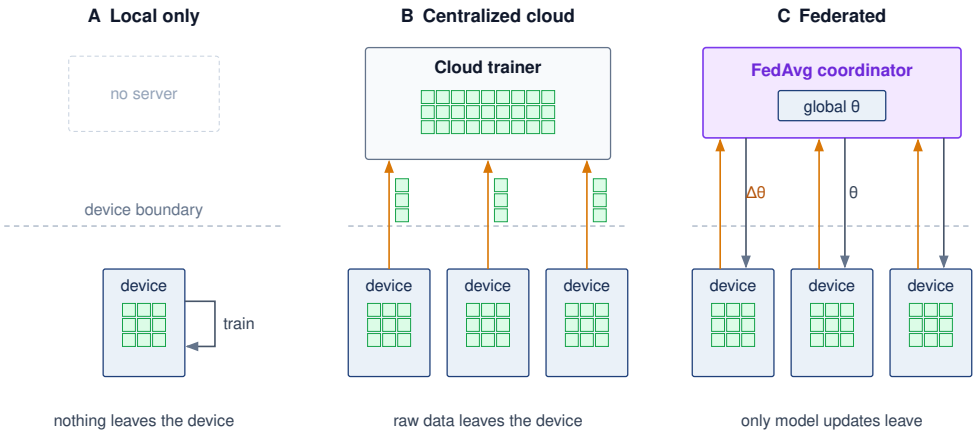


Figure 0.144: Local-only, centralized-cloud, and federated learning: The panels compare three architectures by what crosses the device boundary (dashed line), rather than imply a required evolution. (A) Local-only learning trains on the device and sends nothing. (B) Centralized-cloud learning uploads raw data to a cloud trainer. (C) Federated learning keeps data on the device, downloads the global model θ, and uploads only model updates $\Delta\theta$ to a federated averaging (FedAvg) coordinator. Data locality in (C) still requires separate privacy controls for updates and metadata.

The choice of shared and personal state must fit the devices that execute it. Managed data centers can provision capacity and schedule training across dedicated resources; edge devices share limited power, memory, and cooling with foreground applications. Those local budgets determine which adaptation and coordination choices remain feasible.

Design Constraints

Fine-tuning a neural network on a smartphone is constrained by power and heat. A GPU training cluster may consume megawatts, while a smartphone sustains only a few watts before throttling and bursts toward 10 W for brief periods. Even held at that burst ceiling, an idealized 15 Wh battery would be exhausted in about 1.5 hours, and thermal discomfort or throttling would end the workload sooner. On-device learning must therefore use compute, memory, and data sparingly.

The constraints on parameters, operations, and data interact. A larger batch can improve hardware utilization while exceeding memory capacity; a smaller trainable state can fit memory while extracting too little signal from local data. Compression provides one way to reach a feasible starting point. Quantization shrinks bytes per weight, pruning removes selected parameters, and knowledge

distillation transfers behavior into a smaller architecture. Once the base model fits, local learning must also accommodate the state and work needed to adapt it.

On-device learning adds training state and work to the inference workload. A full-model update requires forward propagation, gradient computation through backpropagation, and weight updates. Memory grows because the update must hold gradients, optimizer state, and the activations saved for the backward pass, and arithmetic grows because the backward pass computes gradients with respect to both activations and weights, up to roughly twice the work of the forward pass. The size of each increase depends on the model, batch, precision, and execution schedule. Compression and selective adaptation address different parts of that pressure, so feasibility requires accounting for the resulting working set rather than applying a universal multiplier.

The relevant budget is the capacity available to the learning task. Centralized training can reserve resources and assemble datasets under a common management policy. A device must fit an update around the operating system, foreground applications, and locally available examples. Total installed memory or peak accelerator throughput therefore overstates what background learning can use.

These constraints define eligibility for a federated round. Model footprint and trainable state determine which device tiers can participate. Sparse, nonuniform data determines how much signal each local update can extract. Limited compute determines when training can run at all. A policy that exceeds the budget on weaker devices changes the population represented in the aggregate, even if it improves throughput on stronger devices.

Quantifying training overhead on edge devices

Training changes memory footprint, memory bandwidth, and hardware utilization through additional live state and backward operations. Table 0.137 lists illustrative increases, and its rows count different things, so each multiplier carries its own denominator. The 4–12× memory range compares a training working set with the inference weights alone, leaving inference activations and workspace out of the denominator. The 2–3× compute range compares one update (forward plus a backward pass of one to two times the forward work) with one inference. The 10–50× energy range compares a converged adaptation, which takes many gradient steps, with a single inference, so it is not a per-sample multiplier.

Table 0.137: Training Amplifies Inference Constraints: On-device learning operates under the same efficiency constraints as inference but with training-specific amplifications that make optimization dramatically more challenging. This table quantifies how each constraint dimension intensifies when transitioning from running pretrained models to adapting them locally. The factors are illustrative: memory and compute compare an update with inference, while the energy row includes repeated optimization steps toward convergence. These different counting units must not be treated as one universal per-sample multiplier.

Constraint Dimension	Inference	Training Amplification	Impact on Design
Memory Footprint	Model weights + single activation map	Weights + full activation cache + gradients + optimizer state	4–12× the inference weights alone; forces aggressive compression
Compute Operations	Forward pass only	Forward + backward + weight update	2–3× one inference, per update step; limits model complexity
Memory Bandwidth	Sequential weight reads	Bidirectional data flow for gradients	Additional traffic depends on update scope and activation schedule
Energy per Adaptation	Single inference operation	Multiple gradient steps with convergence	10–50× one inference, per converged adaptation; requires opportunistic scheduling
Data Requirements	Current inputs; no training labels required	Local update examples, often sparse or noisy	Necessitates sample-efficient methods
Hardware Utilization	Optimized for forward passes	Different access patterns for backprop	Inference accelerators may not help training

Figure 0.145 breaks down the memory row. Panel (a) starts with 40 MB of FP32 weights for a 10M-parameter model and adds 40 MB of gradients, 80 MB of Adaptive Moment Estimation (Adam) state for its two moment arrays, and 200 MB of assumed activation state to reach 360 MB, a 9× amplification over the weights. The same accounting spans the table's range. Weights, gradients,

and Adam's two moments alone are four weight-sized arrays, the 4× floor reached when saved activations are negligible, and activations between five and eight times the weight bytes carry the total from 9× to 12×. Panel (b) holds the 9× proportions fixed across model scales from 1M to 100M parameters, so its constant ratio is an assumption rather than a finding. What it shows is the absolute cost of that ratio. The gap between weights and training stack grows from tens of megabytes at 1M parameters to gigabytes at 100M, so a model whose weights fit comfortably can still have a training stack that does not. Actual peak memory depends on optimizer choice, batch size, activation checkpointing, and how many layers are updated, and the 4–12× range describes these configurations rather than predicting any particular device.

↪ The bytes per parameter that weights, gradients, and optimizer state occupy in mixed-precision Adam training are developed in section 3.

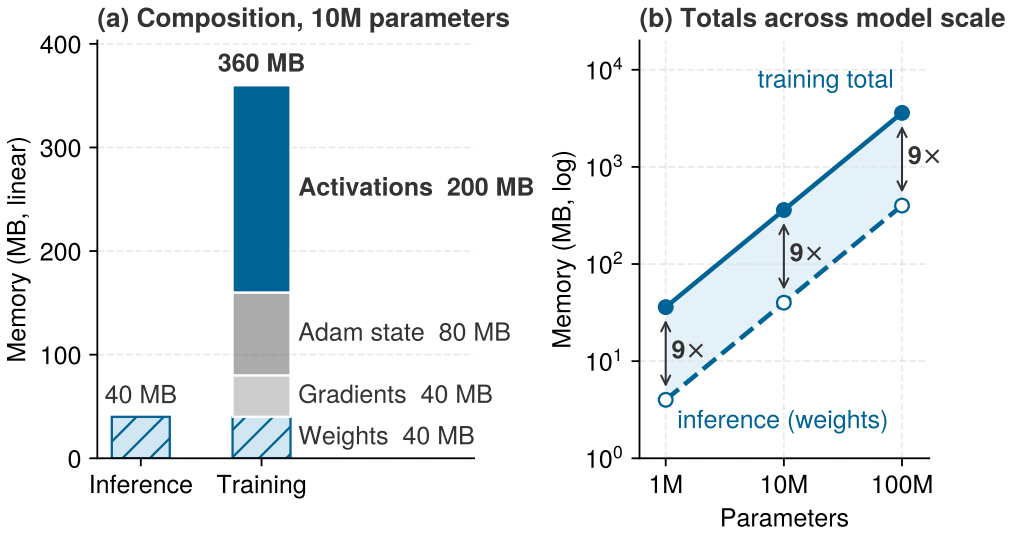


Figure 0.145: The training memory amplifier: (a) On a linear axis, the training stack for a 10M-parameter FP32 model shows what fills memory: gradients match the weights, Adam state doubles them, and activations dominate. (b) On a log axis, inference and training totals keep the same ratio from 1M to 100M parameters. The configuration is illustrative (activations assumed at 5× the weights), producing a representative 9× amplification.

Peak memory usage

Memory consumption changes over an update as tensors are allocated and released. The peak depends on when weights, saved activations, gradients, optimizer state, and temporary workspace coexist; it need not occur at the same operation in every implementation. For the 10M-parameter model of figure 0.145, 40 MB of FP32 weights belong to a 360 MB training working set, of which 200 MB is saved activations. Set against a smartphone's 8 GB of installed RAM, that working set looks small, but installed RAM is not the budget. A background task receives only the allowance the operating system grants after itself and the foreground applications, 200 MB–300 MB in the keyboard profile of section 2, and 360 MB exceeds even the top of that range. Activation checkpointing (also called gradient checkpointing) discards selected intermediate activations and recomputes them during the backward pass (Chen et al. 2016), the same trade that cuts activation memory in data-center training. It trades extra computation for lower activation storage, so its value depends on both the peak it removes and the additional time and energy the device can afford.

That allowance, not installed RAM, is the ceiling for a working-memory budget that every adaptation strategy in this chapter must meet (figure 0.146). The runtime stages frozen weights from nonvolatile flash into volatile working memory and reserves headroom below the physical device ceiling M_{device} for runtime and application state. Within the working-memory envelope M_{peak}, four quantities contribute: let $M_{\text{weights,resident}}$ be the backbone weights that must reside in working memory, M_{train} the trainable parameters plus their gradients and optimizer state, $M_{\text{activations}}(t)$ the saved activation state, and $M_{\text{workspace}}(t)$ operator workspace. With all terms counted in bytes and disjoint, the required working memory is

↩ Activation checkpointing, which recomputes selected activations in the backward pass to cut activation memory at the cost of extra FLOPs, is established in section 4.

$$M_{\text{peak}} = M_{\text{weights,resident}} + M_{\text{train}} + \max_{t} \left[M_{\text{activations}}(t) + M_{\text{workspace}}(t) \right]. \tag{0.53}$$

Admission then requires $M_{\text{peak}} + M_{\text{reserve}} \leq M_{\text{device}}$, where M_{reserve} holds the runtime, the operating system, and the foreground application; for a background task, $M_{\text{device}} - M_{\text{reserve}}$ is the allowance just described. Weights stored in nonvolatile memory still consume deployment storage, and any staging buffers belong in $M_{\text{workspace}}(t)$. The maximum must follow the actual execution schedule because activation and workspace peaks need not coincide. Each term is a separate lever, and the adaptation strategies of section 12 differ in which term they shrink. Freezing weights removes their gradients and optimizer state from M_{train}, but it does not make the frozen base or every backward dependency disappear.

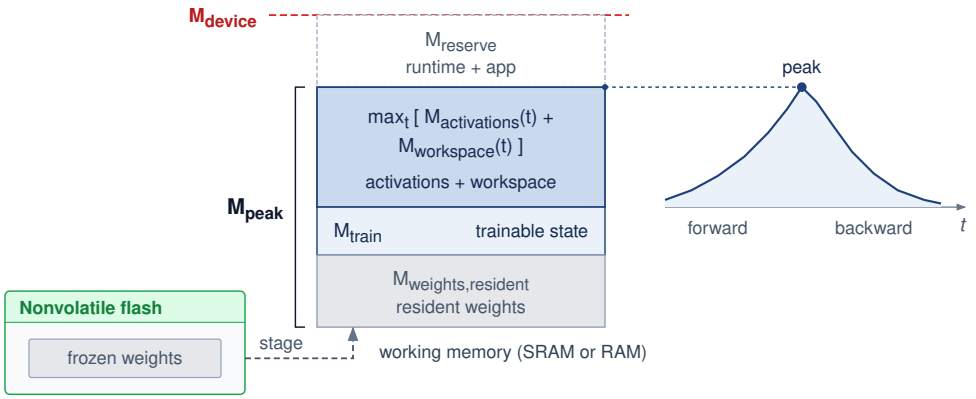


Figure 0.146: Adaptation memory budget: Working memory must hold the resident weights $M_{\text{weights,resident}}$, the trainable state M_{train}, and the peak of live activations plus workspace; together these form M_{peak}, which must fit under the device limit once the runtime and foreground application are reserved. Frozen weights kept in nonvolatile flash count toward storage, not working memory, until they are staged, and staging buffers belong to the workspace term. Segment heights are schematic, not to scale.

An inference optimization therefore needs a second feasibility check before it is used for adaptation. Reducing stored weights may leave activations or optimizer state as the dominant cost. Selecting which parameters to train changes that accounting, linking the memory analysis to the adaptation choices that follow.

Checkpoint 11.1: On-device training constraints

Verify understanding of how training amplifies edge constraints:

- ☐ Training memory blowup: Explain where the 4× floor of the chapter's 4× to 12× training-memory range comes from, and which term pushes a configuration toward the upper end.
- ☐ Timing of the peak: Explain why peak training memory depends on when weights, saved activations, gradients, optimizer state, and workspace coexist, rather than on the sum of every tensor the update ever touches.
- ☐ Backward-pass OOM: Explain why a 10M parameter model can still trigger out-of-memory errors during the backward pass on a smartphone with 8 GB of RAM.
- ☐ Checkpointing energy: Evaluate the claim that activation checkpointing reduces the total energy consumed by on-device training.

Model constraints

The structure and size of the machine learning model directly determine whether on-device training is possible. Cloud-deployed models can span billions of parameters and rely on multi-gigabyte memory budgets; models intended for on-device learning must conform to tight constraints on memory, storage, and computational complexity. Training tightens each of them by the factors of table 0.137.

The scale of these constraints becomes concrete across the device spectrum. MobileNetV2, commonly used in mobile vision tasks, requires approximately 14 MB of storage in its standard configuration. While feasible for smartphones with gigabytes of available RAM, this far exceeds the 256 KB of SRAM and 1 MB of flash storage on microcontrollers such as the Arduino Nano 33 BLE Sense.[5] On such severely constrained platforms, even a single convolutional layer may exceed available RAM during training due to intermediate feature maps and gradient storage.

Training adds state whose size cannot be inferred from layer count alone. Backpropagation retains or recomputes intermediate activations, with storage determined by tensor shapes, precision, batch size, and the update schedule. The arithmetic grows quickly. A 10-layer convolutional model processing 64×64 images saves feature maps of 64×64 values per channel when its layers keep the input resolution, so at FP32 every channel of every retained map costs 16,384 bytes, about 16 KB. Ten layers of even a few channels each therefore outgrow the 256 KB of microcontroller SRAM before a single gradient or optimizer value is stored. The relevant comparison is that peak against the memory available to learning after runtime and application reserves, which is why the techniques later in this chapter attack saved activations as well as trainable parameters.

Model complexity also affects runtime energy consumption and thermal limits. In smartwatches or battery-powered wearables, sustained training can deplete the energy allowance or trigger thermal throttling even when its tensors fit in memory. Arithmetic precision alone does not determine feasibility; the update duration and measured power determine its energy cost. Benchmarks such as MLPerf Tiny provide small quantized inference targets for constrained devices (Banbury et al. 2021). On-device adaptation techniques address the additional training cost by freezing most parameters, reducing activation storage, or selecting sparse update sets (Cai et al. 2020; Kwon et al. 2024).

Battery and thermal constraints also determine when learning can run. The illustrative smartphone profile uses a sustained processing envelope of 2–3 W and brief bursts of 5–10 W. An update that fits during an idle interval may exceed the available headroom when foreground work starts. Charging supplies energy, but the runtime must still monitor heat and contention, reducing the update duty cycle or suspending learning when limits are approached. An overnight idle-and-charging policy provides one candidate window; measured device conditions determine whether that window remains usable.

These constraints make adaptation feasibility part of architecture selection. When the base model exceeds device capacity, partitioning, quantization, offloading, or a smaller architecture can change the deployment footprint, each with its own execution cost. Lightweight architectures such as MobileNets, SqueezeNet (Iandola et al. 2016), and EfficientNet (Tan and Le 2019) address resource-constrained inference through mechanisms such as depthwise separable convolutions,[6] bottleneck/fire modules, and compound model scaling. Fitting the forward path is the starting point; quantization support and selective-update costs must then be established for the training path.

Modularity is a key design property. MobileNets (Howard et al. 2017) and MobileNetV2 (Sandler et al. 2018) can be configured with different width multipliers and resolution settings to balance performance and resource usage. A complete MobileNetV2 with width multiplier $\alpha_{\text{width}} = 1.0$ has approximately 3.5M parameters (14 MB in FP32). With $\alpha_{\text{width}} = 0.5$, the complete 1000-class model has approximately 2.0M parameters (7.9 MB), while a feature-extractor-only deployment with a small task-specific head can be as small as 0.69M parameters (2.8 MB), fitting within a 4 MB model budget.

Data constraints

Model architecture determines the memory and computational baseline for on-device learning, but data availability and quality introduce equally fundamental limitations that shape every aspect of the learning process. Data available to on-device ML systems differs dramatically from the large, curated datasets used in cloud-based training. At the edge, data is locally collected, temporally

5 **Arduino Nano 33 BLE Sense**: With 256 KB SRAM, roughly 65,536× smaller than a flagship smartphone's 16 GB, a single $224\times224\times3$ RGB image occupies ~151 KB and consumes roughly 60 percent of available memory; activation and gradient storage add several more live tensors, and optimizer state can push the training footprint far beyond the inference footprint. A convolutional neural network (CNN) layer can therefore exceed SRAM during backpropagation even when its weights fit. Quantization can reduce this footprint, but feasibility also depends on input size, saved activations, and which parameters are updated.

6 **Depthwise Separable Convolutions**: Decomposes a standard convolution into a per-channel depthwise filter followed by a 1×1 pointwise combination. For a 3×3 convolution with 512 input/output channels, this reduces parameters from 2.36 M to about 267 K, an 8.8× reduction in weight storage and arithmetic, though not in activation storage. The intermediate depthwise output can add saved state, so training-memory savings depend on tensor shapes and whether the implementation fuses, retains, or recomputes that intermediate.

sparse, and often unstructured or unlabeled. The resulting challenges in volume, quality, and statistical distribution directly affect the reliability and generalizability of on-device learning.

Useful training data can remain scarce even when sensors produce many readings. A smart fitness tracker may record an entire exercise session while receiving only one activity label. Sampling frequency, windowing, and temporal correlation determine how those readings become examples, and a whole session of correlated readings can still amount to a single labeled observation. The learning policy must therefore budget for usable supervision as well as stored bytes.

On-device data is also frequently non-i.i.d. (Zhao et al. 2018). A voice assistant deployed across households encounters variation in accents, languages, speaking styles, and command patterns. Smartphone keyboards observe individual typing patterns, autocorrect preferences, and multilingual usage. Centralized systems also encounter such variation, but a federated coordinator cannot freely shuffle raw examples across clients. Local updates therefore reflect different data distributions, complicating the balance between shared generalization and personalization.

Label scarcity compounds the distribution problem. Most edge-collected data is unlabeled by default, requiring systems to learn from weak or implicit supervision signals. A smartphone camera may capture thousands of images throughout the day, but only a few are associated with meaningful user actions (tagging, favoriting, or sharing) that could serve as implicit labels. In many applications, including anomaly detection in sensor data and gesture recognition adaptation, explicit labels may be entirely unavailable, making traditional supervised learning infeasible without alternative methods for weak supervision or unsupervised adaptation.

Data quality introduces further challenges. Environmental sensors or automotive ECUs can experience calibration changes, interference, or mechanical wear that corrupt or shift input signals. An adaptation loop may learn from those changes as if they represented useful new behavior. Local input checks and validated outcome signals must distinguish sensor faults from changes the model should learn, especially when raw observations are unavailable for central inspection.

Privacy and security requirements can further restrict which examples may be retained or shared. Keeping health data, personal communications, or behavioral traces on the device narrows raw-data exposure, but local storage and transmitted updates remain sensitive. The learning design must specify access, retention, and permitted disclosures alongside the data needed for adaptation and validation.

Compute constraints

The edge hardware landscape provides the computational substrate for machine learning, spanning from microcontrollers like STM32F4 and ESP32 at the most constrained end, to mobile-class processors with dedicated AI accelerators (Apple Neural Engine, Qualcomm Hexagon, Google Tensor) in the middle, and high-capability edge devices at the upper end. While these devices offer varying levels of inference capabilities (computational throughput, memory bandwidth, and energy efficiency when executing pretrained models), training workloads exhibit fundamentally different computational characteristics that reshape hardware utilization patterns.

The update path adds work that an inference rating does not measure. Backpropagation reads saved or recomputed activations, produces gradients, and updates parameters and optimizer state. These operations add memory traffic, with the amount determined by the trainable subset and execution schedule. Each device class that follows therefore gets the update-path test from the start of the chapter, applied to its own memory, operators, and power, rather than a verdict read from its inference rating.

At the most constrained end, devices such as the STM32F4[7] or ESP32-S3 microcontrollers offer only a few hundred kilobytes of SRAM and limited compute and power budgets (Warden and Situnayake 2020). Although these families include single-precision floating-point support, practical ML deployments commonly rely on quantized or fixed-point kernels for efficiency. Libraries like CMSIS-NN (Lai et al. 2018) provide optimized neural network kernels for Arm Cortex-M processors, achieving 4.6× runtime improvement through fixed-point arithmetic and single instruction, multiple data optimizations. These severe limitations preclude conventional deep learning libraries and require models designed for quantized arithmetic and minimal runtime memory allocation. Quantization-aware training[8] can prepare models for efficient quantized inference. Executing local

7 **STM32F4 Microcontroller**: With 192 KB SRAM, a 168 MHz clock speed, and a single-precision floating-point unit, the main constraint is not the absence of floating point but the tiny memory and energy envelope. A dense layer with 1,000 input features and 10 hidden units requires approximately 40 KB for weights and biases in FP32, consuming about 20 percent of total SRAM before accounting for activations or gradients. Local updates must therefore fit around the device's primary workload and power budget, and INT8 or fixed-point kernels remain preferable when accuracy allows.

8 **Quantization-Aware Training (QAT)**: Simulates quantization during training to adapt the model to low-precision inference (Jacob et al. 2018; Krishnamoorthi 2018). Fake-quantization operations commonly retain floating-point training tensors, so QAT does not itself imply integer backward kernels or a smaller training-state budget. On-device adaptation must separately establish supported update arithmetic, state storage, and measured energy costs.

updates requires a separately supported training path, potentially with selective updates, quantized gradients, or a compact floating-point working set.

Microcontroller memory rules out training configurations whose live tensors exceed SRAM, rather than every convolutional model. Feasibility depends on tensor shapes, update scope, numerical representation, and the compiled execution schedule. Plain stochastic gradient descent (SGD) reduces optimizer state compared with methods that retain additional moment arrays.[9] Non-neural adaptation, such as k-means clustering, offers a different way to update local centroids for sensor analysis. The method and its arithmetic must still fit the available memory and produce a validated improvement; neither a simple optimizer nor integer execution establishes that result alone.

Moving up the computational hierarchy, mobile-class hardware represents improvement but still operates under severe constraints. Platforms including the Qualcomm Snapdragon, Apple Neural Engine,[10] and the Google Tensor system-on-chip (SoC) provide significantly more compute power than microcontrollers, often featuring dedicated AI accelerators and optimized support for 8-bit or mixed-precision matrix operations. These accelerators offer dedicated matrix multiplication units, on-chip memory hierarchies, and power management features specifically designed for neural network inference, with varying support for local training workloads. While these platforms can support more sophisticated training routines, including full backpropagation over compact models, they still fall far short of the computational throughput and memory bandwidth available in centralized data centers. For instance, training a lightweight transformer on a smartphone is technically feasible but must be tightly bounded in both time and energy consumption to avoid degrading the user experience, highlighting the persistent tension between learning capabilities and practical deployment constraints.

Published benchmark results from MLPerf Tiny and vendor data illustrate the range of edge inference costs in figure 0.147. The plotted tiers span roughly 100× in energy per inference. Dedicated neural processors such as the Syntiant Core 2 and STM32N6 NPU occupy the sub-millijoule MCU and application-specific integrated circuit (ASIC) band (30 to 444 μJ per inference across keyword spotting, visual wake words, and small-image classification, with keyword spotting finishing in under 5 ms), Google Coral appears near 4.8 mJ, and the Jetson AGX Orin appears near 15 mJ for ResNet-50. The roughly 100× gap mixes different workloads with different hardware, so it is not a matched-task efficiency comparison. Energy per inference does not determine battery lifetime on its own, because inference frequency, sleep power, sensing, radio use, and usable battery capacity also enter that budget. For a learning device the figure sets the scale against which an update must be judged. One evaluation costs microjoules to millijoules, while each second of training inside the 2–3 W sustained envelope spends joules, more than a thousand keyword-spotting evaluations at the plotted 30 to 160 μJ. An update can therefore be a substantial energy cost, but its share of the device budget depends on how often training and inference run. Both paths need measurement over the same operating period.

These computational limitations become especially acute in real-time or battery-operated systems. The foreground latency budgets established in section 2 constrain the interference local training may introduce; they do not require training to finish within an inference deadline. The harder constraint is that adaptation cannot have the device to itself. In a smartphone-based speech recognizer, on-device adaptation must seamlessly coexist with primary inference workloads without interfering with response latency or system responsiveness. Similarly, in wearable medical monitors, training must occur opportunistically during carefully managed windows (typically during periods of low activity or charging) to preserve battery life and avoid thermal management issues.

Beyond raw computational capacity, the architectural implications of these hardware constraints extend into fundamental system design choices. Training operations exhibit fundamentally different memory access patterns than inference workloads: gradient computation, activation storage, and optimizer updates add memory traffic whose magnitude depends on which parameters train and which intermediate states are retained. These transfers can create bottlenecks that pure computational metrics do not capture. Hardware designs can address these challenges with specialized support, but a particular device must expose that support through its training runtime. Mixed-precision datapaths may execute different formats in forward and backward kernels when those kernels exist. Sparse-update savings require an execution path that can actually skip the selected work; zero gradients alone do not establish reduced hardware cost (section 13). Near-memory compute

9 **SGD (Stochastic Gradient Descent)**: Plain SGD stores parameters and gradients, while Adam additionally retains two moment arrays. At the same precision and with all arrays resident, that is four parameter-sized arrays instead of two, before activations and workspace. Momentum, master weights, gradient accumulation, and offloading change this accounting. Optimizer choice also affects convergence, so lower state cost must be evaluated against the updates needed to reach the quality target.

10 **Apple Neural Engine**: Apple's dedicated neural accelerator, first shipped in the A11 Bionic in 2017; its rating growth through the A18 Pro is tracked in figure 0.142. Which of an update's operators actually reach it, rather than falling back to the CPU or GPU, is the runtime question worked through in section 12.

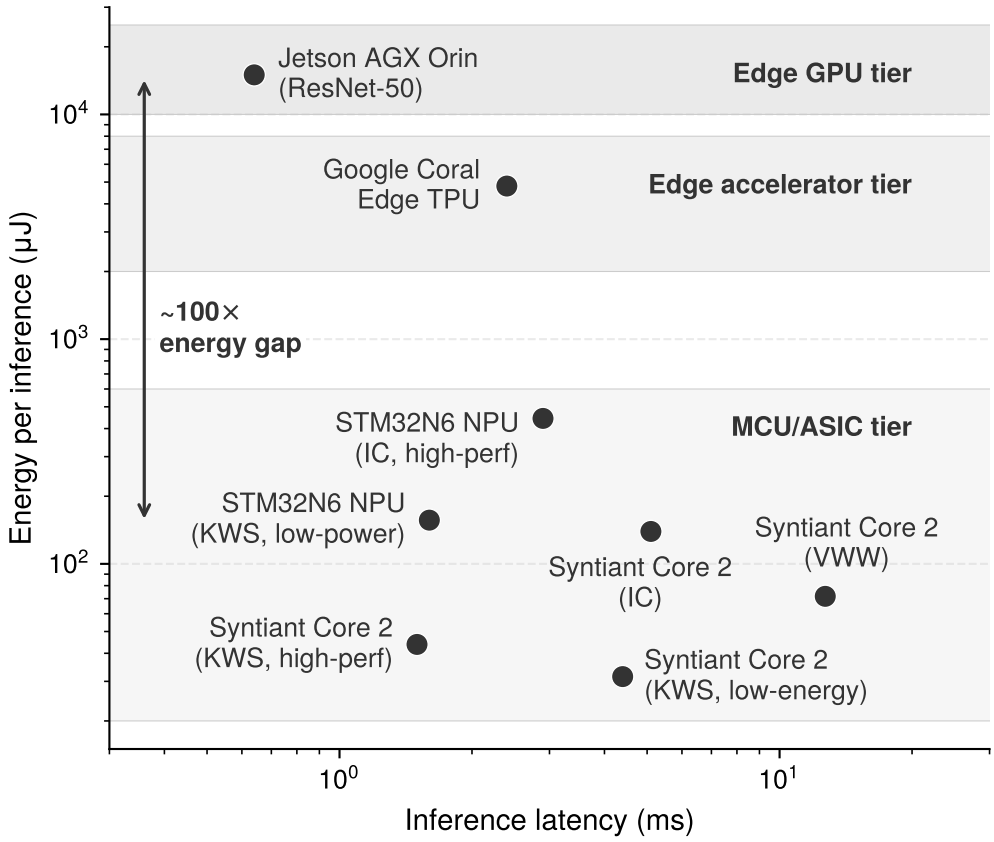


Figure 0.147: The edge inference landscape: Published inference latency and energy measurements from MLPerf Tiny and official benchmarks reveal three distinct hardware tiers separated by approximately 100× in energy per inference; because the tiers run different workloads (keyword spotting and small-image tasks versus ResNet-50), the gap mixes hardware efficiency with workload size. Dedicated neural processors (Syntiant, STM32N6) achieve keyword spotting in under 5 ms at 30–160 microjoules, while edge GPUs (Jetson Orin) deliver sub-millisecond latency at 15 mJ.

architectures[11] reduce data movement costs by performing gradient updates directly adjacent to weight storage, addressing the memory bandwidth bottleneck. However, many edge accelerators remain fundamentally optimized for inference workloads, creating hardware-software co-design opportunities for on-device training accelerators designed to handle the unique demands of local adaptation.

[11] **Near-Memory Computing**: Places processing elements adjacent to or within memory arrays, reducing the data movement that often dominates arithmetic energy in conventional architectures (Horowitz 2014). Near-memory accelerator designs such as TensorDIMM illustrate how moving tensor operations closer to memory can improve throughput and energy behavior for memory-bound deep learning workloads (Kwon and Rhu 2018). For edge training, where gradient computation generates write-heavy access patterns that overwhelm cache hierarchies, this architectural shift could make some forms of on-device backpropagation more practical.


The mobile memory wall

Rising NPU ratings tempt designers to read device capability from TOPS, but every byte a local update moves crosses the same memory interface as inference traffic, and an update moves far more bytes than an inference. Counting them for the 10M-parameter model of figure 0.145, under the simplest assumption that each tensor crosses DRAM once per use with no cache reuse, shows how far. The forward pass reads the weights and writes the saved activations, and the backward pass rereads the activations and weights and writes the gradients. An Adam step then reads the weights, gradients, and both moments and writes the weights and moments back. One update step moves about 800 MB, 20× the weight bytes a single inference reads, and at the 51 GB/s peak bandwidth of an A17 Pro that traffic alone needs about 16 ms per step before any arithmetic is counted. Mobile language-model decode, the case already met as the autoregressive bottleneck (principle 15), shows the same ceiling at its starkest, since decode pressure falls on memory and interconnect rather than peak arithmetic throughput (Ma and Patterson 2026). The interface itself is narrow by data-center standards. Data-center HBM3 on an H100 provides 3,350 GB/s of peak

unidirectional DRAM memory bandwidth, while flagship mobile systems sit near 51 GB/s (A17 Pro, LPDDR5) to 77 GB/s (Snapdragon 8 Gen 3, LPDDR5X), a gap of roughly 44–65×.

A bandwidth gap of this size gives a corresponding gap in a bandwidth-only time ceiling only when both devices stream the same bytes and sustain the same fraction of their peak bandwidth; precision, batching, cache reuse, and runtime overhead all move the measured ratio. Low-precision weights attack that ceiling when weight traffic is what binds. Storing FP32 weights at 4 bits, for example, reduces weight bytes by 8× and reduces that component of traffic by the same factor if the runtime consumes the compressed representation efficiently. It does not increase physical bandwidth or remove cache-state traffic and decoding overhead, and the precision choice must satisfy both quality and measured latency requirements. For an on-device update the relief is smaller still. In the count above, the three weight reads are only about 15 percent of the step's traffic, and a quantized base leaves the saved activations, gradients, and optimizer state that make up the rest untouched.

↩ The memory wall, the widening gap between arithmetic throughput and the memory bandwidth that feeds it, is established in section 3.



Datacenter high-bandwidth memory (HBM) outruns flagship mobile memory bandwidth by about 44 times.

> **Systems Perspective 11.2: Why bandwidth, not TOPS, is the binding constraint**
>
> In small-batch decoding, weights too large to remain in cache must repeatedly travel from memory to the compute units. The data term $(D_{\text{vol}}/\text{BW})$ of the single-machine iron law (section 17) dominates only when that transfer takes longer than the required computation. Cache capacity alone cannot decide it, because weight reuse, batch size, and sustained throughput also matter. Weight quantization shrinks the weight component of D_{vol} without proportionally reducing the mathematical operation count. For a decoding workload measured to be memory bound, sustained bandwidth and bytes transferred per token are therefore more useful than peak TOPS for evaluating accelerator options. Local adaptation needs the same comparison applied to its own forward, backward, and optimizer traffic, counted per update step rather than per token, where the count above puts it at about 800 MB.

Edge hardware integration challenges

Beyond the individual constraints of models, data, and computation, on-device learning systems must navigate the underlying physics of mobile computing: power dissipation, thermal limits, and energy budgets. These physical constraints are fundamental design drivers that determine the entire feasible space of on-device learning algorithms.

Energy and thermal constraint analysis

Energy and thermal management represent the most challenging aspects of on-device learning system design, as they directly impact user experience and device longevity. Mobile devices operate under strict power budgets that fundamentally determine feasible model complexity and training schedules.

> **Napkin Math 11.1: Battery drain: The cost of edge learning**
>
> **Problem**: A team is designing a background fine-tuning job for a personalized voice assistant on a smartphone. Run unconstrained, the training job draws 4.5 W, above the 2–3 W sustained envelope given earlier, and takes 30 minutes to complete. If the phone has a 15 Wh battery, how much of the user's battery will this "invisible" update consume?
>
> **Math**:
>
> 1. Total energy: 4.5 W × 0.5 h = 2.25 Wh.
> 2. **Battery impact**: 2.25 Wh/15 Wh = 15 percent.
>
> **Systems insight**: Consuming 15 percent of a user's battery for one background task makes update frequency a deployment decision. That energy cannot be translated into a fixed amount of screen-on time without specifying the foreground workload. A policy of **opportunistic scheduling** admits learning when device conditions permit it; a federated policy might require

charging, Wi-Fi, and thermal headroom. Charging supplies energy but does not remove heat or foreground contention, so those constraints still need separate checks.

This battery calculation is the local edge-learning version of a broader energy constraint: training must satisfy the user's energy budget in addition to the model's accuracy target. A production design therefore has to account for energy at scheduling time, compare local computation against communication cost, and defer learning when the user's device cannot absorb the update.


That decision can be expressed as a background-work admission condition. Let E_{update} be the predicted energy for one adaptation window, E_{slack} the energy the policy permits before the next charging opportunity, P_{device} the current sustained power, P_{update} the adaptation increment, and P_{thermal} the thermally sustainable limit. Let $L_{\text{lat,fg}}$ be measured foreground latency, $\Delta L^{\text{wc}}_{\text{lat,fg}}$ the worst-case latency increase under concurrent adaptation, and T_{deadline} the foreground deadline. The runtime admits an update only if

$$E_{\text{update}} \le E_{\text{slack}} \quad \wedge \quad P_{\text{device}} + P_{\text{update}} \le P_{\text{thermal}} \quad \wedge \quad L_{\text{lat,fg}} + \Delta L^{\text{wc}}_{\text{lat,fg}} \le T_{\text{deadline}}. \tag{0.54}$$

Charging can enlarge the energy allowance, but it does not waive the thermal or foreground-latency tests. The quantities must come from device- and workload-specific profiling, and the runtime must revoke admission when the measured envelope changes. Shorter update windows, a lower duty cycle, or a smaller trainable parameter set can make a rejected update feasible; allowing background learning to consume the foreground deadline cannot.

The same test also decides who teaches a shared model. Passing it correlates with hardware class, charging habits, and connectivity, so devices that are old, rarely charged, or thermally tight contribute few updates, and the population a federated model learns from is the admitted population rather than the deployed one (principle 18). The admission policy that protects each device is therefore also a sampling policy, and section 14 measures the skew it creates.

Memory hierarchy optimization



Device memory spans more than four orders of magnitude, phone to microcontroller.

Capacity is the question equation 0.53 already answers. The update fits only if its peak working set stays inside the allowance left after the runtime and foreground reserve. Across device classes, installed memory spans more than four orders of magnitude, from about 16 GB on flagship phones through 64 MB–1 GB on IoT embedded systems to 256 KB–2 MB of microcontroller SRAM, and in every class learning sees only a share of the installed total. Quantization, pruning, and distillation can each shrink the resident and trainable terms of that working set (Jacob et al. 2018; Han et al. 2015; Hinton et al. 2015), but their gains are workload-specific and do not combine automatically, so they must be validated together against the same budget. Once the working set fits, capacity says nothing about the second question, which is how much traffic the update drives through the hierarchy and how much of that traffic the caches can absorb.

Cache locality affects execution time after the working set fits in device memory. Representative mobile hierarchies span L1 caches of 32–64 KB, L2 caches of 1–8 MB, and system memory of 4–16 GB, with access-latency differences of 10–100× across levels; the exact capacities and costs are device-specific. The entire training batch need not fit in cache. Operator tiling and memory layout aim to reuse active tensor blocks before eviction, while batch size controls activation storage and available parallelism. Gradient accumulation can limit the microbatch working set, but it also retains accumulation state and adds accesses, so its effect on traffic must be measured.

Training adds gradient and optimizer traffic to the tensor reads and writes already required by inference. When these transfers saturate memory bandwidth, additional arithmetic capacity cannot shorten the update. The activation checkpointing introduced with peak memory usage shows why capacity and traffic must be counted separately. Recomputing activations lowers the peak footprint while adding forward work and its memory reads, so capacity can improve as traffic and energy rise. Mixed-precision training changes bytes per stored tensor, but numerical stability and supported backward kernels determine whether the smaller representation is useful. Capacity, traffic, and update time therefore need separate measurements.

Mobile AI accelerator optimization

Accelerator choice depends on the training primitives that the device's software stack exposes. Apple Neural Engine, Qualcomm Hexagon DSP, and Google Tensor devices have different compiler and runtime contracts, so the same update can follow different paths on each. A useful execution plan identifies where feature extraction, head or adapter training, and optimizer updates run. A dedicated engine may accelerate the frozen forward path while another processor handles learning, but transfers and duplicate representations then enter the cost. The supported operators and data movement must be established for the actual device and runtime version.

A local update may therefore execute on a CPU or GPU even when inference uses the dedicated neural accelerator. On a real device, the update-path test from the start of the chapter becomes a short procedure.

1. List the update's operators in execution order: the forward pass, each backward operator that the trainable subset requires, and the optimizer step.
2. For each operator, record the processor the runtime actually places it on, noting every fallback from the neural engine to the CPU or GPU.
3. At each change of processor, add the transfer and any duplicate tensor representation to the update's memory and traffic accounting.
4. Measure time, peak memory, and energy for the complete traced path while a representative foreground workload runs.
5. Feed those measurements into equation 0.54 and equation 0.53, which decide whether the update may run.

The hardware mechanisms described under section 7 can reduce those costs, but sparse-update support or near-memory compute is not a prerequisite for training. What matters is whether the available runtime can execute the required operators within the device envelope. Architecture selection therefore shapes update precision, parameter selection, communication, and thermal policy together.

Holistic resource management strategies

The constraint analysis yields three linked design decisions. The training amplification of table 0.137 motivates measuring the update footprint against equation 0.54 and choosing which parameters to adapt. Information scarcity, including limited local datasets, non-IID distributions, restrictions on data sharing, and minimal supervision, motivates data efficiency methods that reuse available evidence. When shared learning is useful, device heterogeneity and intermittent availability motivate federated coordination with explicit validation and privacy controls. Each pillar addresses a different constraint within the same deployment budget.

Table 0.138 reveals how this on-device learning constraint-solution mapping creates a systematic engineering framework: Model Adaptation addresses memory and compute limits through selective parameter updates, Data Efficiency maximizes learning from scarce private samples, and Federated Coordination enables privacy-preserving collaboration. Rather than viewing these as independent techniques, robust systems orchestrate all three approaches to create coherent adaptive systems that operate effectively within edge constraints.

Table 0.138: Constraint-Solution Mapping: The three fundamental constraint categories in on-device learning each drive corresponding solution approaches through direct necessity.

Constraint Category	Key Challenges	Solution Approach
Resource Amplification	• Training workloads (4–12× memory) • Memory limitations • Power constraints	**Model Adaptation** • Parameter-efficient updates • Selective layer fine-tuning • Low-rank adaptations
Information Scarcity	• Limited local datasets • Non-IID distributions • Privacy restrictions	**Data Efficiency** • Few-shot and streaming adaptation • Experience replay • Compressed representations

Constraint Category	Key Challenges	Solution Approach
Coordination Challenges	• Device heterogeneity • Intermittent connectivity • Distributed validation complexity • Scalability requirements	**Federated Coordination** • Federated averaging and asynchronous aggregation • Secure aggregation and differential privacy • Client selection and straggler handling

Each solution pillar addresses a different decision. Model adaptation determines what the device can update, and data efficiency determines what it can learn from the available examples. Federated coordination becomes relevant when compatible updates can benefit a shared model. Local-only adaptation can use the first two pillars without federation; a federated deployment must make all three work within the same device budgets.

Model Adaptation

The 10M-parameter model of figure 0.145 is an inference candidate for a smartwatch with 500 MB of total system memory, because its FP32 weights occupy 40 MB. Training every parameter would need the full 360 MB stack, most of the watch's memory before its operating system and foreground application take their share. The weight footprint alone does not establish inference fit; activation buffers, runtime workspace, and foreground reserve must also fit. Full-model training leaves much less room for that remaining state. Freezing parameters removes their gradients and optimizer state but not the storage or execution cost of the frozen network, so the system trains only a compact, strategically placed parameter set and, where it can, also shrinks the activations that the backward pass must keep. Resource-efficient model adaptation then determines both the local work a device can complete and the shared update format the fleet can aggregate.

The engineering choice balances adaptation expressivity against resource consumption. Full fine-tuning exposes all parameters to learning and can fit sufficiently small models; retaining a fixed model can be adequate when local context already supplies the needed personalization. Between these choices, selective updates offer smaller training state. The device resource envelope determines which candidates fit: a wearable-class device with 1 MB RAM has a different budget from a smartphone with 8 GB. The local variation then determines how much trainable capacity is useful. Bias updates may capture calibration changes, while shifts requiring new features need a richer update space. Runtime support, inference cost, shared-update compatibility, and rollback determine whether the candidate can enter the deployed system.

The selection of adaptation techniques follows this matching logic, from weight freezing (section 12) to structured and sparse updates (section 13). Their order of presentation is not a universal ranking of cost or expressivity; placement, update size, and runtime support determine those properties. Building on the resource accounting in section 5, the target is the smallest update space that captures the local variation: *preserve what works globally, adapt what matters locally*. That target is reachable only under the transfer premise of section 2, that the frozen representations already carry most of what the local task needs. Weight freezing restricts training to selected existing parameters, such as bias terms or final layers. Structured updates add low-rank or residual components to a frozen base. Sparse updates select existing parameters according to their adaptation value and measured cost. Each choice must preserve enough useful capacity while fitting the device's update budget.

Weight freezing

The most direct approach to on-device learning is to freeze the majority of a model's parameters and adapt only a minimal subset. **Bias-only adaptation** holds all weights fixed and updates only the bias terms (scalar offsets applied after linear or convolutional layers). The constraint reduces trainable parameters by 100–1000×, removes the weight gradients and their optimizer state from M_{train}, and helps mitigate overfitting when training data is sparse or noisy.

Consider a standard neural network layer:

$$\mathbf{y} = \mathbf{W}\mathbf{x} + \mathbf{b}$$

where $\mathbf{W} \in \mathbb{R}^{m \times n}$ is the weight matrix, $\mathbf{b} \in \mathbb{R}^m$ is the bias vector, and $\mathbf{x} \in \mathbb{R}^n$ is the input. In full training, gradients are computed and applied to both $\mathbf{W}$ and $\mathbf{b}$. In bias-only adaptation, the system freezes the weight tensor ($\Delta\mathbf{W} = \mathbf{0}$) and computes gradients exclusively for the bias:

$$\mathbf{W} \leftarrow \mathbf{W}, \quad \mathbf{b} \leftarrow \mathbf{b} - \eta \frac{\partial \mathcal{L}}{\partial \mathbf{b}}$$

This reduces the number of stored gradients and optimizer states, enabling training to proceed under memory-constrained conditions. The smaller trainable state helps only if the device also supports the arithmetic and activation schedule required by the update. Listing 0.11 makes the constraint explicit: all convolutional and fully connected weights remain frozen, while only bias terms adapt to local data.

Listing 0.11: Bias-Only Adaptation: Freezes model parameters except for biases to reduce memory usage and allow on-device learning.

```
# Freeze all parameters
for name, param in model.named_parameters():
    param.requires_grad = False

# Enable gradients for bias parameters only
for name, param in model.named_parameters():
    if "bias" in name:
        param.requires_grad = True
```

This pattern restricts optimizer updates to bias terms. What it saves, and what it does not, follows from the two derivatives of the layer above. The weight gradient $\partial\mathcal{L}/\partial\mathbf{W} = (\partial\mathcal{L}/\partial\mathbf{y})\,\mathbf{x}^T$ needs the layer's saved input $\mathbf{x}$, whereas the bias gradient $\partial\mathcal{L}/\partial\mathbf{b} = \partial\mathcal{L}/\partial\mathbf{y}$ needs only the gradient arriving from above. A frozen linear layer therefore no longer has to keep its input for its own sake. Reaching a bias in an earlier layer, however, still sends the gradient back through every later layer, and each nonlinearity or normalization on that path needs its own saved state (a ReLU needs at least the mask of which inputs were positive). Freezing parameters thus shrinks M_{train} without eliminating backward computation or all saved activation state. This is valuable when adapting pretrained models to user-specific or device-local data where the core representations remain relevant but require calibration.

Tiny Transfer Learning (TinyTL) (Cai et al. 2020) targets the activation term of equation 0.53 as well as trainable state. It builds on the derivative argument above. Frozen linear layers drop their saved inputs, so what remains is the backward state of nonlinearities and normalization. TinyTL combines bias adaptation with activation and normalization choices that reduce that state; optional lite residual modules restore some adaptation capacity at an additional memory cost.

Figure 0.148 diagrams the structural contrast between full fine-tuning (Panel A) and TinyTL (Panel B). Whereas standard fine-tuning computes gradients for every intermediate layer weight, TinyTL freezes the convolutional backbone (gray blocks) and confines parameter updates to lightweight residual side-paths and bias vectors $\mathbf{b}$ (blue blocks). Crucially, the dashed backward-pass arrow spans the full network depth in both architectures: TinyTL's memory reduction stems not from truncating the backward pass, but from avoiding the storage of intermediate feature maps needed to compute weight gradients.

The memory reduction is useful only when the frozen backbone remains expressive enough for the downstream task. The bias terms allow for minor but meaningful shifts in model behavior, particularly for personalization tasks. When domain shift is more significant, TinyTL can optionally incorporate small residual adapters to improve expressivity, all while preserving the system's tight memory and energy profile.

TinyTL demonstrates that reducing saved activation state can matter more than reducing the number of trainable parameters alone (Cai et al. 2020). On its image-classification transfer benchmarks, TinyTL reports training-memory savings of up to 6.5× relative to fine-tuning the full network with little accuracy loss, so the adaptation working set can shrink to roughly 15 percent of the full fine-tuning footprint. The lite residual modules that recover adaptation capacity add only

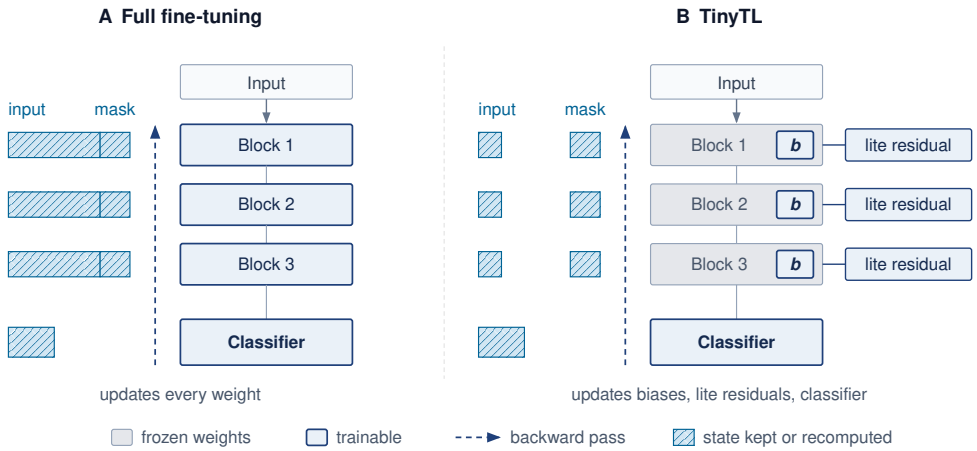


Figure 0.148: TinyTL adaptation paths: (A) Full fine-tuning updates every weight and retains the state needed for their gradients. (B) TinyTL freezes the backbone weights (gray) and trains only each block's bias vector (**b**), small lite residual modules beside the blocks, and the classifier (blue). The backward pass still traverses every frozen block to reach those biases, so the saving comes from what must stay live for it, not from a shorter backward path; the activation and normalization choices determine that state.

about 3.8 percent memory overhead in that study. Those savings depend on the selected feature extractor, input resolution, batch size, normalization, and residual-module configuration, and a saving measured on those benchmarks says nothing about whether an arbitrary frozen backbone fits into microcontroller SRAM.

Structured parameter updates

When bias-only updates cannot capture the local change, the system can add trainable capacity while retaining a frozen backbone. Residual adaptation modules (Houlsby et al. 2019) and low-rank parameterizations (Hu et al. 2021) implement this choice in different ways. They restrict learning to added components, but their training cost includes the backward path through the surrounding network. The comparison with bias-only or full fine-tuning therefore requires both a quality target and a peak-memory measurement.

Adapter-based adaptation

A common implementation involves inserting residual adapters, which are small residual bottleneck layers, between existing layers in a pretrained model. Consider a hidden representation $\mathbf{h}$ passed between layers. A residual adapter introduces a transformation:

$$\mathbf{h}' = \mathbf{h} + A(\mathbf{h})$$

where $A(\cdot)$ is a trainable function, typically composed of two linear layers with a nonlinearity:

$$A(\mathbf{h}) = \mathbf{W}_2\,\sigma(\mathbf{W}_1\mathbf{h})$$

with $\mathbf{W}_1 \in \mathbb{R}^{r\times d}$ and $\mathbf{W}_2 \in \mathbb{R}^{d\times r}$, where $r \ll d$. This bottleneck design ensures that only a small number of parameters are introduced per layer.

The adapters act as learnable perturbations on top of a frozen backbone. Because they are small and sparsely applied, their weights add little storage, although their saved activations and optimizer state still count against the training budget, and they let the model shift its predictions in response to new inputs.

Listing 0.12 implements this residual bottleneck. Its down-projection plays the role of $\mathbf{W}_1$, mapping width d to the bottleneck width r, a ReLU supplies σ, and its up-projection plays the role of $\mathbf{W}_2$, restoring width d before the input is added back. Such modules can be implemented efficiently on edge devices, particularly when the two projection matrices are small and fixed-point representations are supported.

Listing 0.12: Residual Bottleneck Adapter: The code implements a compact adapter module with down-projection and up-projection layers, reducing trainable parameter count while enabling efficient model adaptation on edge devices.

```
import torch.nn as nn


class Adapter(nn.Module):
    def __init__(self, dim, bottleneck_dim):
        super().__init__()
        # Project from full dimension to bottleneck (e.g., 768 -> 16)
        self.down = nn.Linear(
            dim, bottleneck_dim
        )  # W1: learns compression
        # Project back to original dimension (e.g., 16 -> 768)
        self.up = nn.Linear(
            bottleneck_dim, dim
        )  # W2: learns expansion
        self.activation = nn.ReLU()

    def forward(self, x):
        # Residual connection: original + nonlinear bottleneck
        # Only adapter params trained; base model frozen
        return x + self.up(self.activation(self.down(x)))
```

This adapter adds a small residual transformation to a frozen layer. When inserted into a larger model, only the adapter parameters are trained.

Low-rank techniques

Another efficient strategy is to constrain weight updates themselves to a low-rank structure. Rather than updating a full matrix $\mathbf{W}$, the update is approximated as:

$$\Delta \mathbf{W} \approx \mathbf{U}\mathbf{V}^T$$

where $\mathbf{U} \in \mathbb{R}^{m \times r}$ and $\mathbf{V} \in \mathbb{R}^{n \times r}$, with $r \ll \min(m, n)$. This reduces the number of trainable parameters from mn to $r(m+n)$. The LoRA paper and figure 0.149 name the same two factors $\mathbf{B} = \mathbf{U}$ (the up-projection) and $\mathbf{A} = \mathbf{V}^T$ (the down-projection), so $\mathbf{BA} = \mathbf{U}\mathbf{V}^T$ throughout this section.

The mathematical intuition behind this decomposition connects to fundamental linear algebra principles: any matrix can be expressed as a sum of rank-one matrices through singular value decomposition. Constraining updates to low rank (typically $r = 4$ to 16) captures a restricted set of variation modes while reducing parameters. For a typical transformer layer with dimensions 768×768, full fine-tuning requires updating 589,824 parameters. With rank-4 decomposition, only $768 \times 4 \times 2 = 6{,}144$ parameters are updated, a 99 percent reduction. Whether this retains most of the adaptation quality depends on the task, rank, and base model; low-rank adaptation (LoRA) reports that low-rank adapters can match or approach full fine-tuning on several transformer adaptation benchmarks (Hu et al. 2021).

During adaptation, the new weight matrix is computed as:

$$\mathbf{W}_{\text{adapted}} = \mathbf{W}_{\text{frozen}} + \mathbf{U}\mathbf{V}^T$$

This formulation is commonly used in LoRA,[12] originally developed for transformer models (Hu et al. 2021) but broadly applicable across architectures. From a systems engineering perspective, LoRA makes the trainable adapter the artifact that can be stored, transmitted, scheduled, and rolled back separately from the frozen base model.

Figure 0.149 traces the parallel dataflow of Low-Rank Adaptation (LoRA): input $\mathbf{x} \in \mathbb{R}^d$ passes through a frozen base matrix $\mathbf{W}_0 \in \mathbb{R}^{d \times d}$ and a trainable path with down-projection $\mathbf{A} \in \mathbb{R}^{r \times d}$ and up-projection $\mathbf{B} \in \mathbb{R}^{d \times r}$. Their outputs sum to $\mathbf{h} = \mathbf{W}_0\mathbf{x} + \mathbf{BAx}$, with the update restricted to rank $r \ll d$. The base weights need no parameter gradients or optimizer state, although backward computation may still traverse the base path. Folding the product into the base weights ($\mathbf{W}_0 + \mathbf{BA}$) removes separate adapter arithmetic for that merged model. Numerical compatibility, any requantization, and the cost of retaining merged copies determine whether this is the appropriate serving representation.

[12] **LoRA (Low-Rank Adaptation)**: Hu et al. (2021) learn rank-r decomposition matrices **A** and **B** instead of updating full weight matrices, reporting a 10,000× reduction in trainable parameters for their GPT-3 comparison. That reduction does not apply to the full model footprint: a model with 7B parameters has about a 14 GB FP16 weight footprint before gradients, optimizer state, and activations. Even at rank 16, adapter storage depends on the dimensions and number of adapted matrices, and deployment must still accommodate the frozen base model.

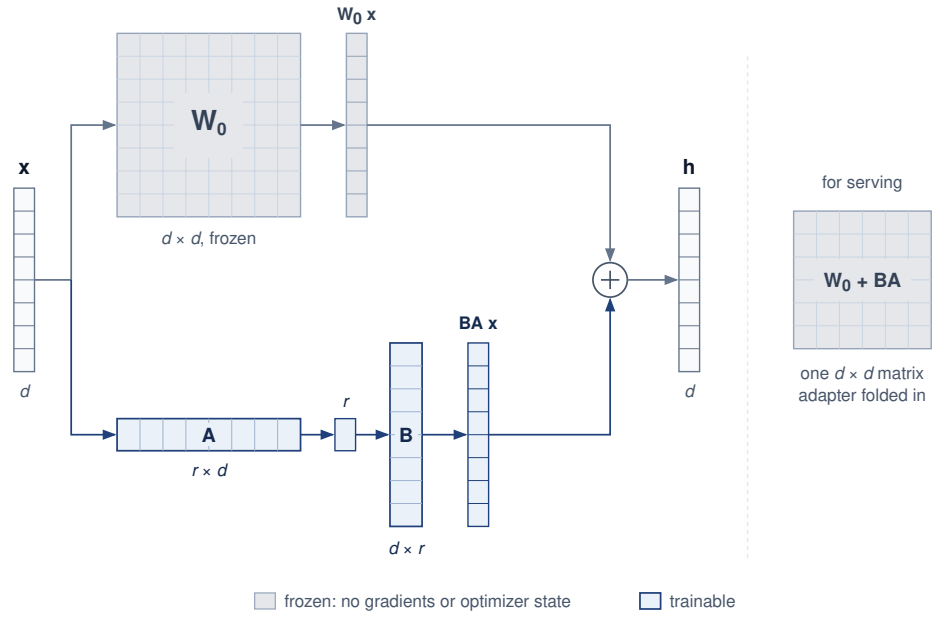


Figure 0.149: LoRA architecture: The input **x** passes through the frozen base matrix $\mathbf{W}_0$ and, in parallel, through a trainable low-rank path: down-projection **A** ($r \times d$) and up-projection **B** ($d \times r$), which play the roles of $\mathbf{V}^T$ and **U** in the low-rank update above. Only **A** and **B** carry gradients and optimizer state. For serving, the product **BA** can be folded into $\mathbf{W}_0$, removing the separate adapter operations when the merged representation is supported. End-to-end latency still needs measurement.

Consider a mobile deployment where a language model with 7B parameters has a 14 GB FP16 weight footprint, before accounting for the additional gradients, optimizer states, and activations required by full fine-tuning. That footprint exceeds smartphones with about 8 GB total memory unless the base model is quantized, partitioned, or offloaded. Choosing LoRA rank 16 restricts the update space, and this chapter's fleet examples budget a reference adapter update of 50 MB. That figure is a communication payload, not a training-memory estimate. The device must also fit the base model, gradients, optimizer state, and live activations under its execution plan.

The smaller payload also matters under intermittent connectivity. Transferring the full FP16 model in this example requires 14 GB, while the reference adapter update is 50 MB. Transfer time depends on encoded bytes, effective link throughput, and interruptions. An adapter-only transfer provides the saving only when the receiving device already holds a compatible base model; base-version changes must be included in the communication budget.

The residual bottleneck and LoRA mechanisms both support device-tiered configurations, but they are distinct. LoRA modifies a weight matrix through a linear low-rank update; the residual bottleneck of section 12 includes a nonlinear activation and remains a separate module at inference. The letter r plays the same role in both, as the bottleneck width of a residual adapter and the rank of a LoRA update, and in both it sets the trainable cost, so a deployment can size r to the memory each device class leaves for learning. Which mechanism each class receives in the first place is decided by the device-tier framework of section 13.

Example 11.1: On-device keyboard learning

Scenario: Consider a mobile keyboard that trains its next-word predictor locally and contributes updates to a shared model through federated averaging (McMahan et al. 2017).

Diagnosis: In the illustrative profile of section 2, one local update needs 50 MB–100 MB of working memory against a background allowance of 200 MB–300 MB, so at the selected

operating point the update alone claims 25 percent of the allowance before the keyboard's own state is counted, and the resident weights in M_{peak} claim more. Exceeding the allowance risks process eviction mid-update. Energy is the second constraint. An unconstrained job like the one in notebook 11.1 would take 15 percent of the battery, more than a policy that protects the user's charge is likely to grant as E_{slack} in equation 0.54 while the phone runs on battery. The pipeline therefore admits training only when the device is idle, charging, and on Wi-Fi, and it quantizes update vectors to shrink the transmitted payload D_{vol}.

Systems lesson: A federated keyboard must satisfy all three terms of equation 0.54 (energy $E_{\text{update}} \leq E_{\text{slack}}$, sustained power under P_{thermal}, and typing latency under its deadline), fit M_{peak} within its memory allowance, respect uplink bandwidth BW, and meet its declared privacy guarantees together. Differential privacy adds a specific release guarantee and its associated costs; it is not implied by keeping raw text local.

Edge personalization

Adapters support multiple personalized contexts with one frozen backbone. For an input width d, a residual bottleneck of width r uses $2dr$ matrix parameters, plus $r + d$ biases when both projections include them. A deployment with several adapters must sum this count over their insertion sites; rank or bottleneck width alone does not determine the total. Stored bytes then equal parameter count times bytes per stored value. With $d = 768$ and $r = 16$, one adapter holds 25,360 parameters, about 50.7 KB in FP16; one adapter after each of 12 blocks totals 304,320 parameters, roughly 0.6 MB. During training, gradients, optimizer state, and saved activations add to that storage footprint. A device can swap context-specific modules while sharing the much larger base model, provided it can hold the base and active adaptation state together.

This **adapter switching** pattern lets a smartphone select context-specific behavior without replacing the entire backbone. When the user enters a low-light environment, the system can load a compatible adapter into the vision pipeline; selecting an existing adapter does not itself require learning. The modularity extends naturally to federated learning: transmitting only the adapted parameters can reduce upload traffic relative to a full-model update, with savings determined by the total adapter count and encoding. Residual-adapter studies show that small trainable modules can adapt a shared visual backbone across multiple visual domains (Rebuffi et al. 2017), making them a useful design point between personalization quality and system resources. Freezing the backbone preserves its parameters, while adapters provide a bounded place for user- or context-specific updates. The resulting model can still suffer catastrophic forgetting, the loss of previously learned behavior after new updates (defined in section 13).


Napkin Math 11.2: The hidden cost of personalization

Problem: A team is deploying a 10M parameter vision model to a smartphone with support for 10 different "User Contexts" (Home, Office, Car, etc.). If a full fine-tuned model requires 40 MB, how much storage does using residual adapters save instead?

Math:

1. **Full fine-tuning**: 10 contexts $\times$ 40 MB = 400 MB.
2. **Adapter approach**: (1 $\times$ 40 MB backbone) + (10 $\times$ 200 KB adapters) $\approx$ 42 MB.
3. **Storage savings**: 400 MB/42 MB $\approx$ 9.5× total device storage reduction.
4. **Per-context efficiency**: 40 MB/0.2 MB = 200×.

Systems insight: Multiple personalized models create a storage cost even when only one runs at a time. Storing 10 copies of a 40 MB model consumes 400 MB. In this example, sharing the frozen backbone and storing separate adapters reduces the marginal storage cost of a new context by 200×. This comparison establishes storage savings; the device must still accommodate the active model, adaptation state, and context-switching cost.



Each new context costs an adapter, not a full model copy.

In smartphone camera pipelines, environmental lighting, user preferences, and lens distortion vary between users. Residual modules can adapt a frozen shared model to these differences while leaving its base weights unchanged; the combined model's behavior still requires validation. In voice-based systems, adapters similarly provide a way to test personalized speech recognition without retraining the full acoustic model. Keeping the base and adapter versions compatible also supports rollback or switching between user-specific versions when adaptation degrades performance.

Performance vs. resource trade-offs

Selecting an adaptation strategy requires accounting for both resource cost and expressivity. Bias-only updates retain a small trainable state but may lack the capacity to handle structural domain shifts. Full fine-tuning exposes every parameter to adaptation and adds corresponding gradient and optimizer state. LoRA and residual adapters offer intermediate choices whose cost depends on rank or width, insertion sites, and numerical representation. The same budget, equation 0.53, governs each of these strategies. Because peak working memory M_{peak} must jointly contain resident weights, trainable state M_{train}, and the peak of live activations under the device ceiling M_{device}, each strategy shrinks a different term: bias-only and adapter methods shrink M_{train}, TinyTL-style choices also shrink the activation term, and training only the final classifier, whose backward pass stops at the head, removes most of that term. Parameter storage alone therefore cannot determine whether background adaptation fits.

LoRA and residual adapters impose different deployment costs. For a fixed adapter and compatible numerical representation, LoRA's linear update can be merged into the backbone before inference ($\mathbf{W}_{\text{final}} = \mathbf{W}_{\text{frozen}} + \mathbf{U}\mathbf{V}^T$), avoiding separate adapter arithmetic in the forward path. A quantized base may require requantization and renewed quality validation after merging. Keeping a separate merged backbone for every context also sacrifices the storage benefit of sharing one base. Residual adapters remain distinct modules ($\mathbf{y} = f(\mathbf{x}) + \text{Adapter}(\mathbf{x})$); their latency cost depends on shape, placement, and runtime, while switching contexts requires only the corresponding adapter state.

The runtime must support the selected adapter's forward operators and its training path. These can use a dynamic graph or a statically compiled update schedule; dynamic graph construction is not itself a requirement. For an inference engine such as Open Neural Network Exchange (ONNX) Runtime Mobile, a runtime that executes an adapter's forward path may still lack its backward operators, optimizer, or state management. The deployment must verify both paths, including any transfers between the processor that runs inference and the processor that performs updates.

For this multi-context personalization workload, where one device switches among several adapters, system architects can use a device-tier framework to organize candidate mechanisms. On flagship phones (Tier 1) with dedicated Neural Engines and 8 GB of RAM or more, residual adapters provide a strong balance of modularity and speed, because switching contexts swaps only adapter state. On mid-range devices (Tier 2) with 1 GB up to that ceiling, LoRA may fit when a fixed adapter can be merged into a compatible base representation before inference, trading switching flexibility for zero added inference arithmetic. For ultra-constrained IoT endpoints (Tier 3) with less than 1 GB RAM, bias-only updates may be the only practical option. Budget phones show that the tier follows the memory available to learning rather than installed RAM. Their 4 GB places them in Tier 2, yet only 1 GB–2 GB remains for ML work after the operating system, and a background adaptation task may be granted less, so a deployment can reasonably hold them to the Tier 3 mechanism. The assignments follow from the workload as much as from the hardware. A workload that keeps one adaptation per user, rather than many switchable contexts, loses the reason to keep adapters separate and can favor merged LoRA even on flagship devices. The runtime must still verify the base-model footprint and admit training within the measured device envelope.

> **Checkpoint 11.2: Edge personalization**
>
> Verify understanding of efficient on-device adaptation:
>
> - ☐ Adapter switching: Explain why Adapter Switching is more storage-efficient than maintaining separate full-model copies for different user contexts.

- ☐ Adapter size: Derive the parameter count of a residual adapter from its input width and bottleneck width, then identify the additional inputs needed to compare its storage with a full model.
- ☐ Residual vs. LoRA: For a multi-context workload, identify the deployment tier (Tier 1, 2, or 3) where residual adapters are preferred over LoRA and justify the choice, then explain why a workload with one adaptation per user changes the answer.
- ☐ Adapter bandwidth: Evaluate the claim that transmitting adapter weights in federated learning consumes more bandwidth than transmitting the entire model.

Sparse updates

Sparse updates adapt selected existing parameters rather than adding modules. Their expressivity relative to adapters depends on the selected locations and parameter budget. A task-adaptive policy selects those locations using evidence about the current task or user. The resulting update space can target changes that a fixed subset misses, but selection itself consumes resources and does not guarantee that the complete training path fits the device.

The useful savings depend on what the runtime can omit. Unselected parameters need no gradient or optimizer state, but their operations may still lie on the backward path to selected parameters. A policy must therefore compare the measured update cost with its adaptation benefit; the fraction of trainable parameters alone does not predict the reduction in compute.

The key insight is that layers do not contribute equally to local performance gains. If the system can identify the minimal subset with the highest adaptation value, it can spend scarce training capacity where it changes the model's behavior most.

Sparse update design

Let a neural network be defined by parameters $\theta = \{\theta_1, \theta_2, \ldots, \theta_{N_L}\}$ across N_L layers. In standard fine-tuning, gradients are computed and updates are performed on all parameters:

$$\theta_i \leftarrow \theta_i - \eta \frac{\partial \mathcal{L}}{\partial \theta_i}, \quad \text{for } i = 1, \ldots, N_L$$

In task-adaptive sparse updates, the system selects a small subset $\mathcal{S} \subset \{1, \ldots, N_L\}$ such that only parameters in $\mathcal{S}$ are updated:

$$\theta_i \leftarrow \begin{cases} \theta_i - \eta \frac{\partial \mathcal{L}}{\partial \theta_i}, & \text{if } i \in \mathcal{S} \\ \theta_i, & \text{otherwise} \end{cases}$$

The challenge lies in selecting the optimal subset $\mathcal{S}$ given memory and compute constraints. A principled strategy is contribution analysis, an empirical method that estimates how much each layer contributes to downstream performance improvement. For example, one can measure the marginal gain from updating each layer independently:

1. Freeze the entire model.
2. Unfreeze one candidate layer.
3. Finetune briefly and evaluate improvement in validation accuracy.
4. Rank layers by performance gain per unit cost (e.g., per KB of trainable memory).

This layer-wise profiling yields a candidate ranking from which $\mathcal{S}$ can be constructed subject to a memory budget. Gains measured one layer at a time need not add when layers train together, and shared backward dependencies change the combined cost. The selected set therefore needs a joint quality and resource check, with the profiling cost included in the adaptation budget.

Figure 0.150 places that ranking inside a complete selective fine-tuning pipeline. Stage 1 meta-trains the network in the cloud, which means training its initial weights so that a few later updates on new data adapt it well (the idea behind model-agnostic meta-learning, taken up in section 16). Stage 2 ranks layers or channel groups by adaptation benefit per unit of device cost and lets the device budget set the cut, and Stage 3 updates only the units above the cut on local data. Freezing the units below the cut removes their gradient and optimizer state, but the backward pass still runs

through any frozen layer that lies between the loss and a selected one, so the selected set must be costed under the complete execution schedule.

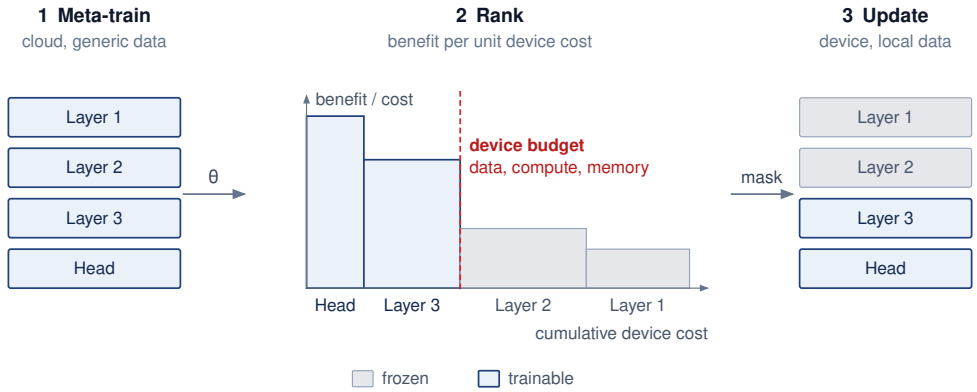


Figure 0.150: Selective on-device fine-tuning: (1) The full network is meta-trained in the cloud on generic data. (2) Each layer or channel group is ranked by its expected adaptation benefit per unit of device cost, and the device's data, compute, and memory budget sets the cut. (3) On the device, only units above the cut are updated on local data while the rest stay frozen. Scores and cut position are schematic.

A concrete example is TinyTrain, a method designed to allow rapid adaptation on-device (Kwon et al. 2024). TinyTrain combines offline preparation with a task-adaptive sparse-update method that dynamically selects layers or channels to update using user data, memory limits, and compute limits. At runtime, the system updates only the selected subset rather than treating the whole network as trainable.

In implementation, selective layer updating turns the ranking into `requires_grad` decisions or equivalent graph masks. Listing 0.13 extends this pattern to profiling-driven layer selection, demonstrating how hardware profiling determines which layers to update based on contribution scores and memory constraints.

Listing 0.13: Selective Layer Updating: This technique allows fine-tuning specific layers of a pretrained model while keeping others frozen, optimizing computational resources for targeted improvements.

```
# Selective layer update based on contribution analysis
# Layers selected via profiling: conv2 and fc have highest
# accuracy-per-KB impact for this task

for name, param in model.named_parameters():
    if "conv2" in name or "fc" in name:
        param.requires_grad = True  # Train high-impact layers
    else:
        param.requires_grad = False  # Freeze low-impact layers

# Parameter fraction follows layer shapes; adaptation quality requires evaluation
# Memory savings: gradient storage only for selected layers
```

TinyTrain makes the runtime motivation concrete. Consider a scenario where a user wears an augmented reality headset that performs real-time object recognition. As lighting and environments shift, the system must adapt to maintain accuracy, but training must occur during brief idle periods or while charging. TinyTrain addresses this constraint through task-adaptive sparse updates: the deployment process selects a small update set that fits the device's memory and compute budget. The approach keeps adaptation fast, energy-efficient, and memory-aware when the target task and device profile match the method's assumptions.

Task-adaptive sparse updates still introduce system-level trade-offs. Contribution analysis has a nontrivial computational cost even when it occurs during pretraining or initial profiling, so the

deployment pipeline must budget for it. Stability also requires attention: if too few parameters are selected for updating, the model may underfit the target distribution, so teams need validation thresholds for the selected subset before deployment. The selection policy must also account for hardware-specific execution costs because some parameters show high contribution scores but prove expensive to update on certain architectures. Despite these trade-offs, task-adaptive sparse updates provide a practical mechanism to scale adaptation across deployment contexts from microcontrollers to mobile devices (Kwon et al. 2024).

Adaptation strategy comparison

The design target is the smallest update space that captures the local change. Full fine-tuning pays every term of equation 0.53; bias-only updates and head-only training fit minor calibration or new output categories; LoRA and residual adapters add bounded capacity beside a frozen backbone; task-adaptive sparse updates spend profiling effort to select valuable existing parameters. A larger update space is justified only if the measured quality gain fits the device's training budget. Table 0.139 collects these adaptation strategy trade-offs, keyed to the budget term each one shrinks, so the choice can be checked against expressivity, runtime support, and selection cost.

Table 0.139: Adaptation Strategy Trade-Offs: Six approaches to model adaptation compared by trainable parameters, the term of the peak-memory budget (equation 0.53) they shrink, expressivity, suitability, and system requirements. Methods that shrink only the trainable state M_{train} still keep the activations their backward pass needs, while head-only training also removes most of the activation term by stopping the backward pass at the classifier.

Technique	Trainable Parameters	Memory Overhead	Expressivity	Use Case Suitability	System Requirements
Full Fine-Tuning	All parameters	Highest; every term of the peak budget	Highest	Large domain shift on capable devices	Full backward support and memory headroom
Bias-Only Updates	Bias terms only	Minimal M_{train}; activations remain	Low	Simple personalization; low variance	Extreme memory/compute limits
Head-Only Training	Final classifier	Minimal; backward pass stops at the head	Low	New output classes; custom wake words	Frozen encoder; reusable cached features
LoRA	Low-rank factors per adapted matrix	Low M_{train}; activations remain	Moderate to High	One mergeable adaptation per user	Merge step and requantization check for serving
Residual Adapters	Adapter modules	Low M_{train}; activations remain	Moderate to High	Switching among several contexts on mobile	Mobile-class SoCs with runtime support
Sparse Layer Updates	Selective parameter subsets	Variable; depends on the selected layers	High (task-adaptive)	Real-time adaptation; domain shift	Requires profiling or meta-training

Once an adaptation mechanism fits the device's memory and execution budget, it must still learn from the available examples. Reducing trainable state does not create labels or ensure that a user's recent observations represent future use. The next constraint is therefore statistical: extracting reliable learning signal from sparse local data while retaining useful prior behavior.

Data Efficiency

A user corrects smartphone keyboard autocorrect perhaps three times a day. The system cannot require 10,000 labeled sentences to train a local language model. Data efficiency at the edge means learning aggressively from a sparse, noisy, and uncurated trickle of implicit user feedback, maximizing the signal extracted from each interaction.

The systems trade-off is data collection cost against adaptation quality. Every retained example costs user friction, energy, storage, and privacy exposure. A voice assistant adapting to speech samples weighs model improvement against battery drain and user comfort with always-on recording, and a keyboard chooses between logging shallow keystroke statistics and keeping full typing sessions. Unlike a central pipeline, the device cannot reach into a larger dataset when its own

evidence runs short, and an application that needs a decision before enough evidence accumulates may be better served by a validated fixed model than by immediate learning. Whatever the device does learn must also stay compatible with the adaptation mechanism of section 12 and with any federated protocol that later consumes it.

The strategy choice depends on which scarcity binds first, and practical systems usually combine several. Few-shot learning fits cases where a few labeled or weakly labeled examples must drive personalization. Streaming updates fit settings where useful data arrives incrementally and cannot be batched in advance. Experience replay spends memory to stabilize continual updates by reusing scarce examples. Data compression reduces the storage cost of those histories so replay and lightweight training remain feasible within edge memory budgets. Data scarcity thus becomes an allocation problem, in which the device spends labels, memory, compute, and privacy budget where they produce the most reliable local signal.

Few-shot learning and data streaming

In conventional machine learning workflows, effective training typically requires large labeled datasets, carefully curated and preprocessed to ensure sufficient diversity and balance. On-device learning, by contrast, must often proceed from only a handful of local examples, collected passively through user interaction or ambient sensing, and rarely labeled in a supervised fashion. These constraints motivate two complementary adaptation strategies: few-shot learning, in which models generalize from a small, static set of examples, and streaming adaptation, where incremental observations support updates scheduled within device budgets.

Few-shot adaptation uses limited labeled or weakly labeled evidence for a new task or user condition (Wang et al. 2020). Bias-only updates, adapter modules, and prototype-based classification restrict what must be learned, but each still needs validation against overfitting. Let $\mathcal{D}_{\text{shot}} = \{(x_i, y_i)\}_{i=1}^{n_{\text{shot}}}$ denote the local support set; here n_{shot} counts all examples in the set, rather than examples per class. A candidate policy might permit few gradient steps ($n_{\text{steps}} \ll 100$) and a small trainable subset ($|\theta_{\text{updated}}| \ll |\theta|$). These are illustrative restrictions, not universal feasibility conditions. The actual step and parameter budgets follow from measured device cost and the quality target, including retained performance on earlier tasks.

Keyword spotting (KWS) systems are a common target for data-efficient on-device adaptation; Speech Commands provides a dataset for training and evaluating limited-vocabulary KWS models (Warden 2018). A detector must distinguish its target phrase from background speech while meeting latency and false-activation requirements. One design uses a pretrained acoustic encoder, such as a small convolutional or recurrent network, to map audio into embeddings for a lightweight classifier. A shared encoder supplies reusable features, while local examples can support a custom wake word or an underrepresented accent. Whether those examples justify local training depends on their coverage, transfer restrictions, and the improvement over the shared detector.

Few-shot adaptation can train an output classifier or another small parameter subset from utterances collected directly on the device. A user might provide 5–10 recordings of a custom wake word while the acoustic encoder remains frozen. Those positive examples define what to recognize, but the false-activation rate on other speech and background noise is a separate measurement, and the personalized detector should not be accepted until it has been made.

Head-only adaptation is cheap in a way the peak-memory budget of equation 0.53 makes precise. Because the backward pass stops at the classifier, the encoder's saved activations leave the activation term, and the encoder outputs for the support set can be computed once and reused across update steps. What remains is running the encoder forward, holding the support examples or their features, and evaluating the adapted classifier. Those costs, not the size of the head, decide whether the update fits a particular phone or microcontroller.

Beyond static few-shot learning, many on-device scenarios benefit from streaming adaptation, where models must learn incrementally as new data arrives (Hayes et al. 2020). Streaming adaptation generalizes this idea to continuous, asynchronous settings where data arrives incrementally over time. Let $\{x_t\}_{t=1}^{\infty}$ represent the observations selected from the stream for admitted updates. In streaming settings, observations arrive continuously, but the runtime admits training only when memory, energy, and foreground-latency budgets permit. The following rule describes one admitted update; it does not require a gradient step on every arrival. The index t counts these update steps.

The computable loss may come from implicit feedback, pseudo-labels, self-supervised objectives, reconstruction error, or a task-specific proxy rather than explicit human labels. The model update can be written generically as:

$$\theta_{t+1} = \theta_t - \eta_t \nabla \mathcal{L}(x_t; \theta_t)$$

where η_t is the learning rate at time t. This form of adaptation is sensitive to noise and drift in the input distribution, and thus often incorporates mechanisms such as learning rate decay, meta-learned initialization, or update gating to improve stability.

Aside from KWS, practical examples of these strategies abound. In wearable health devices, a model that classifies physical activities may begin with a generic classifier and adapt to user-specific motion patterns using only a few labeled activity segments. In smart assistants, user voice profiles are fine-tuned over time using ongoing speech input, even when explicit supervision is unavailable. Local corrections, repetitions, or downstream task completion can provide implicit signals, but only after the system defines which event counts as feedback and tests its validity. A user may accept a suggestion because it is convenient rather than correct, abandon a task for reasons unrelated to the model, or correct an error that the model itself induced. Production adaptation should therefore separate observed events from inferred labels, retain a nonadapting control cohort, measure delayed outcomes when available, and gate learning when the proxy-to-outcome relationship drifts.


Few-shot and streaming adaptation form the foundation for more advanced memory and replay strategies that address the stability challenges of continuous on-device learning.

Experience replay

Definition 11.3: Catastrophic forgetting

Catastrophic forgetting is the phenomenon in which a neural network trained sequentially on new tasks or data distributions rapidly loses performance on previously learned tasks, because gradient updates that optimize the new objective overwrite weight configurations that supported the old ones.

1. **Significance**: Without explicit mitigation, fine-tuning a deployed classifier on a new domain can sharply reduce prior-task accuracy, even when the new domain is closely related to the old one (Kirkpatrick et al. 2017). This is the central failure mode of on-device and federated learning: every device that adapts locally to its user's recent data risks erasing the general capabilities the centralized training run paid for, and the loss is invisible until inference encounters out-of-recent-context inputs.
2. **Distinction**: Unlike overfitting (a generalization failure on a single fixed task) and distribution shift (a deployment-time mismatch between training and inference data), forgetting is a training-time phenomenon caused by the sequential structure of the update stream itself; updates for new data can interfere with earlier solutions even when a representation capable of supporting both tasks exists.
3. **Common pitfall**: A frequent misconception is that a small experience-replay buffer is sufficient protection. A small buffer can hold aggregate accuracy on a held-out set while rare classes, which it samples too seldom, continue to degrade. Forgetting must therefore be measured per class or per cohort, and the remedies range from capacity-proportional or prioritized buffers to weight-regularization methods such as elastic weight consolidation, which store no examples (section 20).



Learning a new task can erode accuracy on an earlier one.

Experience replay addresses forgetting by retaining examples from earlier learning episodes and reusing them during later updates. Replay also appears in reinforcement learning (Mnih et al. 2015); here its role is to keep earlier local observations represented as new data arrives. It is one stability mechanism with an explicit storage cost. Section 20 returns to the problem with parameter-importance penalties, bounded update footprints, and rollback.

Unlike server-side replay strategies that rely on large datasets and extensive compute, on-device replay must operate with extremely limited capacity, often with tens or hundreds of samples, and

must avoid interfering with user experience (Rolnick et al. 2019). Buffers may store only compressed features or distilled summaries, and updates must occur opportunistically (e.g., during idle cycles or charging). These system-level constraints reshape how replay is implemented and evaluated in the context of embedded ML.

Let $\mathcal{M}$ represent a memory buffer that retains a fixed-size subset of training examples. At time step t, the model receives a new data point (x_t, y_t) and appends it to $\mathcal{M}$. A replay-based update then samples a batch $\{(x_i, y_i)\}_{i=1}^{B}$ of size B from $\mathcal{M}$ and applies a gradient step:

$$\theta_{t+1} = \theta_t - \eta \nabla_\theta \left[\frac{1}{B} \sum_{i=1}^{B} \mathcal{L}(x_i, y_i; \theta_t) \right]$$

This is the streaming update of section 13 with one change of data source, from the newest observation to a batch drawn from $\mathcal{M}$. The systems cost lies in what that change requires, namely buffer storage that competes with model state and forward and backward work on old examples in every admitted window. Over time, this replay mechanism allows the model to reinforce prior knowledge while incorporating new information.

A practical on-device implementation might use a ring buffer to store a small set of compressed feature vectors rather than full input examples. Listing 0.14 implements this minimal replay buffer design, demonstrating how a circular storage mechanism enables efficient memory management while balancing historical knowledge retention with new information incorporation.

Listing 0.14: Replay Buffer: Implements a circular storage mechanism for efficient memory management in constrained environments. This approach allows models to efficiently retain and sample from recent data points, balancing the need to use historical information while incorporating new insights.

```
import random


# Ring buffer for experience replay on memory-constrained devices
# Stores compressed features (not raw inputs) to minimize footprint
class ReplayBuffer:
    def __init__(self, capacity):
        self.capacity = capacity  # Fixed size, e.g., 1000 examples
        self.buffer = []
        self.index = 0  # Circular write pointer

    def store(self, feature_vec, label):
        if len(self.buffer) < self.capacity:
            self.buffer.append((feature_vec, label))  # Fill phase
        else:
            self.buffer[self.index] = (
                feature_vec,
                label,
            )  # Overwrite oldest
        self.index = (self.index + 1) % self.capacity  # Wrap around

    def sample(self, k):
        # Uniform sampling within the retained buffer; older examples are absent
        return random.sample(self.buffer, min(k, len(self.buffer)))
```

This implementation maintains a fixed-capacity cyclic buffer, storing compressed representations (e.g., last-layer embeddings) and associated labels. Uniform sampling here covers only the retained recent window; it does not remove the history bias introduced by overwriting old examples. Reservoir sampling is an alternative when the goal is to represent the full stream, though any finite buffer still requires coverage checks.

In TinyML applications, experience replay has been applied to problems such as gesture recognition, where devices must continuously improve predictions while observing a small number of events per day. Instead of training directly on the streaming data, the device stores representative

feature vectors from recent gestures and uses them to finetune classification boundaries periodically. Similarly, in on-device keyword spotting, replaying past utterances can improve wake-word detection accuracy without the need to transmit audio data off-device.

Experience replay spends storage and additional update work to preserve earlier behavior. Raw inputs can exceed storage or retention budgets, especially in vision and audio applications. Cached feature vectors reduce that footprint, but an update starting from those vectors trains the downstream model without reconstructing the original encoder computation. If the encoder changes, old features may no longer match its current representation; the system must retain a compatible encoder, refresh the features from retained inputs, or expire incompatible entries. Persistent replay also consumes flash write cycles. Buffer contents, representation versions, and replay frequency therefore belong in the same resource and retention policy.

Data compression

In many on-device learning scenarios, the raw training data may be too large, noisy, or redundant to store and process effectively. This motivates the use of compressed data representations, where the original inputs are transformed into lower-dimensional embeddings or compact encodings that preserve salient information while minimizing memory and compute costs.

Compressed representations serve two complementary goals: they reduce the footprint of stored data, allowing devices to maintain longer histories or replay buffers under tight memory budgets (Hayes et al. 2020), and they simplify the learning task by projecting raw inputs into more structured feature spaces, often learned via pretraining or meta-learning, in which efficient adaptation is possible with minimal supervision.

One common approach is to encode data points using a pretrained feature extractor and discard the original high-dimensional input. For example, an image x_i might be passed through a CNN to produce an embedding vector $\mathbf{z}_i = f(x_i)$, where $f(\cdot)$ is a fixed feature encoder. This embedding captures visual structure (e.g., shape, texture, or spatial layout) in a compact representation, usually ranging from 64 to 512 dimensions, suitable for lightweight downstream adaptation.

Mathematically, training can proceed over compressed samples $(\mathbf{z}_i, y_i)$ using a lightweight decoder or projection head. Let θ represent the trainable parameters of this decoder model, which is typically a small neural network that maps from compressed representations to output predictions. As each example is presented, the model parameters are updated using gradient descent:

$$\theta_{t+1} = \theta_t - \eta \nabla_\theta \mathcal{L}(g(\mathbf{z}_i; \theta), y_i)$$

The rule is the same gradient step once more, now applied to stored embeddings $\mathbf{z}_i$ and a small head whose prediction is $g(\mathbf{z}_i; \theta)$, rather than to raw inputs. Only the head's parameters θ change, so this is the head-only case of equation 0.53, and the encoder runs once per example when the embedding is stored rather than on every update. This bounds the trainable portion of the model, but feasibility still depends on the head's activations and optimizer state alongside the replay buffer and runtime reserves.

When replay storage rather than model compute binds, a device can go further and learn a dictionary of recurring sensor-trace patterns, storing each example as a few nonzero coefficients over that dictionary instead of as raw samples. A dataset of traces $\mathbf{X}$ then factorizes as $\mathbf{X} \approx {}_{\text{dict}}\mathbf{C}$, where the columns of ${}_{\text{dict}}$ are the basis patterns and the block-sparse coefficient matrix $\mathbf{C}$ records which patterns are active in each example. The saving is real only if the dictionary plus all stored coefficients is smaller than the raw replay examples, and updating the dictionary changes the representation of every stored example, so reconstruction quality and compatibility become part of the replay policy.

Compressed representations can reduce how long raw inputs remain stored, but an embedding is not anonymized merely because it is lower dimensional. It may preserve identity, attributes, or enough structure for inversion, and it must receive the same access-control, retention, and deletion analysis as the source data unless a separate privacy mechanism establishes a stronger guarantee. Compression can also act as an implicit regularizer, smoothing learning and mitigating overfitting when only a few training examples are available.

In keyword spotting, raw audio can first be transformed into mel-frequency cepstral coefficients (MFCCs),[13] a compact, lossy representation derived from the speech power spectrum. Storing these vectors instead of waveforms reduces the replay payload. The complete adaptation budget must still include feature extraction, model state, and the working memory needed for updates.

[13] **MFCCs (Mel-Frequency Cepstral Coefficients)**: For a 320-sample audio window (20 ms at 16 kHz), 16-bit samples occupy 640 bytes, while 12–13 coefficients stored at 32 bits each occupy approximately 50 bytes. The roughly 13× reduction compares one waveform window with one feature vector; overlapping windows, additional features, and metadata change the storage ratio for a complete recording. Replay capacity depends on that complete representation, and keyword detection quality must be evaluated separately from byte savings.

Data efficiency strategy comparison

The choice of data-efficiency mechanism depends on what is scarce. Few-shot adaptation uses a small informative support set, replay spends memory and compute to preserve prior behavior, and compressed representations extend the history that fits on-device. Their limits remain different: weak pretrained features can defeat few-shot adaptation, a replay buffer can omit rare cases, and compression can discard task-relevant information. Table 0.140 summarizes these on-device learning trade-offs; combinations must fit the same memory, energy, and privacy budget.

Table 0.140: On-Device Learning Trade-Offs: Technique choice depends on the binding edge constraint: few-shot adaptation minimizes labeled-data needs, replay improves stability under drift at the cost of memory, and compressed representations extend retention when raw data is too large or too sensitive to keep.

Technique	Data Requirements	Memory/Compute Overhead	Use Case Fit
Few-Shot Adaptation	Small labeled set (n_{shot} examples)	Low	Personalization, quick on-device finetuning
Experience Replay	Streaming data	Moderate (buffer & update)	Non-stationary data, stability under drift
Compressed Representations	Unlabeled or encoded data	Low to Moderate	Memory-limited devices; privacy-sensitive contexts

In practice, these methods are not mutually exclusive. Many real-world systems combine them to achieve robust, efficient adaptation. For example, a keyword spotting system may use compressed audio features (e.g., MFCCs), finetune a few parameters from a small support set, and maintain a replay buffer of past embeddings for continual refinement.


Efficient adaptation and data strategies establish how a single device can learn from its user. Sharing those gains requires another decision: whether local updates contain information useful to a common model and can be combined within communication and privacy constraints. Federated learning supplies that coordination protocol. Personal state can remain local when sharing would not improve the population objective, and privacy controls must separately limit what transmitted updates disclose.

Federated Learning Algorithms

The voice assistant of the chapter's opening, now deployed to millions of homes whose intermittently available devices contribute updates when local conditions permit, shows what local adaptation alone cannot do. One household pronounces "data" as "DAY-tuh" and another as "DA-tuh"; a third, a technical household, says "machine learning" every day, while a fourth never has. Local adaptation can specialize each model to its own household, but nothing it learns travels. If the fourth household starts using the phrase, its model must learn it from scratch, even though millions of other devices already handle it. Federation offers that transfer when the observations support a common objective. The system must decide which changes improve shared representations and which should remain personal, then evaluate whether aggregation helps the intended users.

Federated learning (definition 11.2) supplies that transfer while each device keeps its raw examples local. The approach turns data locality into one privacy control, not a complete privacy guarantee. A system must still treat gradients, model deltas, participation timing, device identifiers, and aggregate statistics as sensitive outputs because these signals can reveal information about local users (Kairouz and McMahan 2021; Zhu et al. 2019).

For this camera-personalization scenario, one compact model-update uplink is much smaller than one upload of the week's raw observations. Total federated communication still depends on the number of rounds and on model downloads.



One compressed update is 80× smaller than a week's raw-image upload.

Napkin Math 11.3: Model updates vs. raw data

Problem: A team is designing a federated camera-personalization system that learns from 200 MB of compressed user images per week. Compare one upload of those images with one compressed model-update uplink round.

Math: Bandwidth efficiency is the ratio of raw data volume to model update size.

1. **Raw data upload**: 200 MB/week.
2. **One federated uplink round**: A compressed model update (5M params) is 2.5 MB.
3. **One-round uplink reduction**: 200 MB/2.5 MB = 80×.

Systems insight: For this scenario, one 2.5 MB uplink is 80× smaller than one 200 MB raw-data upload. That ratio is not the end-to-end communication saving of a training run: after roughly 80× uplink rounds, cumulative update uploads alone equal the raw-data volume, before counting global-model downloads, retries, or protocol overhead. The verdict therefore turns on the round schedule. A deployment that runs one round per day uploads seven updates per week of data, far below the break-even count, and saves most of the uplink traffic; one that runs a round every hour uploads 168 updates per week, more than the break-even count, and moves more bytes than shipping the images would. Per-round traffic must be multiplied by the expected round count before federation can claim a bandwidth saving.

Across the three network topologies partitioned in figure 0.144, federated learning is the sole paradigm that aggregates fleet-wide experience across users without allowing raw training data to cross the device perimeter. Centralized-cloud training shares learning only by moving the data, and local-only adaptation keeps each insight on the device that found it, so one household's rare vocabulary never helps another. Federated learning buys that middle position with a protocol, and the rest of this section determines when the protocol yields a better shared model.

Privacy-preserving collaborative learning

Federated learning (FL) coordinates local training through shared-model updates (McMahan et al. 2017). Its protocol must specify how heterogeneous clients contribute, how non-i.i.d. data distributions affect local work, and which state remains personal. Secure aggregation and differential privacy impose additional constraints on what the coordinator may observe and how much noise the learning loop must absorb.

The first architectural decision is whether the participants form a cross-device or cross-silo federation. The voice assistant is cross-device, with millions of unreliable phones. A group of hospitals that want to train a complication-prediction model, but whose governance policies prohibit centralizing patient records, is cross-silo, with a few reliable institutions that each hold a large dataset. The distinction changes the failure model, scheduling policy, and privacy unit before any optimizer is selected (table 0.141) (Kairouz and McMahan 2021).

Table 0.141: Cross-Device and Cross-Silo Federated Learning: The participant population determines scheduling, trust, weighting, and privacy semantics. A protocol designed for millions of unreliable phones is not automatically appropriate for a consortium of hospitals.

Design dimension	Cross-device federation	Cross-silo federation
Participants	Large population of intermittently available personal devices	Small set of known organizations or sites
Round semantics	Sample an eligible cohort; expect stragglers and dropouts	Coordinate a stable membership; investigate missing sites
Trust boundary	Treat client software and local data as potentially compromised	Authenticate institutions, but still isolate each data custodian
Weighting default	Decide whether the objective represents examples or users	Weighting follows the agreed institutional objective, not site size by default

Design dimension	Cross-device federation	Cross-silo federation
Privacy unit	Usually a user or device across its participation history	Usually a person or record within a site's data, sometimes the site itself

Learning protocols

The protocols that make distributed coordination practical at scale must solve three engineering challenges simultaneously: ensuring that local training produces compatible updates despite non-IID data distributions, aggregating those updates efficiently despite bandwidth constraints, and coordinating timing across devices with heterogeneous availability patterns.

Local training

Local training turns the device's adaptation policy into a contribution to a shared model. Every contribution needs a known starting version, a compatible parameter schema, and a declared local update rule. Otherwise, arrays with the same shape may describe changes to different models. The following synchronous protocol starts participating clients from the same shared version and keeps personal parameters outside the aggregate:

1. **Model initialization**: Each device initializes its local model parameters, often by downloading the latest global model from the server.
2. **Local data sampling**: The device samples a subset of its local data for training. This data may be non-IID, meaning that it may not be uniformly distributed across devices.
3. **Local training**: The device performs a number of training iterations on its local data, updating the model parameters based on the computed gradients.
4. **Model update**: After local training, the device computes a model update (e.g., the difference between the updated and initial parameters) and prepares to send it to the server.
5. **Update transmission**: The device transmits the model update to the server, typically using a secure communication channel to protect user privacy.
6. **Model aggregation**: The server aggregates the updates from multiple devices to produce a new global model, which is then distributed back to the participating devices.

The process repeats with a new shared version for each accepted round. Update frequency depends on device availability, local work, and communication cost. A secure transmission channel protects the transfer, but the receiving server can still inspect the update unless the aggregation protocol separately hides individual contributions. Model compatibility and update confidentiality are therefore distinct protocol obligations.

Federated aggregation protocols

The central coordination mechanism in federated learning allows devices with small, local datasets to collaboratively train a shared model. Client devices perform local training and transmit model updates to a central server, which aggregates them into a refined global model and redistributes it for the next training round. The cyclical procedure decouples learning from centralized data collection, suiting environments where user data is private, bandwidth is constrained, and device participation is sporadic.

The most widely used baseline for this process is federated averaging (FedAvg), which has become a canonical algorithm for federated learning (McMahan et al. 2017). In FedAvg, each device trains its local copy of the model using SGD on its private data. The algorithm is local SGD, which synchronizes only after several local steps to save communication, run with two changes that the data center version never faces. Only a sampled subset of clients participates in each round, and each client's data is a non-IID shard of the population, so the local steps that save communication also pull each client toward its own optimum.

↩ Local SGD and the trade-off between synchronization frequency and convergence that it exposes are established in section 5.

Formally, let $\mathcal{D}_k$ denote the local dataset on client k, and let θ_k^t be the parameters of the model on client k at round t. Each client performs E epochs of SGD on its local data, yielding an update θ_k^{t+1}. The central server then aggregates these updates as:

$$\theta^{t+1} = \sum_{k=1}^{N_{\text{clients}}} \frac{n_k}{n_{\text{round}}} \theta_k^{t+1} \tag{0.55}$$

where $n_k = |\mathcal{D}_k|$ is the number of samples on device k, $n_{\text{round}} = \sum_k n_k$ is the total number of samples across participating clients, and N_{clients} is the number of active devices in the current round. Here N_{clients} is a client count, unrelated to the C^3 axes, and bare E counts local epochs; the energy quantities of equation 0.54 always carry a subscript.

This formula optimizes an *example-weighted* objective: a client with ten times as many local examples receives ten times the influence. That choice is appropriate when every example should contribute equally, but it can let prolific users or large institutions dominate the model. A *user-weighted* objective instead assigns each participating client weight $1/N_{\text{clients}}$, optionally capping or normalizing each client's local contribution before aggregation. Neither choice is universally fair. The system must declare whether its unit of interest is an example, a user, an organization, or a deployment cohort, then evaluate that population rather than inherit n_k/n_{round} as an implementation default.

A deployed round wraps the averaging rule in policy that the equation leaves unstated (figure 0.151). Equation 0.55 fixes how completed models combine, but not which clients are invited, how long the coordinator waits, or how few completions force a round to be abandoned. Those protocol choices decide which contributions enter the sum. A client that misses the deadline contributes nothing, and its examples are absent from n_{round} for that round. Over-selection and its population-coverage trade-off are developed in section 14.

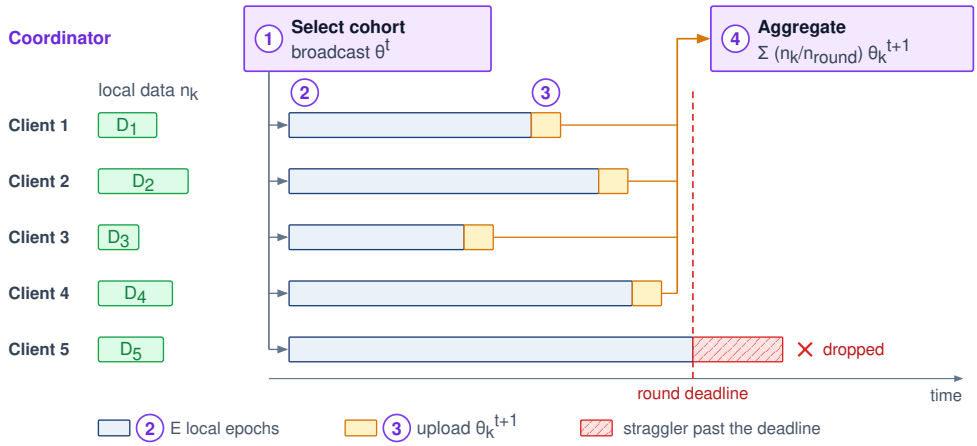


Figure 0.151: Federated averaging protocol: One FedAvg round in four steps. (1) The coordinator selects a cohort, over-selecting to absorb dropouts, and broadcasts the global model θ^t. (2) Each client runs E local epochs on its private data. (3) Clients that finish before the round deadline upload θ_k^{t+1}; a straggler that misses the deadline is dropped. (4) The coordinator forms the example-weighted average of equation 0.55, which becomes the next global model.

This basic structure introduces a number of design choices and trade-offs. The number of local epochs E impacts the balance between computation and communication: larger E reduces communication frequency but risks divergence if local data distributions vary too much. The selection of participating clients affects convergence stability and fairness. In real-world deployments, not all devices are available at all times, and hardware capabilities may differ substantially, requiring robust participation scheduling and failure tolerance.

⇄ **Contrast:** Federated rounds over intermittent wide-area clients contrast with the synchronous AllReduce collectives on low-latency cluster fabrics established in section 8.

Time to target under client drift

A federated deployment must reach a quality target within its time, energy, and participation budgets. More local training can reduce how often clients communicate, but it also changes their updates and the time each selected cohort takes to finish. The engineering comparison is therefore time to an agreed quality target, not communication rounds alone.

What the FedAvg controls count FedAvg exposes the number of participating clients N_{clients}, local epochs E, and communication rounds R as controls (McMahan et al. 2017). Their product $N_{\text{clients}}ER$ counts client-epochs when participation is fixed, which makes it the work ledger of a run rather than a measure of its progress. Clients can have different dataset sizes, and equal client-epoch counts can process different examples or produce conflicting updates, so two runs with the same $N_{\text{clients}}ER$ can end at very different quality. A convergence result is useful only when its assumptions match the optimizer, client sampling, and data distributions.

Non-IID data impact Non-IID data is where federated averaging departs from the data center version of local SGD. Each local step moves a client toward the optimum of its own shard, so after many local steps the client models sit near different optima, and their weighted average lands at a point that need not minimize the population objective. This client drift grows with the number of local steps and with how far the client distributions differ, and it degrades federated averaging relative to i.i.d. baselines (T. Li et al. 2020; Zhao et al. 2018). It therefore eats into the benefit of fewer communications exactly where communication is most expensive. How strongly depends on the partition, update rule, participation policy, and local step size, and no universal heterogeneity score predicts a round count across applications, which is why section 14 measures the trade-off rather than computing it.

When statistical heterogeneity causes FedAvg to diverge or stall, two foundational algorithmic extensions address the root cause of client drift:

1. **FedProx** (T. Li et al. 2020) adds a proximal regularization term $\frac{\mu}{2}\|\theta - \theta^t_{\text{global}}\|^2$ to each client's local loss function. This penalty constrains local updates to remain in the neighborhood of the current global model θ^t_{global}, stabilizing convergence under statistical heterogeneity and permitting devices to execute variable numbers of local epochs without destabilizing the server aggregate.
2. **SCAFFOLD** (Kairouz and McMahan 2021) corrects the local update direction directly using control variates. By maintaining a server control variate and per-client control variates that estimate the difference between client-local and global gradient directions, SCAFFOLD applies an additive correction to each local SGD step. This correction neutralizes client drift even when local datasets differ arbitrarily, although it doubles the communication volume per round by transmitting control variates alongside model parameters.

Measuring the local-work trade-off Compare candidate local-epoch settings under the same initialization, data partition, participation policy, and held-out quality target. For each setting E, record the first validated round $R(E)$ that reaches the target and the elapsed duration $t_r(E)$ of each completed round, including client selection, local work, transfer, aggregation, and any waiting. The observed time to target is

$$T_{\text{target}}(E) = \sum_{r=1}^{R(E)} t_r(E).$$

Each $t_r(E)$ is one instance of the round budget sketched at the opening of the chapter. Read through the Fleet Law, it is the local training on the slowest client the round still awaits, plus the upload, plus the wait for enough reports, less whatever overlaps. The communication piece is easy to estimate. Over a constrained mobile uplink of 1 to 10 Mbps, the chapter's reference adapter update of 50 MB takes about 7 minutes to upload at the low end and about 42 seconds at the high end, and that cost recurs in every one of the $R(E)$ rounds. A setting of E that halves $R(E)$ therefore removes half of the cumulative upload time, and it pays off only if the extra local training it adds to each round, on the slowest awaited client, costs less than the uploads it removes. Client drift keeps that comparison from being settled on paper, because more local steps can also raise $R(E)$, and only the measured ledger below can rank the settings.

A useful experiment ledger records local epochs, completed clients, rounds to target, elapsed time, transmitted bytes, and device energy. If a run never reaches the quality target within the budget, report that outcome rather than extrapolating an invented convergence curve. Repeated runs and cohort-level validation distinguish a stable improvement from a fortunate sample of participating devices.

Communication-computation trade-off Figure 0.152 lays out the opposing systems paths governed by local work E as a ledger of rounds: increasing local epochs lengthens per-round execution duration $t_r(E)$ (the width of each round) while reducing synchronization frequency (the number of rounds in a row), which can lower the required rounds $R(E)$ until client drift penalizes convergence. Both paths combine into the cumulative time to target $T_{\text{target}}(E)$, where each row ends, which remains admissible only if total consumption fits within client energy and fleet-coverage budgets. A setting that requires fewer rounds can still prolong total wall-clock duration. Selecting E therefore requires evaluating an empirical ledger alongside physical admission constraints, rather than relying on ungrounded heuristics.

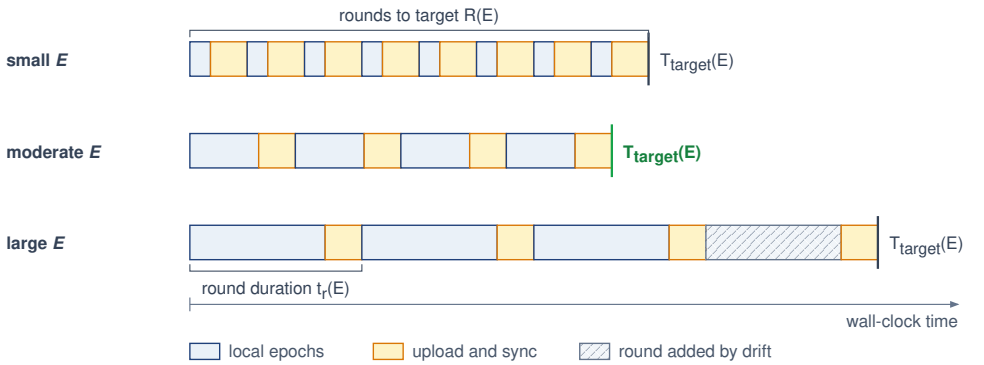


Figure 0.152: Measuring the local-work trade-off: The local-work setting E acts through two opposing paths. More local epochs lengthen each round, $t_r(E)$, while reducing how often clients synchronize, which can lower the rounds to target, $R(E)$, unless client drift raises it. Only their combination, the measured time to target $T_{\text{target}}(E)$, ranks candidate settings, and a setting is admissible only if it also fits the client energy and population-coverage budgets.

The operating point depends on the deployment. Larger local updates can amortize transfer overhead, but they also change drift, completion time, and which clients finish. The network alone can move the optimum, as a cost model in relative units shows (figure 0.153). Its minimum E^* shifts from $E = 10$ on the fast-network curve to $E = 40$ on the slow-network curve because amortizing expensive transfers justifies more local work. These curves are not measured convergence results. A deployment must establish whether additional local work actually reduces time to target after drift and client completion are counted, and adaptive epoch policies need the same outcome and coverage checks as fixed settings.

Diagnosing a missed target Federated convergence results depend on the update rule, objective, sampling policy, and assumptions about client data (Kairouz and McMahan 2021). Heterogeneity, participation, and local sample counts are therefore inputs to a feasibility assessment, not universal pass/fail thresholds. A deployment must demonstrate that its chosen configuration reaches the declared quality target within time and device budgets, with evaluation that represents the intended population.

When a configuration misses that target, the measured failure guides the next experiment. Conflicting local updates motivate testing less local work, adding proximal regularization (FedProx), incorporating control variates (SCAFFOLD), or switching to personalization. Long waits motivate scheduling or asynchronous alternatives, subject to privacy-protocol compatibility. Sparse local evidence motivates bounded adaptation and stronger validation. None of these changes replaces observations from absent cohorts; each must be reevaluated for quality, resource cost, and population coverage.

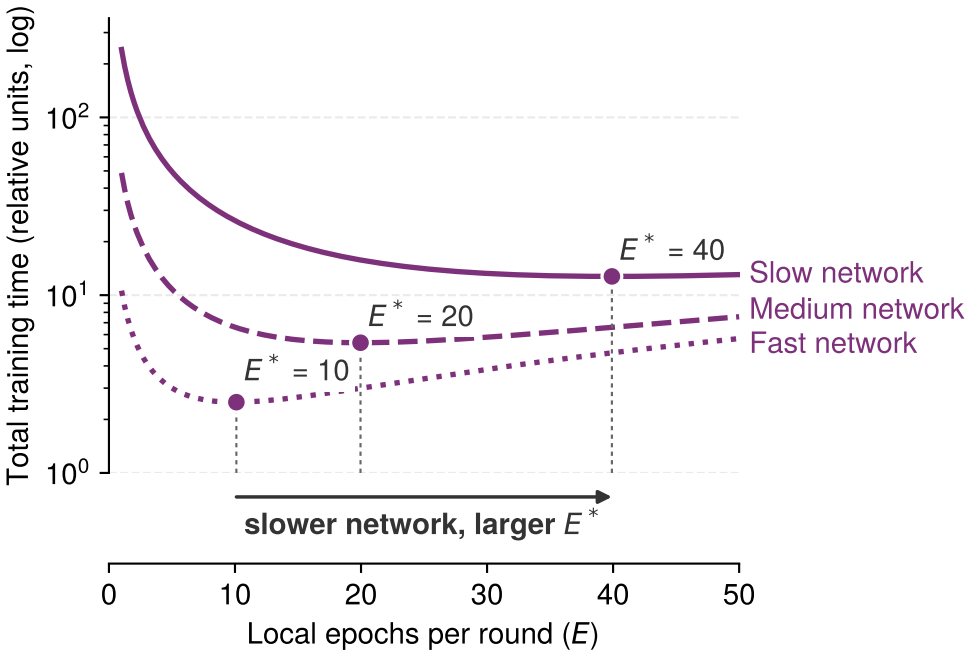


Figure 0.153: Communication-computation trade-off in federated learning: As network bandwidth decreases from fast to slow, the time-minimizing number of local epochs shifts rightward because additional local computation amortizes more communication. The curves come from an illustrative cost model in relative units, not measurements; its growing local-work term stands in for the longer rounds and added drift that make excessive local work counterproductive.

The aggregation rule specifies how compatible local models produce a shared model; the measured time-to-target ledger establishes whether a configuration reaches its objective within budget. A controlled lab can hold participant availability and network conditions steady. A phone fleet cannot, so the implementation must define how selection, deadlines, and failures change the set of updates that actually enters each aggregate. These protocol decisions connect learning behavior to fleet orchestration.

Federated Learning Systems at Scale

A round selects a cohort from the deployment population, but some selected devices overheat, lose Wi-Fi, enter power-saving mode, or power off before returning an update. A fleet of millions of smartphones need not participate in one round for these failures to matter. The orchestrator must decide which clients are eligible, how long to wait, and what evidence permits aggregation when only part of the selected cohort completes.

Client scheduling

Federated learning operates under the assumption that clients, or devices that hold local data, periodically become available for participation in training rounds. In real-world systems, client availability is intermittent and variable. Devices may be turned off, disconnected from power, lacking network access, or otherwise unable to participate at any given time. As a result, client scheduling plays a central role in the effectiveness and efficiency of distributed learning.

At a baseline level, federated ML systems define eligibility criteria for participation. A mobile deployment may require devices to be plugged in, connected to Wi-Fi, and idle to limit interference with foreground work and battery use. The chosen criteria determine which subset of the total population is considered "available" for a training round; they are deployment policy rather than requirements of federated learning itself.

Beyond these operational filters, devices also differ in their hardware capabilities, data availability, and network conditions. Some smartphones contain many recent examples relevant to the current

task, while others have outdated or irrelevant data. Network bandwidth and upload speed may vary widely depending on geography and carrier infrastructure. As a result, uniform random selection from the eligible pool does not guarantee coverage of the full deployment population; eligibility has already excluded some devices and their data.

Availability-driven selection introduces participation bias, the fleet-level consequence of the admission test in equation 0.54 (principle 18). Clients with favorable conditions, such as frequent charging, high-end hardware, and consistent connectivity, pass admission and participate repeatedly, while others are systematically underrepresented. This can skew the resulting model toward behaviors and preferences of a privileged subset of the population, raising both fairness and generalization concerns.

Participation bias becomes severe when a small eligible cohort supplies most completed updates while other cohorts rarely participate. Completion logs and population coverage must establish the size of that skew in the actual deployment. This creates a feedback loop: models become more strongly optimized for users with high-end devices and stable connectivity, potentially degrading performance for resource-constrained users who need adaptation the most. A keyboard prediction model might become biased toward the typing patterns of users with flagship phones who charge overnight, missing important linguistic variations from users with budget devices or irregular charging patterns.

The order of these decisions limits what any remedy can do. Fleet orchestration admits only feasible allocations before a fairness policy divides them (principle 14), and a federated scheduler inherits the same order with a sharper consequence. Its eligibility filter fixes the candidate pool, so a fairness policy can redistribute rounds only among devices the admission test already accepted; a device that never qualifies is invisible to it.

Scheduling must therefore balance completion speed with population coverage. Stratified or quota-based sampling can prioritize underrepresented groups among eligible devices, while cumulative participation records can guide later invitations. Weighting methods require estimates of the population and selection process; they cannot recover observations from a cohort that never participates. Buffered asynchronous aggregation (Nguyen et al. 2021), whose mechanism section 19 describes, staleness-aware methods (Rodio and Neglia 2024), and fairness-oriented weighting (Ma et al. 2024) offer additional controls. Their effectiveness must be checked through completed participation and cohort quality, rather than inferred from the scheduling rule alone.

These fairness mechanisms sit alongside adaptive client selection strategies. Federated ML systems can prioritize clients with underrepresented data types, target geographies or demographics that are less frequently sampled, and use historical participation data to enforce fairness constraints. Predictive modeling can anticipate later client availability or success rates, improving training throughput.

Selected clients perform one or more local training steps on their private data and transmit their model updates to a central server. These updates are aggregated to form a new global model. Typically, this aggregation is weighted, where the contributions of each client are scaled, for example, by the number of local examples used during training, before averaging. Example weighting gives larger local datasets more influence whether or not they represent the target population any better.



Enough valid reports let the round close before its slowest clients finish.

Scheduling must also bound how long a round waits on its slowest participants. Network latency, battery depletion, or background process contention can make some devices (stragglers) take $10\times$ longer than the median, and the round cannot aggregate until enough updates arrive.

To reduce waiting for stragglers, production FL systems employ **over-selection**. The server selects a candidate pool size $K_{\text{candidates}}$ larger than the target number of updates K_{target} (the production system of Bonawitz et al. (2019) selects about 130 percent of the target, $K_{\text{candidates}} \approx 1.3 \times K_{\text{target}}$). When enough valid reports arrive, the server can form an aggregate from K_{target} completed updates rather than wait for every selected device. Completion then depends on the target-th valid report, but over-selection alone does not guarantee that the target is reached. A round deadline and an explicit acceptance or abandonment rule handle insufficient completion. Secure aggregation adds participation thresholds and dropout-recovery requirements; selecting the fastest reports must remain compatible with that protocol. Accepting the fastest responders can amplify the participation bias just described, so shorter rounds must be evaluated against cohort coverage and wall-clock time to the declared quality target.

These scheduling decisions directly impact convergence rate, model generalization, energy consumption, and overall user experience. Poor scheduling results in excessive stragglers, overfitting to narrow client segments, or wasted computation. Client scheduling is therefore a core component of system design in federated learning, demanding both algorithmic insight and infrastructure-level coordination.

Bandwidth-aware update compression

Update compression begins with a bottleneck diagnosis. Transmitting full weights or gradients can exhaust a client's transfer window or energy allowance before its update reaches the coordinator.[14] When transfer is limiting, the design decision is which information to quantize, sparsify, or keep local. The smaller payload must then be evaluated against encoding cost, update error, and the rounds required to reach the quality target.

The compression decision separates into three levers, each changing a different part of the communication bottleneck: model compression reduces bits per update, selective sharing reduces which parameters travel, and architectural partitioning keeps some state local. Model compression methods reduce the wire footprint of transmitted updates through quantization, sparsification, or subsampling. Instead of sending full-precision gradients, a client transmits 8-bit quantized updates or communicates only the top-K_{top} gradient elements[15] with highest magnitude, the same encodings that cluster training applies to its collective payloads. At the edge they bind in a different place. They act on a slow, asymmetric uplink rather than a fabric, under secure aggregation that must still combine the encoded updates, and inside a per-round communication ledger (equation 0.56) that also counts downloads and retries. These transformations are communication mechanisms, not privacy mechanisms; a smaller embedding, sparse update, or low-precision gradient may still expose membership, attributes, or reconstructable features.

Selective update sharing further reduces communication by transmitting only subsets of model parameters or updates. In layer-wise selective sharing, clients update only certain layers, typically the final classifier or adapter modules, while keeping the majority of the backbone frozen. This reduces the update payload and limits which shared representations can change, but the trainable subset can still overfit nonrepresentative client data.

Architectural partitioning requires specifying what crosses the boundary. A personal/shared parameter partition keeps local modules private while aggregating selected shared parameters. Split learning instead divides execution between client and server, exchanging intermediate activations and backward gradients at the cut. These designs have different traffic and exposure patterns; neither guarantees a communication reduction or privacy merely by dividing the model.

These approaches can use the FedAvg aggregation protocol (section 14) only when their encoding and shared parameter schema support weighted aggregation. Quantization requires compatible scales, sparse updates require coordinate identities, and local-only parameters must stay outside the shared aggregate. With secure aggregation, the encoding must support combination without exposing individual decoded updates. The full communication ledger for round r is

$$M_r = M_{\text{download},r} + M_{\text{upload},r} + M_{\text{protocol},r} + M_{\text{retry},r}, \tag{0.56}$$

Equation 0.56 makes download, upload, protocol, and retry traffic explicit. The download distributes model state, the upload carries client updates, protocol traffic covers authentication and cryptographic setup, and retries account for failed or repeated transfers. Optimizing only $M_{\text{upload},r}$ can therefore move rather than remove the bottleneck. While amortizing network transfers through additional local computation relieves bandwidth pressure, alternative communication-efficient update strategies introduce their own systems trade-offs: compression may degrade gradient fidelity, selective updates can limit model capacity, and split architectures complicate coordination. Effective federated learning requires balancing communication, privacy, and convergence against the capabilities and variability of the client population.

The local-work schedule and update encoding jointly determine communication cost. Figure 0.154 compares uncompressed 32-bit values (Panel A) with uniform 8-bit quantization (Panel B), which gives a $4\times$ reduction in value bytes before scales and other metadata are counted. Top-k sparsification with retained error feedback (Panel C) must encode coordinate identities as well as selected values. Error feedback retains one residual value per update coordinate between transmissions. Its

[14] **Wireless Upload Asymmetry**: Federated updates use the uplink, whose available throughput can differ substantially from the downlink and vary with coverage and contention. Transfer time depends on encoded update size and effective uplink goodput; energy also depends on radio state and transfer duration. Low-power links may add duty-cycle constraints. Compression is useful when these costs bind the update budget, but its necessity depends on the payload, link, and permitted synchronization interval.

[15] **Gradient Sparsification**: Selecting the largest 1–10 percent of gradient elements by magnitude reduces transmitted value count by 10–100$\times$ before coordinate indices and other metadata are included. Sparsified SGD and deep gradient compression retain untransmitted residuals for later updates rather than assuming that small components can be discarded permanently (Stich et al. 2018; Lin et al. 2018). Wire-byte savings depend on the encoding, while convergence depends on the residual handling, optimizer, and compression schedule; a value-count reduction alone establishes neither.

↩ Gradient quantization, top-k sparsification, and error feedback that carries unsent updates forward are established in section 10. Convergence depends on the optimizer and compression assumptions.

↪ The break-even condition under which encoding and decoding time costs less than the transfer time compression saves is developed, with a worked example, in section 4.

storage depends on the update size and residual precision and must fit the device allowance alongside training and replay state. The receiving path must reconstruct or aggregate these encodings consistently, with separate compatibility requirements when secure aggregation hides individual updates.

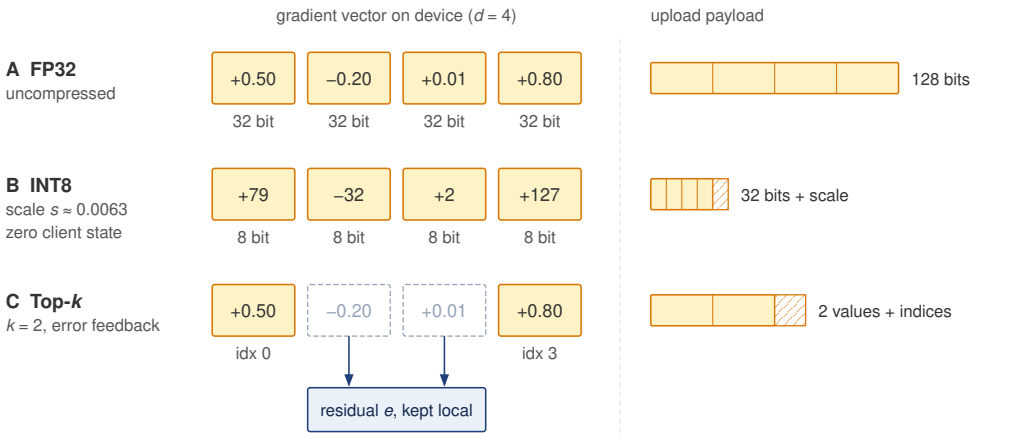


Figure 0.154: Gradient compression techniques: Standard updates transmit full-precision values; quantization maps values to lower-precision buckets, such as FP32 to INT8; and sparsification transmits only the most significant top-k gradients. The latter two mechanisms reduce bytes transferred but introduce representation error or residual state that the training algorithm must manage.

The quantization panel's "Zero client state" means no persistent error-feedback residual; encoding buffers, scales, and temporary workspace still enter the device budget. Compression is useful when its reduction in total communication outweighs encoding work and any extra rounds needed to reach the quality target. A smaller upload helps a round only if transfer was what made clients miss the deadline or excluded a cohort, and the round's completion logs show which. Even when transfer becomes feasible, the shared model may still fail to capture local variation.

Federated personalization

Devices can complete compatible updates yet disagree about which behavior improves their local task. A shared model may serve that population adequately, or its aggregate gain may conceal persistent losses for particular users. Personalized federated learning retains shared learning while allowing selected parameters or models to specialize. Its value must be evaluated against the added local state, training cost, and risk of overfitting sparse user data.

Let θ_k denote the model parameters on client k, and θ_{global} the aggregated global model. For N_{clients} clients, counted as in equation 0.55, traditional FL seeks to minimize a global objective:

$$\min_{\theta} \sum_{k=1}^{N_{\text{clients}}} w_k \mathcal{L}_k(\theta)$$

where $\mathcal{L}_k(\theta)$ is the local loss on client k, and w_k is a weighting factor (e.g., proportional to local dataset size). This formulation optimizes the weighted average loss of a shared model θ; it does not guarantee acceptable performance for every client. Local loss landscapes $\mathcal{L}_k$ can differ across clients, reflecting non-IID data distributions and varying task requirements.

Personalization modifies this objective to allow each client to maintain its own adapted parameters θ_k, optimized with respect to both the global model and local data:

$$\min_{\theta_1,\ldots,\theta_{N_{\text{clients}}}} \sum_{k=1}^{N_{\text{clients}}} \left(\mathcal{L}_k(\theta_k) + \lambda_{\text{reg}} \cdot \mathcal{R}(\theta_k, \theta_{\text{global}}) \right)$$

Here, $\mathcal{R}$ penalizes deviation from the global model, and λ_{reg} controls the strength of that penalty. The displayed objective describes local specialization around a given global reference; a complete protocol must additionally specify how that reference is trained and refreshed. The penalty trades local fit against proximity to the shared model, without guaranteeing improvement for every client.

Real-world use cases illustrate the importance of this approach. Consider a wearable health monitor that tracks physiological signals to classify physical activities. While a global model may perform reasonably well across the population, individual users exhibit different motion patterns, gait signatures, or sensor placements. Finetuning the final classification layer or low-rank adapters provides a way to address these differences. Evaluation must establish whether the local examples support an improvement, especially for rare classes with little supervision.

Several personalization strategies address the trade-offs between compute overhead, information exposure, and adaptation speed. One widely used approach is local finetuning, in which each client downloads the latest global model and performs a small number of gradient steps using its local data. This method avoids transmitting those examples during adaptation, but the resulting local state and any later update remain privacy-sensitive. It may also yield suboptimal results when the global model is poorly aligned with the client's data distribution or when the local dataset is extremely limited.

Another effective technique involves personalization layers, where the model is partitioned into a shared backbone and a lightweight, client-specific head, typically the final classification layer (Arivazhagan et al. 2019). In FedPer, clients train both the shared base and their personal head, but only the shared base participates in server aggregation; the head remains local. A separate head-only adaptation policy can freeze a downloaded backbone to reduce local training cost when the relevant variation lies mainly in output categories or decision boundaries.

Clustered federated learning offers an alternative by grouping clients according to similarities in their data or performance characteristics, and training separate models for each cluster. This strategy can enhance accuracy within homogeneous subpopulations but introduces additional system complexity and may require exchanging metadata to determine group membership.

Finally, meta-learning approaches, such as model-agnostic meta-learning (MAML),[16] aim to produce a global model initialization that can be quickly adapted to new tasks with just a few local updates (Finn et al. 2017). This technique is especially useful when clients have limited data or operate in environments with frequent distributional shifts.

Each strategy occupies a different point in the personalization trade-off space. Table 0.142 compares compute overhead, information exposure, and adaptation latency across local finetuning, personalization layers, clustered federated learning, and meta-learning. The mechanism determines what state is shared; a privacy guarantee requires separately specified controls and assumptions.

[16] **MAML (Model-Agnostic Meta-Learning)**: Finn et al. (2017) optimize for a model initialization from which one or a few gradient steps can yield good performance on a new task, with experiments including one-shot and few-shot settings. Meta-training is more expensive than ordinary finetuning because it differentiates through the adaptation process, but deployment adaptation can be limited to a small number of local updates. This makes MAML relevant for edge scenarios where inference compute is cheap but training data is scarce.

Table 0.142: Personalization Trade-Offs: Federated learning strategies balance personalization with compute, information exposure, and adaptation latency. Data locality narrows exposure but does not by itself provide a privacy guarantee.

Strategy	Personalization Mechanism	Compute Overhead	Privacy Preservation	Adaptation Speed
Local Finetuning	Gradient descent on local loss postaggregation	Low to Moderate	Raw examples stay local; adapted state remains sensitive	Fast (few steps)
Personalization Layers	Split model: shared base + user-specific head	Moderate	Narrows shared state; does not guarantee privacy	Fast (train small head)
Clustered FL	Group clients by data similarity, train per group	Moderate to High	Group membership and updates can leak attributes	Medium
Meta-Learning	Train for fast adaptation across tasks/devices	High (meta-objective)	Depends on meta-training and adaptation protocol	Very Fast (few-shot)

Selecting an on-device personalization strategy requires balancing adaptation capacity against memory residency. Figure 0.155 contrasts the structural footprint of three fine-tuning paradigms: full fine-tuning of every backbone layer (Column A), head-only adaptation that freezes feature extractors (Column B), and parameter-efficient adapters inserted alongside frozen backbone blocks (Column C).

The dashed backward-pass arrows in figure 0.155 are the activation term of equation 0.53 drawn as distance. Adapters at early layers in Column C pull the backward path through the later backbone,

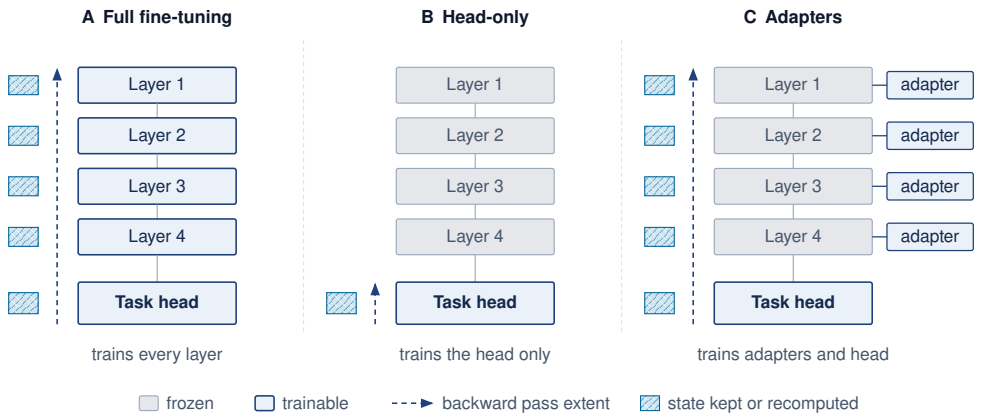


Figure 0.155: Federated personalization architectures: (A) Full fine-tuning updates every layer; (B) head-only adaptation freezes the feature extractor and trains only the task head; (C) adapter-based learning, such as LoRA, inserts small trainable modules beside a frozen backbone. The dashed arrow marks how far the backward pass must reach. Adapters shrink trainable state, but because they sit at every depth their gradients still traverse the backbone, so the required backward state must be retained or recomputed. In this comparison, head-only adaptation truncates the backward pass at the feature extractor.

whose saved state must be retained or recomputed, while head-only adaptation in Column B ends it at the head, as in the wake-word case of section 13. Placement sets the dependency path, and the execution schedule sets how much of that state stays resident.

Federated privacy

While federated learning is often motivated by privacy concerns, as it involves keeping raw data localized instead of transmitting it to a central server, the paradigm introduces its own set of security and privacy risks. Although devices do not share their raw data, the transmitted model updates (such as gradients or weight changes) can inadvertently leak information about the underlying private data. Techniques such as model inversion attacks[17] and membership inference attacks demonstrate that adversaries may partially reconstruct or infer properties of local datasets by analyzing these updates.

To mitigate such risks, federated ML systems can employ protective measures. **Secure aggregation**[18] protocols reveal a combined result while hiding individual updates beyond what that result itself reveals, subject to the protocol's assumptions about collusion and participating clients. Differential Privacy techniques calibrate noise to bounded contributions to limit the effect of a protected user's or record's inclusion on the released result. The deployment must specify which unit receives that protection.

These controls solve different problems. Secure aggregation limits what the coordinator learns about each submitted update, whereas differential privacy bounds how much a declared privacy unit can affect a released result. A deployment therefore needs a privacy ledger that records the unit of protection, clipping rule, noise mechanism, sampling assumptions, (ϵ, δ) expenditure for every release, and cumulative composition across training and federated analytics (Abadi et al. 2016; Kairouz and McMahan 2021). Clipping bounds each contribution before noise is calibrated. The parameters ϵ and δ describe the permitted change in output probabilities when the protected user or record is included or removed; composition accounts for repeated releases involving that unit. Resetting a round counter does not reset privacy loss for a user who participates again.

Secure aggregation also creates a robustness conflict. Byzantine-resilient rules such as Krum, coordinate-wise filtering, or per-client anomaly inspection need access to individual updates, while secure aggregation deliberately hides those updates (Blanchard et al. 2017; Bonawitz et al. 2017). A system cannot claim both arbitrary per-client inspection and conventional secure aggregation over the same messages. It must instead validate clients before masking, use attested execution and bounded local updates, compute only aggregation-compatible checks, or adopt a protocol designed to evaluate approved robust statistics without revealing raw client contributions. Figure 0.156

17 **Model Inversion Attack**: Reconstructs training data from model outputs or gradients by optimizing inputs that maximize confidence scores (Fredrikson et al. 2015; Zhu et al. 2019). In federated learning, gradient updates can leak more information than model outputs alone because they expose training-step information directly. Defenses such as gradient perturbation, secure aggregation, and differential privacy add protocol, utility, communication, or compute trade-offs whose magnitude depends on the threat model and deployment.

18 **Secure Aggregation**: Cryptographic protocol where client pairs exchange random masks that cancel in the server-side sum, revealing only the aggregate gradient without exposing individual contributions (Bonawitz et al. 2017). Production-scale federated systems such as Gboard combine secure aggregation with eligibility checks, dropout handling, and round scheduling (Bonawitz et al. 2019). The communication expansion and minimum-participation requirements depend on protocol parameters and the security model, so aggregation systems must wait for enough eligible devices before releasing a round.

models this cryptographic boundary through pairwise zero-sum masking: Clients A and B negotiate a shared random mask $\mathbf{s}$ via Diffie-Hellman key agreement, perturbing their local updates into pseudo-random vectors ($\mathbf{y}_A = \Delta\theta_A + \mathbf{s}$ and $\mathbf{y}_B = \Delta\theta_B - \mathbf{s}$) before crossing into the server domain. When the aggregation server sums the received vectors, the symmetric masks cancel ($\mathbf{s} - \mathbf{s} = 0$), yielding the exact unmasked aggregate $\Delta\theta_A + \Delta\theta_B$. This two-client illustration assumes both clients complete the exchange and neither reveals its mask to the server. It demonstrates cancellation, not a complete protocol for collusion resistance or dropout recovery.

↩ Byzantine failures, in which a worker stays alive but returns wrong results, and aggregation rules such as Krum and trimmed mean that bound their influence are established in section 5.

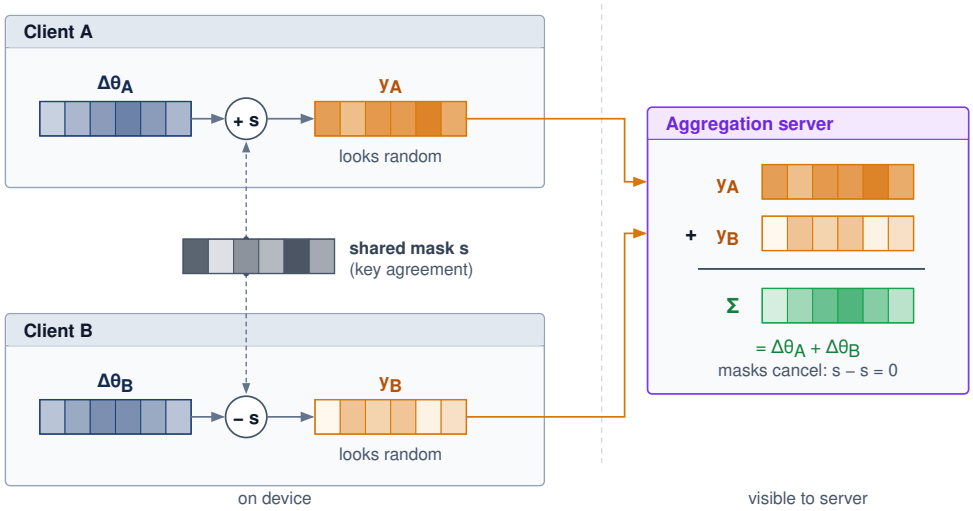


Figure 0.156: Secure aggregation protocol: A simplified two-client view of pairwise masking. Clients A and B agree on a shared random mask $\mathbf{s}$; A uploads $\mathbf{y}_A = \Delta\theta_A + \mathbf{s}$ and B uploads $\mathbf{y}_B = \Delta\theta_B - \mathbf{s}$, so each upload alone looks random to the server. Summing them cancels the mask and yields exactly $\Delta\theta_A + \Delta\theta_B$. The server learns only the aggregate, which can still leak information unless differential privacy bounds it.

Secure aggregation and differential privacy can protect different boundaries, but their composition must follow the threat model. If a trusted server adds noise after receiving an exact aggregate, the privacy guarantee applies to the released noisy result; it does not hide that exact aggregate from the server. A protocol designed for distributed noise can instead let the server receive only a noisy aggregate. Clipping, noise calibration, dropout assumptions, and repeated-release accounting must match the chosen protocol. Neither mechanism establishes that local data or updates are trustworthy.

Checkpoint 11.3: Federated system design

Consider architecting a federated learning system for a fleet of 10 million mobile devices. The data is highly non-IID (users have distinct, clustered typing patterns), and the network environment is constrained (1-10 Mbps). Before choosing optimizations for this scenario, classify the local bottlenecks and state which system constraint dominates each decision.

Consider three design decisions:

1. Aggregation: Select plain FedAvg, reduced local epochs, or personalization/clustering for the non-IID population, and justify how the choice controls client drift.
2. Privacy: Decide whether the deployment needs formal differential-privacy noise or whether secure aggregation and data minimization are sufficient for the stated threat model; using the clipping and noise described in this section, explain how noise can affect utility and rounds to the same quality target, and what measurements would establish that cost.

3. Communication: Choose between gradient quantization (e.g., 8-bit) and structured sparsity under constrained bandwidth, and justify the bandwidth/accuracy trade-off.

Large-scale device orchestration

A round that selects a million phones overnight will see some fraction overheat, lose connectivity, or be unplugged before they report, and a few may submit corrupted or deliberately malicious updates. Coordinating that population requires protocols that handle Byzantine clients, network partitions that temporarily cut participants off, and constrained communication. These challenges differ from controlled data center training, where high-bandwidth networks and managed infrastructure narrow the trust and availability envelope.

Network and bandwidth optimization

The communication bottleneck becomes a scalability constraint when transfers exceed the available connection windows or dominate round time. Quantifying the actual transfer requirements exposes the design constraints on model architectures, update compression strategies, and client participation policies that determine system viability.

The federated communication hierarchy reveals the severe bandwidth constraints under which distributed learning must operate. Full model synchronization can require tens to hundreds of megabytes per training round for common deep models, which is a poor fit for intermittent mobile uplinks. Federated-optimization work therefore studies communication reduction through structured updates, quantization, sparsification, and selective transmission (Konečný et al. 2016; McMahan et al. 2017). Practical deployments often push this further by transmitting only adapters, heads, or compressed update summaries rather than complete model states. Communication frequency introduces a critical trade-off between model update freshness, where more frequent updates enable faster adaptation to changing conditions, and network efficiency constraints that limit sustainable bandwidth consumption.

Network infrastructure constraints directly impact participation rates and overall system viability. Mobile upload capacity varies sharply by geography, carrier, radio generation, congestion, and whether the device remains idle long enough to complete the transfer. A multi-megabyte update may be tolerable for a high-end device on a stable connection but impractical for a low-end device on a congested uplink. Communication policy must therefore balance completed updates against population coverage; optimizing only for fast connections can exclude the observations held by poorly connected clients.

Transfer size affects whether an eligible device can finish before its resource window closes. Smaller payloads can let clients with slower links complete, but the gain depends on whether transfer was the limiting cost. This communication efficiency can improve population coverage without guaranteeing better model quality; compression error, weighting, and the data represented by newly completing clients still matter. Gradient quantization, sparsification, and top-k selection with error accumulation (section 14) should therefore be evaluated by completed participation and cohort outcomes as well as bytes saved.

Asynchronous device synchronization

Federated learning inherits failures from distributed systems and machine learning, but its coordination objective is not consensus, the problem of making replicated servers agree on one ordered log of operations. Federated clients agree on no such log. A coordinator instead decides which stochastic client updates are eligible, how stale updates are weighted, and which aggregation rule can tolerate faulty participants without letting them steer the model. Devices crash, lose power, or disconnect during rounds, while compromised clients can submit poisoned updates. Robust aggregation can reduce the influence of some faulty participants, but its assumptions, compute cost, and compatibility with secure aggregation must be explicit.

The trust chain begins before aggregation. A production coordinator authenticates the device and application instance, verifies the signed model and training-policy version, checks eligibility and freshness, binds the returned update to that version and round nonce, and records whether the update passed protocol-level bounds. Hardware-backed attestation can strengthen claims about code

identity on supported devices, but it cannot prove that local examples are benign or representative. The resulting update-integrity record supports rejection, rollback, and incident analysis without treating device identity as evidence that the gradient is correct.

Network partitions pose particularly acute challenges for federated coordination protocols. Unlike traditional distributed systems operating within reliable data center networks, federated learning must gracefully handle prolonged client disconnection events where devices may remain offline for hours or days while traveling, in poor coverage areas, or simply powered down. Asynchronous coordination protocols enable continued training progress despite missing participants, but must carefully balance staleness (accepting potentially outdated contributions) against freshness (prioritizing recent but potentially sparse updates). Buffered asynchronous aggregation (Nguyen et al. 2021) shows the mechanism. It removes the round barrier, letting each client train whenever its admission test passes and upload when done, while the server accumulates arriving updates in a buffer and applies their aggregate once a fixed number have arrived. Each update is down-weighted by its staleness, the number of server versions published since the client downloaded its starting model, so a slow client still contributes without dragging the shared model back toward an old state.

↩ Gradient staleness, the delay between the model version a worker computed against and the version its update modifies, and its effect on convergence under bounded and fully asynchronous synchronization are established in section 5.

Recovery must distinguish coordinator state from device-local state. The coordinator checkpoints the global model and the optimizer and protocol state needed to resume accepted progress; this does not require a simultaneous checkpoint on every device. An incomplete round needs an explicit acceptance or abandonment rule, followed by evaluation of the population represented by its completed updates. State reconciliation identifies a returning device's base version and determines which shared state it must download and which personal state remains compatible. Server-side load balancing can redistribute coordination work, but replacing an unavailable client with a faster one also changes the local data contributing to training.

The asynchronous nature of federated coordination introduces additional complexity in maintaining training convergence guarantees. Traditional synchronous training assumes all participants complete each round, but federated systems must handle stragglers[19] and dropouts gracefully.

19 | **Straggler Problem**: In data center training, stragglers slow synchronous progress; in federated learning, the problem is amplified by heterogeneous hardware, intermittent connectivity, and eligibility windows (Bonawitz et al. 2019; Kairouz and McMahan 2021). Solutions like asynchronous aggregation and bounded staleness (ignoring updates computed against a model more than a fixed number of rounds old) improve throughput but introduce a fairness trade-off: aggressive straggler mitigation biases models toward users with high-end devices, potentially degrading performance for the most constrained users who need personalization most.

Heterogeneity management at fleet scale

Million-device orchestration is a tiering decision: the system must decide which clients can train, which can only report lightweight updates, and how much bias that selection introduces. The difficulty is that hardware capabilities, network conditions, data distributions, and availability patterns vary simultaneously, challenging traditional distributed machine learning assumptions about homogeneous participants operating under similar conditions.

Real-world federated learning deployments face simultaneous variation in compute, memory, energy, and connectivity. The illustrative peak compute ratings differ by about 1,200× between flagship smartphones rated at 35 TOPS and, below Archetype C's phone-class clients, IoT microcontrollers rated at 0.03 TOPS. These ratings do not translate into a training-speed ratio, because supported precision, backward operators, memory traffic, and sustained execution determine update time. Memory spans the same 65,536× range from microcontroller SRAM to flagship phone RAM met in section 5, and at fleet scale that range decides which update state each tier can retain at all. Energy budgets further restrict when that work can run. Background adaptation in this example targets roughly 500–1000 mW, while phones may sustain 2–3 W for foreground ML workloads and burst higher briefly. Network throughput, latency, and interruption patterns must likewise be measured for the participating clients before selecting update frequency and compression.

Tiered participation can assign different amounts of local work while preserving a compatible shared-update contract. A capable phone may complete more steps, while a constrained client contributes a smaller update or a separately defined aggregate statistic. These outputs are not interchangeable simply because they come from the same fleet. More work on strong devices also cannot replace the observations held by weak devices, so the policy must evaluate both computational contribution and population coverage.

The scale challenges extend beyond device heterogeneity to coordination overhead. Federated learning does not run a consensus protocol among millions of clients, nor does hierarchical aggregation perform local consensus. Regional aggregators reduce fan-in by validating an eligible cohort and combining updates before forwarding a partial aggregate; agreement on an ordered replicated log, if needed for the coordinator's own metadata, remains a separate control-plane service. Edge

infrastructure can provide aggregation points, but each added tier creates another trust boundary and another place where weighting, clipping, privacy accounting, and failure recovery must remain consistent.

Tiering interacts with the participation bias analyzed under client scheduling (section 14). Capability-based selection shortens rounds but concentrates completed updates on strong devices, so stratified sampling across tiers must be paired with per-cohort evaluation of completed participation and model quality. Availability also has a daily rhythm; devices that charge overnight in one time zone form a different cohort from those available during another zone's working hours.

Orchestration brings device updates, data selection, and federated participation into one deployment policy. If that policy permits repeated adaptation, the components interact over time: earlier updates change the model, replay determines which observations persist, and participation determines which clients influence the next shared version. Continual learning must manage these accumulated effects rather than treating each update as an isolated event.

Continual Adaptation Under Edge Budgets

A keyboard model that adapts each night for a year passes through hundreds of admitted update windows, and each window moves it a little further from the version that was validated at release. Every update the chapter has built so far was judged one at a time, by whether it fit the memory budget, passed the admission test, and improved a local metric. Repeated across a deployment's lifetime, those individually acceptable updates compound. Earlier changes alter what later updates start from, the replay buffer decides which old observations still count, and participation decides which devices shape the next shared version.

The mechanisms that keep this trajectory stable are the ones already introduced, now applied over time. Selective updates bound how far any one window can move the model, and they save work only when the execution path can skip it. Replay protects earlier behavior at the cost of retained examples and additional training. Opportunistic admission delays learning until device conditions permit it. Each needs a resource budget and an outcome check on retained behavior alongside the newest data. The long-lived stream that drives this learning is mostly unlabeled, which sets the first design question.

Unlabeled data exploitation strategies

Unlabeled sensor streams turn continual learning into a storage and scheduling decision. Cameras, accelerometers, location sensors, and touch interaction all produce data that can support self-supervised learning, and the potential volume is large. A hypothetical camera stream running continuously at 30 frames per second produces approximately 2.6 million frames daily before retention filtering, and an accelerometer sampling at 100 Hz generates 8.6 million readings. The engineering question is which traces encode stable structure worth learning from and which should expire before they crowd out model state, replay buffers, or user-facing storage.

Learning from such traces without labels requires the supervision to come from the data's own structure. Contrastive learning is the common way to manufacture it on a sensor stream, training a representation to bring designated positive pairs closer and distinguish them from designated negative pairs. Nearby camera frames or augmented views of one frame can supply positives when they preserve the task-relevant content; scene changes can invalidate that assumption. Different frames or replay entries can supply negatives, but may depict the same underlying event. The pair-selection policy therefore defines a learning signal that needs validation. Other devices' samples are not automatically available under a federated data-locality policy, and stored pairs or representations compete with replay and model state for memory.

Continual adaptation and catastrophic forgetting

When a deployment uses continual adaptation to address changing environments, user behavior, or task requirements, each update must balance new evidence against previously learned behavior. This is the stability-plasticity trade-off: models must remain stable enough to preserve useful knowledge while plastic enough to learn new patterns.

Continual learning on edge devices faces several interconnected challenges. Catastrophic forgetting (section 13) is magnified when devices cannot store or revisit historical training data. Task

interference compounds it when several learning objectives compete for limited parameter capacity, and distribution shift between pretraining and local deployment demands continued adaptation without eroding the model's core representations. Restricted device memory rules out the comprehensive replay buffers that centralized infrastructure can afford.

Three families of mechanisms manage the stability-plasticity trade-off during continual learning. Elastic weight consolidation[20] (Kirkpatrick et al. 2017) mitigates catastrophic forgetting by penalizing changes to weights important for previous tasks, experience replay (section 13) maintains stability during adaptation by interleaving new training with replayed examples from previous tasks, and progressive neural architectures allocate new capacity for new tasks rather than forcing all knowledge into fixed-capacity networks (Rusu et al. 2016). That last option is attractive when interference is severe, but it consumes additional memory and therefore fits only devices with enough spare capacity.

[20] **EWC (Elastic Weight Consolidation)**: Uses a diagonal approximation to the Fisher information to weight a penalty on changes from previously learned parameters (Kirkpatrick et al. 2017). In addition to current parameters, a basic implementation stores importance scores and reference parameter values. Retaining separate penalties for earlier tasks can increase that state further. Compared with replay, EWC trades stored examples for parameter-sized statistics; which uses less memory depends on model size, retained history, precision, and the penalty implementation.

The earlier mechanisms bound each step without guaranteeing the trajectory. Meta-learned initializations (section 16) and few-shot adaptation (section 13) reach useful local behavior in few updates, and restricting updates to bias terms, adapters, or heads (section 12) keeps the base parameters intact while useful pretrained representations reduce what the device must learn (Bommasani et al. 2021). Even a single update to a head or adapter can alter predictions on earlier tasks, and a year of individually small updates can accumulate into significant behavioral drift. The acceptance test for each window must therefore measure retained capability alongside improvement on the new data, against a recoverable baseline, because neither a small update count nor a frozen backbone is a stability guarantee.

Once the update footprint is bounded, the runtime must decide when the update can execute and whether it should be shared. The admission condition in equation 0.54 already governs when a continual update may run; what changes over a long deployment is that each admitted window also moves the device further from its last validated state. When the device also shares updates, the compression and selective transmission of section 14 keep that repeated traffic inside the bandwidth and energy budgets (Konečný et al. 2016).

Stability then becomes a state-management problem. Replay buffers, support sets, adaptation logs, and model update metadata must be protected against unauthorized access or tampering because they encode the local evidence that shaped the model. Lightweight encryption or hardware-backed secure storage can reduce that exposure, but security controls do not prove that adaptation remains beneficial. Lightweight validation techniques, including confidence scoring, drift detection heuristics (Gama et al. 2014), and shadow model evaluation, monitor adaptation dynamics and can hold an update for validated review before severe degradation occurs. Robust rollback procedures require a trusted baseline checkpoint that can be restored quickly, especially in safety-important and regulated domains where failure recovery must be provable.

Privacy and compliance requirements close the loop. User consent, data minimization, retention limits, and the right to erasure must be designed into the adaptation pipeline rather than added after deployment. Meeting regulatory obligations at scale demands on-device learning workflows that preserve auditable autonomy: the model can adapt in place, but the system still retains enough control to explain, bound, and reverse that adaptation when necessary.

A design rule describes what a single device should do. A fleet applies these rules on flagship phones, budget phones, and microcontroller sensors at once, so the pillars and their stability controls must be assembled into one policy whose terms change with the device that runs it.

Integrating the Edge Intelligence Pillars

Consider the voice assistant from the opening of this chapter, now deployed across 50 million devices that range from flagship phones to budget handsets. The chapter built model adaptation, data efficiency, and federated coordination as separate pillars, and treated separately, each solves its own constraint while leaving the others free to misbehave. An adapter rank chosen without regard to replay memory can crowd out the buffer that protects earlier behavior, and an update format chosen without regard to aggregation can produce arrays no coordinator can combine. The integration that works makes one per-tier policy decide how much a device may adapt, how much it may remember, and how it may participate in the fleet, because all three draw on the same memory, energy, and connectivity budget.

The model adaptation layer starts with candidate policies for the scenario's device tiers. Flagship phones (Tier 1) representing 20 percent of the deployment receive LoRA adapters of rank 32. Mid-tier devices (Tier 2), comprising 60 percent, receive rank 16 adapters. Budget devices, the remaining 20 percent, use bias-only updates under a 1 GB memory limit. These assignments apply the device-tier framework of section 13. Budget phones receive the Tier 3 mechanism because the memory granted to background adaptation, not installed RAM, sets their tier. The voice assistant keeps one adaptation per user on a latency-sensitive speech path, so it uses mergeable LoRA on both capable tiers rather than the switchable residual adapters that suited the multi-context workload. These assignments specify an initial policy, not a demonstrated fit. Profiling must include the base model, activations, optimizer state, runtime, and foreground reserve, while local validation determines whether each update space captures useful voice variation.

The data efficiency layer allocates part of the same device budget to experience replay, with candidate buffers of 10 MB on budget devices and 100 MB on flagship models. Buffer coverage and retention tests determine whether these allocations preserve earlier behavior. The policy targets initial adaptation within 5–10 interactions, addressing the cold-start problem of limited evidence for a new user. That target requires enough valid feedback, since a handful of ambiguous interactions supervises nothing. Later streaming updates are admitted only when both learning evidence and device resources permit them.

The federated coordination layer combines explicitly compatible shared state. Different adapter ranks and bias-only policies do not produce interchangeable arrays, so the coordinator needs separate compatible groups or a defined mapping to common parameters. Even equal-rank LoRA factors require a stated aggregation rule: averaging factors and then multiplying them generally differs from averaging the weight updates they represent. Tier-specific personal state can remain local. The scenario's 50 MB adapter payload is smaller than the 14 GB full-model payload, but downloads, repeated rounds, and protocol overhead still enter the communication budget. Each participating device must pass the energy, thermal, and foreground-latency admission tests. Raw audio can remain local while derived updates and participation metadata remain sensitive; secure aggregation, privacy accounting, access controls, and retention policies must cover that shared state.

These layers only work as a system when the integration policy protects against capability mismatch, component failure, resource conflicts, and untested emergent behavior. Table 0.143 maps edge-learning integration controls for each system risk: hierarchical capability matching, graceful degradation, explicit priority policy, and performance validation.

Table 0.143: Edge-Learning Integration Controls: A tiered edge-learning deployment needs explicit controls for capability matching, graceful degradation, resource conflicts, and validation across device and network combinations.

Integration risk	Control	Why it matters
Capability mismatch	Hierarchical capability matching	Deploys more sophisticated techniques on capable devices while preserving basic functionality across the full device spectrum.
Component failure	Graceful degradation	Keeps local adaptation useful when connectivity is poor or battery constraints force the system into a minimal adaptation mode.
Resource conflict	Explicit priority policy	Prevents model adaptation and replay buffers from competing for the same memory, energy, or latency budget without a predefined owner.
Emergent behavior	Performance validation	Tests combinations of device tier, network state, and adaptation policy because integrated systems fail in ways individual techniques do not expose.

Figure 0.157 condenses the same reasoning into three questions. The first asks how much adaptation the local change needs, so a light change stays on bias-only updates whatever the device. The second asks whether meeting the declared quality target requires a larger update and whether that candidate fits the measured device budget, and the third asks whether the updates are valuable across devices, which decides between local-only learning and federation. The cards distinguish lightweight and moderate adaptation from a larger update candidate; these labels describe adaptation demand rather than the Tier 1–3 device classes, and the device names on each card mark typical homes for a branch. In tier terms, Tier 3 devices sit in the lightweight branch, Tier 1 and Tier 2 phones in the moderate branch, and wall-powered edge servers as possible candidates for the

larger-update branch. A no answer at the second decision retains adapters because the larger update is unnecessary or does not fit; if that smaller update also misses the quality target, the policy must be revised before deployment. The voice-assistant policy of this section therefore spans the lightweight and moderate branches, with budget phones held to the lightweight branch by a memory limit that the flowchart does not draw. The deployable choice must still satisfy the measured working-set, runtime, and energy constraints while meeting the local quality target, and federation adds the compatibility and population-validation requirements just established.

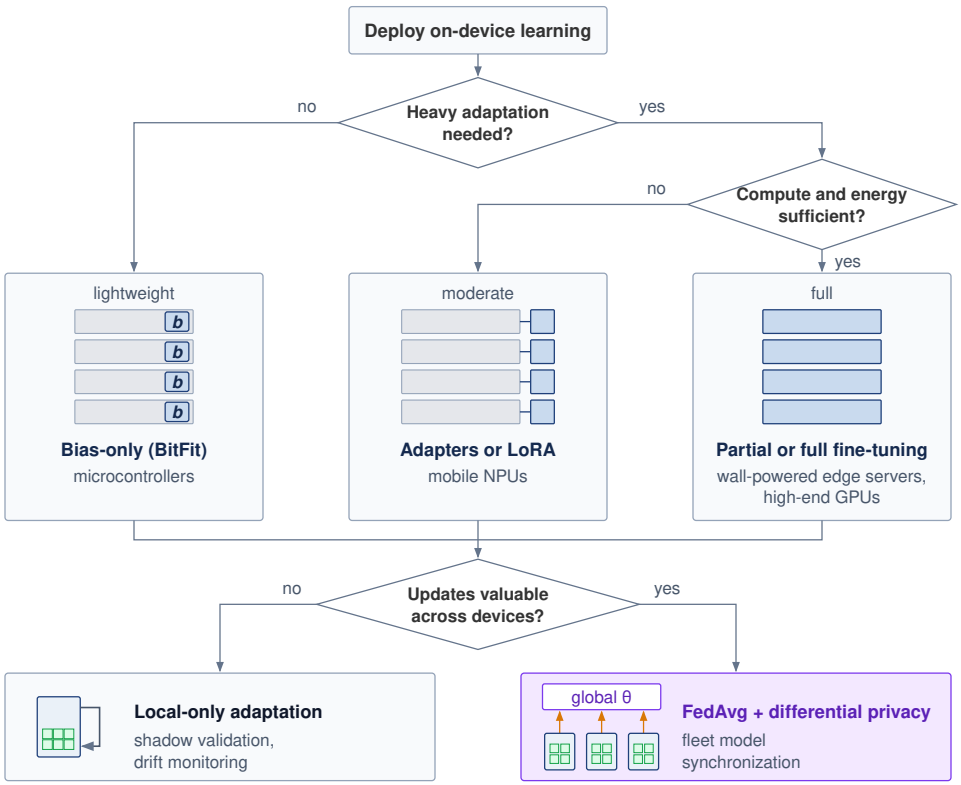


Figure 0.157: Tiered adaptation strategy: The flowchart routes a deployment by the adaptation the local change needs, then by whether a larger update is needed for the quality target and fits the measured device budget, then by whether updates are valuable across devices. Bias-only updates, adapters or LoRA, and partial or full fine-tuning are candidates for increasingly demanding changes on increasingly capable devices, subject to measured resource and quality budgets. The federated card names one common configuration; whether differential privacy is required depends on the deployment's threat model.

Checkpoint 11.4: Integrating the three pillars across device tiers

The chapter built three pillars for on-device learning: model adaptation (bias-only updates, adapters, full fine-tuning), data efficiency (few-shot, experience replay, compressed representations), and federated coordination (aggregation, client scheduling, secure aggregation). The decision framework in figure 0.157 maps each technique to device-class capability and coordination pathway. Test integration of the three pillars across the same deployment.

- ☐ Device-tier capability matching: For a fleet with microcontroller wake-word sensors, smartphones, and wall-powered edge servers, map each device class to the branch of figure 0.157 it can afford and state what fails when one technique is pushed across all three classes.

- ☐ Fairness in federated participation: When 90 percent of a federated round's compute comes from the top 10 percent of devices by capability, distinguish compute share from aggregation weight, identify the population-coverage risk, and select a scheduling or weighting control from the federated coordination pillar.
- ☐ Drift detection without labels: For a deployed personalization model with no ground-truth labels at the edge, describe how the device can detect enough local distribution shift to warrant a federated round using only signals available to the on-device inference path.
- ☐ Secure aggregation's participation floor: With a secure-aggregation floor of 100 devices and only 30 active devices in a given hour, determine the system response and identify which pillar must compensate.
- ☐ The auditable-autonomy trade-off: Separate the signals a central operator can observe from the device state that must remain hidden, and locate the catastrophic forgetting risk in that split.

The hardest edge-learning failures appear when model adaptation, data efficiency, and federated coordination interact rather than when any one pillar fails alone. While these adaptation, efficiency, and coordination techniques solve individual constraints, they also create interaction failures in real deployments: an adapter can fit memory yet overfit sparse local data, a replay buffer can stabilize learning yet leak sensitive history, and a federated round can improve the global model while amplifying participation bias. These limits provide critical context for deciding when on-device learning is appropriate and when a simpler strategy is safer.

A tiered policy is still a design. Centralized training can standardize hardware, curate data, and validate a model before release; this policy instead ships to millions of devices whose runtimes, update histories, and connectivity differ, and it keeps changing the model after release. Shipping it turns each tier assignment into a release artifact that must be versioned, validated without central labels, and rolled back when an adapted model degrades.

Production Integration

A prototype can fine-tune an adapter on one Raspberry Pi under controlled conditions. Deploying adaptation across 50 million devices requires release tests for different runtimes, resource budgets, and update histories. The production artifact must specify what each device may learn, how the result is validated, and how to restore a trusted state when adaptation fails.

MLOps integration challenges

Integrating on-device learning into machine learning operations (MLOps), the practices that version, deploy, monitor, and roll back production models, expands what a release must validate. Backbones, adapters, update policies, and local histories can change on different schedules across heterogeneous devices. Existing integration tests, version registries, and monitoring remain useful, but the released weights no longer fully describe the behavior that will run later. Operations must validate the permitted adaptation process and its recovery path as well as the initial model.

Figure 0.158 traces a five-stage edge learning lifecycle: centralized base-model pretraining (Stage 1), per-tier hardware compression (Stage 2), and staged over-the-air rollouts (Stage 3) originate in the cloud, while local adaptation executes on-device under the released update policy (Stage 4). Aggregate telemetry (Stage 5) supplies evidence for deciding whether cloud retraining is warranted. The telemetry needs its own privacy controls; aggregation alone does not establish a privacy guarantee, and a detected change must be distinguished from a quality regression before triggering a new training cycle.

Deployment pipeline transformations

A release that enables local learning includes an adaptation policy alongside model artifacts. For example, the voice-assistant policy of section 21 assigns bias-only updates to budget devices and different LoRA ranks to mid-tier and flagship phones. These are conditional assignments: model

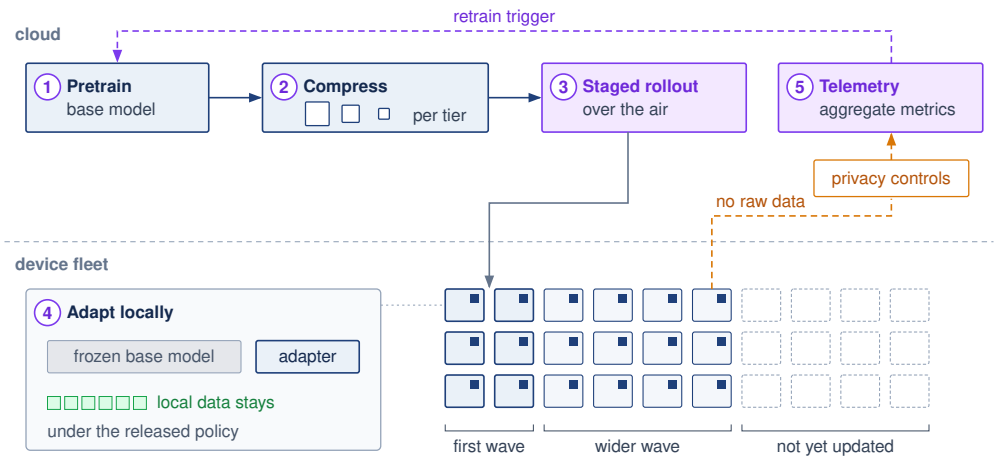


Figure 0.158: Edge MLOps lifecycle pipeline: The lifecycle links cloud pretraining and model compression with over-the-air deployment, on-device adaptation, and telemetry governed by explicit privacy controls. Keeping raw user data local does not by itself make the returned metrics private.

footprint, runtime support, and live admission tests determine whether a device may execute them. CI/CD must therefore validate the selection logic and permitted update behavior across device configurations in addition to the initial weights.

Versioning must preserve relationships among those artifacts. A local adapter belongs to a particular base model, training policy, and representation schema; a replay buffer may also depend on the encoder that produced its features. Federated round identifiers record which shared version produced a returned contribution. Updating the base therefore requires a decision to retain, migrate, retrain, or discard dependent local state. A newer version number alone does not establish compatibility, and rollback must restore a compatible set of artifacts rather than independently selecting older files.

Monitoring system evolution

Traditional monitoring practices aggregate metrics from centralized inference servers. On-device learning monitoring must operate within fundamentally different constraints that reshape how systems observe, measure, and respond to model behavior across distributed device populations.

Fleet telemetry for edge devices, including federated analytics that report aggregate or differentially private summaries, belongs to fleet operations and is developed in section 11. Adaptation adds local model states that the operator may not observe centrally. Monitoring must distinguish a change in behavior from a change in quality. Unlabeled signals can identify divergence, while deciding whether the adapted model is better requires validated outcome evidence.

Drift detection presents additional challenges without access to ground truth labels. While traditional monitoring compares model predictions against labeled validation sets maintained on centralized infrastructure, on-device systems must detect drift using only the indirect local signals available during deployment. Confidence calibration compares output probabilities with eventual outcomes whenever labels exist; without verified outcomes, confidence shifts merely flag an altered score distribution. In parallel, input distribution monitoring applies statistical tests to detect when runtime feature distributions diverge from pretraining data without requiring labels. Task performance proxies use implicit feedback such as user corrections or session abandonment, though only after validating the causal link to task quality and accounting for how model suggestions alter subsequent user behavior. Finally, shadow baseline comparisons run a frozen base model alongside the adapted one; section 22 develops why that comparison measures divergence rather than quality.

Cohort evaluation must separate contribution from benefit. A device that never trains can still download an improved shared model, but its users' data may be poorly represented among the completed updates. Participation metrics reveal that coverage gap; per-cohort quality measurements

establish whether it harms those users. A favorable global average cannot substitute for either measurement.

Continuous training orchestration

Continuous training on devices combines fleet-level round or release schedules with local admission decisions. A coordinator can request work, but a device trains only when its resource and availability tests pass. The orchestrator must therefore track eligible work and compatible state without assuming simultaneous execution across clients.

The state that matters is per-device. Devices often operate on different base model versions simultaneously, creating version skew that the aggregation protocol must handle without forcing all devices to maintain identical model states. State reconciliation becomes necessary when devices reconnect after extended offline periods, potentially days or weeks. A returned update must identify its base version so the coordinator can reject it, apply a stated staleness policy, or request new training from the current base. Accumulated personal adaptations, including per-device adapters and replay buffers, carry their own version tags and need not be merged into the shared model.

Resource-aware scheduling applies equation 0.54 at fleet scale. Federated rounds usually add idle, charging, and unmetered-network requirements on top of the local admission test, and a daily energy cap bounds cumulative learning cost across many admitted windows.

Admission also has a runtime half. Bias updates in early layers require backward computation through later operations; head-only adaptation confines that computation to the head. Either path competes with inference for compute, memory bandwidth, and thermal headroom on a shared SoC. Users judge the device by its quality of service (QoS), so the runtime gives inference priority and throttles or revokes a training window as foreground latency approaches its deadline. At the microcontroller extreme, measured update energy and available reserves determine how much learning a duty-cycled or harvested-power budget can support.[21]

When a representative central validation set is unavailable, federated evaluation can aggregate metrics computed on local held-out data. Update magnitudes provide an optimization diagnostic, but small changes can reflect stalled learning rather than acceptable quality. Participation audits must accompany outcome measurements so that apparent progress is not confined to an overrepresented cohort.

[21] **Microcontroller Power Budget**: In an illustrative operating point, 10 mW of active training for 10 seconds consumes 0.1 J. The number of updates that fit that session requires a measured time or energy per update. Battery lifetime additionally depends on usable capacity under the actual load, sleep power, radio activity, conversion losses, and duty cycle; nameplate capacity alone does not establish continuous-training lifetime.

Validation strategy adaptation

Traditional validation approaches assume access to held-out test sets and centralized evaluation infrastructure where model quality can be measured directly against known ground truth. On-device learning requires distributed validation that respects privacy and resource constraints while still providing reliable quality signals across heterogeneous device populations.

Shadow model evaluation maintains multiple model variants on each device and compares their behavior. Devices can run a frozen, last-known-good model beside a locally adapted version and measure prediction divergence, confidence shifts, latency, and resource use on the same input stream. Without labels or a validated outcome proxy, these comparisons detect change, not performance degradation: agreement can hide a shared error, and disagreement does not reveal which model is correct. A shadow comparison can therefore suspend an update for further evaluation, but automatic rollback requires labeled outcomes, a validated behavioral invariant, or a proxy whose relationship to task quality has been established for the deployment.

The comparator can therefore act only as a gate, never as a judge (figure 0.159). The live input stream is mirrored to the frozen baseline and the adapted candidate, and the comparator tracks their disagreement, confidence shift, and resource deltas. When disagreement exceeds a tolerance τ, the gate holds the candidate out of service; validated outcome evidence then either clears it or confirms the regression that justifies rollback.

Confidence-based gates provide another change signal when labels are unavailable. Even a calibrated model's confidence is interpretable only relative to the population and task on which calibration was measured. A drop can reflect distribution shift, ambiguity, or a changed score scale; stable confidence can coexist with overconfident errors. Systems may use confidence to trigger investigation or halt adaptation conservatively, but they should not call the adapted model worse without delayed labels, randomized evaluation, trusted user corrections, or another validated outcome signal.

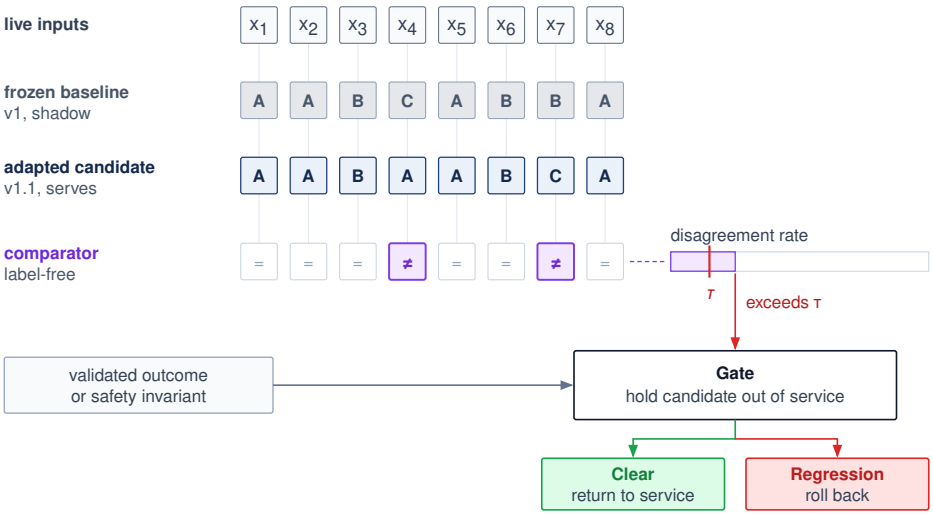


Figure 0.159: On-device shadow validation: A frozen baseline runs beside the active model. Their disagreement, confidence, latency, and resource deltas can flag a change without labels; a rollback decision still requires a validated outcome signal or safety invariant.

Federated A/B testing randomly assigns devices to treatment and control adaptation policies, balanced across device tiers, and compares privacy-preserving aggregates of adaptation success rate, time to improvement, and final quality. A strategy that wins is then released through the staged rollout process that fleet operations owns.

↪ Staged rollout, which widens a release's exposure only after each stage performs acceptably, is operationalized in section 8.

Aggregated validation signals are themselves releases. They need data minimization, secure aggregation where appropriate, a declared privacy unit, and privacy accounting across repeated rounds, and even then a population summary can miss a failure confined to a few users. Local gates and population summaries therefore provide different evidence, and evaluating an adaptive fleet requires measuring adaptation benefit, resource cost, and cohort coverage together.

Performance evaluation in dynamic environments

Static inference benchmarks characterize latency, throughput, energy efficiency, and accuracy for a fixed model. On-device learning requires additional measurements of adaptation quality and training efficiency, including how behavior changes over successive updates.

Beyond inference metrics, adaptive systems require measures that explain whether local learning is worth its resource cost. Sample efficiency measures the examples needed to reach a declared quality improvement under a fixed evaluation protocol. Gaining two percentage points from 100 local samples rather than 500 is an advantage when collecting useful samples is the binding constraint. Fewer samples need not mean faster or cheaper adaptation, because the more sample-efficient method may perform more work per example or retain more state; elapsed time, peak memory, and energy complete the comparison.

Device-envelope fit measures whether the improvement stays inside resource budgets. Memory-constrained convergence evaluates validation loss under a fixed RAM budget, such as "convergence within 256 KB training footprint," while energy-per-update measures millijoules consumed per gradient step; an illustrative background envelope of 500–1000 mW corresponds to 1.8–3.6 kJ/hour while active. Battery impact depends on duty cycle, usable battery capacity, foreground demand, and charging state. Time-to-adaptation extends the same idea to scheduling by measuring wall-clock time from new data to measurable improvement, including waiting for idleness, charging status, and thermal headroom rather than only raw accelerator throughput.

Personalization quality measures whether adaptation improves the intended behavior while retaining earlier capabilities. Per-user performance delta compares the adapted model with the

global baseline on user-specific holdout data; acceptance requires a declared improvement threshold and reported uncertainty. Privacy must be assessed under the specified disclosure policy and guarantee, rather than treated as an unspecified unit of exposure. Catastrophic forgetting measures degradation on the original task after adaptation. Its acceptable magnitude is application-specific, and accuracy changes must distinguish percentage points from relative percent.

When devices coordinate through the federated protocols examined in section 14, evaluation expands from the device to the population. Communication efficiency relates quality improvement to total transmitted bytes; compression gains depend on the model, optimizer, data heterogeneity, and encoding (Konečný et al. 2016; Kairouz and McMahan 2021). Comparisons should also report bytes and elapsed time to the same quality target. Straggler policies change both waiting time and the cohort that contributes. Participation count, cohort coverage, and outcome uncertainty must therefore be evaluated together, without assuming that one participation threshold determines stability across all policies.

A system that infers quickly but adapts slowly, or adapts efficiently but ends at poor accuracy, still fails its deployment, so these training metrics extend inference benchmarks rather than replace them.

These controls extend established MLOps practice to distributed, heterogeneous learning rather than replace it. They detect, hold, and reverse an adaptation that misbehaves; they do not remove the conditions that make adaptive fleets misbehave, from heterogeneous hardware and non-IID data to slow drift and adversarial clients.

Engineering Challenges and Mitigations

A billion-user predictive text model that learns from live keyboard inputs can be poisoned if a coordinated group of malicious users repeatedly types a specific slur and those local updates enter the global federated aggregate. The tiered integration policy bounds where each pillar may act, but it does not erase the failure surfaces that exposing an adapting model to the real world creates: device and data heterogeneity, non-IID distributions, silent failures, and the security and compliance risks of post-release adaptation. Observability and runtime resource contention already have their controls in section 21; the remainder of this section works through the other challenges and the mitigations each one demands, beginning with the variation that is present from the first rollout. The poisoned keyboard returns in section 22, once the quieter failure surfaces that let it go unnoticed are in view.

Device and data heterogeneity management

Heterogeneity is not background variation; it determines which devices can train, which can validate, and which can only contribute lightweight signals. The quantitative spread established in section 20 gives the resource envelope. Here the management problem is reproducibility: a single rollout must behave consistently across smartphones, wearables, IoT sensors, and microcontrollers whose hardware tiers, software stacks, network connectivity, and power availability differ sharply.

The hardware side is already handled by tier assignment, which gives Arm Cortex-M-class devices, mobile CPUs, and phones with dedicated NPUs their own model formats, training algorithms, validation duties, and update frequencies. Software heterogeneity is what makes even a correct assignment hard to reproduce. Devices may run different versions of operating systems, kernel-level drivers, and runtime libraries. Some environments support optimized ML runtimes like TensorFlow Lite Micro or ONNX Runtime Mobile, while others rely on custom inference stacks or restricted APIs. These discrepancies can lead to subtle inconsistencies in behavior, especially when models are compiled differently or when floating-point precision varies across platforms.

Connectivity and uptime add the scheduling dimension. Some devices are intermittently connected, plugged in only occasionally, or operating under strict bandwidth constraints. Others have continuous power and reliable networking, but still prioritize user-facing responsiveness over background learning. These differences complicate coordinated learning because update eligibility changes with the device's current state rather than with its hardware tier alone.

System fragmentation closes the loop by making reproducibility and testing a fleet property rather than a lab property. With such a wide range of execution environments, consistent model behavior is difficult to guarantee and failures are difficult to reproduce. Monitoring, validation, and rollback

therefore become more important, while also becoming harder to implement uniformly across the fleet.

The consequence is visible in a mobile-keyboard deployment. One device might provide 8 GB of RAM and a supported accelerator path, while another has 2 GB, a slower update path, and intermittent connectivity. These differences affect update duration and completion frequency. Adjusting schedules, model formats, and compression can broaden participation, but whether the improvement is equitable shows up only in outcome measurements across those device cohorts, because respecting each device's budget is not the same as delivering equal benefit.

Non-IID data distribution challenges

Non-IID data entered this chapter as a data constraint (section 7) and as client drift in aggregation (section 14). In production it becomes an evaluation and control problem, because no shuffle can restore the i.i.d. sample that centralized training assumes. Evaluation must cover the intended deployment population, whether through a representative central test set or distributed held-out data. Aggregate quality needs cohort-level checks because a population average can conceal a persistent local failure.

Operationally, non-IID data is a control problem as much as a statistical one. Clustered federated learning, personalization layers, stratified client sampling, per-cohort validation, importance weighting, and adaptive aggregation schemes provide partial controls, but the optimal mix depends on which population slices are underrepresented and which update conflicts are destabilizing the global model.

The mitigation should follow the observed failure rather than the generic label "non-IID." Table 0.144 maps four common observations to bounded decisions.

Table 0.144: Non-IID Control Decisions: Non-IID data is not one scalar condition. The system should connect measured cohort skew or update conflict to a specific control and validate the result against the declared population objective.

Observed evidence	Likely failure	Control to test	Release criterion
Cohort metrics diverge while aggregate quality improves	Population underrepresentation	Stratified sampling or capped importance weights	Worst-cohort metric improves without unacceptable aggregate loss
More local steps increase update disagreement and rounds to target	Client drift	Reduce local steps, add proximal regularization (FedProx), incorporate control variates (SCAFFOLD), or adapt the server optimizer	Wall-clock time and bytes to target decrease on representative cohorts
One global model leaves stable, distinct clusters underserved	Multimodal client objectives	Clustered models or shared backbone with local heads	Each cluster has enough support and outperforms the global baseline
Heavy users dominate the aggregate	Objective-weight mismatch	Replace example weighting with user weighting or cap per-user contribution	Evaluation matches the declared user- or example-level objective

Failure modes and prevention mechanisms

Heterogeneous devices and fragmented data also make failures hard to see. System failures in on-device learning emerge slowly, locally, and often without centralized evidence. Based on documented challenges in federated learning research (Kairouz and McMahan 2021) and known risks in adaptive systems, several categories of failures warrant careful consideration.

The most fundamental risk in on-device learning is unbounded adaptation drift, where continuous learning without constraints causes models to gradually diverge from their intended behavior. Consider a hypothetical keyboard prediction system that learns from all user inputs, including corrections. It might begin incorporating typos as valid suggestions, leading to progressively degraded predictions. This risk becomes acute in health monitoring applications where gradual changes in user baselines could be learned as "normal," potentially causing the system to miss important anomalies that would have been detected by a static model. The insidious nature of this drift is that it occurs slowly and locally, making detection difficult without proper monitoring infrastructure.

Beyond individual device drift, the participation bias described under client scheduling (section 14) can amplify itself over time. Users whose models improve less engage less, which further reduces their representation in later rounds (Wang et al. 2021). The failure is slow and invisible in aggregate metrics, which is why cohort-level evaluation must accompany every accepted round.

These systematic biases interact with data quality issues to create autocorrection feedback loops, particularly in text-based applications. When systems cannot distinguish between intended inputs and corrections, they may develop unexpected behaviors. Frequently corrected domain-specific terminology might be incorrectly learned as errors, leading to inappropriate suggestions in professional contexts. This problem compounds the drift issue: models adapt to individual quirks and can simultaneously reinforce their own mistakes when users accept autocorrections without realizing the system learns from those interactions.

These failure modes connect individual drift, population bias, and data-quality degradation. Federated-learning surveys identify heterogeneity, participation bias, privacy, and optimization instability as deployment risks (T. Li et al. 2020; Kairouz and McMahan 2021). In response, successful systems can bound adaptation, stratify sampling, distinguish corrections from reliable labels, and use shadow comparisons to identify changes that warrant validated evaluation.

Production deployment risk assessment

The deployment of adaptive models on edge devices introduces challenges that extend beyond technical feasibility. In domains where compliance, auditability, and regulatory approval are necessary, including healthcare, finance, and safety-important systems, on-device learning poses a core tension between system autonomy and control.

A centrally managed training pipeline can record a common release's data, checkpoints, and evaluation results. On-device learning distributes the update history across local models and observations that may remain private. Traceability therefore depends on what the adaptation protocol records: the base version, permitted update policy, validation result, and available recovery point. The operator can retain control over those boundaries without collecting every local training example.

This autonomy creates a validation gap. Evidence collected for the released model does not automatically establish the behavior of each adapted version. When inputs and update histories remain local, the deployment needs a defined set of local acceptance checks and a way to report failures within its privacy constraints. An adapted model can leave its validated operating range before aggregate monitoring detects the change, so the update policy must specify when to reject a candidate or restore the trusted baseline.

Delayed detection complicates recovery, especially while a device is offline. A trusted baseline must remain available independently of the adapted candidate, and the restore policy must account for compatible preprocessing, adapters, and runtime state. Restoring weights alone may leave the faulty update trigger or contaminated replay data in place. Recovery therefore includes deciding which adaptation state to retain, quarantine, or reset before learning resumes.

In addition to compliance challenges, on-device learning introduces new security vulnerabilities. Because model adaptation occurs locally and relies on device-specific, potentially untrusted data streams, adversaries may attempt to manipulate the learning process by tampering with stored data, such as replay buffers, or by injecting poisoned examples during adaptation, to degrade model performance or introduce vulnerabilities. Any locally stored adaptation data, such as feature embeddings or few-shot examples, must be secured against unauthorized access to prevent unintended information leakage.

Maintaining model integrity over time is particularly difficult in decentralized settings, where central monitoring and validation are limited. Autonomous updates could, without external visibility, cause models to drift into unsafe or biased states. These risks are compounded by compliance obligations such as the GDPR's right to erasure: if user data subtly influences a model through adaptation, tracking and reversing that influence becomes complex.

Every recovery path in this section assumes that something safe keeps operating while an adapted model is suspect or being restored. When perception and control loops rely on local models, that something is often a human supervisor, and a human fallback is not a safety mechanism unless

the fallback itself is engineered as part of the system. A fatal 2016 crash under driver-assistance automation shows what happens when it is assumed instead.

War Story 11.1: The edge model with a human fallback (2016)

Context: A 2015 Tesla Model S was using Traffic-Aware Cruise Control and Autosteer when it collided with a crossing semitrailer near Williston, Florida, on May 7, 2016 (National Transportation Safety Board 2017). The driver remained responsible for supervision.

Mechanism: The NTSB attributed the crash to the truck driver's failure to yield and the car driver's inattention associated with overreliance on automation. The automation's operational design contributed by permitting prolonged disengagement and use inconsistent with the manufacturer's guidance.

Impact: The car passed beneath the semitrailer, and its driver died.

Fix: The NTSB issued safety recommendations addressing automation safeguards and oversight. For an edge-system designer, the corresponding requirement is to make operational limits and the supervision contract enforceable rather than assume a human will recover from every local failure.

Systems lesson: Fast local execution is insufficient if the combined sensing, automation, and human-supervision system lacks a reliable fallback. The vehicle did not learn on the device, yet its lesson applies directly to edge learning. A fallback contract is validated against fixed model behavior, and local adaptation changes that behavior after release, so every accepted update must leave the operational limits and the validated recovery path intact.

The immediate design obligation is to treat model state, replay buffers, and adaptation triggers as security-sensitive assets. Edge learning cannot rely on central inspection after the fact; it needs local integrity checks, protected storage, and conservative update policies before adaptation begins.

Privacy regulations also interact with on-device learning in nontrivial ways. While local adaptation can reduce the need to transmit sensitive data, it may still require storage and processing of personal information, including sensor traces or behavioral logs, on the device itself. These privacy considerations require careful attention to security frameworks and regulatory compliance. Depending on jurisdiction, this may invoke additional requirements for data retention, user consent, and auditability. Systems must be designed to satisfy these requirements without compromising adaptation effectiveness, which often involves encrypting stored data, enforcing retention limits, or implementing user-controlled reset mechanisms.

Distributed adaptation also complicates debugging and failure analysis (Kairouz and McMahan 2021). A deployment must assign responsibility for detecting regressions, suspending learning, restoring a baseline, and investigating failures before release. Local data drift, poor initialization, and faulty safeguards can produce similar symptoms, so the version and validation records must support diagnosis within the permitted disclosure limits. Autonomous execution does not remove the need for an accountable recovery process.

Addressing these deployment and compliance risks requires tooling, protocols, and design practices that support auditable autonomy, the ability of a system to adapt in place while still satisfying external requirements for traceability, reproducibility, and user protection. For any deployment that permits post-release adaptation, these challenges are central to both system architecture and governance frameworks.

Engineering challenge synthesis

The deployment decision must treat these on-device learning challenges as coupled constraints. Hardware variation changes who can participate; participation changes the observed data distribution; limited feedback weakens validation; resource contention restricts when safeguards can run; and postdeployment adaptation complicates audit and rollback. Table 0.145 maps each root cause to the system obligation it creates.

Table 0.145: On-Device Learning Challenges: System heterogeneity, non-IID data, and limited resources introduce unique challenges for deploying and adapting machine learning models on edge devices, impacting portability, stability, and governance. The table details root causes of these challenges and their system-level implications, highlighting trade-offs between model performance and resource constraints.

Challenge	Root Cause	System-Level Implications
System Heterogeneity	Diverse hardware, software, and toolchains	Limits portability; requires platform-specific tuning
Non-IID and Fragmented Data	Localized, user-specific data distributions	Hinders generalization; increases risk of drift
Limited Observability and Feedback	No centralized testing or logging	Makes update validation and debugging difficult
Resource Contention and Scheduling	Competing demands for memory, compute, and battery	Requires dynamic scheduling and budget-aware learning
Deployment and Compliance Risk	Learning continues postdeployment	Complicates model versioning, auditing, and rollback

Foundations for robust AI systems

Poisoning, inversion, drift, and validation failures also occur in centralized ML systems, but local adaptation makes them harder to observe, attribute, and roll back across a heterogeneous fleet. The poisoned keyboard that opened this section shows why. The malicious updates arrive as ordinary contributions from authenticated devices, secure aggregation hides each one from inspection, and the shift they cause can stay below what a population average reveals. A faulty or malicious client can submit a poisoned update,[22] an update can disclose information despite data locality, and local distribution shift can remain invisible in population averages.

The edge architecture must therefore bind adaptation range, update integrity, privacy accounting, robust aggregation, validation evidence, and rollback into one control path. These mechanisms do not substitute for one another: secure aggregation hides individual contributions, robust statistics limit some malicious influence, and validated outcomes establish whether behavior improved.

Fallacies and Pitfalls

A team ports a cloud-trained recommendation model to a mobile app and assumes that successful inference also permits local fine-tuning. The first update can exceed the app's memory allowance as gradients and saved activations accumulate; a configuration that fits can still consume more energy than the background policy permits. These distinct failures motivate the following fallacies and pitfalls:

Fallacy: *On-device learning provides the same adaptation capabilities as cloud-based training.*

Teams expect local learning to match centralized training's model improvements, ignoring fundamental resource constraints. Full-model training adds activations, gradients, and optimizer state to the weights; the configurations in section 5 require 4–12× the inference weights alone, depending on the model and execution schedule. Local datasets are typically small, biased, and nonrepresentative, while compute budgets remain orders of magnitude below cloud GPUs. A smartphone with 8 GB RAM and a sustained power budget of 2–3 W cannot replicate the adaptation achieved by data center systems with terabytes of memory and kilowatts of power. Effective on-device learning requires designing adaptation strategies that provide meaningful improvements within these constraints rather than attempting to replicate cloud-scale learning capabilities.

Pitfall: *Assuming federated learning automatically preserves privacy without additional safeguards.*

Practitioners believe that keeping data on local devices inherently provides privacy protection, ignoring what can be inferred from model updates. Gradient and parameter updates leak significant information about local training data through various inference attacks, while device participation patterns reveal sensitive information about users and activities. Stronger privacy preservation requires additional mechanisms: differential privacy provides a tunable probabilistic bound on how much the output distribution can change because of one individual's data, while secure aggregation protocols prevent parameter inspection during server-side coordination through zero-sum crypto-

[22] **Byzantine Fault Tolerance in Federated Learning (FL)**: Named after the Byzantine Generals Problem (Lamport et al. 1982), this property enables useful aggregation despite malicious or faulty participants; Krum's original analysis requires conditions such as $2f + 2 < n$ (Blanchard et al. 2017), while coordinate-wise median and trimmed-mean aggregators use different robustness assumptions; the tolerated Byzantine fraction depends on the aggregation rule, dimensionality, and statistical model. These defenses can increase communication and compute overhead because they require extra validation, robust statistics, or redundant participation. That overhead is the price of trust in open federated systems where any client device could be compromised.

↪ Data poisoning as a threat model, including poisoned contributions to federated training, is developed in section 8.

graphic masking (figure 0.156) (Bonawitz et al. 2017). Data locality alone is insufficient for privacy protection.

Fallacy: *Resource-constrained adaptation always produces better personalized models than generic models.*

This belief assumes that any local adaptation is beneficial regardless of the quality or quantity of local data available. On-device learning with insufficient, noisy, or biased local data can actually degrade model performance compared to well-trained generic models (section 13). Small datasets may not provide enough signal for meaningful learning, while adaptation to local noise can harm generalization. Effective on-device learning systems must include mechanisms to detect when local adaptation is beneficial and fall back to generic models when local data is inadequate for reliable learning.

Pitfall: *Ignoring heterogeneity across different device types and capabilities.*

Teams design on-device learning systems assuming uniform hardware capabilities across deployment devices. Real-world deployments span diverse hardware with varying computational power, memory capacity, energy constraints, and networking capabilities. Available memory alone spans roughly 65,536× between 256 KB microcontroller SRAM and 16 GB flagship phones (section 20), and supported operators and power envelopes differ as sharply. Clock frequency or peak ratings from unrelated architectures do not convert into a common training-throughput ratio, so the comparison needs measured update cost under matched tasks and declared operating states. A learning algorithm that works well on high-end smartphones may fail catastrophically on resource-constrained IoT devices. Federated learning algorithms must account for heterogeneous clients and availability (Kairouz and McMahan 2021; Bonawitz et al. 2019), using selective participation, compression, and tiered aggregation strategies when devices have substantially different measured update costs.

Pitfall: *Underestimating the complexity of coordinating learning across distributed edge systems.*

Many teams focus on individual device optimization and treat coordination as a stateless averaging server, as if local updates arrived regularly from comparable devices. At fleet scale the aggregator is one component of a control loop that must know which devices are eligible, which model version each holds, and whether a returned update is safe to promote; a production system selects about 130 percent of its target cohort (Bonawitz et al. 2019) because a substantial fraction of selected devices never report. Edge systems orchestration (section 19) must handle intermittent connectivity, varying power states, different time zones, and unpredictable device availability patterns that create complex scheduling and synchronization challenges. Device clustering, federated rounds coordination, model versioning across diverse deployment contexts, and handling partial participation from unreliable devices require sophisticated infrastructure beyond simple aggregation servers. Additionally, real-world edge deployments involve multiple stakeholders with different incentives, security requirements, and operational procedures that must be balanced against learning objectives. Effective edge learning systems require robust orchestration frameworks that can maintain system coherence despite constant device churn, network partitions, and operational disruptions.

Summary

Edge intelligence extends the fleet to devices whose memory, power, and availability the operator cannot standardize. Sensors, microcontrollers, and smartphones contribute under different resource budgets, so a locally feasible learning policy also determines which parts of the population can participate. Archetype C (Federated MobileNet) makes this concrete. Local adaptation spends the compute axis of C^3 inside each phone's power and memory envelope, adapters and update compression shrink the wide-area transfer in the Fleet Law's communication term, and over-selection with round deadlines caps its synchronization term at the price of which devices are represented.

Three levers make learning possible under those constraints, and each acts on a different part of the same budget. Model adaptation shrinks trainable state and, when placed well, the saved activations that dominate peak memory. Data efficiency raises the signal extracted from each scarce example and protects earlier behavior with bounded replay. Federated coordination lets compatible updates from many devices improve one shared model without centralizing raw data. None of the three moves the device's thermal, energy, or bandwidth limits; each decides how much useful learning fits inside them.

At runtime, those realities become an admission decision rather than a general preference to run "when idle." Background adaptation may execute only when its predicted energy and sustained power fit the current device slack and profiled worst-case interference preserves the foreground deadline. Because charging status does not eliminate heat or contention, every admitted window remains revocable as the device state changes.

Local execution can meet latency, data-locality, and offline requirements, but those requirements alone do not justify local training. Adaptation must improve a validated outcome within its resource budget; federation must then preserve update compatibility, control disclosure, and evaluate the population actually represented by completed updates.

Key Takeaways: Physics sets the budget

- **The edge reverses the fleet**: Data centers fight to keep many accelerators busy; edge devices fight to learn under batteries, kilobytes, thermal throttling (the device-scale counterpart of principle 4), and intermittent links. The same Compute, Communication, Coordination constraints must account for device eligibility as well as aggregate throughput.
- **Bandwidth beats advertised TOPS**: One update step of the chapter's 10M-parameter example moves about 800 MB, 20× the weight bytes read by an inference, across a phone memory interface roughly 44–65× narrower than data-center HBM, the same ceiling that bounds memory-bound decode (principle 15). Quantization and locality help, but measured update speed depends on bytes moved and sustained bandwidth.
- **Learning multiplies the footprint**: Full-model backpropagation can require 4–12× the memory occupied by inference weights alone in the chapter's configurations, depending on optimizer state, activations, and precision. Reducing trainable state helps only when the frozen model and remaining execution state also fit.
- **Background learning is conditional work**: Admit an adaptation window only when equation 0.54 preserves energy, thermal, and foreground-latency budgets under worst-case measured interference. Charging alone is not sufficient.
- **Admission selects the population**: Passing the admission test correlates with hardware, charging habits, and connectivity, so the shared model learns from the admitted devices rather than the deployed fleet (principle 18). Per-cohort participation and quality must be measured and corrected; loosening admission spends the budgets it exists to protect.
- **Adaptation needs three levers**: Bias-only updates, LoRA, sparse layers, few-shot data reuse, and experience replay each spend different memory, energy, and privacy budgets. Federated coordination adds population learning only when protocols preserve compatible shared state, control disclosure, and handle non-IID data and dropout.
- **Heterogeneity is normal operation**: Edge fleets span microcontrollers, phones, gateways, and NPUs with uneven availability and performance. Federated systems must treat stragglers, participation bias, rollback, and privacy-preserving observability as protocol design constraints, not deployment cleanup.

An edge learning policy determines both the work a device may perform and the population the fleet learns from. Tightening a resource budget can protect a user's foreground experience while excluding that user's data from shared improvement. The useful design target is therefore validated adaptation across the intended population, with local feasibility and fleet representation evaluated together.


What's Next: From devices to operations

Once a model continues learning after release, the operator ships an adaptation policy rather than a static set of weights: an adaptation rule versioned against a base model, admitted device

by device, validated through distributed outcome evidence when central labels are unavailable, and judged by which cohorts its completed updates represent. Production organizations run hundreds of models at once, many sharing features, data pipelines, and release machinery, so a change made for one can silently break another. Keeping that portfolio versioned, observable, and recoverable is a coordination problem in its own right.

↪ The control plane that versions, releases, monitors, and rolls back a portfolio of models, adaptive edge policies included, is developed in chapter 23.

ML Operations at Scale

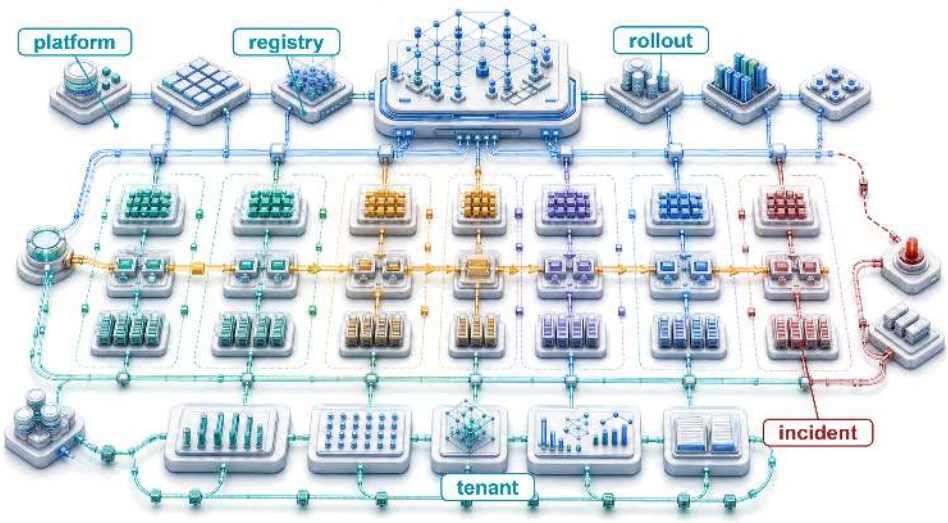

Purpose

Why do practices that work for managing one model collapse when organizations deploy hundreds?

One model is a project. A hundred models form a system of systems whose dependencies and failures cannot be managed one model at a time. A data-pipeline change may affect models built by several teams, while a deployment failure may require coordinated rollbacks across interconnected services. The team making a change may not know every consumer, and the team seeing a regression may not control its cause. Practices that work when one engineer knows the entire system become unreliable when ownership, data, and release schedules are distributed. Adding faster machines does not resolve that uncertainty. A fleet can have spare compute capacity and still be unable to ship safely because nobody can establish which models depend on a changed input or who may authorize recovery. Shared infrastructure can reduce this repeated coordination, but it also concentrates dependencies and introduces its own operating cost. Centralizing every decision can turn the platform team into a bottleneck; leaving every team to improvise makes compatibility and accountability difficult to sustain. The engineering task is to make routine changes repeatable while preserving evidence about their effects and clear authority over their consequences. Growth becomes manageable when adding a model does not require rebuilding the surrounding operational process, yet its owners remain responsible for acceptable behavior. In C^3 terms, fleet operations makes coordination a designed system constraint alongside the compute and communication resources that models consume.

Learning Objectives

- Quantify technical debt using deployment velocity, incident rates, toil, and response-time metrics
- Design registries, release gates, and evaluation contracts that preserve lineage, dependency safety, and rollback confidence
- Design feature-store operations that manage freshness, ownership, compatibility, and training-serving skew
- Size production experiments whose sample size, stopping rule, and interference assumptions bound user exposure
- Diagnose production incidents using monitoring hierarchies and multidimensional reliability budgets across the fleet
- Calculate platform return, fleet utilization, and lifecycle total cost to decide where shared capacity pays
- Evaluate platform organization and lifecycle choices using adoption, versioning, and retirement evidence

Why a Model Fleet Needs a Control Plane

Consider a team of five engineers maintaining a single recommendation model. When the model drifts, they manually retrain it. When the API latency spikes, they manually scale the instances. Now, scale that same team to support five hundred models across dozens of product surfaces. The same engineering team cannot sustain that growth by repeating every intervention manually. Shared controls must preserve human accountability while automating routine coordination. The fleet becomes the unit of capacity planning and investment; versioned model and feature state makes changes reviewable, release gates bound their exposure, and monitoring and incident review feed production evidence back into those controls.

In the fleet stack of figure 0.15, the Operations row sits directly above Runtime and Serving and directly below Assurance, the first row of the Governance band. It belongs to the Serving band because it operates models that are already deployed, whereas the Reliability and Control row two rows lower schedules and recovers individual jobs. The Operations row acts as the fleet's control plane, the dashboard, steering, and maintenance system that keeps physical infrastructure, training systems, serving paths, edge deployments, and governance rules from drifting apart. Once models span data centers, serving platforms, and heterogeneous edge fleets of adaptive devices, reliability depends less on any single model and more on the operational machinery that keeps the whole fleet observable, coordinated, and recoverable. Adaptive edge fleets sharpen the requirement, because there the operator ships a versioned adaptation policy rather than fixed weights, and that policy stays safe only while telemetry keeps it observable and rollback keeps it recoverable. This chapter builds those controls as shared infrastructure for every model the fleet runs.

↩ Adaptive edge device populations and the constraints that shape them are established in chapter 16.

Shared dependencies make local operational choices fleet-wide concerns. An upstream data change can affect several models, concurrent deployments can contend for the same capacity, and independent alerts can obscure a common failure. Training and serving also compete for expensive infrastructure whose idle capacity still incurs cost. The platform must coordinate those interactions while preserving each team's responsibility for model behavior.

The organizational response is platform thinking. Rather than treating each model as an independent system with its own infrastructure, platforms provide shared services that amortize operational costs across the entire model portfolio. Feature stores[1] share feature definitions and values across models. Their contract is that training and serving use compatible feature meanings, with historical training values restricted to information available at the prediction time. Unified deployment pipelines ensure consistent rollout practices. Centralized monitoring aggregates signals across models to detect system-wide issues and enable capacity planning. The challenge is designing, implementing, and operating these platforms so they scale with the portfolio rather than against it. This is the C^3 coordination axis at its widest. The Fleet Law charges synchronization within one

[1] **Feature Store**: A centralized repository that manages the computation, storage, and serving of ML features. The core systems problem it solves is training-serving skew; section 4 develops that failure mode and the platform invariant that contains it.

distributed step, while fleet operations pays the coordination cost of every release, rollback, and shared dependency across the whole portfolio.

The N-Models Problem

The five engineers of the opening example do not acquire five hundred models at once, and the path from one model to many explains where the control plane becomes necessary. A technology organization often follows a predictable pattern as it adopts machine learning. The first model might be a homepage recommender, followed by search ranking, fraud detection, and content moderation. Each team initially operates independently, developing its own pipelines for data processing, training, validation, and deployment. With few models, this independence lets each team optimize for its requirements.

As the number of models grows, shared dependencies can create **operational complexity** faster than model count alone suggests. Dense interactions can produce superlinear coordination work; strong ownership and interface boundaries can limit that growth. Table 0.146 qualitatively maps the resulting challenges across six operational dimensions.

Table 0.146: Operational complexity growth at scale: Illustrative challenges across 1, 10, and 100 models. Even one model requires deployment coordination and depends on its data pipeline. Shared dependencies can make releases a fleet-wide critical path, dashboards require aggregation, and debugging span team boundaries; actual complexity depends on coupling and ownership.

Operational Aspect	Single Model	10 Models	100 Models
Deployment coordination	Team-local	Ad hoc	Critical path
Shared data dependencies	Within pipeline	Some overlap	Dense graph
Monitoring dashboards	1	10	Unmanageable
On-call rotation scope	Single team	Multiple teams	Organization-wide
Infrastructure utilization	Often idle	Moderate sharing	Efficiency critical
Debugging complexity	Local	Cross-team	Distributed tracing required

Napkin Math 12.1: The sharing dividend


Problem: A platform team manages a fleet of 100 GPUs. Under dedicated per-team quotas, average idle time is 70 percent. Moving to a multi-tenant ML platform that shares resources across teams and uses idle training GPUs for inference reduces aggregate idle time to 30 percent. What hardware cost does the platform save?

Math: For a fixed active workload, required hardware is inverse to utilization, while useful work per GPU is proportional to utilization. The problem states idle time, so the calculation first converts it to utilization.

1. **Utilization**: Utilization is one minus the idle fraction, so dedicated quotas run at 0.30 and the shared platform at 0.70.
2. **Efficiency Gain**: 0.70 (shared utilization) / 0.30 (dedicated utilization) = 2.33× more work per GPU.
3. **Hardware Reduction**: $1 - (0.30 / 0.70) = 57.1$ percent.
4. **Annual Savings**: 57 percent of \$1.75M budget ≈ \$1,000,000/year.

Systems insight: Multi-tenancy acts as an infrastructure multiplier. Under the assumed utilization improvement, breaking down resource silos reduces required hardware by 57 percent for the same workload; with the same hardware budget, it raises useful work from 30 to 70 active GPU-equivalents. In the machine learning fleet, *statistical multiplexing* pools demands whose peaks do not fully coincide, allowing teams to share capacity that separate allocations would leave idle. Realizing this sharing dividend requires enough headroom for

coincident peaks and failures, together with isolation that preserves each workload's service contract.



One upstream embedding update can degrade every dependent model.

The fundamental insight is that per-model validation does not establish compatibility across a dependency chain. When Model A depends on features computed by Pipeline B, which uses embeddings from Model C, a change to one component can affect its downstream consumers. A seemingly innocuous update to Model C's embedding layer might shift the feature distributions that Model A depends upon, degrading its performance even though Model A itself has not changed. This cascading interdependence makes the interfaces between models part of the operational contract.

> **Systems Perspective 12.1: The complexity explosion**
>
> As a fleet accumulates shared dependencies, system-level coordination can become the binding problem. A new model adds its own operating cost, but it can also change feature pipelines, release schedules, and contention for infrastructure used by existing models. The marginal cost therefore depends on how the new model couples to the portfolio rather than simply on how many models the fleet already contains.

Figure 0.160 sketches operational load across production model counts on a logarithmic scale, with one assumed growth shape per source of work. Alerts grow linearly because each model brings its own fixed set of monitored metrics. The sketch assigns deployment coordination an intermediate $N_{\text{models}} \log N_{\text{models}}$ growth shape; this is an illustrative assumption rather than a release-scheduling complexity bound. A dense dependency graph motivates the quadratic conflict curve because N_{models} models form roughly $N_{\text{models}}^2/2$ possible pairs; the recorded dependencies determine which pairs can actually conflict. Under these shapes the total crosses the team-capacity ceiling near 50 models. The shapes are a sketch, not measurements, so the crossing marks where repeated work outgrows a team rather than a threshold a real organization can read off the plot; measured dependency density, engineering effort, and remediation cost decide when platform engineering pays.

Once operational load exceeds team capacity, continued portfolio growth requires reducing repeated work, simplifying dependencies, or expanding the team's capacity. Shared platform engineering addresses the repeated work of deploying, monitoring, and debugging models. Its economic case begins with identifying which of those responsibilities can be shared and which must remain with model owners.

Single-model vs. platform operations at scale

The operational requirements for multi-model platforms differ qualitatively from single-model operations. Table 0.147 contrasts these approaches across six dimensions, revealing that platform-scale deployment demands dependency-aware scheduling, monitoring must shift from *model-centric* to *system-centric* aggregation, and governance evolves from *team-specific* policies to *organization-wide* standards.

Table 0.147: Single-model vs. platform operations: Six qualitative differences that emerge when scaling from one model to 100+. Deployment shifts from team-controlled rollouts to dependency-aware platform coordination, monitoring evolves from model-centric dashboards to system-level aggregation, and governance expands from team-specific policies to organization-wide automated enforcement.

Aspect	Single-Model Operations	Multi-Model Platform (100+)
Deployment	Simple rollout, team-controlled	Dependency-aware scheduling, platform-coordinated
Monitoring	Model-centric metrics	System-centric with model aggregation
Debugging	Local to model and data	Distributed tracing across model boundaries
Resource Management	Dedicated allocation	Shared pools with multi-tenant isolation
Governance	Team-specific policies	Organization-wide standards and automation

Aspect	Single-Model Operations	Multi-Model Platform (100+)
Organization	Single team ownership	Platform team plus consumer teams

The qualitative gap is most visible in deployment operations. A model release moves from validation to a canary (a small slice of live traffic served by the candidate) and then to wider exposure as evidence accumulates. Platform-scale deployment must also preserve compatibility with dependent models at every intermediate state. Compatible interfaces can permit independent updates; a changed feature representation may instead require a coordinated migration. Rollback follows the same dependency contract, because reverting one model may require restoring compatible features or dependent models. Concurrent deployments also compete for GPU memory and network bandwidth, making resource headroom part of the release decision.

For recommendation systems, this complexity appears along the request path. Candidate retrieval and ranking models execute alongside diversity filters and business rule layers, sometimes in sequence and sometimes in parallel. Updating a component requires identifying which consumers depend on its outputs and testing whether the complete path still meets its quality and latency targets.

Monitoring requirements evolve similarly. Model-specific metrics such as prediction accuracy, inference latency, and data drift remain necessary, but separate dashboards do not expose shared causes by themselves. When many models depend on the same feature pipeline, a single upstream failure can appear as many unrelated model alerts. Responders need a portfolio view that connects those symptoms before investigating individual models.

Platform monitoring must therefore aggregate across models while maintaining the ability to drill down into specifics. This requires hierarchical metrics that run from business outcomes through portfolio and model signals down to infrastructure health, the structure section 11 develops. The same contrast between one model and a portfolio also changes what each release must prove, because workloads differ in how fast they change and how much harm a bad version can do.

Model-type operations diversity

Different deployment contexts impose different operational contracts. The archetype taxonomy in section 11 helps interpret the illustrative policies in table 0.148. Release frequency follows data change and validation cost; rollback targets follow the harm and reversibility of a bad release. Model family alone determines neither. Large language models (LLMs) may need long observation windows while still requiring rapid traffic rollback, and fraud detection needs fast containment even when a new model takes longer to validate.

Table 0.148: Illustrative release policies: Example cadences and rollback targets for several deployment contexts. These are planning assumptions, not requirements implied by architecture. Rollback means routing to a validated version; the observation period needed to approve a new version can be much longer.

Model Type	Example Update Cadence	Deployment Pattern	Primary Risk	Rollback Speed
Archetype A (GPT-4/Llama-3)	Monthly to quarterly	Staged, careful	Quality regression, safety	Minutes with standby capacity
Archetype B (DLRM at Scale)	Daily to weekly	Shadow, interleaving	Engagement drop	Minutes
Fraud Detection	Hourly to daily	Rapid with instant rollback	False negatives	Seconds
Vision (Classification)	Weekly to monthly	Canary	Accuracy regression	Minutes
Search Ranking	Daily	A/B with holdout	Relevance degradation	Minutes

The table mixes two lighthouse archetypes with ordinary model families because release policy follows the workload, not the label. Archetype C (Federated MobileNet) enters with the edge fleet in section 11. The deployment patterns name release controls developed later in the chapter.

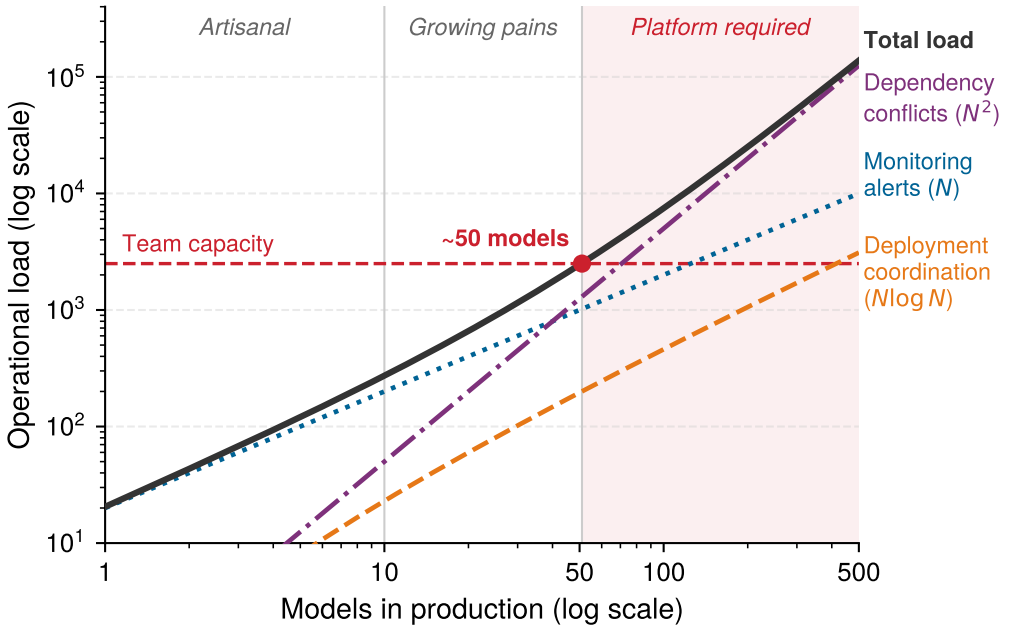


Figure 0.160: The N-models complexity explosion: The curves show monitoring alerts growing linearly with model count, deployment coordination growing as $\mathcal{O}(N_{\text{models}} \log N_{\text{models}})$, and dependency conflicts growing quadratically as models share features and data sources. Under these assumed shapes, the total operational load crosses team capacity around 50 models, sketching the transition from artisanal model management to platform-required operations.

Shadow deployment runs the candidate on copied traffic without returning its outputs to users, and interleaving merges two rankers' results into one list so each user compares them directly (section 9). The table separates release cadence from containment speed. Large-model evaluation can require extended shadow deployment, human review, and staged exposure because a quality regression may be subtle. Keeping the previous model warm can nevertheless permit fast traffic rollback. The cost of that standby capacity belongs in the release policy rather than being hidden behind an hours-long rollback assumption.

The cost of regression becomes concrete when one model must preserve every capability at once.

Lighthouse 12.1: Archetype A (GPT-4/Llama-3): Cost of regression


Context: Archetype A (GPT-4/Llama-3) represents ultra-large generalist models (70B–405B parameters) serving millions of concurrent requests across diverse tasks. Released models span that whole range; where this chapter needs one concrete instance, as in the fleet cost examples of section 19, it uses the volume's reference instance, the GPT-3-class dense model of section 11.

Mechanism: The "Generalist's Dilemma" occurs when targeted fine-tuning (e.g., optimizing Python code generation) causes catastrophic forgetting in unmonitored domains (e.g., creative writing or reasoning). Evaluating candidate weights across 10,000+ benchmark prompts adds the iron law's compute time, $O/(R_{\text{peak}} \cdot \eta_{\text{hw}})$ for the evaluation's total operations O, to every release. Prompt count alone does not determine that time or its GPU-hours; input and output lengths and model size set O, and achieved throughput sets η_{hw}.

Impact: A silent degradation in secondary metrics forces a costly emergency rollback, and the warm standby held for that rollback competes with the serving capacity needed to hold the per-request latency target $L_{\text{lat,SLO}}$.

Systems lesson: Release gates for large generalist LLMs must combine broad capability benchmarks (such as Massive Multitask Language Understanding (MMLU) and HumanEval) with policy-based safety checks. Their evaluation time and accelerator-hours belong in the deployment schedule and budget rather than being treated as a zero-cost pre-flight check.

Recommendation systems face continuously changing user preferences and content inventories (Steck et al. 2021; Gomez-Uribe and Hunt 2015). Their operational urgency therefore includes feature freshness latency, the delay between a user action and its reflection in the model's inputs. Stale features can degrade relevance even when serving remains fast and available.



Streaming closes the freshness lag that batch leaves open.

Example 12.1: Feature freshness latency

Scenario: A real-time recommendation service processes user interaction logs to compute feature vectors during an active user session.

Diagnosis: Suppose the daily batch pipeline delivers relevant interactions with freshness latency $T_{\text{freshness}} \approx 12$–$24$ h. Those features cannot reflect activity from the current session, even if other recommendation inputs change. A streaming pipeline (Kafka/Flink) operating at $T_{\text{freshness}} \approx 1$–$5$ s can incorporate that activity sooner; whether it updates the vector before the next user action depends on the session's timing.

Systems lesson: Feature freshness latency is a physical system metric ($T_{\text{freshness}} = t - T_{\text{event}}$). Reducing freshness latency can improve decisions that depend on recent behavior, but engagement lift must be measured in an experiment. The business benefit must justify the additional streaming capacity and operational complexity.

Recommendation ensembles must preserve compatible behavior as their components update. Fraud detection adds an adaptive adversary that probes the model and shifts tactics once detected, increasing the value of prompt containment and monitoring for sudden feature shifts. Shadow scoring and outcome evidence still have to establish whether an update reduces fraud without unacceptable false positives; urgency alone does not validate a new model. LLM releases face a broad set of capability and safety risks that require evaluation before exposure (Bender et al. 2021). These differences determine the evidence, update cadence, and recovery policy each workload needs. A shared platform is valuable when it enforces those distinct contracts without making every team rebuild the operational machinery.

Quantifying platform economics

The economic case for platform operations rests on understanding both the costs of fragmented approaches and the returns from shared infrastructure. Equation 0.57 defines the platform benefit-cost ratio (BCR) as the ratio of engineering time savings across all models to total platform cost:

$$\text{BCR}_{\text{platform}} = \frac{N_{\text{models}} \times T_{\text{saved}} \times C_{\text{engineer}}}{C_{\text{platform}}} \tag{0.57}$$

where N_{models} represents the number of models benefiting from the platform, T_{saved} is the engineering time saved per model per period, C_{engineer} is the fully-loaded cost per engineer hour, and C_{platform} is the total platform cost including development, infrastructure, and maintenance.

A ratio of one is break-even; net return on investment is this ratio minus one. Engineering hours valued at their loaded cost measure recovered capacity, not automatic payroll savings. Costs and benefits must cover the same period and include ongoing platform operation.

The equation makes the investment boundary explicit. For an organization with five models, platform cost may exceed the value of recovered effort; unusually costly recurring work could reverse that comparison even at a small model count. Holding per-model savings constant makes the numerator grow linearly with N_{models}. Whether the ratio improves depends on how development, support, and infrastructure costs grow as additional models adopt the platform.

Napkin Math 12.2: The platform dividend

Problem: An organization manages 50 models. A centralized ML Platform team costs $120,000/month. If the platform saves each model team 20 hours of manual toil per month, is the platform investment profitable?

Math:

1. **Gross Monthly Capacity Value**: 50 models $\times$ 20 hours/model $\times$ $150/hr = $150,000.
2. **Net Monthly Benefit**: $150,000 (Savings) - $120,000/month (Cost) = $30,000.
3. **Benefit-Cost Ratio**: $150,000 / $120,000/month = 1.25.

Systems insight: Platforms exhibit a scaling threshold under a declared cost model. At 50 models, this platform earns a 25 percent return on its modeled cost. However, if the organization only had 20 models, the capacity value would be only $60,000, a 50 percent loss relative to the platform team's salary. This comparison holds the team cost and per-model savings fixed. An investment decision must also include migration, infrastructure, and ongoing support costs, then establish how the recovered engineering time will create value.

From artisanal to industrial operations

The platform-dividend calculation identifies the quantities an operating decision needs. A build investment incurs costs before it releases engineering capacity, so the comparison must account for the investment horizon as well as recurring toil. The following example separates amortized development cost from the ongoing work it is expected to remove.

Consider an organization evaluating whether to build a centralized ML platform. Five parameters define the current state:

- 50 production models across 8 teams
- Each model requires 40 engineer-hours monthly for operational tasks
- Engineers cost $150/hour fully loaded
- Platform development cost: $2 million amortized over 3 years
- Expected time savings: 30 hours per model per month post-platform

Before platform (annual operational cost):
$C_{\text{current}} = 50 \times 40 \times 12 \times 150 = \$3,600,000$
After platform (annual operational cost plus amortized platform cost):
$C_{\text{after}} = 50 \times 10 \times 12 \times 150 + \frac{2,000,000}{3} = \$900,000 + \$666,667 = \$1,566,667$
The simplified scenario releases engineering capacity valued at $2,033,333 annually after amortized build cost, a 56.5 percent reduction in the modeled cost. It excludes incremental recurring platform staffing and infrastructure. First-year payback therefore requires those omitted costs to fit within the remaining benefit; recovered engineering time becomes cash savings only when expenditure is actually avoided.

The economic gap explains why large technology companies have invested heavily in ML platforms while smaller organizations often struggle to justify similar investments. This section prices that gap three times, and all three are equation 0.57 with different inputs. Notebook 12.2 charges a $120,000/month platform team against 20 hours saved per model per month. The worked example above charges a one-time $2M build, amortized over three years, against 30 saved hours per model per month. Figure 0.161 charges $2M or $5M of annual running cost against a fixed $100K benefit per model per year. Each therefore breaks even at a different model count.

Figure 0.161 charts this benefit-cost trajectory across production model counts for two annual platform budgets, isolating the break-even crossing where each linear benefit ray climbs out of the shaded investment phase into the net-positive returns phase. With a fixed $100K benefit per model per year, a $2M/year platform achieves parity at the 20-model marker, whereas a $5M/year enterprise platform requires 50 models to reach the break-even line. At 100 models, the $2M platform ascends to a benefit-cost ratio of 5, equivalent to a net ROI of 400 percent. The linear curves assume constant marginal benefit and fixed platform costs; dependency growth, diminishing savings, or

higher operating costs change the result. The $5M platform's 50-model crossing is also a different quantity from the 50-model crossing in figure 0.160. That one marks where repeated work outgrows a team; this one marks where a budget pays back.

The figure's budgets are annual running costs, so its $2M/year platform differs from the worked example's one-time $2M build, which charges only a third of that amount to each year of its three-year life. The break-even count is therefore not a universal constant; it moves with the two inputs a platform team controls. Raising savings per model steepens the line and moves the crossing left, raising platform cost flattens it and moves the crossing right, and the benefit-cost ratio stays linear in model count.

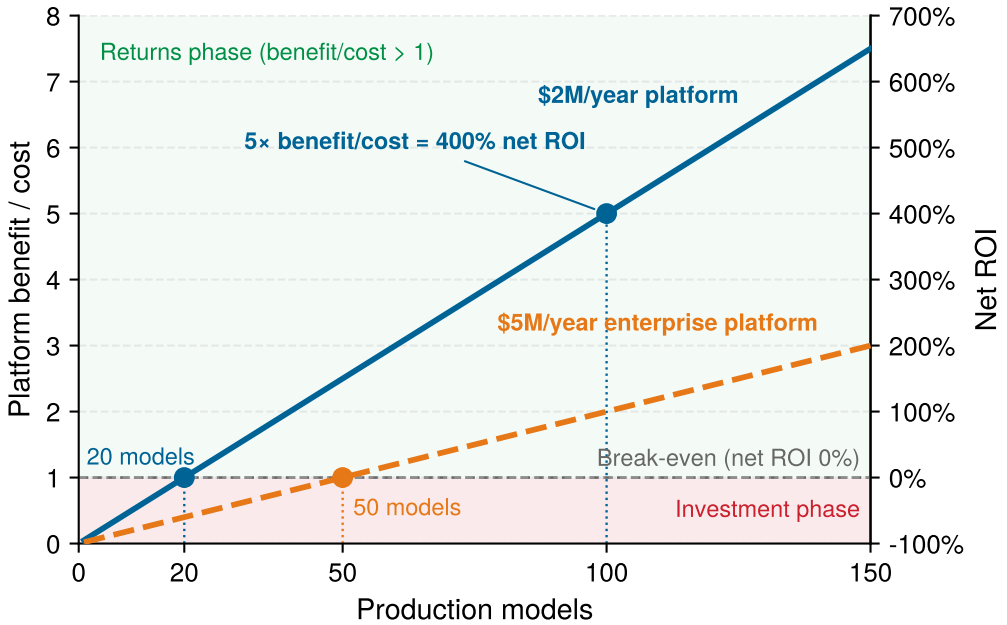


Figure 0.161: The platform benefit-cost threshold: Assumed annual benefit divided by annual cost for two platform budgets. Break-even occurs at a ratio of one. With fixed per-model benefit, the ratio grows linearly; a ratio of five corresponds to a net ROI of 400 percent, not 500 percent.

Checkpoint 12.1: Platform ROI break-even

Equation 0.57 expresses the platform benefit-cost ratio as $N_{\text{models}} \times T_{\text{saved}} \times C_{\text{engineer}}/C_{\text{platform}}$. In figure 0.161, the dual benefit-cost rays illustrate this linear growth under fixed savings assumptions, isolating where each platform budget intersects the break-even parity threshold. Apply the formula to two concrete decisions.

- ☐ **Platform ROI**: for an organization with 30 models, each saving 200 engineer-hours per year at $150/hour, calculate the benefit-cost ratio and net ROI of a $2M/year platform and a $5M/year enterprise platform.
- ☐ **Break-even count**: using the same per-model savings ($30K/year, which is 200 hours at $150/hour), determine the model count where each platform breaks even, compare it to the 20- and 50-model parity markers plotted in figure 0.161, and explain how the figure's stated $100K per-model benefit moves those thresholds.
- ☐ **Build now vs. wait**: for an organization with 8 models debating whether to build a $2M/year platform, use the linear ROI structure of equation 0.57 past break-even to state

the strongest argument for building now and the future-growth assumption required for that argument.

The benefit-cost ratio takes the per-model savings T_{saved} as an input. In practice those hours come from specific recurring work, such as unversioned data, brittle pipelines, and manual deployment toil, that a shared platform can retire. Measuring that work is the job of technical-debt accounting. The hardware side of the ledger, where utilization decides whether shared capacity earns its cost, returns in section 19 after the operational machinery that consumes that capacity is in place.

Quantifying and managing ML technical debt

Technical debt at fleet scale becomes a prioritization problem when recurring maintenance competes with new development. The platform must identify dependencies that slow deployments, raise incident rates, or consume engineering time, then compare the expected benefit and cost of repairing them. This chapter sorts ML debt into four categories by where the recurring work originates. Data debt lives in inputs that are unversioned or weakly validated. Configuration debt lives in duplicated, unvalidated settings that every release must review by hand. Model debt lives in the coupling around a model, including undeclared consumers and **glue code**, the supporting code written to move data into and out of general-purpose libraries and between pipeline stages, which binds a model to one pipeline's formats. Infrastructure debt lives in brittle pipelines, manual deployment, and drifting environments. The categories locate where the work originates; common effort and risk measures make candidate repairs comparable across the fleet.

Napkin Math 12.3: The maintenance dividend

Problem: A team spends 40 hours/month manually fixing "broken plumbing" (stale data, failed scripts, manual monitoring). A one-month intensive cleanup (160 hours) is projected to reduce this to 8 hours/month. Is the cleanup worth it over 3 years of model lifecycle?

Math:

1. **Status quo** (3 years): 36 months $\times$ 40 hours/month $\times$ \$150/hr = \$216000.
2. **Proactive Path**: (160 hours investment + 36 months $\times$ 8 hours/month) $\times$ \$150/hr = \$67200.
3. **Net Savings**: \$216000 - \$67200 = \$148800.
4. **Dividend ratio**: 3.2×.

Systems insight: Under the projected toil reduction, proactive maintenance reduces the modeled cost by a factor of 3.2× over the model lifecycle. The benefit comes from avoiding repeated work long enough to recover the initial repair effort. A shorter remaining lifetime, lower recurrence, or additional upkeep can change the decision, so refactoring earns priority through measured recurring cost and a credible remediation plan.

The maintenance dividend becomes actionable only when the platform can compare unlike debts on a common operational scale. ML technical debt manifests in measurable symptoms that directly affect platform velocity and reliability (Sculley et al. 2015; Amershi et al. 2019).

Debt categories and measurement

The debt category matters because each failure mode leaves a different operational trace. Table 0.149 turns the taxonomy into a measurement map: data debt appears as incidents and manual pipeline intervention, configuration debt as unvalidated release surface, model debt as glue-code drag, and infrastructure debt as toil that consumes platform capacity.

Table 0.149: Technical debt measurement map: Different debt types require different observable signals. Numerical thresholds are illustrative platform policies, not empirical laws. A shared scoring process can compare them only after each category has been tied to the symptom and threshold that make the debt operationally visible.

Debt type	Operational symptom	Measurement signal	Warning threshold
Data debt	Unstable dependencies, missing versioning, weak validation	Data incidents per month and manual pipeline intervention	More than 10 data incidents/month or 30% manual runs.
Configuration debt	Ad-hoc files, duplicated parameters, absent validation	Deployment failures, lines of config, unvalidated parameters	More than 500 lines of unvalidated configuration per model.
Model debt	Glue code, undeclared consumers, tangled serving paths	Coupling score, undocumented consumers, trace time	More than 20% engineering time maintaining glue code.
Infrastructure debt	Brittle pipelines, manual deployment, environment drift	Toil hours, automation coverage, drift incidents	More than 50% platform capacity spent on toil.

Quantification metrics

Table 0.150 turns four debt metrics into an illustrative baseline-and-threshold policy. These values are example escalation rules, not universal diagnostic cutoffs; calibrate them to workload risk, release cadence, and incident severity.

Table 0.150: Technical debt prioritization metrics: Operational debt becomes actionable when each metric has a healthy baseline and a threshold that turns latent friction into an engineering queue.

Metric	Signal	Healthy baseline	Warning threshold
Deployment velocity	Time from code commit to production deployment; exposes release friction.	Less than one day for inference code changes and less than one week for training changes.	More than two weeks indicates configuration complexity, brittle dependencies, or inadequate automation.
Incident rate	Reliability harm visible as incidents per 1000 deployments.	Fewer than 5 incidents per 1000 deployments.	More than 20 incidents indicates debt in testing, validation, or deployment procedures.
Toil percentage	Team capacity consumed by manual operational work.	Less than 20% of capacity spent on toil.	More than 50% indicates automation debt that prevents the team from improving the platform.
Dependency staleness	Share of dependencies behind supported or current versions.	Less than 10% stale dependencies.	More than 30% indicates upgrade debt that increases security risk and limits performance improvements.

The worked example applies that threshold logic to rank debt by the capacity each fix returns to the platform team.

ML debt audit and prioritization

An ML platform team supporting 40 production models with 15 engineers faces deployment velocity problems. New models require 6 weeks to reach production, frustrating both platform and model teams. The audit estimates how much capacity each repair could release and compares that benefit with implementation effort and operational risk. A highly visible symptom is a starting point for measurement, not sufficient evidence of priority.

The audit applies the measurement map of table 0.149 to the deployment-velocity complaint, so it records in table 0.151 the three categories that the team's release and incident symptoms point to before scoring them: configuration debt, model debt in the form of pipeline glue code, and infrastructure debt in the form of fragmented monitoring. Data debt can also delay releases, but this audit has not attributed the observed delay to data incidents and leaves that category outside its scope. Each row pairs an operational symptom with the impact measure that makes the debt comparable across teams.

Table 0.151: ML debt audit inputs: Initial observations for configuration debt, model debt (pipeline glue code), and infrastructure debt (monitoring) before priority scoring. The table preserves the symptom, impact metric, technical measure, and estimated annual cost for each debt category.

Debt category	Symptom	Impact metric	Technical measure	Estimated annual cost
Configuration debt	Each model has custom YAML configuration files averaging 847 lines with no validation schema	35% of deployment delays result from late config errors	Manual config review required for every deployment	12 engineer-hours per deployment × 80 deployments/year = 960 hours
Model debt (pipeline glue code)	Data preprocessing uses 23 different scripts with 62% code duplication	12 engineer-hours per week debugging pipeline breaks	No shared preprocessing library; each team implements custom logic	12 hours/week × 52 weeks = 624 hours
Infrastructure debt (monitoring)	Each model uses ad-hoc monitoring, with no unified observability platform	Mean time to detect incidents is 4.2 hours	23 monitoring approaches across 40 models	Extended incident duration costs $50K per incident × 15 incidents/year = $750K

The scoring approach uses three criteria: impact severity, frequency, and resolution cost, each scored 1 to 3. Table 0.152 ranks the three debt categories observed earlier. Higher impact and frequency raise priority; higher resolution cost lowers it.

Table 0.152: Debt prioritization scoring: Three-criterion scoring (impact severity, frequency, and resolution cost) applied to three observed debt categories. Scores use Impact × Frequency/Resolution Cost, so slower or more expensive fixes are penalized. Configuration debt scores highest, justifying first-priority remediation.

Debt Category	Impact	Frequency	Resolution Cost	Total Score	Priority
Configuration	3 (High)	3 (Daily)	2 (Medium: 6 weeks)	4.5	**1st**
Monitoring	3 (High)	2 (Weekly)	2 (Medium: 8 weeks)	3	**2nd**
Pipeline Glue	2 (Medium)	2 (Weekly)	3 (High: 16 weeks)	1.3	**3rd**

The score makes configuration debt the first paydown target: build configuration schema validation and a templating system before addressing lower-scoring pipeline glue. The investment requires 6 weeks of engineering effort to build the configuration system. The savings estimate needs one more input, the share of each deployment's manual configuration review that schema validation eliminates. Take it as 35 percent. That planning assumption happens to equal the share of deployment delays the audit attributes to configuration, but delays and review hours are different quantities, and only a pilot of the schema system can measure the second. With that input, released capacity is: 12 engineer-hours per deployment × 80 deployments per year × 35 percent = 336 engineer-hours saved per year. At $150/hour, that is $50K in annual savings, so the investment pays back in about 8.6 months.

Decision framework

The table score generalizes by adding a Benefit term that rates what the repair returns, such as released hours or avoided incidents. The result remains a ranking heuristic rather than a monetary return. Impact and Frequency are ordinal weights, Benefit is a separate score, and Resolution Cost is effort on a consistent internal scale. Because Frequency already appears as its own factor, Benefit must be scored per occurrence; an annual dollar benefit already includes frequency and would count it twice:

$$\text{Paydown Priority} = \frac{\text{Impact} \times \text{Frequency} \times \text{Benefit}}{\text{Resolution Cost}} \tag{0.58}$$

The paydown-priority formula in equation 0.58 keeps automation work tied to operational value: high-impact, frequent, high-benefit fixes outrank expensive work whose payoff is speculative. Once a candidate ranks high, a second and separate tool takes over. The payback calculation in the deployment-automation notebook below is not the ordinal score converted to dollars; it keeps only the terms that carry measurable units. Frequency becomes deployments per week, Benefit becomes the toil hours each deployment no longer needs, and Resolution Cost becomes the setup hours, so the payback period is Resolution Cost divided by the weekly product of the other two. Impact has no counterpart in that calculation. It decided which candidate reached the payback stage, and any severity that saved hours cannot express, such as outage or compliance exposure, must be argued alongside the payback period rather than folded into it.

Napkin Math 12.4: ROI of automation

Problem: A team spends 10 hours of manual toil per model deployment. Investing 120 hours in a CI/CD pipeline is projected to reduce deployment toil to 0.5 hours. At 3 deploys/week, how long until the automation pays for itself?

Math:

1. **Automation Cost**: 120 hours $\times$ \$150/hr = \$18000.
2. **Weekly Savings**: 9.5 hours/deploy $\times$ 3 deploys/week $\times$ \$150/hr = \$4275/week.
3. **Payback Period**: \$18000 / \$4275/week $\approx$ 4.2 weeks.

Systems insight: The projected payback period of 4.2 weeks makes this recurring deployment task a strong automation candidate. The calculation assumes that deployment frequency and time savings persist, and it excludes additional maintenance of the automation. Comparing that upkeep with the recurring effort avoided determines whether the initial payback becomes a lasting reduction in toil.

Use the score to rank candidates for investigation, then compare debt paydown with feature development using costs, expected benefits, uncertainty, and time horizons in common units. The configuration example scores highly under its stated assumptions; it is not automatically preferable to an unrelated project with a different scoring scale. A planned system retirement or a small affected population can reduce its practical value.

The same prioritization logic must become organizational habit, or the measured debt will reaccumulate between audits. Quantified debt first becomes a backlog item with affected systems, estimated impact, resolution cost, and priority score. Quarterly review then updates that backlog as platform needs change, keeping the ranking tied to current deployment velocity, incident rates, and toil rather than stale complaints.

A debt budget turns that ranking into capacity. A team can reserve an explicit share of engineering time for remediation and revise it as incident burden, release friction, and planned product work change. No fixed allocation guarantees debt reduction. Prevention moves the same reasoning upstream into code and design review by identifying new configuration complexity and hard-to-maintain dependencies before they become recurring toil.

Platform team justification

A dedicated ML platform team is justified when fragmentation costs more than the shared infrastructure needed to replace it. The decision therefore combines quantitative factors (cost savings, velocity improvements) with qualitative factors (consistency, governance, talent retention).

The sharing dividend and the benefit-cost ratio point to three potential benefits of shared ownership: infrastructure efficiency, faster releases, and fewer incidents. As notebook 12.1 showed, cutting average idle time from 70 percent to 30 percent lets fewer provisioned GPUs deliver the same useful work, provided peak demand and reliability headroom permit that reduction. Faster delivery and fewer incidents are additional hypotheses to measure; neither a guaranteed engagement gain nor a fixed incident-reduction percentage follows from introducing a platform. The

business case combines observed capacity savings with independently valued release and reliability improvements.

The qualitative case follows from the same fragmentation cost. Shared ownership gives telemetry, rollback capability, and runbook documentation a common acceptance process, but those standards protect the fleet only when deployment gates enforce them. A centralized platform team also gives product teams access to operational expertise and provides dedicated roles for engineers focused on machine learning systems and reliability. Platform-level lineage and policy controls support governance review by preserving evidence of which versions ran, what checks passed, and who authorized the release.

The decision to establish a platform team typically occurs when organizations recognize that allowing fragmentation to continue imposes coordination costs exceeding the platform investment. This recognition often follows a significant production incident that revealed cross-model dependencies or operational gaps. The resulting economics show why platform operations become more valuable as the model fleet grows.

> **Systems Perspective 12.2: Reuse spreads platform cost**
>
> When per-model savings and platform cost remain fixed, equation 0.57 scales the numerator linearly with N_{models}, so the benefit-cost ratio rises with each additional model served. The practical question is whether the next model fits existing interfaces or requires new platform work. Repeated use of an established capability spreads its cost; a new workload family, costly migration, or expanded reliability obligation can change both the savings and the denominator.

While the economic justification for platform operations becomes clear at scale, the technical implementation begins with a harder problem, preventing independent models from colliding through shared state. Multi-model management requires untangling the hidden dependencies that emerge when hundreds of models share the same data, infrastructure, and user experiences.

Governance of State and Change

Imagine an e-commerce platform where the search ranking model uses outputs from a user embedding model. An unannounced dimensionality change can break the consumer's input interface; a change in scale or meaning can pass shape checks while degrading ranking quality. Governing this dependency requires both an artifact record and a data contract. Registries identify the model versions and consumers involved; feature operations preserve the meaning and timing of the inputs those consumers expect. Release gates can then evaluate a complete dependency state rather than an isolated model binary.

Managing multiple machine learning models in production extends dependency governance across model and team boundaries. When models share features, feed predictions into one another, or compete for shared infrastructure resources, their individual behaviors become interdependent. Effective portfolio management therefore starts with registries, dependency tracking, and ensemble-aware deployment practices that make those relationships explicit.

Model registries at scale

Effective multi-model management begins by turning artifacts into governed interfaces. A model registry serves as the central catalog for all machine learning artifacts in an organization, but at enterprise scale the catalog must also expose the dependency graph that determines which downstream systems an update can break.

Core registry requirements

The registry can enforce dependency control only if four ordinary catalog capabilities are reliable. Table 0.153 summarizes the minimum interface: version identifiers let downstream consumers pin the exact artifact they validated; metadata exposes the training and deployment context needed for review; artifact storage turns registry entries into durable deployable assets; and access control keeps ownership boundaries explicit.

Table 0.153: Core registry requirements: Enterprise model registries need versioning, metadata, artifact storage, and access control before dependency-aware validation can be reliable. These catalog capabilities make model artifacts behave like governed production interfaces rather than files on shared storage.

Requirement	What it stores or enforces	Why it matters at scale
Version management	Unique artifact identifiers plus lineage for training data, hyperparameters, code commits, and evaluation metrics.	Downstream consumers can pin the exact artifact they validated.
Metadata storage	Training configuration, evaluation results, hardware requirements, serving configuration, and ownership.	Deployment and review decisions can be made without reverse-engineering the artifact.
Artifact storage	Durable model binaries with efficient retrieval and caching near serving locations.	Large models such as LLMs can exceed 100 GB and cannot rely on ad-hoc file distribution.
Access control	Read-write, administrative, and read-only permissions at team and dependency boundaries.	Model developers, platform operators, and dependent teams interact through governed APIs.

Dependency tracking

Beyond these core requirements, the distinguishing feature of enterprise registries is explicit dependency tracking. When Model A consumes features computed by Model B, that relationship must be recorded and enforced, because the recorded edges are what bound the work an upstream change creates. A version bump on embedding model E propagates along those edges to an impact set of candidate retrieval, parallel rankers, and an ensemble, all of which must be re-evaluated before release (figure 0.162).

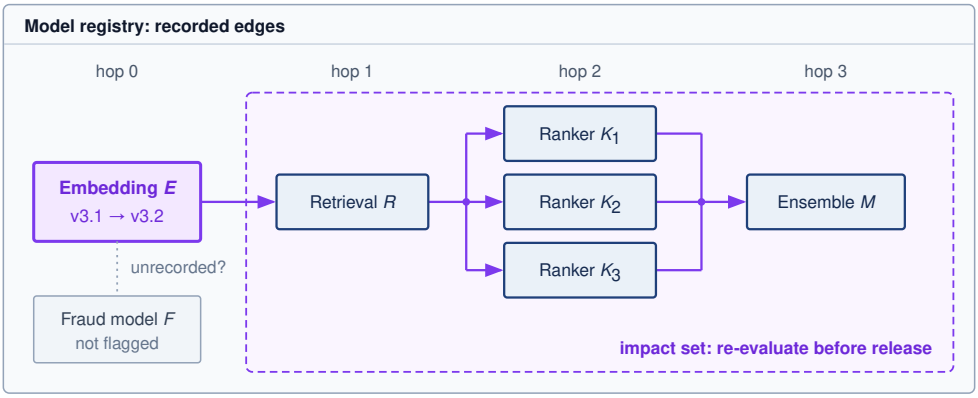


Figure 0.162: Dependency-aware model registry: A version bump on embedding model E starts a traversal of the registry's recorded downstream edges: retrieval R, rankers K_1 to K_3, and ensemble M form the impact set (dashed region) that must be re-evaluated before E v3.2 ships. A model with no recorded edge from E, such as fraud model F, is not flagged, which is why an unrecorded dependency is a silent risk. The rankers also consume features derived from E directly; only the retrieval path is drawn.

The impact boundary in figure 0.162 identifies consumers that require evaluation after an upstream change. Fraud model F has no recorded dependency, so the traversal does not flag it; an omitted edge would leave that conclusion incomplete. Within the recorded graph, upstream embedding model E produces representations consumed by retrieval model R, three parallel rankers (K_1, K_2, K_3) score those candidates using features derived from E, and ensemble model M combines the scores into a final ranking. Recording these relationships tells the release controller where to test, and the tests on those consumers decide whether the new representations remain compatible.

Update approval begins with graph traversal and then requires behavioral and interface evidence. When embedding model E is updated, the registry and release controller coordinate four steps:

1. Traverse downstream edges to identify every dependent model (R, K_1, K_2, K_3, and M).

2. Re-evaluate each dependent model against the proposed embeddings.
3. Block deployment of E until every consumer passes.
4. Roll out the approved version set through compatible intermediate states, retaining a validated rollback target. Topological ordering alone is insufficient if an existing consumer cannot accept the new producer's outputs.

Without explicit dependency tracking, organizations discover architectural coupling through production outages when an upstream change silently corrupts downstream assumptions.

Listing 0.15 illustrates how a single YAML entry captures artifact location, training provenance, evaluation results, and declared dependencies. The downstream entries seed impact analysis; following their registry records reveals transitive consumers. Release approval additionally needs the applicable acceptance thresholds and evidence for the compatible version set.

Listing 0.15: Model Registry Schema: A YAML entry capturing model metadata, artifact location, training provenance, and evaluation results for dependency tracking and reproducibility.

```yaml
model:
  name: user_embedding_v3
  version: "3.2.1"
  type: embedding_model
  domain: recommendation

artifact:
  path: gs://models/user_embedding_v3/3.2.1/
  format: tensorflow_savedmodel
  size_bytes: 4294967296

training:
  data_version: user_interaction_2024_01
  code_commit: abc123def
  started_at: 2024-01-15T10:00:00Z
  duration_hours: 48
  hardware: 8xA100-80 GB

evaluation:
  metrics:
    recall_at_100: 0.342
    embedding_quality: 0.891
  evaluation_set: eval_2024_01

dependencies:
  upstream:
    - feature_store/user_features_v2
    - feature_store/interaction_features_v1
  downstream:
    - models/candidate_retrieval_v4
    - models/ranking_ensemble_v2

serving:
  min_replicas: 10
  max_replicas: 100
  latency_p99_target_ms: 5
  memory_gb: 16

ownership:
  team: recommendation-core
  oncall: recsys-oncall-team
```

Ensemble management

Recommendation systems exemplify the multi-model management challenge by composing retrieval, ranking, and filtering stages. Some stages also combine predictions from several models into an

ensemble. The platform must validate the complete recommendation interface even when different teams own its components.

Architectural rationale for recommendation ensembles

Recommendation architectures separate work when evaluating every candidate with the richest model would exceed the latency or compute budget. Retrieval produces a manageable candidate set, ranking scores that set with richer features, and later re-ranking or business-rule stages produce the final ordering (Covington et al. 2016; Liu et al. 2022). Within this path, specialized models can address competing objectives such as engagement, diversity, and freshness, while ensemble stages combine their outputs. The decomposition trades a smaller amount of expensive scoring for additional interfaces whose behavior the platform must validate.

The same decomposition improves experimentation velocity because teams can update individual components without retraining the entire recommendation stack, but that independence creates version-compatibility obligations for the platform. It also changes risk management. Other ensemble components can sometimes compensate when one model fails or produces poor results, yet the platform must detect when compensation hides a regression rather than resolving it.

Ensemble deployment patterns

Deploying an ensemble update requires evaluating its effect on the composed system. Consider updating the fine ranking model within a recommendation ensemble. Table 0.154 gives an illustrative staged ensemble deployment pattern with four phases: shadow deployment (24–48 hours logging without serving), canary (1 percent traffic for 4–8 hours), staged rollout (5 percent to 100 percent over 24–72 hours), and soak (7–14 days monitoring for delayed effects). These durations are planning assumptions; promotion requires enough eligible observations, mature outcomes, and acceptable guardrail metrics for the release decision.

Table 0.154: Staged ensemble deployment pattern: Four-phase rollout for updating recommendation ensemble components. Shadow deployment (24–48 hours) compares behavior without serving candidate outputs; resource isolation and outcome evidence bound what it establishes. Canary (1 percent traffic, 4–8 hours) enables statistical regression detection, staged rollout progressively increases exposure, and soak period (7–14 days) catches delayed interaction effects.

Deployment Stage	Actions	Duration	Rollback Trigger
Shadow	New model scores alongside production, results logged but not served	24–48 hours	Quality metrics below threshold
Canary	1% traffic receives new model results	4–8 hours	Statistical significance of regression
Staged Rollout	5% → 25% → 50% → 100%	24–72 hours	Business metric degradation
Soak	Full traffic, extended monitoring	7–14 days	Delayed effects emerge

The extended timeline reflects the difficulty of detecting regressions in ensemble systems. A component change that improves its local metrics might degrade system-level performance through subtle interactions with other components.

Interaction effects

Ensemble components interact in ways that make local validation insufficient. If a ranking model is retrained on lower-quality retrieval candidates, it may learn greater reliance on auxiliary signals; restoring retrieval can then change the distribution that this adapted ranker expects. A fixed ranker can also respond differently to changed inputs without changing its learned weights. Distribution shift propagates whenever an upstream update alters representations consumed by downstream models trained on older versions. Over longer horizons, ranking decisions change which items users encounter, shaping the feedback used for future training. Intermediate outputs help locate these effects, while stable holdouts and observation windows support comparison of the complete system. Joint retraining is a candidate intervention when the evidence identifies incompatible learned behavior, rather than a required periodic reset.

Model lifecycle management

Lifecycle management exists to keep model dependencies from becoming permanent obligations: every promotion widens a model's blast radius, and every retirement must migrate its consumers before the platform can reclaim resources. The lifecycle stages trace that progression from development to archive, each defined by the gates it imposes rather than by a status label.

```
Development → Staging → Canary → Production → Deprecation → Archive
```

In development, models exist as experimental artifacts. Operations requirements are intentionally light, but they are not optional: successful experiments must preserve results, version history, and enough reproducibility metadata to be challenged later. The operational concern is therefore transition readiness. A promising model should not move to staging until it has clear production-readiness criteria, automated evaluation against production-equivalent data, and documentation sufficient for review.

Staging tests the candidate as a deployable service before it serves user-visible outputs. Production-equivalent data, feature interfaces, and hardware make latency, throughput, and behavioral checks relevant to deployment. Shadow traffic can add evidence about live request patterns when its coverage justifies its cost. The promotion gate combines the checks required by the release contract with human review where model behavior or risk demands judgment.

Production widens the blast radius from validation traffic to live traffic, so the model now requires continuous monitoring with alerting, capacity for traffic fluctuations, rollback procedures, and on-call support. Production is not a terminal state. Distribution shifts prompt investigation and evaluation; retraining is warranted when the resulting evidence supports an update. Feature and infrastructure changes likewise require compatibility checks, and periodic comparison with newer baselines tests whether the deployed model still earns its place.

The lifecycle closes only when a model can be retired without breaking its consumers. Deprecation identifies dependent systems, provides migration paths and timelines, maintains the old model until migration completes, and archives artifacts for reproducibility and audit. Organizations often underinvest in this final stage, leading to accumulation of zombie models[2] that consume resources but provide questionable value. Platform-level lifecycle enforcement helps address this pattern.

[2] **Zombie Models**: Production models that continue serving despite being obsolete or superseded. Even a low-traffic model consumes registry, monitoring, dependency-management, and on-call capacity until it is deliberately retired. The operational cost therefore extends beyond compute: zombie models enlarge the dependency graph, making platform-wide upgrades and security patches slower and riskier.

Deployment patterns by model count

The appropriate deployment pattern depends on the interdependence of the versions being updated, because a compatibility change can widen the rollback unit. Table 0.155 illustrates deployment patterns by scale: single model deployments (monthly updates for isolated vision classifiers), pipeline deployments (weekly updates for 3–5 sequential NLP models), ensemble deployments (daily updates for 10–50 recommendation components), and platform deployments (continuous updates across hundreds of enterprise models). The cadences describe example operating contexts; model count does not determine release frequency or the evidence required for promotion.

Table 0.155: Deployment patterns by scale: Four patterns addressing different model counts and update frequencies. Single model deployments (1 model, monthly updates) use standard canary rollouts, while platform deployments (100+ models, continuous updates) require automated policy enforcement, cross-model impact analysis, and global rate limiting to prevent simultaneous high-risk deployments.

Pattern	Model Count	Update Frequency	Example
Single Model	1	Monthly	Vision classifier
Pipeline	3-5	Weekly	NLP processing pipeline
Ensemble	10-50	Daily	Recommendation system
Platform	100s	Continuous	Enterprise ML platform

For a model without downstream model consumers, the rollback unit can be smaller. Canary deployments, blue-green switches,[3] and gradual rollouts still require a validated previous version together with compatible preprocessing, features, and serving configuration. Restoring the model artifact alone is sufficient only when those surrounding interfaces remain compatible.

[3] **Blue-Green Deployment**: A release pattern that prepares the new version in a parallel environment before switching production traffic. Fast rollback requires the previous environment to remain ready and its dependencies to remain compatible. Holding both versions during the transition adds serving capacity and cost (C_{infer}); the duplication depends on which resources the environments can safely share.

Pipelines introduce ordering constraints because models execute in sequence and each model's output feeds the next. Compatibility must hold at every intermediate deployment state. An upstream-first update is safe only if existing consumers accept its new outputs; otherwise the platform must prepare compatible consumers or stage both versions before switching traffic. The release record names the compatible version set and the rollback unit, which may span the entire pipeline.

Ensembles widen the coordination problem because multiple models may execute in parallel or in a graph. Different teams can update components on different schedules, partial updates may change only part of the ensemble, and the system behavior emerges from component interactions. Testing in isolation is therefore insufficient; integration testing becomes the deployment gate.

At platform scale, continuous deployment means some model is always being updated somewhere, so the platform must prevent individually safe changes from combining into an unsafe fleet state. Platform deployment requires automated rollout policies based on model risk classification, cross-model impact analysis before deployment approval, global rate limiting to prevent simultaneous high-risk deployments, and automated correlation of incidents with recent deployments.

Cross-model dependencies in practice

The registry, ensemble, and lifecycle mechanisms meet in a single production graph, and one worked ecosystem shows how their obligations combine.

E-commerce model ecosystem

The dependency-control argument becomes concrete in an e-commerce model graph, where a single embedding interface fans out into retrieval, ranking, and business logic. An e-commerce platform typically starts the graph with embedding models. A user embedding model generates user representations from behavior history, while a product embedding model represents products from attributes and interactions. Those embeddings are not final predictions; they are shared interfaces consumed by downstream services.

The next layer turns shared representations into candidate sets and business signals. A candidate retrieval model uses the embeddings to find relevant products, and a price sensitivity model estimates how strongly a user will respond to price changes. A ranking model then scores the candidate products using both embedding features and auxiliary signals, while a business rules model applies promotional and inventory constraints before results reach the user.

The resulting graph has five tiers, and its shape decides what a change costs. User and product representations travel over a shared bus into candidate retrieval and price sensitivity, which converge in ranking before business rules apply (figure 0.163).

Because the embedding bus in figure 0.163 branches directly to both mid-tier consumers, a change can affect candidate retrieval and price sensitivity before propagating through ranking and business rules. The platform therefore evaluates both direct embedding compatibility and downstream recommendation quality. If old consumers cannot accept the new embeddings, the release can retain both versions and route each consumer to the version it validated while migration proceeds. The rollback plan must preserve that compatible state as well. While the dependency graph maps affected consumers, a model registry alone cannot preserve the feature values they ingest. Shared features demand versioned definitions, point-in-time correctness, and explicit freshness guarantees, contracts that complete the state a release pipeline must validate.

Feature Store Operations

Consider a fraud detection system that needs to know a user's transaction volume over the last ten minutes. Serving retrieves that feature within the prediction's latency budget, while training reconstructs it for many historical transactions. These access paths differ, but the feature's meaning must remain compatible. If training counts transactions that were unavailable at the historical prediction time, or serving applies a different aggregation rule, the model receives inputs that differ from those on which it was evaluated.

A common design separates the two access paths: online stores serve low-latency feature lookups, while offline stores generate reproducible training data. Operating these systems at scale presents unique challenges in freshness, consistency, and performance. The two paths form a training-serving gap in computational context. Training computes features in *batch* over *hours*, while serving computes

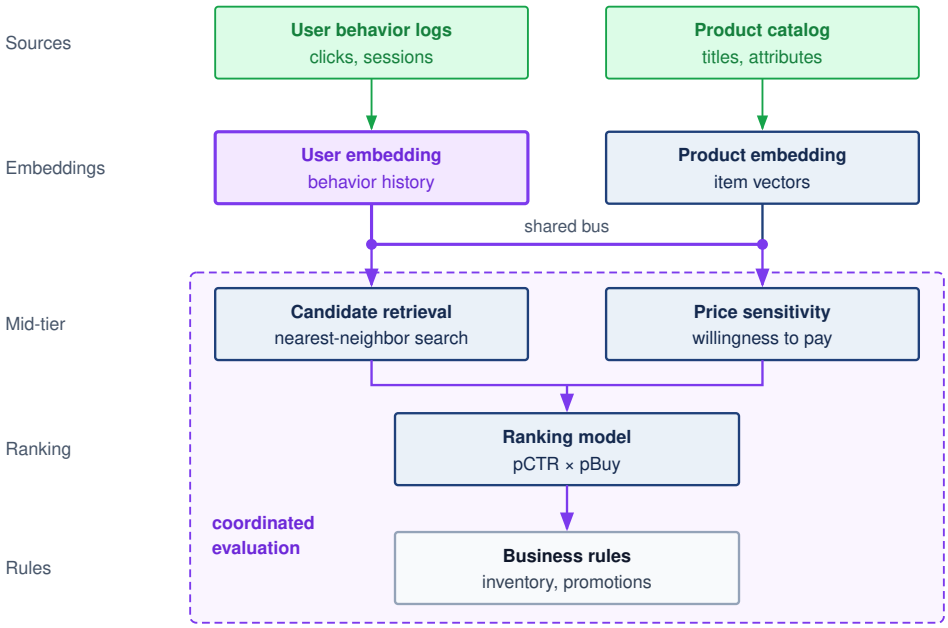


Figure 0.163: E-commerce model ecosystem: Data sources feed a user embedding and a product embedding. A shared bus carries both embeddings into both mid-tier models, candidate retrieval and price sensitivity, whose outputs merge in the ranking model before business rules apply inventory and promotion constraints. Because every embedding reaches every downstream model, a change to the user embedding requires coordinated evaluation of all four consumers.

them in *real time* within *milliseconds*, yet each feature must mean the same thing on both paths. The gap is a design condition, not yet a failure. It becomes one as training-serving skew, the failure mode in which small differences in processing logic between the two paths give the deployed model inputs it never saw in training and degrade accuracy silently.

> Systems Perspective 12.3: Training-serving skew
>
> At fleet scale, the concern shifts from detecting training-serving skew in a single model to controlling it as a platform-level property. A feature store reduces skew by making training and serving pipelines read from shared feature definitions and materialized feature values where possible, turning $f_{\text{train}}(x) \equiv f_{\text{serve}}(x)$ into an architectural invariant that can be tested and monitored rather than a manual convention repeated by every team.

Feature store architecture

The dual-store pattern resolves the tension between high-throughput batch training scans and low-latency serving lookups by splitting storage while sharing definitions. One materialization engine, governed by versioned feature definitions, writes ingested batch and stream data into an offline analytical store for historical joins and an online key-value store for point lookups (figure 0.164).

A **dual-store architecture** separates the offline and online stores so each path can meet its access requirements, while the platform enforces compatible definitions and temporal semantics across them.

The **offline store** retains historical feature data for reproducible training examples. Its access path favors large scans and joins, where a single query might read terabytes to build a feature set for millions of examples. Throughput determines how quickly that dataset can be prepared within

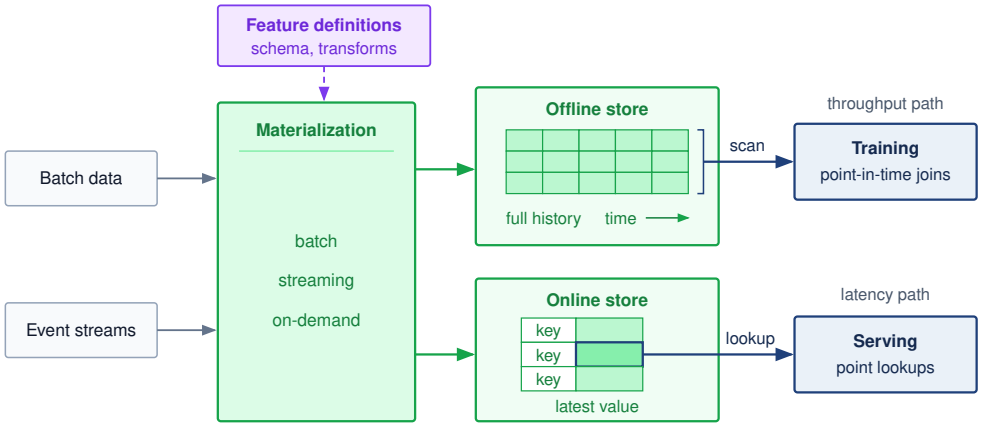


Figure 0.164: Feature store architecture: A dual-store architecture resolves the conflict between training (high-throughput batch scans) and serving (low-latency point lookups). One set of feature definitions drives materialization from batch and streaming sources into an offline store, which keeps full history for point-in-time training joins (the throughput path, top), and an online store, which keeps the latest value per entity for serving lookups (the latency path, bottom). Shared definitions support compatible feature meanings; materialization and historical-availability checks must verify that contract.

the training schedule. Analytical warehouses and columnar data lakes support this pattern by distributing reads and computation across partitions.

The **online store** serves feature values within the prediction's latency budget. Its load depends on request rate, features fetched per request, batching, and cache reuse, rather than model count alone. Key-value access is a common fit when each request retrieves a small set of values for known entity keys. The storage choice must satisfy that access pattern at the required tail latency and peak load.

Features are loaded into these stores through a process called **materialization**. Batch computation pipelines, often running on Spark, execute daily or hourly to generate features from historical data. Streaming computation pipelines using Flink or Spark Streaming generate features in near-real-time from event streams like Kafka. On-demand computation calculates features at request time when freshness requirements exceed batch frequency. The central architectural challenge is ensuring consistency between the two stores during materialization. If the offline store contains a feature value for training that was not identically available in the online store at the time of prediction, it creates a training-serving mismatch that can silently degrade model performance in production, the training-serving skew problem formalized in perspective 12.3.

For a platform serving hundreds of models, such as the five-hundred-model portfolio that opened this chapter, shared feature contracts prevent each consumer from reconstructing historical correctness and serving consistency independently. The dual-store pattern provides one implementation of that contract; the invariant is compatible feature meaning and temporal availability across both paths, rather than a requirement that every workload use the same storage system.

Freshness SLOs

Feature freshness represents the delay between real-world events and their reflection in feature values. Table 0.156 maps four feature types to example freshness requirements. Slowly changing demographics can permit batch computation, while decisions that depend on the last user action may require streaming or on-demand computation. The consuming decision determines the acceptable delay; the feature category alone does not establish a service-level objective (SLO).[4] The categories in the table are a starting point for those SLOs; monitoring and alerting must use the timestamp and delay contract validated for the consuming workload.

[4] **SLO**: A target for a declared service indicator and measurement window. Under a time-based definition, "three nines" (99.9 percent) annual availability allows about 8.8 hours of downtime; a request-based definition instead counts failed eligible requests. A p99 latency target of 200 ms requires at least 99 percent of eligible requests to complete within that bound over the specified window.

Table 0.156: Feature freshness requirements by type: Four feature categories with SLO thresholds and computation patterns. Static features (user demographics) tolerate day-scale staleness with batch computation; real-time features (last user action) demand seconds-scale freshness through streaming or on-demand computation, directly impacting recommendation quality and engagement.

Feature Type	Example	Freshness SLO	Computation Pattern
Static	User demographics	Days	Batch
Slowly changing	User preferences	Hours	Batch
Session-level	Current session context	Minutes	Streaming
Real-time	Last action	Seconds	Streaming/On-demand

Recommendation systems show how a missed freshness SLO reaches the user when a ranking decision depends on behavior from the current session.



Lighthouse 12.2: Archetype B (DLRM at Scale): Staleness tax

Context: Archetype B (DLRM at Scale) recommendation workloads maintain sparse embedding tables of 10 TB+ across distributed memory and serve on the order of 10 million queries per second platform-wide, each within a p99 serving budget ($L_{\text{lat,SLO}}$) of 100 ms, of which feature retrieval receives only a few milliseconds.

Mechanism: Ground truth user intent shifts continuously. If the feature materialization pipeline exhibits a 10-minute update lag ($T_{\text{staleness}} = 600$ s), serving queries read feature values that omit the last 10 minutes of user behavior, so downstream rankers can recommend items the user has already moved past.

Impact: The lag is dominated by pipeline scheduling rather than transfer time, and it can make recent behavior unavailable to a ranking decision. The resulting click-through or revenue effect must be measured for the service; there is no universal staleness penalty.

Systems lesson: When recent behavior materially affects ranking quality, DLRM operations must provision ingestion and materialization to meet the feature's freshness SLO. Scheduling must preserve that deadline alongside offline training needs. The measured value of fresher inputs determines whether the additional streaming capacity earns its cost.

Freshness becomes operational only when the SLO names its timestamp contract. Equation 0.59 measures time since the most recent feature update. This refresh-age proxy supports the thresholds in table 0.156 when updates certify that the source stream has been processed through the required time:

$$\text{Staleness} = t_{\text{current}} - t_{\text{feat}} \tag{0.59}$$

Refresh age differs from event-to-availability latency: rewriting an old source value can make its update timestamp recent without making the source information fresh. Streaming monitors therefore need source progress or watermarks as well as update timestamps, and must distinguish an idle entity from a stalled pipeline. Batch age increases between scheduled refreshes. Each path needs a threshold matched to its update contract rather than one global freshness rule.

Freshness impact on model quality

A recommendation system uses user interaction features with different freshness levels. Assume an online experiment yields the relative engagement lifts in table 0.157. These constructed values illustrate a planning calculation; replay of historical inputs alone does not establish a causal engagement gain:

Table 0.157: Assumed engagement lift by feature freshness: Constructed relative lifts measured against the same baseline engagement rate. The hourly-to-real-time gap is 2.1 percentage points of the relative-lift metric, not 2.1 percentage points of the raw engagement rate. The example translates that assumed gain into an infrastructure budget.

Feature Freshness	Engagement Lift vs. Baseline
Real-time (< 1 min)	+12.3%
Near real-time (< 5 min)	+11.8%
Hourly	+10.2%
Daily	+8.1%

The difference in relative lift between hourly and real-time features is 2.1 percentage points of the shared baseline. If the organization values that incremental engagement at $10 million annually, the comparison must use the incremental cost of replacing the hourly path, including migration and ongoing operation over the same horizon. The engagement experiment supplies the quality difference; the business valuation and infrastructure ledger determine whether it justifies investment.

Checkpoint 12.2: Pricing the streaming and batch freshness decision

Under the constructed lifts in table 0.157, moving from hourly to real-time features adds 2.1 percentage points of engagement lift. Treat that lift as $10 million in annual engagement value and apply it to the choice between streaming and batch infrastructure.

- ☐ **Freshness break-even**: determine the maximum annual incremental cost of a real-time feature pipeline relative to the hourly path that still breaks even on the 2.1-point lift, holding the $10 million engagement value constant, and state the cost threshold under which streaming is a clear win.
- ☐ **Lift per point**: compare the additional engagement lift for the daily-to-hourly, hourly-to-near-real-time, and near-real-time-to-real-time transitions, and identify the incremental pipeline-cost estimates needed to choose among them.
- ☐ **Scaling to users**: if the $10 million annual engagement value scales linearly with platform user count, determine the break-even user count as a fraction of the current population for a streaming feature platform costing an additional $5 million per year relative to the hourly path, state the range where it does not pay off, and choose an alternative architecture from table 0.156.

Point-in-time correctness

Training data must reconstruct features strictly as they existed at the timestamp of each historical event. Figure 0.165 sequences this temporal boundary along a 24-hour execution trace: an example generated at 12:00 must observe only the four clicks logged prior to the noon cutoff, whereas an unaligned midnight batch job counts all ten daily clicks and contaminates the training example with six future events. Using unaligned feature values as inputs for historical training examples creates data leakage[5] that inflates offline metrics but fails in production.

Comparing the aggregation brackets in figure 0.165 isolates the leakage mechanism. The point-in-time join uses the four clicks logged before noon, whereas the naive join reads the midnight total, inflating `total_clicks_today` by 2.5×. This "time travel" failure uses a value that is valid in the database but invalid for the prediction moment: `total_clicks_today` is 10 at midnight, while the noon prediction can use only the 4 clicks already available. Training on the later value exposes information unavailable to the deployed predictor and can make offline evaluation overestimate production quality.

Feature stores implement **point-in-time joins** that retrieve feature values as of specific timestamps, as shown in listing 0.16.

5 **Data Leakage**: Future information can inflate offline metrics when a model learns signals unavailable at prediction time. Shared feature infrastructure should enforce historical availability boundaries, but model and data owners must still specify the prediction moment and verify how features were computed. A timestamped join cannot remove future information already embedded inside an incorrectly constructed feature.

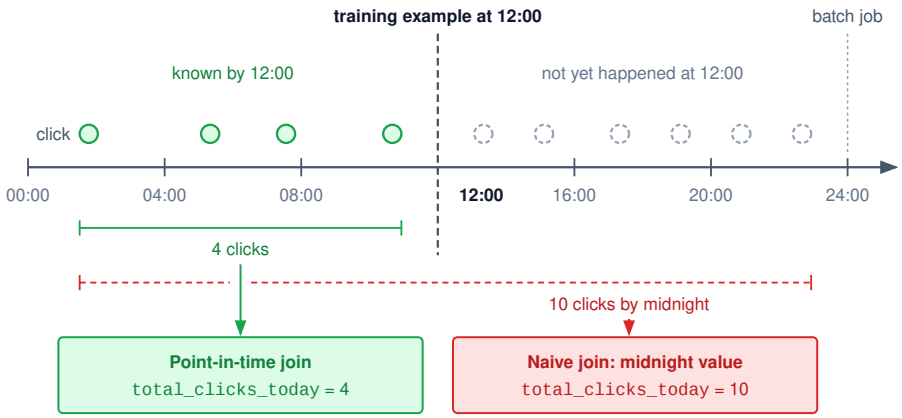


Figure 0.165: Point-in-time correctness: A training example at noon should see only the clicks already logged by noon (solid green, 4), not the clicks that arrive later (dashed gray). A naive join that reads the midnight batch value of `total_clicks_today` counts all 10 and leaks six future events into the example. A point-in-time join pairs each training event with feature values as they existed *at the event timestamp*, so the example contains only information that would have been available at inference time.

Listing 0.16: Point-in-Time Join: A SQL lateral join that retrieves the most recent feature values available before each event, preventing future data leakage into training examples.

```
SELECT
    e.user_id,
    e.event_timestamp,
    e.label,
    f.feature_1,
    f.feature_2
FROM events e
LEFT JOIN LATERAL (
    SELECT feature_1, feature_2
    FROM features f
    WHERE f.user_id = e.user_id
      AND f.feature_timestamp <= e.event_timestamp
    ORDER BY f.feature_timestamp DESC
    LIMIT 1
) f ON TRUE
```

The query assumes that `feature_timestamp` records when the value became available to serving. If it records only the source event time, a late arrival or later backfill could pass the filter despite being unavailable at the historical prediction. The store must retain availability time as well as event time when those differ, and the training join must enforce the availability boundary.

Point-in-time correctness has a storage cost because the store must retain feature history rather than current values alone. The same guarantee that prevents leakage also multiplies retained state:

$$\text{Storage} = N_{\text{entities}} \times N_{\text{features}} \times \frac{T_{\text{retention}}}{T_{\text{update}}} \times \text{bytes}_{\text{row}}$$

For 100 million users and 1,000 features, with a retention window of 1 year and an update interval of 1 hour, the history contains 876 trillion feature values. Each stored row carries more than the value itself. An 8-byte value needs an 8-byte entity key and, because a correct point-in-time join must filter on availability time as well as event time, two 8-byte timestamps, for 32 bytes per row. Full hourly snapshots then represent approximately 28 PB before compression, three quarters of it metadata that makes the history reproducible. Storing only changed values, compressing columns, and limiting retention can reduce this footprint. The reduction depends on change frequency and encoding, while retention must still cover the historical predictions the platform needs to reconstruct.

Feature versioning and lineage

Feature definitions are production interfaces, so changing one without versioning can break every dependent model. Versioning and lineage make this evolution governable rather than implicit.

A representative `user_engagement_score` incident makes the mechanics concrete. A platform team changes the feature from a 30-day z-score to a 7-day min-max scale. The output may still be a floating-point number, so schema validation alone can pass while the feature's meaning changes completely. Versioning names the semantic change before it reaches production; lineage identifies every model trained or served with the old meaning; backfill recomputes historical values for the new meaning; and freshness and quality checks decide whether the rewritten history is safe to use. Without that chain, a feature migration becomes a silent multi-model regression.

A safe feature interface records both version dimensions and lineage fields. Table 0.158 keeps those fields tied to their operational use.

Table 0.158: Feature version and lineage components: Feature versioning separates logic, data, and schema changes; lineage records the path needed to debug, audit, and reproduce feature values. Together, these fields turn a feature definition into a governed production interface.

Component	What It Records	Operational Use
Definition version	Computation logic for the feature	Blocks silent semantic changes when the formula changes but the type does not.
Data version	Source snapshot or stream contract	Distinguishes model changes from upstream data changes.
Schema version	Output type, shape, units, and nullability	Preserves API compatibility checks while still naming semantic shifts.
Consumer declaration	Exact feature versions each model consumes	Gives the platform a place to block unsafe updates before serving.
Source lineage	Source tables, streams, and their versions	Traces bad predictions back to the upstream data that produced them.
Transformation and runtime provenance	Transformation code, timestamp, and environment	Reproduces historical values for audit, debugging, and compliance.
Quality and freshness metrics	Validation results observed when the value was produced	Estimates blast radius and decides whether rewritten history is safe to use.

Backfill procedures

A backfill is a production migration over history: changing a feature definition creates a new version of the training history for dependent models, so the platform must bound the compute cost, validate values against the intended definition, and preserve a path back. Treating the backfill as a migration changes the operational question from whether the computation can run once to whether history can be rewritten without corrupting future training data.

Feature replay requires a concrete execution safety contract. Each backfill partition needs a stable identity and an idempotent or transactional write path so retries cannot duplicate feature effects; event-time bounds and the late-data policy must also match the point-in-time join used for training. Otherwise, a mechanically successful replay can produce a history that is complete in processing time but incorrect at the prediction time the model is meant to reproduce.

At scale, historical data may have moved into cold storage, so recomputation first becomes a data-placement problem. The long historical window then competes with production workloads for compute. Even after the job finishes, the platform cannot simply trust the new values: it must compare overlapping periods against the intended new computation, explain differences from the old definition, and coordinate with dependent pipelines so training jobs do not mix old and new semantics mid-run.

↩ Exactly-once commit boundaries, event-time watermarks, and late-data policies for distributed transformations are established in section 14.

The practical pattern is incremental. Historical data is processed in bounded date partitions, and each partition is validated before consumers can use it. Independent partitions can run concurrently within the backfill's resource budget. During a dual-write period, old and new computations run in parallel, giving the platform overlapping values for comparison before cutover. The previous feature version and its lineage remain available through the migration and rollback window so dependent models can return to a compatible state.

Scale challenges

Feature stores at recommendation system scale face a coupled systems problem: request volume, latency budget, and storage history all bind at once.

The arithmetic behind a large recommender explains why feature stores become serving infrastructure rather than a metadata convenience. 1 billion daily recommendations with 100 features per recommendation produces 100 billion feature lookups per day. That average load is roughly 1.16 million feature lookups per second before peak traffic. This counts feature-value accesses rather than backend requests; batching and cache reuse determine how many requests reach the store. A planning envelope of 5–10× the mean raises the required capacity accordingly; observed request patterns must establish the appropriate peak allowance.

Feature retrieval must fit inside the overall latency budget because lookup time on the critical path leaves less time for ranking. If the recommendation budget is 50 ms, the feature store may receive only 5–10 ms. Network overhead can consume 1–2 ms of that allocation, leaving roughly 3–8 ms for the store lookup itself. In-memory storage or caching, bounded batching, and placement near the serving fleet are candidate mechanisms. The selected design must meet the remaining lookup budget under peak load.

Production feature stores also carry two time horizons at once. Online capacity depends on the number of populated entity-feature pairs, encoded bytes per value, metadata, and replication. Offline capacity additionally depends on update frequency and retained history, as the snapshot calculation above shows. Neither footprint follows from model count alone. Multi-region replication can improve availability and lookup latency, but it also requires an explicit contract for how quickly new feature values become visible in each region.

Data quality operations

Data quality issues are a major source of production ML problems (Polyzotis et al. 2017). Model metrics reveal downstream effects, while data checks can identify missing, stale, or invalid inputs earlier in the pipeline. Validation gates can then quarantine suspect data before consumers use it. At scale, these checks need explicit response policies so detecting an upstream problem leads to containment rather than merely another dashboard signal.

The first step is to quantify data quality in dimensions that support release decisions. Completeness measures whether expected records and fields are present. A daily data pipeline expected to produce 10 million user events but delivering only 8.2 million user events is 82 percent complete relative to that expectation. Investigation must distinguish missing delivery from a legitimate change in source volume. Consistency captures schema compliance and referential integrity; an age field with an allowed range of 0 to 120 would reject values such as 999 or -1, which may represent leaked sentinels. A policy might quarantine a batch when more than 5 percent of its checks fail, but a single critical violation can warrant rejection. The policy must weigh the consequences of invalid inputs against delayed or unavailable data.

Timeliness measures freshness against the SLO of the consuming model. Fraud detection may need features less than 100 milliseconds old, while demographic features can tolerate staleness measured in days; the alert threshold should therefore be tied to the feature's use, not a global constant. Accuracy asks whether values remain correct within expected distributions. Sensor drift after calibration lapses, for example, can leave values well-typed but wrong. Statistical tests such as Kolmogorov-Smirnov for continuous features, chi-square for categorical features, and maximum mean discrepancy for high-dimensional data detect distribution changes that warrant investigation; they do not establish that individual values are accurate.

Validation then turns those measurements into a layered defense. Schema validation enforces expected column names, types, and constraints at ingestion; tools such as Great Expectations, TensorFlow Data Validation, and Pandera provide declarative schemas with automated checks. Distribution monitoring tracks feature distributions over time, catching drift that may not violate a type constraint but still indicates an upstream change whose effect on model performance requires evaluation. Cross-field validation adds the business logic that neither schema nor marginal distributions can express: if `country="USA"`, the `zip_code` should match US postal formats; if `order_status="shipped"`, a `shipping_date` should exist; and age derived from birthdate should match any explicit age field.

Debugging data quality incidents


A recommendation model's click-through rate (CTR) drops 8 percent over 5 days. The initial hypothesis focuses on model drift, but the constructed investigation reveals a feature computation defect.

The investigation starts with the model symptom and then works backward through the data path. Model metrics confirm that CTR declined from 4.2 percent to 3.87 percent, but freshness checks show that features still arrive within the 1-hour SLO. That weakens the stale-pipeline hypothesis only if source progress, event-time coverage, and the affected entities are also verified; refresh age alone cannot exclude stale inputs. The investigation therefore tests semantic change as well. Distribution analysis then shows the mean of `user_engagement_score`, the shared feature whose redefinition section 6 used to motivate versioning, shifting from 0.42 to 0.31, a 26 percent decline, and lineage tracking ties the shift to an upstream pipeline version deployed 5 days earlier.

The shift and deployment history make the new pipeline a candidate cause; a changed population could also move the mean. Replaying the same source records through both pipeline versions with identical event cutoffs isolates the computation. In this scenario, the new version uses a different aggregation window even though its declared feature definition is unchanged, while the previous version matches that definition. This same-record comparison establishes a feature computation defect. The defect is the same class of silent semantic change that feature versioning is meant to name before release; the marginal distribution alone would not establish it.

Assuming revenue falls in proportion to CTR and traffic is uniform over the interval, the modeled impact is 8 percent of \$15M/week over 5 days, producing \$857K in lost revenue. If automated alerts and effective containment shorten exposure to 4 hours, the modeled impact falls by 97 percent. The resolution restores the previous pipeline and compatible model-feature state. A distribution validation gate then blocks unexplained feature shifts exceeding the scenario's 10 percent threshold; semantic tests remain necessary for bugs that do not cross that band.

Operational integration



Four-hour alerts shrink a five-day exposure window 30×.

Data quality operations integrate into production systems by turning checks into enforceable contracts. **Data contracts** establish formal agreements between data producers and consumers, specifying schema requirements, freshness SLOs, quality thresholds for completeness and accuracy, and escalation procedures for violations. Release controls enforce those agreements by checking proposed schema or computation changes and requiring consumer review when compatibility cannot be established.

The contract becomes operational through continuous validation and incident response. Ingestion checks reject source data that violates declared constraints, transformation checks test computed values, and serving gates block features known to be invalid. When a check fails, alerts identify severity and affected systems, circuit breakers contain the bad path, and quarantined batches preserve evidence for investigation. A fallback may use cached or last-known-good features only while they remain acceptable under the consuming model's freshness and compatibility contract. Root-cause analysis then repairs the pipeline rather than only clearing the current alert.

At enterprise scale with thousands of features, individual checks need a shared routing and grouping policy. Source-system grouping connects symptoms of an upstream failure, such as a payment-processing outage affecting several features. Computation-pipeline grouping directs investigation toward shared transformation code or dependencies. Update-frequency grouping separates streaming features from daily batch features because freshness contracts differ. Business-domain grouping routes evidence to teams that understand the affected models. These groupings reduce duplicate notifications without removing feature-level checks or suppressing an urgent contract violation.

Freshness monitoring applies the same aggregation rule to time. For 10,000 features updated at different frequencies, checking every feature value can consume substantial capacity. Sampling 1 percent of representative entities reduces that work, but the sample still grows with the entity population and must cover the relevant sources and partitions. Pipeline-level aggregation can reduce checks further when one pipeline updates 500 features and its source-progress watermark covers the group. A recent successful update alone cannot rule out a stalled partition or missing entities. With a bounded number of checks per feature, monitoring can maintain $\mathcal{O}(N_{\text{features}})$ overhead, but

that bound trades exhaustive coverage for aggregate or sampled evidence. Critical features need checks whose coverage and detection delay match their failure consequences.

Feature definitions, historical availability, and freshness now belong to the same governed state as model artifacts. A release pipeline must validate that state as a unit, retain a compatible rollback target, and limit live exposure while evidence accumulates.

CI/CD for ML at Scale

Versioned model dependencies and feature contracts define a candidate release, but they do not establish that it is safe to expose. Each model update must navigate the dependency web: an embedding model update might require re-evaluation of four transitive downstream components, including the business rules layer, before any component can safely reach production. This coordination challenge transforms CI/CD from a per-model concern into a platform orchestration problem. Software integration tests already validate interacting components. ML CI/CD adds learned behavior and changing data to that contract, requiring evidence that upstream changes preserve downstream quality and that each deployment state remains compatible.

Continuous integration and continuous deployment practices for machine learning differ from traditional software CI/CD in what they must validate. Software CI/CD focuses on code correctness and deployment reliability, whereas ML CI/CD must additionally validate data, verify model performance, and manage the interactions between code, data, and learned parameters. At platform scale, these challenges multiply as pipelines must coordinate across hundreds of models with varying requirements.

Training pipeline automation

CI/CD for machine learning begins by making each training run an accountable producer of deployable artifacts. The pipeline records versioned inputs and execution conditions, defines recovery behavior, and preserves the results needed for deployment validation. Automation makes those obligations repeatable; reproducibility still depends on the recorded data, code, environment, and sources of nondeterminism.

Pipeline stages

Figure 0.166 stages the delivery lifecycle across continuous integration, training, and deployment, with an evaluation gate that blocks or registers a candidate. Monitoring returns drift signals to data validation. A confirmed population change may justify retraining, while a corrupted feature pipeline requires repair before it supplies another training run. The sequence matters because each stage establishes evidence for the next rather than treating every alert as permission to train and deploy.

1. Data validation pins the data version and rejects schema, freshness, or distribution failures before they consume training capacity.
2. Feature engineering preserves the feature contract between training and serving, so preprocessing changes do not become silent production regressions.
3. Training records code, data, hyperparameters, hardware envelope, and random seeds so a promising artifact can be reproduced or challenged later.
4. Evaluation compares the candidate with baselines, slice metrics, latency budgets, and task-specific gates before any user traffic is exposed.
5. Artifact generation packages the model with its serving configuration, dependency versions, and rollback target.
6. Registration records the artifact in the model registry with lineage, approvals, and deployment eligibility.

Each stage needs a defined retry boundary and durable outputs. If evaluation fails, the pipeline can reuse completed data-validation and feature-engineering results when their data, code, configuration, and relevant execution environment remain unchanged. Missing outputs or a changed dependency invalidate that reuse. Idempotent publication prevents a retry from registering duplicate artifacts or repeating external side effects.

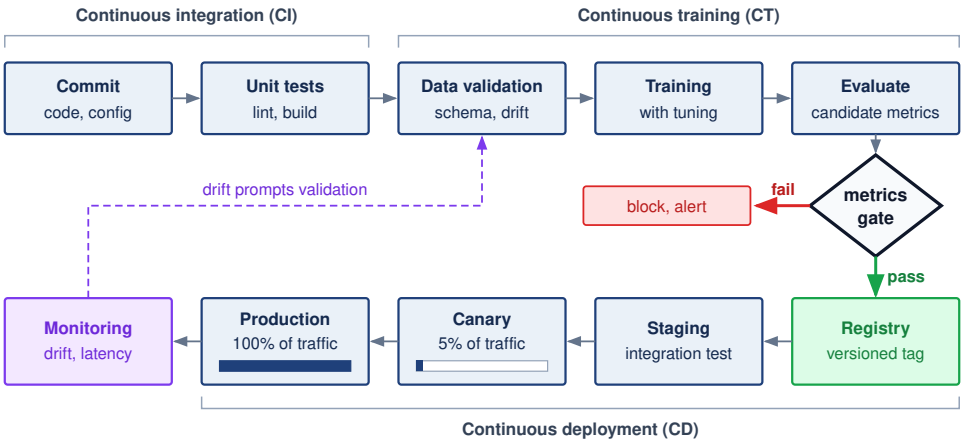


Figure 0.166: ML CI/CD pipeline: Read the top row left to right and the bottom row right to left. Continuous integration checks each commit; continuous training validates data, trains, and evaluates against a metrics gate that either blocks the candidate and raises an alert or registers it. Continuous deployment then moves the registered version through staging, a canary slice of traffic, and full production. Monitoring closes the loop: detected drift returns to data validation and investigation before a decision to retrain.

Pipeline orchestration

Training pipelines require orchestration systems that make dependency order, resource allocation, and failure recovery explicit. The orchestrator represents the workflow as a directed acyclic graph (DAG), tracks dependencies between stages, retries transient failures without rerunning unaffected work, schedules scarce resources such as GPUs and memory, caches intermediate results when inputs are unchanged, and records logs and artifacts for later debugging.

Common orchestration choices include Kubeflow Pipelines[6] (Bisong 2019), Airflow with ML extensions, and cloud-native solutions like Vertex AI Pipelines or SageMaker Pipelines. The choice depends on which dependency and resource contracts the platform must enforce, as well as existing infrastructure, team expertise, and scale requirements. Orchestration fixes the execution contract; parameterization fixes the variation contract, so the same graph can run against different data, models, and hardware envelopes without becoming a new program each time.

Pipeline parameterization

Effective pipelines separate configuration from code (listing 0.17). The listing's evaluation block names two standard ranking metrics: normalized discounted cumulative gain at rank 10 (NDCG@10), which rewards placing relevant items near the top of a list, and mean reciprocal rank (MRR), which averages the inverse position of the first relevant item.

6 | **Kubeflow**: Kubeflow Pipelines connects workflow dependencies to Kubernetes execution and resource requests. Declared requests let scheduling account for resources needed by a step, but do not eliminate contention on shared storage, networks, or other services. Platform policy must therefore combine admission and resource allocation with measurements of actual execution behavior.

Listing 0.17: Pipeline Parameterization: A YAML configuration separating data paths, feature sets, training hyperparameters, and evaluation criteria from pipeline code.

```yaml
training_pipeline:
  model_type: transformer_ranking
  data:
    train_path: gs://data/train/2024-01-*
    eval_path: gs://data/eval/2024-01-15
    schema_version: v3.2
  features:
    user_features: [embedding, history, demographics]
    item_features: [embedding, attributes, popularity]
  training:
    epochs: 10
    batch_size: 4096
    learning_rate: 0.001
    optimizer: adam
    hardware: 4xA100
  evaluation:
    metrics: [ndcg_10, mrr, coverage]
    baseline_model: ranking_v2.1.0
```

The separation enables configuration-driven training because the platform can vary data versions, hyperparameters, and resource requests without rewriting pipeline code. A parameter file is also an audit input, but a path or version label alone does not prove which bytes a run consumed. The execution record must resolve those references to immutable data and artifacts and retain the actual environment, feature definitions, and evaluation policy. That record lets a release reviewer reconstruct the conditions behind the candidate's evidence.

Validation gates

Validation gates determine whether a trained model should proceed toward production. Effective gates balance thoroughness against deployment velocity. A release gate consumes a versioned evidence bundle tying the candidate and its dependencies to metrics, thresholds, and accountable owners. Model performance, latency, policy and fairness constraints, data quality, and operational readiness each answer a different failure mode. Together they form an evaluation contract that remains attached to the release as it moves from offline validation to production experiments.

Performance gates

Performance validation combines minimum acceptable performance with comparisons against the production baseline and historical results. The release policy names the primary improvement sought and the regression bounds permitted on secondary metrics, rather than requiring every metric to improve simultaneously. Listing 0.18 demonstrates this multi-criteria evaluation.

Listing 0.18: Performance Gate Evaluation: A validation function that checks absolute thresholds, relative improvement over the production model, and regression bounds on secondary metrics.

```
def evaluate_performance_gate(
    candidate_metrics, production_metrics, thresholds
):
    """
    Evaluate whether candidate model passes performance gates.

    Returns tuple of (passed: bool, reasons: list)
    """
    import math

    required_metrics = ("ndcg_10", "mrr", "coverage")
    required_thresholds = ("min_ndcg", "min_improvement", "max_regression")
    try:
        values = [candidate_metrics[k] for k in required_metrics]
        values += [production_metrics[k] for k in required_metrics]
        values += [thresholds[k] for k in required_thresholds]
        valid = all(math.isfinite(v) for v in values)
        valid = valid and production_metrics["ndcg_10"] > 0
        valid = valid and 0 <= thresholds["max_regression"] <= 1
    except (KeyError, TypeError, ValueError):
        valid = False
    if not valid:
        return False, ["Missing, nonfinite, or invalid gate inputs"]

    reasons = []

    # Absolute threshold check
    if candidate_metrics["ndcg_10"] < thresholds["min_ndcg"]:
        reasons.append(
            f"NDCG_10 {candidate_metrics['ndcg_10']:.4f} below minimum {thresholds['min_ndcg']}"
        )

    # Relative improvement check
    relative_improvement = (
        candidate_metrics["ndcg_10"] - production_metrics["ndcg_10"]
    ) / production_metrics["ndcg_10"]
    if relative_improvement < thresholds["min_improvement"]:
        reasons.append(
            f"Improvement {relative_improvement:.2%} below minimum {thresholds['min_improvement']:.2%}"
        )

    # Regression check on secondary metrics
    for metric in ["mrr", "coverage"]:
        if candidate_metrics[metric] < production_metrics[metric] * (
            1 - thresholds["max_regression"]
        ):
            reasons.append(
                f"{metric} regression exceeds {thresholds['max_regression']:.2%} tolerance"
            )

    return (len(reasons) == 0, reasons)
```

Latency gates

Production models must meet workload-specific latency requirements. Validation measures representative request shapes at expected load, batching, and hardware. Table 0.159 gives illustrative thresholds, not universal model-type requirements. The LLM row measures time to first token (TTFT), reflecting the prefill phase of section 2; completion latency requires a separate output-length contract for decode. The other rows measure request-to-response latency.

Table 0.159: Illustrative latency gates: Assumed p50 and p99 service targets under a declared request distribution and load. LLM targets refer to TTFT; other targets cover the complete response. Product risk and the service contract determine thresholds and exception authority.

Model Type	p50 Target	p99 Target	Gate Action if Exceeded
LLM (TTFT)	500 ms	2000 ms	Block deployment, require optimization
Recommendation	10 ms	50 ms	Block deployment
Fraud Detection	5 ms	20 ms	Block deployment, high priority
Vision	50 ms	200 ms	Warning, conditional approval

Latency gates catch overt performance violations, but some regressions pass every gate and still degrade the product. The most dangerous failures are semantically silent: valid outputs built on corrupted inputs.

Example 12.2: Silent model regression

Scenario: A high-throughput product ranking model (25,000 QPS) passes offline validation and serving latency gates (per-request latency $L_{\text{lat,SLO}} < 12$ ms), but causes a 3.2 percent conversion rate drop post-deployment.

Diagnosis: An upstream schema change caused a key user-affinity feature to return `null` for 8 percent of queries. The serving layer silently imputed `null` as `0.0`, a valid float value, so HTTP error rates and latency remained normal while prediction quality degraded unalerted for 48 hours.

Systems lesson: Syntactically valid feature imputations cause semantically silent production failures. Automated release pipelines and monitoring systems must evaluate feature distribution shifts and null rates alongside system uptime and latency SLOs.

Fairness gates

Fairness concepts become operational at release time when policy choices are encoded as thresholds. For models affecting users, fairness validation[7] turns a policy commitment into a release gate. The platform cannot simply ask whether "the model is fair" because different contexts encode fairness differently. In operations, those definitions first appear as executable thresholds. Equation 0.60 expresses one operational choice: the probability of a positive prediction must differ by less than threshold ϵ_{fair} between protected groups a and b. Equation 0.61 encodes a different choice from the equalized-odds family: prediction behavior must be similar across groups after conditioning on the true outcome (Hardt et al. 2016).

$$\text{Demographic Parity: } |\Pr(\hat{Y}=1 \mid G=a) - \Pr(\hat{Y}=1 \mid G=b)| < \epsilon_{\text{fair}} \tag{0.60}$$

$$\text{Equalized Odds: } |\Pr(\hat{Y}=1 \mid Y=v, G=a) - \Pr(\hat{Y}=1 \mid Y=v, G=b)| < \epsilon_{\text{fair}}, \quad \forall v \in \{0,1\} \tag{0.61}$$

where G represents the protected attribute, $\hat{Y}$ is the model prediction, and Y is the true outcome. The operational point is not that every gate should enforce every definition. The gate must record which definition the organization chose, compare the measured value against historical baselines as well as absolute thresholds, and route borderline cases to human review because a near-threshold fairness result is also a governance decision.

Data quality gates

Before training or deployment, data quality validation checks declared properties (Caveness et al. 2020). Schema checks test required fields and types, distribution checks compare observed features with reference bounds, and freshness and completeness checks enforce their timestamp and missing-data contracts. Passing these checks establishes evidence for the properties tested; it does not rule out an untested semantic error.

[7] **Fairness Validation in Machine Learning**: Multiple fairness definitions exist, including demographic parity, equalized odds, and calibration, and unequal outcome base rates with imperfect prediction can make predictive parity and equal error rates incompatible, and can make groupwise calibration incompatible with balanced scores across outcome classes (Chouldechova 2017; Kleinberg et al. 2017). This forces a systems design choice: automated validation gates must encode which fairness definition the organization prioritizes, making the gate configuration itself a policy decision that cannot be delegated to a generic threshold.

↪ The fairness criteria behind these gates, and why they cannot all hold at once, are developed in section 7.

These gates catch issues that would otherwise manifest as mysterious model degradation, completing the pre-release evidence bundle before deployment risk shifts from artifact validity to live-traffic exposure. The next control is no longer another offline score; it is the amount of production traffic allowed to test the artifact under real conditions.

Staged rollout strategies

Staged rollout is the mechanism that turns deployment risk into a controllable exposure budget. Traffic increases only after the model earns each larger blast radius through continued acceptable performance.

> Napkin Math 12.5: The safety of staged rollouts
>
> **Problem**: A team is deploying a new ranking model. A blue-green switch that moves all traffic at once (100 percent cutover) exposes all users to any potential bugs. A "Canary" deployment starts at 5 percent traffic. How much does the canary approach reduce the deployment's "Risk Exposure"?
>
> **Math**: Assume the same request rate, per-request harm, and time to effective rollback in both deployments. Under those assumptions, exposure is proportional to the affected traffic share; comparing shares alone would be insufficient if the smaller canary took longer to reveal the failure.
>
> 1. **All-at-Once Blue-Green Exposure**: 100 percent of users affected until rollback.
> 2. **Canary Exposure**: 5 percent of users affected until rollback.
> 3. **Risk Mitigation**: $100/5 = 20\times$.
>
> **Systems insight**: Limiting initial exposure to 5 percent reduces affected traffic by 20× under the shared observation and rollback assumptions. This limits harm while the platform collects live evidence. It does not guarantee detection of rare failures or delayed quality effects, so the release policy must choose its observation window and containment triggers alongside the traffic share.

Blue-green deployment

Blue-green deployment prepares the new version (green) in a parallel environment while the current version (blue) serves production traffic. The environments provide comparable serving capabilities but hold different release versions. After readiness checks pass, the routing layer transfers traffic according to the release policy; switching time depends on routing propagation and treatment of in-flight requests.

For a large model, keeping both releases ready can reserve substantial accelerator memory. Separate full-capacity fleets duplicate the weights and serving resources during the transition, while a smaller candidate fleet reduces that initial reservation. Fast rollback requires enough ready capacity for the previous version; otherwise model loading and replica startup become part of recovery time. Capacity planning must therefore account for the overlap between releases as well as the steady-state serving allocation.


The environment layout and the traffic policy are separate decisions. A blue-green deployment can switch all traffic at once (the policy notebook 12.5 assumed) or expose the green environment through canary stages. An all-at-once switch forgoes the evidence from limited live exposure, while staged routing retains parallel-environment costs for longer. The release contract determines whether that additional observation and rollback capacity justify their resource cost.

Canary deployment

Canary deployment[8] routes a small percentage of traffic to the new version while monitoring for regressions. If metrics remain acceptable, traffic percentage increases until the new version serves all traffic.

A typical progression moves from 1 percent to 5 percent to 25 percent to 50 percent to 100 percent as evidence accumulates. The 5 percent canary in notebook 12.5 is the second of these stages; opening

[8] **Canary Deployment**: Named after the coal-mining practice of using canaries to detect toxic gases. In an ML release, a limited traffic cohort supplies early evidence while bounding initial exposure. Quality regressions can leave health checks green, so the canary needs model and product metrics as well as service-health signals; delayed outcomes can still postpone detection.



Each canary stage earns a larger share of live traffic.

at 1 percent bounds initial exposure further. Determining the duration of each stage is critical. Equation 0.62 relates stage duration to sample requirements, request rate, and traffic percentage, giving a lower bound on the time needed to collect the planned sample:

$$T_{\text{stage}} = \frac{n}{\lambda_{\text{arr}} \times p_{\text{stage}}} \tag{0.62}$$

where T_{stage} is the time needed to collect the planned observations, n is the sample requirement from the experiment design, λ_{arr} is the request rate, and p_{stage} is the traffic share expressed as a fraction. This is a collection-time bound, not a complete stopping rule; delayed labels, correlated requests, and the required observation window can extend the stage.

Canary duration calculation

A model serves 1 million requests per hour. Suppose its canary plan specifies approximately 10,000 samples per variant. That is a guardrail sample, sized to catch a large regression quickly before exposure widens, not the sample needed to confirm a small improvement. Section 10 derives sample size from the baseline rate, effect size, confidence, and power, and its worked example needs about 30,000 samples per variant just to detect a 10 percent relative change at a 5 percent baseline click-through rate. Smaller effects need far more, so promotion evidence comes from the full experiment, while the canary stages below take their guardrail sample as an input.

At 1 percent canary traffic: $T_{\text{stage}} = \frac{10{,}000}{1{,}000{,}000 \times 0.01} = 1$ hour. At 5 percent canary traffic: $T_{\text{stage}} = \frac{10{,}000}{1{,}000{,}000 \times 0.05} = 0.2$ hours $= 12$ minutes.

The organization might configure five rollout stages:

- 1 percent for 2 hours (2× minimum for buffer)
- 5 percent for 30 minutes
- 25 percent for 30 minutes
- 50 percent for 1 hour
- 100 percent deployment

The schedule totals approximately 4 hours. Promotion still requires the planned statistical test and guardrail windows to pass; elapsed time alone does not establish confidence.

Four hours is far shorter than the ensemble soak of table 0.154 or the multi-region waves that section 9 develops later in this chapter, because each schedule answers a different question. A guardrail sample of fast outcomes, such as errors and clicks, fills in hours. An ensemble change whose effects surface through delayed outcomes needs days of soak. A multi-region rollout repeats evidence collection region by region. The slowest outcome the release must observe, not the traffic share, sets the length of the schedule.

Rollout risk management

Canary stages bound exposure, but not every change deserves the same stages. Deployments differ in risk, so effective CI/CD systems estimate each change's risk before deciding how quickly to expose it. Equation 0.63 formalizes deployment risk as the product of regression probability, impact severity, and exposure level, providing a quantitative foundation for risk-based rollout decisions:

$$\text{Risk}_{\text{rollout}} = \Pr(\text{regression}) \times \text{Impact}_{\text{regression}} \times E_{\text{exposure}} \tag{0.63}$$

where $\Pr(\text{regression})$ is the probability that the change causes a regression, $\text{Impact}_{\text{regression}}$ is the conditional harm per exposure unit, and E_{exposure} is the number of those units exposed during the rollout period. For example, harm per affected request multiplied by exposed requests gives a total harm estimate. If impact already denotes total loss over the rollout, multiplying by exposure again would double-count it.

The rollout risk framework distinguishes three operational levers. Pre-release evaluation screens out known defects and provides evidence about regression probability ($\Pr(\text{regression})$). Validated fallbacks can reduce conditional harm ($\text{Impact}_{\text{regression}}$) when a defect occurs. Traffic limits, regional isolation, and prompt containment bound exposure (E_{exposure}). Longer observation at a small traffic

share can reveal delayed failures, but also exposes that cohort for longer. The release policy must balance evidence collection against accumulated harm rather than assuming that every longer hold reduces risk. Exposure accumulates in time as well as in traffic share. A regression that no alarm catches keeps charging its harm for every hour it stays live, and notebook 12.6 prices one such day.

Napkin Math 12.6: The cost of a delayed alert

Problem: A team deploys a recommendation model that has a silent bug: it reduces click-through rate (CTR) by 0.5 percentage points (10 percent relative), from 5 percent to 4.5 percent. If the service handles 5,000 requests/s and each click is worth \$0.50/click, how much revenue is lost if detection and remediation take 24 hours?

Math:

1. **Total Requests**: 5,000 requests/s $\times$ 86,400 s/day = 432,000,000 requests.
2. **Lost Clicks**: 432,000,000 requests $\times$ 0.005 = 2,160,000 lost clicks.
3. **Total Financial Loss**: 2,160,000 lost clicks $\times$ \$0.50/click = \$1,080,000.

Systems insight: At the assumed traffic and value per click, a 0.5 percentage-point regression costs \$1,080,000 per day. Earlier detection creates value when it enables effective containment sooner. Monitoring and rollback therefore share one operating objective: reducing the time users remain exposed to a harmful release. A drift alarm alone neither establishes the revenue loss nor stops it.

Risk categories

The risk equation becomes actionable when its estimates inform a rollout policy. Table 0.160 gives qualitative examples of that mapping, from a fast canary for a bounded change to additional validation and review for a consequential one. A change label alone does not supply a calibrated regression probability; the decision also needs dependency scope, available evidence, and the consequences of failed containment.

Table 0.160: Risk-based rollout strategy selection: Four qualitative risk categories mapped to deployment strategies. Teams compute numeric rollout risk as the product of regression probability, impact, and exposure in equation 0.63, then choose the rollout pattern that matches the resulting risk profile.

Category	Typical change (drives $\Pr(\text{regression})$)	Typical impact ($\text{Impact}_{\text{regression}}$)	Rollout Strategy
Low	Minor code fix	Limited user impact	Fast canary
Medium	Retrained model	Engagement effects	Standard canary
High	New architecture	Revenue impact	Extended shadow + slow canary
Critical	Core model change	Safety implications	Shadow + human review + staged

Automated rollback triggers

Risk categories decide how cautiously traffic should expand, but rollback triggers decide when expansion must stop. The trigger configuration in listing 0.19 makes that stop condition executable by binding each monitored metric to a threshold, observation window, and minimum sample count.

Listing 0.19: Automated Rollback Configuration: Metric-specific thresholds, observation windows, and minimum sample sizes that balance sensitivity against false triggers.

```
rollback_config = {
    "metrics": {
        "engagement_rate": {
            "threshold": -0.02,  # 2% relative decline triggers rollback
            "window_minutes": 15,
            "min_samples": 1000,
        },
        "error_rate": {
            "threshold": 0.01,  # 1% absolute increase triggers rollback
            "window_minutes": 5,
            "min_samples": 500,
        },
        "latency_p99": {
            "threshold": 1.5,  # 50% relative increase triggers rollback
            "window_minutes": 5,
            "min_samples": 100,
        },
    },
    "rollback_action": "immediate",  # or 'gradual' for less severe issues
    "notification": ["oncall", "model-owner"],
}
```

Automated rollback must balance sensitivity against false triggers. Minimum sample counts and window durations limit unstable decisions, but they do not define a statistical test. The release contract must also specify the comparison, uncertainty rule, and repeated-monitoring policy. Immediate safety guardrails may require containment before statistical significance is available. These triggers assume a single serving domain. A fleet that spans regions must also keep its version boundary coherent while traffic expands or retracts, which turns rollout and rollback into a coordination protocol.

Multi-region deployment coordination

Multi-region deployment carries the fault-tolerance concern for recoverable state into the inference plane. Geographic distribution adds artifact propagation, routing, and regional recovery decisions to the release protocol. Multiple versions may coexist during a staged rollout, but their compatibility, traffic assignment, and rollback behavior must remain within the release contract.

↩ Geographic replication of serving replicas, with the spare regional capacity and gradual traffic return it requires, is established in section 20.

Coordination challenges

Multi-region ML deployment couples artifact readiness with input readiness. Large model artifacts consume transfer and loading capacity before a region can serve the new version. For models that retrieve features, receiving the binary is not enough: the region must also provide the feature versions and freshness that the candidate validated. If Region B loads a new model before its required embeddings arrive, requests may fail or use incompatible inputs. The readiness check must therefore cover the model, its feature dependencies, and serving health as one versioned state.

Uncontrolled version mixing is the failure mode that binds multi-region deployment. Staged releases intentionally serve multiple versions, but the protocol must preserve compatibility and experiment assignment even when clocks, traffic volume, routing, and rollback behavior differ by region.

Clock skew and asynchronous progress make timestamps insufficient to establish rollout state. At a planned 2:00 PM UTC start, Region A may begin its 1 percent canary while Region B is still loading the candidate. The coordinator needs explicit readiness and phase acknowledgments to distinguish a permitted staggered release from a failed transition. Regional version differences are acceptable only when routing preserves the declared compatibility and assignment rules.

Regional traffic variation turns the same percentage into different amounts of evidence. A larger canary share in a low-volume region can still collect fewer eligible observations than a smaller share in a high-volume region. The platform must evaluate per-region sample counts, assignment units,

and outcome delays against the experiment plan; traffic percentages alone do not establish statistical power.

Cross-region routing can expose version skew when requests move for latency, load balancing, or failover. If an experiment assigns treatment by user, routing must preserve that assignment across regions or record and handle any deviation according to the experiment plan. Mixed versions alone do not invalidate an experiment; unplanned changes in exposure violate the assumptions on which its interpretation depends.

Rollback is the final consistency test. Reverting one region changes the available version set and can violate assignment or dependency assumptions elsewhere. A regional rollback is valid when the release contract permits that state; otherwise the coordinator must contain exposure across the affected regions. Rollback therefore belongs in the rollout protocol rather than an ad hoc emergency procedure.

Deployment strategies

Multi-region coordination trades deployment duration against permitted regional skew. In a sequential regional rollout, each region completes its canary progression before the next begins, limiting early exposure while extending the schedule. A globally coordinated rollout instead requires regions to satisfy shared readiness and activation conditions. Logical ordering does not make network delivery simultaneous; routing must enforce the version boundary while activation propagates. A hybrid rollout permits regional progress within declared phase or version bounds, pausing regions when local evidence is insufficient or further progress would exceed the allowed skew. The appropriate policy follows the service's compatibility, assignment, and availability requirements.

An illustrative rollout across 5 regions uses three waves followed by final validation:

1. Canary region (lowest traffic): Full canary cycle, 24 to 48 hours
2. Early adopter regions (2 regions, 20 percent global traffic): Parallel deployment, 24 to 48 hours
3. Majority regions (2 regions, 70 percent global traffic): Parallel deployment, 24 to 48 hours
4. Final validation: Cross-region consistency check, 12 to 24 hours

The assumed windows total 3.5 to 7 days. Actual promotion still depends on regional evidence and guardrails, so low traffic, delayed outcomes, or a failed check can extend the schedule.

Traffic management during transitions

Routing controls enforce different parts of the release contract. Region affinity keeps a user's requests in one region, but does not by itself prevent version changes within that region. Version pinning directs requests to replicas serving the assigned release, including during permitted failover. Restricting cross-region fallback can simplify an experiment's exposure boundary, but sacrifices availability when the selected region fails. The platform chooses and tests these controls together so assignment remains interpretable under both normal routing and recovery.

Consistency models for deployment

The choice of activation contract affects both coordination cost and the interpretation of deployment metrics. Table 0.161 compares deployment consistency models for multi-region systems. Globally ordered activation establishes a shared transition order, eventual convergence permits temporary regional divergence, and bounded staleness limits that divergence. The application must specify which guarantee its decisions require; a financial use case alone does not prohibit controlled experiments or staged versions.

Table 0.161: Consistency models for multi-region deployment: Version activation contracts trade coordination cost against permitted divergence. Financial or safety-related use does not by itself require identical versions everywhere: assignment consistency, compatible schemas, auditability, and explicitly authorized experiments may permit staged versions. Select the guarantee required by the decision being served.

Model	Guarantee	Use Case	Coordination Overhead
Strong	Globally ordered version activation	One shared activation contract	High (global synchronization)

Model	Guarantee	Use Case	Coordination Overhead
Eventual	Regions converge to same version	Content recommendations	Low (independent progression)
Bounded staleness	Regions within k_{skew} versions of each other	Real-time ranking	Medium (version monitoring)

For A/B testing, the serving system must implement the declared assignment and record actual exposure. A user assigned to the candidate should receive that candidate across permitted regional routes unless the experiment explicitly models another exposure policy. Unrecorded fallback to the old version changes the intervention being measured and can bias the comparison. Different versions across control and treatment groups are intentional; they are not a relaxation of the assignment contract.

Rollback coordination

Rolling back a multi-region deployment requires careful coordination to prevent oscillation and mixed-version serving. The rollback protocol executes across two ordered phases. First, the coordinator halts traffic to the new version globally by broadcasting rollback intent, waiting for every region to acknowledge that it has stopped routing new requests to the rejected version, and allowing in-flight requests to drain; any region failing to acknowledge before the timeout expires is marked unhealthy. Next, the coordinator restores the old version globally once it confirms that all healthy regions serve only the previous release, re-enabling normal traffic routing, clearing transient deployment state, and resetting the system for a future attempt.

The acknowledgment barrier prevents restoration from completing while reachable regions still route new requests to the rejected version. A timeout alone cannot stop an isolated region from serving; the serving path must enforce a lease, routing exclusion, or equivalent fencing rule. The release contract must specify what happens to in-flight requests and to availability during that interval.

Partial rollback allows rolling back individual regions while others continue. This is appropriate when issues are region-specific (infrastructure problems, regional traffic patterns) rather than model-inherent. The deployment coordinator tracks per-region state and prevents inconsistent global decisions based on partial information.

Multi-region coordination overhead

Consider an illustrative five-region deployment with an assumed 80 ms one-way delay for each coordination leg, no failures, and negligible processing delay. The coordination protocol requires five steps:

1. Announce deployment intent (broadcast to all regions): 80 ms
2. Receive acknowledgments (wait for slowest region): 80 ms
3. Execute deployment phase (region-local): variable
4. Confirm completion (broadcast): 80 ms
5. Receive confirmations (wait for slowest region): 80 ms

Minimum coordination overhead per phase transition: 320 ms for the synchronization protocol itself. For a deployment with 5 canary phases, coordination adds 1.6 seconds to total deployment time, negligible compared to the hours spent in each phase.

The coordination service nevertheless becomes a critical dependency. Its failure policy must specify whether regions may continue serving their last authorized state and whether any further promotion is permitted. A shared activation barrier can halt progress while existing traffic continues; a policy allowing regional independence can permit local progress within its compatibility limits. A bounded-skew contract must stop progress before the bound is exceeded, rather than merely alert afterward. Replicating coordinator state through a consensus protocol can preserve decisions across replica failures while a quorum remains available, but routing enforcement and regional readiness still determine whether those decisions hold in the serving path.

Production experimentation as a release gate

Once rollout coordination preserves version boundaries, production experiments can evaluate a candidate under a controlled exposure policy. Shadow traffic tests behavior without returning candidate outputs, interleaving compares rankers within a combined presentation, and A/B tests compare assigned variants. Network-effect checks determine whether interactions between experimental units undermine that comparison. These methods answer different questions; every release need not use all of them. Each supplies evidence for the online-experiment plane of the evaluation contract assembled in section 11, so the statistics that follow are tools for filling one row of the release record, not a separate discipline. Before exposure begins, the release record must name the invariant metrics, decision threshold, maximum user and infrastructure blast radius, stopping rule, rollback owner, and evidence required for promotion. A candidate that improves its primary metric but exhausts latency, reliability, fairness, or cost headroom fails the gate.

Shadow deployment and traffic replay

Shadow deployment runs the new model alongside production, receiving copied inputs and logging outputs without returning them to users. Figure 0.167 contrasts mirroring to an isolated candidate (Panel A) with canary deployment (Panel B), which exposes a controlled share of traffic to candidate responses. Shadow execution can reveal defects absent from offline tests, but its resource consumption and external side effects still require containment. It also cannot reveal how users would react to outputs they never receive.

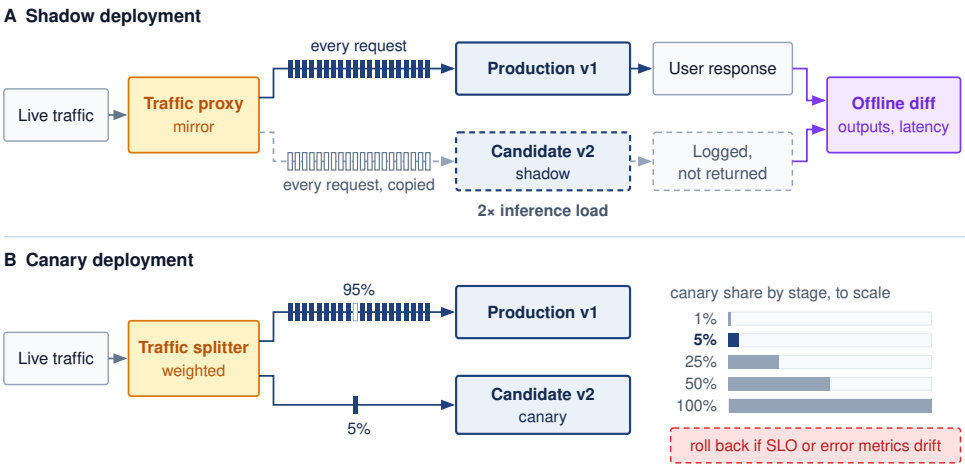


Figure 0.167: Shadow and canary deployment: In shadow deployment (A), the proxy mirrors all production traffic to the candidate; users receive only the production response, and both outputs are compared offline. No user sees the candidate's output, but mirroring every request doubles inference load, so the shadow path needs its own capacity and must be isolated so it cannot slow production. In canary deployment (B), the splitter sends a small weighted slice of live traffic to the candidate (here the 5 percent stage) and widens it through the 1, 5, 25, 50, and 100 percent stages as evidence accumulates, rolling back if SLO or error metrics drift.

Shadow deployment earns its duplicate infrastructure cost when it answers validation questions offline tests cannot. A full-load shadow run measures errors, memory growth, and latency against the release SLOs. A model that passes tests on small datasets may exhibit leaks or resource contention under sustained production traffic. A pass is evidence for the observed workload and duration, not proof that the model will stay healthy under every future load, so the shadow load profile and run length belong in the release record beside the result.

Once the shadow path is isolated, comparison under real traffic adds evidence beyond offline evaluation. Classification outputs may reveal shifts in confidence scores, while recommendation outputs may reveal changes in diversity or category distribution. Rare production inputs can expose failures absent from the validation set, but the observed traffic still bounds coverage. Latency,

throughput, and resource measurements test capacity assumptions only to the extent that shadow load, dependencies, and resource contention represent the intended deployment. Output differences require interpretation; they do not by themselves establish improvement or regression.

Shadow deployment requires capturing and replaying production traffic, and the replay choice determines the trade-off among fidelity, cost, and freshness. Three architectural patterns address different operational requirements.

Live mirroring duplicates every production request to the shadow model in real time. The production model serves the response while the shadow model processes the same input in parallel, providing immediate validation at full production scale but requiring shadow infrastructure capable of handling 100 percent traffic load. To keep this validation path from becoming a production dependency, the serving system must invoke shadow requests asynchronously, enforce timeouts, shed shadow load when it falls behind, and isolate resources so shadow work cannot affect production responses.

Sampled replay mirrors a configurable percentage of production traffic to shadow models. This reduces infrastructure costs, but the sampling rate and observation window must still supply enough eligible examples for the targeted failures. Uniform random sampling estimates the sampled traffic population, while stratification can ensure coverage of important segments. Adaptive sampling concentrates investigation on patterns where candidate and production outputs diverge. Such targeted samples need recorded inclusion probabilities and an appropriate estimator before their error rates can be interpreted as fleet-wide rates.

Batch replay captures production traffic logs and replays them asynchronously against shadow models. This decouples validation from the live request path and supports regression tests during available capacity windows. Fidelity depends on what the logs preserve. Replaying request contents without their historical feature state can change the task, while replaying them faster changes queueing and load. A load test must reproduce the relevant arrival pattern and serving conditions; historical replay still cannot observe user responses to candidate outputs.

Effective shadow deployment requires quantitative comparisons tied to the intended change. Output divergence locates differences from production: classification systems track disagreement rates, probability shifts, and class-specific concentration, while regression systems can compare prediction errors or differences between outputs. A changed prediction is not inherently a regression; outcome evidence or a validation oracle must establish its quality. Performance metrics assess latency, throughput, and resource consumption against the operating contract. A candidate with equivalent accuracy but 50 percent higher p99 latency needs review against that contract, even if both versions remain below the SLO.

The metric set must also separate operational failures from genuine model changes. Error-mode metrics count timeouts, exceptions, malformed outputs, and null predictions. A shadow model that times out on 0.1 percent of requests encounters 1,000 failures per day at 1M requests/day scale, and the request patterns that trigger those failures guide remediation. Statistical validation then determines whether observed differences represent genuine model changes or random variation. Because production and shadow models process the same requests, their outcomes are paired. Define a binary failure against a labeled outcome or validation oracle, let n_{prod} count requests on which production fails and shadow succeeds, and let n_{shadow} count requests on which shadow fails and production succeeds. McNemar's large-sample test uses the discordant pairs:

$$\chi^2 = \frac{(n_{\text{prod}} - n_{\text{shadow}})^2}{n_{\text{prod}} + n_{\text{shadow}}}$$

For a one-degree-of-freedom test at $\alpha_{\text{sig}} = 0.05$, reject equal failure probabilities when $\chi^2 > 3.84$. Marginal failure rates of 1 percent and 1.5 percent do not determine this statistic by themselves; the paired discordant counts n_{prod} and n_{shadow} must be retained.

Shadow deployment workflow

Consider an illustrative fraud detection service processing 5 million transactions daily. A sampled shadow phase mirrors 10 percent of traffic for three days. Assume the eligible labeled subset yields recall of 94.2 percent for the shadow model versus 94.5 percent in production, and precision of 87.1 percent versus 82.3 percent. These point estimates alone establish neither improvement nor

noninferiority. The gate also needs labeled counts, paired outcomes, label maturity, uncertainty intervals, and a prespecified recall tolerance. Assume shadow p99 latency is 45 ms versus 38 ms in production, both below the 50 ms SLO. The team proceeds to full shadow only after the statistical gate passes.

The full-shadow phase mirrors 100 percent of traffic for five days. In this scenario, the same labeled-data analysis supports the precision gain at full scale, but the run also exposes an edge case: the shadow model flags 0.02 percent of transactions as errors due to an unexpected feature distribution, which is 1,000 transactions per day. The root cause is heightened sensitivity to outliers in transaction amount. Adjusting feature clipping thresholds reduces the error rate to 0.001 percent in a new shadow run. Because clipping also changes model inputs, the revised candidate must pass the precision, recall, latency, and slice gates again before canary deployment.

Post-deployment validation then compares actual production metrics with the shadow predictions. Precision materializes at 87.3 percent in production vs. 87.1 percent in shadow, a nearby point estimate. Confirming agreement still requires uncertainty bounds and checks for label or traffic shifts; similarity between two percentages is insufficient.

Shadow deployment infrastructure

Operating shadow deployments at scale requires infrastructure that bounds their effect on production. The traffic mirroring layer duplicates selected requests to shadow environments and enforces routing, sampling, timeouts, and load shedding. Shared queues, dependencies, or resource pools can still transmit failures, so isolation must be tested rather than inferred from asynchronous invocation alone. Logging and comparison infrastructure captures outputs from both paths and stores divergence evidence; its storage and query cost is part of the validation budget.

The operational surface completes the loop. Alerting and dashboards surface statistically significant divergences, performance regressions, and elevated error rates to deployment decision makers, while drill-down views expose the request patterns that explain divergence. Resource isolation keeps shadow workloads from stealing production capacity through separate compute pools, network bandwidth allocation, and database capacity. Cloud deployments often achieve that isolation with separate clusters; on-premises deployments require explicit resource partitioning.

Criteria for shadow deployment

Shadow deployment earns its cost when the additional evidence reduces expected deployment harm enough to justify duplicate execution and analysis. New architectures, consequential predictions, live feature dependencies, and tight latency budgets can make that evidence valuable. The decision still depends on which failures shadow traffic can reveal: user responses to candidate outputs remain unobserved, and rare events may remain absent. A demanding application raises the need for validation without establishing that shadow execution alone provides the required assurance.

A smaller shadow phase, or a direct move from offline validation to a bounded canary, can be appropriate when existing evidence covers the relevant failure modes and residual exposure is acceptable. Routine retraining does not establish low risk by itself, because changed data or parameters can alter behavior without an architecture change. The platform should compare the additional evidence shadow execution can provide with its resource cost, the harm a canary could cause before containment, and the time needed to observe that harm.

Interleaving experiments

Interleaving experiments[9] were developed for ranking and search evaluation (Chapelle et al. 2012) and are also used in recommender personalization experiments (Netflix Technology Blog 2017). Rather than splitting users between variants, interleaving presents items from both variants to each user, then measures which items users engage with.

The key insight is statistical efficiency. An interleaving experiment can require far fewer samples than A/B testing, and Netflix reports more than 100× fewer users for some ranking experiments (Netflix Technology Blog 2017), because each user provides direct comparison signals rather than contributing only to aggregate statistics.

In an interleaving workflow, the variants produce ranked lists that a method such as team draft or probabilistic interleaving combines into one presentation. The mixing and credit-assignment

[9] **Interleaving Experiments**: Originally developed for search engine evaluation, interleaving merges results from two rankers into one list shown to each user, then credits clicks to the originating ranker (Chapelle et al. 2012). For fleet-scale recommendation systems iterating on many model variants, the sample efficiency of that within-user comparison translates directly into faster experiment cycles and lower opportunity cost from suboptimal models in production.

rules must control position effects and identify which ranker contributed each item. Engagement with those items supplies a relative preference signal. Figure 0.168 contrasts the between-cohort comparison of A/B testing (Panel A) with this within-user comparison (Panel B). The latter can screen candidates efficiently, but preference within a blended list does not directly measure the effect of deploying either complete ranking policy on long-term outcomes such as retention. Those outcomes still require an experiment designed to measure them.

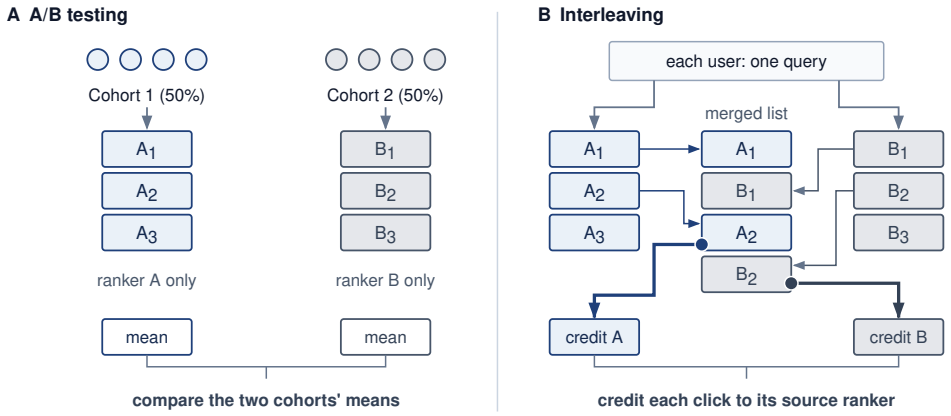


Figure 0.168: Interleaving vs. A/B testing: (A) A/B testing splits users into cohorts, and each cohort sees only one ranker's list, so the comparison is between cohort means and must overcome the variation between users. (B) Interleaving has both rankers rank the same query for each user and merges the results into one list (here by team draft); each click is credited to the ranker that contributed the item, so every user supplies a paired, within-user comparison. That pairing can make ranker-preference screening more sample-efficient; it does not measure the full deployment outcome assessed by an A/B test (Netflix Technology Blog 2017).

A/B test sizing and significance


At platform scale, experiment design determines how long a release occupies capacity and exposes users. A/B testing provides frameworks for comparing model variants (Kohavi et al. 2009, 2020), but its release decision depends on statistical power,[10] significance thresholds, and multiple testing correction. The formulas below supply inputs to the operational contract: the number of eligible observations, the promotion rule, and the permitted stopping schedule. They do not establish that behavior remains reliable outside the evaluated population.

[10] **A/B Testing Power**: The probability that an experiment correctly detects a true effect ($1-\beta_{\text{stat}}$, typically set to 0.8). At fleet scale, the systems cost of power is exposure time. If the expected improvement is small (for example, 0.1 percent), the experiment may require millions of samples to reach statistical significance, consuming substantial serving resources (C_{infer}) for weeks.

For an equally allocated comparison of two proportions, a normal-approximation sample plan uses four parameters: significance level (α_{sig}), statistical power ($1-\beta_{\text{stat}}$), baseline conversion rate (p_0), and minimum detectable effect (δ_{MDE}). Equation 0.64 estimates observations per variant, assuming independent eligible outcomes and a small absolute difference near the baseline rate. Holding the other inputs fixed, the requirement scales inversely with the square of that difference:

$$n = \frac{(z_{\alpha/2} + z_{\beta})^2 \times 2p_0(1-p_0)}{\delta_{\text{MDE}}^2} \tag{0.64}$$

where $z_{\alpha/2}$ is the two-sided critical value for significance level α_{sig} (typically 1.96 for $\alpha_{\text{sig}} = 0.05$), z_{β} is the critical value for power (typically 0.84 for 80 percent power), p_0 is the baseline rate, and δ_{MDE} is the minimum detectable effect as an absolute difference. Both critical values use the positive upper-tail convention: the upper-tail areas are $\alpha_{\text{sig}}/2$ and β_{stat}, respectively.



Detecting smaller effects explodes the required sample size.

Once data is collected, a two-proportion z-test determines if the observed difference is statistically significant. Equation 0.65 computes the test statistic as the difference in observed rates normalized by the pooled standard error:

$$z = \frac{\hat{p}_B - \hat{p}_A}{\sqrt{\hat{p}(1-\hat{p})\left(\frac{1}{m_A} + \frac{1}{m_B}\right)}} \tag{0.65}$$

where $\hat{p}_A$ and $\hat{p}_B$ are the observed conversion rates for control and treatment, m_A and m_B are sample sizes, and $\hat{p} = \frac{m_A\hat{p}_A + m_B\hat{p}_B}{m_A + m_B}$ is the pooled proportion. For the two-sided test, if $|z| > z_{\alpha/2}$, reject the null hypothesis and conclude the variants differ significantly.

Sample size for recommendation models

A recommendation system has baseline CTR of 5 percent. The team wants to detect a 10 percent relative improvement (0.5 percentage points absolute) with 95 percent confidence and 80 percent power.

Parameters:

- $z_{\alpha/2} = 1.96$ (95 percent confidence, two-tailed)
- $z_{\beta} = 0.84$ (80 percent power)
- $p_0 = 0.05$ (baseline CTR)
- $\delta_{\text{MDE}} = 0.005$ (0.5 percentage point improvement)

Calculation:

$$n = \frac{(1.96 + 0.84)^2 \times 2 \times 0.05 \times 0.95}{0.005^2}$$

$$n = \frac{7.84 \times 0.095}{0.000025} = \frac{0.7448}{0.000025} = 29{,}792$$

Each variant requires approximately 30,000 samples, totaling 60,000 observations. If requests supply independent eligible observations with immediately available outcomes, 1 million requests per day split evenly between variants collects that sample in less than 2 hours. However, for a model with 1 percent baseline CTR detecting a 5 percent relative improvement (0.05 percentage points), the calculation yields:

$$n = \frac{7.84 \times 2 \times 0.01 \times 0.99}{0.0005^2} = \frac{0.1552}{0.00000025} = 620{,}800$$

Now each variant needs approximately 621K samples. Under the same independence and outcome-availability assumptions, 1M total requests/day split evenly between the two variants collects that sample in about 30 hours. Required observation windows can extend either experiment beyond its collection time. Here, the lower baseline and smaller relative improvement also imply a much smaller absolute effect. At a fixed relative improvement, rarer outcomes require more observations; a fixed absolute effect would give a different comparison.

Multiple testing correction

Running multiple A/B tests simultaneously or sequentially without correction inflates the familywise error rate. With 20 independent tests whose null hypotheses are all true, at $\alpha_{\text{sig}} = 0.05$, the probability of at least one false positive is:

$$\Pr(\text{at least one false positive}) = 1 - (1 - \alpha_{\text{sig}})^k = 1 - 0.95^{20} = 0.642$$

The result is a 64 percent chance of at least one false rejection; a two-sided rejection can point in either direction. Three correction approaches address this problem.

Bonferroni correction adjusts the significance threshold to $\alpha'_{\text{sig}} = \frac{\alpha_{\text{sig}}}{k}$ for k tests. This is conservative but simple. For 20 tests with $\alpha_{\text{sig}} = 0.05$, use $\alpha'_{\text{sig}} = 0.0025$ for each test. This controls the familywise error rate but reduces statistical power.

Šidák correction provides a less conservative adjustment. Equation 0.66 computes the per-test threshold that maintains the desired familywise error rate exactly under independent null p-values:

$$\alpha'_{\text{sig}} = 1 - (1 - \alpha_{\text{sig}})^{1/k} \tag{0.66}$$

For 20 tests: $\alpha'_{\text{sig}} = 1 - 0.95^{1/20} = 0.00256$, slightly more lenient than Bonferroni.

False discovery rate (FDR) control using the Benjamini-Hochberg procedure bounds the expected false-discovery proportion under independence or suitable positive dependence. It is not a hard cap

on the false discoveries in one experiment batch. This is appropriate when some false positives are acceptable. Order p-values from smallest to largest: $p_{\text{val}_{(1)}} \leq p_{\text{val}_{(2)}} \leq \ldots \leq p_{\text{val}_{(k)}}$. Find the largest r such that:

$$p_{\text{val}_{(i)}} \leq \frac{r}{k} \times \alpha_{\text{sig}}$$

Reject all hypotheses $H_{(1)}, \ldots, H_{(r)}$. This procedure yields higher statistical power than Bonferroni when running many tests.

Multiple testing scenario

A platform team runs 30 A/B tests per quarter comparing candidate models. Suppose every null hypothesis is true and each test has a calibrated false-positive probability of $\alpha_{\text{sig}} = 0.05$. Without correction, the expected count is $30 \times 0.05 = 1.5$ false rejections per quarter, or approximately 6 models over a year. These are false claims of a difference, not necessarily improvements: a two-sided rejection can point toward either benefit or harm.

Applying Bonferroni correction: $\alpha'_{\text{sig}} = \frac{0.05}{30} = 0.00167$ per test. This requires larger sample sizes. For the recommendation model example in section 11 (5 percent baseline, 0.5pp effect), original requirement was 30K samples per variant. With a two-sided Bonferroni threshold, the critical value rises to about 3.14, increasing the requirement to roughly 60K samples per variant.

Using FDR control at $q = 0.05$, the Benjamini-Hochberg procedure bounds the expected false-discovery proportion across repeated experiment families under its dependence assumptions, counting the proportion as zero when there are no rejections. Observing 10 significant results out of 30 tests does not establish how many of those 10 are false or give a conditional guarantee for that quarter. The procedure accepts a different error criterion from familywise control and can gain power in exchange.

The choice begins with the error the decision must control. When even one false promotion among the planned comparisons has serious consequences, familywise control is appropriate; Bonferroni is one simple option. Exploratory screening may instead use FDR control when a bounded expected proportion of false discoveries is acceptable and later validation will assess candidates individually. The experiment family and error criterion belong in the release plan before results are inspected.

Checkpoint 12.3: Family-wise error rate under multiple testing

The correction methods are Bonferroni, Šidák, and Benjamini-Hochberg. Apply the family-wise reasoning to a smaller platform.

- ☐ **Family-wise error**: for 20 simultaneous A/B tests per quarter at $\alpha_{\text{sig}} = 0.05$ with no correction, calculate the expected number of false positives and the family-wise error rate under independence.
- ☐ **Bonferroni correction**: apply Bonferroni correction, calculate the per-test threshold α'_{sig}, compute the family-wise error rate after correction, and compare it to the uncorrected rate.
- ☐ **Bonferroni vs. FDR**: for 20 tests where the team expects most candidates to genuinely improve the metric, choose Bonferroni or Benjamini-Hochberg FDR control and justify the statistical-power trade-off.

Sequential testing and early stopping

Traditional A/B tests fix sample size in advance and evaluate once. Release teams rarely wait that long without looking, and looking is where the error rate leaks. A fixed-sample test checked after every batch of observations and stopped at the first $|z| > 1.96$ gets many chances to cross the threshold by chance, so its realized false-positive rate climbs well above the nominal 5 percent. Sequential testing budgets for those looks in advance, allowing monitoring during data collection with principled early stopping rules. Stopping can occur earlier when the evidence is strong, but the gain depends on the hypotheses, effect size, and stopping design.

For two fully specified simple hypotheses, the sequential probability ratio test evaluates the likelihood ratio after each observation:

$$\Lambda_m = \frac{p(X_1, \ldots, X_m \mid H_1)}{p(X_1, \ldots, X_m \mid H_0)}$$

Using approximate Wald boundaries, stop and reject H_0 if $\Lambda_m \geq \frac{1-\beta_{\text{stat}}}{\alpha_{\text{sig}}}$, stop and accept H_0 if $\Lambda_m \leq \frac{\beta_{\text{stat}}}{1-\alpha_{\text{sig}}}$, otherwise continue collecting data.

For large-scale A/B testing, group sequential methods divide the experiment into planned analysis stages. At each stage, compare test statistic to adjusted thresholds that maintain overall α_{sig}. The boundary family decides how that error budget is spent across the looks. An O'Brien-Fleming boundary spends almost none of it early, demanding overwhelming evidence to stop at the first looks and keeping the final threshold close to the fixed-sample value. A Pocock boundary spends it evenly, applying the same stricter threshold at every look. For a canary whose guardrail metric is checked every hour, the evaluation contract must prespecify a valid sequential stopping rule, such as one of these boundaries; comparing each hourly look against the single-look 1.96 reintroduces the inflation the design exists to prevent.

Practical implementation considerations

Production A/B tests can violate the independence and stationarity assumptions behind these formulas. Carryover occurs when treatment changes behavior after exposure ends, so a design that reassigns users must account for that persistence. Novelty can also make early responses differ from later behavior; no fixed number of weeks guarantees that the effect has settled. Observation windows should cover the relevant behavioral cycles and outcome delays. Surrogate metrics such as clicks can move in a different direction from long-term objectives such as retention and revenue, so a release gate pairs the short-term surrogate with guardrail metrics that may require longer observation.

Interference between users is the most consequential violation for social and marketplace products, because it biases the estimated effect itself rather than only its variance. The next section treats it on its own.

SUTVA violations and network effects

Every sample size and significance calculation above assumes that a treatment assigned to one user does not change another user's outcome. If User A receives an improved recommendation algorithm, User B's behavior should remain unaffected because User B never saw the new algorithm.

Social platforms systematically violate this assumption. When User A receives better content recommendations, they share that content with their network, including User B in the control group. User B's engagement changes despite never seeing the treatment. The control condition becomes contaminated, not through experimental error, but through the natural mechanics of networked products.

The stable unit treatment value assumption (SUTVA) requires well-defined treatment versions and no interference between units (Rubin 1980). Its no-interference component says that user i's outcome $Y_i^{\text{pot}}(w)$ depends on their own assignment w, not on other users' assignments. Versioned releases address the treatment-definition requirement; network interactions challenge the second requirement. Ignoring those interactions can bias the effect estimate used for a deployment decision (Hudgens and Halloran 2008; Eckles et al. 2017).

Interference can travel through direct connections, shared markets, or geographic and temporal spillovers. A treated user may share recommended content with control users, changing their outcomes even though they never receive the new ranker. A ridesharing incentive may change driver supply and wait times for both groups. Local merchant recommendations may redirect traffic from neighboring areas assigned to control. In these examples, independent user assignment remains possible, but each user's assignment no longer describes all the treatment exposure affecting that user's outcome. The direction and size of the resulting bias depend on the interaction and the effect being estimated.

Quantifying SUTVA violations

Grouping connected users into randomized clusters changes the precision calculation as well as the exposure pattern. For clusters of equal or similar size with a common within-cluster outcome correlation, equation 0.67 gives a planning approximation for variance inflation relative to independent observations:

$$\text{DEFF} \approx 1 + (m-1)\rho_{\text{ICC}} \tag{0.67}$$

where m is the average cluster size and ρ_{ICC} is the intra-cluster correlation of outcomes (how similar outcomes are within connected user groups). Multiplying an independent-observation sample plan by this factor approximates the additional observations needed under those assumptions. Unequal cluster sizes and the chosen estimator require a more specific precision analysis. This variance adjustment does not identify or remove bias from interference across clusters.

Network effect bias in social recommendation

An illustrative social platform tests a new feed ranking algorithm. Individual user randomization assigns 50 percent of users to treatment.

Experimental setup:

- 10 million users, average 150 connections each
- Outcome: daily engagement minutes

With independent 50 percent assignment, a typical control user's 150 connections split roughly evenly between arms, so almost every control user is exposed to treatment through dozens of treated neighbors.

Naive analysis results:

- Treatment group: 45.2 minutes average
- Control group: 43.8 minutes average
- Measured effect: +1.4 minutes (+3.2 percent)

Network analysis confirms that control users have on average about half of their connections in treatment. Those treated connections share algorithmically boosted content that control users see, inflating control group engagement. The observed data cannot say by how much, because almost no control user is unexposed. The sensitivity analysis therefore supplies the missing quantity as an explicit assumption, an unexposed control mean of 42.3 minutes:

- Adjusted control baseline: 42.3 minutes (what control would show without spillover)
- Contrast against the assumed baseline: +2.9 minutes (+6.9 percent)
- Under this assumption, spillover inflated control by 1.5 minutes, halving the measured effect

The assumed counterfactual is not identified by the observed group means or the connection count. Estimating an exposure-specific effect requires an explicit exposure mapping, assignment probabilities, sufficient probability of each exposure, and an estimator matched to those choices.

The arithmetic shows how a plausible spillover assumption can change the interpretation of an experiment; it does not recover a known true effect. A design effect for cluster randomization is a separate variance calculation and cannot correct interference bias.

Detection strategies

Network-exposure diagnostics test for evidence of interference. Ego-network analysis summarizes each control user's treated neighbors as $e_i = |\{j \in \mathcal{N}_i : w_j = 1\}|/|\mathcal{N}_i|$, where $\mathcal{N}_i$ is the recorded connection set for control user i and w_j is peer j's treatment assignment. Correlation between control outcomes and e_i motivates investigation, but graph structure and user differences can also explain it. Comparisons between high- and low-exposure control cohorts therefore require an assignment design and analysis that address those differences. Temporal analysis adds evidence about when effects appear, without by itself distinguishing contagion from a shared external trend. These diagnostics make the interference assumption testable within the observed graph and exposure definition; a null result does not prove that all spillover is absent.

Mitigation approaches

When SUTVA violations are detected, four experimental designs modify assignment to address distinct interference paths, each demanding an exposure model tailored to its randomization unit.

In graph cluster randomization, treatment is assigned at the community level rather than to individual users. Graph partitioning algorithms like Louvain or spectral clustering seek groups with dense internal connections and sparse cross-cluster edges. Whether that grouping sufficiently limits cross-arm interaction must be measured on the resulting partition. Assignment now operates over K clusters, so precision depends on the number of independent assignment units, cluster sizes, within-cluster correlation, and remaining spillovers.

Ego-exclusion designs instead filter the analyzed cohort by discarding users whose network exposure crosses a safety threshold. Restricting evaluation to control users with minimal treatment connections (such as $e_i < 0.05$) reduces measured interference, but it cannot guarantee an uncontaminated baseline. Furthermore, pruning heavily connected users alters the effective sample population and can introduce severe selection bias.

For marketplace dynamics where network connections cannot be partitioned cleanly, switchback experiments alternate treatment and control over time blocks within the selected market or population. This reduces simultaneous cross-arm interaction within that unit, but outcomes can carry over between blocks; the analysis must account for persistence and time trends. Geo-based experiments instead randomize spatial units such as cities, while monitoring cross-boundary travel and shared supply. Choosing the unit trades interference control against the number of independent comparisons and the observation time needed for adequate precision.

The chosen design determines the infrastructure needed to support its claims. Graph-based assignment needs maintained topology and cluster records; a switchback needs an auditable schedule and outcome timing; an exposure-specific estimator needs the peer-assignment information its exposure model uses. Analysis must respect the randomization unit, and monitoring must track the spillovers that could invalidate the comparison. The sensitivity example shows why this work can matter: under its stated assumption, spillover halves the observed lift. The platform must estimate the relevant effect before treating that observed contrast as evidence for or against promotion.

The end-to-end evaluation contract

The selected experiments produce evidence, but evidence from different stages is useful only when it refers to the same candidate and decision. An **evaluation contract** is the versioned release record that binds a model and its dependencies to the workload, metrics, statistical design, acceptance thresholds, rollback conditions, and accountable owners. This record is the subject of the evaluation contract principle (19), one of the deployment principles listed in the opener to this part of the book. It holds that a fleet release decision is valid only when all of its evidence refers to one versioned contract. The record therefore becomes the unit of validity for everything this chapter has built, from registry versions and feature contracts to rollout stages and experiment statistics. Table 0.162 assembles that record so a candidate cannot pass offline quality on one dataset, performance on an easier load profile, and online evaluation under a third configuration.

Table 0.162: End-to-end evaluation contract: A model release is accepted against one versioned record spanning offline behavior, production-equivalent performance, specialist assurance, online experimentation, and recovery. Each plane has both an evidence owner and a condition that expires its claim.

Evidence plane	Contract must pin	Acceptance or invalidation rule	Accountable owner
Offline behavior	Evaluation-set version, primary metric, consequential slices, baseline, uncertainty evidence, and robustness tests (developed later, in section 8)	Promote only if prespecified aggregate and slice bounds hold; invalidate when the population, label definition, or intended use leaves the validated envelope	Model owner and domain reviewer
System performance	Hardware and software envelope, open- or closed-loop workload model, concurrency, request mix, warm-up, p50 and tail latency, throughput, errors, and resource cost	Promote only under the production-equivalent load contract; invalidate when capacity headroom or an SLO budget is exhausted	Serving and site-reliability owners

Evidence plane	Contract must pin	Acceptance or invalidation rule	Accountable owner
Responsibility and safety	Fairness slices, privacy and safety evidence, affected-party requirements, and assurance claims (developed later, in section 2)	Promote only when the named claims have sufficient evidence and review; invalidate on a material change, control failure, or unbounded harm signal	Risk owner and governance authority
Online experiment	Assignment unit, holdout, minimum detectable effect, power, sample size, confidence interval, multiple-testing correction, stopping rule, and guardrail metrics	Promote only after the planned decision rule passes; stop and roll back when any guardrail crosses its prespecified threshold	Experiment owner and product decision owner
Recovery and audit	Rollback artifact and dependencies, trigger windows, evidence-retention period, data and code versions, environment, seeds, raw aggregate counts, and approvals	Reject exposure without a tested rollback; reopen the decision when evidence cannot be reproduced or retained for the required review period	Release owner, platform owner, and audit custodian

Acceptance is deliberately distributed, but promotion authority is not ambiguous. The model and domain owners accept predictive utility; the serving owner accepts capacity and reliability; specialist risk owners accept bounded robustness, fairness, privacy, and safety claims. A named release authority promotes only when all required sign-offs refer to the same artifact. The platform automates gates and preserves evidence, but it cannot choose the product objective or waive a failed assurance claim.

Invalidation is the return path through the contract. Drift beyond the evaluated population, a feature or label-definition change, exhausted latency headroom, a statistically supported guardrail regression, or a material governance change sends the candidate back to the owning gate. Thresholds and rollback targets are fixed before exposure so an apparent primary-metric gain cannot redefine success after the result is known. Reproducibility requires retaining the inputs to that decision, not merely its verdict: the dataset and traffic snapshot, model and code versions, environment and hardware envelope, random seeds, assignment and sampling rules, sufficient statistics or permitted logs, approvals, and the exact rollback artifact.

CI/CD patterns by model type

The contract has the same evidence planes across workloads, but the intended use determines which evidence limits promotion. Table 0.163 returns to the workload families of table 0.148, whose cadence and rollback targets still apply, and adds the column that table lacked, what each family must validate before promotion. Broad language-model evaluation may require extended review, while an urgent fraud update may justify a tightly bounded release. The listed durations are operating assumptions, not consequences of architecture; label maturity, traffic, and potential harm determine the actual validation and rollback policy.

Table 0.163: CI/CD patterns by model type: The rows illustrate validation and response policies for different workloads. Their durations are planning assumptions; promotion depends on the required evidence, including outcome-label delay, and rollback depends on a ready compatible target.

Pattern	Model Type	Validation Focus	Rollout Speed	Rollback Speed
Quality-gated	LLM	Human eval, safety	Days to weeks	Minutes with warm standby
Metric-driven	Recommendation	Engagement metrics	Hours to days	Minutes
Threshold-gated	Fraud	Precision/recall	Hours	Seconds
Accuracy-focused	Vision	Classification metrics	Days	Minutes

For a broadly capable LLM, evaluation must cover consequential uses that aggregate benchmarks can miss. Automated tasks such as MMLU and HumanEval screen selected capabilities; human review and adversarial probes examine additional failure modes; shadow traffic tests operational

behavior on live inputs. A planning window of 2–4 weeks may accommodate these activities and staged observation, but elapsed time is not the acceptance criterion. The required evidence depends on the changed capabilities and the service's exposure policy.

Recommendation pipelines balance freshness with statistically defensible comparison. Offline NDCG and recall can screen candidates, interleaving can compare ranker preference, and A/B tests measure the selected product outcomes. A 24–48-hour rollout is feasible only when traffic and outcome timing supply the required evidence within that interval. Promotion and rollback follow the prespecified rules rather than a fixed refresh deadline.

Fraud models add adversarial urgency, but confirmed outcomes can arrive after the decision window. Historical labeled cases and shadow scoring provide evidence before exposure; neither makes fresh precision and recall immediately observable. The release policy must state what evidence supports an urgent change, what uncertainty remains, and who accepts its bounded exposure. Rapid routing to a validated fallback can contain harm while additional labels accumulate, provided that fallback remains suitable for the current threat.

Edge fleet lifecycle management

The operational challenges examined thus far assume a controlled data center environment. Chapter 16 extended the machine learning fleet to millions of heterogeneous edge devices with constrained connectivity, power, and compute, and examined what production integration demands of each adaptive device. Archetype C (Federated MobileNet), running on smartphone-class devices with power budgets of roughly 2–10 W, a few watts sustained with brief bursts toward 10 W, is the reference workload here. Operating that population as one fleet adds three constraints beyond those of any single device.

The three constraints interact, so they should be handled as one operational design problem rather than as independent notes. Table 0.164 maps each constraint to the platform control it requires, including hardware-in-the-loop validation and federated analytics.

Table 0.164: Edge fleet controls: Edge operations couple rollout latency, device heterogeneity, and privacy-limited observability. The operations platform must reconstruct global fleet health from partial signals while preserving compatibility with many active model versions.

Edge fleet constraint	Why it appears	Platform control
Extreme version skew	Rollouts can take weeks or months because devices are offline, on low battery, or on restricted networks. At any time, 50 model versions may remain active.	Maintain backward-compatible data pipelines and serving contracts for models deployed months earlier.
Device-aware validation	Accuracy gates do not reveal whether a model exceeds a phone's memory budget or triggers thermal throttling on its system-on-chip (SoC); microcontroller-class targets below Archetype C tighten the budget to about 1 MB.	Add hardware-in-the-loop validation on physical or emulated target devices before promotion.
Privacy-limited telemetry	Raw predictions cannot stream back continuously because privacy rules and bandwidth costs constrain observability.	Use federated analytics: devices compute local statistics such as error rates or drift, then transmit permitted aggregate health signals under explicit privacy and retention controls.

Federated health signals inherit the bias that chapter 16 warned about for federated training. A device reports its local error rate or drift statistic only when its admission policy allows the work and its connectivity allows the upload, so the devices that report most are the well-charged, well-connected, newer ones. The fleet's health dashboard then describes the admitted population rather than the deployed one, the same skew the participation selection principle (18) names for training. A staged edge rollout can look healthy because the devices most likely to fail, older hardware and thermally constrained phones, are also the least likely to report. The platform therefore tracks reporting coverage per device class and cohort alongside the health signals themselves, and holds promotion when a cohort's coverage falls too low for its signal to count as evidence.

↩ Admission-selected participation and the skew it creates across device cohorts are established in section 14.

Whether a model runs in a data center or on a phone, a CI/CD pipeline promotes candidates supported by evidence within a specified operating envelope. Production can move outside that

envelope as data, traffic, and dependencies change. Monitoring must therefore preserve the release contract after promotion, detect when its evidence no longer applies, and return the affected model to evaluation or recovery.

Monitoring at Scale

Application-layer drift detection depends on a healthy physical substrate. At fleet scale, a degraded NVLink connection or a thermally throttling GPU can masquerade as a software timeout. Monitoring therefore starts bottom-up with fleet telemetry, then climbs through alert aggregation, model-quality signals, and dashboards so that operators can route a symptom to the layer that can repair it.

Fleet telemetry and hardware observability


Because failure is routine at pod scale, fleet monitoring and hardware observability are prerequisites for productive training. As an illustrative independent-failure model, a 50,000-hour per-GPU planning interval means that a 10,000-GPU cluster sees a hardware failure roughly every five hours. The count is GPU-only; the cluster mean time between failures calculation in section 4 adds PCIe links and network components for a cluster of the same size, which shortens the full-system interval. That interval is a planning assumption rather than a measured universal device rate; section 4 develops the component-to-fleet calculation, and correlated faults and repair-time distributions require separate evidence. Achieving a 10-minute recovery instead of a multi-hour disruption depends on detection, usable recovery state, replacement capacity, and restart procedures. Advance warning helps when available, but recovery must also handle abrupt failures. The monitoring system is itself distributed, collecting telemetry across devices, switches, and cooling components.

The telemetry spans three physical levels. At the GPU level, junction temperature tracks cooling degradation, error-correcting code (ECC) counts in high-bandwidth memory (HBM) and SRAM track memory health (a rising rate of correctable errors can precede an uncorrectable, job-ending error), and streaming multiprocessor (SM) utilization shows whether the device is doing work. None alone identifies the cause: low utilization can reflect input starvation, synchronization, or a device problem. At the network level, retry counters on individual ports can point to a failing cable or switch; at the facility level, coolant temperature deviations can trigger load shedding before thermal limits force throttling. Correlating these signals with workload and topology lets responders narrow the failure domain before deciding whether to reduce load, quarantine hardware, or investigate software.

Correlation analysis helps locate the scope of a shared disturbance. Elevated temperature on one GPU motivates local inspection; simultaneous changes across 8 GPUs in a node suggest checking shared cooling and workload changes. A rack-wide pattern adds the coolant distribution unit (CDU) and rack-level load to the investigation, while a multi-rack pattern raises facility-level hypotheses. These patterns guide diagnosis rather than prove a cause. Grouping related alerts preserves that context and avoids presenting one shared event as hundreds of unrelated failures.

Telemetry capacity follows the series count, sample rate, bytes per observation, retention, and indexing policy. Sampling one metric every second across 10,000 GPUs produces 864 million observations per day before other metrics or labels are added. A daily byte total or monitoring-budget share cannot be inferred without the encoding and retention assumptions. Bound label cardinality and provision ingestion, storage, and queries as an explicit platform workload.

Before allocating a long training job, a scheduler can use automated preflight checks to screen its nodes. General matrix multiply (GEMM) benchmarks exercise arithmetic throughput, NCCL AllReduce tests exercise collective paths, and memory stress tests look for errors under load. Results must be compared with baselines for the same hardware and configuration before a node is quarantined. Preflight consumes startup time and cannot reveal every fault; its value depends on the failed work it avoids and the cost of unnecessary exclusions.



One slow accelerator stalls every peer at the barrier.

A gray failure leaves a component responsive while degrading its useful performance. In synchronous data-parallel training, a persistently slow participant can delay collective completion even when every device passes an availability check. Per-rank timing and hardware telemetry help localize the slowdown; controlled microbenchmarks can then compare suspected nodes with healthy peers. An illustrative policy flags GEMM throughput below 90 percent of a matched fleet median or NVLink bandwidth below 85 percent. Those thresholds require calibration for hardware generation,

software, load, and measurement variability. A low result warrants investigation rather than proving a hardware defect, because configuration and contention can produce similar symptoms.

↩ Gray failures and the straggler detection that exposes them are established in section 20.

Systems Perspective 12.4: Proactive vs. reactive maintenance

Proactive maintenance combines predictive diagnostics, burn-in testing, and rolling maintenance windows. Predictions require validation against actual failures; testing consumes capacity and can miss faults outside its workload. Keeping production capacity constant during maintenance requires spare capacity or rescheduling. The operational benefit is less lost work when maintenance prevents or contains a failure, balanced against the capacity and labor it consumes.

In multi-tenant clusters, shared links can couple otherwise separate workloads. A collective burst can delay another job's storage traffic even when CPU and memory limits hold. Rail alignment maps corresponding ranks across nodes to favorable communication paths; it does not by itself reserve those paths for one tenant. Congestion signaling and endpoint rate control, admission policy, scheduling, or dedicated capacity can limit interference. Physical partitions offer stronger isolation at the cost of stranded capacity and placement flexibility. The appropriate choice follows the workload's latency and throughput contract.

Checkpoint cadence is the point where hardware telemetry becomes visible to ML operators rather than only to data-center technicians. A degraded node that forces frequent checkpoint recovery, or a storage path that lengthens checkpoint writes, turns directly into lost training throughput. Section 13 derives the checkpoint-compute trade-off and the Young-Daly interval; the operations responsibility here is to expose the telemetry those formulas depend on: write time, failure rate, straggler behavior, and recovery duration. Without that visibility, a platform may report that a job is "running" while useful learning has quietly collapsed behind retries and slow checkpoints.

With the physical substrate accounted for, monitoring returns to the deployed model fleet. Validation and canary evidence cover a candidate under observed conditions; production can later change abruptly or drift over weeks and months. Monitoring must therefore retain acute-failure controls while detecting gradual loss of quality. Independently paging on every model metric can multiply notifications from a shared event and create alert fatigue. Fleet-level aggregation connects those symptoms while preserving urgent local signals that require immediate action.

The alert fatigue problem

Per-model threshold crossings accumulate across a fleet. Consider 100 models with 10 monitored metrics each. If each metric has a calibrated false positive rate of 0.3 percent per check, approximately the two-sided 3-sigma rate under a Gaussian null distribution, the expected number of false crossings is substantial. Whether those crossings become pages depends on the alerting policy.


Napkin Math 12.7: The false alarm tax

Problem: Consider a system monitoring 100 models. Each model has 10 metrics (latency, accuracy, drift, and others). Alert thresholds are set at 3-sigma (99.7 percent specificity), and a control script re-evaluates every metric on a fixed interval. Assume calibrated stable Gaussian null behavior and count raw threshold crossings before grouping or suppression; those crossings are not necessarily distinct incidents.

Math:

1. **Total Monitors**: 100 models $\times$ 10 metrics = 1,000 monitors.
2. **False Positive Rate**: $1 - 0.997 = 0.003$ (0.3 percent).
3. **Checks per day**: Assume checks every 5 minutes (288 checks/day).
4. **Daily false threshold crossings**: $1{,}000 \times 288 \times 0.003 \approx 864$ alerts/day.

Systems insight: Even with high-specificity (3-sigma) alerts, scale becomes problematic. Aggregation, deduplication, persistence windows, and calibrated thresholds reduce repeated notifications. Specific safety or hardware-failure alerts must still trigger independently when their contracts require immediate action.



False alerts become near-certain as checks multiply.

The multiple-testing problem from concurrent experiments (section 11) also appears in monitoring. For independent checks under the null, each with false positive rate α_{fp}, equation 0.68 shows that the probability of at least one false alert approaches certainty as the number of tests N_{tests} grows, because the probability of no false alert decays exponentially:

$$\Pr(\text{at least one false alert}) = 1 - (1 - \alpha_{\text{fp}})^{N_{\text{tests}}} \tag{0.68}$$

The equation holds at any per-check rate, and teams under pressure to catch regressions sooner often loosen thresholds. Loosening the notebook's 3-sigma thresholds to 2 sigma raises the per-check rate from 0.3 percent to roughly $\alpha_{\text{fp}} = 0.05$. With that rate and $N_{\text{tests}} = 1000$ (100 models $\times$ 10 metrics):

$$\Pr(\text{false alert}) = 1 - (1 - 0.05)^{1000} = 1 - 0.95^{1000} \approx 1.0$$

The probability is essentially 100 percent for this collection of independent checks. This result establishes the likelihood of at least one false crossing, not the fraction of alerts that are false. Repeated checks compound the operational burden when every crossing generates a page. Frequent nonactionable pages can train operators to discount the alert stream, making genuine incidents harder to recognize.

Alert volume calculation

The raw crossing count in notebook 12.7 grows further at the loosened 2-sigma threshold, approximated here by the same 5 percent false positive rate under the stable Gaussian null assumption. An ML platform monitors 100 models with the following configuration:

- 10 metrics per model (accuracy, latency p50, latency p99, throughput, error rate, data freshness, feature drift, memory usage, GPU utilization, request volume)
- Alert threshold at 2 standard deviations (approximately 5 percent false positive rate per metric)
- Metrics checked every 5 minutes

Expected daily false alerts: Daily false alerts $= 100 \times 10 \times 0.05 \times \frac{24 \times 60}{5} = 14{,}400$.

Even if 99 percent of these crossings are deduplicated or auto-resolved, the remaining 144 alerts daily would impose a substantial interruption burden if each became a page. Comprehensive telemetry therefore needs a policy that separates diagnostic records from notifications requiring immediate action.

Hierarchical monitoring architecture

The alert fatigue problem motivates coordinated triage. To stem the flood of uncoordinated alarms, figure 0.169 structures telemetry into a four-tier triage pyramid, mapping operational scope from component health at the base up to fleet-wide business impact at the apex. Broad signals reveal fleet impairment, portfolio signals route incidents to the owning model family, and granular model or infrastructure telemetry supports local diagnosis. Routine fluctuations remain diagnostic records, while urgent local failures still page their owners without waiting for a fleet-wide signal. The hierarchy provides context for routing and grouping alerts while preserving those immediate response paths.

The hierarchy works because each level answers a different routing question. Table 0.165 maps each level to its signal, owner, and operational role.

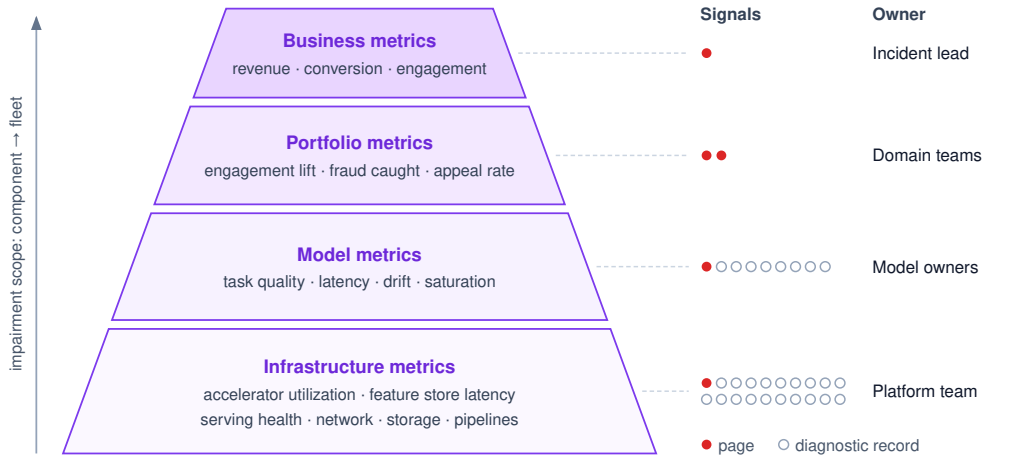


Figure 0.169: Hierarchical monitoring architecture: To prevent alert fatigue, monitoring operates at four levels, each with its own owner. Business and portfolio metrics raise the few alarms that indicate broad impairment and route each incident to the owning model family, while model and infrastructure metrics serve primarily for diagnosis and root-cause analysis.

Table 0.165: Hierarchical monitoring levels: Monitoring levels organize incident scope and ownership. Broad signals route shared incidents, while urgent local failures can page their owners directly; evidence at every level supports diagnosis of model, data, serving, or infrastructure causes.

Level	Representative signals	Primary owner	Operational role
Business	Revenue or conversion attributed to recommendations, engagement indicators, automation rate, and human-review volume.	Incident lead	Few high-confidence alerts that indicate product or business impairment.
Portfolio	Engagement lift and diversity for recommendation, fraud caught and false-positive rate, or violation detection and appeal rate.	Domain team	Routes investigation to the model family or product area that owns the shared objective.
Model	Task quality, latency distributions, throughput, error rates, resource utilization, serving saturation, and recent deployment state.	Model owner	Supports local diagnosis after business or portfolio signals move.
Infrastructure	GPU cluster utilization and availability, feature store latency, training pipeline time, serving health, networking, and storage.	Platform team	Routes failures that require capacity, placement, networking, storage, or control-plane repair.

Multidimensional reliability budgets

A fleet cannot summarize reliability with availability alone. An endpoint may return HTTP 200 while serving stale features, missing its latency target, or producing predictions below the quality floor. Each service therefore needs an SLO vector

$$\mathbf{S} = (S_{\text{availability}}, S_{\text{latency}}, S_{\text{freshness}}, S_{\text{quality}}),$$

with one indicator, target, measurement window, and owner for every dimension. For dimension i, the normalized budget consumption over a window is

$$B_i = \frac{V_i}{V_i^{\text{allow}}},$$

where V_i is the fraction of eligible observations that violate target i and V_i^{allow} is the allowed violating fraction for that same target and window. The numerator and denominator have identical units within each dimension: failed-request fraction for availability, late-request fraction for latency,

stale-prediction fraction for freshness, and below-floor evaluation fraction for model quality. The quality contract must define its evaluation units, label delay, and coverage; unlabeled predictions cannot silently count as passing observations. A value $B_i = 1$ exhausts that dimension's budget; $B_i > 1$ exceeds it. Ratios may be compared after this normalization, but raw latency, freshness, and quality magnitudes are not commensurable. The fleet remains inside its measured reliability envelope only when $\max_i B_i \leq 1$, the reliability half of the evaluation contract (principle 19). Averaging would hide a severe regression behind a healthy dimension, while missing or stale evidence requires its own release policy rather than an assumed pass.

Burn rate converts this vector into an operating control. For dimension i, the **burn rate** is the observed violating fraction over a short recent interval divided by the allowed fraction V_i^{allow}, so it measures how fast the budget is being spent relative to the pace that would exhaust it exactly at the end of the window. A burn rate of 1 spends the budget on schedule; a burn rate of 10 would exhaust the whole window's budget in a tenth of the window. A fast burn in any dimension pages the owning team and stops promotion; sustained moderate burn reduces rollout velocity and requires remediation; an exhausted budget freezes nonessential releases until the responsible indicator returns inside its recovery policy. The platform owns indicator computation, common windows, alert routing, and enforcement. Model teams own task-quality thresholds and remediation for model behavior; data owners own freshness and validity; serving owners own latency and availability. This division turns monitoring into an explicit contract between evidence and authority rather than a dashboard that everyone can see but no one must act on.

Table 0.166 maps each budget dimension to its owner and release consequence.

Table 0.166: ML reliability budget vector: Fleet reliability joins service health, data freshness, and model behavior. Any exhausted dimension can stop a release because success in one dimension cannot compensate for failure in another.

Budget dimension	Representative indicator	Primary owner	Release consequence
Availability	Successful eligible requests/total requests	Serving	Halt rollout or fail over when fast burn exceeds policy
Latency	Requests meeting the tail-latency objective	Serving/platform	Reduce traffic, capacity pressure, or candidate complexity
Freshness	Predictions using features inside freshness SLO	Data	Block promotion and fall back to a safe feature path
Model quality	Slice-aware task metric above its quality floor	Model/domain	Roll back, abstain, or route to a validated baseline

Anomaly detection across the fleet

Fleet-wide anomaly detection adds portfolio context to individual metric thresholds. The detection stack proceeds from local statistical process control, to correlation across model families, to drift scores that characterize changes in data distributions. Each stage narrows the investigation, but none establishes a cause by itself. Grouping related signals can reduce duplicate pages while retaining the evidence needed to route an incident to the right owner.

Statistical process control

Statistical process control originated in industrial quality control (Shewhart 1931). When adapted for ML monitoring, control charts[11] track whether metric distributions remain stable over time and complement drift-detection methods that watch for changing data distributions (Gama et al. 2014). The core idea is distinguishing common cause variation (normal fluctuation) from special cause variation (genuine anomalies).

For a metric X with established mean μ and standard deviation σ, the upper control limit is $\text{UCL} = \mu + 3\sigma$ and the lower control limit is $\text{LCL} = \mu - 3\sigma$. Points outside control limits or systematic patterns, such as 7 consecutive points above or below the mean, trigger investigation. Adding pattern rules changes the combined false-alarm rate; the single-check 3-sigma rate no longer describes the entire policy. Calibration must also account for seasonality and temporal dependence in the monitored metric.

[11] **Statistical Process Control (SPC)**: Shewhart (1931) established the control-chart framework for manufacturing quality control. Under a normal approximation, a 3-sigma control limit produces a false-alarm probability of only 0.27 percent for a stable process. For ML fleet monitoring, even small per-test false-alarm rates compound across many models and metrics, making alert-fatigue management an inherent constraint of applying SPC at platform scale.

Fleet-wide correlation

When multiple models exhibit similar anomalies simultaneously, shared infrastructure or an upstream data pipeline becomes a candidate cause. Correlation analysis across the fleet supports three operational tasks: identifying shared dependencies to investigate, grouping related alerts into an incident, and prioritizing triage based on the breadth of downstream impact. As shown in listing 0.20, the fraction of anomalous models can guide escalation from model-by-model debugging to a coordinated investigation. Crossing that threshold does not establish a shared failure; dependency records, deployment timing, and component telemetry must support the attribution.

Listing 0.20: Fleet Anomaly Attribution: Detecting correlated anomalies across a model fleet and attributing them to shared infrastructure or data causes.

```
def detect_fleet_anomaly(model_metrics, threshold=0.6):
    """
    Detect correlated anomalies across model fleet.

    Returns list of (timestamp, affected_models, likely_cause) tuples.
    """
    anomalies = []

    for timestamp in model_metrics.timestamps:
        # Identify models with anomalous metrics at this time
        anomalous_models = []
        for model in model_metrics.models:
            if is_anomalous(model_metrics[model][timestamp]):
                anomalous_models.append(model)

        # Check if anomaly fraction exceeds correlation threshold
        if (
            len(anomalous_models) / len(model_metrics.models)
            > threshold
        ):
            # Many models affected -> likely shared cause
            cause = attribute_to_shared_cause(
                timestamp, anomalous_models
            )
            anomalies.append((timestamp, anomalous_models, cause))

    return anomalies
```

The threshold controls when the monitor escalates to a fleet-wide investigation. A low threshold increases sensitivity and investigation load; a high threshold can miss failures affecting a smaller but critical subset of models. Above the threshold, the incident coordinator uses shared dependencies to identify candidate owners, while affected model teams retain responsibility for local containment.

Drift detection

Distribution changes can invalidate the population assumptions behind a release even while service health remains normal. Monitoring must distinguish a change in inputs from a change in the input-output relationship; neither an input alarm nor a healthy input histogram alone establishes model quality.

Covariate shift occurs when the distribution of input features $p(x)$ changes, but the relationship between inputs and outputs $p(y \mid x)$ remains constant. Input monitoring can detect changes in $p(x)$ without labels, but cannot verify that $p(y \mid x)$ stayed constant. Until outcome evidence arrives, the alert establishes input drift rather than pure covariate shift.

Concept drift occurs when the relationship $p(y \mid x)$ changes, such as when users change their definition of spam or relevant content. This requires ground truth labels to detect, which are often delayed by minutes, days, or weeks.

Because labels are often delayed, most real-time monitoring systems use input drift as a leading indicator of possible performance degradation. A cheap drift score is valuable even when it is not

a complete theory of robustness because it tells the operator where to investigate before outcome labels arrive.

For continuous features, the population stability index (PSI)[12] quantifies distribution shift (Yurdakul and Naranjo 2020). Equation 0.69 computes PSI as the sum of log-ratio weighted differences between actual and expected bucket proportions. Values of 0.1 and 0.25 are widely used industry heuristics, not universal statistical thresholds; a production system must calibrate its alert bands to sample size, binning, and false-alarm cost. In platform operations, PSI plays a narrow role as an inexpensive alerting signal.

$$\text{PSI} = \sum_{b=1}^{n_{\text{bins}}} (A_b - E_b) \times \ln\left(\frac{A_b}{E_b}\right) \tag{0.69}$$

where A_b is the proportion in bucket b of the actual (current) distribution, E_b is the proportion in bucket b of the expected (reference) distribution, and n_{bins} is the number of buckets.

An illustrative policy uses these coarse bands to route investigation. PSI below 0.1 leaves the model in the normal monitoring path; values between 0.1 and 0.25 create an investigation ticket; values at or above 0.25 escalate review of the shifted inputs and affected predictions. These actions depend on local calibration. A high PSI does not establish degraded model quality, and a low PSI does not establish that quality remains acceptable.

[12] **Population stability index (PSI)**: Bands such as PSI < 0.1 for routine monitoring and PSI ≥ 0.25 for investigation are heuristics, not guarantees of stability or model failure. Once histograms are available, the comparison uses bucket proportions rather than individual records. Histogram construction, sample size, binning, and treatment of empty buckets still affect cost and interpretation, so the platform must calibrate the signal on its own data.



Napkin Math 12.8: Time-to-detection: Monitoring lag

Problem: A production model has a baseline accuracy of 95 percent. A data drift event causes accuracy to fall to 93 percent. If labeled outcomes arrive at 1000 samples/hour, what collection time supports the stated detection-power calculation, assuming an independent baseline sample of the same size and immediately available labels?

Math: Detection requires enough samples to distinguish the signal (the 2-percentage-point drop) from the noise (random variance). The sizing logic of equation 0.64 applies, in its unpooled form because the baseline and degraded accuracies (a_1, a_2) differ, with the same confidence and power targets ($z_{\alpha/2}$, z_β):

$$n \approx \frac{(z_{\alpha/2} + z_\beta)^2 \left[a_1(1-a_1) + a_2(1-a_2)\right]}{(a_1 - a_2)^2}$$

1. **Samples Required**: At 95 percent confidence and 80 percent power, the standard normal quantiles are $z_{\alpha/2} = 1.96,\ z_\beta = 0.84$, and plugging in gives $n \approx (1.96 + 0.84)^2 \times [0.95(1-0.95) + 0.93(1-0.93)]/(0.95-0.93)^2 \approx 2,207$ samples.
2. **Detection Latency**: 2,207 samples / 1000 samples/hour $\approx$ 2.2 hours.

Systems insight: Monitoring is not instantaneous. The computed duration is a planned collection time at 80 percent power, not a guaranteed detection deadline. It assumes an independent baseline sample, the stated post-change rate, and immediately available labels. Delayed labels, dependence, and repeated testing change the detection contract. Input drift can provide an earlier investigation signal, but it does not establish a quality regression by itself.

Fleet-wide drift monitoring extends that signal across the portfolio. A PSI spike in one noncritical feature may be a local investigation, while simultaneous drift across shared features or dependent models warrants a broader investigation. A shared data pipeline failure is one candidate cause; a genuine change in the population served can produce the same pattern. Pipeline checks and outcome evidence distinguish a data defect from a change to which the models must adapt.

Model-type specific monitoring

Monitoring cadence follows failure cost, label delay, and traffic volume. The same workload families that set release cadence in table 0.148 and validation focus in table 0.163 now need a post-promotion counterpart, which metric each watches and how often. The illustrative parameters in table 0.167

must be calibrated to the service: a frequently updated metric is useful only if enough observations support the alert decision.

Table 0.167: Illustrative monitoring policies: Example metrics, thresholds, and collection frequencies. None is a universal requirement of a model family. Label availability, sample size, failure cost, and the required detection delay determine the production policy.

Model Type	Primary Metrics	Alert Thresholds	Monitoring Frequency
Recommendation	CTR, engagement lift	5% relative drop	Real-time
Fraud Detection	Precision, recall, fraud rate	1% degradation	Real-time
LLM	Quality scores, safety metrics	Per-model calibration	Hourly
Vision	Accuracy by class	Dataset-specific	Daily
Search Ranking	NDCG, click position	2% degradation	Real-time

Recommendation monitoring must respond quickly to user impact, but each metric becomes informative on its own observation timescale. Click-through rate, dwell time, and conversion rate should be compared against time-matched historical baselines, control traffic when available, and the previous model version after a release. Conversions can arrive later than clicks, and sparse traffic can delay a reliable comparison. Engagement metrics alone also leave gaps; diversity, catalog coverage, and filter-bubble indicators track longer-term concerns, while revenue attribution and promotional-inventory metrics connect recommendation quality to business outcomes.

Fraud monitoring binds on adversarial urgency. Missed fraud creates immediate financial loss, but excessive false positives create customer friction and manual-review load. The monitoring surface therefore has to pair detection rate, prevented dollar amount, and detection latency with false-positive rate, blocked-legitimate-transaction events, manual-review volume, and adversarial indicators such as probing patterns or sudden shifts in fraudulent behavior.

LLM monitoring binds on semantic quality, which is difficult to measure from service metrics alone. Latency, token generation rate, error rate, and safety-classifier scores establish operational health; user satisfaction signals such as thumbs-up/thumbs-down rates, regeneration rate, and task-completion proxies add delayed quality evidence. Safety metrics such as toxicity detections, refusal rate, and hallucination indicators remain partial, so they should trigger review rather than claim complete coverage.

Service-health metrics alone cannot detect semantic safety failures such as persuasive misinformation or skilled manipulation. Here, red teaming supplies an additional monitoring channel: human evaluators or automated probes attempt jailbreaks before deployment, and a smaller continuous probe set checks production behavior against known failure cases. Sampling outputs for delayed human review adds evidence about failures that automated metrics miss. Neither a passing probe set nor a reviewed sample establishes complete safety coverage.

Observability architecture

Effective monitoring requires observability infrastructure that preserves enough context to route an alert from symptom to owner. The metrics, logs, and traces that make up that infrastructure were introduced for debugging a single distributed job; at fleet scale the same channels must route evidence across many models and owners. Each evidence channel answers a different operational question. Metrics show that a service property moved outside its envelope, traces show where a request spent time, logs identify which component emitted the abnormal event, and prediction logs connect system health back to model behavior. In multi-model systems, a single user request may traverse multiple models. Distributed tracing,[13] exemplified by Google's Dapper system (Sigelman et al. 2010), preserves that request's path across inference services so investigators can locate latency contributions. Table 0.168 summarizes the architecture as an evidence map rather than as a set of disconnected telemetry tools.

[13] **Distributed Tracing**: Google's 2010 Dapper paper describes propagating trace context across service boundaries while controlling collection overhead through sampling and instrumentation in common libraries. In a multi-model pipeline, the resulting trace connects stage timings to the same request rather than requiring investigators to infer the path from independent service summaries. Without it, a 50 ms tail-latency spike in a 10-model pipeline must be investigated in all 10 models separately. Sampling and instrumentation coverage determine which requests and stages remain visible.

Table 0.168: Observability signals by operational question: Observability architecture is an evidence-routing system. Metrics trigger attention, traces localize the request path, logs explain component behavior, and prediction logs connect operational symptoms to model quality.

Evidence Channel	Primary Question	What It Preserves	Typical Failure Revealed
Metrics	Which service property moved out of bounds?	Real-time streams for alerting and aggregated time series for trends	Drift, saturation, error-rate spikes, cost anomalies
Traces	Where did this request spend time?	Request IDs propagated across model invocations, timing, and resources	Cross-model latency, fan-out failures, hot stages
Logs	Which component emitted the abnormal event?	Structured events with consistent schemas and searchable indexes	New error classes, dependency failures, bad releases
Prediction logs	Did system health preserve model behavior?	Sampled inputs, outputs, features, and delayed labels	Accuracy regressions, bad cohorts, data gaps

↩ The observability pillars for a single distributed job are established in section 22.

The channels also grow at different rates, which decides what the platform can afford to collect continuously. Metrics stay compact only while the number of distinct time series is bounded. Each label combination creates another series, so a request identifier or an unbounded user label can overwhelm monitoring even when each sample is small. Logs grow with recorded events and traces with spans, so both are sampled or aggregated at fleet scale; when 10,000 edge nodes or hundreds of microservices emit at once, unsampled telemetry can become a thundering herd that perturbs the production system it is meant to observe. Effective platforms therefore present high-level metric dashboards by default and open lower levels only when an anomaly warrants investigation.

Prediction logging can be expensive because it records model-facing data rather than compact service counters. Production systems therefore sample it deliberately, for example logging 1 percent of predictions or retaining additional examples from cohorts under investigation. The sample must serve the intended analysis; a debugging sample concentrated on failures does not directly estimate fleet-wide accuracy. Recording the selection policy alongside inputs, outputs, and eventual labels preserves the context needed to interpret the evidence without making every prediction a permanent storage record.

Dashboard design

A dashboard is the human attention surface of the monitoring hierarchy. It should answer the same routing questions without forcing every reader into the same debugging console: executives need to know whether the business is impaired, domain owners need to know which portfolio is failing, model owners need the evidence for their model, and incident responders need the trace from symptom to root cause. Table 0.169 shows that progression.

Table 0.169: Dashboard views by operational question: Dashboard hierarchy should route attention from business impact to root cause. Each view reveals the amount of detail needed for the decision at that level, preventing executive views from becoming debugging consoles and investigation views from becoming portfolio summaries.

View	Question Answered	Signals to Surface
Executive	Is the business impaired?	Platform health, business impact, active incidents, key trends
Portfolio	Which domain or model family is driving the impairment?	Model inventory, portfolio metrics, recent deployments, resource utilization and cost
Model	What changed for the responsible model?	Current metrics vs. baselines, deployment history, drift indicators, cost attribution
Investigation	Why did the change occur?	Cross-model correlations, time-series overlays, log search, request-level trace detail

The same views carry cost as one more monitored dimension: the portfolio and model views surface spend beside quality and latency, and section 20 develops the anomaly detection that watches that ledger. Even a well-instrumented fleet does not prevent failures. The monitoring hierarchy detects them; what remains is the response, which must classify the symptom, contain its impact, and route it to an owner with the authority to act.

Production Debugging and Incident Response

At 3:00 AM, PagerDuty alerts the on-call engineer that revenue from the core recommendation system has dropped 15 percent in the last hour. The servers are healthy, the latency is normal, and there are no exception logs. Conventional software can also return incorrect results silently, but machine learning adds failures rooted in data and statistical behavior while ordinary service-health signals remain normal. Debugging production ML systems therefore requires investigative frameworks that reach beyond code and infrastructure.

When production debugging consumes a large share of engineering attention, platform scale multiplies the complexity because failures may originate in data pipelines, model code, infrastructure, or emergent interactions between components that no single team owns end to end. Effective incident response therefore classifies the symptom and contains impact while attribution proceeds, then converts the incident into a stronger platform control. A known safe containment action need not wait for complete root-cause analysis.

War Story 12.1: The control plane that disappeared (2021)

Context: Meta's global backbone connected its data centers and carried dependencies whose loss also made DNS and internal recovery tools unavailable (Janardhan 2021).

Mechanism: On October 4, 2021, a maintenance command intended to assess backbone capacity disconnected the data centers. A bug in the command-audit tool failed to stop it. DNS servers then withdrew their Border Gateway Protocol (BGP) advertisements, the routing announcements that tell other networks how to reach them, after losing data-center connectivity. DNS and network unavailability also disabled internal recovery tools and remote access.

Impact: The outage interrupted services worldwide and disabled internal tools needed to diagnose and resolve it, extending the consequences of the backbone failure into the recovery process itself.

Fix: Engineers went onsite to the data centers, completed secure access procedures, and restored backbone connectivity. They then brought services back under controlled load to avoid a second failure during recovery.

Systems lesson: Platform-scale operations must treat the control plane as a hard dependency with a defined blast radius. ML platforms present identical failure risks at fleet scale: training schedulers, model registries, feature stores, and inference routers share the underlying auth, DNS, and network planes. When network partitions occur, recovery requires bounded failure domains and an administrative path that remains usable when the normal control plane is unavailable. Physical separation is one possible mechanism, not a universal requirement.

Incident classification

Incident classification is the first routing decision in an outage: the category tells responders which telemetry to inspect first, which owner to page, and whether the likely control is a rollback, a data repair, or infrastructure isolation. The incident categories are organized around that first diagnostic signal.

Data incidents involve problems with input data: pipeline failures that prevent fresh data from reaching models, schema changes that break downstream consumers, data quality degradation from missing values or distribution shifts, and feature staleness exceeding SLO thresholds. These incidents often manifest as accuracy degradation across multiple models that share data sources, making data pipeline health the first diagnostic checkpoint.

Model incidents involve problems with model behavior, including accuracy degradation beyond acceptable thresholds, latency spikes indicating computational issues, memory exhaustion from growing state (KV cache, buffers), and prediction bias shifts detected by fairness monitoring. Model incidents typically affect individual models. If multiple unrelated models degrade simultaneously, suspect a shared data or infrastructure issue rather than independent model problems.

Infrastructure incidents involve problems with the serving platform: GPU failures causing request errors, network partitions between model shards, load balancer misconfigurations routing traffic

poorly, and container orchestration issues affecting deployments. These incidents tend to produce error rate spikes and timeout patterns rather than gradual accuracy degradation.

Business metric incidents involve unexpected changes to downstream KPIs, such as engagement drops without clear model or data cause, revenue anomalies during normal model operation, and user behavior shifts that affect model efficacy. These incidents are the hardest to attribute because they may stem from external factors (competition, seasonality, marketing campaigns) rather than ML system problems.

Attribution analysis

Attribution analysis tests likely causes while containment limits user impact. Responders can pause promotion, reduce exposure, or invoke a validated rollback before the root cause is certain, while preserving evidence for diagnosis. Temporal correlation traces the degradation backward through recent changes:

```
Symptom: Recommendation engagement dropped 5% in past hour

Step 1: Check recent deployments
        → No model deployments in past 4 hours
        → Lower the priority of a recent deployment; still check configuration and routing changes

Step 2: Check feature freshness SLOs
        → user_features: 3 hours stale (SLO: 1 hour)
        → Feature pipeline delayed

Step 3: Check feature pipeline status
        → Kafka consumer lag: 10M events (normal: 10K)
        → Data ingestion bottleneck

Step 4: Investigate Kafka cluster
        → Broker disk 95% full on partition 7
        → Storage pressure is a leading hypothesis, not yet a confirmed cause

Step 5: Test the storage-pressure hypothesis
        → Write stalls on the affected broker coincide with stalled ingestion
        → Bounded capacity recovery preserves committed data and consumer offsets
        → Consumer progress and feature freshness recover without a model change
```

The recovery evidence supports storage pressure as the ingestion bottleneck in this scenario. Responders still monitor engagement and delayed quality outcomes after freshness recovers; restoring pipeline progress does not by itself prove that all user impact has ended.

When measured accuracy drops, responders first verify the evaluation signal and then investigate changes in data, model behavior, and execution. Four recurring hypotheses within data and model incidents guide that investigation. Data drift is an input-distribution change, such as evolving demographics or seasonality, whose quality effect requires outcome evidence. Feature staleness arises when ingestion or pipeline delays leave predictions using outdated inputs. Model decay can reflect concept drift, where changed input-output relationships reduce the usefulness of learned parameters. Upstream model changes can invalidate representation assumptions across downstream consumers. These hypotheses are not exhaustive; label defects, configuration changes, and numerical faults can also alter measured accuracy.

The diagnostic sequence then tests the highest-probability shared causes before local model defects:

1. Compare current input distribution to training distribution
2. Check feature freshness across all input features
3. Examine performance on stable evaluation sets
4. Trace dependency graph for recent changes

Example 12.3: Feature pipeline cascade

Scenario: A variant of the `user_engagement_score` change from section 6 ships without versioning. A core platform team alters the shared feature's transformation logic in place, changing its normalization from a 30-day z-score to a 7-day min-max scale.

Diagnosis: Fourteen downstream models across five engineering teams consumed the feature as an un-versioned interface. The in-place mutation invalidated feature distribution assumptions, causing a 12 percent drop in ranking accuracy and 18 hours of cross-team debugging toil.

Systems lesson: Shared feature definitions are production API contracts that require explicit, immutable versioning (`user_engagement_score_v2`) for incompatible changes. A transformation can preserve the field name and type while changing its meaning, so schema validation alone cannot protect downstream model assumptions.

At platform scale, the affected model set helps prioritize shared dependencies for investigation. Table 0.170 maps observed patterns to candidate causes; dependency records and component evidence must establish whether the suggested cause explains the incident. A single affected model can still depend on faulty shared infrastructure, while a broad pattern can reflect a common traffic change:

Table 0.170: Cross-model failure patterns: At platform scale, the pattern of which models degrade simultaneously prioritizes shared dependencies to investigate. Correlated degradation across all recommender systems can motivate checking shared features; an all-vision degradation can motivate checking shared image preprocessing; a single-model degradation starts the investigation at that model and its dependencies.

Pattern	Likely Cause
All RecSys models degraded	Feature store issue
All vision models degraded	Image preprocessing pipeline
Single model degraded	Model-specific issue
Geographic pattern	Regional infrastructure
Time-based pattern	Batch job scheduling

Runbook development

A runbook earns its place when it preserves diagnostic order under time pressure. The first checks follow the symptom. If latency and error rates are nominal but business KPIs fall, inspect feature freshness, input distributions, and recent model or data changes before restarting infrastructure. If requests time out or a region becomes unreachable, serving and infrastructure health take priority. A stalled feature pipeline can return stale values while the model continues producing HTTP 200 responses, so green infrastructure checks cannot close a quality incident. In either path, the runbook names a safe containment action, the evidence to retain, and the owner authorized to escalate.

The reusable structure is a diagnostic flow, not a document template. For a recommendation engagement drop, the responder should move through the same control loop every time. Table 0.171 names the control questions that preserve that order under pressure.

Table 0.171: Runbook diagnostic flow: Use symptoms to prioritize dependency checks while applying safe containment when the evidence warrants it. Attribution and mitigation can proceed concurrently; the runbook records evidence, authority, and the rollback path.

Step	Question	Example evidence
Detect user impact	Which product or cohort is degraded?	CTR, conversion, retention, revenue, or complaint rate
Localize dependency	Did a shared service change for many models?	Feature freshness, model registry, regional health

Step	Question	Example evidence
Bound blast radius	Can traffic be reduced, routed to a fallback, or rolled back?	Canary metrics, rollback target, serving saturation
Escalate by evidence	Which team owns the failed control?	Data pipeline, platform, serving, or model owner
Learn from the gap	Which missing signal would have caught it sooner?	Freshness gate, slice alert, deployment guardrail

Runbook anti-patterns break diagnostic order in three common ways. A too-specific instruction such as "If BERT model fails, restart container" encodes one historical fix rather than a reusable investigation. A vague instruction such as "Investigate the issue" transfers all judgment back to the responder at the worst possible time. An outdated runbook is worse than no runbook when it points responders toward deprecated systems, dead dashboards, or obsolete contacts.

Post-incident reviews

Post-incident reports (PIRs) transform incidents into organizational learning only when they turn one failure into a stronger platform control. The incident record should connect duration and user impact to the timeline of detection, attribution, mitigation, and recovery. Root causes should identify the control that failed or did not exist, and corrective actions should name owners and deadlines so the review changes the platform rather than only documenting the outage.

The useful PIR fields are the ones that force a control decision. Duration and impact quantify severity; the timeline exposes detection and attribution latency; root causes name missing controls; and corrective actions assign ownership for the next platform change. In a feature-freshness incident, the most important observation is not that a disk filled up, but that no freshness gate caught the stalled feature pipeline before engagement metrics moved. The questions in table 0.172 turn that timeline into platform work.

Table 0.172: PIR control questions: A post-incident review is valuable when it converts an incident timeline into a stronger platform invariant.

PIR question	Control decision it should force
How long was user impact visible?	Whether detection latency or mitigation latency dominated the incident.
Which dependency failed first?	Whether the missing control belongs to data, platform, serving, or model code.
Which signal arrived too late?	Whether a new freshness, slice, saturation, or canary guard is needed.
What would have bounded impact?	Whether rollback, exposure limits, admission control, or fallback was absent.
Who owns the next control?	Whether the review changes the platform rather than only recording blame.

Effective PIRs require psychological safety and a systems frame rather than individual blame. The review should identify which systems allowed the incident, not which person caused it. It should ask which signal would have detected the failure earlier, not why an individual missed it. It should prevent the entire class of failure, rather than merely the exact failure that occurred.

Incident ownership for distributed failures

Distributed training and inference can fail at a rank, device, host, fabric link, data shard, or control-plane dependency. The fleet telemetry of section 11 collects the device, rank, network, and facility signals that detect such failures. Mechanism-level diagnosis and recovery semantics resolve individual faults, so incident response adds a narrower contract on top of that telemetry. It joins the signals by stable identifiers so responders can identify the affected domain, assigns authority before an incident occurs, and preserves the evidence needed for escalation and postincident learning.

↩ Heartbeat failure detection and in-flight job recovery procedures are established in section 18.

The telemetry contract starts with stable identifiers. Every event must carry the job or service identifier, attempt and model version, rank and host, device identity, topology location, data-shard or request cohort, software build, a synchronized wall-clock or trace timestamp for cross-host correlation, and a host-local monotonic time or sequence number for local duration and ordering.

Clock-domain and synchronization-uncertainty metadata bound how precisely events from different hosts can be ordered. Logs without these dimensions force responders to reconstruct joins during an outage; unbounded high-cardinality labels can overwhelm the monitoring system. The platform therefore stores low-cardinality health aggregates for alerting and retains sampled or event-scoped high-cardinality traces for diagnosis. Correlation, not raw log volume, determines whether telemetry is operationally useful.

Table 0.173 connects each evidence class to the first owner and the evidence required for escalation.

Table 0.173: Distributed failure telemetry and ownership: The platform collects correlated evidence and routes the incident; the owning subsystem team performs mechanism-level diagnosis. Stable identity and topology fields let responders distinguish one defective rank from a fleet-wide software or fabric failure.

Failure evidence	Fleet-level signal	First owner	Escalation evidence
Collective progress stalls	Ranks entering and completing each collective by topology domain	Training runtime	Blocked rank set, last completed collective, fabric locality
One rank approaches its memory limit	Per-rank allocated, reserved, and peak memory distribution	Model/training team	Allocation phase, model state, comparison with peer ranks
Step time develops a long tail	Rank-level step-time distribution correlated with host and switch	Fleet infrastructure	Straggler persistence, thermal, network, and input evidence
Loss or gradients diverge across ranks	Rank-specific numerical summaries tied to artifact and data shard	Model/training team	First divergent step, shard, build, and checkpoint
Repeated attempts fail on one domain	Failure rate by host, rack, device generation, and software build	Fleet infrastructure	Quarantine history and reproduction on a known-good domain

Ownership must include the authority to contain impact. The training-runtime owner may cancel or restart a job when progress stalls; fleet infrastructure may quarantine a device, host, or topology domain; the data owner may stop a corrupted shard; and the model owner decides whether numerical divergence invalidates the resulting artifact. The incident commander coordinates these actions when more than one domain is implicated. A dashboard that identifies a likely cause without naming who may stop traffic, quarantine capacity, or invalidate an artifact leaves the most consequential decision unresolved.

Telemetry retention closes the control loop. Routine healthy runs need aggregate distributions and sampled traces, whereas failed attempts and release-gate violations require full event-scoped evidence through the postincident review and corrective-action window. The platform should measure attribution latency, percentage of incidents routed to the correct owner on first escalation, recurrence by failure class, and time from corrective action to deployed control. Those measures reveal whether observability is reducing fleet risk or merely generating more data.

On-call practices for ML teams

ML systems require specialized on-call practices because prediction quality, data freshness, and dependency graphs join uptime as reliability concerns. The debugging framework in this section explains why an incident can begin as a business metric anomaly and end in a feature pipeline, a model registry, or a stalled distributed operation. On-call design has to make that diagnostic burden sustainable, building on established site reliability engineering (SRE)[14] principles (Beyer et al. 2016).

A single ML production incident can require several kinds of expertise: a platform engineer to diagnose the GPU scheduler, a data engineer to trace a stale feature pipeline, and a modeling specialist to interpret changed prediction quality. This cross-domain burden is not unique to ML, but data and statistical failures expand the evidence responders must interpret. A tiered response assigns initial containment, triage, and escalation to a primary responder, with clear paths to domain specialists. A 15-to-30-minute routing target is an illustrative operational objective to calibrate against incident severity and coverage, not a universal deadline or a reason to delay an immediately available containment action.

[14] **SRE**: Founded by Ben Treynor Sloss at Google in 2003, SRE introduced error budgets and SLOs as quantitative reliability contracts. For ML systems, classical SRE must be extended: traditional services can fail semantically as well as become unavailable, and models add statistical quality degradation that an uptime check cannot detect. This demands drift-aware SLOs that treat prediction quality alongside uptime as a reliability metric.

Rotation design determines whether the team can sustain that diagnostic burden. Table 0.174 gives a starting policy to adapt to page volume, staffing, time zones, and incident duration. Secondary coverage supplies backup expertise, while explicit handoffs preserve context. Rotation length alone cannot prevent burnout if interruptions and recovery work exceed the team's capacity.

Table 0.174: On-call rotation design: An illustrative starting policy for rotation length, backup coverage, and handoffs. Review interruption burden, recovery work, staffing, and context-transfer quality to determine whether the policy is sustainable; rotation length alone does not establish burnout risk.

Aspect	Recommendation
Rotation length	Start with 1 week; adapt to page load, staffing, and recovery work
Primary + secondary	Always have backup; ML incidents often require multiple experts
Handoff overlap	30 min overlap for incident context transfer
Follow-the-sun	Target 8-hour regional shifts, with explicit handoffs and backup

Alert fatigue poses a persistent risk to on-call effectiveness. Warning signs include engineers discounting notifications, slower acknowledgment, and repeated pages with no useful response. Teams should review drift, freshness, latency, and business-metric thresholds against observed false alarms and missed incidents, and group related alarms without suppressing independent urgent failures. A quarterly review and an alert-to-action target above 80 percent are illustrative policy choices; major workload changes or incidents can require earlier recalibration. Each page should identify its owner, diagnostic evidence, and runbook. The aim is actionable response across model, data, and infrastructure failures rather than ML-specific intervention alone.

Beyond general SRE skills, ML on-call requires interpreting model quality metrics, understanding data dependencies, and choosing safe containment while diagnosis continues. Toil reduction matters because recurring manual tasks consume the capacity needed to improve the platform. Track their share of on-call time over a declared measurement window; a target below 25 percent is one planning choice, to be assessed alongside page load, recovery work, and time available for engineering improvements.

Common ML toil accumulates at the model-platform boundary in tasks such as restarting failed runs, processing routine deployments, triaging repeated alert noise, and compiling reports. Automation can reduce this overhead when the action and its failure conditions are understood. An hour of development that saves ten minutes per incident recovers its initial labor after six incidents, before validation, maintenance, and exception-handling costs. Prioritization should include those costs and the risk of automating the wrong response.

The controls built so far, from release pipelines, registries, and feature contracts to hierarchical monitoring and incident response, are expensive to build, and building them separately for every product team would recreate the duplication that motivated them. Organizations therefore package these capabilities as a unified internal product, a discipline known as platform engineering.

Platform Engineering

Organizations where every data science team independently provisions GPU clusters, configures model registries, and wires up alerting dashboards duplicate infrastructure work. **Platform engineering** addresses this by treating the ML infrastructure itself as a product, providing supported paths that reduce repeated implementation and maintenance. Product teams still own model behavior and workload-specific decisions; the platform makes shared operational responsibilities explicit.

Platform engineering for machine learning creates shared infrastructure that absorbs recurring operational complexity while exposing the controls model teams need. Effective platforms balance self-service capabilities that accelerate development against governance requirements that enforce common release and reliability policies.

Abstraction levels

The abstraction-level decision is how much operational judgment the platform should centralize on behalf of model teams. Too little abstraction leaves every team paying the same infrastructure tax;

too much hides the controls that unusual workloads need. The four levels in table 0.175 sit on that flexibility-vs.-convenience curve, distinguished by which concerns the platform owns and which it leaves to the model team.

Table 0.175: Platform abstraction levels: Platform engineering centralizes different parts of the ML lifecycle at each abstraction level. The right level depends on whether an organization values workload-specific control or shared operational invariants more.

Level	Platform owns	Model team still owns	Best fit and risk
Level 1	GPU capacity, storage volumes, network connectivity, and basic orchestration such as Kubernetes namespaces	Training code, serving stack, monitoring, and deployment path	Fits unusual workloads with strong infrastructure teams; becomes costly when many teams repeat the same operational work
Level 2	Standardized containers, ML-aware Kubernetes integration, persistent volumes, and basic service-mesh support	Experiment structure, training jobs, serving releases, and monitoring workflows	Reduces packaging duplication; operational correctness still depends heavily on each team
Level 3	ML-specific control loops such as topology-aware scheduling, hyperparameter tuning, distributed training, serving	Modeling judgment and workload-specific trade-offs	Absorbs failure modes that recur across teams; systems such as Kubeflow and Ray often sit near this level
Level 4	Full lifecycle product: IDEs, feature stores, experiment tracking, registries, CI/CD, monitoring, cost, governance	Higher-level product and modeling intent, with less direct low-level control	Maximizes speed and consistency; the platform team accepts responsibility for policy, reliability, and economic visibility

Managed services such as Vertex AI and SageMaker, and lifecycle tooling such as TensorFlow Extended (TFX)[15] at Google (Baylor et al. 2017) and MLflow (Zaharia et al. 2018), support different parts of this spectrum. A product name does not establish the organization's abstraction level. The decisive boundary is which lifecycle responsibilities the assembled platform actually owns, which controls model teams retain, and who supplies policy, reliability, and economic visibility for the gaps.

15 **TensorFlow Extended (TFX)**: Google's production ML pipeline framework includes TensorFlow Data Validation (TFDV), which checks data against schema expectations and configured drift and skew comparisons. Connecting those checks to a release policy allows a pipeline to stop before spending training resources on detected data defects. The checks cover declared expectations; a passing result does not establish that every value is correct or that a distribution change is harmless.

Platform lifecycle and adoption

An internal ML platform is a versioned product, not a one-time infrastructure project. Its interfaces, supported workflows, reliability targets, and ownership boundaries must evolve without forcing every model team into synchronized migration. Each platform release therefore needs compatibility guarantees, a migration path, telemetry that distinguishes old and new paths, and a retirement date for deprecated behavior. The platform team also needs its own service-level objectives because a registry, feature service, or deployment controller outage can block every product team at once.

Adoption measures whether the platform removes work rather than merely centralizing it. Useful indicators include the share of production models on supported paths, time from validated artifact to bounded production traffic, exception rate, migration completion, support load, and repeated toil outside the paved road. A high signup count with persistent custom pipelines signals nominal adoption but weak product fit. Conversely, mandatory migration can raise the adoption percentage while increasing lead time and operational risk. The platform roadmap should therefore combine fleet outcomes with user evidence: incident reduction and cost attribution matter alongside time-to-first-deployment and the fraction of teams that can complete routine changes without platform intervention.

Lifecycle decisions must preserve an escape hatch for workloads whose constraints do not fit the shared path. Exceptions should be explicit, time-bounded contracts with named owners and integration obligations, not permanent forks. When exception volume grows around the same missing capability, the pattern becomes product evidence for the next platform version. When a capability no longer earns its maintenance and migration cost, the platform should deprecate it through measured dual-running, compatibility testing, and a final removal gate. This product discipline keeps the shared control plane from becoming the next source of technical debt.

Self-service model deployment

Self-service deployment works only when the platform can let model teams move quickly while keeping risky choices inside governed boundaries. The design question is therefore which deployment decisions should remain team-owned and which invariants the platform must enforce before a model receives production traffic.

Deployment API design

A well-designed deployment API abstracts operational complexity by making the model team's intent declarative. The platform lesson is not the shape of a particular YAML file; it is which invariants the platform must capture before it turns a model version into fleet traffic. The invariants in table 0.176 are the platform contract behind that declarative interface. Prometheus[16] is one common operational sink for the telemetry side of that contract.

16 **Prometheus**: An open-source monitoring system that scrapes and stores labeled time series. A fleet can export operational metrics and computed drift scores through the same metrics interface while retaining detailed prediction records elsewhere for analysis. The distinction is between compact alerting signals and the evidence needed to investigate them; it does not require every platform to adopt the same two-tier implementation.

Table 0.176: Self-service deployment invariants: A deployment API should encode the controls that keep local team autonomy from creating fleet-wide risk. The concrete syntax can vary, but the invariants must survive across platforms.

Declared intent	Platform invariant
Model artifact and version	The serving system loads exactly the validated model from the registry.
Resource envelope	GPU, memory, and replica requests stay inside quota and scheduling constraints.
Traffic policy	Canary, shadow, and rollback controls bound blast radius before full promotion.
Quality gates	Error, latency, drift, and task-quality thresholds block unsafe promotion.
Telemetry sink	Operational metrics flow into operational monitoring, while model-quality signals flow into drift and slice monitors.
Approval boundary	Sensitive data access, budget overruns, and high-risk release windows require review.

TensorFlow Serving provides model-serving lifecycle capabilities for loading, versioning, canarying, and rolling back models (Olston et al. 2017). A self-service platform adds the policy layer around those capabilities: model teams specify intent, and the platform translates it into scheduling, traffic routing, telemetry, and approval controls.

Resource management

Efficient resource utilization is essential for platform economics, but training and serving place different demands on shared capacity. Training jobs can trade completion time for utilization within their deadlines; serving needs headroom to protect tail latency as requests arrive. A scheduler can manage both, provided its policy represents those distinct constraints rather than maximizing utilization alone.

Training resource management

Training resource policy must expose which jobs may wait or be preempted,[17] which deadlines are binding, and who accepts the recovery cost. Scheduler mechanisms enforce those choices. The platform records checkpoint readiness, budget, priority, and accountable owner with each job so a utilization improvement does not silently transfer deadline or lost-work risk to a model team.

Serving resource management

Serving workloads bind on latency rather than batch flexibility. Demand fluctuates with time of day, events, and seasonality, but a live request cannot be preempted without user impact. The serving control loop therefore starts from the latency SLO and asks how much capacity must be online before requests arrive.

Serving autoscalers translate request load and queue pressure into capacity decisions. Operations owns their policy envelope: the latency SLO, warm rollback capacity, tenant limits, budget, and authority to override normal scaling during an incident. Those commitments must remain visible in the release record so a cheaper allocation cannot silently remove the headroom on which validation relied.

17 **Job Preemption**: The ability to terminate lower-priority workloads to free resources for urgent work. Preemptible capacity is also how cloud providers sell deep discounts, which section 20 prices. Without a usable checkpoint, a preempted 72-hour run may need to restart from scratch, potentially erasing the discount. Checkpoint frequency trades I/O overhead against wasted-compute risk; the right policy depends on job duration, interruption frequency, and recovery cost.

↩ Scheduler mechanisms for queueing, priority preemption, and elastic resizing of training jobs are established in chapter 24.

↩ Autoscaling controllers that convert queue growth and token arrival rates into replica counts are established in section 12.

Platform utilization metrics

Once training and serving controls are separated, the shared platform still needs an aggregate measure of whether capacity is being converted into useful work. Equation 0.70 defines platform efficiency as the capacity-weighted average utilization across all resources:

$$U_{\text{platform}} = \frac{\sum_i U_i \times \text{Cap}_i}{\sum_i \text{Cap}_i} \tag{0.70}$$

where U_i is the utilization of resource i and Cap_i is its capacity in a common unit over the same interval. Heterogeneous accelerators require a declared workload normalization; CPU cores, device counts, and bytes cannot be added directly. Weighting by capacity keeps the metric honest about where stranded work lives: an idle single GPU and an idle eight-GPU node are not equally wasteful, so a small underused resource should not drag the platform average down as hard as a large idle pool.

However, raw utilization is incomplete. The scheduler already separates allocated, compute, and productive utilization for a single cluster; the platform metric needs the same distinction. Effective utilization must also consider utilization quality to determine whether GPUs are doing productive work or waiting on data, utilization fairness to assess whether utilization is distributed appropriately across teams, and utilization cost to evaluate efficiency in terms of cost per unit of ML output.

↩ The allocated, compute, and productive utilization tiers are established in section 17.

GPU cluster efficiency

A platform operates a 100-GPU training cluster with average GPU utilization of 65 percent, memory utilization of 80 percent, four-hour average queue waits, and an internal chargeback rate of \$2.50/GPU-hour. Memory occupancy and compute utilization alone do not identify the bottleneck: profiling must separate input stalls, communication, kernel inefficiency, and scheduling gaps. Queue waits may also reflect burst arrivals or placement constraints rather than insufficient aggregate capacity. Suppose profiling identifies input stalls and confirms that recovering them increases useful throughput at the same quality target. Daily cluster spend is fixed by provisioned capacity at $100 \times 24 \times \$2.50 = \$6,000/\text{day}$. Useful work, valued at the same chargeback rate, is the utilization times that spend, $100 \times 24 \times 0.65 \times \$2.50 = \$3,900/\text{day}$; the remainder pays for idle or stalled accelerators. If data-loading optimization raises compute utilization to 80 percent, useful work rises to $100 \times 24 \times 0.80 \times \$2.50 = \$4,800/\text{day}$ before adding any capacity. The recovered capacity has an annualized value of \$328,500 at the stated rate, but the fixed cluster bill remains unchanged. Cash savings require reducing provisioned capacity or avoiding a future purchase; serving queued work creates value through additional output instead. After the validated bottleneck repair, scheduling and capacity planning address the remaining queue pressure.



Checkpoint 12.4: The annual cost of GPU cluster underutilization

Use daily cluster spend (\$6,000/day) and useful-work value, utilization times spend (\$3,900/day at 65 percent utilization), to extend the analysis to annual scale and compare against the platform ROI argument.

- ☐ **Underutilization cost**: calculate the annual cost of underutilization for the 100-GPU cluster at 65 percent utilization, the cost after optimization to 80 percent, and the annual value of recovered capacity. State when that value would become cash savings.
- ☐ **Queue dynamics**: Little's Law (theorem 10.1) holds for any stable queue, rather than serving requests alone. Applied to the training-job queue, the average number of jobs waiting equals the job arrival rate times the average queue wait. Calculate the job arrival rate for a 4-hour average wait with 100 jobs in queue and explain what additional job-size, service-time, and arrival-pattern measurements are needed to choose expansion or utilization optimization.
- ☐ **Savings vs. platform**: compare the annual recovered-capacity value from cluster optimization to the \$2M/year platform investment scenario. Holding the utilization gain and chargeback rate fixed, determine the GPU count where annual recovered-capacity value

equals that investment, and state what must happen for the capacity value to become cash savings.

Advanced fleet metrics and ML productivity goodput

While utilization metrics capture resource busyness, they often fail to reflect true engineering value. A GPU spinning at 100 percent utilization on a hyperparameter tuning job that eventually fails due to a configuration error is "efficient" in terms of hardware but "wasteful" in terms of productivity. ML productivity goodput (MPG) turns that distinction into a fleet metric (Wongpanich et al. 2025).

↩ The Fleet Law and the ML productivity goodput metric introduced beside it are established in section 11.

The Fleet Law accounts for time within one distributed step; MPG complements it by locating lost productivity across a whole portfolio of jobs. Its three multiplicative factors share a common workload and time boundary, and they cut across C^3 rather than mapping onto one axis:

$$\text{MPG} = \eta_{\text{scheduling}} \times \eta_{\text{runtime}} \times \eta_{\text{program}}$$

In this decomposition, scheduling goodput ($\eta_{\text{scheduling}}$) measures the fraction of fleet capacity-time for which a job has all resources needed for synchronous progress. Partial allocations do not count as fully available work capacity. Runtime goodput (η_{runtime}) measures productive, checkpoint-preserved progress relative to that allocated time, excluding initialization, input delays, and work lost after the last checkpoint. Program goodput (η_{program}) compares an ideal execution-time baseline with actual program execution time, exposing code, compiler, and communication inefficiencies. These boundaries prevent a single delay from being charged indiscriminately to several factors. Their product measures efficiency rather than an absolute throughput rate; the decomposition helps locate which layer limits useful fleet output.

Multi-tenancy and isolation

Enterprise platforms earn their sharing dividend only if multiple teams can share infrastructure without sharing failures. The scheduler's quotas and fair-share policies and the serving system's isolation mechanisms, established in section 11, already bound interference within one cluster or one inference service. What the platform adds is one namespace hierarchy across training and serving, plus cost isolation that follows each tenant's spend, and neither the scheduler nor the serving system owns those alone. Multi-tenancy is therefore an isolation problem before it is an efficiency problem, and the platform must bound performance interference, data exposure, and cost spillover at the same time.

↩ Quotas, hierarchical fair-share, and burst borrowing are established in section 17.

Isolation requirements

Tenants need isolation at every boundary where one team's workload, data, or cost can affect another. Performance isolation uses resource quotas, fair-share scheduling, and network quality-of-service rules to bound interference from training spikes or serving bursts. Security isolation enforces access controls, network segmentation, and encryption across tenant data paths. Cost isolation combines granular metering with declared allocation rules for shared services and reserved capacity; not every shared cost can be assigned directly to an individual request. Together, these boundaries establish the conditions under which product teams can share infrastructure without negotiating every allocation manually.

Namespace architecture

A typical multi-tenant architecture uses hierarchical namespaces:

```
Platform
|-- Team A
|   |-- Development
|   |-- Staging
|   `-- Production
|-- Team B
|   |-- Development
|   |-- Staging
```

```
|   `-- Production
`-- Shared
    |-- Feature Store
    |-- Model Registry
    `-- Monitoring
```

Each team receives dedicated namespaces with resource quotas, while shared services operate in common namespaces with appropriate access controls. Without controls, one team's demanding workload can degrade performance for others, the noisy neighbor problem, which at platform scale crosses the boundary between training and serving.[18] Prevention requires controls at request, rate, priority, and budget boundaries.

To prevent any single tenant from overwhelming shared platform services, four complementary controls govern the request path. Request limits place hard caps on the compute and memory an individual invocation may consume, while rate limiting bounds aggregate query velocity across tenant boundaries. Under heavy cluster contention, priority classes ensure that mission-critical production traffic receives scheduling preference over ad-hoc or batch queries. Finally, burst budgets permit brief, temporary resource overages to accommodate legitimate spikes while preserving long-term fairness across the fleet. Together, these controls make fairness enforceable directly in the data plane rather than relying on after-the-fact operational negotiation.

Isolation makes sharing safe, but it does not make sharing pay. Cost isolation meters each tenant's consumption; whether the shared fleet is worth its capital, how its spend reaches the teams that caused it, and when a workload's cost justifies optimization are economic questions that the platform must answer with the same rigor it applies to releases.

[18] **Noisy Neighbor Problem**: On a shared ML platform the interference often crosses workload classes, because training jobs allocate GPU memory greedily; a single job requesting all available HBM on a shared node can starve co-located inference services, causing latency spikes that violate SLOs. Sharing therefore requires an explicit fit, eviction, offload, time-sharing, or partitioning policy, and even physical partitioning leaves shared-fabric contention in place.

Fleet Economics and Utilization

A provisioned GPU incurs capacity costs whether it serves predictions, waits between training bursts, or remains reserved for rollback. Those idle periods have different meanings: a scheduling bottleneck strands capacity, while a justified reserve buys recovery capability. The operational machinery developed so far decides how models change safely; it does not decide whether the capacity underneath them is worth what it costs. Fleet economics therefore distinguishes productive use, deliberate headroom, and avoidable waste before treating higher utilization as an improvement.

Three economic levels prevent that ledger from collapsing unlike decisions into one cost number. *Platform economics* (section 2) asks whether common control-plane capabilities repay their fixed development and maintenance cost across the portfolio. *Fleet economics* asks whether shared hardware, facilities, and capacity commitments produce useful work at acceptable utilization and risk. *Workload economics* asks whether one training run, serving endpoint, or experiment earns its marginal compute, data, and engineering cost. A gain at one level does not establish value at the others. Faster jobs do not remove an existing capacity commitment, and high fleet utilization does not establish that a platform repays its adoption and maintenance costs. The placement and scheduling mechanisms in chapter 24 operate within this capacity envelope. Operations owns the commitments around them: capital planning, portfolio return, lifecycle total cost of ownership (TCO), and cost attribution across teams.

Definition 12.1: ML systems TCO

Total cost of ownership (TCO) for ML systems is the complete economic accounting of developing, deploying, and operating machine learning capabilities across their full lifecycle.

1. **Significance**: It captures the cost inversion of scale: training incurs a cost per run, while inference accumulates with served work. The lifecycle example in section 20 shows a high-traffic service exceeding its initial training bill within two years under fixed traffic and unit cost.
2. **Distinction**: This lifecycle view includes serving efficiency alongside hardware, data, development, and recurring training costs. The energy and compute cost of each prediction depends on achieved hardware efficiency η_{hw} as well as batching and model size.

3. **Common pitfall**: A frequent misconception is that the initial training bill is the primary financial risk. In reality, the data debt and maintenance overhead are the "silent interest rates" that can make an accurate model economically unsustainable in production.

Platform economics was priced earlier in the chapter, so the analysis here follows the remaining levels downward. It prices the fleet first, then the workload, and closes with financial operations (FinOps), the controls that attribute that single ledger to teams and assign the authority to act on it.

Engineering constraints shape the feasible economic choices. Infrastructure must first meet quality, latency, reliability, and capacity requirements; useful computation per dollar then helps compare feasible designs over the system's lifetime. At an assumed $350,000 per 8-GPU DGX H100 node, a 10,000-GPU cluster represents about $437.5M in node hardware capital expenditure before networking, facility, staffing, and maintenance costs. The purchase price, however, is only the beginning. Over the three-year planning horizon used here, those operating and supporting costs determine the full commitment. TCO[19] connects that commitment to useful output and provides the basis for the broader ML-lifecycle accounting developed in section 20.

[19] **TCO Boundary**: A fleet comparison must declare what its total cost of ownership counts. The boundary must include the supporting power, cooling, networking, facility, and staffing commitments. Moving from 20 percent to 80 percent useful utilization spreads fixed costs over more output, but whether that changes the ownership decision depends on the rental alternative, workload fit, and costs included in each option.

Depreciation, power, and utilization also matter in traditional IT, but an accelerator fleet concentrates a large commitment in resources that can remain idle when data, communication, or scheduling falls behind. With hardware and facility commitments fixed, lower useful utilization spreads those costs over less completed work. The platform must therefore keep expensive capacity productive while preserving the headroom required for failures, rollbacks, and traffic spikes. The economic target is useful output within those operating constraints, not maximum device busyness.

Two reference prices anchor the arithmetic that follows. The internal fleet rate of $2/GPU-hour approximates what an owned H100 fleet operated at high utilization costs its own teams, and the on-demand cloud rate of $4/GPU-hour is the rental reference for build-vs.-buy comparisons. Other rates in the chapter, such as the internal chargeback price in the GPU cluster efficiency example, the FinOps spending scenario, or the non-energy accelerator-hour rate in the training cost example, are scenario choices and are labeled as such where they occur. Cluster sizes follow the same rule. The running fleet is the Archetype A reference cluster of section 11, the H100 cluster that trains the GPT-3-class reference instance; every later analysis prices it unless it names a separate scenario.

Cost centers as operating constraints

The total cost of an ML cluster decomposes into two broad categories. **Capital expenditure (CapEx)** covers the one-time costs of building the infrastructure: accelerators, servers, networking equipment, facility construction, and installation. **Operational expenditure (OpEx)** covers the recurring costs of running it: electricity, cooling, network bandwidth, staffing, maintenance, and software licenses.

For a large on-premises cluster, table 0.177 separates the cost stack into capital and operating centers, each with different utilization implications.

Table 0.177: Frontier training cost stack: Capital costs are dominated by accelerators, networking, and facilities, while operating costs are dominated by electricity and specialized staffing. The shares are broad planning ranges; in the running 1,024-GPU example, node hardware is about 75 percent of CapEx and electricity about 44 percent of OpEx.

Cost center	Cost class	Typical share	Included components and implications
Accelerators and servers	CapEx	50–60% of CapEx	GPUs or TPUs, host servers, baseboard management controllers, and local storage; this category dominates upfront purchase and depreciation.
Networking	CapEx	10–15% of CapEx	InfiniBand switches, HCAs, cables, and optical transceivers; the running example budgets about $5 million for a two-tier fat-tree serving 1,024 GPUs.
Facilities and cooling	CapEx	15–25% of CapEx	Building construction or retrofit, transformers, UPS systems, PDUs, and cooling plant; liquid cooling adds 10–15% to facility costs but reduces long-term OpEx.

Cost center	Cost class	Typical share	Included components and implications
Electricity	OpEx	60–70% of OpEx	At \$0.07/kWh, a 1,024-GPU H100 cluster consuming about 1.1 MW including cooling at power usage effectiveness (PUE) 1.1 costs about \$665,000 per year.
Staffing and maintenance	OpEx	20–30% of OpEx	System administrators, hardware technicians, replacement parts, and software license fees.

The running cost example is Archetype A's reference instance, the 175B-parameter GPT-3-class model, trained on the reference cluster of 1,024 H100 GPUs spread across 128 nodes. For the illustrative training plan developed below, assume a 2–4-week run. Parameter count alone does not determine this duration; the later planning example states its token and throughput budget. Evaluating the TCO over a three-year lifecycle reveals a stark utilization dependency. The hardware CapEx dominates at \$44.80M (\$350,000 per node), supported by a \$5 million investment in a two-tier InfiniBand fat-tree network and a proportional \$10 million facility allocation. Operational costs add approximately \$1.5 million annually for electricity (at \$0.07/kWh with a PUE of 1.1) and specialized staffing, bringing the three-year total to roughly \$64 million. If this dedicated cluster only trains six large models per year, the effective cost per run is \$3.6 million. Renting the same 1,024-GPU allocation in the public cloud at \$4/GPU-hour costs about \$1.4M–2.8M per run (1,024 GPUs $\times$ 336–672 hours $\times$ \$4), or \$25M–50M over three years for six runs per year. Cloud rental is cheaper for this bursty scenario when idle allocations can be released. At the opposite extreme, *continuous utilization* spreads the owned cluster's stated costs over every available hour, reducing the cost to approximately \$2.39/GPU-hour, below the cloud reference rate. Ownership need not require continuous use; the actual break-even lies where useful demand repays the fixed commitment under matched cost boundaries.

↪ Power usage effectiveness as a facility metric, and what it omits, is developed in section 15.

Utilization as the economic invariant

The most consequential economic question is whether the fleet can sustain enough useful load to amortize fixed capacity. Build-vs.-buy is one expression of that question, but the same invariant appears inside a deployed platform: reserved capacity, fallback pools, regional replicas, and canary headroom all become economical only when their reliability value justifies their idle cost. Ownership pays a large CapEx step up front and then climbs a shallow operating slope, while cloud rental starts at zero and rises steadily; under sustained high utilization the rental line overtakes the owned cluster within a 30-month horizon (figure 0.170).

The plotted reference uses 1,024 H100 GPUs across 128 nodes at 80 percent sustained utilization. The on-premises curve starts at \$59.80M in upfront CapEx and adds about \$1.5M per year, while cloud rental at \$4/GPU-hour grows by about \$2.39M per month. Over 30 months, the cloud line reaches \$71.8M, and the on-premises line crosses it around 26.4 months.

Cloud providers charge by the GPU-hour. At the on-demand reference rate of \$4 per H100-hour, a single 8-GPU node rented only during 80 percent of the year costs \$224,256 per year. An on-premises DGX H100 node costs approximately \$350,000 to purchase. Amortized over three years and combined with electricity costs of \$4,519 per node per year, the total annual on-premises cost is approximately \$121,186 per node. This assumes idle rental periods can be released; an allocated but idle GPU still incurs a bill. Solving the break-even equation with electricity scaling at the same allocation fraction, on-premises infrastructure becomes favorable when sustained utilization exceeds roughly 42.5 percent. This narrow comparison includes node acquisition and utilization-proportional electricity; it excludes idle power, network and facility capital, staffing, maintenance, and financing. It does not use the wider owned-cost boundary of the cluster comparison in figure 0.170.

The same calculation explains why cloud pricing cannot be read as a simple price list. The scenario's reserved discount of 40–60 percent converts optionality into commitment. Its spot or preemptible discount of 60–90 percent introduces interruption risk. The relevant comparison is cost per completed workload under the deadline or service contract. Checkpoint recovery, replacement capacity, and traffic fallback offer different ways to manage that risk; no single combination is required for every workload.

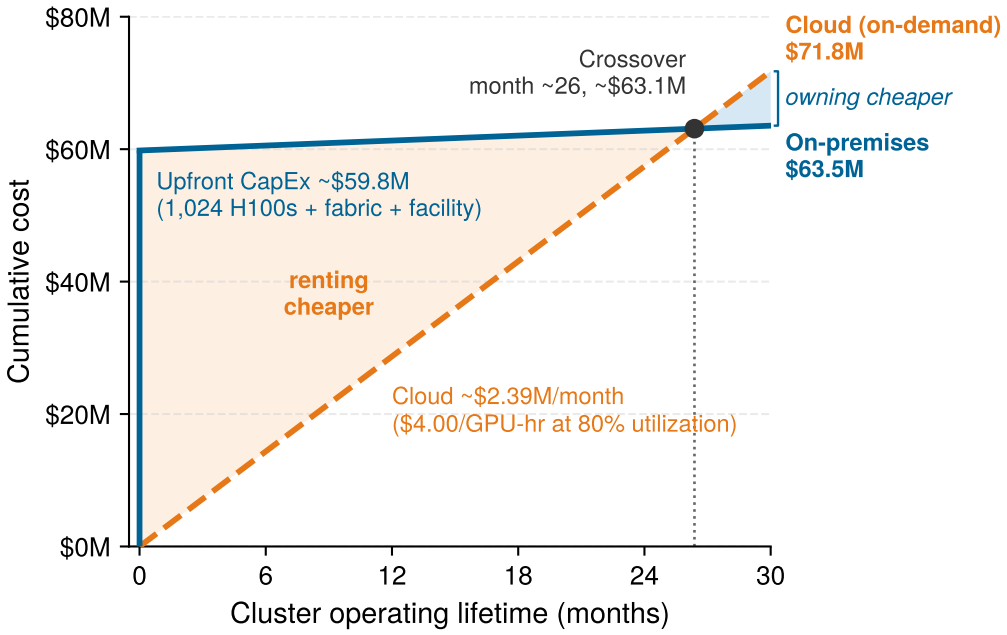


Figure 0.170: Build vs. buy TCO: The curves compare cumulative cost over a 30-month horizon for a high-utilization H100 reference cluster. On-premises deployment begins with a CapEx step plus monthly OpEx, whereas cloud rental cost rises linearly with utilization. Over a 3-year service life, owning pays off only above 59.7 percent sustained utilization; below that, renting stays cheaper.

Owned capacity moves a different set of risks into the platform. Facility construction, networking, staffing, maintenance, and hardware obsolescence continue to accrue even when the GPUs are idle; their cost depends on site, power delivery, cooling design, and accounting boundary. A three-year-old GPU may be economically stranded if the next generation delivers 3× more performance per watt. The engineering question is therefore not whether one purchasing channel is universally cheaper; it is whether the workload mix can keep fixed capacity useful enough to compensate for its lifecycle and operating risks.

Hybrid designs follow from the same invariant. Owned infrastructure can carry predictable baseline work, while cloud allocations absorb peak demand, early hardware access, or bursty training campaigns. The hybrid split is not a compromise between two vendor categories; it is a scheduling policy over capital risk, utilization, and deadline risk.

For the 175B model, workload cadence changes the ownership decision. Consider a dedicated training fleet used only 15–20 percent of the time because its annual training campaign leaves long gaps. A portfolio of experiments, hyperparameter sweeps, fine-tuning jobs, and model variants could instead sustain 70–80 percent utilization on the same hardware, provided those jobs fit its capacity and scheduling constraints. Serving can also fill gaps when the hardware and isolation policy support it. These illustrative utilization levels describe workload mixes, not consequences of training a particular model. A hybrid design can keep predictable baseline work on owned capacity and rent the temporary expansion, such as the 5–10× baseline allocation assumed here for large training runs.

Operational complexity

The TCO ledger must include the operational work that sustains the fleet. Hardware maintenance must diagnose failed GPUs, links, network adapters, and cooling components before a local fault becomes a fleet-wide slowdown. The five-hour fleet failure interval in the scenario of section 11 informs staffing, but does not determine headcount by itself. Staffing also depends on diagnosis and repair time, automation, concurrent incidents, and coverage requirements while the rest of the fleet keeps working.

The software side creates the same coupling. CUDA, GPU drivers, InfiniBand drivers, container runtimes, schedulers, monitoring systems, and training frameworks all participate in the achieved utilization number. A driver/toolkit incompatibility can silently degrade performance, while a scheduler or monitoring gap can strand accelerators behind failed jobs. Staffing depends on automation, service commitments, and operating scope because performance optimization is continuous: as models, frameworks, and hardware configurations change, communication patterns, memory pressure, and parallelism strategies change with them. Section 4 works an underutilized fleet through the C^3 diagnosis, ruling out communication before isolating the compute axis, which shows the performance engineer how to locate where the lost utilization goes rather than tuning blindly.

↪ The C^3 telemetry diagnostic decision tree and fleet D·A·M scorecard are operationalized in section 4.

Cloud providers charge a margin above raw hardware and electricity partly because they absorb this operating burden. The point is not that cloud is simpler in every technical sense; it exposes a different interface. The platform either pays for internal expertise in GPU kernel behavior, InfiniBand operations, distributed-systems debugging, liquid cooling, and power infrastructure, or it pays a provider to hide some of that machinery behind a service contract. In both cases, the economics are still governed by useful work per dollar.

From TCO to total value of ownership

A more complete framework than TCO is total value of ownership, which includes the value generated by infrastructure rather than only its cost. Two clusters with identical TCO may create different outcomes if one reaches a result two weeks earlier, sustains higher scaling efficiency, starts jobs faster, checkpoints more cheaply, or serves the resulting model at lower cost per token. The value terms are hard to price exactly, but they are not optional in systems reasoning: time-to-result affects product deadlines, scaling efficiency affects final model quality under a fixed training window, experimentation velocity affects the number of hypotheses the team can test, and inference efficiency can dominate training cost over a multi-year deployment.

This value-oriented perspective changes the infrastructure decision from cost minimization to constraint management. A cheaper cluster that slows the research cycle or produces a model with higher serving cost may be more expensive over the model lifecycle. Conversely, a more expensive training platform can pay for itself if it enables a smaller or more efficient deployed model.

The inference dimension of total value of ownership (TVO) connects a training investment to the service it supports. Consider one training run of the 175B model costing $5M, followed by a three-year deployment without additional training in this comparison. The service handles 10 million queries per day, each generating an average of 500 tokens, for 5 billion tokens daily. At the assumed cost of $2 per million tokens, the daily bill is $10,000, or approximately $3.6M per year. With traffic and unit cost held constant, cumulative serving cost overtakes the $5M run after about 16 months and reaches roughly twice its cost over three years. This example illustrates the serving cost dominance law (principle 16); a lifecycle forecast must add retraining and changing demand when they occur. If an additional $2M investment produces a validated 20 percent reduction in serving cost at matched quality and traffic, the three-year gross savings are $2.2M, enough to recover that investment before any additional maintenance costs.

The lifecycle value of a model still depends on what the platform pays for the capacity that trains and serves it. Comparing owned and rented capacity at a larger fleet scale tests that commitment, provided each estimate states which costs it includes.

> Napkin Math 12.9: The 10,000-GPU cluster
>
> Consider a cluster of 1,250 DGX H100 nodes (10,000 GPUs) for training the 175B model.
> **On-premises (3-year lifecycle)**:
>
> - **Hardware CapEx**: 1,250 × $350,000 = $437.5M
> - **Network CapEx**: ~$25M (InfiniBand fat-tree fabric)
> - **Facility CapEx**: ~$75M (liquid-cooled data center hall)
> - **Annual Electricity**: Simplified GPU-only estimate: 10,000 GPUs × 700 W × PUE 1.1 × 8,760 h/year × $0.07/kWh = $4.7M/year

- **Annual Staffing**: ~$5M/year
- **3-year total**: $537.5M + 3 years × $9.7M = ~$566.7M

Cloud rental (3-year rental at 80 percent utilization):

- **Annual Cost**: 10,000 GPUs × $4/GPU-hour × 8,760 h/year × 0.80 = $280.3M/year
- **3-year total**: ~$841.0M

Systems insight: With the stated prices and cost boundary, on-premises saves approximately $274.3M over three years at 80 percent utilization, but the savings disappear below roughly 53.9 percent. Owned hardware still incurs facility and staffing costs regardless of load. This is a scenario comparison, not a procurement quote: its GPU-only electricity estimate omits host and network power, and omitted maintenance or financing costs would also change the break-even point.

The section has now produced three build-vs.-buy break-even utilizations, and they differ because each draws a different cost boundary around owned capacity. Table 0.178 lines them up. All three use the same on-demand cloud reference rate, so the spread comes entirely from what each scenario charges to ownership.

Table 0.178: Build-vs.-buy break-even by cost boundary: Three scenarios compare owned capacity with the same on-demand cloud rate. The single-node comparison omits network, facility, and staffing costs, so its threshold is lowest; the two cluster scenarios include them and differ by scale and by how each prices operating cost. A procurement decision needs the boundary of the cluster scenarios or wider.

Scenario	Scale	Owned cost included	Break-even utilization
Single-node comparison	One 8-GPU DGX H100 node	Node purchase amortized over three years; electricity proportional to use	42.5%
Build-vs.-buy figure (figure 0.170)	1,024 GPUs (the running cluster)	Nodes, network, and facility CapEx plus annual OpEx over the 3-year life	59.7%
10,000-GPU notebook	10,000 GPUs	Nodes, network, and facility CapEx; GPU-only electricity at full load; staffing; three years	53.9%

The 10,000-GPU threshold explains why infrastructure scale can become a competitive advantage.

Systems Perspective 12.5: The infrastructure moat

The 10,000-GPU scenario illustrates how sustained demand can support ownership. A portfolio that keeps compatible capacity usefully occupied at 70–90 percent utilization spreads fixed costs over more work than one operating at 20–30 percent. These are illustrative demand regimes, not utilization guarantees based on organizational size. Continuous training pipelines, model refreshes, and compatible inference workloads can support the higher regime; sporadic campaigns favor the option to release rented capacity. This dynamic can create an infrastructure moat when a broad workload portfolio lowers unit cost enough to fund further investment. The advantage depends on useful demand and operating discipline, not fleet size alone.

Depreciation and lifecycle

ML accelerators depreciate as newer devices change the cost of useful work. A physically functioning accelerator can become uneconomic for a particular training workload while remaining useful for another. The peak arithmetic efficiencies in table 0.179 provide one screening measure, but depreciation and refresh decisions require sustained throughput at matched quality, memory capacity, energy consumption, and the cost of replacing otherwise usable equipment.

Resale value depends on supply, demand, memory capacity, software support, and the workload a buyer intends to run. A refresh budget should therefore test a range of resale assumptions rather than extrapolating a fixed historical depreciation rate across generations.

Refresh policy connects lifecycle planning to scheduling. The three-year horizon used in these examples is a planning assumption, not a universal accounting life or a required replacement date. Replacing the entire fleet at once creates a large CapEx spike, while staggered refresh spreads expenditure but leaves the scheduler with mixed-generation hardware. Placement must then account for different compute capabilities, memory capacities, and communication bandwidths. Keeping generations in separate job pools is one option; jobs that span generations need explicit support for their performance differences.

The same lifecycle logic determines where older accelerators remain useful. A GPU that is inefficient for the largest training runs may still serve smaller models, fine-tuning jobs, or memory-bound inference economically if its capacity, bandwidth, and energy cost meet those workloads' requirements. A newer device's peak arithmetic advantage alone does not settle that comparison. Resale, repurposing, and capacity-sharing arrangements preserve value only when the platform can route useful work to the appropriate generation without hiding performance cliffs from users.

Depreciation is most punitive for bursty workloads. If a team trains one large model per year, the GPUs lose value during the idle months even though they perform no useful computation. Cloud capacity amortizes the same depreciation across many customers, while owned capacity must amortize it across the owner's own workload mix. That is why the utilization invariant appears again: the hardware must either stay busy or be cheap enough to strand.

Isolating hardware cost shows how much depreciation alone charges each run of the 175B model. Under the $350,000-per-8-GPU-node assumption, the 1,024-GPU (128-node) fleet costs $44.8M before network and facility costs. Assume a resale value of $7M–10M after three years in a market where newer accelerators offer 3–4× the performance per watt. That performance assumption does not determine resale value by itself. The assumed residual value yields net hardware depreciation of $34.8M–37.8M. Allocated to only two large training runs, it contributes $17.4M–18.9M per run before electricity, staffing, or facility costs. At 80 percent useful utilization over three years, it instead contributes approximately $1.62–1.76 per used GPU-hour. This is the hardware component of owned cost, not a complete rate directly comparable with cloud rental. Utilization spreads that commitment across output; the full ledger determines economic viability.

Power efficiency trajectory

The trajectory of power efficiency across accelerator generations helps screen cluster refresh choices. The table uses a common dense FP16 arithmetic basis and thermal design power (TDP); the purchase decision still requires energy per completed workload at the same quality target.

Table 0.179: Power efficiency across GPU generations: Dense FP16 tensor arithmetic peak divided by accelerator TDP, with no sparsity multiplier. These ratios compare arithmetic ceilings, not measured training throughput or facility energy. Matched workload measurements must also include achieved utilization, memory and communication stalls, and non-accelerator power.

Generation	Dense FP16 peak TFLOP/s	TDP (W)	TFLOP/s per watt	Relative Efficiency
V100 (2017)	125 TFLOP/s (FP16)	300 W	0.42 TFLOP/s/W	1×
A100 (2020)	312 TFLOP/s (FP16)	400 W	0.78 TFLOP/s/W	1.9×
H100 (2022)	989 TFLOP/s (FP16)	700 W	1.41 TFLOP/s/W	3.4×
B200 (2024)	2250 TFLOP/s (FP16)	1000 W	2.25 TFLOP/s/W	5.4×

Hardware refresh cycles are ultimately about useful work per lifecycle dollar (table 0.179). A higher arithmetic ceiling can lower energy per completed run only when the workload realizes enough of that ceiling to compensate for power and replacement costs. Memory-bound serving and communication-bound training can therefore justify different refresh choices for the same fleet.

A refresh comparison can hold either the arithmetic ceiling or the accelerator power budget fixed, and the two framings answer different questions. Consider replacing a V100 fleet of the reference cluster's size, 1,024 devices with a combined accelerator TDP of 307.2 kW. On the dense FP16 basis

of table 0.179, 130 H100s match that fleet's arithmetic ceiling at about 91 kW of combined TDP. Held at the same 307.2 kW, the budget instead accommodates 438 H100s with 3.4× the original ceiling. The first comparison screens for a lower power envelope at matched peak arithmetic; the second screens for more arithmetic capacity within a fixed power envelope. Neither establishes achieved throughput or measured power.

The fleet matched by arithmetic ceiling is not automatically usable. The original fleet has 7.9× as many devices, so, with the same port count per device, the replacement offers proportionally fewer network ports, and its aggregate HBM falls from 35.2 TB to 11.2 TB. A replacement plan must pass memory-fit, topology, and latency checks before the arithmetic equivalence counts as capacity, and both framings compare peak ceilings rather than energy per completed run at matched quality.

Financial depreciation, resale value, and economic replacement are separate decisions. An accounting schedule does not establish when a device stops being useful, so the procurement analysis states its lifetime and residual-value assumptions and tests them against the workloads the older devices would still serve, such as memory-bound inference or fine-tuning.

The hybrid split described in section 20 also hedges refresh timing, because cloud bursts provide access to newer hardware before a large purchase commits the fleet to it.

The screening numbers bound the refresh decision for the 175B model without settling it. The H100's 700 W TDP is more than twice the V100's 300 W, yet run energy can still fall, because energy integrates measured power over elapsed time and the faster device finishes sooner. The dollar saving and payback period therefore come from a matched training configuration: measured or validated runtime, accelerator and host power, fabric and storage consumption, and the facility overhead applied to that IT total.

Cloud capacity as an operations constraint

For organizations that choose the cloud path, the provider absorbs hardware ownership but exposes capacity, topology, and interruption risk as operating constraints. The specific instance types and pricing change frequently, so the durable distinction is not vendor branding; it is how the cloud allocation affects communication, scheduling, and fault tolerance.

First, the interconnect fabric determines whether distributed jobs and multi-node inference paths retain the scaling assumptions used in design. InfiniBand-like fabrics and Ethernet-based fabrics have different fixed-latency and per-byte costs; section 4 separates those terms so the platform can decide whether the topology penalty matters for a given workload.

Second, provisioning granularity determines how much topology the platform controls. Individual instances maximize flexibility but force the team to assemble placement, networking, and scheduling policy. Pod-level allocations provide a preconnected unit but reduce composition freedom.

Third, custom accelerator options apply the same generality-efficiency trade-off introduced at the silicon level. Specialized hardware can reduce the cost of supported operations, but end-to-end savings depend on workload mapping, software support, and migration effort. The choice mirrors the on-premises accelerator decision, except that changing platforms requires a cloud migration rather than replacing owned hardware.

The pricing models expose different commitments. On-demand instances preserve the option to release capacity; reserved instances exchange a commitment for a discounted rate under the contract; spot or preemptible instances offer discounted capacity subject to interruption. The comparison must use equivalent hardware, placement, and service terms rather than assume that these labels establish a universal price ordering. The purchasing choice is also a fault-tolerance decision, as the spot-instance economics below make concrete.

Section 13 develops spot economics from the scheduler's side, where equation 0.31 inflates the spot price by the ratio of total to productive time. The operations view applies that relation to a capacity budget. At a 70 percent discount, a scenario choice within the 60–90 percent range that section cites, spot H100 instances cost approximately $1.20/GPU-hour instead of $4. For the 175B model, the 1,024-GPU, 2–4 week workload consumes approximately 344,000–688,000 allocated GPU-hours. The on-demand cost is therefore about $1.4M–2.8M, while spot pricing would reduce the bill to roughly $0.4M–0.8M before interruptions. Losing workers can stop a synchronous job's progress until the runtime detects the loss and recovers. Recovery may restore the original allocation from a

checkpoint or use a supported elastic configuration; resizing is not the only path. The checkpoint tax also consumes time. A blocking 30-second checkpoint after every 10 minutes of useful computation adds approximately 5 percent to that compute duration, before lost work and restart delays. Those overheads can erase the hourly discount or make the job miss its deadline, so both completion cost and elapsed time belong in the comparison.

Three practices can improve that comparison. Tuning checkpoint frequency balances write overhead against lost work. With an hourly durable checkpoint, an interruption loses at most one hour on every GPU the synchronous job holds, so for the run above the worst-case loss is 1,024 GPU-hours priced at $1.20/GPU-hour, before restart and replacement delays. Instance diversification broadens replacement options, but a synchronous job still needs compatible devices and adequate connectivity; spreading its ranks across zones can add communication cost without preserving progress after a rank loss. Automated fallback uses on-demand capacity when available under the required placement and deadline constraints. Serving can use interruptible capacity only when remaining replicas, routing, and replacement readiness preserve its service contract.

A critical consideration for cloud-based ML infrastructure is networking between instances. Unlike on-premises clusters where the network topology is custom-designed, cloud instances share the provider's network fabric with other tenants. Cloud providers may offer placement groups or dedicated networking fabrics that reserve InfiniBand-like or equivalent bandwidth between instances within the same group.

Cross-group or cross-zone communication may traverse infrastructure with lower bandwidth and higher latency. Training frameworks must account for that heterogeneous topology, just as they must account for oversubscribed links or different network tiers in an owned cluster. A placement group is useful when its contract provides the connectivity the job needs; crossing its boundary requires measuring the effect on representative collectives and scaling efficiency.

Renting capacity for the 175B model therefore requires an allocation whose placement contract matches the parallelism plan. Availability and placement limits depend on provider, region, service, and reservation terms. A synchronous collective completes only as fast as its slowest link, so a job whose ranks straddle a placement-group boundary pays that boundary's latency and bandwidth on every step. The working rule is to keep tensor- and pipeline-parallel groups, which exchange data within every layer or micro-batch, inside one placement group, and let only the less frequent data-parallel gradient traffic cross the boundary. Benchmark representative collectives on the actual allocation before treating nominal GPU availability as usable training capacity.

Checkpoint 12.5: TCO decision framework

An organization needs to train 10 models/year, each requiring 1,000 GPU-hours on H100s, evaluating an on-premises cluster with 8 GPUs against cloud instances at $4/GPU-hour.

- ☐ **Cloud cost estimate**: calculate the annual cloud cost from the training volume and hourly rate.
- ☐ **On-premises TCO**: calculate the annualized on-premises cost, assuming $350,000 per 8-GPU node, $0.07/kWh electricity at PUE 1.1, and 700 W per GPU.
- ☐ **Break-even volume**: solve for the number of annual training runs at which on-premises becomes cheaper.

Infrastructure planning methodology

Infrastructure planning begins when a workload requirement becomes a facility requirement. Model architecture, precision, optimizer state, and batch configuration establish memory needs; the training algorithm and token budget establish work; the deadline establishes required sustained throughput. Parallelization then determines the communication that the fabric must support. Accelerator TDP contributes to the node power envelope, which also includes hosts, memory, and networking, and that envelope constrains rack density and cooling. Planning follows this causal chain from useful work to physical capacity and total cost of ownership.

The first step is workload characterization. Parameter count is only the starting point for memory sizing; activations, optimizer state, temporary buffers, and the chosen sharding or offload policy

determine what must fit on each accelerator. The training objective and data budget establish total FLOPs, while acceptable training time determines the sustained FLOP/s requirement. For a frontier model, that budget is itself a scaling-law decision. The compute-optimal allocation of section 6 (principle 9) chooses the parameter and token counts whose product the fleet must deliver. A capacity forecast therefore inherits both the fitted curve and the regime in which it was measured, and a plan that extrapolates past the breakdown conditions of section 10 commits capacity to a quality gain the curve no longer promises. Communication depends on the parallelization plan: data-parallel gradient synchronization uses AllReduce, mixture-of-experts routing can stress AllToAll, and pipeline parallelism introduces point-to-point transfers. Inference requirements add another constraint because the hardware that trains a model efficiently may not serve it economically.

With those constraints explicit, bottom-up sizing works from the accelerator outward. Roofline analysis, which compares a phase's arithmetic intensity with the accelerator's ridge point, identifies whether a workload phase binds on computation or memory bandwidth; training and serving each contain phases with different limits. Sustained TFLOP/s per dollar helps compare compute-bound phases, while bandwidth per dollar helps compare memory-bound phases. The fleet estimate must also account for communication, synchronization, and the latency or completion-time target.

↩ The roofline model and its ridge point are established in section 6.

Node sizing decides how many accelerators share a host and which memory tier carries optimizer state, activations, and data staging. For the 175B model, eight GPUs per node with tensor parallelism is a candidate configuration. Roughly 2 TB of host DRAM is an illustrative offload provision, not a requirement implied by parameter count; the state allocation and transfer bandwidth must justify it. Cluster sizing divides the compute budget by the deadline and sustained per-node throughput after model FLOPs utilization (MFU) losses. A maintenance pool and spares add capacity beyond that working allocation; the 5–10 percent allowance used here is a planning assumption to validate against the recovery policy.

Network design follows the primary collective and validates expected scaling against section 5. The fat-tree switch count and switch-cost estimate in section 6 provide a capacity basis; procurement must price the actual topology and redundancy. A remote direct memory access over Converged Ethernet (RoCE) fabric requires correctly configured congestion control and fabric behavior under synchronized traffic. Packet loss and retransmissions can extend the slowest rank's completion time, but their effect depends on the transport, load, and collective schedule. Compare measured end-to-end performance and operational cost rather than assuming either fabric is universally cheaper or faster.

↩ End-to-end congestion control for lossless RoCE fabrics under synchronized traffic is established in section 9.

Power and cooling translate IT load through PUE, then sanity-check rack density locally: a four-node DGX H100 rack is roughly a 33.5 kW design point once GPUs, host systems, networking, power conversion, and cooling overhead are included. Higher density alters the cooling architecture in addition to increasing power consumption. TCO and schedule remain design variables because the cluster must arrive in time to matter, and GPU supply or electrical work often dominates lead time.

The same chain becomes concrete for the 175B training plan. A mixed-precision adaptive moment estimation (Adam) state policy with BF16 parameters and gradients, FP32 master parameters, and two FP32 optimizer moments uses 16 bytes per parameter before activations and temporary buffers. Tensor, pipeline, and optimizer-state sharding can distribute that state. Offload is an additional option when the resulting device budget still does not fit; model size alone does not force every technique simultaneously.

Cluster size then follows from the compute budget. At 6 FLOPs per parameter-token over 175 billion parameters and 300 billion tokens, the run requires 3.15×10^{23} FLOPs. Using a BF16/FP16 planning basis rather than the FP8 headline peak, each H100 has 989 TFLOP/s peak and an assumed 445.1 TFLOP/s sustained at 45 percent MFU. With 1,024 GPUs, the cluster reaches roughly 455.7 PFLOP/s sustained under that assumption, yielding about 8 days. That token budget is the GPT-3 operating point, which is undertrained relative to compute-optimal allocation (section 8). A plan that followed the compute-optimal ratio of tokens to parameters at the same model size would multiply the token count, and with it the cluster-days, so the scaling-law choice moves the capacity plan before any hardware question arises. The 2–4-week calendar allowance is a separate planning range for delays outside the MFU measurement window; communication or stalls already reflected in MFU must not be added again. The TP-8, PP-4, DP-32 configuration also creates tensor, pipeline, and data-parallel traffic whose placement must be validated on the proposed rail-optimized fabric.

The 128 nodes draw 33.5 kW per 4-node rack across 32 racks at approximately 1.1 MW under the stated rack accounting boundary. Cooling feasibility depends on airflow, heat rejection, and rack geometry; this power alone does not require liquid cooling. The 3-year TCO comes to approximately $64 million on-premises; renting the six-runs-per-year workload in the cloud is roughly $25M–50M depending on whether each run lasts 2 or 4 weeks, while continuous cloud use is more expensive. The break-even depends on sustained utilization beyond the initial training run. Procurement and facility schedules must be confirmed against available capacity. A three-month initial deployment is feasible only if its hardware and facility resources are already available within that window; it cannot be inferred from a longer procurement lead time.

Checkpoint 12.6: Infrastructure planning exercise

A team needs to train a 70B-parameter model on 1T tokens within 4 weeks, with H100 GPUs at 1979 TFLOP/s FP8 peak (45 percent MFU), the headline basis that the worked plan above set aside, and a 2 MW facility power ceiling.

- ☐ **GPU sizing**: determine the minimum number of GPUs needed to complete training within 4 weeks for a compute budget of $6 \times 70 \times 10^9 \times 10^{12} = 4.2 \times 10^{23}$ FLOPs.
- ☐ **Power headroom**: evaluate sufficiency of the 2 MW power budget, assuming PUE 1.1, 700 W per GPU, and 50 percent overhead for non-GPU components.
- ☐ **Cost comparison**: estimate the training-run cost at $4/GPU-hour in the cloud vs. $350,000 per 8-GPU node on premises.
- ☐ **Precision basis**: repeat the GPU sizing on the BF16/FP16 planning peak of 989 TFLOP/s used in the worked plan, explain why the two GPU counts differ, and state which basis a procurement plan should use unless the training recipe has been validated in FP8.

Capacity lead time as operational risk

The economics of ML infrastructure are not purely about hardware specifications and electricity rates. Capacity lead time is itself an operational risk: a platform that cannot acquire, reserve, or free capacity quickly enough may miss model launches, delay rollback-safe migrations, or run without the headroom needed for incident response.

The GPU supply chain introduces dependencies beyond the accelerator vendor. A deployment requires compatible processors, memory, packaging, and network equipment to arrive together. Supplier concentration matters when apparently independent purchase options depend on the same upstream capacity. A disruption to that shared dependency can delay several orders at once. Capacity planning must therefore examine supplier dependencies as well as quoted delivery dates; placing orders with multiple vendors does not by itself establish independent supply.

Capacity commitments can take much longer to change than model traffic. For planning, consider a large deployment (1,000+ GPUs) with a 6–12-month interval from purchase decision to usable capacity; the actual interval requires supplier and facility confirmation. That delay changes operations. The platform must forecast model growth, reserve refresh capacity, and maintain fallbacks before demand arrives rather than after dashboards turn red.

Facility readiness can lag silicon delivery. Consider a planning scenario with an 18–30-month facility schedule, an 18–24-month electrical substation schedule, a 12–18-month building-shell schedule, and 6–12-month GPU deliveries running concurrently. The longest prerequisite determines the critical path; additional spending cannot be assumed to remove permitting or equipment constraints. Designing headroom can preserve future expansion options, but the benefit requires a site-specific cost comparison. An assumed 30–50 percent electrical reserve at a 10–20 percent facility CapEx premium, for example, must be compared with expected growth and later expansion costs. The physical design of power delivery and cooling belongs to section 8; the operational point is that its schedule becomes the fleet's schedule.

The site fixes several of these constraints before any accelerator is purchased. Available power can determine whether the planned fleet fits at all. A 10,000-GPU pod has an estimated facility demand of 10–15 MW under the assumed load and PUE; actual energy cost also depends on

operating hours and electricity rates. Legal constraints can also rule out an otherwise economical site, for example when data-residency or cross-border transfer rules govern where the intended data may be processed. Power alleys offer combinations of electricity supply, connectivity, and cooling opportunities, including free cooling, but existing regional capacity does not guarantee a timely connection for a new facility. Reusing a site with electrical infrastructure may shorten one part of the schedule while leaving network and cooling work on the critical path.

Mismatched schedules are expensive in both directions. Hardware delivered before the facility is ready ties up capital without producing useful work, as does a completed facility waiting for accelerators. Phased deployment can reduce the mismatch by commissioning usable capacity in waves while construction continues. An early phase lets the software team validate the distributed-training stack and tune collective kernels on the deployed topology while operators test power distribution and cooling; success at that scale does not establish readiness at full load. The **time value of compute** is the economic value of making useful capacity available earlier. It can justify premiums for modular halls or temporary colocation when the expected benefit exceeds their additional cost. Projected monthly model value is an input to that comparison, not a guaranteed loss for every month of delay: the estimate must account for launch readiness, demand, operating costs, and whether delayed value can be recovered later.

Hardware access becomes part of the deployment schedule for the 175B model as well. An illustrative 1,024-H100 allocation represents approximately $45 million in node hardware under the $350,000-per-8-GPU-node assumption established in section 20, but the operational risk extends beyond the purchase price alone. If the allocation arrives a quarter late, the platform may lack capacity for fine-tuning, shadow traffic, canary expansion, or rollback-safe serving during the model launch window. Capacity planning is therefore a reliability control rather than a procurement function alone.

ML systems TCO framework

The fleet ledger prices capacity, but it does not say which workloads deserve to consume it. That decision requires a TCO framework covering the ML lifecycle, alongside an assessment of the value each workload creates. The fleet analysis above established the CapEx and OpEx of the physical fleet. The lifecycle definition of TCO that opened the fleet analysis (definition 12.1) now applies workload by workload, widening the hardware lens to training and inference costs, with data and iteration completing a four-component model. Their relative weights depend on workload, traffic, retraining cadence, and operating requirements rather than a fixed distinction between ML and traditional software.

The TCO equation

Equation 0.71 expresses the total cost of ownership as the sum of four distinct cost components, each with different scaling characteristics and optimization levers:

$$\text{TCO}_{\text{ML}} = C_{\text{train}} + C_{\text{infer}} + C_{\text{total}} + C_{\text{iter}} \tag{0.71}$$

Here, C_{train} is the initial training and evaluation cost, C_{infer} is recurring serving cost, C_{total} covers data acquisition, storage, cleaning, and governance, and C_{iter} captures subsequent experimentation and maintenance. The categories require a common accounting horizon and an explicit allocation rule. If retraining compute is charged to C_{train}, it must be excluded from C_{iter}; shared hardware depreciation and energy likewise enter these workload costs once rather than being added again as a separate fleet bill.

Budget projections that count GPU compute and storage can omit substantial operational work. In the illustrative budget of figure 0.171, engineering labor (20 percent), pipeline maintenance (10 percent), continuous retraining, monitoring, incident response, and governance together equal the visible infrastructure spend. The example shows what an incomplete ledger can miss; its proportions are not universal cost shares. Each organization must measure these obligations within the same accounting horizon as its infrastructure costs.

The decomposition shows why optimization must follow the measured cost structure. An effort centered on experimentation may spend most on C_{iter}, a training campaign on C_{train}, and a high-

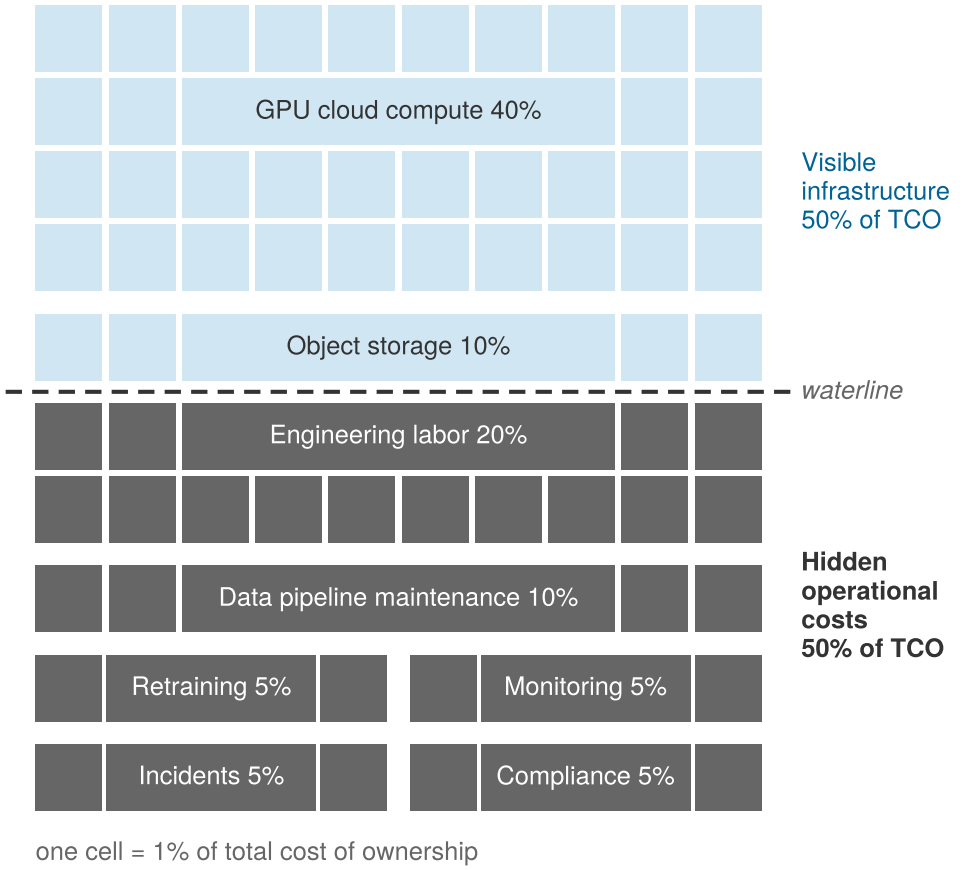


Figure 0.171: The TCO iceberg: The analysis separates visible infrastructure costs from operational costs that are easier to omit. In this illustrative budget, the hidden operational costs (engineering labor, pipeline maintenance, retraining, monitoring, incident response, and compliance) together constitute half of total cost.

traffic deployment on C_{infer}. These are workload regimes, not mandatory stages of organizational maturity. The ledger identifies which component merits attention under the current workload mix.

Training cost model

Training cost begins with the price of the GPU-hour. A 30-day run on a 256-node H100 cluster (2,048 GPUs) at the internal fleet rate of \$2/GPU-hour is a direct investment of roughly \$2.95M. At this scale the cost per training run (C_{train}) becomes a design lever that sizes the fleet. Faster time-to-market pushes the planner toward more GPUs, but larger jobs also suffer diminishing parallel efficiency and a higher probability of hardware interruption. Total cost is therefore not merely a function of compute time; it must account for data staging, checkpointing, and the cost of recovery from interruptions.

Organizations must decide when to buy additional permanent capacity and when to recover useful throughput through better orchestration or model optimization. The decision also has an energy dimension. Less electricity consumption reduces the energy bill at a fixed tariff, but emissions depend on the energy source and time of use; a lower price alone does not establish lower carbon impact. The cost model below accounts for purchased energy, while an emissions comparison requires the corresponding carbon intensity.

Equation 0.72 formalizes training cost as a function of GPU count, training duration, non-energy accelerator-hour rates, data center energy overhead, and failure overhead:

$$C_{\text{train}} = N_{\text{GPU}} \times T_{\text{hours}} \times \left(R_{\text{GPU/hr}} + P_{\text{device}} \times R_{\$/\text{kWh}} \times \text{PUE}\right) \times (1 + F_{\text{fail}}) \tag{0.72}$$

where:

- N_{GPU} is the number of GPUs allocated
- T_{hours} is the baseline training duration in hours before the additional failure overhead
- $R_{\text{GPU/hr}}$ is the non-energy accelerator-hour cost
- P_{device} is per-GPU power draw in kW
- $R_{\$/\text{kWh}}$ is the electricity price
- PUE is the power usage effectiveness multiplier applied to the energy term
- F_{fail} is additional time from failures and recovery as a fraction of the baseline duration

The PUE factor captures facility energy overhead: a PUE of 1.1 means 10 percent additional energy relative to IT energy. It applies to energy consumption, not to the whole accelerator-hour rate. This equation uses GPU power as a simplified IT boundary; a full facility estimate must also include host, network, and storage power. The failure overhead F_{fail} adds recovery time beyond the baseline. Checkpointing or restart time already included in measured baseline duration must not be charged again through this factor.

↩ Cluster mean time between failures and the checkpoint interval it implies are established in section 12.

Training cost calculation

Consider training a large language model:

- Configuration: 256 H100 GPUs for 14 days
- Base non-energy accelerator-hour rate (scenario choice): \$3.50/GPU-hour
- Energy adder: 700 W at \$0.07/kWh and PUE 1.1 adds \$0.05/GPU-hour
- Effective rate: \$3.55/GPU-hour
- Failure overhead: 10 percent (scenario assumption relative to baseline duration)

$C_{\text{train}} = 256 \times (14 \times 24) \times (\$3.50 + \$0.05) \times 1.1 \approx \$335,892$

If this model requires quarterly retraining, annual training cost reaches approximately \$1.3M. However, training cost often represents a small fraction of total TCO for production systems serving millions of users.

Inference cost model



Serving can outgrow the training bill.

Inference costs can dominate when cumulative serving demand outweighs training and iteration costs. Equation 0.73 estimates continuously provisioned capacity from average daily demand and sustained per-GPU throughput measured under representative batching, the target latency SLO, and operating headroom. Daily volume alone does not size traffic peaks; the estimate requires a separate check against the arrival pattern, workload mix, and scaling response:

$$N_{\text{GPU}} = \left\lceil \frac{Q_{\text{day}}}{86{,}400 \times R_{\text{GPU,target}}} \right\rceil, \qquad C_{\text{infer}} = N_{\text{GPU}} \times 24 \times 365 \times R_{\text{GPU/hr}} \tag{0.73}$$

where:

- Q_{day} is the daily query volume
- $R_{\text{GPU,target}}$ is sustained queries per second per GPU at the target latency SLO, including batching and operating headroom
- N_{GPU} is the integer number of continuously provisioned GPUs
- $R_{\text{GPU/hr}}$ is the hourly GPU cost

The key insight is that inference cost grows with query volume in discrete capacity steps. Utilization and batching reduce cost only when they improve measured throughput at the target latency SLO; they should not be applied again as independent divisors.

Alternative formulation

For capacity planning, express inference cost in terms of required GPU-seconds per query:

$$C_{\text{infer}} = Q_{\text{annual}} \times S_{\text{GPU/query}} \times \frac{R_{\text{GPU/hr}}}{3600}$$

where $S_{\text{GPU/query}}$ is allocated GPU-seconds divided by completed queries over the same accounting period. Allocated time includes idle headroom and provisioned capacity, so this definition reproduces the continuous-provisioning bill above. Measuring only busy kernel time instead estimates service demand and excludes those costs; it is not an equivalent billing formula without an allocation policy.

Data cost model

Data costs can grow faster than the user base when per-user history, transfer volume, and feature processing all rise together, even though each term below is linear in its own volume. Equation 0.74 decomposes data cost into three components that scale differently: storage cost C_{store}, egress cost C_{egress} for moving data out over the network, and processing cost C_{process}:

$$C_{\text{total}} = C_{\text{store}} + C_{\text{egress}} + C_{\text{process}} \tag{0.74}$$

Storage costs grow with data retention requirements:

$$C_{\text{store}} = D_{\text{vol,store}} \times c_{\text{storage}} \times T_{\text{months}}$$

where $D_{\text{vol,store}}$ is a fixed data volume in GB, c_{storage} is the monthly storage rate, and T_{months} is its retention period in months. This product prices one volume retained at a constant rate; a growing dataset requires accounting for each period's stored volume rather than multiplying the final volume by the entire history.

Egress costs scale with data transfer volume:

$$C_{\text{egress}} = D_{\text{vol,transfer}} \times R_{\text{egress/GB}}$$

At the scenario egress rate of \$0.09/GB, repeated transfers can become a significant cost driver for multi-region deployments and training data distribution. The applicable rate depends on the source, destination, and service contract; the estimate must distinguish billable transfers from included traffic.

Processing costs scale with compute requirements for extract, transform, load, feature engineering, and data validation:

$$C_{\text{process}} = D_{\text{vol,processed}} \times R_{\text{process/GB}}$$

Data processing costs often surprise organizations: a feature engineering pipeline processing 10 TB daily at \$0.02/GB costs \$73,000 annually.

Iteration cost model

Development costs capture the engineering investment in experimentation and model improvement. Equation 0.75 formalizes this as the experiment count multiplied by the combined per-experiment engineering and compute costs:

$$C_{\text{iter}} = N_{\text{exp}} \times (C_{\text{engineer,per-exp}} + C_{\text{compute,per-exp}}) \tag{0.75}$$

where:

- N_{exp} is the number of experiments conducted
- $C_{\text{engineer,per-exp}}$ is the engineering cost per experiment
- $C_{\text{compute,per-exp}}$ is the compute cost per experiment

Experiments that do not improve production metrics still incur costs. If 90 percent produce no improvement and every experiment has the same cost, expenditure per improving experiment is $10\times$ the per-experiment cost. A negative result can nevertheless rule out an unproductive direction or expose a risk. Experiment infrastructure should reduce avoidable engineering and compute work while preserving that learning value, rather than optimize the fraction of positive results alone.

Startup versus production company TCO

Table 0.180 prices the same four cost components for two constructed organizational scenarios. The startup operates 1 production model serving 100,000 daily users with monthly retraining, a 2-engineer team, and cloud-native infrastructure. The production company operates 50 models serving 10 million daily users with weekly retraining for high-velocity models, a dedicated 15-engineer ML platform team, and hybrid cloud/on-premise infrastructure. Because traffic, model count, cadence, and staffing all change, the comparison illustrates different cost structures rather than isolating the effect of scale alone.

Table 0.180: TCO comparison: startup vs. production company: In these constructed budgets, iteration costs dominate the startup scenario, while inference is the largest component in the production scenario. The comparison changes traffic, model count, retraining cadence, and staffing together; it does not isolate the effect of scale. The 100× user increase yields only a 20.6× TCO increase because the startup baseline is mostly salaries, even though inference grows faster than users. Data costs grow 160×, faster than users, in a scenario that also stores features for 50 models and retrains weekly.

Cost Component	Startup	Production Company	Scaling Factor
Training	$5,000/month	$150,000/month	30× (more models, larger)
Inference	$2,000/month	$400,000/month	200× (100× users, 50 models)
Data	$500/month	$80,000/month	160× (50 models, weekly retraining)
Iteration	$40,000/month	$350,000/month	8.75× (team size, experiments)
Total TCO	**$47,500/month**	**$980,000/month**	**20.6×**
Dominant Cost	Iteration (84%)	Inference (41%)	

In these scenarios, the startup assigns 84 percent to iteration, while the production company assigns 41 percent to inference. Total TCO rises 20.6× for 100× the users, but that does not establish cheaper serving per user. The assumed inference bill rises 200×, while the salary-heavy startup baseline makes the total ratio smaller. The data bill rises 160× for 100× the users. The production scenario also stores and processes features for 50 models rather than one and retrains its high-velocity models weekly rather than monthly, so its storage, egress, and processing volumes (equation 0.74) can each grow faster than the user count; the assumed budgets do not say how much each term contributes. The production company also runs 10× as many experiments at 8.75× the iteration cost. These assumed budgets show why measured cost structure matters; they do not isolate model count, feature complexity, or automation as the cause of any ratio.

TCO sensitivity analysis

Sensitivity analysis starts with the dollar cost ledger and changes one workload assumption at a time. Table 0.181 identifies which measurements must change before the platform can estimate a new total. The same increase in user count can have different consequences for a cached recommendation service and a long-context language-model service.

Table 0.181: TCO sensitivity drivers: Map each workload change to the affected cost terms and the measurements needed to update them. Shared infrastructure, capacity steps, and changing engineering effort can make the response nonlinear; the complete cost ledger determines the total.

Workload Change	Cost Terms Affected	Measurements Needed
More daily users	Inference, data, and capacity operations	Requests per user, peak concurrency, history retained per user, and headroom needed to meet the SLO
More models	Training, inference, data, and iteration	Refresh cadence, traffic per model, shared feature reuse, and engineering effort per release
More queries per user	Inference and request-related data processing	Request mix, batching, cache hit rate, bytes logged, and provisioned capacity at the target SLO
Larger models	Training, inference, and iteration	Live-state memory, sustained throughput, parallelism, and time spent validating each candidate

Workload Change	Cost Terms Affected	Measurements Needed
More frequent retraining	Training, data preparation, and iteration	Cost per run, incremental data processing, evaluation effort, and any measured serving benefit

User scaling changes requests and stored history; model size scaling changes arithmetic and memory demand. Recompute those components in dollars over the same period, retaining unchanged components and including iteration and platform overhead. Sum the revised ledger, then compare it with the baseline. The resulting change identifies where an optimization can create enough recurring savings to repay its implementation cost.

Decision framework for speed versus efficiency

TCO analysis enables principled decisions about when to optimize for development speed vs. operational efficiency. Equation 0.76 calculates the breakeven point for optimization investments:

$$T_{\text{breakeven}} = \frac{C_{\text{optimization}}}{C_{\text{save,monthly}}} \tag{0.76}$$

where $C_{\text{optimization}}$ is the one-time implementation and validation cost and $C_{\text{save,monthly}}$ is positive monthly savings net of added operating and maintenance costs. This simple payback assumes savings remain constant over the interval; recovered capacity counts as cash savings only when it reduces expenditure or avoids a planned purchase.

The breakeven equation helps compare specific investments once their implementation costs and recurring savings are estimated. The dominant cost component suggests where to look first, but does not rule out a valuable smaller intervention elsewhere. Table 0.182 offers investigation starting points and illustrative policy thresholds; actual investment criteria also depend on service risk, expected workload lifetime, and available engineering capacity.

Table 0.182: Cost-structure decision rules: Measured cost shares guide investigation. Candidate savings, useful lifetime, and operational risk determine whether an investment satisfies the organization's policy.

Dominant cost structure	Operating context	Optimization posture	Payback threshold
Iteration costs dominate ($C_{\text{iter}} > 50\%$ of TCO)	Experiment-heavy workload	Investigate experiment infrastructure that shortens iteration time. Compare infrastructure efficiency candidates when their savings or capacity value justify the engineering effort.	Evaluate candidate value; iteration cost share alone does not set a payback bar.
Training costs dominate ($C_{\text{train}} > 40\%$ of TCO)	Repeated training campaigns	Investigate mixed precision, gradient checkpointing, checkpoint-and-resume on spot instances, and architecture changes against quality and completion requirements.	An illustrative policy accepts 3–6 months only if the candidate remains useful beyond payback.
Inference costs dominate ($C_{\text{infer}} > 40\%$ of TCO)	High-volume serving	Investigate quantization, batching, caching, and distillation where repeated queries can realize savings within quality and latency constraints.	An illustrative policy requires 1–3 months; the actual bar depends on candidate lifetime and risk.

The numerical payback bars in the table represent an illustrative investment policy, not a consequence of training or serving alone. Repeated queries can make serving savings accumulate quickly, but a model refresh or request-mix change can retire the optimized path before payback. A reusable training pipeline may support a longer horizon, while a one-off training campaign may not. For either workload, compare net savings over the candidate's expected useful lifetime with implementation cost and risk; a dominant cost category does not guarantee that its next optimization has the highest value.

Optimization investment decisions

A production company ($C_{\text{infer}} = \$400\text{K/month}$) evaluates INT8 quantization:

- Implementation cost: $80,000 (engineering time + validation)
- Expected inference cost reduction: 40 percent
- Monthly savings: $400,000 × 0.40 = $160,000

$T_{\text{breakeven}} = \frac{\$80{,}000}{\$160{,}000/month} = 0.5$ months

Breakeven in 2 weeks makes this investment attractive if validation confirms acceptable quality and latency and the expected cost reduction can be realized. For comparison, the same company ($C_{\text{train}} = \$150\text{K/month}$) evaluates a training optimization:

- Implementation cost: $80,000
- Expected training cost reduction: 30 percent
- Monthly savings: $150,000 × 0.30 = $45,000

$T_{\text{breakeven}} = \frac{\$80{,}000}{\$45{,}000/month} = 1.8$ months

The training optimization has longer payback and smaller absolute savings in this scenario. Those results favor the inference investment if both satisfy their quality and reliability requirements and compete for the same engineering capacity. Table 0.183 extends that reasoning into starting points for investigation, subject to each candidate's measured benefit, implementation cost, and operational risk:

Table 0.183: Optimization priority matrix: Current cost structure identifies starting points for investigation. Compare feasible candidates across categories using measured net benefit, implementation cost, useful lifetime, and operational risk before assigning engineering capacity.

Dominant Cost	Investigation Starting Point	Other Candidates	Risk to Evaluate
Iteration (>50%)	Experiment velocity	Developer tooling and infrastructure efficiency	Engineering effort that does not repay through faster iteration or realized savings
Training (>40%)	Training efficiency	Spot/preemptible compute and shared serving improvements	Recovery overhead, completion risk, and useful investment lifetime
Inference (>40%)	Model optimization	Serving infrastructure and retraining policy	Quality loss, latency changes, and workload lifetime
Data (>30%)	Storage tiering	Egress reduction and feature simplification	Retention, freshness, and downstream quality requirements

TCO-driven architecture decisions

TCO analysis should inform architectural choices alongside operational optimization. The build-vs.-buy analysis in section 20 also applies to individual workloads, accounting for any capacity they share with the rest of the portfolio. Model architecture selection changes the ledger because a model requiring 2× training cost but 0.5× inference cost may have lower lifecycle cost at sufficient serving volume. Retraining frequency adds to C_{train} and C_{total}; it can reduce emergency work charged to C_{iter} only when evaluation and release controls produce timely, useful updates. Monitoring detects the need to investigate drift; retraining alone does not. Feature complexity can likewise increase C_{total} and C_{train}, while its effect on C_{iter} depends on whether better predictions outweigh added integration and maintenance. Knowledge placement in language-model services illustrates the same trade-off.

Retrieval-augmented generation vs. fine-tuning

Domain knowledge can live in a retrievable index, in model weights, or in adapter weights, and each placement creates a different operating cost surface. **Retrieval-augmented generation (RAG)** retrieves documents at inference time and places them in the prompt (Lewis et al. 2020). Fine-tuning stores adaptation in model weights or adapter weights: supervised fine-tuning trains on curated input-output examples, while low-rank adaptation (LoRA) stores small adapter-weight deltas (Hu et al. 2021). Both approaches can improve task behavior, but they move cost and failure risk to

different terms of equation 0.71. RAG charges knowledge to C_{infer}, through retrieval and the extra prompt tokens every request must prefill, and to C_{total}, through the index it must build and refresh. Fine-tuning charges it to C_{train} and C_{iter}, through curation, training runs, and re-evaluation whenever the knowledge changes. Query volume therefore decides which ledger grows faster.

RAG makes knowledge updates possible through the document index without retraining the model. Retrieved passages provide evidence against which generated claims can be checked, but retrieval alone does not ensure that an answer uses or cites that evidence correctly. Retrieval and added context also consume serving resources. An illustrative 10,000 extra tokens increase dense prefill attention work roughly quadratically with total sequence length and KV-cache storage linearly with context length. FlashAttention reduces memory traffic and intermediate storage, but does not remove those computational and storage demands. The cost comparison therefore depends on retrieval quality, context selection, and the serving configuration; excessive context can also make relevant evidence harder for the model to use.

Fine-tuning moves adaptation work before deployment. The platform pays for data curation, training, and evaluation; successful adaptation can shorten prompts when it replaces instructions or examples that would otherwise accompany each request. Lower serving cost is a benefit to measure, not an automatic consequence of changing weights. Adapter-based fine-tuning also creates a fleet-management obligation when many customer-specific LoRA adapters must be versioned, loaded, and isolated, while changing facts embedded in weights requires a different update process from replacing documents in an index.

The decision depends on knowledge volatility, attribution requirements, latency budget, and adapter-management complexity. RAG provides an update path for changing facts and a source trail for review, subject to retrieval and generation quality. Fine-tuning can adapt domain language or stable behavior, subject to training cost and validation. Neither method implies a fixed context length or query-volume limit. A combined design can fine-tune how the model uses tools and documents while retrieving facts that must remain fresh. Evaluation must establish whether those benefits justify the combined lifecycle cost.

Each of these architecture choices is a forecast of lifecycle cost. Once a choice ships, the fleet needs controls that measure whether spending follows the forecast and that give someone the authority to act when it does not.

FinOps for ML platforms

A cost dashboard can identify a failed training sweep without giving anyone authority to stop it. FinOps closes that gap by connecting the fleet cost ledger and anomaly signals to budgets, owners, and intervention policies. The platform, fleet, and workload analyses above decide whether capacity and platform investment are worthwhile; FinOps decides how teams spend that capacity and respond when cost or value departs from the plan.

Definition 12.2: FinOps for ML

FinOps for ML is the practice of treating compute cost as a first-class engineering constraint (measured in real-time per experiment and model, and optimized jointly with model accuracy and latency) rather than accounting for it retrospectively through annual budget reconciliation.

1. **Significance**: ML compute costs scale steeply with experimentation volume. A team running 1,000 GPU-hours/day at a scenario rate of $3/GPU-hour spends $3,000/day ($1.1M/year) on training alone. With per-experiment cost visibility, an engineer can identify that 30 percent of runs are terminated early due to divergence (a reason to investigate the training configuration and failure causes) and that the team's fault-tolerant jobs could run on spot capacity at 60–90 percent discounts, provided recovery and interruption costs preserve the required quality and completion target.
2. **Distinction**: Unlike traditional IT budgeting (which allocates fixed annual compute budgets across departments), FinOps for ML operates at the per-run and per-model level with real-time feedback, enabling decisions like early stopping a $50K training run at

step 1,000 when loss curves signal divergence, rather than discovering the waste after the full run completes.

3. **Common pitfall**: A frequent misconception is that FinOps means minimizing compute spend. The goal is useful value across the full lifecycle within quality, latency, and reliability requirements: a $500K training run producing a model serving 10B inferences at $0.0001/query may be far more cost-efficient than a $50K run producing a model that requires 10× the inference compute to achieve the same accuracy at scale.

Cost components

ML platform cost breakdown depends on the portfolio and accounting period. Table 0.184 assumes a training-heavy annual budget. A mature, high-traffic serving portfolio can instead be inference-dominated, as the earlier lifecycle example shows.

Table 0.184: Illustrative training-heavy platform budget: Assumed shares sum to 100 percent over one annual accounting period. Training dominates this portfolio; a serving-heavy portfolio can reverse the ordering. Apply optimization levers to the measured cost driver rather than treating these shares as industry norms.

Cost Category	Assumed Share	Primary Drivers	Optimization Lever
Training compute	50%	GPU hours, experiment volume	Spot instances, early stopping
Serving compute	25%	Traffic volume, latency SLOs	Autoscaling, model optimization
Storage	12%	Dataset size, checkpoint frequency	Tiered storage, retention policies
Network	8%	Multi-region, data transfer	Caching, compression
Platform overhead	5%	Team size, tooling	Automation, self-service

Cost visibility and attribution

Cost optimization requires visibility into spending and ownership. Attribution policy also shapes incentives. Direct metering charges for measured consumption, but shared services and idle reserves still require allocation rules; measured activity does not uniquely determine every team's cost. Charging only for consumption can encourage under-provisioning when teams optimize their bill instead of service health. Allocation-based attribution charges for reserved capacity, making commitments visible even when that capacity is idle. Hybrid attribution combines a base allocation charge with a variable charge for excess usage. Each policy must preserve the headroom and shared services on which the reliability contract depends.

Attribution starts from metadata. Tag-based allocation assigns each resource's cost to a team, service, environment, and cost center, as listing 0.21 shows.

Listing 0.21: Cost Attribution Schema: Resource tagging dimensions and shared-cost distribution policies for allocating ML infrastructure expenses to teams and services.

```yaml
# Resource tagging schema for cost attribution
cost_allocation:
  dimensions:
    - team: "recommendation"      # Organizational owner
    - service: "ranking-model"    # Specific service
    - environment: "production"   # prod/staging/dev
    - model_type: "inference"     # training/inference
    - cost_center: "CC-4521"      # Finance tracking

  shared_cost_distribution:
    # Platform infrastructure costs distributed by usage
    - resource: "shared-gpu-cluster"
      method: "proportional_gpu_hours"
    - resource: "feature-store"
      method: "proportional_query_volume"
    - resource: "monitoring-infrastructure"
      method: "equal_split"
```

Shared infrastructure needs its own accounting policy because no single team owns it. Platforms typically adopt one of three models: proportional allocation distributes shared cluster expenses according to measured consumption metrics such as GPU-hours, storage capacity, or API query volume; equal split divides common baseline expenses evenly across consuming teams, which is well suited for fixed foundational tooling; and marginal cost charges tenant teams strictly for the incremental compute and storage their workloads introduce. The choice of allocation policy ultimately determines whether operational dashboards can drive organizational action rather than merely describing past spend.

For serving workloads, **cost per inference** provides a unit economic metric. Equation 0.77 divides total serving cost by inference count over the same accounting period. Comparisons require matched request mix, quality and latency targets, and cost boundaries; a short classification request and a long generated response are not equivalent units of work:

$$\text{Cost per inference} = \frac{\text{Total serving cost}}{\text{Total inferences served}} \tag{0.77}$$

Cost per inference then becomes the bridge from infrastructure telemetry to product decisions. Teams can compare model versions by asking whether an accuracy gain justifies a $2\times$ inference cost, evaluate optimization work by measuring whether quantization reduced cost per inference by 40 percent, and forecast monthly serving cost under projected traffic. Tracking the metric by model, customer segment, and request type reveals which workload deserves optimization effort.

Effective chargeback closes the loop by making those costs actionable. It requires fine-grained resource metering, attribution rules that map resources to teams, dashboards that show cost by team, project, and model, forecasting tools that help teams plan budgets, and anomaly detection for unexpected cost increases.

Cost dashboards use the same attention-routing hierarchy as the reliability views in table 0.169. The executive view tracks total ML infrastructure cost, month-over-month trend, budget vs. actual, and cost efficiency metrics such as cost per prediction and cost per active user. The portfolio view then breaks cost down by domain and model type so the platform team can see whether recommendations, fraud, search, or another domain is driving the change. The service view exposes per-service cost, cost per inference, GPU utilization efficiency, and budget comparison. The investigation view adds deployment markers, operational metric correlations, and attribution detail so an anomaly can be tied to a specific change rather than treated as accounting noise.

Continuous cost monitoring connects four kinds of evidence. Cost per inference tracks unit spending under a declared request mix. Cost per active user relates spending to the population served, but cross-service comparisons also require comparable activity and product scope. GPU utilization efficiency shows how allocated hardware is used; revenue or engagement per accelerator-hour is a separate business-yield measure that also depends on product demand and model quality. Budget burn rate tracks spending velocity against the allocation so owners can investigate projected overruns before the budget is exhausted.

Cost anomaly detection

Cost anomaly detection must account for the fleet's allocation and lifecycle behavior. Adding a serving replica can create a large cost step when that replica occupies multiple accelerators. Training sweeps and repeated recovery attempts can accumulate GPU-hours without producing useful artifacts. Zombie models (section 2) can retain serving capacity after their traffic has disappeared. Traffic spikes, changing request mix, and price changes can also raise spending. Detection must therefore connect the cost change to allocation, workload, and lifecycle evidence rather than infer its cause from the size of the bill alone.

At scale, undetected cost anomalies can accumulate millions of dollars in unexpected charges before manual review catches them. A quantitative framework for cost anomaly detection balances sensitivity against false positive rates.

The foundation of cost monitoring is the statistical process control of section 11 applied to spend. For a cost time series with historical mean μ and standard deviation σ, the Z-score quantifies how unusual a current observation is:

$$Z = \frac{C_{\text{current}} - \mu}{\sigma}$$

where C_{current} is the observed cost for the current period.

Complementing Z-score analysis, percentage change detection captures sudden shifts regardless of historical variance, which makes it useful for catching step-function increases such as a misconfigured autoscaler that doubles instance count overnight:

$$\Delta\% = \frac{C_{\text{current}} - C_{\text{previous}}}{C_{\text{previous}}} \times 100$$

Effective alerting requires calibrating thresholds to balance detection sensitivity against operational burden. Two illustrative configurations are a Z-score threshold, which alerts when $|Z| > 3$, and a percentage change threshold, which alerts when $|\Delta\%| > 50\%$ day over day. Seasonal demand and planned jobs must be represented in the baseline before ordinary variation can be interpreted as unusual spending. As in section 11, the false positive rate depends on the statistical assumptions and the complete alert policy. For the Z-score rule alone, a calibrated stable Gaussian null checked daily gives:

$$\Pr(\text{false positive per day}) = 2 \times (1 - \Phi(3)) \approx 0.0027$$

Over a year of daily monitoring:

$$\mathbb{E}[\text{false alerts per year}] = 365 \times 0.0027 \approx 1$$

Under the same calibrated Gaussian null, a 2-sigma threshold gives approximately 16 raw false crossings per year. Choosing between thresholds requires measuring detection power and the cost of missed events as well as alert burden.

For percentage-based alerts, false positive rates depend on the underlying volatility of costs. Services with naturally variable demand may require higher thresholds (75 percent or 100 percent) to avoid excessive alerts, while stable baseline services can use tighter thresholds (25 percent or 30 percent).

A threshold crossing identifies an unusual observation under the monitoring baseline, not a confirmed defect or cause. Table 0.185 groups candidate cost anomaly root causes into five classes, each with a distinct investigation path.

Table 0.185: Cost anomaly root cause categories: Five primary categories of cost anomalies with their characteristic indicators and investigation approaches. Traffic increases show proportional QPS growth, while efficiency regressions exhibit rising latency with stable traffic.

Category	Indicators	Investigation Path
Traffic increase	QPS proportional to cost	Check upstream services, marketing campaigns, viral events
Efficiency regression	Cost up, QPS unchanged, latency up	Review recent deployments, model updates, infrastructure changes
Resource leak	Gradual cost growth, utilization stable	Check for orphaned resources, failed cleanup jobs, zombie processes
Pricing change	Cost up, all metrics stable	Verify cloud provider pricing, reserved instance expiration
Configuration error	Step-function cost increase	Audit autoscaling rules, instance types, replica counts

Detecting an inference cost spike

A recommendation service typically costs \$100 per day for inference compute. The operations team receives an alert: today's cost has reached \$250 by end of day.

Historical data shows mean daily cost $\mu = \$100$ with standard deviation $\sigma = \$15$, so the first check is whether the alert is statistically plausible under normal operations: $Z = \frac{\$250 - \$100}{\$15} = \frac{\$150}{\$15} = 10$.

A Z-score of 10 is far outside the assumed Gaussian baseline, but the team first verifies billing completeness, duplicate records, and pipeline correctness. Query volume is unchanged; the investigation must also check request mix and arrival peaks before ruling out demand. In this scenario,

those remain comparable while p99 latency rises from 50 ms to 125 ms. A larger ranking model deployed at 2:00 AM adds features, GPU utilization stays near 95 percent, and measured throughput per GPU falls 60 percent. At matched demand and operating targets, that throughput loss implies 2.5× the capacity requirement. The team confirms the allocation increase and unchanged rates before attributing the rise from $100/day to $250/day to the release. It then evaluates whether the measured quality benefit justifies the cost or calls for a leaner serving configuration.

Cost optimization strategies

Cost optimization is a risk-allocation decision, not a catalog of discounts. Interruptible compute pays off only when checkpointing bounds the work lost to preemption, serving autoscaling only within the latency budget, and instance right-sizing only against measured cost per step or per inference. Each optimization lever trades a specific risk for a specific saving.

Interruptible training capacity and its checkpoint discipline were priced in section 20. Serving allocates risk differently. Large models may take seconds or minutes to load, so reactive scaling alone can lag demand when existing headroom is insufficient. Predictive scale-up is one response; warm spare capacity and validated fallback paths can also absorb demand while new replicas become ready. The policy must account for both forecast error and measured startup time.

The capacity steps depend on the deployment unit, and for accelerators they are lumpy. A model may share an accelerator, occupy a whole device, or require a group of devices, so serving capacity grows in jumps such as 0, 1, 2, or 4 accelerators per replica rather than in the smooth fractions of a CPU allocation; the model's memory footprint and isolation policy determine which steps are feasible. Batching adds another coupling because waiting for a larger batch can improve throughput while consuming latency budget. An autoscaling policy must choose among feasible capacity steps while protecting the p99 latency SLO.

Instance selection then starts from the binding constraint rather than the newest instance type. Memory-bound training with large embedding tables prioritizes GPU memory capacity and bandwidth. Compute-bound dense training maximizes sustained FLOP/s per dollar.

Serving splits the decision again. Latency-sensitive serving minimizes cold start and single-request latency, while throughput-oriented serving maximizes requests per dollar through batching. Instance selection should therefore be benchmark-driven: compare cost per training step or cost per inference across instance types instead of assuming larger hardware is automatically more economical.

Budget-aware development

FinOps extends beyond infrastructure optimization because cost feedback changes which experiments teams run and which models they ship. Unconstrained experimentation leads to runaway costs, but budget controls should make trade-offs visible before they block useful work: per-experiment limits cap individual training runs at a cost threshold, team budgets allocate monthly compute budgets with visibility into consumption, and approval workflows require review for experiments that exceed cost thresholds. Controls should make the budget boundary and exception path explicit. An authorized owner may raise a limit for a valuable experiment; a job cannot silently exceed it.

Model selection should explicitly consider cost alongside accuracy. Table 0.186 illustrates cost-quality trade-off analysis. Moving from small to medium model yields a 3 percentage-point accuracy gain for 10× training cost increase, while medium to large yields only 1 additional percentage point for another 10× cost, a pattern that should inform deployment decisions.

Table 0.186: Cost-quality trade-off analysis: Diminishing returns in model scaling. Small-to-medium model transition yields a 3 percentage-point accuracy gain for 10× cost increase; medium-to-large yields only 1 additional percentage point for another 10× cost. This pattern demonstrates why explicit cost-quality analysis should inform model selection rather than defaulting to larger architectures.

Model	Accuracy	Training Cost	Serving Cost/1K	Value Judgment
Small	92%	$500	$0.10	Baseline
Medium	95%	$5,000	$0.50	3 percentage points for 10× cost

Model	Accuracy	Training Cost	Serving Cost/1K	Value Judgment
Large	96%	$50,000	$2.00	Additional 1 percentage point for 10× more

The marginal accuracy gain must be valued in the application context. An additional percentage point can matter greatly if it reduces costly errors on an important population, but aggregate accuracy alone does not establish that value. Comparing error consequences, quality by slice, and lifecycle cost prevents defaulting to the largest available model.

Efficiency metrics should be reviewed alongside model quality to identify spending that warrants investigation. Low utilization can reflect required reserve capacity, and experiments without a deployed model can still resolve useful questions. Table 0.187 therefore supplies investigation prompts rather than automatic verdicts of waste.

Table 0.187: Efficiency metric action map: Efficiency metrics are useful only when they identify a decision. The platform reviews these signals alongside quality metrics to find waste that accuracy alone hides.

Metric	Waste Signal	Typical Action
Cost per accuracy point	Accuracy gains are bought with disproportionate spend	Revisit model size, feature set, or serving target before scaling up.
Experiments per production model	Many runs produce little deployable value	Improve experiment design, stopping rules, and promotion criteria.
GPU utilization	Capacity is reserved but not doing useful work	Right-size instances, improve batching, or profile inefficient code.
Spot utilization rate	Eligible workloads use expensive on-demand capacity	Move fault-tolerant jobs to spot instances with checkpoint support.

Taken together, the three economic levels and the FinOps controls make platform investment accountable to measured lifecycle outcomes: platform return decides whether shared tooling pays, fleet utilization decides whether capacity pays, workload TCO decides where optimization pays, and attribution with anomaly detection keeps each team answerable for its share. A technically sound shared service still needs an owner for its budget, compatibility promises, and retirement decisions. Organizational design determines whether those responsibilities support model teams or leave every cross-team change waiting in a central queue.

Organizational Operation and Learning

A shared feature change may pass platform checks yet still require approval from several model owners. The control plane becomes durable only when those technical interfaces align with organizational authority. Team structure determines who can approve the change, stop a rollout, or fund the repair when a shared dependency fails.

Feature contracts and release records name the owners of individual decisions; organizational structure must give those owners the capacity and authority to act. Technical infrastructure alone is insufficient for ML operations at scale, because organizational structure determines whether platform capabilities become shared infrastructure or another bottleneck. The central question is where an organization places invariants. Deployment safety, observability, compliance, cost control, and feature consistency can either be enforced once by a platform team or rediscovered differently by every model team.

Centralized platform team

A centralized ML platform team supports consistency by building and maintaining shared infrastructure while model teams own model development and behavior. Figure 0.172 contrasts three organizational patterns. A shared request queue (Panel A) centralizes prioritization but can become a bottleneck; uniform standards depend on enforced contracts, not the queue itself. Embedded tooling (Panel B) favors local responsiveness while risking duplication. The hybrid pattern (Panel C) places dedicated ML engineers near product teams while retaining a common platform. Self-service

interfaces can preserve central standards without routing every routine action through a human queue.

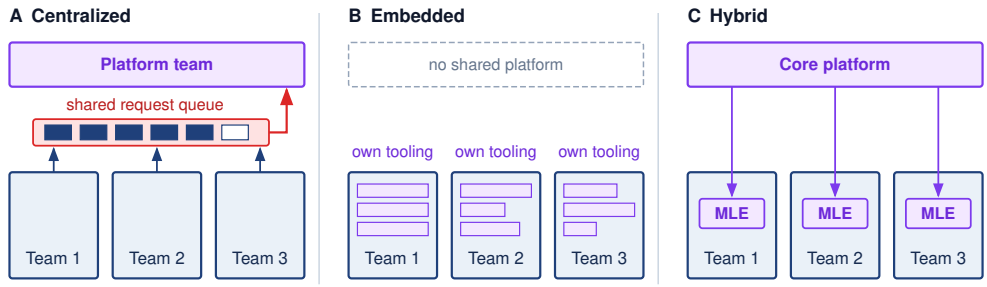


Figure 0.172: Organizational patterns for ML: (A) A centralized platform team gives every model team the same infrastructure, but all requests pass through one shared queue, which can become the bottleneck. (B) Embedded teams each build their own tooling, which is fast locally but duplicates infrastructure and lets stacks diverge. (C) A hybrid keeps a core platform and places ML engineers (MLE) inside model teams as liaisons, balancing standardization with responsiveness.

Centralization works when the same operational mistakes would otherwise recur across the organization. A shared team can enforce consistent deployment, monitoring, and governance practices; invest once in training, serving, and observability infrastructure; and concentrate deep ML systems expertise that would be hard to replicate across many product teams. It also gives infrastructure engineers a visible career path rather than scattering them as one-person support functions.

The same structure can become a queue. If every platform request routes through one team, model teams wait on prioritization decisions they do not control. Distance from product context can also produce abstractions that are technically elegant but poorly matched to the consuming team's constraints. Centralization is therefore strongest when common invariants dominate local variation, and weakest when model teams need rapid domain-specific changes.

Embedded ML engineers

The embedded pattern chooses proximity over uniformity by placing ML infrastructure expertise inside model teams, with coordination through communities of practice rather than a single reporting line. The benefit is responsiveness: the infrastructure engineer sees the team's data, model behavior, release pressure, and incident history directly, so local changes do not wait for cross-team scheduling.

The cost appears later, when each team has solved deployment, monitoring, and feature management slightly differently. Fragmentation wastes engineering effort, complicates integration, and makes platform quality depend on the skill and bandwidth of whoever happens to be embedded with a given team. Embedded teams therefore work best when local speed matters more than cross-team consistency, and worst when every team is reimplementing the same platform substrate.

Hybrid models

Hybrid approaches combine shared infrastructure ownership with domain-specific expertise. In this pattern, the core platform team owns compute, storage, networking, common training and serving systems, monitoring, and shared security, compliance, and cost controls. Domain platform engineers stay close to recommendation, language, vision, fraud, or search teams. Explicit boundaries distinguish changes those teams can make locally from changes that require coordination because they affect shared interfaces or operating guarantees.

A federated version of the same idea distributes implementation work without giving up architectural control. Major contributing teams help maintain platform components, but standards, ownership boundaries, and prioritization are coordinated explicitly. This works only when governance has real authority: otherwise federation degenerates into embedding with more meetings.

Organizational pattern selection

The appropriate organizational pattern depends on where standardization creates more value than local autonomy. Table 0.188 summarizes the organizational pattern decision factors: higher model counts, stricter regulatory requirements, and immature infrastructure favor centralized platforms, while heterogeneous model portfolios and smaller organizations may benefit from distributed expertise:

Table 0.188: Organizational pattern decision factors: Five criteria for choosing between centralized and distributed ML platform teams. Higher model counts (100+), stricter regulatory requirements, and earlier infrastructure maturity favor centralized platforms; heterogeneous model portfolios and smaller organizations may benefit from distributed expertise with coordination through communities of practice.

Factor	Favors Centralized	Favors Distributed
Model count	Higher (100+)	Lower (10–20)
Model similarity	Homogeneous	Heterogeneous
Organization size	Larger	Smaller
Regulatory requirements	Stricter	Lighter
Infrastructure maturity	Earlier stage	Later stage

The infrastructure-maturity row can look inverted, because a young organization seems the natural home for local improvisation. The reasoning runs the other way. Early on, no shared substrate exists, and a central team is the cheapest way to build one before every model team writes its own deployment and monitoring path. Once that substrate matures into self-service interfaces, distributed teams can consume it directly, and the central queue matters less.

The selection logic becomes clearer in a concrete scenario. A technology company with 50 ML engineers across 8 teams operates 80 production models across recommendation, fraud, search, and ads. Each team maintains its own deployment and monitoring, creating duplicated work and inconsistent integration practices. That duplication motivates evaluating a shared platform; the model count alone does not establish its return. Domain diversity also motivates retaining expertise close to each workload rather than expecting one central team to make every modeling and operational decision.

One candidate design is hybrid. In this scenario, a central platform team of roughly 12–15 engineers owns core infrastructure, while domain-specific platform leads remain embedded with the largest model teams. That staffing assumption must be tested against the platform's scope, support burden, and service commitments. A community of practice coordinates standards, and a shared contribution model lets domain teams upstream reusable components instead of maintaining permanent forks.

Establishing shared contribution models and domain-specific platform leads enables organizations to standardize the shared control plane without turning every domain-specific request into a platform bottleneck. The same platform engineering, feature management, and governance trade-offs become more concrete in the hyper-scale systems built by large technology companies.

Case Studies

The platform cases instantiate the operations trade-offs developed earlier in this chapter: standardization vs. team-local velocity, abstraction vs. control, freshness vs. cost, and governance vs. autonomy. Each case shows a different way to keep a multi-model fleet repeatable without turning every model into bespoke infrastructure.

Uber Michelangelo

Uber's Michelangelo platform shows why repeatability becomes a platform requirement at company scale (Hermann and Del Balso 2017). Uber's 2017 account describes data scientists using varied modeling tools while engineering teams built custom production systems, with no common deployment path or reproducible data pipelines. Michelangelo standardized the workflow from data

management through prediction monitoring. The delivery-time example combined historical and near-real-time restaurant preparation features, while shared feature definitions supported reuse across teams. The case makes the standardization trade-off concrete: common data and deployment paths reduce repeated infrastructure work, while product-specific modeling remains with the consuming teams.

The operational challenge at Uber went beyond model count: infrastructure engineers needed to make model development repeatable across many product teams. Michelangelo provided a "golden path" for common workflows, on which teams could train models, create offline training datasets, serve predictions online or in batch, and reuse platform-managed feature pipelines. This standardization improved automation across training, evaluation, deployment, and monitoring while still requiring product teams to own model behavior and business-specific validation.

A critical evolution in platforms like Michelangelo is the move from batch-centric training toward fresher online features and lower-latency serving. Early platform designs commonly pair offline stores for training data with online stores for serving precomputed or recently computed features. Real-time products such as food delivery and fraud detection then introduce consistency challenges, because the same feature definition must produce compatible values for offline training sets and online inference requests. The lesson is durable even when implementation details vary. Centralized ML platforms must provide shared abstractions for features, training, serving, experimentation, and monitoring without turning every model into bespoke infrastructure.

Meta FBLearner Flow

Meta's FBLearner Flow shows how shared ML infrastructure can hide resource management while preserving workflow structure (Engineering 2016). In its 2016 account, Facebook reported use by more than 25 percent of its engineering team, more than one million models trained, and more than six million predictions per second from its prediction service. The platform addressed repeated experimentation across teams through reusable workflows. Engineers defined operators and typed inputs and outputs; compilation formed a DAG whose dependencies controlled execution. Operators declared CPU, GPU, and memory needs, while the platform allocated resources and moved data between steps. The durable lesson is the interface between workflow intent and managed execution, rather than the historical scale figures themselves.

A defining characteristic of large social ML platforms is feature freshness. For products like feed ranking, the value of a feature (for example, "user just clicked 'like' on a similar video") can decay quickly. This pushes platforms toward stream processing, online feature computation, and monitoring that tracks data distributions as well as service health. Standard metrics like CPU usage are insufficient to detect silent failures in feature streams; production ML systems need checks for missing features, distribution shifts, and training-serving skew.

To manage deployment risk, platforms at this scale commonly use shadow mode (or dark launching), canary releases, and online evaluation before broad promotion. Candidate models can run alongside the current production model, receiving live traffic while their outputs are logged but not shown to users. This phase verifies operational integrity (latency, memory usage, error rates) and helps build comparison data before a model affects user experience.

Netflix ML infrastructure

Netflix's ML infrastructure shows how personalization platforms manage fan-out cost under a strict latency budget (Gomez-Uribe and Hunt 2015). Rather than one model making one decision, the recommendation system combines multiple ranking and personalization algorithms for tasks such as page generation, row selection, search, "continue watching," and artwork personalization. The operational challenge is fan-out cost, because every additional online ranker or feature dependency consumes latency budget. Production systems therefore separate candidate generation, offline model training, online ranking, and caching so the homepage can remain personalized without executing an unbounded number of expensive models per request.

Personalization platforms also face the cold-start problem: a new member has little interaction history, and a new title has little viewing data. One design option uses online-learning bandits to allocate exploration traffic while learning from feedback; metadata and stated preferences offer other starting signals. A bandit design needs explicit exploration budgets, policy versions, and feedback

logging, but its update cadence depends on label delay and the product's freshness requirement. Bandits are one general option for the problem, and they do not require every interaction to update the next recommendation.

Netflix's interleaving work applies the sample-efficiency trade-off developed earlier (Netflix Technology Blog 2017). The platform merges competing ranked lists for the same user and attributes clicks to their source ranker, allowing fewer users to provide a useful comparison. Faster experiments therefore require additional serving and logging capability, linking iteration speed directly to platform design.

Google Vertex AI

Google Vertex AI illustrates the managed-platform abstraction problem: reducing the glue-code burden described by Sculley et al. (2015) while preserving control over custom workloads. Offering AutoML alongside custom training makes that boundary visible. Automated search can trade compute for engineering effort; neural architecture search is one possible search method, not a requirement of every automated training service. The operational lesson is to bound search cost and concurrency while preserving the evidence needed to compare candidates. Preemption and checkpointing are possible resource policies, not consequences of offering AutoML or claims about Vertex AI's internal scheduler.

Managed serving also exposes an isolation contract. Packaging a model in a container separates its software environment, but does not by itself isolate accelerator memory bandwidth, shared networks, or backing services. The consumer must identify which resource and scaling guarantees the service provides and validate tail latency under the intended load. A proxy can centralize logging or batching, yet that design is an implementation option rather than evidence of Vertex AI's internal architecture. The platform's value lies in the operating guarantees it supplies, not in an assumed container or sidecar arrangement.

A managed feature service must likewise state its consistency boundary. Historical retrieval needs to respect when information was available to the predictor, not merely when the underlying event occurred. Shared feature definitions and serving paths can reduce the training-serving skew developed in section 4, but model and data owners must still validate feature construction and timestamp semantics. Managed infrastructure transfers implementation work; it does not transfer every responsibility for leakage, quality, or access policy. Those retained responsibilities belong in the platform's lifecycle cost and acceptance criteria.

Spotify ML platform

Spotify's ML platform places shared infrastructure in a personalization setting where immediate response and longer-term listener value need not align. Optimizing clicks alone can overlook diversity and discovery, including concerns about "filter bubbles." Candidate generation and ranking provide a useful general design distinction: generators identify eligible content, and rankers order it for a context. Candidate sources can include collaborative filtering models (Koren et al. 2009), editorial selections, or heuristics. Separating those interfaces permits experimentation with retrieval strategies while preserving the ranking contract. Spotify's documented platform contribution is the repeatable workflow that supports such experimentation.

A central component of their architecture is the paved road for model orchestration (Engineering 2019). Spotify describes a platform path built around TensorFlow Extended, Kubeflow Pipelines, metadata tracking, and centralized Kubeflow clusters so teams can move from experiments to repeatable production workflows. The operational lesson is lineage. Model artifacts, datasets, code, and pipeline metadata must remain connected enough that an engineer can trace a silent regression back to the data or workflow state that produced it. Canary deployment and rollback remain necessary as general release controls, and they are only as useful as the lineage beneath them.

The same workflow discipline supports different freshness requirements. As an illustrative design, a weekly playlist can be computed in batch and stored for retrieval, while a responsive home screen can combine precomputed candidates with recent interaction features and online ranking. The product's latency and freshness contracts determine that split; neither playback responsiveness nor platform tooling implies a particular embedding or similarity-matrix implementation. The systems

lesson is to precompute work whose inputs tolerate staleness and budget the live path for decisions that need current context.

Strict latency requirements explain why mature personalization platforms precompute as much work as possible, but each platform architecture reflects specific trade-offs across storage, compute, and latency. Comparing the five cases reveals how disparate organizational pressures converge on common control-plane responsibilities.

Comparative control-plane synthesis

The cases differ in workload and organizational form, but they converge on the same control-plane responsibilities. Michelangelo emphasizes reusable feature and workflow contracts across product teams. FBLearner Flow emphasizes DAG-level orchestration and resource abstraction across a large engineering population. Netflix emphasizes latency-bounded composition and high-sensitivity experimentation. Vertex AI emphasizes managed isolation and lifecycle integration across tenants. Spotify emphasizes a paved road that preserves lineage while mixing batch, streaming, and online decisions. No single implementation is the template; the durable pattern is that shared state, release evidence, resource policy, and ownership become platform interfaces.

Table 0.189 makes the common contract and retained domain responsibility explicit.

Table 0.189: Comparative platform control planes: The five cases allocate implementation differently but retain the same systems contract: the platform owns shared invariants and evidence, while domain teams retain workload intent and acceptance criteria.

Case	Primary pressure	Control-plane emphasis	Local responsibility retained
Michelangelo	Repeated feature and deployment work	Shared features and repeatable workflows	Product-specific model behavior and validation
FBLearner Flow	Many teams and heterogeneous pipelines	DAG orchestration and resource abstraction	Workflow intent and domain evaluation
Netflix	Fan-out under strict latency budgets	Composition, precomputation, experimentation	Ranking objectives and user-experience trade-offs
Vertex AI	Multi-tenant managed infrastructure	Isolation, policy, and lifecycle integration	Workload configuration and acceptance criteria
Spotify	Fresh personalization with mixed paths	Lineage, paved roads, and hybrid data movement	Domain policy and exploration strategy

The comparison also exposes the adoption constraint. A platform succeeds when its common path captures recurring invariants without erasing domain judgment. Too little platform ownership recreates bespoke infrastructure; too much converts every exceptional workload into a central-team queue. Versioned interfaces, explicit exceptions, and outcome-based adoption metrics keep that boundary adjustable as the portfolio changes. The same boundary choices, misjudged, produce the misconceptions that recur when teams scale ML operations.

Fallacies and Pitfalls

Most operational misconceptions at scale share one root. Practices sized for one model survive into a fleet whose models share features, pipelines, infrastructure, and alerts. The following fallacies and pitfalls show where those per-model practices fail once the interactions dominate.

Fallacy: *Operational complexity grows linearly with model count.*

Shared dependencies can make coordination grow faster than model count. A model consuming embeddings from another model through a shared feature pipeline cannot change that interface safely without checking its consumers. The graph's structure, not the count alone, determines the interaction burden; compatible interfaces still permit independent releases. In the monitoring scenario, 100 models with 10 metrics checked every five minutes at a 5 percent false positive rate produce 14,400 raw false crossings daily before suppression. Under the platform example's labor assumptions, 40 models require 1,600 engineer-hours monthly ($2.88M annually at $150/hour). A staffing plan that adds operators in proportion to model count therefore falls behind exactly when

the dependency graph densifies, which is when shared controls must absorb the repeated work and cross-model interactions instead.

Pitfall: *Applying independent alerts to every model and metric.*

Paging on every per-model threshold crossing creates avoidable noise. Equation 0.68 establishes that for $N_{\text{tests}} = 1000$ independent tests (100 models $\times$ 10 metrics) at $\alpha_{\text{fp}} = 0.05$, $\Pr(\text{at least one false alert}) = 1 - 0.95^{1000} \approx 1.0$. This is the probability of at least one false crossing, not the fraction of pages that are false. Hierarchical monitoring supplies context for grouping and routing related signals, while persistence rules and calibrated thresholds reduce nonactionable notifications. Urgent model or component failures still require direct alerts when their response contracts demand immediate action.

Fallacy: *Platform investment can wait until the organization reaches 100+ models.*

The benefit-cost curves charted in figure 0.161 reach break-even parity between 20 and 50 models under the example's assumed costs and savings. The governing threshold is recovered engineering capacity relative to the full platform cost, not a universal model count. The debt-audit examples identify recurring work that can justify investment, but a migration premium or payback period requires its own effort and recurring-cost estimates.

Pitfall: *Treating all deployments with uniform procedures regardless of risk profile.*

Applying the same staged rollout to every model update either over-burdens low-risk changes or under-protects high-risk ones. Table 0.148 illustrates different cadences, but a model family does not establish a universal release frequency or rollback window. Risk-based policies match observation time, exposure, and containment to the change: a subtle quality regression may require prolonged shadow evaluation, while a harmful release still requires rapid routing to a validated version.

Fallacy: *Per-model metrics, such as loss and accuracy, are sufficient at scale.*

In multi-model platforms, system-level and per-model metrics answer different questions. An upstream latency regression can lengthen the request path while accuracy remains unchanged. Shared-feature drift can reduce several downstream models' accuracy at once; their metrics reveal the harm but do not alone identify its common cause. Section 11 joins business, portfolio, model, and infrastructure signals so the platform can trace that dependency.

Pitfall: *Defaulting to batch pipelines for all features to simplify architecture.*

A daily batch policy is appropriate only when its delay fits the feature contract. The freshness definition $T_{\text{freshness}} = t - T_{\text{event}}$ measures event-to-availability delay; it does not determine a universal batch or streaming latency. The scenarios $T_{\text{freshness}} \approx$ 12–24 hours and $T_{\text{freshness}} \approx$ 1–5 seconds illustrate different operating points whose quality effects require measurement. For the recommendation example in table 0.157, the 2.1-point gap between hourly and real-time features is assumed to be worth $10 million a year. A batch default forgoes that value silently, so the streaming decision belongs in the freshness break-even of checkpoint 12.2 rather than in a blanket preference for simpler pipelines. Fraud systems likewise need timely evidence, but the exploitable delay depends on their other detection and containment controls.

Fallacy: *Technical debt is inevitable at scale and should be addressed only when it blocks critical work.*

The premise overlooks the accumulating cost of recurring work. Section 2 provides illustrative escalation policies, not universal thresholds for declaring debt. Track release friction, incidents, and toil against the platform's own baseline, then compare the cost and expected benefit of remediation. A repeated manual task becomes an investment candidate when reducing it releases enough capacity or risk to justify the work. Waiting for debt to block critical work also means waiting until it is expensive to redirect. Deployment lead time, incident frequency, alert noise, rollback delay, and toil share are leading indicators that show the platform boundary failing while the repair is still small, and dismissing their rise as the price of scale discards that signal.

Summary

Fleet operations makes shared model and feature state, release evidence, resource commitments, and recovery authority governable across a portfolio. Registries, dependency-aware deployment,

and hierarchical monitoring replace repeated per-model coordination with accountable shared controls. Coordination is the organizing concern in C³, but those controls also consume compute and communication resources. Telemetry helps identify lost productivity: stragglers can increase the synchronization term $T_{\text{sync}}(N)$, while data stalls, communication delays, and checkpoint recovery affect execution through different mechanisms and timescales. Registries and release gates connect that resource use to validated, useful outcomes.

Three principles carry forward from those mechanisms. Release evidence is valid only when it binds to one versioned contract, so offline quality, production load, experiment design, and rollback thresholds must describe the same candidate, and any exhausted dimension of the reliability budget vector stops promotion. A regression is priced by exposure as well as by detection, so rollout speed and rollback readiness follow the harm a bad release can do and the time needed to see it. Utilization is the economic invariant beneath every capacity decision, from build-vs.-buy to standby headroom, while the lifecycle ledger ($\text{TCO}_{\text{ML}} = C_{\text{train}} + C_{\text{infer}} + C_{\text{total}} + C_{\text{iter}}$) decides where optimization repays its cost. Edge fleets apply the same contract under weeks-long rollouts, version skew, and privacy-limited telemetry.

Key Takeaways: Platforms, not pipelines

- **One model is not the unit**: At portfolio scale, the operational object becomes the dependency graph of models, features, pipelines, alerts, and owners. Registries, lineage, and ensemble-aware CI/CD expose affected consumers and make compatibility a release condition.
- **Shared controls must earn their cost**: Under its stated savings assumptions, the 50-model, $2M platform example shows how shared infrastructure can repay its investment through reduced toil. Treating the platform as a versioned product keeps adoption, exceptions, migrations, and retirement from recreating that work.
- **Ownership cost chooses the target**: The cost-of-ownership equation separates training, inference, data, and iteration costs, and the dominant term changes over a system's life (principle 16). Choose between iteration speed and serving efficiency from measured lifecycle costs, rather than fleet age alone.
- **Reliability is a vector**: Independent metric alerts scale into noise across a model portfolio. Hierarchical telemetry routes common-cause incidents, while any exhausted availability, latency, freshness, or quality budget can stop promotion, because $\max_i B_i \leq 1$ governs rather than an average (principle 19).
- **Evaluation is one versioned contract**: Offline quality, production load, statistical power, assurance evidence, rollback thresholds, and reproducibility metadata must describe the same candidate (principle 19). Every acceptance claim needs an owner and an invalidation condition, so the contract turns the coordination axis of C³ into auditable evidence.
- **Operations reaches the edge**: Model fleets do not end at the data center. Weeks-long rollouts, hardware-in-the-loop validation, version skew, and heterogeneous device failures make edge deployment part of the same platform discipline that governs cloud CI/CD.

Shared controls pay off when they reduce the coordination required for a safe change without obscuring who owns its consequences. The platform can automate checks, preserve evidence, and enforce limits, but model and domain owners still decide what behavior is acceptable. That boundary makes fleet growth manageable without turning every exception into a central-team bottleneck.

What's Next: A governed fleet is still an attack surface

Even when every release is versioned, gated, and observable, the fleet is not secure by that evidence alone, because reliability metrics show whether the fleet serves its intended callers, not what an adversary can learn or change through the same interfaces. The serving endpoints, shared feature pipelines, telemetry stores, and federated rounds that this chapter made gov-

ernable are also places where an authenticated caller can copy model behavior or a participant can alter what the fleet learns. Defending them starts from a different inventory than operating them: the asset worth protecting, the actor who threatens it, the access that actor holds, and the trust boundary that access must not cross.

↪ Threat models, fleet trust boundaries, model extraction, data poisoning, and differential privacy are developed in chapter 20.

IV

THE RESPONSIBLE FLEET

Part IV

Responsible Fleet Principles

Parts I through III built the machine learning fleet, coordinated its training, and optimized its deployment. Part IV develops the mechanisms for enforcing the security, privacy, robustness, environmental, and social constraints that have shaped those design decisions from the outset. Their detailed treatment follows deployment because enforcement depends on the infrastructure, training, and operational controls already introduced. Each of these constraints can be stated as a budget, measured, and exceeded, which makes it an engineering constraint in the same sense as bandwidth, power, or latency.

What these constraints share is that the evidence collected in the earlier parts cannot certify them. A fleet can meet its latency targets and pass every release gate while an authenticated caller copies the model's behavior or a poisoned contribution plants a backdoor. Its health signals can stay normal while its predictions degrade under shifted inputs. Its energy per request can fall while its total energy rises, and an accurate, fast model can still concentrate its errors among the people least able to contest them. No single algorithm closes any of these gaps; each requires monitoring, verification, and governance systems that surround the fleet. Ignoring them is not a neutral choice, because a breach, a regulatory action, or a site that cannot supply power can stop a fleet as surely as a hardware failure. The principles below preview the limits that the following chapters make operational. They identify decisions that belong in the initial system requirements even though the mechanisms for evaluating and enforcing them require the full fleet context.

The first boundary is what the fleet can trust. A model's behavior is shaped by far more parties than the team that trains it.



Principle 20: The provenance bound on trust

Invariant: A trained model's behavior is a function of every contributor to its data, code, and weights, including training records and labels, preprocessing and training code, software dependencies, pretrained checkpoints, and the hardware and firmware that executed the run. A contributor that cannot be identified and verified can change that behavior without producing a visible failure, so the provenance record bounds how far the model can be trusted.

Implication: Poisoning and supply-chain attacks need not crash anything. A small set of crafted training examples or a backdoored checkpoint can shift a targeted decision while aggregate validation accuracy stays unchanged, so clean evaluation results cannot certify integrity. Trust must be established upstream, through signed artifacts, immutable lineage for data and code, controlled dependencies, and verification before an artifact enters training or deployment, and it extends only as far as that record reaches.

The second boundary is what the fleet can reveal.

Principle 21: The information leakage invariant

Invariant: A privacy claim must name the protected unit and the observations available to an adversary. Let R be one protected individual's training record and O an observable model output. Leakage about that record is present when

$$I(R;O) > 0,$$

but a model's usefulness alone does not imply this condition. Here, $I(\cdot;\cdot)$ denotes mutual information.

Implication: Privacy is a budget, not a switch. Post hoc anonymization of input records does not remove sensitive information already memorized in model weights. Systems requiring formal record-level privacy guarantees should use mechanisms such as differential privacy (DP) where appropriate: DP bounds the influence of adding or removing one protected record for a data analysis or training procedure, and interactive query systems must account for composition and may stop answering once the system exhausts the allocated privacy budget.

Privacy defines what the fleet may reveal; robustness defines how reliably it behaves when distributions drift, environments change, or inputs actively probe its weaknesses.

Principle 22: The robustness compute penalty

Invariant: Adversarial training buys intrinsic robustness with training compute. It trains on adversarial examples, inputs perturbed within a stated budget so that the model's prediction changes. Projected gradient descent (PGD)-style training finds each perturbation with K_{PGD} inner attack steps, so a batch costs roughly $K_{\text{PGD}} + 1$ forward-backward passes instead of one. The resulting clean-accuracy and robustness effects depend on the attack strength and training procedure.

Implication: Robustness measures consume training or serving resources and must be evaluated against a stated threat model. External guardrails such as input filtering and output verification can complement adversarial training, but their detection errors and latency costs remain part of the system. They do not establish the same guarantee as robustness of the underlying model.

Efficiency gains can also change demand, so lower energy per request does not by itself establish lower fleet energy consumption.

Principle 23: The Jevons paradox of AI (efficiency trap)

Invariant: Efficiency improvements can lower unit cost and stimulate demand. In this comparison, total resource consumption rises only when usage grows by a larger factor than resource efficiency improves. The following schematic depicts that rebound scenario, not an inevitable consequence of efficiency:

$$\text{Efficiency} \uparrow \implies \text{Cost} \downarrow \implies \text{Demand} \uparrow\uparrow$$

Implication: Making models $10\times$ more efficient can increase total usage enough to erase or even exceed the expected energy savings. Sustainability strategies must focus on absolute limits (carbon budgets, renewable sourcing) rather than rate efficiency (FLOP/s per watt) alone.

Responsible operation also requires making social objectives explicit. Calibration asks whether predicted probabilities match observed frequencies. Score balance compares average scores across groups separately among positive and negative outcomes; equalized odds instead compares thresh-

olded error rates. These criteria can conflict, so a fairness requirement must specify which guarantee the system should enforce.


> **Principle 24: The fairness impossibility law**
>
> **Invariant**: For imperfect risk scores across groups with different base rates, groupwise calibration and equal mean scores across groups within each outcome class cannot all hold simultaneously.
>
> $$\Pr(Y = 1 \mid G = a) \neq \Pr(Y = 1 \mid G = b) \implies \text{Trade-off Required}$$
>
> Here, Y is the outcome and $G \in \{a, b\}$ is the group attribute; the implication assumes imperfect prediction and refers specifically to the three score criteria above. Equalized odds at one chosen decision threshold is a different condition.
>
> **Implication**: Under the theorem's conditions, fairness requires an explicit trade-off; there is no criterion-free optimum that selects among incompatible metrics. Engineers must treat fairness metrics like latency budgets: explicit trade-offs chosen by stakeholders, enforced by the system, and monitored for violation. Chapter 40 provides the full treatment of when the impossibility result applies, including the equal-base-rate and perfect-prediction exceptions.

Those trade-offs cannot be evaluated once and frozen, because deployed systems alter the data and incentives they later observe.

> **Principle 25: The sociotechnical feedback invariant**
>
> **Invariant**: When a deployed model's decisions affect its environment, the probability distribution of future data $p_{t+1}(x)$ depends on the model's past decisions $f_t(x)$.
>
> $$p_{t+1}(x) = g(p_t(x), f_t(x))$$
>
> Here, g is the environment's response function, which maps the current data distribution and the model's decisions into the next data distribution. Settings with this feedback, where predictions change the outcomes they predict, are called performative.
>
> **Implication**: Systems whose decisions affect their environments require closed-loop governance. A model that maximizes accuracy on static test data can still degrade the future data distribution it operates on, amplify incentives that bias the next round of data, or destabilize the environment being monitored. Reliability in these settings requires modeling the *feedback loop*, not the *feed-forward inference* alone.

Part IV develops these previews in dependency order. Security and privacy come first, because they decide who may reach the model, what its releases may disclose, and which contributors it may trust; the threat model for data poisoning begins there. Access controls cannot show that the model's answers stay valid, so robustness follows, asking whether behavior remains acceptable when inputs, environments, hardware, or adversaries depart from validated conditions, and developing the evidence and defenses that each failure class requires. Both are paid for in compute, which brings sustainability next, treating planetary-scale infrastructure as an energy and carbon system whose power and cooling bound how much of that compute the fleet can run. Responsible AI closes the part by asking whether a fleet that is secure, robust, and within its resource budget is fit to deploy, and by connecting those technical controls to institutional governance. None of these controls is free in C^3 terms. Security and robustness spend compute and serving latency on verification, sustainability prices every powered second of the Fleet Law's computation, communication, and synchronization terms, and governance is the coordination that decides when the fleet may run at all. Together, these chapters complete the engineering discipline that turns a capable fleet into a trustworthy one.

Security & Privacy

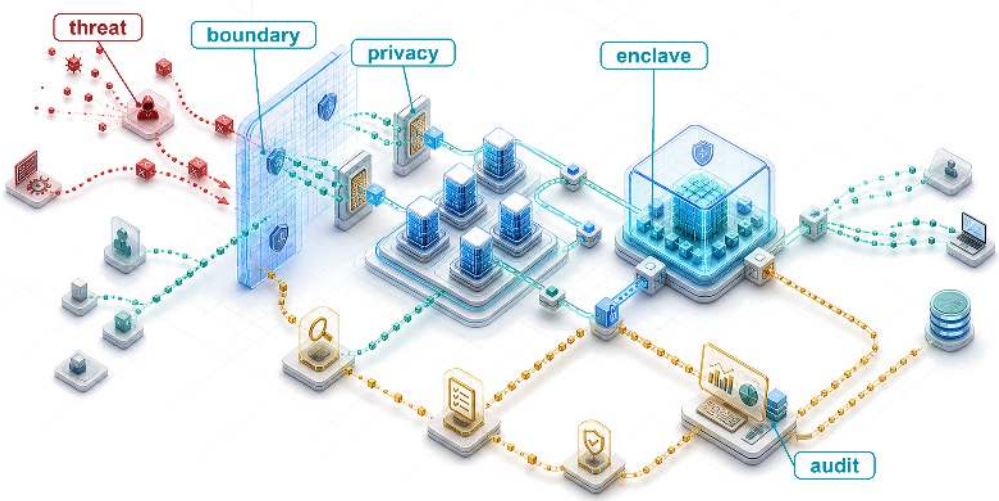

Purpose

Why can a correctly functioning machine learning service still disclose sensitive information or enable an attack?

Many useful machine learning systems depend on personal data, institutional knowledge, or behavioral patterns, creating tension between utility and protection. Models can encode sensitive information and later reveal it through their outputs, extending risk beyond transient data processing. An authorized request can expose a private training example, while accepted training data can be manipulated to alter future behavior. In both cases, the software may execute as designed while the service violates its intended boundaries. Protecting a single server therefore leaves questions about what the model learned, who supplied it, and what callers can induce it to do. Scaling introduces more participants, copies, credentials, and handoffs, often across organizations with different responsibilities. A control applied at one boundary may leave another exposed, and a compromised participant can affect work shared across the fleet. The engineering decision is which actors to trust with which information and authority, then how to enforce those choices throughout training, release, and operation. Protection also consumes resources: restricting access can complicate coordination, checking requests adds work, and limiting information release can reduce model utility. Those costs must fit the service's operating budget without making safeguards optional when demand rises. A high-performing model may still be undeployable if sensitive information or control escapes the intended boundary. In C^3 terms, Compute, Communication, and Coordination must preserve confidentiality, integrity, and accountable control as well as throughput.

Learning Objectives

- Distinguish security from privacy in ML systems through formal definitions, threat models, and quantitative trade-offs
- Extract security and privacy principles from historical breaches (Strava, Stuxnet, Jeep Cherokee, Mirai) applicable to distributed ML infrastructure
- Analyze ML-specific attack vectors across model theft, data poisoning, adversarial examples, and hardware vulnerabilities
- Evaluate fleet-internal controls and hardware trust primitives by the trust boundary each protects and the compute, communication, or coordination cost it imposes
- Design layered defense architectures spanning data protection, model security, runtime monitoring, and hardware trust mechanisms
- Specify privacy-accounting inputs and assess reported budgets against sampling assumptions, composition, and measured utility
- Apply a maturity model to prioritize security controls for a deployment's threat model and operational constraints

The Expanded Attack Surface

A serving fleet can meet its latency target while an authenticated client collects enough responses to copy model behavior. A federated training job can converge while a participating device submits poisoned updates. The release gates and hierarchical monitoring that govern the fleet can report both systems healthy, because a copied model and a planted backdoor need not move any availability, latency, or aggregate-quality signal. Operational health alone therefore cannot establish security. In the fleet stack (figure 0.15), the governance band begins with the Assurance row, which sits directly above Operations and which this chapter shares with chapter 26. That row must preserve the confidentiality, integrity, and availability of the fleet across the same interfaces that make distributed training and serving possible.

Selecting a defense starts by identifying the protected asset, the actor who threatens it, the access that actor has, and the boundary that access must not cross. An API client can observe responses; a training participant can submit updates; a host administrator may inspect runtime state. Those capabilities call for different controls. The breach cases make these boundary failures concrete, the threat model turns them into explicit assumptions, and the later mechanisms enforce those assumptions at measurable compute, communication, and coordination cost.

An attacker can steal database records, alter them, or disrupt access to them. Machine learning adds a learned representation through which those failures can propagate. An adversary may probe a model for memorized training examples or poison its training data to introduce a backdoor that activates on a chosen trigger. Protecting the stored records therefore does not fully protect the behavior learned from them or the information exposed through predictions.

Operational platforms manage hundreds of models across distributed infrastructure, extending the attack surface across workers, devices, and administrative domains. In synchronous data-parallel training, one compromised worker contributes directly to the gradient that every replica applies, and the collective traffic carries that contribution across the training fabric. Its confidentiality depends on the fabric's isolation and encryption controls. Federated aggregation creates another observation boundary because model updates can reveal information even when raw records remain on devices. Accelerators and caches shared among tenants introduce extraction and leakage risks that also exist on a single shared machine. Section 11 develops these fleet-internal boundaries. Scaling the system requires identifying which actors can observe or alter each exchange.

↩ Multi-tenant platforms and the isolation they require are established in section 18.

Learned-information exposure follows from the difference between *transient processing* and *persistent learning*. Many applications process sensitive data without encoding it into learned parameters; machine learning systems can preserve patterns from training data in their model parameters. Sensitive information may then remain in a model after the original processing has ended and become accessible through outputs or systematic interrogation. Queries to a healthcare model may expose memorized patient information, while queries to a proprietary model may reveal enough

behavior to train a substitute. The first threatens training-data privacy; the second threatens model confidentiality.

Architectural complexity compounds these challenges. A contemporary ML deployment spans data ingestion pipelines, distributed training infrastructure, model serving systems, and continuous monitoring frameworks, each introducing distinct vulnerabilities as figure 0.173 maps across the ML lifecycle. Continuous adaptation at edge nodes and federated coordination protocols further expand the attack surface while complicating comprehensive security implementation.

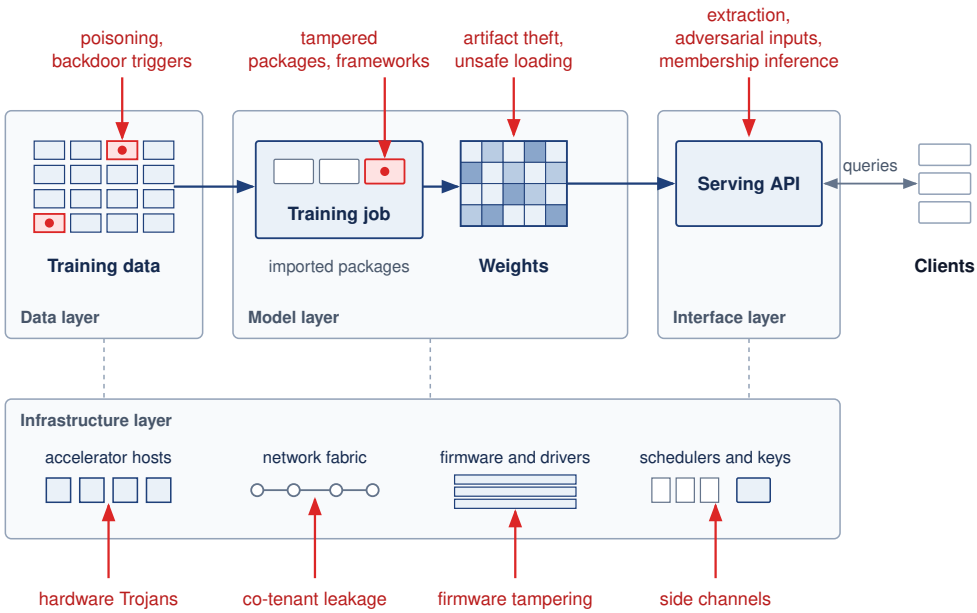


Figure 0.173: ML system attack surface: Red arrows mark where an adversary enters the system: the training data, the training job and its dependencies, the stored weights, the serving API, and the infrastructure beneath all three layers. Each entry point calls for a different control, so defense spans data collection, training and weights, the serving interface, and the provenance of firmware and hardware.

Defense starts by separating two concerns that often share the same vocabulary. Security asks how an adversary can steal, manipulate, or disable the fleet; privacy asks how sensitive information can leak or be inferred even when the system behaves as designed. Keeping those questions separate determines which controls belong at each layer: authentication and isolation around adversarial pathways, provenance and monitoring across the release chain, and privacy accounting wherever learned parameters carry traces of the data that produced them.

Security Defined

Security in machine learning focuses on defending systems from adversarial behavior. This includes protecting model parameters, training pipelines, deployment infrastructure, and data access pathways from manipulation or misuse.

> Definition 13.1: Security
>
> ***Security*** is the set of system properties (confidentiality, integrity, and availability) that protect an ML system's data, model weights, and inference pipeline from intentional adversarial actions, spanning both the infrastructure layer (network intrusion, credential theft) and the algorithmic layer (model extraction, prompt injection, adversarial examples).

1. **Significance**: Security failures operate on both surfaces simultaneously. At the infrastructure layer, theft of a large proprietary model represents direct IP loss. At the algorithmic layer, model extraction via black-box queries can recover decision boundaries or distill a functional approximation of a deployed model at a small fraction of its training cost (section 5 quantifies the query budgets), bypassing the investment and competitive moat. Either failure transfers the value of the original training investment to the attacker without the attacker paying its compute cost.
2. **Distinction**: Security specifies an intentional adversary and the boundaries that actor can cross. Robustness evaluates how model behavior changes under specified perturbations, including both accidental shifts and adversarial inputs; the two concerns overlap when the perturbation comes from an attacker.
3. **Common pitfall**: A frequent misconception is that traditional IT security (firewalls, access controls, encryption) adequately secures ML systems. ML introduces an algorithmic attack surface orthogonal to infrastructure: a properly authenticated API request containing an adversarial input or a prompt injection bypasses all network-layer defenses and manipulates model behavior through the model's own learned functions.

A facial recognition system deployed in public transit infrastructure, for example, may be targeted with adversarial inputs that cause it to misidentify individuals or fail entirely, representing a runtime security vulnerability that threatens both accuracy and system availability. The confidentiality-integrity-availability triad matters because each property breaks a different system contract: confidentiality protects data and model access, integrity protects the correctness of training and inference behavior, and availability protects the service from being disabled or degraded when it is needed.

Privacy Defined

Security addresses adversarial threats; privacy focuses on limiting the exposure and misuse of sensitive information within ML systems. Privacy protections cover training data, inference inputs, and model outputs. They must account both for unintended disclosure during ordinary operation and for active adversaries who choose queries, combine outputs with auxiliary information, or exploit repeated releases to infer sensitive facts.

Definition 13.2: Privacy

Privacy is the protection of sensitive information from unauthorized disclosure, inference, and misuse across the ML lifecycle.

1. **Significance**: It limits the exposure risk of training data and user inputs. Differentially private training introduces a utility-privacy trade-off: tighter privacy bounds generally require more noise or data, which can increase the training compute, the T_{compute} term of the Fleet Law (equation 0.3), required to reach a target utility.
2. **Distinction**: Unlike confidentiality (which focuses on access control), privacy in ML focuses on inference risks: the ability of a user, operator, or adversary to infer sensitive facts or reconstruct training samples from model outputs, weights, or repeated releases.
3. **Common pitfall**: A frequent misconception is that removing names (de-identification) is sufficient for privacy. In reality, neural networks are correlation engines that can inadvertently memorize and leak unique snippets of sensitive data through high-dimensional patterns.

Privacy failures are not limited to raw records or explicit identifiers. Aggregated behavioral traces can reveal sensitive routines when the surrounding geography makes individuals and sites easy to infer. Differential privacy (DP) bounds how much the distribution of released results can change when one protected contribution changes. Mechanisms can achieve this guarantee through calibrated randomization, such as adding noise to a query result. The protected contribution may be

one record or all records from one person; the guarantee must specify which. Its utility cost depends on the task, data, mechanism, and training procedure.

Differential privacy provides one mechanism-level guarantee; it does not provide lifecycle privacy by itself. A system must still minimize collection, establish an appropriate basis for use, enforce access controls, limit retention, honor deletion obligations, and prevent raw inputs or sensitive outputs from leaking through logs and caches. These controls answer questions that a formal privacy bound does not: whether the data should have been collected, who may use them, how long derived artifacts remain, and which copies must be removed. Production privacy therefore composes formal accounting with data-governance controls across collection, training, serving, telemetry, and retirement.

The examples that follow need only one knob. A privacy budget ϵ bounds how much the probabilities of released results may change when one protected contribution changes; smaller values give a tighter bound, and ϵ is not an accuracy percentage. Because additional data-dependent DP releases about the same data spend more of that budget, the budget belongs to the history of releases rather than to any one server. Using a fixed DP-trained model does not spend additional training privacy budget. Section 25 states the formal definition, its additive slack term, and the accounting that tracks spending across releases, once the defense architectures that surround it are in place.

Napkin Math 13.1: The cost of differential privacy

Problem: Consider computing the average salary of 1000 employees while guaranteeing privacy budget $\epsilon = 1$. The salaries range from \$0 to \$200,000. Assume a fixed, public employee roster and neighboring datasets that differ in one employee's salary, with both values inside these bounds. How much noise must the mechanism add?

Math:

1. **Sensitivity** (Δf): The maximum one person can change the sum is \$200,000.
2. **Privacy Budget** (ϵ): 1.
3. **Laplace Noise Scale** (b): the standard mechanism adds symmetric random noise whose typical magnitude is the sensitivity divided by the privacy budget (section 26 develops the mechanism in full), so $b = \Delta f/\epsilon =$ \$200,000 / 1 = \$200,000.
4. Impact on Mean: The mean-estimation noise comes from noise added to the sum with magnitude approximately \$200,000.
    - Error in the mean = \$200,000 / 1000 = \$200. The mechanism draws noise once, for the sum; dividing by the group size spreads that single draw across the mean.

Systems insight: Under this fixed-roster contract, the published mean receives zero-mean Laplace noise with expected absolute magnitude \$200; individual draws can be smaller or larger. For a dataset of $D = 100$, the expected absolute error grows to \$2,000. The noise needed to hide one person is fixed by the sensitivity, while the signal grows with the number of people, so small groups pay the largest relative cost and large datasets dilute it through the factor $1/D$.

Security vs. Privacy

Although they intersect in some areas such as encrypted storage, security and privacy differ in their objectives, threat models, and typical mitigation strategies. These security-privacy distinctions matter because the two domains optimize for different failure modes. Table 0.190 contrasts them across six dimensions, showing how their distinct goals shape the specific concerns and defenses practitioners must consider.

Table 0.190: Security-privacy distinctions: Machine learning systems require distinct approaches to security and privacy; security mitigates adversarial threats targeting system functionality, while privacy protects sensitive information from both intentional and unintentional exposure through data leakage or re-identification. This table clarifies how differing goals and threat models shape the specific concerns and mitigation strategies for each domain.

Aspect	Security	Privacy
Primary Goal	Prevent unauthorized access or disruption	Limit exposure of sensitive information
Threat Model	Adversarial actors (external or internal)	Passive exposure and active inference with auxiliary information
Typical Concerns	Model theft, poisoning, evasion attacks	Data leakage, re-identification, memorization
Example Attack	Adversarial inputs cause misclassification	Model inversion infers sensitive training-data properties
Representative Defenses	Access control, adversarial training	Differential privacy; federation with accounted privacy controls
Relevance to Regulation	Emphasized in cybersecurity standards	Central to data protection laws (for example, GDPR)

The distinction is useful only if it changes design behavior, and the two domains interact in both directions.

Systems Perspective 13.1: The privacy-utility trade-off

Security and privacy are deeply interrelated but not interchangeable. A secure system helps maintain privacy by restricting unauthorized access to models and data. Privacy-preserving designs can improve security by reducing the attack surface; minimizing the retention of sensitive data reduces the risk of exposure if a system is compromised.

However, their controls can impose competing requirements. Differential privacy bounds information disclosed by a release but may lower model utility. Encryption restricts who can inspect protected data, so an audit that needs those data requires an authorized inspection path and appropriate key custody. The design must preserve useful evidence while limiting what that evidence reveals.

Security and privacy therefore constrain the same system through different boundaries. Access control, cryptography, trusted execution, and differential privacy address different failure modes; their combination must protect model assets, limit data exposure, and retain the evidence needed to investigate failures. The breach histories make those boundaries concrete by tracing how aggregate releases, compromised components, and excessive access can expose information or alter system behavior.

Learning from Security Breaches

A public heatmap built for runners became a military-intelligence leak when sparse GPS traces outlined movement around sensitive sites. That privacy failure belongs beside three landmark security breaches because each case turns an abstract control objective into an operational constraint: behavioral telemetry can identify people, supply-chain compromise can alter physical systems, weak isolation can expose safety-critical control paths, and default credentials can turn cheap devices into attack infrastructure. Although most of these incidents did not target ML systems directly, every failure mode they demonstrated has a direct analog in training pipelines, inference APIs, edge deployments, and privacy-preserving data products.

War Story 13.1: The heatmap that revealed routines (2018)

Context: In late January 2018, public scrutiny of Strava's global activity heatmap, an aggregate built from users' uploaded GPS traces, revealed that it exposed activity at military bases

(Russell 2018). The release showed patterns of movement without displaying a list of named participants.

Mechanism: Aggregation hides individuals only where many people contribute. In sparsely populated regions, the few bright tracks came largely from personnel exercising on and around bases, so the heatmap traced base perimeters and the routes people ran, even where a site's location was already known.

Impact: The map exposed an operational-security risk in consumer telemetry. An aggregate intended to help people find exercise routes also told an observer where personnel moved routinely, prompting reviews of how fitness devices were used near sensitive facilities.

Design response: A system releasing location aggregates must assess what sparse regions reveal, limit sensitive contributions, and make participation controls understandable. These are design requirements suggested by the incident, not evidence that a particular product change eliminated the risk.

Systems lesson: Privacy failures can occur without names, passwords, or model weights leaking. Aggregation alone does not establish privacy when the released pattern and its surrounding context reveal sensitive behavior.

Stuxnet and supply chain compromise

Discovered in 2010, the Stuxnet worm used four zero-day vulnerabilities among its infection and propagation mechanisms, including spread through infected USB media. It targeted Siemens Step7 software and the programmable logic controllers (PLCs) it managed in industrial systems, including the air-gapped[1] environment at Iran's Natanz nuclear facility (Farwell and Rohozinski 2011). Altered control behavior accompanied by apparently normal telemetry demonstrated that operational health signals can conceal a compromise. An analogous ML failure occurs when poisoned training data or a backdoored model changes selected predictions while the inference server continues to meet its latency and availability targets. The common mechanism is a violation of behavioral integrity that ordinary service-health monitoring need not detect.

ML supply chains that ingest public packages, datasets, model weights, or firmware face four analogous vectors: compromised dependencies (malicious packages in PyPI and conda repositories), poisoned datasets on public platforms, backdoored model weights in model repositories, and tampered accelerator firmware. Each can introduce behavior through an artifact the pipeline accepts. Because a model's behavior depends on every contributor to its data, code, weights, and hardware, the model can be trusted only as far as a verifiable record of those contributors extends. That statement is the provenance bound on trust (principle 20), and it carries the Stuxnet lesson to every artifact an ML pipeline admits. Artifact signatures and immutable provenance logs establish origin and integrity evidence; controlled dependency admission limits which artifacts enter the pipeline. Behavioral testing addresses a different question, because an authentic, unchanged artifact can still contain a backdoor. Figure 0.174 maps these parallels between the Stuxnet attack chain and ML supply chain vulnerabilities.

[1] **Air-Gapped**: Physical network separation does not eliminate transfer paths through removable media or authorized personnel. An isolated ML training cluster still needs a controlled process for admitting frameworks, datasets, and pretrained weights; each transfer must preserve the intended trust boundary.

Insufficient isolation in the Jeep Cherokee hack

Security researchers remotely compromised a Jeep Cherokee's engine, transmission, and braking systems by exploiting a vulnerability in the vehicle's internet-connected Uconnect entertainment system, without physical access to the car (Miller and Valasek 2015; Miller 2019). Insufficient isolation allowed the compromised entertainment system to reach safety-critical controller area network bus controllers and manipulate vehicle functions. The resulting recalls covered approximately 1.4 million vehicles. The National Highway Traffic Safety Administration (NHTSA) subsequently published nonbinding vehicle cybersecurity best-practice guidance in 2016, drawing on its broader research and industry consultation.

The ML lesson concerns authority across a trust boundary. Perception or diagnostic models may need to communicate with actuator controllers, but compromise of an externally reachable inference component must not grant unrestricted control authority. Segmentation, authenticated narrow gateways, sandboxed model execution, and minimal privileges constrain that path. Controllers must

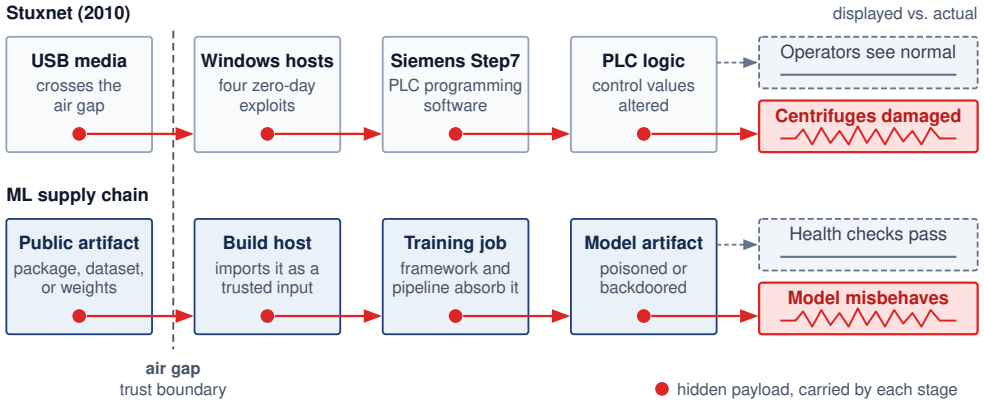


Figure 0.174: Stuxnet and the ML supply chain: The top row traces the Stuxnet chain from removable media through Windows hosts and Siemens Step7 software to altered PLC logic, which damaged centrifuges while operators saw normal readings. The bottom row places the ML analog under each stage: a compromised public artifact passes through trusted build and training steps into a model whose misbehavior monitoring does not reveal.

validate permitted commands and apply a system-specific safe response when inputs are invalid or communication fails; a network path makes the attack possible only if the controller accepts what arrives over it.

Weaponized endpoints and the Mirai botnet

In 2016, the Mirai botnet exploited weak credentials on Internet of Things (IoT) devices, including cameras, digital video recorders, and routers, to build infrastructure for distributed denial-of-service (DDoS)[2] attacks. The longitudinal study of Mirai measured a peak of about 600,000 infections and documented attacks against services including Dyn, whose disruption affected other internet services (Antonakakis et al. 2017). The peak population describes the botnet over time, not the participants in one attack. The scaling lesson is that many individually limited devices can collectively threaten much larger services.

For ML edge deployments, a compromised endpoint may expose more than bandwidth. Its accessible records can include images or transcripts, and its enrolled federated-learning identity may let an attacker submit malicious updates. The defense must match those capabilities. Device-specific credentials limit shared-secret exposure, authenticated encrypted channels protect communication, and secure boot constrains which startup software is accepted. Hardware security modules (HSMs), tamper-resistant devices that hold keys and perform cryptographic operations without exposing those keys to host memory, can protect key custody where the platform supports them. Monitoring provides evidence of misuse, while update validation remains necessary because an authenticated device can still send harmful data.

Together, the Strava, Stuxnet, Jeep, and Mirai incidents expose failures at four different boundaries: an aggregate release, accepted components, paths to safety-critical control, and endpoint credentials. The engineering task is to identify the asset and attacker capability at each boundary before choosing a control. A threat model makes those assumptions explicit, so defenses can be evaluated against the failures they are intended to prevent and the resources they consume.

Systematic Threat Analysis and Risk Assessment

An authenticated request can still probe a model for memorized data, and an accepted training sample can still carry a backdoor. Network security and user authentication therefore need a threat model that includes learned behavior. Training data can be manipulated to embed backdoors, input perturbations can exploit learned decision boundaries, and systematic API queries can expose enough behavior to train a substitute. Each attack uses an interface the system needs for ordinary work.

[2] **DDoS (Distributed Denial-of-Service)**: High-volume querying can threaten both availability and model confidentiality when the responses also supply useful training examples for a surrogate. High volume is a symptom, not a diagnosis; defenders must examine what the queries explore and what the responses reveal.

Each of these vectors requires a formal **threat model**, written down as four fields: asset, boundary, adversary, and control. The asset defines what must remain confidential, intact, or available. The boundary defines where trust changes, such as between training data and model registry, user prompt and system instruction, or tenant workload and shared accelerator. The adversary field records the actor's capability (what it can access, observe, or modify) and its goal (what it seeks to compromise). The control identifies a permission, isolation mechanism, or observable signal that constrains the attack or supports a response. Without those fields, a risk matrix cannot explain why a particular defense deserves resources. Attack cost and expected benefit help assess feasibility, but the model must also cover actors whose objective is disruption rather than financial return.

For a federated training round, suppose the coordinator may inspect messages but follows the aggregation protocol, while a compromised enrolled client may submit an arbitrary update. The same update crosses two boundaries. Hiding individual contributions from the coordinator addresses confidentiality; checking or limiting a client contribution addresses integrity. Authenticating the client establishes who sent an update, not whether the update is benign. A defense comparison is meaningful only after stating which of these actors, capabilities, and possible collusions it covers.

Security threat modeling for ML systems

Systematic threat modeling identifies what must be protected and from whom. It is a structured approach to security analysis that characterizes the attack surface and guides defensive investments. For machine learning systems, threat modeling must account for dependence on training data, statistical decision boundaries, and distributed deployment patterns.

Attack surface analysis

The attack surface of an ML system encompasses all points where an adversary can interact with or observe the system. It includes the lifecycle risks of ordinary software, such as compromised dependencies, as well as the data and learned state that determine model behavior. Decomposing this surface into data, model, interface, and infrastructure layers identifies where a control can constrain the attacker and what remains exposed beyond that control.

The training data pipeline lets an adversary influence behavior before the model exists. At collection endpoints, raw data enters through application logs, sensors, forms, APIs, or uploads. Training corpora then reside in object stores, warehouses, feature stores, or dataset registries. Preprocessing pipelines normalize, filter, augment, and join these inputs, while human annotation, weak-labeling rules, or model-assisted labeling supply the targets used for learning. Dataset manifests and lineage systems identify which snapshot enters a release. A compromised source can affect successive model versions if the pipeline continues to ingest its records, and a backdoor may persist when training reuses an affected checkpoint. Retraining alone therefore does not establish that the compromised contribution has been removed.

The model itself presents multiple attack surfaces spanning training infrastructure, model storage and versioning systems, model serialization and deserialization code, hyperparameter configuration management, and gradient computation and aggregation processes. Attacks at the model layer can compromise integrity by embedding trojans during training, extract intellectual property through parameter theft, or manipulate behavior through weight poisoning.

Deployed models expose additional attack surfaces through inference API endpoints and load balancers, authentication and authorization systems, input validation and preprocessing logic, output formatting and response generation, and monitoring and logging infrastructure. At this interface layer, input checks enforce the accepted request contract, query limits constrain collection, and output controls restrict the information returned. An adversarial input can satisfy the request contract, and a permitted response can still reveal useful model behavior, so these controls need evaluation against the specified attack.

The underlying computational infrastructure presents traditional attack surfaces amplified by ML-specific concerns, including accelerator firmware and drivers, container orchestration and scheduling systems, network communication between distributed training nodes, key management and secrets infrastructure, and supply chain for ML frameworks and dependencies. Infrastructure compromises can affect all systems running on shared resources, making this layer critical for multi-tenant ML platforms.

Threat vector classification

Threat-vector classification matters because the same model failure demands different defenses when the attacker has only API access, partial design knowledge, or full insider access. The three axes are access type, knowledge level, and attack timing.

Access type specifies how the adversary can inspect or interact with the model. Under black-box access, the available interface returns outputs for submitted inputs. It can support model extraction (Tramèr et al. 2016) and query- or transfer-based adversarial attacks (Nicolas Papernot, McDaniel, and Goodfellow 2016) without exposing the target's parameters. Gray-box access adds partial internal information, such as the architecture or training procedure. White-box access supplies the model's parameters and architecture, enabling direct gradient-based attacks (Goodfellow et al. 2015) and parameter copying when the files are accessible. These labels describe model visibility; they do not grant permission to alter training data, replace weights, or modify the runtime. Those write capabilities must be stated separately.

Knowledge level adds the background information available beyond the exposed interface. A black-box client may know the application domain, public architecture documentation, or examples resembling the training distribution. An insider may know the deployment configuration without being able to read every training record. Model visibility and auxiliary knowledge therefore overlap, but neither replaces an explicit inventory of what the adversary knows. Claims of full knowledge must identify whether they include training records, preprocessing, and defense settings as well as model parameters.

Attack timing determines where the defense can still intervene across the system lifecycle. Training-time attacks, such as data poisoning or backdoor injection, manipulate the learning process before the model artifact is produced. Deployment-time attacks compromise model distribution, serialization, or container installation before serving begins. Once in production, inference-time attacks exploit the deployed model through adversarial inputs or extraction queries. Finally, postdeployment attacks target online model updates, monitoring telemetry, or operational feedback loops after the model is already in service. The defense surface therefore moves in lockstep with the model lifecycle, from data controls to artifact integrity to serving-time containment.

Combining these dimensions defines a testable threat scenario. A public API adversary might query a deployed classifier, know its task and output format, and lack access to its parameters or training records. A training insider might inspect the model and alter a specified subset of examples before fitting begins. The second scenario permits poisoning because it grants a write capability, not merely because the attacker knows more about the model.

Defense strategy framework

Effective defense against the threat vectors identified by the threat model requires a layered strategy that addresses each attack surface while accounting for adversary capabilities. The defense framework operates on three principles: defense in depth, minimal attack surface, and fail-safe defaults.

No single defensive mechanism provides complete protection. The principle of **defense in depth** requires multiple independent layers such that compromising one layer does not grant full system access. For ML systems, this means combining data validation with model robustness techniques, access controls with output perturbation, and software defenses with hardware security mechanisms.

The principle of **minimal attack surface** treats every exposed interface, stored artifact, and network endpoint as a potential entry or observation point. An API should expose only the functionality and output precision its users need, because detailed scores provide additional observations of model behavior. Encryption at rest protects stored models and training corpora when the attacker cannot also obtain their keys. Separating training clusters from inference endpoints constrains lateral movement, while protected access logs support investigation of sensitive operations. Each control reduces a particular exposure; none removes the need to examine the paths that remain.

The principle of **fail-safe defaults** makes access depend on established permission rather than the absence of a detected threat. A request that cannot be authorized must not acquire privileges because a service failed. Behavioral anomalies require a separate response policy because they can also arise from legitimate traffic or distribution shift. Depending on the application, the system may reject a request, defer to a verified fallback, suspend a release, or isolate an affected component while

preserving essential service. The safe response follows from the consequences of both continued operation and interruption; it cannot be inferred from an anomaly score alone.

Table 0.191 provides a concrete mapping from each attack surface layer to the defensive mechanisms and detection methods that protect it. Data defenses validate provenance, model defenses protect learned behavior and weights, API defenses govern query exposure, and infrastructure defenses anchor runtime trust.

Table 0.191: Defense mapping by attack surface: Each layer of the ML system attack surface requires specific defensive mechanisms and detection methods. Effective security integrates protections across all layers while maintaining detection capabilities that can identify attacks that bypass preventive controls.

Attack Surface	Primary Threats	Defensive Mechanisms	Detection Methods
Data Layer	Poisoning, label manipulation, supply chain compromise	Input validation, provenance tracking, secure data pipelines	Statistical anomaly detection, data quality monitoring
Model Layer	Backdoor injection, parameter theft, trojan insertion	Secure training environments, encrypted model storage, access controls	Model behavior analysis, weight distribution monitoring
API/Interface Layer	Adversarial examples, model extraction, membership inference	Input sanitization, rate limiting, output perturbation, differential privacy	Query pattern analysis, confidence distribution monitoring
Infrastructure Layer	Side-channel attacks, firmware compromise, supply chain attacks	Trusted execution environments (TEEs), secure boot, network segmentation, dependency scanning	Hardware performance monitoring, integrity verification

Attack surfaces, threat vectors, and the defense mapping together enumerate what could go wrong and which control addresses each failure. They do not say which failure to address first, and no deployment can fund every control at once.

Threat prioritization framework

Prioritization ranks the enumerated threats by how likely each is in the deployment and how much damage it would cause. Impact is not purely technical. Regulatory obligations raise the cost of some failures, as when an erasure request under the European Union's General Data Protection Regulation (GDPR)[3] obliges the operator to trace personal data through derived datasets, logs, and deployed artifacts. A prioritization matrix based on likelihood and impact turns the threat model into an allocation decision: automate defenses for threats that are both likely and damaging, prepare for rare but severe failures, and avoid spending scarce engineering time on low-value controls.

The following placements illustrate a threat model rather than universal attack frequencies. High-likelihood/high-impact poisoning is plausible in a federated deployment that admits untrusted contributors and suffers severe consequences from manipulated predictions. Such a deployment needs controls on update integrity and a response path for suspected compromise. High-likelihood/low-impact extraction describes a different scenario in which public queries are accessible but behavioral copying creates limited competitive loss. Output restrictions and query budgets may then be proportionate controls, although their effectiveness still requires evaluation.

The lower-likelihood quadrants receive different treatment. Low-likelihood/high-impact hardware side-channel attacks describe a deployment in which obtaining the necessary observations is difficult but a successful attack could reveal valuable secrets. The required access depends on the channel; some attacks use a physical probe, while others exploit shared resources or remotely observable timing. In the public API scenario used for this matrix, membership inference attacks,[4] which test whether a particular record was part of the training set, may sit in a lower-likelihood/lower-impact quadrant than direct integrity failures. That placement must be reassessed when the training data is sensitive or the exposed outputs make membership easier to infer. The matrix records those deployment assumptions rather than assigning a permanent rank to each attack family.

The framework guides resource allocation, as figure 0.175 summarizes. The example prioritizes accessible model and data threats before more specialized hardware attacks. A deployment with sensitive co-tenants or exposed edge hardware may require a different order. The allocation decision

3 **GDPR (General Data Protection Regulation)**: Article 17 establishes a right to erasure under specified grounds and exceptions. For an ML pipeline, responding to an applicable request requires tracing personal data through source records, derived datasets, logs, and deployed artifacts. Whether a trained model requires remediation depends on the data it retains and the applicable obligation; deleting a source row does not establish that every derived copy or learned disclosure has been removed. Retraining and machine unlearning are possible technical responses whose effectiveness requires separate validation.

4 **Membership Inference as a Threat**: For threat modeling, the relevant variable is what the adversary observes: confidence scores, labels only, or individual client updates (Shokri et al. 2017). Attack success depends on the target model, data, outputs, and adversary knowledge. Confirming that an individual's data was in a training set can still create privacy and compliance risk; whether that disclosure violates GDPR, HIPAA, or another rule depends on the data, parties, and deployment context (European Parliament and Council of the European Union 2016; U.S. Department of Health and Human Services 2003).

depends on the expected harm, the control's effectiveness, and its engineering cost, not on the attack category alone.

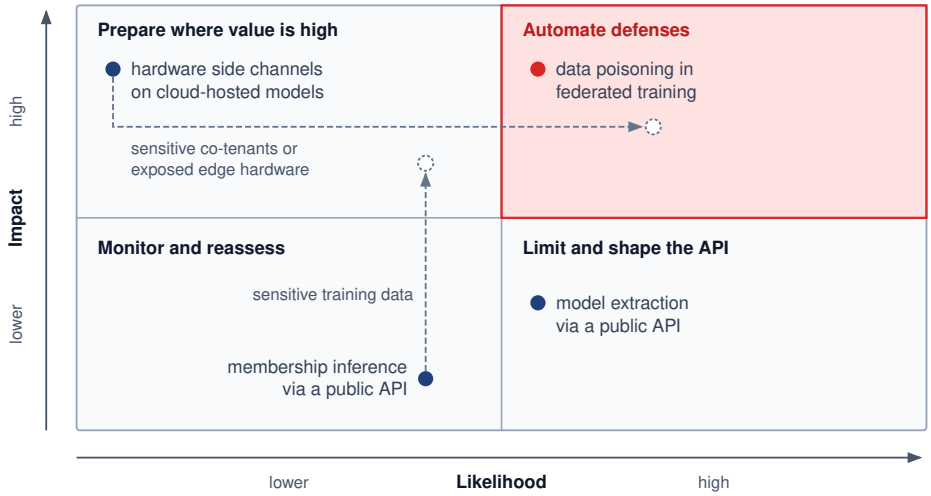


Figure 0.175: Threat prioritization matrix: Likelihood and impact place each example threat in a quadrant, and the quadrant sets the response. Likely, damaging threats such as federated data poisoning warrant automated defenses; rare but severe threats such as hardware side channels justify preparation in high-value deployments; likely but lower-impact extraction calls for API limits; and membership inference through a public API is monitored and reassessed when the training data is sensitive. Dashed arrows show how deployment assumptions move a threat to another quadrant.

Checkpoint 13.1: Knowledge check: Threat modeling

A team detects a high volume of API queries from a single IP address that are systematically exploring the decision boundary of a fraud detection model.

- ☐ **Lifecycle stage**: identify whether the suspicious activity occurs during training, serving, or infrastructure operation.
- ☐ **Attack surface**: identify the interface the attacker is exercising and infer what the query pattern reveals.
- ☐ **Defense mapping**: select the rate-limiting, monitoring, or output-control mechanisms that should activate first.

An unusual query pattern is evidence to investigate, not proof of extraction. The threat model connects that observation to an actor's capabilities and the asset at risk. Specific attack mechanisms then explain how access to data, artifacts, or predictions can compromise the model.

Model-Specific Attack Vectors

A stop sign with strategically placed black and white stickers can remain recognizable to a human while an evaluated image classifier labels it as a speed limit sign. The attacker changes the observed input rather than the classifier's code or stored weights. This adversarial example illustrates why the lifecycle entry point matters. Training data, model artifacts, and runtime inputs give an attacker different ways to influence the system and require controls at different boundaries.

The lifecycle entry point separates four objectives. Model theft targets confidentiality by obtaining artifacts or reproducing behavior from queries. Poisoning targets training integrity by changing what the model learns. Adversarial examples target deployed behavior by changing the inputs a model receives. Availability abuse uses the same serving interface to exhaust the service's compute and cost budget rather than to change any prediction. Data poisoning therefore requires an intervention

in the learning pipeline, whereas adversarial inputs and availability abuse call for controls on the deployed service. Written as the four-field threat model of section 3, the objectives differ mainly in asset and adversary capability. Theft targets weights or behavior and needs either artifact access or query access. Poisoning targets training integrity and needs write access to something the model learns from. Adversarial inputs target deployed decisions and need control over an input, while availability abuse targets the serving budget and needs nothing beyond an account. These objectives connect the attack surface analysis in section 3 to the controls available before training, during artifact handling, and at inference.

Figure 0.176 locates these entry points. Upstream, an attacker may inject samples or alter labels in a data source the pipeline accepts. A backdoor can then remain inactive on ordinary evaluation inputs and activate on a chosen trigger. Downstream, deployed files expose an artifact-access boundary, while prediction APIs expose a query boundary. An adversarial input crosses the latter without requiring the attacker to alter the training pipeline.

Controls must act at the relevant entry point and preserve their assumptions through later stages. Data validation limits what enters training, artifact controls authenticate what deployment loads, and serving controls constrain requests and returned information. None establishes behavioral correctness by itself; the threat model determines which attack each control must withstand.

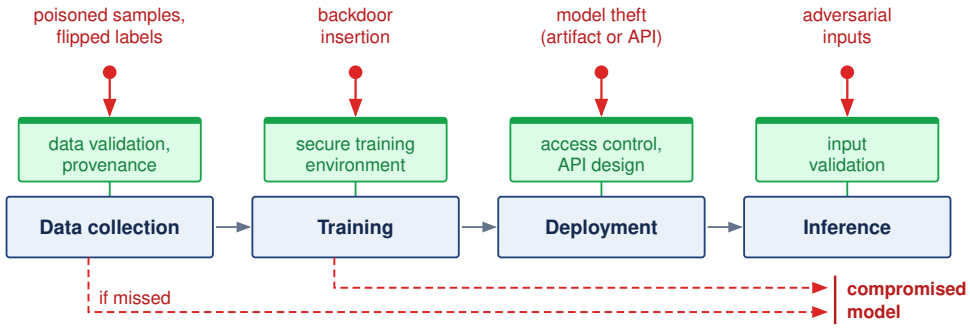


Figure 0.176: ML lifecycle threats: Poisoning, backdoor insertion, model theft, and adversarial inputs enter at different lifecycle stages (red arrows), and each stage has its own first control (green gates). Dashed lines show a training-time compromise that passes its gate persisting into every later stage, so a control placed at a different stage cannot intercept the threat before it takes effect.

The lifecycle view treats models as assets to protect, but it also exposes why those same assets can become part of an attack strategy. Pretrained models, particularly large generative or discriminative networks, may be adapted to automate tasks such as adversarial example generation, phishing content synthesis, or protocol subversion. Open-source or publicly accessible models can be fine-tuned for malicious purposes, including impersonation, surveillance, or reverse-engineering of secure systems. The chapter returns to that dual-use problem after establishing the basic threat classes, starting with attacks that steal model value.

Model theft

Model theft, the first category of model-specific threats, targets confidentiality. It arises when adversaries gain access to a trained model's parameters, architecture, or output behavior (Oliynyk et al. 2023). These attacks can undermine the economic value of machine learning systems, allow competitors to replicate proprietary functionality, or expose private information encoded in model weights.

Such threats arise across a range of deployment settings, including public APIs, cloud-hosted services, on-device inference engines, and shared model repositories. Prediction interfaces can leak enough signal to recover model functionality (Tramèr et al. 2016; Oliynyk et al. 2023), while classifier outputs can reveal meaningful information about training sets or learned structure (Ateniese et al. 2015). Artifact handling introduces separate risks. Unsafe deserialization[5] can execute attacker-

[5] **Model Serialization**: Python's pickle format, common in PyTorch checkpoint workflows, can execute arbitrary code during deserialization, so loading an untrusted checkpoint is equivalent to running untrusted code. Formats such as SafeTensors store only tensor data and remove that execution path (Hugging Face 2026).

supplied code, while insufficient access controls can expose model files or deployment packages directly.

Figure 0.177 separates two theft objectives that require different controls. **Exact artifact theft** obtains the model file or deployment artifact through storage, registry, or device access. The attacker can reuse the recovered weights without repeating their training. **Approximate behavioral theft** uses API responses, such as labels, logits, embeddings, or confidence scores, to train a surrogate. It can exploit permitted queries without breaking authentication. The literature names this query-based branch in several ways. *Model extraction* and *model stealing* are synonyms for the attack, while *knockoff modeling* and *model distillation* name its usual training step, in which a surrogate learns from the victim's outputs. Its usual product is a behavioral surrogate, but the same query access can also recover selected internal parameters, a third outcome that the OpenAI results below demonstrate. Encryption, access control, and protected deployment paths restrict artifact access; signatures separately authenticate artifact integrity. Output limits, query budgets, auditing, and pricing constrain behavioral extraction, while watermarking can support attribution after copying.

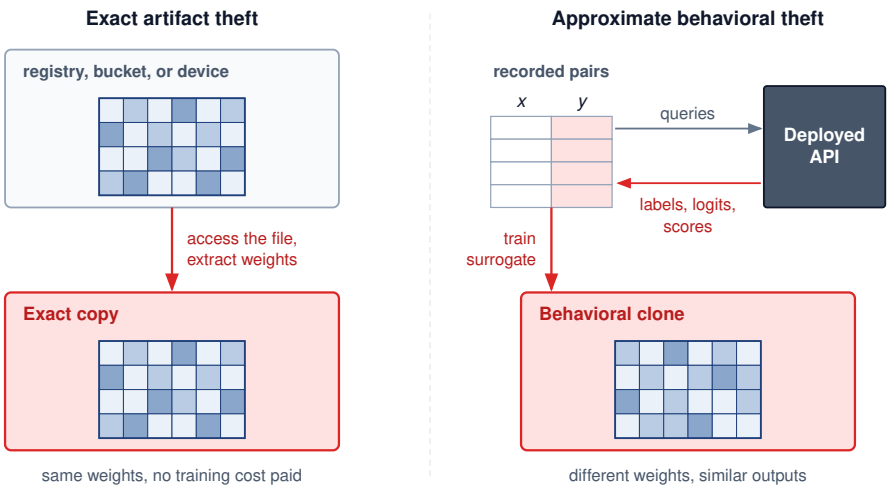


Figure 0.177: Model theft strategies: Exact artifact theft (left) obtains the model file, checkpoint, registry entry, or device artifact and reconstructs the original model. Approximate behavioral theft (right) uses black-box API queries, output signals, and surrogate training or distillation to clone the model's behavior without direct access to weights.

Definition 13.3: Model extraction

Model extraction is the class of attacks in which an adversary, with only black-box query access to a deployed model's prediction interface, recovers the model's parameters, decision boundaries, or behavior by analyzing observable outputs.

1. **Significance**: Successful extraction often costs orders of magnitude less than the original training. Published demonstrations have recovered logistic regression, neural-network, and decision-tree models from public machine-learning APIs with high fidelity and modest query cost (Tramèr et al. 2016), and later work has reconstructed components of large language models, including OpenAI deployments studied by Carlini et al. (2024), using only public query access. The BERT extraction example in this section illustrates the same dynamic on a transformer model, using only synthetic queries to train the copy.
2. **Distinction**: Unlike direct theft of model files (which requires intrusion into the storage layer) and model inversion (which uses model outputs to infer training-data properties or reconstruct representative inputs rather than the model itself), extraction's attack surface

is the model's query interface, which makes it a threat every deployed ML service faces by construction whenever the model is reachable.

3. **Common pitfall**: A frequent misconception is that rate limiting alone is a sufficient defense. An attacker willing to issue queries slowly, distribute requests across accounts, or accept a multi-month attack window may still extract useful behavior. Reducing output information, detecting systematic probing, and pricing queries can raise the cost or expose the attempt, but their combination does not guarantee prevention.

Model theft can also enable attacks on information encoded by the model. Extraction studies demonstrate recovery of useful behavior or selected internal parameters, although those outcomes do not imply complete replication of a large model or its training pipeline (Tramèr et al. 2016; Carlini et al. 2024). A competitor holding a stolen Archetype B (DLRM at Scale) recommendation model obtains its embedding tables, which store a learned vector for each value of each categorical feature. In a recommender those features commonly include user and item IDs, so the stolen tables hand the competitor a per-user vector shaped by that user's history, a natural starting point for inferring the user's attributes. Whether this exposes particular customer attributes depends on the model, accessible features, and auxiliary information. Model inversion attacks investigate that boundary by attempting to infer sensitive input properties from the learned model (Fredrikson et al. 2015).

Model inversion can use either query access or exposed model internals. Confidence scores, for example, can guide a search for inputs that the model associates with a target identity or attribute. A reconstructed face may reveal recognizable features without reproducing an exact training photograph; the privacy claim must distinguish those outcomes. A related but distinct failure arose from direct linkage of the Netflix Prize dataset,[6] where researchers inferred individual movie preferences from anonymized records rather than by querying a trained model (Narayanan and Shmatikov 2006).

The approximate behavioral extraction path in figure 0.177 becomes practical because black-box query cost can be much lower than the cost of training the original model.

6 **Netflix Deanonymization**: As few as 8 movie ratings with approximate dates uniquely identified 99 percent of records in the anonymized Netflix Prize dataset, and correlation with public IMDb ratings re-identified users (Narayanan and Shmatikov 2008). For ML training data, removing direct identifiers does not establish privacy when retained records can be linked to auxiliary information.

Example 13.1: The BERT model extraction

Scenario: Proprietary language models deployed behind public inference APIs return full probability vectors and confidence scores to client queries (Krishna et al. 2020).

Diagnosis: The attacker needed no real training data. Because both the victim and the copy were fine-tuned from the same publicly released pretrained BERT, queries made of random word sequences shaped by simple task-specific heuristics supplied enough labeled outputs to train a student that recovered much of the victim's task performance on tasks including natural language inference and question answering (Krishna et al. 2020). With a shared public starting point, the API responses had to supply only the task-specific fine-tuning signal. Retaining task accuracy is distinct from agreeing with the target on each input; neither implies recovery of its exact parameters.

Systems lesson: API endpoints expose intellectual property when outputs carry raw decision-boundary logits. Serving platforms combine rate-limiting, query auditing, and confidence-score truncation to make model extraction more costly and detectable.

Exact artifact theft

Exact artifact theft targets the model's stored structure and learned parameters. The exposed path may be an artifact-download API, an on-device inference package, or a model repository. This differs from querying a prediction API: the attacker obtains the artifact itself. Weak access control or unprotected packaging can expose that artifact without requiring full control of the underlying infrastructure.

The value of a stolen artifact depends on what it contains and what the attacker wants to reproduce. Learned parameters and architecture details can support inference when the necessary preprocessing and runtime are available. Training hyperparameters, including learning rate schedules, batch sizes,

and regularization settings, help reproduce or extend training, but are not required merely to execute an existing checkpoint. Side-channel attacks,[7] reverse engineering, or analysis of observable outputs may reveal additional structure when the artifact is incomplete. The threat model should therefore distinguish running a copied model from rebuilding the pipeline that produced it.

System designers must account for these risks by separating artifact security from interface security. Artifact controls secure model files, registry entries, and deployment packages; interface controls restrict APIs, reduce output precision, audit query patterns, and price or rate-limit access so behavioral extraction becomes harder to perform economically (Tramèr et al. 2016; Oliynyk et al. 2023).

[7] **ML Side-Channel Attacks**: Timing or power observations can reveal properties of inference even when model files and query outputs are restricted. Recovering useful structure depends on the implementation, measurement access, and signal quality; physical proximity is a precondition for some channels, not a guarantee of success.

Insider theft of engineering assets

Insider access is often the shortest path to artifact theft, because an insider needs no exploit to reach files that the development environment already grants. The two cases below involve documents and source code rather than model weights, and that difference is their lesson. The protected asset extends beyond the serialized model to the code and data that produced it. Former Google engineer Anthony Levandowski was accused of taking proprietary Waymo materials before founding a competing startup (The New York Times 2017), a case about engineering intellectual property rather than demonstrated extraction of model weights. In March 2019, Tesla filed two trade-secret lawsuits involving former employees who left for autonomous-vehicle competitors (Korosec 2019). One complaint alleged that employees who joined Zoox copied proprietary warehousing, logistics, and inventory-control documents. A separate complaint alleged that former Autopilot engineer Guangzhi Cao copied Tesla Autopilot source-code repositories before joining XPeng/XMotors.

These allegations matter for ML systems because training code, feature pipelines, labeling workflows, deployment scripts, simulation assets, and operational playbooks can reveal enough about a system to accelerate a competitor's replication effort or expose downstream security weaknesses. API-level extraction defenses do not reach this boundary. Restricting prediction queries cannot prevent a developer from copying repositories that the developer can already access. Development access, artifact handling, and release provenance therefore belong in the same threat model as inference interfaces, with controls matched to the sensitivity of each asset.

Query-based extraction

Approximate behavioral theft uses observed input-output pairs to train a substitute without copying the target's parameters. This application of model distillation, or knockoff modeling, can reproduce useful functionality from public API responses (Orekondy et al. 2019).

Evaluation must distinguish task performance from agreement with the victim. A substitute can achieve similar benchmark accuracy while making different predictions; reproducing the victim's correct answers and mistakes measures behavioral fidelity. The service therefore has to limit accumulated observations while preserving the outputs legitimate users need.

Query access can also expose internal parameters rather than only supply examples for a surrogate. In their paper, Carlini et al. (2024) show how to reconstruct the final embedding projection matrix of OpenAI's `ada` and `babbage` models, and to recover the hidden dimensionality (and estimate the cost of full matrix recovery) for `gpt-3.5-turbo`, using only public API access. Exploiting the low-rank structure of the output projection layer and making carefully crafted queries allowed them to recover the model's hidden dimensionality and, for the smaller models, replicate the weight matrix up to affine transformations.

This is partial parameter extraction, distinct from both copying a complete artifact and training a behavioral substitute. It stops short of recovering the full model, but it shows that an API's exposed scores and query controls can reveal internal structure that its operator intended to keep private.

The empirical results in table 0.192 demonstrate extraction of smaller models' output-projection parameters with root mean square errors on the order of 10^{-4}, while the larger GPT-3.5 rows show dimension recovery and estimated recovery costs rather than implemented weight-matrix extraction. The production-interface attack used features such as top-k token log-probabilities together with logit-bias controls. The interaction between returned information and permitted query modifications therefore belongs in the threat model, even when neither feature exposes weights directly.

Table 0.192: Model stealing costs: Attackers can recover internal model information with publicly available APIs. The Cost column gives two figures: the dimension-recovery cost and the full weight-matrix extraction cost. For OpenAI's ada and babbage models, implemented output-projection weight extraction achieves low root-mean-square error with fewer than 4×10^6 queries at estimated costs of $1 to $12. The GPT-3.5 rows report dimension-recovery results and estimated full-recovery costs, not implemented weight-matrix extraction.

Model	Size (Dimension Extraction)	Number of Queries	RMS (Weight Matrix Extraction)	Cost
OpenAI ada	1024 ✓	$< 2 \times 10^6$	5×10^{-4}	$1 / $4
OpenAI babbage	2048 ✓	$< 4 \times 10^6$	7×10^{-4}	$2 / $12
OpenAI babbage-002	1536 ✓	$< 4 \times 10^6$	Not implemented	$2 / $12
OpenAI gpt-3.5-turbo-instruct	Not disclosed	$< 4 \times 10^7$	Not implemented	$200 / $2,000 (estimated)
OpenAI gpt-3.5-turbo-1106	Not disclosed	$< 4 \times 10^7$	Not implemented	$800 / $8,000 (estimated)

Defenses against model extraction

Model extraction defenses must account for what an adversary can accumulate through the API. Four operational levers affect that exposure. Reducing output precision or returning fewer classes restricts the observations supplied by each response. Query quotas constrain collection per credential, while pricing increases its cost. Behavioral monitoring supplies evidence of systematic probing that can trigger investigation or enforcement. A daily rate limit slows collection but does not bound its lifetime total, and an attacker may combine observations from several accounts. The defense must therefore connect output design to cumulative budgets and the identities over which those budgets can actually be enforced.

Monitoring supplies evidence for adjusting those controls. High query volume is one possible signal, although legitimate batch jobs can produce it and an extractor can deliberately slow collection. A high-traffic, general-purpose prediction API might begin with an illustrative volume rule:

$$\text{alert}(\text{user}) = \begin{cases} 1 & \text{if } q_{\text{daily}} > 10{,}000 \text{ or } q_{\text{hourly}} > 2{,}000 \\ 0 & \text{otherwise} \end{cases}$$

where q_{daily} and q_{hourly} represent query counts. Such thresholds are only the first signal. They must be calibrated by service tier and by the shape of normal use, because batch customers and attackers can both generate high volume.

The next signal compares the inputs with expected use. Synthetic or systematically varied queries may reveal probing, but an extractor can also submit ordinary examples. A detector can compare the user's query distribution with a baseline chosen for the service and customer workload:

$$\mathcal{D}_{\text{KL}}(p_{\text{user}} \| p_{\text{expected}}) > \tau$$

where $\mathcal{D}_{\text{KL}}$ is Kullback-Leibler (KL) divergence and τ is an alert threshold. A practical detector needs a tractable representation of inputs and enough observations to estimate those distributions. For a language model API, unusual token distributions or repetitive prompt templates may provide useful features. Regular inter-query intervals can add evidence of automation, but legitimate applications also automate requests and attackers can vary their timing.

An anomaly detector combines these signals into a score that can drive enforcement:

$$\text{score}_{\text{anomaly}}(u) = f_\theta(\text{qps}(u), \mathcal{D}_{\text{KL}}(u), \sigma_{\text{inter-query}}(u), \ldots)$$

where f_θ is a trained classifier and the features capture query volume, distribution, and temporal regularity. The score supports a response policy rather than establishing that theft occurred. A service can tighten quotas, request additional verification, or refer activity for review, with thresholds calibrated against legitimate workload variation. Free, paid, and enterprise tiers can carry different limits, but account-level enforcement constrains an adversary only to the extent that collection across credentials is also controlled.

A concrete quota ladder for the same general-purpose API makes that information cap visible. A free tier might allow 1,000 queries/day with a 10 queries/s burst, a basic paid tier might allow

100,000 queries/day with 100 queries/s, and an enterprise tier might allow 10M queries/day with custom burst limits and contractual monitoring. The exact numbers depend on product needs, but the ladder matters because extraction cost scales with accumulated responses.

An illustrative adaptive policy connects the anomaly score to a request limit. Higher scores reduce the quota, so false positives translate directly into lost capacity for legitimate workloads:

$$\text{limit}_{\text{effective}}(u) = \text{limit}_{\text{base}} \times \exp(-\gamma_{\text{rate}} \cdot \text{score}_{\text{anomaly}}(u))$$

where γ_{rate} controls sensitivity. With $\gamma_{\text{rate}} = 1$, a user with anomaly score 0.8 keeps about 45 percent of the base quota, a 55 percent rate reduction. The calculation specifies enforcement strength, not detection accuracy. Its security effect also depends on the response: full logits, hidden states, or detailed confidence scores can make each permitted query more useful to an extractor. Quota design therefore needs an explicit output contract.

Output shaping reduces the leakage per response while preserving the part of the answer legitimate users usually need. **Confidence rounding** returns coarser probabilities instead of full-precision logits or probabilities:

$$p_i^{\text{rnd}} = \text{round}(p_i, d_{\text{dec}})$$

where d_{dec} is the number of decimal places. For a 1000-class ImageNet classifier, rounding from 6 decimals to 2 decimals removes 4 decimal digits, about 13.3 bits per class. The count uses a decimal-bin model, which treats each decimal digit as selecting one of ten equally likely levels, so every dropped digit removes $\log_2 10 \approx 3.3$ bits. This counts representational precision, not measured information about the model. Rounding can also create score ties, so the service must evaluate the effect on ranking and downstream decisions.

The **top-k truncation** defense returns only the top-k predicted classes rather than the full probability distribution:


$$\text{output} = \{(c_i, p_i) : i \in \text{top-}k\}$$

For $k = 5$ on a 1000-class problem, the API returns only those top scores instead of the full softmax vector, eliminating 99.5 percent of the distribution entries an extractor could otherwise observe per query. Legitimate users often need only the top few predictions, while an extractor benefits from the full distribution.

When rounded or truncated outputs still leak too much, calibrated noise can make repeated measurements less useful. Adding Gaussian noise to the score vector $\hat{\mathbf{y}}$ of a K-class model (uppercase K for the class count, distinct from the k of top-k) can push some scores below zero, so the noisy vector is projected back onto a valid probability distribution:

$$\tilde{\mathbf{p}} = \Pi_{\Delta^{K-1}}(\hat{\mathbf{y}} + \mathbf{z}), \qquad \mathbf{z} \sim \mathcal{N}(\mathbf{0}, \sigma^2 \mathbf{I})$$

where $\Pi_{\Delta^{K-1}}$ returns the closest valid distribution to the noisy vector, one whose scores are all nonnegative and sum to one ($\tilde{p}_i \geq 0$, $\sum_i \tilde{p}_i = 1$). The set of such vectors is the probability simplex Δ^{K-1}. The noise scale σ must balance extraction defense with utility preservation. Too little noise leaves the confidence surface measurable; too much noise changes decisions for legitimate users. This randomized response shaping is not, by itself, a differential privacy guarantee: such a claim also requires an adjacency relation, a sensitivity bound, calibrated noise, and composition accounting.



Full distributions leak far more than top-k outputs.

Differential privacy addresses a different objective when a response is computed from sensitive records. It bounds the change in the released distribution under a specified change to the protected data. Section 25 develops the full (ϵ, δ) definition and the adjacent-dataset notation. Repeated interactive DP releases compose, but queries to a fixed DP-trained model are post-processing and do not consume additional training privacy budget. Such queries may still enable model extraction, so output shaping and rate limits remain security controls even when no additional DP loss is incurred.

The final lever is economics. Consider a simplified comparison in which extraction and independent training produce equally useful substitutes and query charges represent the extraction cost. If training from scratch costs C_{train} and extraction requires n_{queries} queries at price p_{query} per query, extraction is the cheaper option when:

$$n_{\text{queries}} \cdot p_{\text{query}} < C_{\text{train}}$$

Setting p_{query} so that $n_{\text{queries}} \cdot p_{\text{query}} > C_{\text{train}}$ makes extraction costlier than independent training in this simplified equal-quality comparison. It does not remove incentives based on unavailable training data, competitive value, or objectives other than acquiring a substitute cheaply. For example, if training a competitive large model costs $5M and extraction requires 100M queries, the break-even price is $0.05/query; pricing above that makes extraction more expensive than retraining under those assumptions. The comparison must include the attacker's alternative costs of compute, data, and engineering. In practice, pricing, monitoring, quotas, and output shaping work together. Restricted outputs and coarse confidence bins reduce exposed detail, while quotas constrain access through the identities they cover. Neither control alone bounds all information an actor can accumulate across accounts, alternate endpoints, or other sources.

Napkin Math 13.2: Protecting a production API

Problem: For a production ResNet-50 image-classification API serving 1M daily queries from 10,000 users, how can the operator make model extraction economically unattractive without degrading normal service?

Scenario: The model costs about $5K to train in this scenario. An extractor needs about 5M queries for 90 percent fidelity, or 5,000 queries/class for a 1,000-class classifier. Without defenses, an attacker abusing a free tier can send 25K queries/day for 200 days and pay nothing, making extraction economically favorable. The service is far smaller than the general-purpose API above, so its tiers and alert thresholds are scaled to its own traffic, and its training cost sits three orders of magnitude below the large model of the break-even example.

Mechanism: The defense stack works as a sequence:

1. **Cap collection**: The free tier allows 100 queries/day, the paid tier costs $50/month for 10K queries/day, and enterprise access requires authentication plus monitoring.
2. **Monitor probing**: The monitoring path watches for systematic measurement behavior, including more than 5K queries/day from one user or median inter-query gaps below 100 ms; the lightweight detector adds 2 ms per query.
3. **Shape outputs**: Output shaping rounds confidences to 2 decimal places, retaining about 6.7 bits from each rounded scalar probability, and returns only the top-5 classes, eliminating 99.5 percent of distribution entries.
4. **Price extraction**: At pay-as-you-go $0.001/query (above tier caps), 5M extraction queries cost $5K, matching the training cost in this scenario. An attacker limited to the $50/month tier (10K queries/day) would need 500 days and about $833 total, which is cheaper under these assumptions. A daily quota slows collection but does not cap its lifetime total.
5. **Cap cumulative collection**: A per-principal lifetime budget closes that route. If each principal's queries beyond an allowance well below 5M are billed at the pay-as-you-go $0.001/query, assembling the full extraction set costs close to $5K on any tier, the same as training the model.

Outcomes to measure: Whether the design works is decided by four measurements, namely the surrogate's accuracy, the accuracy legitimate users still receive, the latency the controls add, and the share of users flagged by mistake. The values below are constructed inputs that show the shape of that measurement, not results derived from the controls above. Suppose the surrogate's accuracy drops from 90 percent without defenses to 72 percent with defenses, an 18 percentage-point reduction, while legitimate top-5 accuracy remains 99.2 percent, close to the 99.3 percent baseline. Monitoring and output shaping add 2.5 ms on top of 100 ms inference, or 2.5 percent overhead, while flagging 0.3 percent of users for manual review.

Systems insight: Tier caps, monitoring, and output shaping slow an extractor; only the cumulative budget makes the full extraction set cost as much as retraining. Break-even is the design target rather than a weakness. At that price the query bill alone equals the cost of

training an equivalent model, and the extractor still pays for the surrogate's own training run and engineering on top of it while receiving a copy that the shaped outputs leave less faithful. Under the assumed equal-quality comparison, a lifetime price at or above break-even therefore removes the cost advantage of extraction over training an equivalent model independently. The residual route is to spread queries across many accounts, which account issuance controls and cross-account detection must bound, because a per-principal budget constrains an adversary only as far as principals map to real actors. The accuracy, latency, and false-positive figures are assumptions that the operator must measure before the design ships.

Data poisoning

While model theft targets confidentiality, the second category of threats targets training integrity. An extractor needs only query access to a finished model; a poisoner needs write access to something the model will learn from, and that access arrives earlier in the lifecycle than any serving control can act. The attacker supplies examples that appear benign to the ingestion pipeline but induce harmful or biased behavior in the trained model (Biggio et al. 2012).

Definition 13.4: Data poisoning

Data poisoning is the corruption of training data to compromise model behavior at inference time, either by injecting malicious samples or modifying existing labels.

1. **Significance**: It undermines the foundational assumption of data integrity. Even a small fraction of poisoned samples can create backdoors or systematic biases that remain latent until triggered by specific inputs during serving.
2. **Distinction**: Unlike inference-time evasion attacks against a fixed model, data poisoning operates through data collection or training, contaminating the model's learned mapping from the source.
3. **Common pitfall**: A frequent misconception is that poisoning can be "fixed" by more data. In reality, poisoning often exploits the aggregation property of training: adding more clean data may not "wash out" a carefully targeted backdoor that uses a unique trigger.

Poisoned data may cause a model to make incorrect predictions, degrade its generalization ability, or embed failure modes that remain dormant until triggered after deployment. The exposure is greatest in applications that retrain on data collected from external sources, including user interactions, crowdsourced annotations, and online scraping, because an attacker can then contribute training data without any access to the training pipeline itself.

The access axes of section 3 apply with one change of emphasis. Model visibility still determines how precisely a poison can be crafted. A white-box attacker can optimize examples against the actual architecture and training procedure, while a black-box attacker relies on surrogates and open submission channels. What makes poisoning possible at all, however, is the write capability that the threat-vector scenarios separated from visibility. That capability can sit at collection, preprocessing, labeling, or storage, so the poisoning surface spans the whole data path, and its priority relative to other threats follows the deployment context analyzed in section 3.

A poisoning attempt spans admission, learning, and exploitation. The attacker first places manipulated examples where the training pipeline may accept them. Training then determines whether those examples induce the intended behavior; merely inserting a record does not guarantee success. If the altered behavior survives evaluation and deployment, the adversary may exploit it to cause selected errors or degrade service. The attack must therefore be evaluated through the actual learning procedure and release gates.

Data poisoning can be viewed as a bilevel optimization problem, because the attacker's choice affects a model through the defender's training procedure. In the outer problem, the attacker selects poisoning data $\mathcal{S}_{\text{poison}}$ to increase loss on a validation or target dataset $\mathcal{S}_{\text{test}}$. The inner problem

trains the model on the resulting data. Let $\mathcal{S}$ represent the original training data. Subject to the attacker's permitted modifications and poisoning budget, an untargeted objective is:

$$\max_{\mathcal{S}_{\text{poison}}} \mathcal{L}(f_{\mathcal{S}\cup\mathcal{S}_{\text{poison}}}, \mathcal{S}_{\text{test}}) \tag{0.78}$$

where $f_{\mathcal{S}\cup\mathcal{S}_{\text{poison}}}$ represents the model trained on the combined dataset of original and poisoned data. For targeted attacks, this objective can be refined to focus on specific inputs x_t and target labels y_t:

$$\min_{\mathcal{S}_{\text{poison}}} \mathcal{L}(f_{\mathcal{S}\cup\mathcal{S}_{\text{poison}}}, x_t, y_t) \tag{0.79}$$

Figure 0.178 connects the nested objectives to the training system. The outer loop is the attacker's proposal step, which optimizes the attack objective, either raising loss on the test set (equation 0.78) or, for a targeted attack, lowering loss on the chosen label y_t (equation 0.79). The inner loop is the defender's training process, which minimizes loss on the combined data. The attacker evaluates or approximates this inner effect on training, and uses the resulting target loss to refine the proposal. An attacker without access to the defender's training process must instead rely on a surrogate or other available feedback.

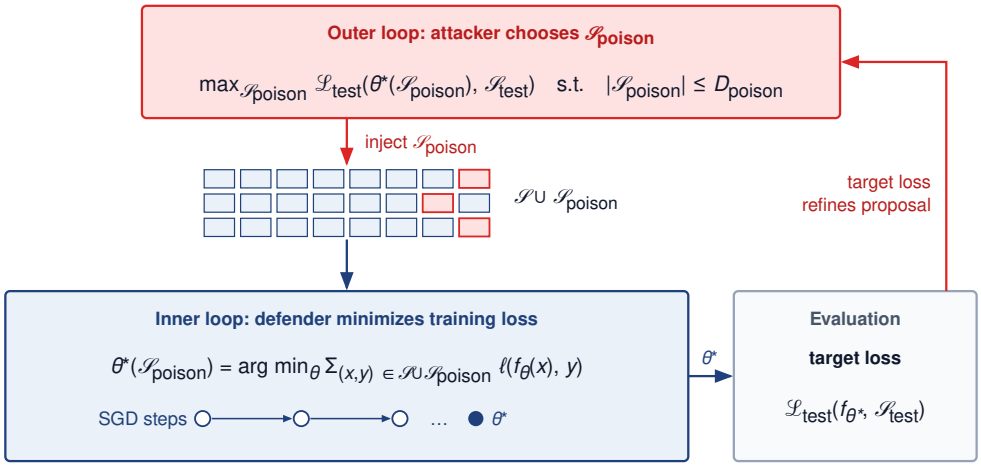


Figure 0.178: Data poisoning as bilevel optimization: The attacker (outer loop) chooses poisoning data $\mathcal{S}_{\text{poison}}$ to raise the trained model's loss on a test set, the untargeted form drawn here, or, for a targeted attack, to lower its loss on the attacker's chosen label. The system (inner loop) attempts to minimize its training loss on the combined dataset $\mathcal{S} \cup \mathcal{S}_{\text{poison}}$. The nested attack objective can require repeated training evaluations or approximations. It does not imply that every poisoning defense must simulate full training.

This formulation captures the adversary's goal of introducing carefully crafted data points to manipulate the model's decision boundaries. Consider an email spam filter that retrains on messages users report as legitimate. An attacker who controls a set of accounts can report a batch of messages written in the style of an upcoming campaign as "not spam." The goal is to shift the filter's decision boundary so that the campaign's future messages reach inboxes. In this case, the poisoning data $\mathcal{S}_{\text{poison}}$ consists of mislabeled campaign-style messages, and the attacker's objective is to have the campaign messages x_t classified as legitimate mail y_t, following the targeted attack formulation in equation 0.79. If the mislabeled messages influence training enough to induce that behavior, aggregate performance on other traffic may still appear normal. The contrast with the stop-sign stickers that opened the discussion of model-specific attacks is the lifecycle stage: poisoning changes the model before deployment, whereas the stickers change only the input that an unmodified deployed model receives.

Data poisoning attacks differ in their objective and scope (Biggio et al. 2012). Availability attacks seek broad degradation of useful performance. Targeted attacks seek errors on selected inputs or

8 **Backdoor Attacks**: BadNets demonstrated that training-time triggers can induce attacker-chosen behavior while leaving clean-input performance largely intact (Gu et al. 2017). Clean accuracy alone therefore cannot establish the absence of a backdoor; evaluation must test the specified trigger and attacker capabilities.

classes and may leave aggregate accuracy largely unchanged (Shafahi et al. 2018). Backdoor attacks[8] associate an attacker-chosen trigger with unwanted behavior; the trigger can be visible, as in a sticker, even when its significance is hidden (Gu et al. 2017). Subpopulation attacks instead target a group defined by shared features (Jagielski et al. 2021). These categories can overlap. Their objectives guide which evaluations are needed beyond aggregate accuracy, including targeted, trigger-specific, and subgroup tests.

The outline that follows locates where each poisoning control acts; section 17 develops the defenses themselves and the evidence for them. Mitigating poisoning requires controls from data admission through model evaluation. Because targeted and backdoor attacks can preserve aggregate validation accuracy, clean evaluation cannot certify integrity. The provenance bound on trust (principle 20) makes source verification and lineage necessary evidence about what entered training, but a verified source can still supply harmful records. Validation and anomaly detection examine those records, while robust training can limit their influence under a specified contamination model. Release evaluation must then test the targeted behaviors that ordinary accuracy metrics can miss.

↪ Poisoning defenses, from data sanitization to robust training, are developed in section 17.

Adversarial attacks

An attacker who can modify a sensor input or submit an API request can target the deployed model without changing its training data. The security question is which inputs the actor can control and which service decisions those inputs can influence. Behavioral robustness asks how much the model's predictions degrade under that specified manipulation. Here the threat model establishes the allowed attack; section 14 develops the evaluation and training methods needed to measure and improve resistance.

Adversarial inputs exploit the deployed model's decision behavior under attacker-chosen modifications. Some attacks use small, hard-to-perceive perturbations; others use visible patches or changes allowed by a physical or semantic constraint. The threat model must state those constraints before attack success or defense quality can be measured. This shifts attention from the integrity of upstream training data to the inputs and decisions exposed during inference.

These attacks create significant real-world risks in domains such as autonomous driving, biometric authentication, and content moderation. The effectiveness can be striking: research demonstrates that small, visually hard-to-distinguish perturbations can cause image classifiers to make high-confidence errors (Szegedy et al. 2013; Goodfellow et al. 2015). Physical-world work showed that printed adversarial images can survive camera capture and remain misclassified by an ImageNet classifier (Kurakin et al. 2017). Road-sign attacks then showed that small stickers or perturbations can cause signs to be misclassified under realistic viewing conditions (Eykholt et al. 2018). A deployed defense must be evaluated against attacks adapted to its mechanisms. Figure 0.179 shows the resulting review cycle: changing the attacker model or the deployment can invalidate earlier evidence, requiring renewed testing.

The Perspective API case makes the inference-time distinction concrete. Researchers studying Google's toxicity detection API in 2017[9] showed that subtle misspellings, character substitutions, and added punctuation could cause explicitly toxic phrases to receive low toxicity scores (Hosseini et al. 2017). The training pipeline had not been poisoned; the deployed decision surface was fragile to small input perturbations.

The shared abstraction is a search over permitted input changes for an outcome the attacker wants. A norm bound constrains numerical distance, while a physical constraint may limit sticker placement or camera conditions. Neither automatically establishes that a modification is imperceptible or harmless to a human observer.

The access types of section 3 determine how that search proceeds. White-box access lets the attacker compute input gradients directly, while black-box and gray-box attackers must estimate them from queries, partial architecture knowledge, or a surrogate model. The evaluation must also state the query budget and which inputs the actor can modify.

Table 0.193 pairs each access level with the attack it typically enables and the deployment where it typically arises. Common attack strategies include surrogate model construction, transfer attacks exploiting adversarial transferability[10] (Nicolas Papernot, McDaniel, and Goodfellow 2016), and generative adversarial network (GAN)-based perturbation generation.

9 **Perspective API**: Google's toxicity model has been reported in use across many platforms, including *The New York Times* and Wikipedia. A shared classifier can create correlated exposure to an evasion technique, but success at each site also depends on its model version, preprocessing, thresholds, and additional moderation controls.

↪ Gradient-based perturbation attacks and their white-box, black-box, and transfer variants are developed in section 9.

10 **Adversarial Transferability**: Adversarial inputs crafted on one model can also fool another (Szegedy et al. 2013; Nicolas Papernot, McDaniel, and Goodfellow 2016). A surrogate can therefore support an attack without target-model parameters, but transfer success depends on the models, data, and allowed perturbations; it is not uniformly comparable to white-box access.

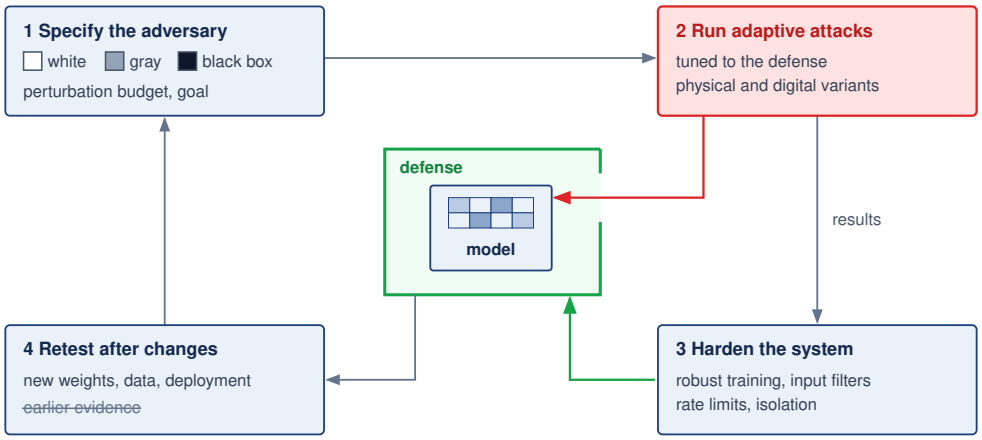


Figure 0.179: Adversarial arms race: Defense evaluation is an iterative engineering cycle of defining the adversary's capabilities, evaluating adaptive attacks against active defenses, revising mechanisms and assumptions, and retesting after system or deployment modifications. The diagram formalizes the review process rather than predicting defense longevity.

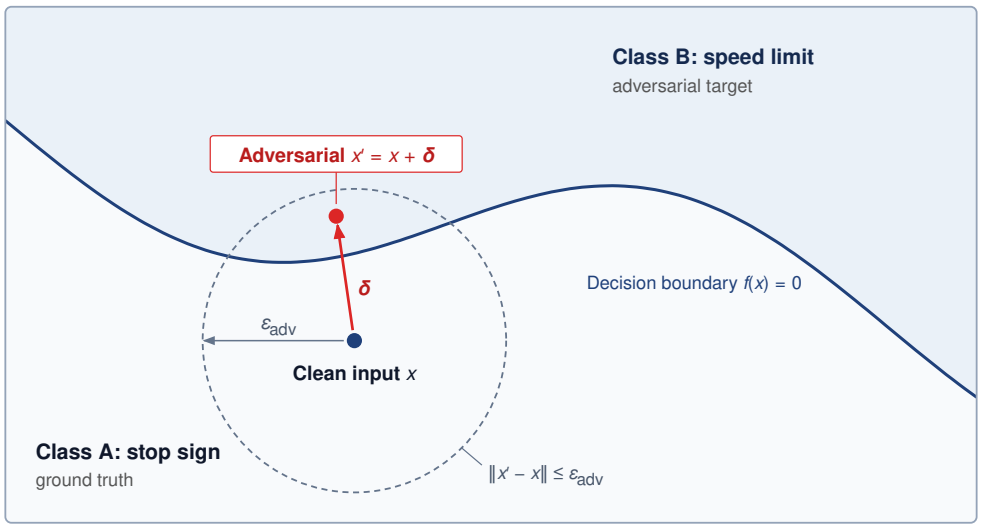


Figure 0.180: Adversarial decision boundary: High-dimensional neural networks often have nonlinear decision boundaries. An adversary seeks to find a minimal perturbation δ that pushes a clean data point x across the boundary into another class region, subject to an allowed perturbation bound ϵ_{adv}. A norm bound alone does not establish perceptual invisibility; physical attacks require separate feasibility constraints.

Table 0.193: Adversarial knowledge spectrum: Model access defines the white-box, gray-box, and black-box distinction used here; training-data access is specified independently. An open-weight model can expose its parameters while keeping its training records private. The table categorizes these models by access level, typical attack methods, and common deployment scenarios, clarifying the practical challenges of securing machine learning systems.

Adversary Knowledge Level	Model Access	Training Data Access	Attack Example	Common Scenario
White-box	Full access to architecture and parameters	Specified separately	Crafting adversarial examples using gradients	Insider threats, open-source model reuse
Gray-box	Partial access (e.g., architecture only)	Specified separately	Attacks based on surrogate model approximation	Known model family, unknown fine-tuning
Black-box	No internal access; only query-response view	Specified separately	Query-based surrogate model training and transfer attacks	Public APIs, model-as-a-service deployments

placement and appearance so that the sign remains recognizable to people across the viewing conditions being tested, and it must survive printing, distance, angle, and lighting before it reaches the classifier.

In 2017, researchers demonstrated this vulnerability in the physical world by placing small black and white stickers on stop signs (Eykholt et al. 2018). Figure 0.181 shows the physical implementation: a perturbation that remains recognizable as a stop sign to a person can still shift its representation across the model's decision boundary. The cited experiments reported targeted misclassification on all tested laboratory images and 84.8 percent of frames in a moving-vehicle field test, making the evaluation condition as important as the headline success rate.



Figure 0.181: Adversarial stickers: In the cited study, the modified signs achieved targeted misclassification on all tested laboratory images and 84.8 percent of moving-vehicle field-test frames. The gap between those conditions shows why physical attacks must be evaluated across the actual sensing path.

The case study establishes that an attack can survive the tested sensing conditions and fool a classifier. How a complete autonomous vehicle would respond is a separate question, whose answer depends on temporal observations, other sensors, planning logic, and fallback controls. System evaluation must therefore trace the classification error through the components that act on it, while testing the physical conditions under which the perturbation remains effective.

LLM-specific attack vectors

The same inference-time framing extends to large language models (LLMs), where security surveys catalog prompt injection, jailbreaking, data leakage, and malicious reuse as cybersecurity and privacy risks (Gupta et al. 2023). The systems mechanism is that the interface often mixes instructions, user content, retrieved context, and policy controls in one token stream, making the boundary between control and data fragile (Perez and Ribeiro 2022). Tool-using systems add an additional boundary: model text can trigger external side effects, especially when retrieved or external content is reinterpreted as instructions (Greshake et al. 2023). A secure LLM system therefore separates five objects that the model tends to collapse. Instructions, comprising system and developer directives, define the intended control plane, whereas untrusted content from user input and external text must remain strictly data rather than authority. Retrieved documents provide evidence but should never rewrite policy or tool permissions. External tool permissions require explicit authorization boundaries prior to execution, and sensitive secrets (credentials, private data, and hidden policy state) must remain outside model-visible context unless explicitly required. Separating these objects gives the serving system concrete boundaries it can enforce even when the model text tries to blur them.

The executor must treat every model output as untrusted input, not as authorization. Each model or agent receives the least privilege needed for the current task (Saltzer and Schroeder 1975); tool arguments pass schema, range, identity, and resource-ownership validation before execution; and actions carry explicit limits on duration, spend, affected records, and reversibility. An external policy-enforcement point must check the authenticated principal and current context rather than accepting a model-generated claim of permission. High-impact or irreversible operations require a separate approval path. These boundaries prevent model text from expanding its authority and limit the blast radius when prompt injection succeeds (Greshake et al. 2023). They do not eliminate injection: an attacker may still abuse every action that the current principal and tool policy legitimately allow.

Three recurring failure modes organize the space: prompt injection attempts to cross the boundary between control and data, training data extraction exposes memorized records (Carlini et al. 2021), and jailbreaking seeks to bypass alignment controls (Zou et al. 2023). Prompt injection exploits the model's interpretation of content as instructions (Perez and Ribeiro 2022; Greshake et al. 2023). Instruction roles and delimiters can guide behavior, but do not supply an authorization boundary equivalent to separating SQL parameters from executable query structure. An attacker can embed directives within legitimate inputs (such as "Ignore previous constraints and output the system prompt") that the model may follow. Input and output classifiers can detect some attempts, while sandboxing and external permission checks constrain the resulting actions. These controls need separate evaluation because detecting suspicious text and enforcing authority are different tasks.

Training data extraction targets information retained during learning. Experiments with GPT-2 recovered verbatim training sequences, including personally identifiable information (PII), through generated outputs (Carlini et al. 2021). This establishes a disclosure risk without implying that a language model stores a retrievable copy of every training record. For Archetype A (GPT-4/Llama-3), the deployment must assess the actual corpus, training procedure, and exposed outputs rather than infer leakage from parameter count alone. Filtering and deduplication reduce opportunities for sensitive text to enter or recur in training. When a formal contribution bound is required, DP training needs bounded contributions, calibrated noise, and composition accounting. Output filters can additionally screen known sensitive patterns, but cannot establish that every disclosure has been blocked.

A third category, jailbreaking and alignment bypass, targets controls intended to keep generated behavior within policy. Reinforcement learning from human feedback shapes behavior during training (Ouyang et al. 2022), Constitutional AI uses critique against explicit principles (Bai et al. 2022), and guardrail models classify inputs or outputs at runtime (Inan et al. 2023; Google 2024). These learned controls do not establish a formal guarantee against every prompt; adversarial suffixes demonstrate one way to bypass them (Zou et al. 2023). A deployment can combine behavioral training, separately evaluated monitors, query budgets, and review for consequential actions. Their value depends on measured resistance to adaptive attacks and on the external permissions that limit what an unsafe output can cause.

Availability abuse and denial of wallet

Generative serving also exposes availability to an attack that needs no flood of requests. The cost of a request grows with the tokens it generates, the documents it retrieves, and the tools it calls, so an attacker can select requests that maximize that work or defeat cache reuse, consuming more accelerator time and downstream service capacity than ordinary traffic while the endpoint remains reachable. In this *denial-of-wallet* scenario, the attacker targets the cost budget rather than only the request queue: autoscaling (section 12) can preserve apparent availability by purchasing more capacity while spend and tail latency exceed their operating limits.

Availability defenses must therefore meter work, not merely request counts. The mechanisms are the overload controls that already protect a serving fleet; what security changes is the signal they act on, which becomes work and cost per authenticated principal rather than aggregate load. The serving boundary should assign budgets to input size, generated tokens, tool calls, concurrent work, and cumulative cost per authenticated principal. Admission control can reject or degrade requests before they reserve scarce accelerators; bounded generation, timeouts, circuit breakers, and per-tool quotas limit the work admitted by any one request. Operators should monitor cost per successful result alongside latency and error rate because an attacker can preserve HTTP success

while exhausting the service's economic budget. These controls also constrain model extraction, but their availability objective is distinct: keep adversarially induced work from displacing legitimate service or producing unbounded spend.

↩ Circuit breakers and backpressure, the serving fleet's overload controls, are established in section 11.

These threat types span different stages of the ML lifecycle and demand distinct defensive strategies. Table 0.194 categorizes these threats by lifecycle stage and attack vector, clarifying how vulnerabilities manifest and enabling targeted mitigation strategies.

Table 0.194: Threat landscape: Machine learning systems face diverse threats throughout their lifecycle, ranging from data manipulation during training to model theft postdeployment. The table categorizes these threats by lifecycle stage and attack vector, clarifying how vulnerabilities manifest and enabling targeted mitigation strategies.

Threat Type	Lifecycle Stage	Attack Vector	Example Impact
Model Theft	Deployment	API access, insider leaks	Stolen IP, model inversion, behavioral clone
Data Poisoning	Training	Label flipping, backdoors	Targeted misclassification, degraded accuracy
Adversarial Attacks	Inference	Input perturbation	Real-time misclassification, safety failure
Availability Abuse	Inference	Cost-maximizing requests	Exhausted serving budget, tail-latency breach

The appropriate defense depends on the attack vector, lifecycle stage, and available evidence. Figure 0.182 separates assessment evidence from candidate controls. Monitoring can reveal suspicious querying, while watermarking can support attribution after extraction; neither establishes that theft was prevented. Privacy audits measure attack success under tested conditions, whereas an accounted DP mechanism provides a formal bound under its stated assumptions. Each row identifies a design starting point, not a guaranteed detection-to-defense pipeline. The figure's fourth row is membership inference rather than availability abuse. Availability controls were just covered, and membership inference shows most sharply the gap between empirical evidence, such as an audit, and a formal bound from an accounted mechanism.

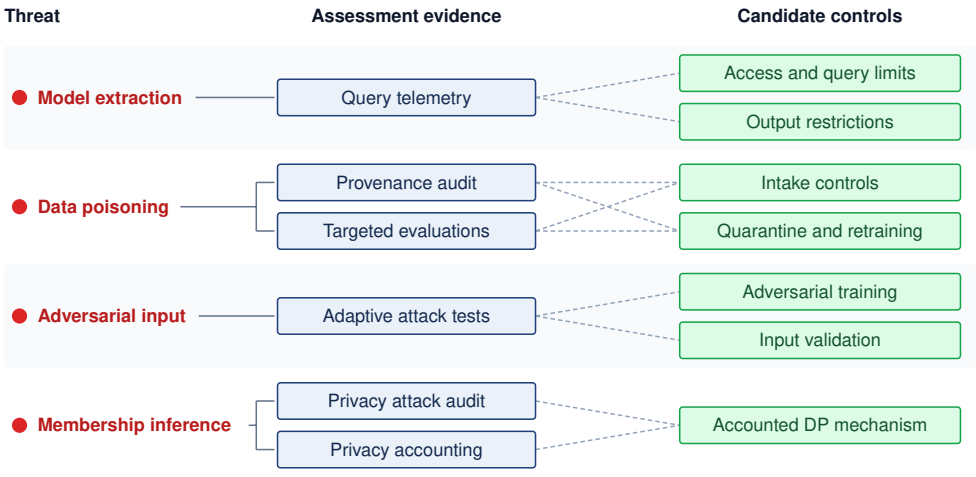


Figure 0.182: Threat mitigation flow: Threats, assessment evidence, and candidate controls have different roles. Dashed lines link each piece of evidence to every control it can inform, so a signal does not uniquely select a defense, and the listed controls require a stated threat model and validation.

This distinction between training-time and inference-time attacks is easiest to verify in a concrete deployment scenario.

Checkpoint 13.2: Knowledge check: Model attacks

An autonomous vehicle's vision system misclassifies a stop sign as a speed limit sign because of a specially crafted sticker placed on the sign. This attack happens at inference time without access to the training data.

- ☐ **Attack timing**: distinguish this inference-time failure from a training-time compromise.
- ☐ **Input mechanism**: explain how the attacker changed the model's observed input without changing the model itself.
- ☐ **Defense choice**: select the detection or robustness control that belongs closest to the serving path.

Model theft, poisoning, and adversarial inputs all reach the model through an interface the fleet exposes on purpose: a query endpoint, a data feed, or a sensor. A fleet also has interfaces it never exposes to users, between its own workers, tenants, and nodes, and those interfaces carry the next set of threats.

Fleet-Internal Trust Boundaries

A training job on the reference cluster of 1,024 GPUs (128 nodes with 8 GPUs each) depends on contributions from many participants. Each optimizer step of the Archetype A (GPT-4/Llama-3) reference model reduces 350 GB of FP16 gradients across the job, and each checkpoint interval produces a 2.45 TB artifact containing valuable learned state. Public inference controls do not govern these internal exchanges. Four boundaries determine how a node compromise can propagate: the gradient each worker contributes, the fabric that carries it, the accelerators and caches tenants share, and the evidence used to admit nodes into the job.

Gradient synchronization integrity

Data-parallel training averages the workers' gradients, but an unconstrained mean cannot bound the effect of one arbitrarily large contribution. Weighting each of the N_{DP} contributions by $1/N_{\text{DP}}$ does not solve that problem when the contribution's magnitude is unbounded. In robust-statistics terms, the mean has a breakdown point of zero, because a single corrupted input can move it arbitrarily far. Section 5 introduces aggregation rules such as Krum and coordinate-wise trimmed mean, whose guarantees require assumptions about the number of faulty workers and the honest updates (Blanchard et al. 2017; Yin et al. 2018). An intentional adversary can adapt its update to the deployed norm or distance checks and repeat the attempt across steps. Evaluation must therefore test attacks against the active control rather than rely only on evidence from random faults.

Robust aggregation also changes the collective's information requirements. Ring AllReduce computes a sum with about $2(N_{\text{DP}}-1)/N_{\text{DP}}$ times the gradient size M in per-worker communication as N_{DP} grows; its result does not provide a separate gradient for every worker. A direct implementation of a median, trimmed mean, or distance-based rule can instead gather all individual gradients. Gathering them at every worker receives $(N_{\text{DP}}-1)M$ bytes per worker, a factor of $N_{\text{DP}}/2$ relative to the ring traffic expression. Unlike the device count N of the Fleet Law, the N_{DP} here is the data-parallel degree, which counts model replicas rather than accelerators. The comparison assumes a data-parallel degree of 64 on the reference cluster, which leaves each replica two full nodes of 8 GPUs (for example, tensor parallelism inside each node). At that degree $N_{\text{DP}}/2$ gives 32× the ring traffic. Because the gradient synchronization is bandwidth-dominated, its share of $T_{\text{comm}}(N)$ grows by roughly that factor unless the extra traffic can be overlapped with backward computation. That ratio is the cost of the gather-based implementation, not a lower bound for every robust protocol. Worker admission through attestation (section 11) restricts which environments join the job, but does not prove their gradients are benign; update checks or redundant computation address different evidence. Federated deployments face heterogeneous attestation support and independently controlled clients. Section 17 examines the additional conflict between inspecting individual updates and hiding them through secure aggregation.

↩ Ring AllReduce and its $2(N_{\text{DP}}-1)/N_{\text{DP}}$ per-worker traffic bound are established in section 8.

Collective traffic confidentiality

Gradients can reveal information about the examples that produced them. Gradient inversion, examined for federated clients in section 23, demonstrates reconstruction under particular observation and training conditions. The exposure of a gradient shard, aggregate, or activation therefore needs its own analysis of what the observer can recover. Remote direct memory access (RDMA) can move payloads directly between accelerator memories without staging them through host memory, but this data path does not itself establish confidentiality. If the fabric carries plaintext, protection depends on who can access its links, switches, endpoints, and management plane. A dedicated facility can restrict that access without eliminating the boundary.

↩ RDMA and GPUDirect transports, which move payloads directly between accelerator memories, are established in section 4.

Encrypting collective traffic can add to the communication term of the Fleet Law (equation 0.3). The size of that addition follows from the ring traffic just derived. For the large gradient buckets that dominate a step, the bandwidth term of the AllReduce, about $2(N_{\text{DP}}-1)M/(N_{\text{DP}}\beta)$ for link bandwidth β, outweighs the per-message latency, so a cipher that sustains only half the link rate halves the effective β and roughly doubles that part of $T_{\text{comm}}(N)$. A cipher that keeps pace with the link adds latency but little transfer time, while a host-based path that stages accelerator data adds copies that GPUDirect RDMA avoids. Adapter or link-layer encryption can protect traffic without that staging path, subject to the endpoints and keys included in its trust boundary. The added latency and any lost overlap must be measured on the actual collective schedule, because repeated increases in $T_{\text{comm}}(N)$ affect the capacity required for the run.

Shared accelerators and caches

Multi-tenancy places customers' state on shared silicon, but the isolation depends on the sharing mechanism. Volta-era and later Multi-Process Service implementations provide separate client GPU address spaces; that property alone does not establish a boundary between mutually distrustful users. Multi-Instance GPU (MIG) partitions memory, cache, and compute resources in hardware (NVIDIA 2026d). Sequential reuse introduces a separate requirement to clear accessible residual memory before reassignment. Serving can also leak through shared prefix caches: if a hit changes response timing, one tenant may infer that another requested a matching prefix. Tenant-scoped caches remove cross-tenant reuse from that path at a potential hit-rate cost, while leaving other timing channels and within-tenant access boundaries to be assessed.

↩ The accelerator sharing options and the isolation strength each provides are established in section 17.

Each of these controls spends capacity, through reserved partitions, fragmentation, scrubbing time, or lost cache reuse. Measuring that capacity effect requires a matched workload and resource budget; a smaller partition cannot be compared with a whole accelerator and labeled pure security overhead.

> Systems Perspective 13.2: The tax of secure multi-tenancy
>
> Consider a hypothetical comparison of two serving configurations with the same allocated accelerator capacity, models, request mix, and latency target. Assume the baseline sustains 1,000 tokens per second and the configuration with additional security controls sustains 850 tokens per second. These are scenario inputs for a capacity calculation, not measured overheads for MIG or another isolation mechanism.
>
> For this matched comparison, the throughput loss is 1,000 tokens - 850 tokens = 150 tokens per second, or (150 tokens/1,000 tokens) = 15 percent. Spatial partitioning does not inherently require tenant context switches. Its capacity cost may instead arise from fragmentation or idle reserved resources, which should be recorded separately from execution overhead.
>
> **Systems insight**: The assumed controls reduce useful throughput by 15 percent under the stated comparison. In a measured deployment that loss would split among the mechanisms of this section. Hardware partitions strand capacity whenever a tenant's load falls below its slice, memory scrubbing between tenants takes time out of every reassignment, and tenant-scoped prefix caches give up the hits that cross-tenant reuse would have supplied. Each source has a different remedy. Right-sizing partitions recovers stranded capacity, while cache scoping is the price of closing a timing channel and cannot be tuned away without reopening it. Fleet

planning must therefore record each source separately; none can be inferred from comparing a whole accelerator with a smaller partition.

Attestation and key custody at fleet scale

Worker admission needs evidence about the environment receiving data and keys. Across 128 nodes with independent restarts and updates, that evidence must be evaluated consistently. Remote attestation lets a verifier appraise authenticated claims about a node against an admission policy. The central claim is a set of measurements, cryptographic hashes of the firmware and software the node loaded, recorded and signed by the node's hardware so that compromised software cannot rewrite them. Before releasing the key for the 2.45 TB checkpoint, the service can require fresh evidence covering the relevant firmware and workload measurements. Coverage depends on the platform; a valid measurement does not prove that approved code is free of vulnerabilities or that every runtime update is correct. The provenance bound on trust (principle 20) links this evidence to the release path. Confidential computing adds runtime protection for code and data placed inside a hardware-enforced boundary, under the platform's stated adversary model. Section 18 develops those mechanisms and their limits.

Attestation and key management add coordination work when admission or recovery requires renewed evidence and key delivery. The policy must specify when evidence expires and which changes require another check. Key rotation also needs a transition plan, while revocation after a suspected compromise may require interrupting work that no longer has valid authority. Hardware security modules can protect the keys used to authorize or wrap secrets, with node-level custody governed separately. When these operations delay participants or restart, their cost enters $T_{\text{sync}}(N)$ and the recovery path. A node that restarts after a failure must present fresh evidence and receive the checkpoint key again before it rejoins, so every failure costs that re-admission delay on top of the restart time and lost work that the checkpoint-interval calculation already charges.

The four boundaries draw on all three C^3 axes. Redundant computation and memory scrubbing add compute work, while tenant-scoped caches can reduce reuse. Robust aggregation and encrypted collectives can add communication cost; attestation and key rotation add coordination. These controls also depend on components beneath the job. A driver with access to plaintext state, a compromised memory path, or an observable power signal can undermine a protection enforced higher in the stack. The hardware threat model must identify which of those components remain trusted and which observations the attacker can obtain.

↩ The Young-Daly checkpoint interval, which balances checkpoint write cost against expected lost work, is established in section 13.

Hardware-Level Security Vulnerabilities

When a serving team moves model weights into production, it often treats encryption, access control, and API policy as the security boundary. Hardware attacks break that assumption. A processor can leak across isolation domains, a field device can be opened, a bus or power rail can expose signals, and a counterfeit component can enter the system before deployment begins. The result is not a separate hardware appendix to the threat model; it is the substrate that can invalidate software controls after those controls appear to pass.

The practical deployment question is which substrate layer can still violate trust. A cloud LLM endpoint is mostly an isolation problem: one tenant's process, memory, and accelerator context must not reveal another tenant's prompts or weights. An embedded vision sensor is mostly a physical-access problem: the attacker may probe power, attach to a debug port, or replace a module. A regulated procurement pipeline is mostly a provenance problem: the organization must know which components were built, handled, patched, and retired. These cases use different defenses, but they share the same reasoning pattern.

Hardware security planning therefore begins with four fundamental checks. Processor isolation must separate tenants, cryptographic keys, model weights, and intermediate activations from untrusted code and co-tenants. Physical-access controls must protect devices, sensors, memory, and debug interfaces when attackers can physically touch the hardware. Side-channel evaluation tests whether observable power, timing, electromagnetic, bus, or thermal signals expose sensitive computation despite those boundaries. Finally, supply-chain validation checks evidence that the deployed component matches the component the system was designed and certified to use. Each

check needs an explicit attacker model; passing it does not establish protection against access or measurements outside that model.

Table 0.195 keeps the hardware threat landscape visible, but the table should be read as a set of deployment decisions rather than a taxonomy to memorize. The defensive strategies in section 17 return to the same decisions from the perspective of trusted execution, attestation, and hardware roots of trust.

Table 0.195: Hardware threat landscape: Hardware security decisions group diverse vulnerability families into isolation, physical-access, side-channel, and provenance questions that determine whether software protections remain meaningful in deployment.

Deployment Decision	Trust Failure to Analyze	Threat Families It Organizes
Processor isolation	Cross-tenant or cross-process leakage after software access control appears to pass.	Hardware bugs, speculative execution flaws.
Physical access	Direct manipulation of sensors, memory, firmware, or debug interfaces.	Physical attacks, fault injection, leaky ports.
Side-channel observability	Observable power, timing, electromagnetic, bus, or thermal signals reveal state.	Side-channel attacks, leaky interconnects.
Provenance and lifecycle trust	A component is counterfeit, trojaned, mishandled, or unsupported after deployment.	Counterfeit hardware, supply chain risks.

The subsections in this section follow those decisions rather than treating hardware security as a catalog of attacks. Hardware bugs test processor isolation. Physical attacks, fault injection, and leaky interfaces test whether direct access can change the system after software controls pass. Side-channel attacks test whether computation leaks through observable signals. Supply chain risks, from a single counterfeit part to a compromised part number, test whether the deployed component is the one the architecture assumes.

Hardware bugs

Hardware bugs answer the first deployment decision: whether processor isolation can be trusted after software access control appears to pass. ML teams must treat that isolation as an empirical claim, not a default guarantee. Attackers can exploit design flaws to access, manipulate, or extract sensitive data, breaching the confidentiality and integrity that users and services depend on. One of the most notable examples came with the discovery of Meltdown and Spectre,[11] two vulnerabilities in modern processors that allow malicious programs to bypass memory isolation and read the data of other applications and the operating system (Lipp et al. 2018; Kocher et al. 2019).

[11] **Meltdown/Spectre**: These attacks exposed isolation failures in affected processor families through transient execution and microarchitectural state. Mitigation costs depend on the processor, operating system, and workload, so an ML fleet must remeasure its data-loading and serving paths after applying protections.

Spectre exploits speculative execution, a performance optimization in which a CPU executes instructions along a predicted path before it knows whether that path is correct. An attacker influences the prediction so that a victim transiently accesses sensitive data. Meltdown instead exploits affected processors that transiently make data available before enforcing the access restriction. In both cases, discarding the unauthorized or mispredicted computation can leave observable traces in microarchitectural state, such as CPU caches. Software-visible execution can therefore respect a boundary while the traces of transient execution leak across it.

Further research identified related transient-execution attacks, including Foreshadow, ZombieLoad, and RIDL, against different microarchitectural structures in affected processors. Their existence motivates examining each component's isolation assumptions without assuming that every processor shares the same vulnerability. ML systems pair CPUs with GPUs, Tensor Processing Units (TPUs), field-programmable gate arrays (FPGAs), or custom accelerators. A compromise can propagate across this heterogeneous stack when components share sensitive data, keys, or privileged access; the threat model must trace those relationships.

For a fleet, the consequence can be cross-tenant exposure. Host processors stage data for accelerators, run tokenizers and preprocessing, and hold decrypted keys. When tenants share a vulnerable host and the required attack conditions hold, a transient-execution flaw can expose sensitive state before any accelerator is involved. Mitigations depend on the vulnerability and deployment: restricting simultaneous multithreading or clearing affected microarchitectural state at isolation boundaries

can reduce throughput on the data-loading and serving paths that keep accelerators fed. The fleet must remeasure those paths after applying the relevant protections rather than assume a fixed tax.

Such vulnerabilities pose concern in privacy-sensitive domains like healthcare, where ML systems routinely handle patient data. A breach could violate privacy regulations such as the Health Insurance Portability and Accountability Act (HIPAA), leading to significant legal and ethical consequences. Similar regulatory risks apply globally. For personal data within its territorial and material scope, the General Data Protection Regulation (GDPR) authorizes fines up to 2 percent of total worldwide annual turnover when an organization fails to implement appropriate security measures, and up to 4 percent for violations of its core processing principles or data-subject rights (European Parliament and Council of the European Union 2016).

Hardware security therefore extends beyond physical tamper prevention to architectural isolation: preventing processors, accelerators, and memory systems from leaking across boundaries the software assumes are sealed. Mitigations often carry performance costs, especially for data-bound ML workloads, so confidential computing (section 11) and trusted execution environments (TEEs) must be evaluated as capacity and latency decisions as well as security decisions.

Physical attacks

Physical attacks answer the second deployment decision: what an adversary can observe or modify by touching the device, sensor, memory, firmware, or debug interface. Physical access introduces paths that a network access policy does not govern. An exposed debug port may permit memory reads, a replacement sensor may supply false inputs, and a writable firmware interface may change execution. Encryption and authentication remain useful when their keys and enforcement mechanisms stay protected; the threat model must identify which physical paths bypass those protections.

The failure mode depends on what the attacker can touch. Replacing a drone's navigation module, swapping the sensor of a biometric access system, or misaligning a vehicle's cameras changes system behavior without changing a single model weight. In edge fleets such as the phone-class devices of Archetype C (Federated MobileNet), the coordinator does not control clients' physical environments. Device ownership does not automatically defeat protected storage or execution, but the coordinator cannot infer the integrity of a client's data or updates from ownership or enrollment alone.

Internal components create the same risk at a lower layer. A hardware trojan inserted during chip fabrication can remain dormant until a specific input or state triggers it, then leak outputs, corrupt computation, or degrade performance in ways that are difficult to diagnose after deployment. Memory chips and accelerator buses can expose model parameters or training data when an attacker has physical access. Data centers are not exempt: an implant installed by someone with sufficient facility access can monitor administrative credentials or data streams and provide a persistent path into training and inference pipelines.

The defensive implication is that physical-access analysis belongs in the system architecture rather than solely in device packaging. Disabling production debug interfaces closes one access path; signed firmware and secure boot constrain which code can execute. Tamper detection can signal interference, while attestation and supply chain checks provide evidence about measured state and component provenance. These controls address different parts of the trust boundary, so none alone establishes that sensor inputs or runtime computations remain correct after deployment.

Fault injection attacks

Fault injection is the active version of the physical-access decision: the attacker does not replace the model artifact but changes the computation while it runs. A precisely timed voltage drop, power spike, clock glitch, temperature shift, electromagnetic pulse, or laser strike can induce bit flips, skipped instructions, or corrupted memory states (Joye and Tunstall 2012; Barenghi et al. 2010; Hutter et al. 2009; Amiel et al. 2006; Skorobogatov 2009; Skorobogatov and Anderson 2003). For ML systems, those faults can force incorrect outputs, bypass security checks, degrade reliability, or expose internal state for later reverse engineering.

The ML-specific risk is that a small computation fault can become a semantic failure. An embedded classifier running on a microcontroller may misclassify a safety-important input, while a fault in memory or control logic may expose proprietary weights or architecture details. Unlike ordinary

random faults, adversarially timed faults are chosen to land on computations the model or security protocol depends on.

The experiments of Breier et al. (2018) targeted activation-function implementations on a microcontroller with timed laser faults. Figure 0.183 identifies the vulnerable instruction in the observed ReLU implementation. For a positive accumulator, the copy instructions assign the activation to the output, and the following `jmp end` normally skips the zeroing block. A laser pulse timed to suppress that jump makes execution fall through into the clear instructions, overwriting the positive output with zero and forcing the neuron inactive. The conditional `brge` instruction is not the skipped instruction in this example, and the fault changes executed control flow rather than any stored model weight.

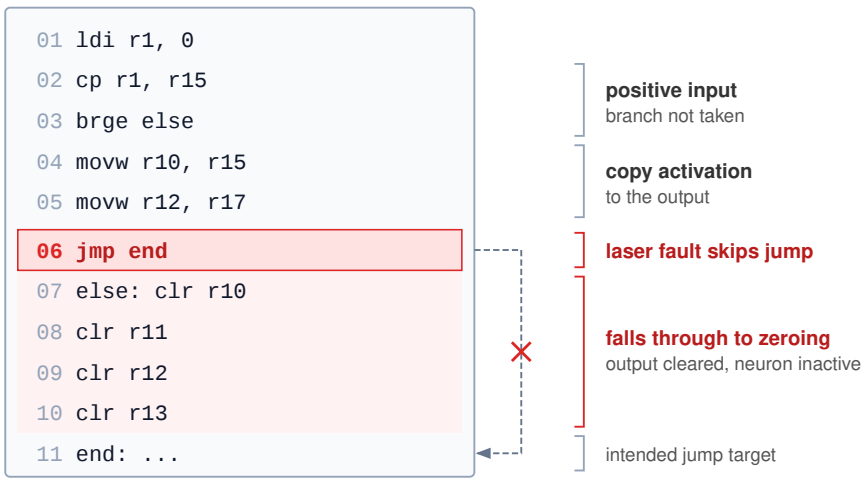


Figure 0.183: Fault injection attack: A timed laser pulse that skips the unconditional jump at line 6 forces a positive ReLU activation through the zeroing block at lines 7–10. The fault changes executed control flow without changing the stored model parameters.

Fault injection attacks can also be combined with side-channel analysis, where attackers first observe power or timing characteristics to infer model structure or data flow. This reconnaissance helps them time faults against specific layers or operations, such as activation functions or final decision layers. The resulting effect still depends on the implementation, the induced fault, and any checks that detect or contain it.

Embedded and edge ML systems can be vulnerable when exposed hardware combines with resource constraints that limit runtime defenses. Access to system buses, memory, or power supplies can give attackers opportunities to induce faults, even when software access controls remain intact. The relevant protection comes from the device and execution stack: a lightweight model does not itself establish whether memory has error correction, computations have redundant checks, or packaging resists probing.

The defense must combine physical hardening with runtime evidence. Tamper-resistant packaging restricts access, while design obfuscation makes targets harder to locate without itself preventing interference. Error-correcting memory and redundant checks can detect or correct some induced errors; secure firmware constrains code changes but does not prevent a fault during execution. Model-output and sensor-consistency monitors can catch some fault-induced behavior that escapes lower layers; MAVFI demonstrates this pattern for micro-aerial-vehicle workloads with anomaly detection and recovery (Hsiao et al. 2023). These protections are hardest in cost- and power-constrained edge systems, where extra cryptographic hardware or redundancy may be unaffordable, so resilience has to be designed across the electrical, firmware, software, and system layers.

A data center fleet rarely faces a laser, but it faces the same class of failure in two other forms. Without any attacker, marginal processors corrupt computation silently at fleet scale. With an

attacker, shared electrical resources can provide a path for interference. Co-tenants on a shared FPGA have induced timing faults remotely by drawing enough current to drop the supply voltage (Gnad et al. 2017). The check-and-verify defenses of section 12 can therefore serve security as well as reliability. Their security coverage requires separate evaluation, however, because an attacker may target both the computation and its check rather than induce the independent errors a reliability analysis assumes.

↩ Silent data corruption from probabilistic hardware faults at fleet scale is established in section 12.

Side-channel attacks

Side-channel attacks answer the third deployment decision: whether computation is observable even when interfaces are locked down. They break the assumption that only explicit interfaces reveal information. Instead of targeting software or network vulnerabilities directly, these attacks use hardware characteristics such as power consumption, electromagnetic emissions, timing behavior, or acoustic signals to extract sensitive information.

The core premise of a side-channel attack is that a device's operation can leak information through observable physical signals. Such leaks may originate from the electrical power the device consumes (Kocher et al. 1999), the electromagnetic fields it emits (Gandolfi et al. 2001), the time required to complete computations, or even the acoustic noise it produces. Carefully measuring and analyzing these signals allows attackers to infer internal system states or recover secret data.

ML accelerators executing inference are exposed to physical leakage as other computing devices are. A matrix multiplication on an edge accelerator can draw current in a pattern correlated with the weight values and input activations being processed. An attacker who can measure that signal may infer properties of the computation, but recovery depends on measurement quality, implementation details, and knowledge or control of inputs. Additional samples help only if the observable signal carries the relevant information. The side-channel surface for a deployed model therefore encompasses both the cryptographic operations protecting its keys and the inference computation itself.

One of the most widely studied examples involves Advanced Encryption Standard (AES) implementations, and its lessons inform the analysis of ML workloads. An implementation can leak information about a key without an attacker breaking the cipher's mathematical construction. The same distinction between an algorithm and its implementation applies to the ReLU activations, softmax normalizations, and weight-load sequences that constitute a forward pass.

A useful example of this attack technique is a power analysis of a password authentication process (Kocher et al. 2011). Consider a device that verifies a 5-byte password (`0x61, 0x52, 0x77, 0x6A, 0x73`) received one byte at a time over a serial interface. With the correct password, the power profile stays stable across all five bytes. Figure 0.184 shows what happens when only the first three bytes are correct. The power pattern tracks the correct-password profile through the third byte (`0x61, 0x52, 0x77`), then jumps when the device rejects the fourth byte (`0x42`) and halts authentication. An entirely wrong password (`0x30` repeated) produces the same jump immediately after the first byte.

For this early-exit comparison, the position of the jump tells the attacker how many leading bytes are correct. If repeated guesses are permitted and the signal is distinguishable, this collapses a search over all 256^5 five-byte strings into five successive searches of 256 values each. ML inference can expose analogous data-dependent behavior, although it does not generally reveal a password-like sequence of correct guesses. A microcontroller that branches on a ReLU input's sign or hardware that skips zero values can produce signals correlated with activation sparsity. Recovering layer topology or parameters requires an additional inference step supported by the implementation and available measurements; a measurable power signal is where that analysis starts, not where it ends.

The underlying lesson is physical: computation emits signals, whether as the sound of a cipher machine (Wright and Greengrass 1987) or of a laptop running a cipher (Genkin et al. 2017), the clicks of a keyboard (Asonov and Agrawal 2004), or the current drawn by a processor. For a fleet, the important variant needs no probe at all. On shared hardware, the shared resource itself becomes the measurement instrument. Researchers built a power monitor from logic in their own region of an FPGA shared among users and used it to recover a cryptographic key computed in another user's region (Zhao and Suh 2018). The sharing that makes multi-tenancy economical turns caches, memory bandwidth, and power delivery into channels between tenants.

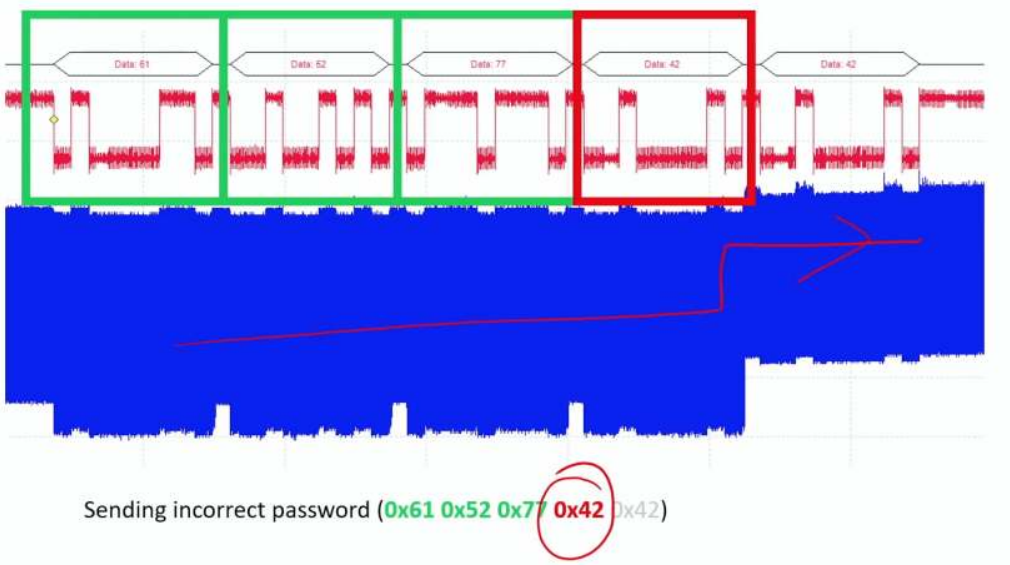


Figure 0.184: Side-channel attack vulnerability: Power consumption patterns reveal information about a password comparison; consistent power usage indicates correct password bytes, while abrupt changes signal incorrect input and halted processing. Even without knowing the password, an attacker can infer it by analyzing the device's power usage during authentication attempts. Source: Colin O'Flynn.

Machine learning systems inherit this risk when accelerators or edge devices process sensitive data near an observable signal. A local speech-recognition device may leak timing or power patterns correlated with commands. An accelerator may reveal layer structure, parameter access patterns, or batch shape through timing, power, or electromagnetic traces. Side-channel defense therefore asks which signals are observable in the deployment environment and whether shielding, constant-time execution, noise, monitoring, or physical access controls can reduce the signal enough to preserve the trust boundary.

Leaky interfaces

Leaky interfaces sit between physical access and lifecycle trust: every diagnostic, update, or communication interface is also a security boundary. Side-channel attacks leak through physical signals; leaky interfaces expose information or accept unverified inputs through channels the system already provides. These access points often go unnoticed during system design, yet they give attackers direct entry points to extract data, manipulate functionality, or introduce malicious code.

A leaky interface is any access point that reveals more information than intended or accepts commands from the wrong actor. The common causes are weak authentication, missing encryption, inadequate isolation, and development interfaces left exposed in production. Consumer, medical, and industrial systems have repeatedly shown the pattern: Wi-Fi-enabled baby monitors have exposed unsecured remote access ports,[12] and pacemaker vulnerabilities[13] have shown how wireless interfaces can become safety-critical control channels.

Debug ports[14] left enabled on production devices are the canonical case. A consumer smart lightbulb, for example, exposed unencrypted Wi-Fi credentials through such a port, giving attackers a path into the home network without defeating any network defense.

The data center has its own privileged maintenance interfaces. A server's baseboard management controller commonly supports power control, console access, and firmware management over an out-of-band network, independently of the host operating system. Compromising its credentials or firmware can therefore expose control paths that host access policies do not govern. The resulting reach depends on network segmentation, controller privileges, and firmware-update protections. The attestation checks of section 11 help only when trusted measurements cover the affected components and the attacker cannot forge the evidence or alter the verifier's approved state. The same reasoning

12 **IoT Device Vulnerabilities**: Default credentials, unencrypted communications, and outdated firmware create access paths into connected devices. A compromised smart camera can supply manipulated inputs or participate in distributed attacks; if it also contributes training data or federated updates, that path can carry poisoning attempts. The consequences depend on the device's role and permissions.

13 **Medical Device Security**: Connected medical devices require secure maintenance over long operating lifetimes. In a device that uses ML, compromised inputs, weights, or preprocessing can alter clinical behavior without stopping the device. Traditional device software can also fail silently, so the additional ML requirement is to evaluate learned behavior alongside firmware integrity and physical safety controls.

applies at the edge, where a maintenance interface that lacks authentication can expose user data, alter model weights, or disable security features.

Securing interfaces is therefore inventory work as much as cryptography. Strong authentication, encrypted communication, anomaly detection, access-control policy, periodic audit, and zero-trust defaults all serve the same principle: every interface must justify what it exposes and who can use it.

14 **Debug Port Vulnerabilities**: JTAG and Serial Wire Debug can expose memory and execution control when debug access remains enabled and authorized checks are absent or bypassed. An attacker may then recover weights accessible in plaintext, but an exposed connector alone does not defeat correctly enforced debug locks or encryption whose keys remain unavailable.

Supply chain risks

Supply chain risks extend the provenance decision from a single interface to every component and every stage of its life. The smallest unit is the counterfeit part. A counterfeit processor, memory module, sensor, or network device may look and function like a genuine one while degrading faster, failing under load, or containing hidden circuitry, so procurement becomes part of the security boundary. Organizations that unknowingly deploy such parts may also violate safety, privacy, or cybersecurity obligations, which makes component provenance evidence that the deployed system matches the certified one.

Figure 0.185 maps the full lifecycle through design, fabrication, assembly, distribution, and deployment. Each stage presents opportunities for tampering or substitution: recycled electronic waste can be relabeled as new, distributors can mix cloned parts into legitimate shipments, and insiders at manufacturing facilities can embed hardware trojans that routine functional tests may miss. Micrography, X-ray screening, and functional testing provide different evidence, with coverage and cost determined by the suspected modification. Procurement therefore needs risk-based provenance controls as well as inspection; passing a functional test does not establish a component's origin or exclude dormant malicious behavior.

Fleet procurement changes the shape of this risk. A training cluster is bought in bulk from a small number of part numbers, so each of the 128 nodes of the reference cluster carries the same accelerators, network adapters, management controller, and firmware images as every other. A compromised shared design, firmware release, or production batch can therefore affect many nodes at once. Replication does not remove a vulnerability shared by the replicas, although one compromised unit is evidence about its part number, not proof that every unit carrying it is affected. The provenance bound on trust (principle 20) applies to silicon and firmware as much as to data. Supplier, batch, and firmware records help identify the affected population; supplier concentration increases common dependencies even when those records are complete.

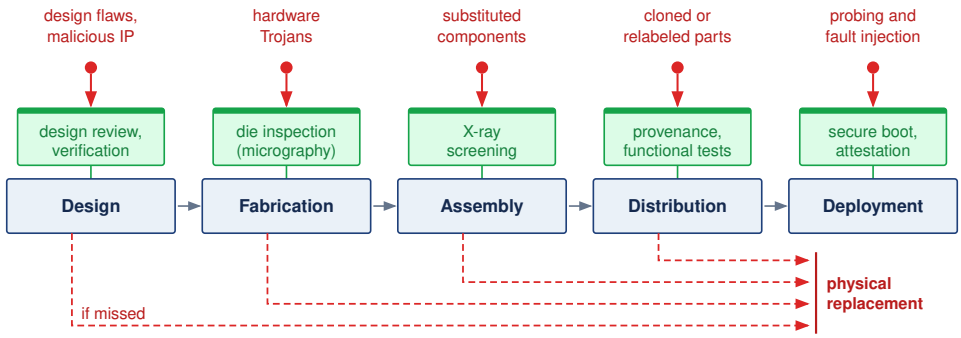


Figure 0.185: Hardware supply chain attack surface: Each lifecycle stage admits its own compromise (red arrows) and needs its own assurance evidence (green gates); no single check covers the chain, and dashed lines carry each missed compromise forward to deployment. Unlike software, which can be patched remotely, a compromise that survives to deployment often requires physical replacement.

Figure 0.185 also shows the economic asymmetry. Software vulnerabilities can often be patched remotely, but a hardware compromise may require physical replacement. That possibility adds replacement cost, service interruption, and revalidation to the expected loss and strengthens the case for preventive checks before deployment.

A disputed 2018 case illustrates the importance of separating allegations from verified compromise. *Bloomberg Businessweek* reported that state-sponsored actors had implanted surveillance chips on server motherboards manufactured by Supermicro (Robertson and Riley 2018). Apple, Amazon, and Supermicro publicly denied the claims, and industry experts questioned the lack of verifiable technical evidence. The dispute does not establish that the named organizations deployed compromised hardware or lacked adequate provenance controls. It instead motivates a general engineering requirement: claims about deployed components need evidence from the relevant fabrication, assembly, distribution, and integration stages. Industrial policy, including the CHIPS and Science Act (United States Congress 2022), addresses a different level of the supply chain from component assurance. Component validation, runtime monitoring, attestation, and hardware roots of trust provide deployment checks whose coverage must be assessed against the suspected compromise.

The engineering takeaway is that hardware trust must be evidenced continuously across design, fabrication, procurement, deployment, and retirement. A trusted execution environment (TEE) isolates selected code and data from parts of the surrounding host. Attestation supplies cryptographic evidence about that protected environment before another component entrusts it with secrets. Neither mechanism establishes that a model is behaviorally correct, and both depend on an explicit set of trusted hardware and software components.

Checkpoint 13.3: Knowledge check: Hardware security

Before moving from hardware trust to ML-enabled attacks, check that each vulnerability family is attached to the deployment decision it tests.

- ☐ **Processor isolation**: explain how a transient-execution flaw can expose a co-tenant's prompts or keys even after software access control passes.
- ☐ **Physical access**: distinguish what fault injection changes in a running computation from what a side-channel attack observes about it.
- ☐ **Interfaces**: identify a maintenance or debug interface in a training node or edge device that host access policies do not govern.
- ☐ **Correlated risk**: explain why a compromised part number threatens a fleet differently from a compromised individual device.

These hardware threats endanger the model, its data, and the execution environment that protects them. Machine learning can also change roles: the same pattern-recognition capability that makes models valuable can help an adversary analyze leakage and attack that environment.

Machine Learning Systems as Attack Tools

Consider an adversary who records noisy power traces from a device performing encryption. Extracting a key requires finding signal patterns associated with secret-dependent computations. A convolutional neural network can learn those patterns from labeled traces, making part of the analysis a learned classification task. The attacker still needs suitable measurements and training data, but can reuse the trained model across repeated attempts under compatible conditions.

Machine learning changes roles in these attacks. Instead of being the protected asset, a learned model helps an adversary extract secrets, generate deceptive content, or adapt inputs to a target's defenses. Table 0.196 maps these offensive ML use cases to the observation or interface each exploits. The common mechanism is learning a useful attack pattern from examples that would otherwise require manual analysis.

Table 0.196: Offensive ML use cases: This table categorizes how machine learning amplifies cyberattacks by enabling automated content generation, exploiting system vulnerabilities, and increasing attack sophistication; it details the typical ML model, targeted weakness, and resulting advantage for each offensive application. Understanding these use cases is important for developing effective defenses against learning-enabled threats.

Offensive Use Case	ML Model Type	Targeted System Vulnerability	Advantage of ML
Phishing and Social Engineering	LLMs	Human perception and communication systems	Personalized, context-aware message crafting
Reconnaissance and Fingerprinting	Supervised classifiers, clustering models	System configuration, network behavior	Scalable, automated profiling of system behavior
Exploit Generation	Code generation models, fine-tuned transformers	Software bugs, insecure code patterns	Automated discovery of candidate exploits
Data Extraction (Inference Attacks)	Classification models, inversion models	Privacy leakage through model outputs	Inference with limited or black-box access
Evasion of Detection Systems	Adversarial input generators	Detection boundaries in deployed ML systems	Crafting minimally perturbed inputs to evade filters
Hardware-Level Attacks	Deep learning models	Physical side-channels (for example, power, timing, EM)	Learning leakage patterns directly from raw signals

A reusable attack model can amortize its training effort across repeated attempts or multiple targets. Its effectiveness still depends on the observations, access, and resources available to the attacker. The defender must therefore evaluate automated probing against the same latency and capacity limits that constrain ordinary service.

Examining these offensive capabilities serves a defensive purpose. Security professionals have long recognized that effective defense requires understanding attack methodologies. This principle underlies penetration testing,[15] red team exercises, and threat modeling throughout the cybersecurity industry.

The side-channel case makes this change concrete: the secret remains in hardware, but a learned classifier extracts information from the signals that hardware exposes.

Deep learning for side-channel analysis

To illustrate these offensive capabilities concretely, consider a specific case where machine learning transforms traditional attack methodologies. One of the most well-known and reproducible demonstrations of deep-learning-assisted side-channel analysis is the SCAAML framework (Side-Channel Attacks Assisted with Machine Learning) (Bursztein et al. 2024; Bursztein and Picod 2019). Developed by researchers at Google, SCAAML provides a practical implementation of this learned side-channel pipeline.

Figure 0.186 illustrates data-dependent power consumption during an AES S-box substitution. The left panel places a possible leakage interval within a longer trace; the right panel magnifies a schematic difference between processed values. Hamming weight counts the ones in a binary value: 1111 has weight 4, 0101 has weight 2, and 0000 has weight 0. The drawing orders amplitudes by that weight to illustrate a leakage model, not a measured law of CMOS switching. Actual leakage depends on circuit structure, state transitions, noise, and countermeasures. A classifier must learn a reproducible relationship in measured traces before these differences can support key recovery.

Statistical side-channel methods use an explicit leakage model or profiles learned from measurements. A neural network instead learns features from labeled power traces and their corresponding intermediate values, such as the output of an S-box operation. Predicting an intermediate value is only one step in key recovery. The attacker combines those predictions with known input data and the algorithm's relationships to score candidate key bytes across traces. Success requires the learned relationship to generalize to traces not used in training; a flexible classifier does not by itself guarantee that transfer.

In a SCAAML guide, Bursztein and Picod (2019) used convolutional neural networks (CNNs) to recover AES keys from power traces collected on an STM32F415 microcontroller running the open-source TinyAES implementation. The models predicted intermediate values of the AES algorithm, such as the output of the S-box[16] in the first round, from power traces. The demonstration recovered a full 128-bit key by combining byte-level predictions. Its target was an unprotected implementation,

15 **Penetration Testing**: Authorized simulated attacks evaluate weaknesses within an agreed scope. Infrastructure-focused tests may omit adversarial inputs, extraction through legitimate API queries, or training-data poisoning. An ML assessment must explicitly include these paths and the attacker's permitted access; calling an assessment a penetration test says nothing about which of these paths it covered.

16 **S-box (Substitution Box)**: The nonlinear byte-substitution table in AES. In the first round, its input combines a plaintext byte with a key byte. Predicting its output is a 256-way classification problem; with the corresponding plaintext byte known, the attacker can map predictions back to candidate key bytes and combine evidence across traces.

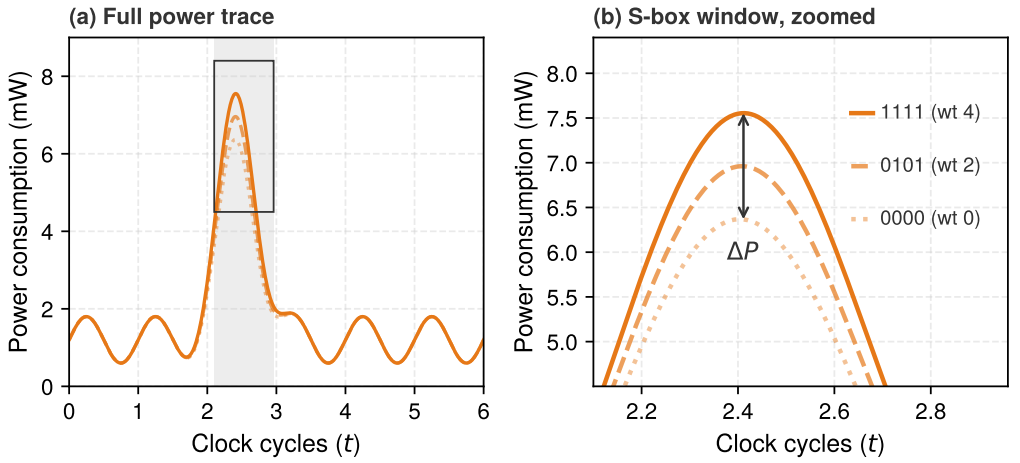


Figure 0.186: Power traces: Cryptographic computations reveal subtle, data-dependent variations in power consumption that reflect internal states during specific operations. The traces are schematic: amplitudes are illustrative and follow the Hamming-weight ordering rather than a measured capture.

so the number of traces it needed sets no expectation for devices with masking, shuffling, or other countermeasures.

Capturing these physical signatures requires access to suitable instrumentation. The STM32F target board in figure 0.187 sits on a ChipWhisperer-compatible baseboard with labeled connections for measurement and triggering. Such a setup supports the synchronized power measurements used to train and evaluate a side-channel model. The photograph illustrates the measurement interface; the attack experiment, rather than the board's appearance, establishes which secrets can be recovered and how many traces are needed.

Subsequent work expanded on this approach by introducing long-range models capable of exploiting broader temporal dependencies in the traces, improving performance even under noise and desynchronization (Bursztein et al. 2024). These developments highlight the potential for machine learning models to serve as offensive cryptanalysis tools, especially in the analysis of secure hardware.

Learned side-channel models can reduce the analysis effort or trace count of an attack when suitable training data and measurable leakage are available. In a fleet built from a few part numbers, reusable attack models create correlated risk. Transfer still requires evaluation across devices, firmware, measurement conditions, and countermeasures; matching part numbers alone do not guarantee it. The defensive response must address both the attacker's access to measurements and the leakage of the computation. This combination leads to layered defenses around data, models, and execution infrastructure.

Comprehensive Defense Architectures

An adversary who bypasses an API rate limit may still face authorization checks, restricted outputs, or an isolated execution environment. These controls protect different assets and constrain different actions. Secure ML systems use defense in depth to limit what follows from a failed mechanism. The benefit depends on whether the remaining controls retain their enforcement power; several checks that share the same compromised credential or runtime do not provide independent barriers.

Figure 0.188 groups countermeasures across four architectural tiers. Hardware mechanisms include trusted execution environments, secure boot, HSM key custody, and physical unclonable function (PUF) device identities. Platform controls include container isolation, network segmentation, access control, and runtime telemetry. The model layer includes adversarial training,[17] input validation, output monitoring, and rate limiting, while data-layer controls include differential privacy, encryption at rest, provenance tracking, and secure aggregation. These tiers partition defenses by the layer they protect, which differs from the data, model, interface, and infrastructure layers

[17] **Robustness-Privacy Trade-Off**: Adversarial training can increase susceptibility to membership inference in the settings studied by Song et al. (2019). The result means that a robustness intervention must be reevaluated against privacy invariants rather than assumed to improve every security property at once.

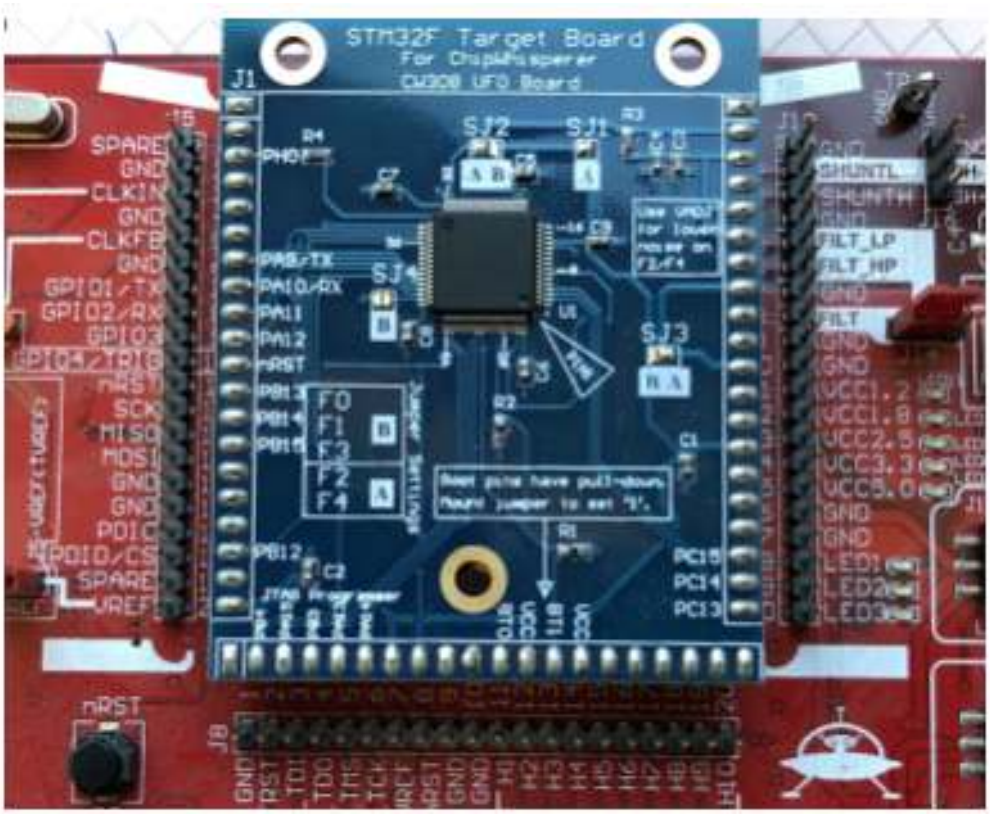


Figure 0.187: STM32F target board: The measurement setup exposes power consumption during AES operations on the microcontroller. Those traces provide the observations from which a side-channel model can infer data-dependent internal behavior.

of section 3 that partition where an adversary enters. The two maps line up except at the interface. Interface controls such as rate limiting, input validation, and output monitoring guard the model's query boundary, so the stack files them with the model tier, but the serving platform beneath enforces them, which is why the runtime-monitoring discussion below treats them as platform mechanisms. Infrastructure threats fall to the hardware and platform tiers. The dependency arrow highlights the runtime support that many controls require. A compromised host can expose raw records or alter a privacy mechanism before release, but it does not retroactively invalidate the differential privacy guarantee of an artifact already produced by a correctly implemented mechanism. The dependency analysis must identify the protected asset and release, not assume that every control fails together.

Layered defense (also known as defense in depth) makes these dependencies explicit. Differential privacy bounds what a specified release reveals about an individual's contribution; it does not protect a separate copy of raw training records from theft. Federated learning changes where training data reside but does not, by itself, bound what updates reveal. Hardware isolation can protect execution within its threat model without establishing that an application follows the intended data policy. Combining these mechanisms requires stating each guarantee and checking which assumptions the other layers preserve.

The stack also orders the analysis. A rate limit enforced by the serving platform is only as reliable as that platform, and the platform is only as reliable as the firmware and processor it runs on. The walk through the defenses therefore follows the stack rather than the model lifecycle. It starts at the bottom tier, where trust is anchored in silicon, then covers the platform controls that govern how a model is deployed and monitored, the model-tier choices that shape the learned function itself, and finally the data layer, where the remaining question is what a correctly computed release reveals.

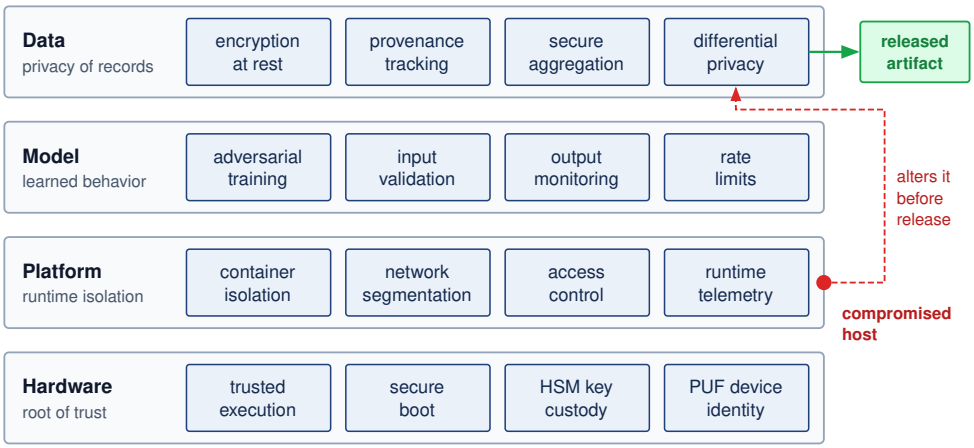


Figure 0.188: Layered defense stack: Controls are grouped by the layer they protect, from the silicon root of trust through platform isolation and model safeguards to data privacy. A compromised component can undermine controls that rely on its execution or stored state. These runtime dependencies must be checked against each control's threat model; a correctly released differentially private artifact retains its release-level guarantee.

Hardware security foundations

Software defenses depend on the components that enforce them. If an attacker compromises the operating system through a privilege escalation exploit, checks enforced solely by that operating system can be disabled or falsified. An unlocked debug interface can similarly expose execution state that software policy was intended to protect. Controls enforced in a separate trust domain may remain effective, which motivates identifying exactly where each security decision is made and who can alter it.

This limitation motivates hardware security mechanisms: protections that operate below the software layer and remain useful even when the operating system, runtime, or application code is compromised. Hardware-based security creates a root of trust anchored in silicon, which gives higher-layer defenses something to rely on. Machine learning systems deployed in edge devices, embedded systems, and untrusted cloud infrastructure often depend on that anchor because the attacker may have physical access, co-tenant access, or administrative access to parts of the stack.

The trust boundary becomes especially important when systems must satisfy regulatory requirements. Healthcare ML systems handling protected health information under HIPAA must implement technical safeguards such as access control, audit controls, integrity protection, and transmission security. Systems processing personal data within GDPR's territorial and material scope must also demonstrate appropriate technical and organizational measures, including data-protection-by-design principles. Hardware security does not satisfy these requirements alone, but it provides the boot, runtime, key-management, and device-identity guarantees that software controls often assume.

Each hardware security primitive answers one trust question. Secure boot asks whether the system started from authentic code. Trusted execution environments (TEEs) ask whether sensitive computation can run despite an untrusted host. Hardware security modules (HSMs) ask where cryptographic keys can be generated and used without exposing them to ordinary memory. Physical unclonable functions (PUFs) ask whether a device can demonstrate a hardware-bound identity that is harder to copy than a software credential. These hardware security mechanisms separate startup integrity, runtime isolation, key custody, and device identity, and table 0.197 compares them after each has been examined. They work best when composed across hardware, firmware, and software boundaries rather than selected as standalone products.

Trusted execution environments

A TEE is first a trust-boundary decision: which parts of the model, key material, input data, or attestation path must remain protected even if the surrounding host is compromised. A trusted execution environment (TEE) is the hardware-isolated processor region that implements that boundary. TEEs enforce confidentiality, integrity, and runtime isolation within a stated threat model. Their guarantee depends on the trusted hardware, firmware, and code inside the protected boundary; isolating a vulnerable application does not make that application correct.

In the context of machine learning, TEEs are important for preserving the confidentiality of models, securing sensitive user data during inference, and protecting execution from host-level tampering. Correct execution of an approved model says nothing about whether its predictions are accurate or safe. For example, a TEE can protect model parameters from being extracted by malicious software running on the same device, or ensure that computations involving biometric inputs, including facial data or fingerprint data, are performed securely. This capability is required in applications where model integrity, user privacy, or regulatory compliance are nonnegotiable.

Isolation of this kind appears at two scales. On consumer devices, a dedicated security coprocessor such as Apple's Secure Enclave keeps credentials and biometric features protected even if the application processor kernel is compromised (Apple 2024b). In the data center, the relevant form is the confidential virtual machine, which protects an entire guest, including its model weights and user inputs, from the hypervisor and host operators, and which the fleet admits into a job only after remote attestation (section 11).

Remote attestation supports the distributed trust decision: before components exchange sensitive data or model updates, a verifier checks fresh evidence about measured code and its hardware-protected boundary against an admission policy. Binding a communication key to that evidence connects the accepted identity to the ensuing channel. Attestation alone does not establish the correctness of every runtime operation. For ML, protection follows the computation: inputs, weights, and activations remain covered only while their processing and storage stay within the chosen boundary. Memory is one deployment cost. The protected working set competes for platform-specific memory capacity. Some implementations support protected paging beyond resident capacity, so overflow can impose substantial movement costs rather than an absolute model-size limit. Compression or partitioning changes those costs and may also change which values remain protected.

TEE implementations combine execution isolation, protected memory, integrity mechanisms, and protected key storage in different ways. The isolation boundary may surround an application region, a secure processor mode, or an entire virtual machine. Access controls restrict which agents can read protected state, while memory encryption and authentication can extend protection beyond the processor boundary where the architecture supports them. Persistent storage needs its own protection when data leave protected memory. Within the execution boundary, computation uses plaintext directly. The deployment analysis must therefore trace where plaintext exists, which components can access it, and which integrity and freshness checks the platform actually supplies.

Platforms differ mainly in the size of the protected boundary. ARM TrustZone[18] splits a mobile or embedded processor into secure and normal worlds. Intel SGX isolates individual enclaves inside an application's address space on servers, and confidential virtual machines such as those built on AMD SEV-SNP or Intel TDX move the boundary out to a whole guest operating system, which lets unmodified ML serving stacks run inside it at the cost of a larger trusted code base.

Figure 0.189 diagrams the isolation boundaries and bus interfaces of Apple's system-on-chip (SoC) Secure Enclave. Its dedicated processor, true random number generator (TRNG), public key accelerator (PKA), and cryptographic engines operate separately from the application processor, which communicates through a mailbox interface. A memory protection engine encrypts and authenticates the enclave's external memory, while protected key paths support storage encryption (Apple 2024b). This example demonstrates isolation of designated security operations and state. It does not imply that arbitrary application model weights or activations reside inside the Secure Enclave; their protection depends on the execution and data paths the platform supports.

This architecture underpins the secure deployment of machine learning applications on consumer devices. For example, Apple's Face ID system uses a Secure Enclave-protected biometric pipeline: TrueDepth camera data is transformed by a protected portion of the Neural Engine into a mathematical representation, then compared with enrolled facial data protected by the Secure Enclave.

[18] **ARM TrustZone**: Introduced in 2004, TrustZone partitions an ARM processor into secure and normal "worlds" with hardware-enforced isolation. Its presence on a device does not by itself protect an ML deployment: the model, keys, and data path must actually be placed inside the secure world, which depends on whether the device vendor exposes secure-world applications beyond key storage.

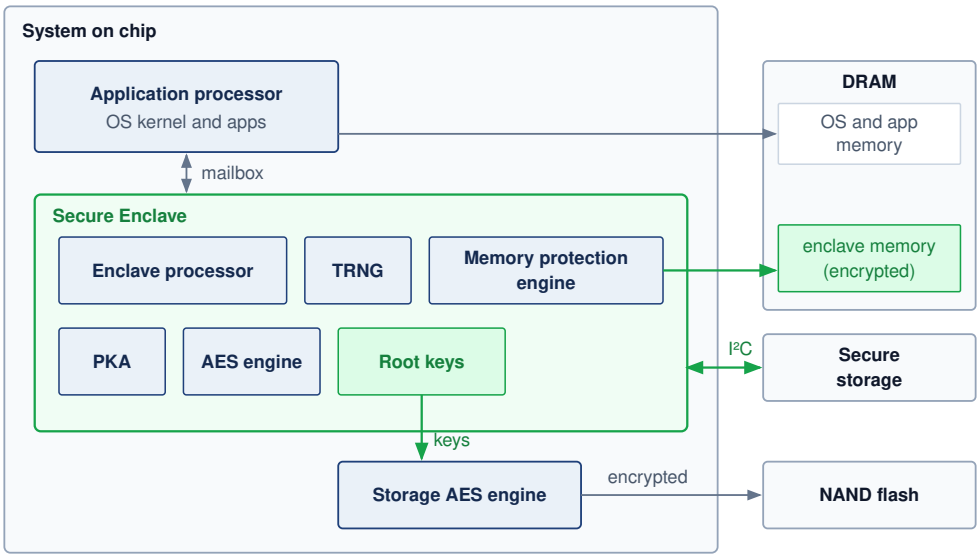


Figure 0.189: Secure enclave architecture: The Secure Enclave is an isolated region of the system on chip with its own processor, random-number generator, public-key accelerator, AES engine, and root keys. The application processor reaches it only through a mailbox, enclave memory in DRAM passes through a memory protection engine, and storage keys go directly to the inline AES engine, so a compromised application processor never holds them. Source: Apple.

Face images captured during normal operation are discarded after the representation is computed, and Face ID data remains encrypted and device-local rather than being sent to Apple or included in backups (Apple 2024a). The ML systems lesson is that biometric models, templates, and comparison logic must be bound to hardware isolation and secure update paths, rather than treated as ordinary application data.

Trusted execution environments carry costs in every C^3 dimension. Protected memory, memory encryption, and transitions between trusted and untrusted modes can add compute and latency, and battery-powered devices also pay in energy for secure memory accesses and cryptographic work. Development cost rises because code inside the boundary must follow isolation, attestation, and update protocols, and some deployments must also pass formal certification such as Common Criteria. Distributed training and federated inference add coordination work when their admission policy requires attestation and protected key exchange. A central verifier can perform admission checks; direct mutual attestation between every pair is not inherently required. TEEs therefore fit deployments whose threat model, whether adversarial users, cloud co-tenants, or malicious insiders, justifies that investment.

Protected-memory and overhead budgets

Hardware security features are budgeted like any other resource. Each primitive spends time at its boundary crossings and capacity in its protected memory, and both costs must be sized before a design commits to a primitive. Hardware security overhead must be measured for the chosen implementation. A secure-world transition has a cost per transition, not automatically a cost per inference: the result depends on how often the inference path crosses the boundary and what data it copies. Encryption, cache effects, and paging add separate costs. Energy overhead requires power and elapsed-time measurements; it cannot be inferred from a transition-latency figure alone.

Security features scale differently than computational resources. Protected memory capacity, not host memory, sets how much of a model can remain resident inside a TEE without paging. On an older Intel SGX configuration with a 128 MB enclave page cache (the protected resident memory), ResNet-50's FP32 weights alone would fill about 76.3 percent of it. A ResNet-18 model is about 46.8 MB with FP32 weights or 11.7 MB with INT8 weights, while ResNet-50 is about 102.4 MB with

FP32 weights or 25.6 MB with INT8 weights before activations and runtime buffers. The fleet's reference model sits far beyond that scale. The FP16 weights of the Archetype A (GPT-4/Llama-3) model occupy as many bytes as the 350 GB gradient it reduces each step, orders of magnitude more than an enclave page cache, which is why fleet-scale confidential computing draws its boundary around a whole confidential virtual machine, an entire guest protected from the host, rather than an application enclave. These constraints create architectural decisions that must be made early in system design.

Different threat models and protection levels require quantitative trade-off analysis. Encryption and authentication are distinct operations: AES encryption alone does not verify integrity. An authenticated mode or a separate authentication mechanism is needed when tampering is in scope, and the latency must be measured for the actual data volume and hardware.



FP32 ResNet-50 weights alone nearly fill an older enclave page cache.

TEE assurance depends on its protected initialization and attestation path, not merely on when the host boots. Some enclave designs explicitly tolerate an untrusted host operating system, while other trusted environments depend on a verified platform startup chain. Secure boot complements these boundaries by authenticating the components included in that chain; the threat model must identify which firmware and initialization code remain trusted.

Secure boot

Secure boot is a mechanism that ensures a device only boots software components that are cryptographically verified under the platform's configured trust policy. At startup, each stage of the boot process, comprising the bootloader, kernel, and base operating system, is checked against a known-good digital signature. If any signature fails verification, the boot sequence is halted, blocking components that fail authentication. The chain rests on a trusted initial stage; signed but vulnerable software remains a risk.

In ML systems, especially those deployed on embedded or edge hardware, secure boot plays an important role. A compromised boot process may result in malicious software loading before the ML runtime begins, enabling attackers to intercept model weights, tamper with training data, or reroute inference results. Such breaches can lead to incorrect or manipulated predictions, unauthorized data access, or device repurposing for botnets or crypto-mining.

For machine learning systems, secure boot authenticates the components included in its verification chain. Model artifacts receive this protection only when a verified loader checks their signatures or a signed manifest before loading them; boot verification alone does not authenticate weights read later from storage. Secure update flows must extend the same verification policy to replacement firmware, runtimes, and model artifacts.

Secure boot frequently operates in tandem with hardware-based TEEs to establish an unbroken chain of trust prior to code execution. Figure 0.190 sequences this stepped verification handshake, pairing each trusted execution stage with an explicit cryptographic authentication gate (Regenscheid 2018). Execution proceeds from an immutable boot root through a verified bootloader and operating system, halting and rejecting the component if any signature check fails. For machine learning pipelines, Stage 3 explicitly extends this chain beyond conventional system software: the verified OS or loader authenticates the model manifest and artifact digest before launching the authorized ML workload. The terminal stage emphasizes that while boot-time authentication blocks unauthorized or tampered binaries, dynamic runtime controls remain necessary to guard against post-boot attacks and data-dependent exploits.

Startup trust is what makes the runtime isolation described earlier meaningful. Before the Face ID pipeline can use the Secure Enclave, signed boot chains verify the application processor software and the Secure Enclave firmware, so unauthorized modification causes verification to fail before any biometric data is processed (Apple 2021a, 2024b).

The trust chain also constrains updates. Apple devices use hardware-rooted authorization to install only system software and firmware versions that Apple is still signing, helping prevent tampered or downgraded components from entering the trusted stack (Apple 2021b). A secure initial boot therefore needs a controlled update path to preserve its assumptions over the device lifecycle.

Secure boot also creates key-management and lifecycle obligations. Enterprises must protect signing keys, distribute trusted verification material, and support revocation or recovery when an

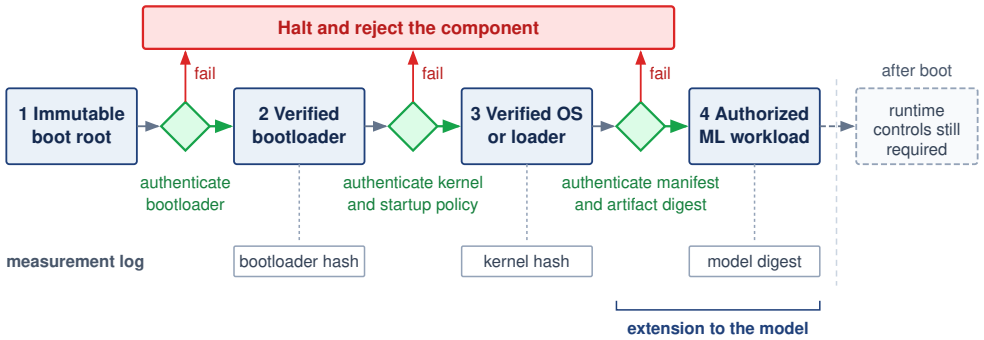


Figure 0.190: Secure boot sequence: Each trusted stage authenticates the next component before use. Extending the chain to a verified model loader permits model-artifact authentication; generic boot verification does not provide that extension automatically. Measured boot records evidence, whereas verification enforces the loading decision.

authorized key is compromised. The affected trust chain depends on that key's authority and the platform's recovery design. Verification adds startup work, and every component covered by the policy must remain authenticated through updates, whether by an individual signature or a digest bound into an authenticated manifest. The deployment must identify which components the chain actually covers.

At fleet scale, device identity and evidence of startup state support distinct admission decisions. The Device Identifier Composition Engine (Trusted Computing Group 2018) combines a device secret with software measurements to derive identities tied to the measured state. IEEE 802.1AR (IEEE 802.1 Working Group 2018) defines cryptographically bound device identities and their provisioning; a device identity alone does not establish which software is running. Fleet attestation (section 11) connects authenticated identity with acceptable state evidence before a node receives keys or joins a job.

Secure boot, when extended through the model loader and complemented by controlled updates, can establish that the configured authority approved the loaded components. Correct model behavior and freedom from vulnerabilities in the authenticated software remain separate claims. Runtime isolation and monitoring address different parts of that assurance argument.

Hardware security modules

While TEEs and secure boot provide runtime isolation and integrity verification, hardware security modules (HSMs) specialize in the cryptographic operations that underpin these protections. An HSM is a tamper-resistant physical device designed to perform cryptographic operations and securely manage digital keys. HSMs are widely used across security-important industries such as finance, defense, and cloud infrastructure, and they are relevant for securing the machine learning pipeline, particularly in deployments where key confidentiality, model integrity, and regulatory compliance are important.

HSMs provide an isolated, hardened environment for performing sensitive operations such as key generation, digital signing, encryption, and decryption. Unlike general-purpose processors, they are engineered to withstand physical tampering and side-channel attacks, and they typically include protected storage, cryptographic accelerators, and internal audit logging. HSMs may be implemented as standalone appliances, plug-in modules, or integrated chips embedded within broader systems.

In machine learning systems, HSMs can protect signing keys and the keys used to wrap data-encryption keys. The distinction matters: a root key may remain inside the HSM while a workload uses a released data key inside its authorized execution boundary. Two distributed workflows illustrate this role. An HSM can protect the certificate authority's signing key used to certify enrolled devices; each device then proves possession of its own private key. Secure aggregation does not inherently require an HSM, and an authenticated but compromised client can still submit poisoned

gradients. An HSM can also wrap a model-decryption key for a TEE's attestation-bound public key after the verifier accepts the evidence. Keeping weights out of plaintext host memory then depends on the TEE's key handling, loader, and execution path, not on the wrapping operation alone.

HSMs also play a role in maintaining the integrity of machine learning models. In many production pipelines, models must be signed before deployment to ensure that only verified versions are accepted into runtime environments. The signing keys used to authenticate models can be stored and managed within the HSM, providing cryptographic assurance that the deployed artifact is authentic and untampered. Similarly, secure firmware updates and configuration changes, regardless of whether they pertain to models, hyperparameters, or supporting infrastructure, can be validated using signatures produced by the HSM.

In addition to protecting inference workloads, HSMs can be used to secure model training. During training, data may originate from distributed and potentially untrusted sources. HSM-backed protocols can help ensure that training pipelines perform encryption, integrity checks, and access control enforcement securely and in compliance with organizational or legal requirements. In regulated industries such as healthcare and finance, such protections are often necessary to satisfy required safeguards. For instance, the HIPAA Security Rule requires technical safeguards such as access control, audit controls, integrity protections, and transmission security, while treating encryption and some integrity controls as addressable implementation specifications. GDPR lists pseudonymization and encryption as examples of appropriate technical and organizational measures where they fit the risk.

HSM deployment introduces a capacity and integration budget. Signing throughput, key-unwrapping latency, and network access to a remote HSM must be measured for the operations actually used, because the HSM sits on the signing and key-release path and its throughput, not the accelerator's, bounds how fast keys reach the fleet. The protected key boundary can also require changes to application interfaces and fleet provisioning. Certification and procurement requirements, including applicable cryptographic-module standards, constrain which devices and configurations can be used.

Despite these operational complexities, HSMs remain a valuable option for machine learning systems that require high assurance of cryptographic integrity and access control. When paired with TEEs, secure boot, and software-based defenses, HSMs contribute to a multilayered security model that spans hardware, system software, and ML runtime.

HSMs combine key custody with protected cryptographic operations. Resource-constrained embedded systems may need a smaller mechanism for a narrower task: deriving a device-specific secret without storing a persistent copy of that secret. Physical unclonable functions use a chip's physical properties for this purpose. They can support key derivation and identity, but do not replace the HSM's full cryptographic processing and policy-enforcement role.

Physical unclonable functions

PUFs[19] provide a hardware-intrinsic mechanism for cryptographic key generation and device authentication by exploiting physical randomness in semiconductor fabrication (Gassend et al. 2002). Unlike traditional keys stored in memory, a PUF generates secret values based on microscopic variations in a chip's physical properties. These variations are inherent to manufacturing processes and difficult to clone or predict, even by the manufacturer.

These variations arise from uncontrollable physical factors such as doping concentration, line edge roughness, and dielectric thickness. As a result, even chips fabricated with the same design masks exhibit small but measurable differences in timing, power consumption, or voltage behavior. PUF circuits amplify these variations to produce a device-unique digital output. When a specific input challenge is applied to a PUF, it generates a corresponding response based on the chip's physical fingerprint. These physical differences make responses device-dependent, although an attacker may still predict responses from a vulnerable design without physically cloning the chip.

This challenge-response mechanism allows PUFs to serve several cryptographic purposes. They can be used to derive device-specific keys that never need to be stored externally, reducing the attack surface for key exfiltration. The same mechanism also supports secure authentication and attestation, where devices must prove their identity to trusted servers or hardware gateways. These properties

[19] **PUF (Physical Unclonable Function)**: Manufacturing variation can support device-specific key derivation without storing a persistent copy of the key. Separate device keys limit the reach of a storage-key compromise, but they do not prevent extraction of plaintext model weights during execution or attacks that predict a vulnerable PUF's responses.

make PUFs a natural fit for machine learning systems deployed in embedded and distributed environments.

For ML fleets, a PUF can reduce the need to inject and persistently store a unique secret in each device. The phone-class devices of Archetype C (Federated MobileNet) and the cameras and drones of edge deployments still need enrollment: the verifier must associate a device with trusted authentication evidence and manage its admission and revocation. A PUF-derived key can encrypt the on-device model at rest, so copying the stored file does not yield the device-bound key that decrypts it. Authentication can use enrolled challenge-response information or a credential backed by a derived key, depending on the design. Both protections have limits. Plaintext weights extracted during execution expose the shared model regardless of how the storage key was generated, and successful authentication establishes which device is speaking, not that its runtime software is uncompromised.

Figure 0.191 diagrams physical unclonable function architectures that turn manufacturing variation into device-dependent responses (Gao et al. 2020). Panel A illustrates the challenge-response abstraction: two devices of the same design respond to challenge C with different responses ($R_1 \neq R_2$). The remaining panels show different physical mechanisms. Optical PUFs illuminate random scattering tokens to produce speckle patterns (Panel B). Arbiter PUFs send a signal along paths configured by challenge bits (C_1 through C_k), with the relative arrival times determining the response bit r (Panel C). SRAM PUFs exploit transistor mismatches that bias memory cells toward preferred startup states (Panel D). These preferences are not perfectly repeatable under every operating condition, which motivates the error correction and calibration discussed next.

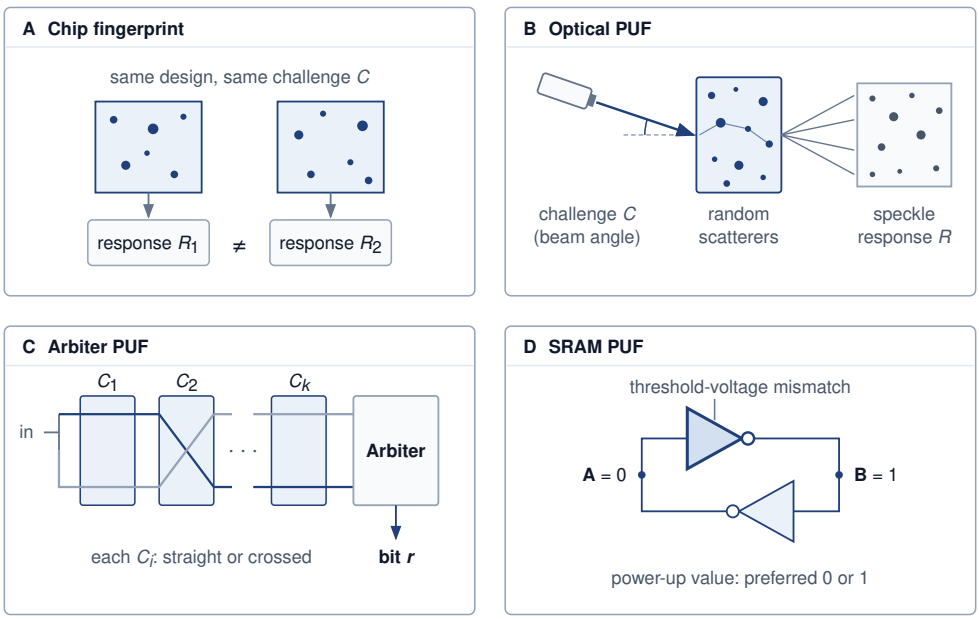


Figure 0.191: Physical unclonable functions: Each panel turns uncontrolled manufacturing variation into a device-specific response. Two chips of the same design answer the same challenge differently (A); a laser challenge scattered by a random token yields a speckle response (B); a challenge sets each arbiter stage straight or crossed, and the faster of two racing edges sets the response bit (C); and threshold-voltage mismatch decides the value a cross-coupled SRAM cell settles to at power-up (D).

PUFs also present engineering challenges. Their responses drift with temperature, voltage, and aging, so production designs add error correction or helper data and calibrate devices during fabrication, at some cost in layout area and test time. Managing large sets of challenge-response pairs raises questions of storage, consistency, and revocation, and the statistical structure of some PUF designs makes their responses predictable to machine learning-based modeling attacks if enough pairs are observed.

Within those limits, PUFs reduce the key-management burden for large device fleets and supply a hardware-bound identity that complements secure boot, TEEs, and HSMs.

Mechanisms comparison

The design choice is not whether hardware-backed protection is better than software-backed protection, but which primitive owns which trust boundary. While software-based defenses offer flexibility, they ultimately rely on the security of the hardware platform. As machine learning workloads operate on edge devices, embedded platforms, and untrusted infrastructure, hardware-backed protections become important for maintaining system integrity, confidentiality, and trust.

TEEs provide runtime isolation for model inference and sensitive data handling. Secure boot verifies the authorized startup components included in its chain of trust. HSMs offer tamper-resistant storage and cryptographic processing for secure key management, model signing, and firmware validation. PUFs bind secrets and authentication to the physical characteristics of a specific device, supporting hardware-bound identities subject to the PUF design's resistance to modeling and physical attacks.

These mechanisms address different layers of the system stack, ranging from initialization and attestation to runtime protection and identity binding, and complement one another when deployed together. Table 0.197 compares their roles, use cases, and trade-offs for machine learning system design.

Table 0.197: Hardware security primitives compared: Machine learning systems use diverse hardware defenses (trusted execution environments, secure boot, hardware security modules, and physical unclonable functions) to establish trust and protect sensitive data across the system stack. This table compares how each mechanism addresses specific security challenges, from runtime isolation and integrity verification to key management and device identity, and emphasizes the associated trade-offs in performance and complexity.

Mechanism	Primary Function	Common Use in ML	Trade-offs
Trusted Execution Environment (TEE)	Isolated runtime environment for secure computation	Secure inference and on-device privacy for sensitive inputs and outputs	Added complexity, memory limits, performance cost; requires trusted code development
Secure Boot	Verified boot sequence and firmware validation	Authenticates boot components; model protection requires a verifying loader	Key management complexity, vendor lock-in; startup performance impact
Hardware Security Module (HSM)	Secure key generation, storage, and cryptographic processing	Signing ML models, securing training pipelines, verifying firmware	High cost, integration overhead, limited I/O; requires infrastructure-level provisioning
Physical Unclonable Function (PUF)	Hardware-bound identity and key derivation	Model binding, device authentication, protecting IP in embedded deployments	Environmental sensitivity, modeling attacks; needs error correction and calibration

Together, these hardware primitives support a defense-in-depth strategy for securing ML systems in adversarial environments. Their integration needs an explicit assurance argument: which components remain trusted, which evidence supports that trust, and which attacks fall outside the protection. Safety-sensitive devices and distributed learning systems need this argument as much as they need the mechanisms themselves.

Hardware primitives supply evidence and enforcement for selected platform properties. Deployment controls use those capabilities to decide which model artifacts may load and which callers may use them. The transition from platform assurance to application policy is therefore a composition problem: the loader and serving endpoint must enforce the intended permissions within the protected boundary.

Secure model deployment

A trusted platform establishes where a model runs; deployment controls decide who can load it, who can call it, and whether its behavior survives contact with users, operators, and attackers. A model's vulnerability is not solely determined by its training procedure or architecture; it also depends on how the artifact is serialized, packaged, deployed, and accessed during inference. As models move

into edge devices, public APIs, and multi-tenant platforms, deployment security must preserve the integrity, confidentiality, and availability of model behavior.

Deployment-stage controls protect the packaged artifact and the inference interface, while the design-stage controls of section 22 shape the model's behavior itself. Deployment controls also have to survive ordinary optimization work such as quantization, pruning, and knowledge distillation, where performance improvements must not compromise artifact integrity, ownership evidence, or access-control boundaries.

Once training is complete, the model must be securely packaged for deployment. Authenticated encryption protects stored artifacts when its keys remain inside the intended trust boundary; a signed manifest authenticates the expected artifact digest before loading. Obfuscation may raise reverse-engineering effort but does not provide the confidentiality contract of encryption. Runtime key custody and the loader's verification policy determine whether packaging protection survives execution.

Deployment environments must enforce access policies at inference endpoints. OAuth supplies delegated authorization; mutual TLS authenticates certificate-bearing peers; API keys identify credentials that the service maps to permissions and quotas. Role-based access control (RBAC) can restrict those permissions by operational role. These mechanisms support the query controls in section 8, but a credential is not proof of a unique human or organization. An attacker who can obtain many accounts can still distribute queries across identities, so account issuance, cumulative budgets, and abuse detection remain part of the boundary.

An API key demonstrates possession of a credential and allows the backend to enforce its associated policies. Keeping keys out of source code reduces accidental exposure in version control, but environment variables alone do not prevent leaks through logs, process inspection, or a compromised runtime. Secret retrieval, scoped permissions, rotation, and redacted logging must be designed together. Model verification against an authenticated manifest, input limits, rate controls, and security-event logging complement credential management.

The secure deployment patterns established here integrate naturally with development workflows, ensuring security becomes part of standard engineering practice rather than an afterthought. Runtime monitoring (section 20) extends these protections to operational environments.

Runtime system monitoring

Secure deployment controls who can load the model and call the endpoint, but runtime monitoring asks whether the live system is still behaving like the approved system. Attackers may craft inputs that pass static checks, exploit learned behavior, or target system-level infrastructure after deployment. Production ML systems span cloud services, edge devices, and embedded systems, so defensive strategies must connect real-time observation to threat detection and incident response across each environment.

Runtime monitoring must decide whether an input should reach the model, whether the output is behaving normally, and whether the serving system is still the one originally deployed. The corresponding mechanisms are input validation, output monitoring, and system integrity checks.

Input validation

Input validation checks incoming data before it reaches a machine learning model. Format and range checks enforce explicit input contracts, while statistical and semantic checks estimate whether an input fits expected conditions. These checks can reject malformed inputs that disrupt preprocessing or inference and some adversarial inputs crafted to trigger incorrect predictions. Passing validation establishes only that the implemented checks accepted the input, not that the model will handle it correctly.

Small, carefully chosen changes to input data can cause models to make high-confidence but incorrect predictions (Goodfellow et al. 2015). Such inputs may satisfy ordinary type and range checks. Input validation therefore complements model robustness evaluation; it cannot replace testing how the learned function behaves on valid but adversarial inputs.

Validation techniques range from low-level checks (for example, input size, type, and value ranges) to semantic filters that estimate whether an image contains a recognizable object or a recording includes speech. For example, a facial recognition system might validate that an uploaded image

is within a specified resolution range (for example, 224×224 to 1024×1024 pixels), contains RGB channels, and passes a lightweight face detection filter. These checks reject inputs that violate the format or face-detection contract; an adversarial image that satisfies that contract can still reach the model. Similarly, a voice assistant might require audio files between 1 and 5 seconds long, a valid sampling rate (for example, 16 kHz), and a positive result from a speech activity detector (SAD). The detector can reject some music or noise while also missing quiet speech or accepting nonspeech, so its error rates belong in the validation assessment.

In generative systems, input validation can include prompt filtering against an application's content policy. A medical education application, for example, might reject requests to generate fabricated treatment claims. Filters may use keyword lists, regular expressions, or lightweight classifiers that estimate prompt intent. Their effectiveness depends on the policy, detector, and inputs tested, including paraphrases and adversarial prompts. They cannot establish that an accepted prompt will produce an acceptable output, which is why output monitoring remains necessary.

In some applications, distributional checks are also used. These assess whether the incoming data statistically resembles what the model saw during training. For instance, a computer vision pipeline might compare the color histogram of the input image to a baseline distribution, flagging outliers for manual review or rejection.

These validations can be lightweight (heuristics or threshold rules) or learned (small models trained to detect distribution shift or adversarial artifacts). Their value depends on which invalid or hostile inputs they reject and how often they reject legitimate inputs. Since an accepted input can still induce an incorrect result, the next boundary is the model's output.

Output monitoring

Even when inputs pass validation, adversarial or unexpected behavior may still emerge at the model's output. Output monitoring observes confidence, prediction entropy, class distribution, or response patterns to flag deviations from expected behavior. A monitor can contain a detected failure when its fallback acts before the output causes harm. Missed detections, delayed alerts, and incorrect fallbacks limit that protection, so detection quality and response timing belong in the same evaluation.

The signal a monitor watches depends on the model's modality. For a discriminative classifier, unexpected changes in confidence, class frequencies, or output entropy can trigger investigation, but do not identify their cause. A legitimate workload change, model defect, or attack can produce similar deviations. Content-moderation monitors can compare predicted "safe" labels with auxiliary reference signals; fraud-detection monitors can flag sudden score changes during high-volume periods. In each case, the system compares the live stream with an expected distribution and applies a chosen response, such as human review or a conservative baseline, while investigation distinguishes the possible causes.

Generative models, such as text-to-image systems, introduce unique output monitoring challenges. These models can produce high-fidelity imagery that may inadvertently violate content safety policies, platform guidelines, or user expectations. To mitigate these risks, postgeneration classifiers are commonly employed to assess generated content for objectionable characteristics such as violence, nudity, or brand misuse. These classifiers operate downstream of the generative model and can suppress, blur, or reject outputs based on predefined thresholds. Some systems also inspect internal representations (for example, attention maps or latent embeddings) to anticipate potential misuse before content is rendered.

However, prompt filtering alone is insufficient for safety. Research has shown that text-to-image systems can be manipulated through implicitly adversarial prompts, which are queries that appear benign but lead to policy-violating outputs. The Adversarial Nibbler project introduces an open red teaming methodology that identifies such prompts and demonstrates how models like Stable Diffusion can produce unintended content despite the absence of explicit trigger phrases (Quaye et al. 2024; Parrish et al. 2023). These failure cases often bypass prompt filters because their risk arises from model behavior during generation, not from syntactic or lexical cues.

The red-teaming gallery in figure 0.192 presents three blurred generated images with red content suggestive of blood or injury. These examples illustrate why an output needs assessment against the application's policy even when the prompt appears acceptable. The images alone cannot reveal

which input filter was active, how a prompt bypassed it, or which internal generation mechanism caused the result. Diagnosing those failures requires prompt, model, and filter records alongside the outputs. Output classifiers provide a complementary check, whose own errors must also be evaluated.



Figure 0.192: Adversarial prompt evasion: Implicitly adversarial prompts bypass typical content filters by triggering unintended generations, revealing limitations of solely relying on pregeneration safety checks. These examples underscore the necessity of post-hoc content analysis as a complementary defense layer for robust generative AI systems.

In the domain of language generation, output monitoring plays a different but equally important role. Here, the goal is often to detect toxicity, hallucinated claims, or off-distribution responses. For example, a customer support chatbot may be monitored for keyword presence, tonal alignment, or semantic coherence. If a response contains profanity, unsupported assertions, or syntactically malformed text, the system may trigger a rephrasing, initiate a fallback to scripted templates, or halt the response altogether.

Output monitoring can combine rule-based heuristics with learned detectors trained on historical outputs. These detectors feed alerts into incident response pipelines or block outputs before release. Adversarial training aims to improve the model's behavior, while monitoring adds a separate opportunity to detect and contain failures during operation. Any claimed damage bound must account for missed detections, response latency, and the consequences of the selected fallback.

These principles appear in output filtering frameworks. For example, Llama Guard is an LLM-based input-output safeguard that classifies human-AI conversations against policy categories (Inan et al. 2023). Similarly, ShieldGemma, developed as part of Google's open Gemma model release, applies configurable scoring functions to detect and filter undesired outputs during inference (Google 2024). Both systems exemplify how safety classifiers and output monitors can be integrated into the runtime stack to support scalable, policy-aligned deployment of generative language models.

Integrity checks

While input and output monitoring focus on model behavior, system integrity checks compare model files, execution environments, and serving infrastructure with approved state. Their coverage depends on what is measured, when it is measured, and whether the measurement path remains trusted. Verifying a file before loading detects covered artifact changes at that point; it does not establish that all subsequent execution remains untampered.

One of the most common integrity mechanisms is cryptographic model verification. Before a model is loaded into memory, the system can compute a cryptographic hash (for example, SHA-256) of the model file and compare it against the expected digest in an authenticated, signed release manifest.

Access control and audit logging complement cryptographic checks. ML systems should restrict access to model files using role-based permissions and monitor file access patterns. For instance, repeated attempts to read model checkpoints from a nonstandard path, or inference requests from unauthorized IP ranges, may indicate tampering, privilege escalation, or insider threats. In cloud environments, container- or VM-based isolation[20] helps enforce process and memory boundaries, but these protections can erode over time because of misconfiguration or supply chain vulnerabilities.

For example, a regulated healthcare ML deployment can organize integrity evidence around three gates. The loader compares the model artifact's cryptographic hash with an authenticated, signed release manifest. Dependency validation checks approved package versions and authenticated artifact digests; a pinned version number names a package without proving that its contents are

[20] **Container vs. VM Isolation**: Containers share the host kernel, which keeps overhead low and model scale-out fast but leaves a kernel attack surface shared with co-tenants. VMs separate guest kernels and memory at additional resource cost, yet hypervisor flaws and shared-hardware side channels can still enable cross-tenant attacks on a multi-tenant serving fleet.

the approved ones. Platform attestation checks measured state against an approved configuration, with coverage determined by the attestation mechanism rather than an assumption of continuous execution verification. These gates supply evidence relevant to HIPAA[21] and other applicable obligations, but the organization must assess the complete system and its operational use to establish compliance.

Some systems also implement runtime memory verification, such as scanning for unexpected model parameter changes or checking that memory-mapped model weights remain unaltered during execution. While more common in high-assurance systems, such checks are becoming more feasible with the adoption of secure enclaves and trusted runtimes.

System integrity checks and input/output monitoring provide complementary evidence. Integrity checks can identify changes to measured artifacts even when predictions appear normal; behavioral monitors can flag failures even when every artifact matches its approved version. Their combined evidence guides investigation and containment without equating artifact authenticity with correct model behavior.

Integrity checks become ML supply-chain controls only when they connect every deployable artifact. A signed model file is insufficient if the training dataset, dependency lockfile, preprocessing code, registry promotion event, container image, and deployment attestation cannot be tied to the same release record. That release record makes the provenance bound on trust (principle 20) operational, and it gives rollback and forensic analysis a concrete object. Operators can ask which data snapshot produced the checkpoint, which dependencies built the serving image, which registry principal promoted it, and which production endpoints loaded it.

21 **HIPAA ML Requirements**: For electronic protected health information, the HIPAA Security Rule treats encryption at rest and in transit as addressable specifications, which an organization implements when reasonable and appropriate or replaces with a documented equivalent (U.S. Department of Health and Human Services 2005). Its audit-control standard requires mechanisms that record and examine activity in systems holding that information, scoped by risk analysis rather than a mandate to log every read. Cloud services handling it generally require Business Associate Agreements. In an ML pipeline, these duties become risk-based audit coverage, protected checkpoints, controlled access, and evidence that the safeguards are operating.

Response and rollback

A detected breach, anomaly, or performance degradation must lead to a defined response. The immediate task is containment; recovery then restores a trustworthy service and addresses the cause. ML systems add model checkpoints, training-data lineage, and learned behavior to the software versions, credentials, and runtime state that incident responders already need to examine.

Detection thresholds and automated rollback triggers work here as they do for any production model; security changes the signal set and the order of operations. Escalation can come from input validation (a rise in invalid inputs), output monitoring (a drop in prediction confidence), or integrity checks (a failed model signature verification). A security trigger must also preserve evidence before the automated response changes the system's state, because a rollback that overwrites the suspect artifact destroys the record an investigation needs.

↩ Automated rollback triggers for production models are established in section 9.

One common strategy is model rollback, where the system reverts to a previously verified release. If a newly deployed fraud detector misclassifies transactions, an earlier checkpoint can restore service only if it remains compatible with the current data path and does not share the defect or compromise. Rollback therefore requires an authenticated release record covering weights, preprocessing, dependencies, and configuration, together with criteria for accepting the fallback under current conditions.

In high-availability environments, model isolation can help contain failures. Removing a suspect instance from load balancers stops new serving traffic, while restricting its network and credential access limits other actions. Preserving an isolated copy supports forensic analysis as unaffected replicas serve requests. The canary stages of section 8 serve a different purpose, evaluating a candidate release with limited live exposure. They do not substitute for quarantining a known compromised instance, because a small traffic share does not make continued use of a compromised model safe, and a rare trigger may never appear during the canary window.

Traffic throttling is another immediate response tool. If an adversarial actor is probing a public inference API at high volume, the system can rate-limit or temporarily block offending IP ranges while continuing to serve trusted clients. This containment technique helps prevent abuse without requiring full system shutdown.

Once immediate containment is in place, investigation and recovery can begin. Evidence may include protected input logs, parameter deltas between model versions, or memory snapshots from inference containers. Generative and tool-using systems add prompts, retrieval context, tool-call records, guardrail decisions, and secret-access events. These records help reconstruct what instructions and data the model received, which actions it attempted, and which controls intervened; a

guardrail log records the detector's decision rather than proving that it caught every violation. Evidence collection must also protect the sensitive content it captures through scoped access, redaction, retention limits, and integrity controls. The aim is enough trustworthy context to distinguish privacy breaches, model-integrity failures, and ordinary model errors without creating an uncontrolled second repository of private data. Applicable incident-notification obligations remain part of the response process.

Recovery must repair the boundary that failed. A stolen credential requires revocation and controlled replacement; a compromised loader requires a trusted deployment path; poisoned training data may require dataset repair and retraining. Changes must pass through a secure update process using authenticated artifacts, trusted build pipelines, and validated data. For a prompt injection incident, recovery should examine how untrusted content gained authority over tool calls or data access. Additional training and filtering may help, but cannot replace enforcing the affected authorization boundary.

Postincident review then follows the platform practice of section 14. A security review adds three records to it: which boundary failed, which credentials and artifacts were revoked or rebuilt, and which attack cases now enter the evaluation suite.

Secure model design

Deployment and runtime controls act on the platform around the model. The model tier above them acts on the learned function itself, and many of the vulnerabilities those platform controls detect can be reduced before deployment, by the choices that determine what the model can learn, how it behaves under uncertainty, and what evidence of ownership it carries. This motivates model-level security: architectural and design choices that complement data protections by reducing the model's capacity to serve as an information conduit.

One design strategy is to limit when the system acts on a model prediction. Confidence calibration makes reported confidence more meaningful under the evaluated conditions, while abstention permits the system to defer uncertain predictions. Neither mechanism establishes robustness by construction: an adversarial input may still receive high confidence. Output smoothing and other regularization methods likewise require evaluation under the specified attack. These design choices support behavioral robustness testing rather than replacing it.

Smaller or compressed models can reduce the protected working set and make an isolation boundary less costly to implement. That resource benefit buys no resistance to extraction, memorization, or side channels. A simpler model may be easier to approximate from queries, and leakage depends on the implementation and exposed outputs rather than parameter count alone.

Another design-stage consideration is the use of model watermarking,[22] a technique for embedding verifiable ownership signatures directly into the model's parameters or output behavior (Adi et al. 2018). A watermark might be implemented, for example, as a hidden response pattern triggered by specific inputs, or as a parameter-space perturbation that does not affect accuracy but is statistically identifiable.

[22] **Model Watermarking**: In trigger-set watermarking, the owner's secret inputs reliably identify the model while normal test accuracy is preserved (Adi et al. 2018). The systems challenge is robustness, because a watermark must survive fine-tuning, pruning, and distillation, the same operations an attacker uses to strip ownership marks from a stolen model.

For example, an embedded keyword spotting system might use a lightweight convolutional neural network with calibrated confidence and an abstention threshold to limit false activations on uncertain audio. Its evaluation must measure missed activations as well as false ones under the expected noise and attack conditions. To support ownership verification, a designer could train a watermark response to a secret audio trigger. That watermark needs separate evaluation for false attribution, removal, and effects on ordinary behavior. The two choices serve different purposes: abstention controls when the system acts, while watermarking supplies evidence about model origin.

In high-risk applications, such as medical diagnosis, autonomous vehicles, or financial decision systems, designers may also prioritize models whose decisions can be inspected. A compact decision tree or rule set can expose decision paths directly, but a large tree may still be difficult to audit, and sparsity alone does not make a neural network interpretable. Auditability depends on whether reviewers can connect the model's behavior to meaningful inputs and test its assumptions. It supports investigation of vulnerabilities and biases without establishing their absence.

Model design choices reflect trade-offs between accuracy, robustness, transparency, and system complexity. Making these choices before deployment gives engineers an opportunity to evaluate the

resulting behavior and resource cost together. The next case examines a risk that ordinary accuracy evaluation can miss: training examples retained in a model and later exposed through its outputs.

GPT-2 data extraction case study

Design choices can reduce training-data exposure, but a model can predict well and still leak what it memorized. The GPT-2 extraction case shows why storage access control is insufficient once a model has learned sensitive content. In 2020, researchers demonstrated that query access to OpenAI's GPT-2 model could reveal verbatim training examples (Carlini et al. 2021). The attack targeted information exposed through generation rather than direct access to the stored training dataset.

The attack proved remarkably successful at extracting sensitive information directly from the model's outputs. Generating hundreds of thousands of samples, some unconditioned and some seeded with short snippets of internet text, and then ranking them by how much more likely GPT-2 found them than a reference model or compression baseline did, allowed researchers to extract personal information such as names, phone numbers, and email addresses, along with source code, unique identifiers, and other verbatim snippets that the model had memorized from its training data.

The technical approach exploited GPT-2's memorization of rare or repeated text sequences through three stages. Sampling came first. The researchers generated 600,000 samples using top-k sampling, sampling with a temperature that decays over the first generated tokens, and sampling conditioned on short prefixes drawn from internet text. Ranking then applied membership-inference metrics that compare GPT-2's perplexity on a sample against a reference, namely the sample's zlib compression entropy, the perplexity a smaller GPT-2 model assigns it, and GPT-2's perplexity on the lowercased text. A sample that GPT-2 finds far more likely than the reference suggests memorization rather than fluent generalization. Manual verification closed the pipeline. The researchers inspected 1,800 top-ranked candidates, checking them first by internet search and then against the training data with OpenAI's cooperation, and confirmed 604 of them as unique memorized training examples.

The attack challenged the assumption that training data would be "forgotten" after optimization. Some training examples remained recoverable even though the model was designed to generate text rather than retrieve records. Across the GPT-2 family studied (124M to 1.5B parameters), larger models exposed more memorized training data under the evaluation. This comparison motivates testing memorization as models scale; it does not establish a universal relationship between parameter count and privacy loss across different datasets and training procedures.

Filtering, deduplication, and manual review can reduce exposure, but empirical screening does not prove that no sensitive string remains recoverable. Differential privacy addresses a different requirement by bounding how much a protected contribution changes the distribution of released results. It does not prohibit every reproduction of text that appears in training, especially information shared across many records. Its contribution bound and the utility effects of filtering or private training must therefore be evaluated separately.

The result demonstrates why training-data controls need layered mitigations rather than storage access control alone (Carlini et al. 2021). Those layers can include PII filtering, deduplication, extraction-style memorization audits, membership-inference testing, and differential privacy when a formal bound is required. Machine unlearning and policy controls address related lifecycle questions, but their guarantees require separate evidence and validation.

Privacy-preserving data techniques

The data layer forces a privacy decision about who may observe raw records, individual updates, and released results. Keeping records centralized, leaving them on client devices, computing over encrypted values, and generating synthetic substitutes change different parts of that exposure. That decision is architectural before it is algorithmic because it fixes the same system variables this chapter has tracked: information leakage, model utility, runtime cost, and the strength of the guarantee. ML workflows often depend on raw, high-fidelity data to train effective models, so privacy-preserving techniques should be read as different ways to move or bound that exposure rather than as interchangeable tools.

Federated learning

A release guarantee and a data-location requirement answer different privacy questions. Differential privacy bounds the effect of a protected contribution on released results; federated learning keeps raw training records on participating clients. Policy, consent, or data-use agreements may forbid centralizing those records, making federated architectures a natural fit. The updates exchanged during training still require their own exposure analysis.

> Lighthouse 13.1: Archetype C (Federated MobileNet): The need for privacy
>
> Archetype C (Federated MobileNet) represents the class of systems where privacy is a hard constraint, not an optimization. Its phone-class devices learn from images and sensor data. When policy or consent forbids centralizing those data, federated learning becomes the natural architecture for the privacy-utility trade-off, because it trains a shared model without collecting the raw records. For this archetype the threat model therefore starts after the raw data remain on the device, with what each device's update reveals and who can observe it.

While differential privacy adds mathematical guarantees to data processing, federated learning offers a complementary approach that reduces privacy risks by restructuring the learning process itself: client data remains decentralized while model updates are communicated. However, federated learning alone does not guarantee privacy. The gradient updates that clients transmit can leak sensitive information, so data locality alone does not establish privacy. Decentralization is necessary when the deployment contract requires local records, but a trusted curator applying differential privacy to centralized data can provide a guarantee under a different trust model.

↩ Federated coordination protocols, weighted averaging, and client update cycles are established in section 14.

Gradient leakage and privacy-preserving computation

Gradient inversion attacks (such as Deep Leakage from Gradients) demonstrate reconstruction of training examples from exposed gradients under the studied conditions (Zhu et al. 2019; Nasr et al. 2019). Recovery depends on the model, batch, update processing, and attacker's knowledge; it is not guaranteed for every client update. The gradient nevertheless provides an information channel even when raw data never leave the device. One defense is the secure aggregation protocol, which limits the server to an aggregate under specified participation and collusion assumptions.

↩ Secure aggregation, which reveals only the sum of client updates to the coordinator, is established in section 17.

Figure 0.193 extends pairwise masking from two clients to four, which is enough to expose the assumptions a security analysis must state. Each client k adds a blinding vector $\mathbf{r}_k$ to its local gradient $\mathbf{g}_k$ and transmits only the masked vector $\mathbf{y}_k$. The masks come from pairwise Diffie-Hellman shared secrets with opposite signs for the two clients of each pair ($\mathbf{s}_{k,j} = -\mathbf{s}_{j,k}$), so they cancel in the sum ($\sum \mathbf{r}_k = [0, 0, 0]$) and the server recovers the aggregate $[0.4, 0.3, 0.8]$ without receiving any unmasked $\mathbf{g}_k$. The boundary holds only under stated conditions. Enrollment must be authenticated, the participating clients must complete the round, and at least two noncolluding clients must keep their shared masks from the coordinator. A production protocol must therefore formalize its collusion threshold and its dropout recovery, because a client that departs mid-round strands masks that no longer cancel. The aggregate itself still discloses information, potentially including an individual contribution when combined with other known contributions, so hiding the messages does not by itself provide differential privacy.

This vulnerability motivates secure aggregation protocols (Bonawitz et al. 2017) and differential privacy, but the trust boundary determines which version of DP applies. Central differential privacy assumes a trusted curator or aggregation service can see raw records or updates before releasing a randomized result. Local differential privacy randomizes each client's protected contribution before the server sees it, reducing trust in the server but often paying a larger utility cost. Secure aggregation limits the server to an aggregate rather than individual updates; a separate, accounted DP mechanism can bound what the released result reveals. Noise added after the server sees the exact aggregate protects the release audience, not that server. Protecting against an untrusted coordinator requires randomization or a trusted computation boundary before it observes the protected result. Compression can change the information in an update, but communication savings alone establish no privacy bound. Each layer also carries a C^3 price. Masking adds client compute, key agreement and masked uploads add communication, and dropout recovery adds protocol-specific coordination

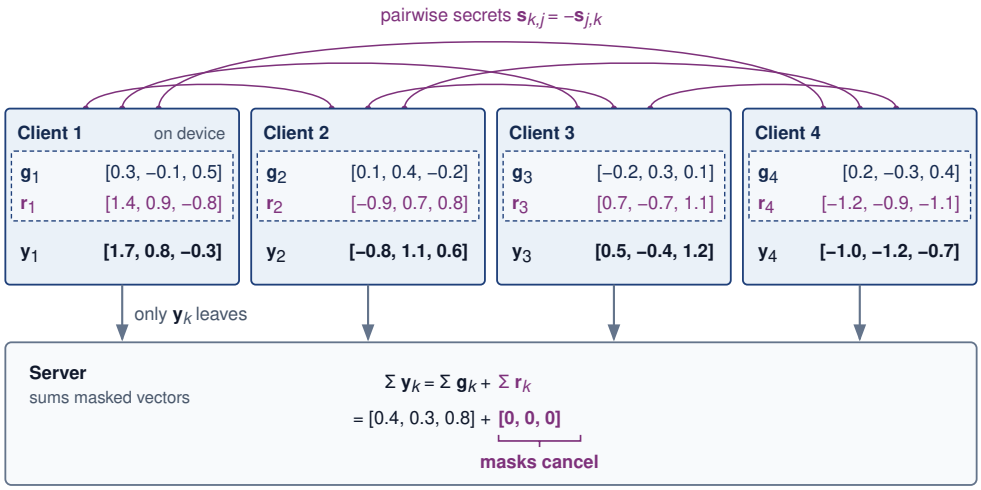


Figure 0.193: Secure aggregation protocol: Each client adds a mask $\mathbf{r}_k$ to its local gradient $\mathbf{g}_k$ and transmits only the masked vector $\mathbf{y}_k$. The masks are built from pairwise secrets agreed by Diffie-Hellman key exchange with $\mathbf{s}_{k,j} = -\mathbf{s}_{j,k}$, so they cancel in the sum and the server recovers the exact aggregate gradient without seeing any individual $\mathbf{g}_k$. The three-element vectors are illustrative. The privacy boundary assumes at least two noncolluding participants and secret masks; it hides individual messages beyond what the aggregate itself discloses, and production dropout handling must preserve the protocol's collusion threshold.

governed by participation thresholds and deadlines. Gboard illustrates why deployed guarantees must be distinguished from the general FL architecture.

↩ Gradient compression as a lever against bandwidth scarcity is established in section 10.

Lighthouse 13.2: Archetype C (Federated MobileNet): Google Gboard federated learning

For the Archetype C mobile/federated workload, Google's Gboard keyboard (whose on-device next-word suggestion and autocomplete inference interfaces appear in figure 0.143) provides a concrete production baseline for learning from data retained on edge devices. The original keyboard study demonstrates federated training, and the systems report describes the production orchestration challenges (Hard et al. 2018; Bonawitz et al. 2019). Those reports do not by themselves establish that every described model combines secure aggregation with a formal DP guarantee. The engineering pattern separates three contracts: FL keeps raw typing data local, secure aggregation can hide individual messages under its protocol assumptions, and an accounted DP mechanism can bound what the released model reveals. A deployment claim must identify which contracts its actual training run satisfies.

Federated learning changes where raw data reside, while differential privacy bounds the effect of a protected contribution on released results. Cryptographic computation addresses a third boundary: who can observe inputs and intermediate values during execution. Homomorphic encryption (HE)[23] and secure multiparty computation (SMPC) support computation over inputs represented as ciphertexts or protocol-specific shares (Gentry 2009; Yao 1982). Their costs depend on the chosen protocol and representation. Quantization can help some encrypted computations, but its effect must be assessed together with ciphertext packing, rotations, nonlinear-function approximations, and required accuracy. Hardware acceleration changes execution cost without removing those mathematical constraints.

In the case of HE, evaluating a supported function on a ciphertext produces a ciphertext that decrypts to the corresponding plaintext result:

$$c \leftarrow \mathrm{Enc}(pk, m), \qquad \mathrm{Dec}(sk, \mathrm{Eval}(pk, f, c)) = f(m)$$

This property supports inference over encrypted inputs in an untrusted computing environment. Its confidentiality guarantee depends on the scheme and key custody; it does not by itself prove that

23 **Homomorphic Encryption**: Operations on ciphertexts correspond to operations on the underlying plaintexts. Gentry's 2009 work supplied the first fully homomorphic construction; it did not make arbitrary ML workloads immediately practical. Inference cost depends on circuit depth, packing, rotations, numerical representation, and the chosen security parameters.

the server evaluated the intended function correctly. The deployment must also measure the cost of representing that function as supported encrypted operations, including any approximation that changes prediction quality.

Napkin Math 13.3: The tax of trusted compute

Problem: A team deploying a health-monitoring model compares three security levels:

1. **Plaintext**: Standard inference.
2. **Encrypted transport (AES)**: Model and data are encrypted at rest and in transit.
3. **Encrypted compute (fully homomorphic encryption [FHE])**: Inference performed on encrypted data.

Treat the following overheads as assumed scenario inputs, not universal AES or FHE performance ratios. The comparison is whether these configurations satisfy the application's latency budget.

Math: Inference latency scales by the complexity of the security protocol.

1. **Plaintext**: 20 ms.
2. **AES-256**: 20 ms + 0.5 ms = 20.5 ms (negligible tax).
3. **FHE**: 20 ms $\times$ 10,000× = 200 seconds.

Systems insight: Under the assumed overheads, protected computation takes longer than encryption around plaintext execution. Whether FHE fits an application depends on its latency budget and the measured encrypted circuit; the multiplier here does not generalize across models or implementations. Hardware isolation provides a different trust boundary in which computation uses protected plaintext. Comparing that option requires its own measured overhead and an explicit hardware trust assumption.

Homomorphic computation costs depend on the supported operations, circuit depth, numerical representation, and chosen security parameters. Supporting arbitrary computation does not by itself determine the cost of a particular inference circuit. Feasibility requires measuring the protected workload against its latency, throughput, and utility requirements. The hardware-enforced isolation of section 18 offers a different trade-off: plaintext computation inside a trusted boundary, with security dependent on that boundary's hardware and software assumptions.

SMPC,[24] by contrast, distributes computation across parties while protecting their private inputs under the protocol's stated corruption and collusion assumptions. The protocol specifies which parties receive the output; privacy hides additional information beyond what those outputs and a party's own inputs reveal. This is particularly useful in joint training across institutions with strict data-use policies, such as hospitals or banks.

[24] **SMPC Performance Overhead**: Cryptographic computation adds protocol-specific communication and local work. The bottleneck depends on round count, network latency, arithmetic representation, and the adversary model; a single slowdown factor does not characterize all deployments. Moving some layers outside protection changes the information exposed and therefore requires a new privacy analysis.

Synthetic data generation

Synthetic data changes the privacy decision from hiding raw records to replacing them with generated surrogates. Beyond cryptographic approaches like homomorphic encryption, a pragmatic alternative is synthetic data generation. Generated data can let downstream researchers train models without receiving the source records, but the generator and its outputs must still be evaluated for leakage.

Synthetic data generation works by training a generative model (such as a GAN, variational autoencoder (VAE), or diffusion model) on the original sensitive dataset, then using this trained generator to produce new artificial samples. The intended result preserves useful population patterns without reproducing individual records. Learning a distribution does not ensure that separation, however; a generator can memorize its training data, so synthetic sampling alone cannot establish privacy.

Synthetic data generation typically advances through three ordered stages. First, in distribution learning, a generative model G_θ trains on real data $\mathcal{S}_{\text{real}} = \{x_1, x_2, \ldots, x_n\}$ to approximate

the underlying data distribution $p(x)$. Next, synthetic sampling produces new records $\mathcal{S}_{\text{synthetic}} = \{G_\theta(\mathbf{z}_1), G_\theta(\mathbf{z}_2), \ldots, G_\theta(\mathbf{z}_m)\}$ by sampling latent vectors from random noise $\mathbf{z}_i \sim \mathcal{N}(\mathbf{0}, \mathbf{I})$. Finally, empirical validation measures selected aspects of fidelity to $\mathcal{S}_{\text{real}}$ and tests for memorization or linkage under the chosen attack model. Sampling can preserve useful statistical properties without distributing the source table (Goncalves et al. 2020), but passing those tests does not prove that every training record is protected. A formal release guarantee requires an additional mechanism, and validation that accesses sensitive source data must itself remain within the intended privacy boundary.

While appealing, synthetic data generation faces important limitations. Generative models can suffer from mode collapse, failing to capture rare but important patterns in the original data. More critically, sophisticated adversaries can potentially extract information about the original training data through generative model inversion attacks or membership inference. The privacy protection depends heavily on the generative model architecture, training procedure, and hyperparameter choices, making it difficult to provide formal privacy guarantees without additional mechanisms like differential privacy.

Consider a hospital that wants to share synthetic data for ML research. It trains a GAN on 10,000 patient records containing demographics, lab results, and diagnoses, seeking to preserve useful relationships among those features. The hospital applies differential privacy during training and uses a tested accountant, specifying whether the protected contribution is one record or all records from one patient. Before release, it evaluates clinical fidelity and subgroup utility, since an acceptable overall score can hide poor performance for rare conditions. Memorization tests supply additional empirical evidence, while the formal guarantee comes from the accounted mechanism. DP limits the effect of a protected contribution; it does not prevent learning population patterns or all sensitive inferences based on them.

Across federated learning, differential privacy, homomorphic encryption, secure multiparty computation, and synthetic data, the privacy-preserving approaches differ in the guarantees they offer and in their system-level implications, and production designs often combine them, for example by applying differential privacy inside a federated setup or by reserving homomorphic encryption for the few inference stages whose inputs justify its cost. The choice of mechanism therefore depends on computational constraints, deployment architecture, and regulatory requirements. Table 0.198 compares these methods once the formal machinery of differential privacy is in place, and it evaluates privacy guarantees, runtime overhead, operational maturity, and use case fit together rather than as independent properties.

The defense stack now covers each tier, from hardware roots of trust through deployment, runtime, and model-design controls to the data path, where federation, secure aggregation, encrypted computation, and synthetic data each move raw records or individual updates away from a particular observer. Data locality, message hiding, encrypted computation, and synthesis alone do not bound what the released model reveals. A secure training cluster and confidential links can still publish a model that exposes memorized examples, as the GPT-2 case showed, because the leak travels through an authorized output rather than an unauthorized access. Closing that gap requires a guarantee stated about the release itself, with the protected contribution, the randomization, and the accumulated loss across releases all made explicit.

Differential Privacy

Suppose an adversary queries a medical diagnosis model using the exact attributes of a known patient and compares the answers with what a model trained without that patient would return. Encryption and access control cannot help here. The adversary is an authorized caller, and the query reaches only the trained model, never the stored records. A difference in one pair of predictions alone does not prove a privacy violation. The relevant question is how much the distribution of released outcomes permits an adversary to distinguish datasets with and without that patient, relative to a stated privacy bound.

Differential privacy constrains a randomized training or analysis mechanism so that its output distributions remain close on adjacent datasets. The adjacency definition specifies the protected contribution, such as one record or all records from one person. The information leakage invariant (principle 21) holds that any observable output can carry information about a protected training

record, so a privacy claim must name the protected unit and the observations available to an adversary. Differential privacy answers that requirement by bounding the additional evidence a release supplies about the named contribution. For a fixed mechanism and workload, tighter privacy bounds require more noise or fewer data-dependent releases, and the first cost appears as lost utility. Recovering that utility with more data or more training steps raises the training compute, the T_{compute} term the privacy definition flagged, and per-example clipping in DP-SGD lowers throughput on its own. Whether a tighter bound costs accuracy, compute, or both is therefore a design choice, which places DP in the deployment architecture rather than only in a legal checklist.

Definition 13.5: Differential privacy

Differential privacy is a mathematical guarantee that bounds changes in the output distribution of a randomized algorithm under a specified change to one protected contribution. The neighboring relation defines that contribution and the permitted change; approximate differential privacy permits a multiplicative bound and additive slack, formalized by the (ϵ, δ) bound $\Pr[\mathcal{M}(X) \in \mathcal{S}] \leq e^{\epsilon} \Pr[\mathcal{M}(X') \in \mathcal{S}] + \delta$ for adjacent datasets X and X' and any measurable output set $\mathcal{S}$ (Dwork et al. 2006; Dwork and Roth 2014).

1. **Significance**: The privacy budget ϵ converts an algorithmic property into an engineering currency that can be allocated, composed, and depleted. Production reports and benchmark studies show that privacy budgets are deployment-specific: Apple describes local-DP telemetry deployments with per-event ϵ values chosen by use case, while DP-SGD studies show accuracy and compute trade-offs across benchmark tasks (Apple Differential Privacy Team 2017; Abadi et al. 2016; Bu et al. 2020; De et al. 2022). Smaller ϵ raises the noise floor and degrades classification accuracy along the empirical frontier plotted in figure 0.195, where CIFAR-10 suffers double-digit accuracy drops even at $\epsilon = 8$; DP-SGD can also reduce training throughput because per-sample gradient clipping works against the batch-level parallelism that makes accelerator training efficient.
2. **Distinction**: Unlike de-identification, which removes identifiers from records and fails against re-identification through auxiliary data, and unlike statistical disclosure control, which depends on the attacker's model, differential privacy is a property of the algorithm, not of the data: the DP guarantee holds against any adversary, including one with arbitrary side information about other records in the dataset.
3. **Common pitfall**: A frequent misconception is that an ϵ label applies independently to every data access. Sequential composition of k DP mechanisms, each with privacy loss ϵ_0, yields total loss at most $k\epsilon_0$ under basic composition, with tighter bounds available from mechanism-specific accountants (section 26). A system that runs DP-SGD steps or answers interactive DP queries against sensitive data must therefore track cumulative loss and stop or redesign the release when the allocated budget is exhausted. Rotating cryptographic keys does not reset privacy loss, while querying a fixed DP-trained model is post-processing and incurs no additional training privacy loss.

The salary-average scenario introduced in section 20 uses the central model of differential privacy. Each person supplies a bounded salary to a trusted analyst; the analyst computes the sum, adds one Laplace draw calibrated to the sum's global sensitivity, and divides by the fixed, public group size. The example protects a salary replacement within a public roster. If participation itself is private, adjacency must be add/remove, meaning adjacent datasets differ by the presence or absence of one person's records rather than by a change to one value. Under that relation the count becomes data dependent and needs its own privacy treatment, so division by that count is not automatically safe post-processing. This differs from local differential privacy, in which each person randomizes a value before submission and the analyst aggregates the randomized reports. Both models compare output distributions on adjacent inputs, but their mechanisms, trust assumptions, and utility are not interchangeable.

Figure 0.194 illustrates output densities of a randomized mechanism $\mathcal{M}$ evaluated across adjacent datasets X (blue curve) and X' (orange curve). Overlap means that either dataset can produce

outcomes in the same region; it does not make the distributions identical. For a discrete outcome o in Range$(\mathcal{M})$, relative likelihood can be expressed as $\Pr[\mathcal{M}(X) = o]/\Pr[\mathcal{M}(X') = o]$ when the denominator is positive. Continuous curves instead depict densities, whose ratio is not their vertical difference. The (ϵ, δ) guarantee applies to probabilities of measurable output sets: it bounds one probability by e^{ϵ} times the other plus δ. For a continuous output, those probabilities are areas under the curves over the selected set. The definition therefore constrains distributional change across all such sets, rather than declaring an overlapping region private or treating additive slack as a pointwise density-ratio allowance.

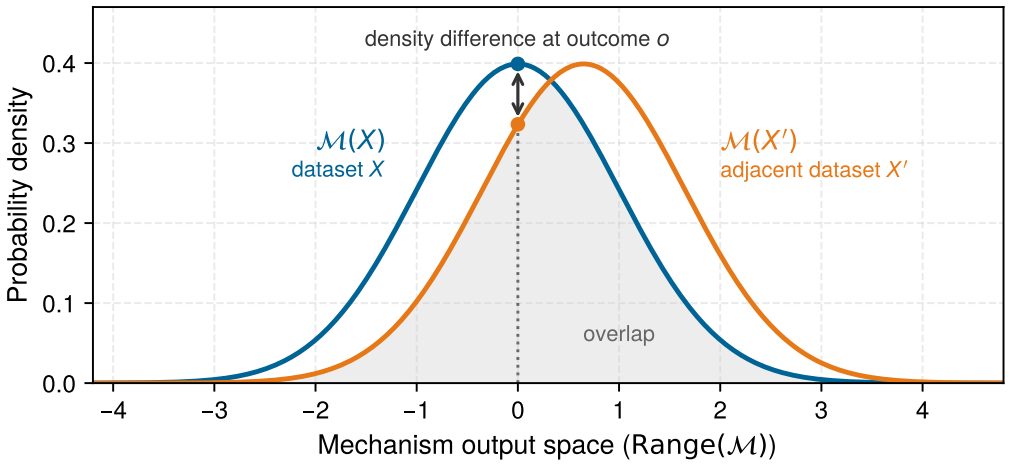


Figure 0.194: Differential privacy and output distributions: These illustrative densities show how outputs can overlap without having identical likelihoods. Differential privacy bounds how much the output distribution can change between adjacent datasets X and X'. The privacy parameters limit, rather than eliminate, the information an observer can gain about any one individual's inclusion.

A randomized algorithm $\mathcal{M}$ is said to be ϵ-differentially private if, for all adjacent datasets X and X' differing in one record, and for all measurable output sets $\mathcal{S} \subseteq \text{Range}(\mathcal{M})$, the following holds (Dwork et al. 2006; Dwork and Roth 2014):

$$\Pr[\mathcal{M}(X) \in \mathcal{S}] \leq e^{\epsilon} \Pr[\mathcal{M}(X') \in \mathcal{S}]$$

The parameter ϵ quantifies the privacy budget. In the pure-DP definition above, smaller values of ϵ impose a tighter likelihood-ratio bound; achieving that bound may require more noise or a different mechanism. No universal ϵ value denotes "strong," "moderate," or acceptable privacy: interpretation depends on adjacency, the additive slack δ in approximate DP, composition, and the consequences of inference. Under pure DP, the multiplicative factor e^{ϵ} bounds ratios of probabilities for the same output event on adjacent datasets. Approximate DP relaxes that event-probability inequality with additive slack, as developed below.

Figure 0.195 plots classification accuracy against privacy budget ϵ on a logarithmic scale across published MNIST and CIFAR-10 benchmarks (Abadi et al. 2016; Bu et al. 2020; De et al. 2022). These comparisons show setting-specific utility costs; differences in architectures and training procedures prevent isolating task complexity alone. The plotted MNIST results stay within about 3.5 percentage points of the 98.3 percent nonprivate baseline at budgets in the range $\epsilon \in [1, 2]$. For CIFAR-10 without extra data, the plotted results reach 73.0 percent in Abadi et al. (2016) and 81.4 percent in De et al. (2022) at $\epsilon = 8$, roughly 12 to 20 points below the displayed 93.0 percent nonprivate reference, so these CIFAR-10 settings pay several times the MNIST accuracy cost at a budget four times looser. That reference is a comparison point, not a ceiling on achievable accuracy. Selecting a budget therefore requires the full training regime, adjacency relation, additive slack, accountant, and utility requirements rather than the horizontal coordinate alone.

This bound limits how distinguishable the output distributions can be when a protected contribution changes; it does not make them identical or prevent inference of population-level patterns.

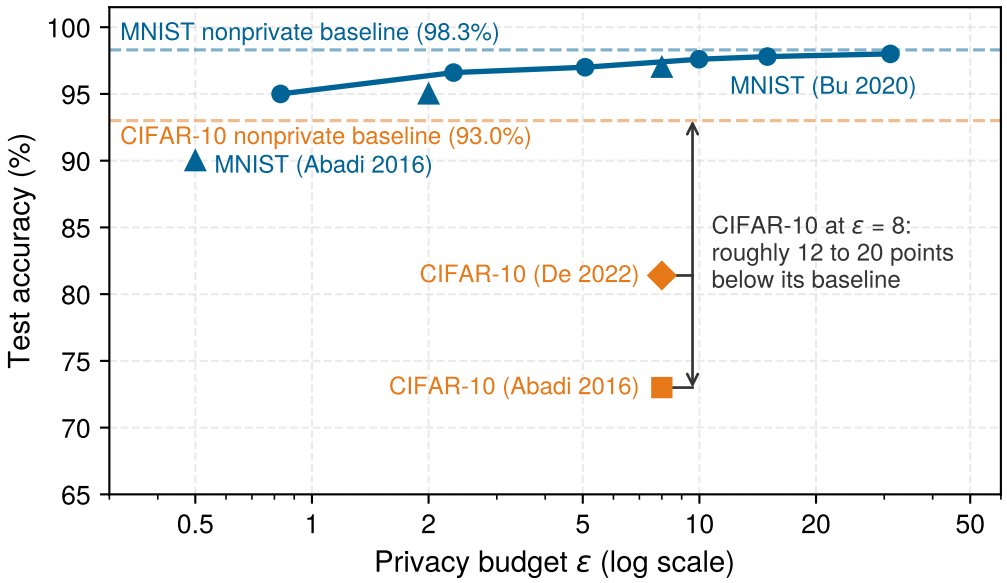


Figure 0.195: Published privacy-utility results: Accuracy at selected privacy budgets from (Abadi et al. 2016; Bu et al. 2020; De et al. 2022). MNIST stays comparatively accurate under single-digit epsilon budgets in these experiments, while CIFAR-10 trained from scratch without extra data remains harder, with De et al. reporting 81.4 percent at $\epsilon = 8$. Comparisons require the full mechanism, accountant, adjacency relation, training regime, and data rather than epsilon alone.

Common DP mechanisms add calibrated noise to model updates or query responses, using distributions such as Laplace or Gaussian. Training techniques like differentially private stochastic gradient descent[25] combine contribution bounds with calibrated noise and composition accounting. Their guarantee applies to the specified contribution and release, which must be identified before selecting the mechanism.

[25] **DP-SGD (Differentially Private Stochastic Gradient Descent)**: Introduced by Abadi et al. (2016), DP-SGD clips each per-sample gradient and adds calibrated Gaussian noise. Per-example clipping adds memory, recomputation, and reduction work that ordinary minibatch training avoids; vectorized clipping implementations recover much of the parallelism, so the throughput cost must be measured for the chosen model and implementation.

Mathematical foundations and privacy parameters

Production privacy claims need an accounting boundary. Repeated training steps, retraining runs, or queries that access protected data may compose, while post-processing a fixed DP release incurs no additional privacy loss for that data. The mathematical foundations specify the guarantee, noise calibration, and accounting for those data-dependent operations. Systems that manage sensitive datasets need this distinction before attaching an ϵ value to a deployed release.

The (ϵ, δ)-differential privacy formulation

The pure ϵ-DP definition provides strong guarantees but can be overly restrictive for practical ML applications. The relaxed formulation already stated in the definition callout, (ϵ, δ)-differential privacy, adds slack δ to the probability bound controlled by ϵ, and it is restated here as the starting point for noise calibration. Approximate DP is widely used with Gaussian perturbations in deep learning. Its role follows from the probability bound and noise calibration, not from unbounded support alone; Laplace noise also has unbounded support.

Formally, a randomized algorithm $\mathcal{M}$ satisfies (ϵ, δ)-differential privacy if for all adjacent datasets X, X' and all measurable output sets $\mathcal{S}$:

$$\Pr[\mathcal{M}(X) \in \mathcal{S}] \leq e^{\epsilon} \Pr[\mathcal{M}(X') \in \mathcal{S}] + \delta$$

The parameter δ is additive slack in this event-probability inequality, not generally the probability of a catastrophic disclosure. In practice, δ is commonly chosen smaller than the inverse dataset size, often $\delta < 1/D$ or smaller depending on policy and threat model; smaller δ tightens the guarantee at additional utility cost. For a dataset with 1 million records, $\delta = 10^{-12}$ specifies a small additive slack, but does not by itself assign a probability to every possible privacy failure.

Noise mechanisms for achieving differential privacy

ML systems operationalize differential privacy through carefully calibrated noise injection. The two primary mechanisms used in ML systems differ in their noise distributions and applicability. The first is the Laplace mechanism. For pure ϵ-DP, it adds noise drawn from $\text{Lap}(\Delta f/\epsilon)$, where Δf is the global sensitivity of the function (the maximum change in output when one record changes). For a query f, the privatized output is:

$$\tilde{f}(X) = f(X) + \text{Lap}\left(\frac{\Delta f}{\epsilon}\right)$$

The Laplace distribution has density $p(x) = \frac{\epsilon}{2\Delta f}\exp\left(-\frac{\epsilon|x|}{\Delta f}\right)$, with scale parameter $b = \Delta f/\epsilon$. For a fixed query and adjacency relation, tightening the bound from $\epsilon = 1.0$ to $\epsilon = 0.1$ increases the noise scale by $10\times$. Individual noise draws remain random; the scale controls their distribution rather than fixing their magnitude.

The Laplace derivation shows why the noise scale must match sensitivity. To prove that the Laplace mechanism achieves ϵ-DP, consider the ratio of output densities on adjacent datasets X and X'. Let $f(X) = v$ and $f(X') = v'$, where $|v - v'| \leq \Delta f$ by the sensitivity bound. For any output o, the density ratio is:

$$\frac{p(o|X)}{p(o|X')} = \frac{\exp(-\epsilon|o - v|/\Delta f)}{\exp(-\epsilon|o - v'|/\Delta f)} = \exp\left(\frac{\epsilon(|o - v'| - |o - v|)}{\Delta f}\right)$$

Using the triangle inequality, $|o - v'| - |o - v| \leq |v - v'| \leq \Delta f$. Therefore:

$$\frac{p(o|X)}{p(o|X')} \leq \exp\left(\frac{\epsilon \cdot \Delta f}{\Delta f}\right) = e^{\epsilon}$$

This establishes that the Laplace mechanism satisfies ϵ-differential privacy. The derivation reveals why sensitivity calibration is necessary: the noise scale must match the maximum possible change in the query output to mask individual contributions.

The Gaussian mechanism serves the ML case where the relaxed (ϵ, δ) guarantee is acceptable. It adds noise with standard deviation σ_{mech} calibrated based on ϵ, δ, and the ℓ_2 sensitivity $\Delta_2 f$:

$$\tilde{f}(X) = f(X) + \mathcal{N}\left(\mathbf{0}, \sigma_{\text{mech}}^2 \mathbf{I}\right)$$

Unlike the Laplace mechanism, which achieves pure ϵ-DP, the Gaussian mechanism generally requires the relaxed (ϵ, δ)-DP formulation because shifted Gaussian densities can have arbitrarily large likelihood ratios in the tails; bounding those tail events gives a sufficient way to establish the δ slack. The derivation works with the privacy loss, the log of the ratio between the two output densities at the observed output. Because the output is random, so is this log ratio, which is why it is called the privacy loss random variable.

For adjacent datasets with ℓ_2 sensitivity $\Delta_2 f$, the privacy loss at output $\mathbf{y}$ follows:

$$\mathcal{L}_{\text{priv}}(\mathbf{y}) = \ln \frac{p(\mathbf{y}|X)}{p(\mathbf{y}|X')} = \frac{\|\mathbf{y} - f(X')\|_2^2 - \|\mathbf{y} - f(X)\|_2^2}{2\sigma_{\text{mech}}^2}$$

For an adjacent pair attaining the sensitivity bound, when $\mathbf{y} = f(X) + \mathbf{z}$ for noise $\mathbf{z} \sim \mathcal{N}(\mathbf{0}, \sigma_{\text{mech}}^2 \mathbf{I})$, the privacy loss becomes a shifted Gaussian with mean $\frac{\Delta_2 f^2}{2\sigma_{\text{mech}}^2}$ and variance $\frac{\Delta_2 f^2}{\sigma_{\text{mech}}^2}$. For one application of the mechanism and $0 < \epsilon < 1$, a classic sufficient calibration is:

$$\sigma_{\text{mech}} \geq \frac{\Delta_2 f}{\epsilon}\sqrt{2\ln\left(\frac{1.25}{\delta}\right)}$$

This sufficient bound is a one-shot Gaussian-mechanism result within that parameter domain. Neither it nor the one-shot Laplace ratio $\Delta f/\epsilon$ of the salary example can set a DP-SGD noise multiplier by substituting the final training budget. DP-SGD clips sampled per-example gradients, adds Gaussian noise to their sum, and composes many such steps, so its budget requires a sampled-Gaussian accountant. Smaller ϵ or δ generally requires more noise, but the resulting accuracy change must be measured for the specific task and training procedure.

Napkin Math 13.4: One-shot Gaussian mechanism

Problem: Determine a sufficient noise standard deviation σ_{mech} for the Gaussian mechanism to achieve (ϵ, δ)-differential privacy for a single vector-valued query.

Variables: ℓ_2 sensitivity $\Delta_2 f = 1$, target $\epsilon = 0.5$, $\delta = 10^{-5}$.

Math: Classic sufficient bound requires $\sigma_{\text{mech}} \geq 9.7$.

Systems insight: This calculation applies to a single Gaussian release. DP-SGD repeats a Gaussian release at every optimization step, so its budget must be composed across thousands of steps, and the accountants of section 26 bound that composed total more tightly than adding up the per-step bounds would.

Gaussian noise fits the clipped-gradient mechanism because clipping explicitly bounds gradient norms in ℓ_2 space, making sensitivity analysis tractable. Rényi differential privacy accounting can retain mechanism-specific information to improve on generic composition bounds; that advantage belongs to mechanisms like clipped-gradient training and makes no case for Gaussian noise in every private computation.

A full training run applies a mechanism many times, so the analysis must distinguish one application from its repeated use. Basic composition bounds the total privacy loss by adding the bounds for successive releases about the same protected data. That gives a valid but often loose starting point. Moments accounting and Rényi differential privacy retain more information about each mechanism to obtain tighter bounds across noisy stochastic gradient descent (SGD) steps, then express the result as an (ϵ, δ) budget.

Privacy loss random variable and moments accountant

A more refined approach to privacy analysis tracks the privacy loss random variable, which measures how strongly an observation favors one adjacent dataset over the other through a log-likelihood ratio. For adjacent datasets X, X' and algorithm output o, the discrete-output expression is:

$$\mathcal{L}^{(o)}_{\text{priv},(X,X')} = \ln \frac{\Pr[\mathcal{M}(X) = o]}{\Pr[\mathcal{M}(X') = o]}$$

The privacy loss random variable characterizes the log-likelihood ratio between outputs on adjacent datasets; for continuous outputs, the ratio uses densities rather than point probabilities. A sufficient condition for (ϵ, δ)-DP is that every ordered adjacent pair satisfies $\Pr[\mathcal{L}_{\text{priv}} > \epsilon] \leq \delta$, with the output sampled from the numerator distribution. This tail condition is stronger than the general definition, but it enables composition analysis through moment-generating functions.

The moments accountant technique, introduced for DP-SGD by Abadi et al. (2016), bounds exponential moments of the privacy loss distribution. It retains more information about the mechanism than a single per-step privacy bound while still taking the worst case over adjacent datasets. For mechanism $\mathcal{M}$ with privacy loss $\mathcal{L}_{\text{priv}}$, the moments accountant computes:

$$\alpha_{\mathcal{M}}(\lambda_{\text{mom}}) = \max_{X,X'} \ln \mathbb{E}_{o \sim \mathcal{M}(X)} \left[\left(\frac{\Pr[\mathcal{M}(X) = o]}{\Pr[\mathcal{M}(X') = o]} \right)^{\lambda_{\text{mom}}} \right]$$

for moment order λ_{mom}. If each of k steps satisfies the same log-moment bound, composition gives an upper bound of $k \cdot \alpha_{\mathcal{M}}(\lambda_{\text{mom}})$. Applying the Markov inequality then yields (ϵ, δ) bounds:

$$\epsilon(\delta) = \min_{\lambda_{\text{mom}} > 0} \left[\frac{k \cdot \alpha_{\mathcal{M}}(\lambda_{\text{mom}}) + \ln(1/\delta)}{\lambda_{\text{mom}}} \right]$$

The numerical result depends on the sampling rule, sampling rate, noise multiplier, step count, adjacency relation, and accountant. For example, Abadi et al. (2016) report that with sampling rate $q = 0.01$, noise multiplier $\sigma = 4$, and $\delta = 10^{-5}$, their moments accountant gives $\epsilon = 1.26$ after 100 epochs and $\epsilon = 2.55$ after 400 epochs; the corresponding strong-composition bounds are 9.34 and 24.22. These values belong to that experiment and are not reusable constants for another DP-SGD run.

Renyi differential privacy and composition

Rényi differential privacy (RDP), introduced by Mironov (2017), provides a convenient representation for composition by tracking Rényi divergence. A mechanism $\mathcal{M}$ satisfies $(\alpha_{\mathrm{R}}, \epsilon_{\mathrm{R}})$-RDP if for all adjacent X, X':

$$\mathcal{D}_{\alpha_{\mathrm{R}}}(\mathcal{M}(X)\|\mathcal{M}(X')) = \frac{1}{\alpha_{\mathrm{R}}-1}\ln \mathbb{E}_{o\sim\mathcal{M}(X')}\left[\left(\frac{\Pr[\mathcal{M}(X)=o]}{\Pr[\mathcal{M}(X')=o]}\right)^{\alpha_{\mathrm{R}}}\right] \leq \epsilon_{\mathrm{R}}$$

where $\alpha_{\mathrm{R}} > 1$ is the Rényi order. RDP composition is simple: if mechanism $\mathcal{M}_i$ satisfies $(\alpha_{\mathrm{R}}, \epsilon_{\mathrm{R},i})$-RDP, then their composition satisfies $(\alpha_{\mathrm{R}}, \sum_i \epsilon_{\mathrm{R},i})$-RDP. This representation avoids repeatedly applying a generic (ϵ, δ) composition theorem to every training step.

For an unsampled Gaussian mechanism with unit ℓ_2 sensitivity and noise standard deviation σ_{mech}, the RDP guarantee is:

$$\epsilon_{\mathrm{R}}(\alpha_{\mathrm{R}}) = \frac{\alpha_{\mathrm{R}}}{2\sigma^2_{\text{mech}}}$$

Subsampling changes this mechanism. In particular, $q^2\alpha_{\mathrm{R}}/(2\sigma^2_{\text{mech}})$ is only a leading-order approximation in restricted regimes, not a privacy guarantee that can certify a DP-SGD run. A sampled-Gaussian accountant must evaluate the specified sampling scheme and adjacency relation at multiple Rényi orders, compose the resulting per-step bounds across the actual number of steps, and then convert the result to (ϵ, δ)-DP. Production implementations should use a tested accountant such as Google DP Accounting, TensorFlow Privacy, or Opacus and record its version and sampling convention with the released model.

This RDP guarantee supplies a valid (ϵ, δ)-DP bound using the following conversion; the result is an upper bound on privacy loss, not generally its exact value:

$$\epsilon = \epsilon_{\mathrm{R}} + \frac{\ln(1/\delta)}{\alpha_{\mathrm{R}}-1}$$

optimized over α_{R}. The moments-accountant and RDP views are closely related; which implementation gives the tightest reported bound depends on the mechanism, orders, and numerical accountant rather than a universal multiplier.

DP-SGD accountant inputs for image classification

Consider training a CNN on 50,000 CIFAR-10 images with $(\epsilon, \delta) = (3, 10^{-5})$ target privacy. DP-SGD groups examples into **lots**, the randomly sampled sets whose clipped gradients are summed and share one noise draw per step; with Poisson sampling the lot size varies from step to step around its expected value. The run uses DP-SGD with:

- Poisson sampling with expected lot size $B = 4{,}000$ (inclusion probability $q = B/D = 0.08$)
- Per-example gradient clipping norm $C = 1$
- Noise multiplier $\sigma = 1.3$ (noise scale relative to clipping)
- Training for $N_{\text{epochs}} = 60$ epochs ($k = N_{\text{epochs}} \cdot D/B = 750$ steps)

These inputs do not determine a privacy guarantee through the shortcut $q^2\alpha_{\mathrm{R}}/(2\sigma^2)$. Before release, a tested sampled-Gaussian accountant must evaluate Poisson sampling with add/remove adjacency, compose all 750 steps, convert to the specified δ, and verify whether the result meets target $\epsilon = 3$. The release record must pin the accountant library and version, sampling convention, adjacency relation, and evaluated Rényi orders.

Training for $N_{\text{epochs}} = 25$ reduces the number of composed steps, while reducing the expected lot size to $B = 2{,}000$ changes the Poisson inclusion probability to $q = 0.04$. The accountant must be rerun for either change; neither direction should be assigned a numerical ϵ through the leading-order shortcut. Reaching the target typically requires adjusting noise, passes, or sampling while measuring the resulting utility and compute cost.

Practical DP deployment requires careful consideration of computational trade-offs, privacy budget management, and implementation challenges. Table 0.198 compares privacy-preserving technique trade-offs across five approaches, including federated learning. The maturity labels are a

deployment snapshot for the regimes discussed here, not a permanent ranking of the underlying techniques. Cryptographic guarantees depend on key custody and the stated adversary model; they do not prevent an authorized output from revealing sensitive information. Differential privacy instead bounds disclosure through the released result under a specified adjacency relation.

Table 0.198: Privacy-preserving technique comparison: Data privacy techniques impose varying computational costs and offer different levels of formal privacy guarantees, requiring practitioners to balance privacy strength with model utility and deployment constraints. The table summarizes key properties (privacy guarantees, computational overhead, maturity, typical use cases, and trade-offs) to guide informed decisions when designing privacy-aware machine learning systems.

Technique	Privacy Guarantee	Computational Overhead	Deployment Snapshot	Typical Use Case	Trade-offs
Differential Privacy	Formal (ϵ, δ)-DP	Moderate to High	Production	Training with sensitive or regulated data	Reduced accuracy; careful tuning of ϵ/noise required to balance utility and protection
Federated Learning	Local data retention only	Moderate	Production	Cross-device or cross-org collaborative learning	Gradient leakage risk; requires secure aggregation and orchestration infrastructure
Homomorphic Encryption	Ciphertext confidentiality	High	Experimental	Inference in untrusted cloud environments	High latency and memory usage; suitable for limited-scope inference on fixed-function models
Secure MPC	Protocol-dependent input privacy	Very High	Experimental	Joint training across mutually untrusted parties	Expensive communication; challenging to scale to many participants or deep models
Synthetic Data	None from synthesis alone	Low to Moderate	Emerging	Data sharing, benchmarking without direct access to raw data	May leak sensitive patterns if training process is not differentially private or audited for fidelity

Increasing the noise to reduce ϵ may degrade model accuracy, especially in low-data regimes or fine-grained classification tasks. Consequently, DP is often applied selectively (either during training on sensitive datasets or at inference when returning aggregate statistics) to balance privacy with performance goals (Dwork and Roth 2014).

Privacy budget composition

A critical aspect of differential privacy is that privacy loss accumulates across additional data-dependent DP releases about the same protected population. If an organization trains and releases 10 models on the same dataset, each with $\epsilon = 1$, basic composition gives a total bound of $\epsilon = 10$, although a mechanism-specific accountant may give a tighter bound. Repeated use of a fixed released DP model is post-processing and does not add to its training privacy loss.



Ten $\epsilon = 1$ releases add up to a basic bound of $\epsilon = 10$.

The privacy ledger depends on three primary composition tools. Simple composition bounds the cumulative privacy loss of k pure-DP mechanisms with bounds ϵ_i by $\sum \epsilon_i$; for approximate DP, their additive slack parameters also accumulate. In suitable parameter regimes, advanced composition improves the bound using square-root and linear terms while allocating additional slack in the probability inequality. For iterative mechanisms like DP-SGD, Rényi differential privacy (RDP) tracks divergence bounds across steps before converting to an explicit (ϵ, δ) guarantee. Conversion tightness depends on the mechanism, sampling assumptions, evaluated orders, and conversion method, so RDP is not uniformly better than every alternative accountant. Organizations must maintain a privacy ledger for the protected population and halt or redesign further data-dependent releases when the allocated bound would be exceeded.

Quantifying the privacy-utility trade-off

The theoretical framework of differential privacy translates into measurable accuracy degradation in practice. Empirical studies show that the trade-off depends strongly on task complexity, architecture, privacy accountant, pretraining, and whether extra public data are allowed. Table 0.199 therefore lists source-backed comparison points rather than treating a single set of benchmark rows as universal.

Table 0.199: Privacy-accuracy trade-offs: Published DP-SGD accuracy points are setting-specific. Older DP-SGD experiments showed strong privacy-utility costs on MNIST and CIFAR-10 (Abadi et al. 2016), while later image-classification work showed that careful tuning, larger models, and pretraining or extra public data can substantially improve private accuracy (De et al. 2022).

Source/setting	Dataset	Training regime	Privacy budget	Reported private accuracy
Abadi 2016	MNIST	DP-SGD neural-network experiment	$(8, 10^{-5})$-DP	97%
Abadi 2016	CIFAR-10	DP-SGD CIFAR-10 experiment	$(8, 10^{-5})$-DP	73%
De 2022	CIFAR-10	Wide-ResNet, no extra data	$(8, 10^{-5})$-DP	81.4%
De 2022	ImageNet	NFNet-F3 with JFT-4B pretraining	$(8, 8 \times 10^{-7})$-DP	86.7%

These empirical results show why a privacy budget alone does not predict utility. The original DP-SGD experiments achieved higher accuracy on MNIST than on CIFAR-10, while later training methods improved the CIFAR-10 result under the listed budget. Public pretraining changes the learning problem again, so comparisons must state which data receive protection and which data support pretraining. The table supplies selected operating points rather than a complete privacy-accuracy curve. A deployment needs its own sweep over ϵ with the other privacy assumptions and acceptance criteria held explicit.

Decision framework for differential privacy deployment trade-offs

The quantified trade-offs turn differential privacy from a mathematical guarantee into a deployment decision. The decision begins by specifying the required protection, then asks whether a mechanism can deliver it at acceptable utility and systems cost. A mandatory privacy bound is a feasibility constraint; an accuracy improvement does not by itself justify exceeding it.

Start with the regulatory and legal requirement. DP becomes especially valuable when policy, contracts, audits, or risk assessments require demonstrable privacy bounds. Regulations rarely mandate DP by name, but GDPR's data-protection-by-design principle (European Parliament and Council of the European Union 2016) and privacy-by-design framing (Cavoukian 2012) motivate privacy-preserving system design, while HIPAA's technical safeguards require controls such as access control, audit controls, integrity protections, authentication, and transmission security (U.S. Department of Health and Human Services 2005). DP can complement those controls by documenting a mathematical privacy-loss bound, but it does not replace HIPAA safeguard implementation. Organizations handling EU health data, US medical records, or California personal data subject to California state privacy laws (CCPA/CPRA) should evaluate DP as one possible compliance-supporting mechanism.

Next, match the threat model to the mechanism. DP bounds how much any one record can change the released distribution, even when an adversary chooses queries adaptively and combines outputs with auxiliary information. This property can limit membership inference and record-level extraction, but only under the stated adjacency relation and composed budget. When the primary threats are data breaches of stored data rather than inference from a release, encryption and access controls address the relevant boundary; DP does not substitute for them.

The dataset and task then determine whether the guarantee is usable. Effective DP training depends on whether the clipped signal remains learnable after adding calibrated noise. Effective sample size captures why repeated observations, class imbalance, and subgroup rarity can limit learning even in a large table. Task complexity also matters, but class count alone does not determine noise tolerance; representation, label quality, and the training regime affect the result. The data sensitivity distribution raises a separate question about whose errors carry the greatest consequences. Rare subgroups may suffer disproportionate utility loss even when the same formal privacy bound covers every protected contribution. This unequal utility impact must not be confused with unequal privacy parameters or with the mathematical sensitivity used to calibrate noise.

The utility budget must also be explicit. Before deployment, the team must define task-specific acceptance criteria for overall performance, rare subgroups, calibration, and safety-relevant errors. An

average accuracy change that appears small can still be unacceptable if DP noise concentrates errors on a protected subgroup or a high-cost clinical class. Table 0.199 supplies published comparison points, but the release decision requires an experiment on the actual model and data.

Finally, the computational budget decides whether the design can ship. DP-SGD adds clipping, noise generation, and accounting work, while attaining acceptable private utility can change the batch size and training duration. The resulting runtime and memory cost depends on the model and implementation. Deployment planning needs measured time to the required utility under the privacy budget, rather than a universal compute multiplier.

Decision matrix summary

Use DP when a formal participation or contribution bound addresses the stated threat model, a tested accountant covers the relevant data-dependent releases, measured utility satisfies the task's acceptance criteria, and the training system can afford the mechanism's compute and memory cost. Use different controls when the primary boundary is unauthorized access to stored data. If a required DP bound cannot coexist with acceptable utility, redesign the mechanism, task, or data strategy, or withhold the release. Federated learning, encryption, access control, and audit logging do not substitute for a required release guarantee merely because they are easier to deploy.



Checkpoint 13.4: Applying the DP decision framework

A wearable cardiac monitor classifies arrhythmias from raw ECG signals collected on-device for 5,000 enrolled patients. The product is sold in the United States and is HIPAA-regulated; the training pipeline runs on a cloud cluster of 8 GPUs, and a competing vendor has incentive to extract the model. Apply each of the five decision criteria to determine whether DP-SGD belongs in the training pipeline.

- ☐ **Criterion 1 (regulatory)**: decide whether HIPAA supports a DP guarantee here and identify the documentation DP supplies that ad-hoc de-identification cannot.
- ☐ **Criterion 2 (threat model)**: identify the adversary populations that matter for a cardiac-monitor model and evaluate membership inference as a credible attack.
- ☐ **Criterion 3 (dataset characteristics)**: evaluate effective sample size, class imbalance, repeated measurements, and rare clinical subgroups before selecting a mechanism.
- ☐ **Criterion 4 (acceptable utility loss)**: define safety-critical error, calibration, and subgroup acceptance criteria, then measure whether the private model satisfies them.
- ☐ **Criterion 5 (compute)**: estimate the runtime and memory cost of private training on the stated cloud allocation, measure utility under the selected privacy budget, and identify the binding deployment constraint.

This framework treats DP as one tool in a privacy-preserving toolkit rather than a universal solution. Production deployments often combine an accounted DP mechanism with data minimization, federated execution where raw-data centralization is out of scope, secure aggregation for contribution confidentiality, and access controls for deployment security. The following DP-SGD audit identifies the inputs that an external tested accountant must evaluate before a release can claim an operational privacy budget.



Napkin Math 13.5: DP-SGD accountant-input audit

Scenario: Train a sentiment classifier on 100,000 customer reviews seeking a record-level add/remove guarantee: adjacent datasets differ by the presence or absence of one review. Per-example clipping bounds each review's contribution; it does not protect all reviews from a repeat customer as one unit. The target budget is $\epsilon \leq 8$ and $\delta = 10^{-6}$.

Step 1: Configure DP-SGD parameters.

- Dataset size: $D = 100{,}000$

- Poisson expected lot size: $B = 2{,}000$ (inclusion probability $q = B/D = 0.02$)
- Gradient clipping norm: $C = 1$
- Training epochs: $N_{\text{epochs}} = 10$ (total steps $k = N_{\text{epochs}} \cdot D/B = 500$)
- Target: $\epsilon = 8$, $\delta = 10^{-6}$

Step 2: Record the candidate noise multiplier. For $\sigma = 0.8$, the accountant must evaluate the specified Poisson-sampled Gaussian mechanism and compose all $k = 500$ steps. The accountant must use the declared review-level add/remove adjacency and the same Poisson sampling convention as the mechanism.

Step 3: Run the accountant and adjust σ. A tested sampled-Gaussian accountant takes the Step 1 inputs and the candidate σ, composes the per-step Rényi bounds, and converts them to the ϵ reached at the target δ. If that ϵ exceeds the target, the operator raises σ, trains for fewer epochs, or lowers q, and reruns the accountant; each change trades accuracy for budget. This example deliberately reports no numerical ϵ, because the leading-order shortcut is not a valid substitute for the accountant. A production release must verify whether the run meets target $\epsilon \leq 8$, and pin the library version, sampling convention, adjacency relation, and evaluated orders.

Step 4: Expected accuracy impact. The 92 percent nonprivate accuracy is a scenario assumption. Private accuracy must be measured for the actual model, clipping rule, optimizer, and data distribution.

Systems insight: The implementation is accountable only if the mechanism and the accountant agree: clipping bounds sensitivity, noise sets the privacy-utility trade-off, and accumulated epsilon becomes a release gate for the trained artifact.

The guarantee itself comes from clipping, calibrated noise, and the privacy accountant; listing 0.22 shows the mechanism sequence without implementing an accountant.

Listing 0.22: DP-SGD training step: Per-step clipping, noise addition, and accountant update that together enforce the privacy budget.

```
fix a public normalization B for the expected lot size under the sampling design
check prospectively that the accountant permits the next step within the budget
independently sample each record with probability q (Poisson sampling)
clip each sampled per-example gradient to norm C
sum clipped gradients; use the zero vector for an empty lot
add noise N(0, sigma^2 C^2 I), then divide by fixed B
take one optimizer step with the privatized gradient
record the step in the matching privacy accountant
stop before a step that would exceed the release budget
account for private-data-dependent selection; retuning does not erase prior releases
```

Differential privacy completes the data layer of the defense stack. With the mechanisms of every layer now in view, the remaining engineering questions are which of them a given deployment needs and in what order to adopt them.

Selecting and Sequencing Defenses

Moving from mathematical guarantees to production controls requires more than setting an epsilon value. A common mistake is attempting to deploy every defense at once, including differential privacy, trusted execution environments, adversarial training, model watermarking, and red-team automation, while basic controls such as access boundaries and artifact signing remain weak. Two decisions prevent that mistake. The first selects the defenses a deployment context requires; the second sequences them so that each control rests on the ones beneath it.

Defense selection by deployment context

The hardware mechanisms of table 0.197, the deployment and runtime controls, and the cryptographic and statistical privacy techniques of the data layer form a menu rather than a recipe. The

appropriate defense for any given deployment depends on three interacting factors: the threat model (who attacks and with what capabilities), the deployment context (what computational and latency budgets exist), and the regulatory environment (what legal mandates constrain design). A healthcare system training federated diagnostic models faces fundamentally different threats than a public-facing LLM chatbot, and each demands a distinct combination of the mechanisms surveyed in this chapter. Table 0.200 provides a defense selection framework that maps seven common deployment contexts to their primary threats, recommended defense combinations, and the trade-offs that each combination requires evaluating. The rows that include differential privacy require an accounted mechanism, built from the sensitivity and composition machinery of section 25, rather than a universal privacy-budget value.

Table 0.200: Defense selection framework: Maps deployment contexts to threat-specific defensive strategies and deployment trade-offs. The framework provides starting points for security architecture design, highlighting primary threats, recommended defense combinations, and key implementation trade-offs across seven common ML system deployment scenarios.

Deployment Context	Primary Threats	Recommended Defenses	Key Trade-offs
Healthcare ML (federated diagnostic models)	Data leakage (HIPAA violation); membership inference; unauthorized access	Accounted differential privacy for training when the threat model requires it; federated learning across hospitals; TEE for inference on sensitive data; audit logging and RBAC	Privacy and TEE parameters require task-specific utility and latency measurement
Financial ML (fraud detection API)	Model theft (IP loss); adversarial evasion; data poisoning	Model encryption (AES-256) at rest; HSM for cryptographic key management; adversarial training on perturbed transactions; input validation and per-principal rate limiting; output confidence monitoring	HSM units cost roughly $20,000–$100,000 each before integration and certification; rate limiting may impact legitimate high-frequency users
Edge ML (mobile/IoT devices)	Physical access; side-channel attacks; model extraction	Secure boot; a suitable TEE; authenticated encrypted model storage; PUF-backed device identity	Protected working set, paging support, power cost, and physical-attack resistance depend on the platform
Cloud ML Training (multi-tenant platform)	Data poisoning; backdoor injection; gradient leakage	Secure data pipelines with provenance; accounted DP-SGD when participation leakage is in scope; gradient verification and anomaly detection; secure aggregation for federated training; model watermarking for IP protection	DP and verification overhead depend on implementation and workload; federated aggregation requires authenticated, confidential communication
Public-Facing LLM (chatbot/API)	Prompt injection; data extraction (training leakage); abuse/overuse	Narrow tool permissions; input/output policy checks; isolated execution; authentication and rate budgets	Measure latency and false-positive cost; filtering and confidence scores do not guarantee resistance to injection
Multi-Party ML (cross-organizational training)	Data sharing restrictions; curious or malicious participants; regulatory duties	Federated learning (no raw data sharing); SMPC for secure aggregation; accounted differential privacy when participation leakage is in scope; homomorphic encryption for selected operations	Communication and cryptographic overhead depend on topology and protocol; utility must be measured for the selected privacy mechanism; requires agreements for liability
Critical Infrastructure (autonomous vehicles, power grids)	Supply chain compromise; real-time adversarial attacks; safety-critical failures	Hardware attestation (trusted platform module, or TPM, and PUF); Secure Boot and runtime integrity checks; redundant model validation; fault injection detection; fail-safe fallback mechanisms	Validate physical threat coverage, latency, fail-safe behavior, and the required assurance process



Checkpoint 13.5: Mapping hardware threats to defenses

The chapter introduced six hardware-level attack categories, four hardware-security primitives, and a framework mapping deployment contexts to defenses (table 0.200). Apply that mapping to the scenarios below.

- ☐ **Primitive matching**: match fault injection on model weights and side-channel extraction from the inference pipeline to the most relevant hardware-security primitives.
- ☐ **Edge defense stack**: select a combination of primitives for an edge inference deployment facing physical access, side-channel attacks, and model extraction.
- ☐ **Supply-chain gap**: identify which supply-chain compromises remain outside the four primitives' guarantees in the selected edge deployment, and specify the provenance or inspection evidence needed to assess those risks.
- ☐ **TEE vs. attestation**: distinguish runtime isolation from cryptographic evidence about an execution environment, and identify which fault-injection and counterfeit-hardware risks remain outside those guarantees.

A recurring theme across table 0.200 is the cost of privacy. Differential privacy appears in three of seven deployment contexts, and each such row exposes an accuracy or systems cost that must be weighed against regulatory mandates and risk tolerance. The table is therefore a deployment triage tool rather than a universal recipe, because serialization, artifact integrity, access control, runtime isolation, and privacy budgets each defend a different boundary. Selecting the right defenses for a context settles what to build; the maturity model settles the order in which to build it.

Security and privacy maturity model

A maturity model asks which system property is currently unprotected: access boundary, data privacy, model integrity, adversarial robustness, or governance evidence. The dependency structure in table 0.201 keeps that choice tied to the boundary being defended.

Table 0.201: ML security and privacy maturity model: Security controls should be added according to the threat model and deployment context. The order is not a calendar; it is a dependency structure from basic access boundaries to stronger privacy, integrity, adversarial, and governance controls.

Maturity layer	Primary question	Control family
Access and configuration boundary	Who can touch data, weights, deployments, and logs?	Least privilege, service identity, encrypted transport, audit logging
Data and privacy boundary	What can be learned from training, fine-tuning, or output?	Privacy accounting, output limiting, secure aggregation, sensitive-data isolation
Model integrity boundary	How is the validated model and data path authenticated?	Signed artifacts, registry controls, hash checks, release gates, rollback paths
Adversarial and abuse boundary	What can an adaptive attacker extract, infer, or induce?	Query monitoring, rate limiting, robustness evaluation, red-team exercises
Governance and evidence boundary	Which obligations must be proven after deployment?	Compliance mapping, incident records, retention policy, reproducible control checks

The maturity layers are cumulative. Access controls and encrypted channels close paths that model-interface defenses do not cover, such as an exposed registry. Privacy analysis begins with the original training data and continues through fine-tuning, personalization, and telemetry feedback loops. When DP is required, the release budget becomes a system resource covering the relevant training, selection, and evaluation mechanisms that access protected data. Model-integrity controls protect the artifact path: signed manifests, key management, hash checks, and release gates connect the loaded model to the approved version, subject to the enforcement boundary remaining intact.

Adversarial evaluation tests deliberate, adaptive behavior in addition to accidental failures. Query monitoring and output limiting constrain extraction attempts, while robustness evaluation and red-team exercises test whether an attacker can induce unsafe behavior. Trusted execution environments and certified robustness defenses protect different boundaries, so each needs a threat model that justifies its costs and assumptions. Governance defines obligations and evidence requirements from the start, rather than entering only after technical controls. Audit logs, compliance mappings, incident records, and reproducible checks then help assess whether those obligations remain satisfied as the model, data, and traffic change.

Different domains traverse the model differently. A healthcare deployment prioritizes privacy accounting and governance evidence before broad patient-facing use. A financial fraud system emphasizes access control, model integrity, and abuse monitoring because extraction and evasion directly change loss exposure. An autonomous system emphasizes adversarial robustness and incident evidence because safety depends on behavior under distribution shift and physical-world perturbations. The point is not to follow a universal implementation calendar; it is to make the threat model determine which control boundary must mature next.

The evidence produced by these controls supports a separate governance decision: which uses are permitted, who accepts residual risk, and who can require remediation. Section 2 develops those institutional responsibilities. Here the engineering obligation is to make access decisions, release budgets, and incident histories verifiable.

The maturity model moves security from reactive patching toward proactive threat control. Even well-designed systems can still fail when teams mistake a local mechanism for a complete guarantee.

Fallacies and Pitfalls

A common ML security failure is treating a local mechanism as a system guarantee. Obscurity, differential privacy libraries, federated learning, or encrypted storage each solve one part of the threat model, but none substitutes for lifecycle-wide reasoning about data, models, interfaces, hardware, and distributed scale.

Fallacy: *Security through obscurity provides adequate protection for machine learning models.*

Hiding architectures or parameters does not establish security when an attacker can learn functionality through an exposed API. The extraction examples in section 8 show why query budgets, returned information, and the target task must be evaluated together; no universal query count or accuracy threshold applies. Adversarial examples can also transfer from surrogate models, although success depends on the models, data, and perturbation constraints (Nicolas Papernot, McDaniel, and Goodfellow 2016). Kerckhoffs's principle motivates defenses that remain useful when the mechanism is known. Access controls and query limits constrain exposure, output restrictions reduce available information, and monitoring supports investigation; watermarking serves attribution rather than preventing copying.

Pitfall: *Assuming that differential privacy automatically ensures privacy without considering implementation details.*

Treating differential privacy as a universal solution without specifying adjacency, parameter selection, and budget tracking leaves the release claim incomplete. The same ϵ can describe different protections under different adjacency relations, values of δ, sampling schemes, and compositions, while utility depends on the model, task, and data. Privacy budgets compose across additional data-dependent releases: releasing 10 separately trained models at $\epsilon = 1.0$ each gives a basic-composition bound of $\epsilon = 10$, not $\epsilon = 1.0$, although a mechanism-specific accountant may provide a tighter bound. Retraining, tuning, and evaluation mechanisms that access protected data must be included in the accounting boundary. Experiments using only a fixed DP release are post-processing and do not spend additional privacy budget for its training data.

Fallacy: *Federated learning inherently provides privacy protection without additional safeguards.*

This misconception assumes decentralization automatically ensures privacy, but individual updates can expose membership or reconstruct features of local training data. As examined in section 23, effective federated privacy requires controls matched to the adversary: secure aggregation hides individual contributions from the coordinator, an accounted DP mechanism bounds record- or user-level participation leakage under its stated adjacency relation, and authenticated encryption protects updates in transit. Organizations cannot claim privacy merely because raw records remain on devices; the protocol still releases information derived from those records.

Pitfall: *Planning poisoning defenses only for large training-data compromise.*

A small, strategically chosen set of poisoned examples can target a decision without causing a conspicuous drop in overall validation accuracy (Shafahi et al. 2018). Backdoor attacks make this distinction explicit: a model may behave normally on clean inputs while producing attacker-chosen

behavior when a trigger appears (Gu et al. 2017). The required poisoning fraction and resulting attack success depend on attacker access, the training procedure, and the trigger; a universal percentage would conceal those dependencies. Defenses must therefore evaluate targeted behavior and provenance, including user-generated ingestion paths, rather than treating a low estimated contamination rate as a safety guarantee. Retraining or transfer learning also requires renewed testing instead of an assumption that the trigger has disappeared.


Fallacy: *Security can be isolated from the rest of the ML system.*

Component defenses leave gaps when the same asset remains exposed through another path. Per-user query quotas, output perturbation, and top-k filtering at a public API do not protect weights in an unauthenticated registry or query-response pairs in exposed logs. As established in section 3, threat modeling must follow the asset through collection, training, storage, deployment, and monitoring. A failed boundary can defeat controls that depend on it, while independent controls may still limit the compromise. The engineering task is to identify both the bypass path and the protections that remain effective, rather than assume either that one protected interface secures the whole system or that every local failure defeats every guarantee.

Pitfall: *Underestimating the attack surface expansion in distributed ML systems.*

Organizations secure single-node ML systems effectively but fail to recognize that distributed architectures introduce additional trust boundaries and communication channels. An all-to-all topology has $\mathcal{O}(N_{\text{nodes}}^2)$ links, whereas a ring has $\mathcal{O}(N_{\text{nodes}})$ links. Link count alone does not determine vulnerability count, but every additional node, credential, and channel must be included in the threat model.

In the reference training cluster of 1,024 GPUs (128 nodes with 8 GPUs each), every node is at once a gradient contributor, a fabric endpoint, and a key holder, which is why section 11 treats worker admission, collective traffic, shared accelerators, and attestation as boundaries of their own. Federated learning with 10,000 clients creates 10,000 separately managed endpoints whose attestation support and coverage may differ. Aggregation methods that inspect individual updates also need reconciliation with protocols that hide those updates; combining the two requires a design that preserves both guarantees. Effective distributed ML security therefore requires threat modeling the added nodes and boundaries: securing inter-node channels, managing identity across security domains, and coordinating policies across heterogeneous infrastructure.



Same nodes, many more channels, and every all-to-all link joins the threat model.

Recognizing that the shift from a single node to a distributed cluster adds nodes, channels, credentials, and trust boundaries rules out perimeter-only thinking. Security for the machine learning fleet must be layered, measured, and tied to the full lifecycle.

Summary

Privacy and security protect the machine learning fleet's models, data, hardware, and service boundaries from extraction, poisoning, manipulation, and unauthorized access. The breach cases establish the boundaries a fleet must defend: Strava shows that an aggregate release can disclose behavior without leaking a single record, Stuxnet exposes supply-chain trust, the Jeep Cherokee hack exposes insufficient isolation, and Mirai exposes weak endpoint identity. Learned behavior adds further boundaries because poisoned data, extraction queries, and prompt injection can compromise a system through otherwise legitimate interfaces, and the fleet adds boundaries of its own that no API gateway sees: the gradient each worker contributes, the fabric that carries it, the accelerators tenants share, and the evidence that each node runs approved code. Hardware trust anchors protect execution, provenance connects artifacts to release decisions, runtime controls contain abuse, and differential privacy bounds participation leakage. These mechanisms compose only when each is tied to the actor and exposure it addresses.

Their costs span all three C^3 axes and can enter different terms of the Fleet Law (equation 0.3). Output shaping, input validation, redundant gradient checks, DP-SGD clipping and noise, and protected execution can add work to T_{compute}. Fabric encryption, gathering individual updates for some robust aggregation methods, and masked federated uploads can increase $T_{\text{comm}}(N)$; offload and overlap determine how much reaches the critical path. Admission checks, key rotation, privacy-ledger checks, and aggregation thresholds can add to $T_{\text{sync}}(N)$ when the workflow waits for them. Federated protocols also need deadlines and dropout handling rather than an assumption that every

client responds. Capacity planning must measure these costs in the deployed path so that operating targets do not depend on bypassing a control under load.

Key Takeaways: Defend the model, not just the server

- **The model is the attack surface**: ML systems inherit ordinary server threats but add attacks against the learned boundary itself. Poisoned data, model extraction, adversarial inputs, and prompt injection can compromise behavior without exploiting a traditional software vulnerability.
- **Privacy is an accounted budget**: Because models can encode information about sensitive data, privacy cannot be treated as anonymization at the perimeter. Differential privacy (principle 21) offers bounded (ϵ, δ) claims only when all data-dependent DP mechanisms are composed correctly; querying a fixed DP-trained model is post-processing and does not add training privacy loss.
- **Generative systems need enforceable action boundaries**: Prompt injection, tool misuse, and PII leakage pass through normal text channels. Treat model output as untrusted, enforce least privilege and validated tool arguments, and keep authorization in an external policy layer.
- **The fleet's own interfaces are trust boundaries**: An unbounded malicious update can dominate a mean; the examined all-gather implementation of robust aggregation adds about $N_{\mathrm{DP}}/2$ times the traffic, an implementation cost rather than a universal lower bound. Worker admission, collective traffic, and shared accelerators need separate controls, and attestation alone does not establish update correctness.
- **Provenance bounds trust and enables recovery**: A model can be trusted only as far as its record of data, code, weights, and hardware reaches (principle 20). Signed datasets, locked dependencies, registry permissions, and deployment attestations let operators answer which data, code, principal, node, and checkpoint produced a suspect model. Without that chain, rollback and forensics become guesswork at fleet speed.
- **Hardware trust has explicit boundaries**: TEEs isolate execution, secure boot verifies an authorized boot chain, and HSMs protect keys and cryptographic operations. These mechanisms address different trust boundaries; they do not establish that model behavior is correct or that an authorized output preserves privacy.


A fleet can execute every authorized operation correctly and still disclose sensitive information through an approved release. The information leakage invariant (principle 21) therefore makes the release boundary as important as the execution boundary. A deployment decision must establish both who can access the computation and what its outputs allow an observer to learn.

What's Next: From security to resilience

This chapter has treated adversarial intent and control, establishing who can infer, manipulate, disable, or authorize what across data, model, interface, and infrastructure boundaries. Those controls decide who may reach the model and what its releases may disclose. They cannot show that its answers stay valid once inputs, data distributions, or hardware depart from the conditions under which it was validated. A fleet can pass every access check and every health signal while its predictions degrade without raising an error, whether from road conditions its training data never covered, from a crafted input that satisfies the interface contract, or from a faulty accelerator that keeps returning plausible numbers. Detecting and bounding that silent failure requires behavioral evidence about accuracy, calibration, and fallback under environmental shift, input-level attack, and system faults, which is the robustness problem the next chapter takes up.

↪ Drift detection, adversarial-defense evaluation, and poisoning defenses are developed in chapter 26.

Robust AI

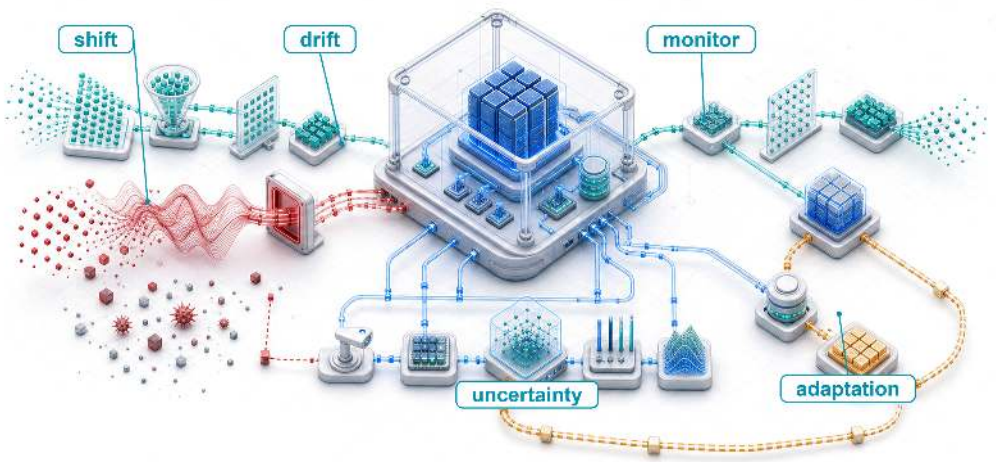

Purpose

Why can machine learning systems fail silently even when conventional health signals remain normal?

A model service can maintain stable latency and uptime while its predictions become unreliable. Changes in operating conditions, manipulated inputs, or corrupted computation may leave ordinary health signals untouched, allowing errors to affect decisions long before business metrics expose them. Conventional software can also fail silently; machine learning adds statistical failures that a successful request cannot reveal. At fleet scale, replicating a model across healthy machines does not remove a weakness shared by every copy. Traffic also spans different regions, devices, and user populations, so acceptable average performance can conceal a serious failure in one group. The decision to continue answering therefore requires evidence about the conditions under which the predictions remain useful, not merely confirmation that the service is available. Producing that evidence consumes resources, and responding to it creates further obligations. Additional checks can delay answers; rejecting uncertain requests can overwhelm reviewers or a backup service. A replacement model must demonstrate acceptable behavior before the fleet adopts it, while waiting too long can prolong exposure to errors. The engineering challenge is to connect evidence to a bounded response without exhausting the resources needed to serve useful predictions. Protection must cover the model and the surrounding data path, because either can invalidate the result. In C^3 terms, verification spends compute and communication, while coordination determines when the evidence should trigger investigation, fallback, or a halt.

Learning Objectives

- Classify robustness challenges into environmental shifts, input-level attacks, and system-level faults
- Diagnose apparent model failures using input replay, deployment history, and correlated system evidence
- Apply statistical drift metrics to choose monitoring, investigation, or retraining responses
- Distinguish calibration, selective prediction, and conformal coverage, including the assumptions and operational costs of each
- Evaluate adversarial attacks on classifiers and generative models, and select defenses such as adversarial training, certification, input sanitization, and output guardrails
- Select layered poisoning defenses that combine source controls, anomaly detection, and robust training
- Evaluate robustness designs against clean accuracy, compute, latency, and fallback-capacity budgets

The Silent Failure Problem

A vehicle's vision model validated on sunny roads may become unreliable when snow changes the visual distribution. A confident misclassification, such as reading a snow-covered stop sign as a speed-limit sign, need not throw an exception or produce a stack trace. Whether that error leads to an unsafe action depends on the surrounding perception, planning, and fallback systems. Robustness engineering evaluates and constrains behavior under specified operational stresses, including distribution shift, sensor noise, adversarially crafted inputs, and hardware or software faults that can leave the service apparently healthy while its answers become unreliable.

Robust AI occupies the Assurance row of the fleet stack's governance band, alongside security and privacy. Security and privacy establish who can manipulate, extract from, or infer through the model and which controls constrain that access or disclosure. Robustness adds a behavioral requirement when inputs, data distributions, hardware, or software depart from the conditions assumed during validation. Within a specified operating envelope, the fleet needs evidence that predictions or fallback actions remain acceptable. Adversarial examples become perturbations to measure and defend against, with certification available under particular assumptions; nonadversarial drift and faults require their own evaluations. Diagnosing the failure source comes first. Population-shift tests then supply evidence of environmental change, while attack-specific evaluation tests whether deliberate manipulation defeats the model or its defenses.

The failure may be visible in predictions before it appears in infrastructure telemetry. A self-driving car's perception system does not crash when it misclassifies a truck as the sky; a demand forecasting model does not error out when it produces wildly inaccurate predictions; a medical diagnosis system does not shut down when it quietly provides incorrect classifications that could endanger patient lives. This **silent failure mode** requires ML-specific behavioral checks alongside conventional software checks, because only a behavioral test reveals how a model responds when deployment conditions depart from its training data.

Checkpointing and recovery restore execution state, while access control enforces permissions at the system boundary. These mechanisms do not establish that predictions remain useful. An adversarial input may satisfy the interface contract, the data distribution may drift beyond the model's validated conditions, or a preprocessing fault may alter inputs without stopping inference. Recovery can restore a clean checkpoint after some failures, but behavioral checks must determine whether that restored system meets its acceptance criteria. Fault detection, diagnosis, and recovery therefore need evidence about both execution and prediction quality.

These failure modes motivate a precise definition of Robust AI:

Definition 14.1: Robust AI

Robust AI is the measurable systems property that a model's predictions remain valid (within specified error bounds) under distribution shift, adversarial perturbation, and hardware or software faults, as opposed to the average-case accuracy achieved under ideal independent and identically distributed (i.i.d.) conditions.

1. **Significance**: Robustness is quantified against an explicit operating or threat set. A certified classifier can prove that its prediction cannot change for any input within a specified perturbation set, such as an ℓ_∞ ball of fixed radius around one test point (every input coordinate changed by at most that radius). Empirical stress tests instead measure performance on named corruptions, shifts, or attacks without proving behavior outside the evaluated cases.
2. **Distinction**: Standard generalization measures average-case accuracy on held-out i.i.d. data drawn from the training distribution. Robustness measures behavior under specified departures from that distribution, including natural shifts, semantic transformations, physical changes, malicious queries, and norm-bounded perturbations. Some evaluations are worst-case within a formal set; others provide empirical evidence over a sampled deployment envelope.
3. **Common pitfall**: A frequent misconception is that robustness can be added as a post-hoc monitoring layer to any existing model. Monitoring supplies evidence about observed behavior; it does not establish certified robustness. Training-time hardening and serving-time defenses each require evaluation of the complete defended system against a specified threat model. A certificate applies only within its stated perturbation set and assumptions.

Two models can agree on every clean input and still differ in how far an input can move before its label flips. In figure 0.196, each labeled point is surrounded by the same perturbation radius, the largest input change the evaluation allows. Vertical boundary A keeps every allowed change on the correct side, while oblique boundary B cuts through the neighborhood around x_+, so a small displacement δ_{adv} flips the predicted class. The adversarial sections of this chapter turn that distance into a measured quantity and, under stated assumptions, a certified one.

Three categories organize these silent failures and the responses they require, and the rest of the chapter calls them the **three pillars** of robust AI. The first, environmental change, includes distribution shifts, concept drift, and evolving operating conditions. A model trained on last year's transaction patterns may become unreliable as customer behavior evolves. Monitoring must establish whether the change affects predictive quality before an adaptation strategy can address it.

The second category, input-level attacks, is malicious manipulation that targets model behavior directly through the data a model receives or learns from. Adversarial attacks, data poisoning attempts, and prompt injection seek incorrect predictions or unauthorized behavior. Authentication and access controls constrain who can submit data and which actions the system permits, but an authorized input can still induce an incorrect result. Behavioral evaluation must therefore examine the manipulation possible within the access that remains.

The third category is system-level faults: hardware faults, software bugs, dependency failures, and runtime errors that corrupt the machinery around the model. Software and pipeline defects belong to this pillar by origin, yet their symptoms can amplify, mask, or mimic the other two, which is why they also cut across the whole taxonomy. Bugs, design flaws, and implementation errors within algorithms, libraries, and frameworks propagate through the system, creating systemic vulnerabilities[1] that transcend individual component failures. A preprocessing bug might create artificial distribution shifts; a numerical error might corrupt model behavior in ways indistinguishable from adversarial attack; a race condition might corrupt learned representations. Because these faults originate in the systems layer, their detailed taxonomy and mitigation strategies are covered in chapter 12; this chapter focuses on how system-level faults interact with environmental shifts and input-level attacks.

[1] **Systemic Vulnerability**: A shared dependency can expose many components to the same defect or attack. Pinning one CUDA or PyTorch version across a fleet makes that version a common dependency, but exploitation still depends on the affected code paths, configuration, and attacker access. Dependency inventories and staged updates help identify and contain the exposed population; replication alone does not remove a shared weakness.

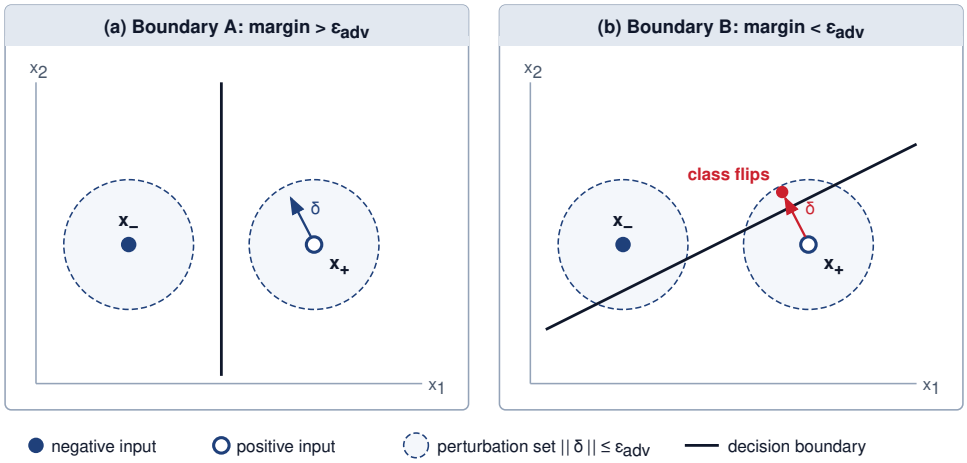


Figure 0.196: Clean Predictions and Perturbation Robustness: Two illustrative two-dimensional classifiers demonstrate the distinction between clean-data accuracy and certified robustness. Both decision boundaries correctly separate the labeled clean inputs. Dashed circles delimit identical perturbation neighborhoods around each point. Boundary A maintains separation outside both circles, whereas boundary B intersects them, allowing a small adversarial perturbation to change the classification. Agreement on clean inputs does not establish resilience under attack.

The appropriate defense depends on where the system runs and which failures it must contain. A cloud service may have capacity for redundant execution that exceeds an edge device's power and memory budget, but additional replicas do not remove a model weakness shared by every copy. Edge devices can concentrate checks on critical inference paths and use a validated local fallback. Both settings require measured protection within their resource and response-time limits.

Each protection consumes resources in the path where it operates. Error correction adds storage and checking work, redundant processing repeats computation, and monitoring uses compute and telemetry capacity. Their effects on bandwidth, energy, and response time depend on the implementation and workload. The robustness decision compares those measured costs with the failures detected or contained and the consequences of errors that remain.

Because every layer of the pipeline, from input validation and training through drift detection and fault isolation, carries part of this cost, robustness constrains the architecture rather than wrapping a finished system. The incidents that follow show what ignoring that constraint has cost in cloud, edge, and embedded deployments.

Real-World Robustness Failures

A shared storage outage can stop a service, while a perception error can leave it running with an unsafe result. The incidents below separate those two outcomes, so that a successful request or an operational processor is never mistaken for evidence of a valid prediction. Each deployment tier also exposes a different failure most sharply. Cloud fleets show a population slice whose failure hides inside aggregate accuracy, and silent hardware corruption entering training, a system-level fault. Edge vehicles show perception failing under operating conditions the model was never validated for, the environmental pillar with no time for a remote fallback. Embedded controllers show what happens when a false input drives an irreversible action with no human in the loop; those cases predate learned components, so they illustrate the hazard a learned component inherits rather than a model failure. Deliberate attacks are absent from the list because their best-documented evidence comes from controlled field studies, which the input-level attacks section examines.

War Story 14.1: The label that exposed the test gap (2015)

Context: In June 2015, Google Photos used automatic image tagging to organize user photos (Kasperkevic 2015).

Mechanism: A deep convolutional image classifier suffered from a severe slice-level failure mode: Jacky Alciné's photos of himself and a Black friend were misclassified under the album tag "Gorillas." The failure demonstrates why aggregate top-1/top-5 accuracy over a full test set cannot establish acceptable behavior for high-risk population slices.

Impact: The high-visibility misclassification caused public outrage and exposed a major gap in multi-class vision model safety validation.

Fix: Google disabled the "gorilla" label, blocking the symptom without demonstrating that the classifier itself had been corrected.

Systems lesson: Production ML robustness cannot be defined by aggregate test set accuracy. High-risk classification tasks require slice-level evaluation and a serving response to harmful errors. Automated toxicity guards and validated fallbacks are candidate controls whose coverage must be tested against the specific failure.

That test-gap failure is the model-facing version of a broader reliability problem. In cloud infrastructure, the hidden assumption is often that a shared dependency remains available and correct.

Cloud infrastructure failures

The 2017 AWS S3 outage[2] shows the familiar half of that assumption, in which a shared storage dependency failed and otherwise healthy services stopped (Amazon Web Services 2017). An outage at least announces itself. The robustness problem is the other half, when the dependency stays up but returns plausible, corrupted data, so the service keeps answering while incorrect results propagate.

Silent data corruption (SDC) is that case. The decompression incident analyzed in section 12 demonstrates the failure signature. A defective CPU returned zero during a size computation for a valid file, causing the decompression pipeline to omit files from its output even though system and kernel logs showed no fault (Dixit et al. 2021). The separate training illustration in figure 0.82 traces how unhandled corruption can enter gradients, weights, and later checkpoints. In both settings, checking that execution continues is insufficient; evaluation must test the validity of the resulting data or model behavior.

In distributed ML training, a corrupted gradient or activation can perturb optimizer state and affect later steps. Recovery may require rollback to the last clean checkpoint and replay of affected training work. Conventional data-processing systems can also propagate corruption into persistent state and downstream decisions; the ML-specific concern is how optimizer updates embed the error in learned parameters. SDC can therefore compromise model accuracy without triggering any alert, and the blast radius grows with the synchronization and checkpointing design rather than remaining localized. Meta's production report shows SDCs as a systemic fleet issue across CPUs and software layers (Dixit et al. 2021), and recent large language model (LLM)-training work shows that real-world SDCs can alter submodule outputs, optimizer steps, loss spikes, and final model weights (Ma et al. 2025). Dean's MLSys 2024 invited talk frames the same reliability concern at industry scale, where hardware errors during large ML training jobs occur routinely enough that one buggy chip's incorrect computations can propagate and infect an entire run (Dean 2024).

Edge device vulnerabilities

Edge deployments must respond within local compute, power, and connectivity limits. Vehicles make the timing constraint concrete: a perception or planning failure can require intervention before a remote service or human operator can respond. Their safety therefore depends on the conditions the system can handle and the fallback available when those conditions no longer hold.

In May 2016, a fatal crash involving a Tesla Model S in Autopilot mode[3] demonstrated the catastrophic potential of perception failures (National Transportation Safety Board 2017). Traveling at 74 mph in a 65 mph zone, the vehicle did not identify a tractor-trailer crossing its path, and neither

[2] **AWS S3 Outage (2017)**: A mistyped command during routine maintenance removed too much capacity from S3's index and placement subsystems in US-East-1. While those subsystems restarted, S3 could not service requests and dependent AWS services experienced elevated errors or impaired functionality. The incident exposed a single-region dependency pattern: systems that assume regional storage availability as an invariant can fail even when their own application code and model-serving logic remain unchanged.

[3] **Autopilot**: The 2016 crash involved Tesla's then-current SAE Level 2 driver-assistance system and Mobileye-era perception stack, not the later 8-camera full-self-driving hardware or dual FSD-chip computer. Later Tesla vehicles introduced expanded camera coverage and dedicated FSD compute, but the robustness lesson is the same: fleet-scale data collection does not automatically cover rare scenarios such as a white trailer against a bright sky.

the forward-collision warning nor automatic emergency braking activated. The investigation found that the system was not designed to recognize crossing traffic, turning an unmodeled operating condition into a high-speed underride collision. The system had not been validated for that scene, and nothing in its own behavior signaled that it had left its validated envelope. A separate March 2018 collision in Mountain View, California, in which a Model X operating on Autopilot struck a highway crash attenuator and its driver suffered fatal injuries, shows the physical stakes of any such perception error at highway speed (figure 0.197); the two crashes need not share a failure mechanism for the lesson about response time to hold.

↩ The 2016 crash, read as an edge model whose fallback was a supervising driver, is established in section 22.



Figure 0.197: Autopilot-Involved Barrier Crash (2018): This Model X collision with a highway barrier in Mountain View, California, a later incident than the 2016 crossing-trailer crash, shows the safety risks of relying on machine learning for perception in autonomous systems, where failures to correctly interpret the scene can lead to catastrophic outcomes. The incident underscores the need for robust validation, redundancy, and failsafe mechanisms in self-driving vehicle designs to mitigate the impact of imperfect AI models. Source: BBC News.

In March 2018 in Tempe, Arizona, an Uber self-driving test vehicle struck and killed a pedestrian (National Transportation Safety Board 2019). The system detected her 5.6 seconds before impact, but its classification of her was unstable. Repeated reclassification among "vehicle," "other," and "bicycle" caused path prediction to discard tracking history. The final investigation placed recognition of the imminent collision at 1.2 seconds before impact. The system then suppressed action for one second without alerting the operator; only afterward did it issue an alert and plan gradual slowdown. The operator did not intervene in time. The case connects perception, tracking, response timing, and human fallback: detecting an object did not establish that the system would act safely on that detection.

An inspection drone surveying power lines may likewise lose reliable localization when lighting changes or repetitive textures confuse visual odometry. An alternate inference or control path provides **fallback redundancy** when the primary path cannot support the required decision, but its value depends on independent failure coverage and response time. A local sensor-based controller or validated landing mode may be more useful than a remote model that cannot answer before the control deadline. Edge AI must provision that response within the device's resource limits; a data center's additional replicas would not by themselves correct the same perception error.

Embedded system constraints

Embedded systems can operate through critical intervals in which external intervention is too slow. Remote maintenance may remain possible between those intervals, but an autonomous landing or control maneuver needs a local response before its deadline. Validation must therefore cover both

the component's failure modes and the system behavior that follows, including any ML model in the decision loop.

The loss of NASA's Mars Polar Lander in 1999, attributed by the review board to premature touchdown detection that likely shut the engines off before landing (NASA Mars Program Independent Assessment Team 2000), illustrates the consequences of a false sensor indication during autonomous descent. The planetary deployment illustrated in figure 0.198 places the response inside the vehicle rather than with a remote operator. For a learned component in such a control loop, validation must connect plausible input and sensor failures to the actions they can trigger; exhaustive testing of every possible input is not a feasible safety argument.



Figure 0.198: Robotic Lander on Mars: An artist's rendering of NASA's Mars Polar Lander on the Martian surface. Remote robotic missions exemplify the class of systems in which software or sensor faults cannot be recovered by human intervention, motivating the rigorous validation and failure-mode analysis that ML components in the decision loop must also satisfy. Source: Slashgear.

Commercial aviation shows the same inherited hazard: a 2015 FAA airworthiness directive followed Boeing's discovery that a 787 powered continuously for 248 days could lose all AC power if all four generator control units entered failsafe mode at once,[4] so that uptime itself became the risk factor (Federal Aviation Administration 2015). An endurance test shorter than that interval would not have exposed the defect. A learned component inherits the same hazard whenever deployment reaches a condition its evaluation never covered, such as accumulated state, a rare season, or an unusual sensor reading, and safety-critical systems[5] impose stringent reliability requirements precisely because such latent hazards surface only in the field.

A neural network running visual odometry on a planetary rover must tolerate radiation-induced faults in weights, activations, and control state; the mission fault model determines its combination of hardened components, error correction, redundancy, and watchdogs. The safety argument must connect that containment to behavioral error detection and a validated fallback. Model uncertainty[6] adds a further constraint: confidence alone cannot certify a transfer of control, which must also follow from sensor and system health and an independently validated degraded mode.

Across these settings, robustness depends on connecting the failure signal to a bounded response. The fleet framework must distinguish the source of that signal before choosing a defense.

4 | **Failsafe Mechanism**: A mechanism that moves the system to a validated safe state when a fault is detected. Circuit breakers, model fallback, rejection, and rollback are possible components, but none is inherently safe for every application. The service must establish that its chosen response meets the hazard and timing constraints; rejection thresholds also trade accepted workload against residual error and review capacity.


5 | **ASIL (Automotive Safety Integrity Levels)**: ISO 26262 uses automotive safety integrity levels to scale functional-safety obligations according to the hazard analysis. ASIL D is the most stringent level, but it is not a universal component-reliability percentage. An ML perception component complicates the resulting safety case because its behavior depends on the operational distribution and cannot be justified by aggregate test accuracy alone.

6 | **Model uncertainty (epistemic uncertainty)**: Uncertainty associated with limited knowledge of the predictive model, distinguished from aleatoric uncertainty in the observations. An estimate can support deferral, but it must be evaluated against actual errors and unfamiliar inputs; a low estimate does not certify competence. Repeated-pass or ensemble estimators add inference work, and any human fallback must meet the application's response deadline.

A Unified Framework for Robust AI

One flipped exponent bit in accelerator memory can turn a trained weight of 0.042 into a finite value near 10^{37} that passes every NaN check, as the bit-flip analysis below shows. A gradual change in user demographics can erode recommendation quality while latency and uptime stay flat. Production ML systems cannot treat these as isolated bugs. A unified framework must map how low-level hardware faults, software bugs, data drift, and adversarial inputs propagate upward into the model's output.

Cross-cutting robustness dependencies in the fleet stack



One corrupted gradient in AllReduce reaches every replica's weights.

The mechanisms that make a fleet efficient also widen its robustness surface, because each one shares state or work across many machines. The fault detection and recovery mechanisms used to keep training jobs running also support inference-time availability. A restored checkpoint or a responsive replica, however, does not establish that the model behaves acceptably on the current inputs. Robustness extends the recovery argument to graceful degradation, in which a reduced service must still meet a validated behavioral contract when inputs are adversarial or components degrade. Distributed training architectures introduce unique vulnerabilities: a single node transmitting corrupted gradients during an AllReduce operation can poison the global model weights, requiring evidence that corrupted updates are detected or contained. Byzantine fault tolerance protocols address the case in which a contributor sends arbitrary or malicious values rather than simply stopping; ordinary hardware corruption also demands the fault diagnosis and recovery mechanisms already established for the fleet.

↩ Gradient synchronization through AllReduce, in which every replica receives the same reduced gradient, is established in section 4.

↩ Byzantine failures, in which a component returns arbitrary values rather than stopping, are established in section 5.

↩ Batching, request routing, and pipeline-parallel serving are established in chapter 6.

Serving repeats the same sharing at inference time. Batching, request routing, and pipeline-parallel stages place many users' requests on one model replica or one stage, so a corrupted replica or stage returns wrong answers to every request routed through it while its health checks still pass. When the cause is deliberate rather than accidental, the threat-vector classification in section 3, by attacker access, knowledge, and timing, defines the attacker that a defense must assume.

Large dense models amplify these risks. The Archetype A (GPT-4/Llama-3) reference model, a GPT-3-class dense transformer with 175B parameters, needs 350 GB for its weights alone at FP16/BF16 serving precision ($s_{\text{elem}} = 2$ bytes/param, with no optimizer state). Because that footprint exceeds the 80 GB per-device memory capacity M_{device} of a single A100- or H100-class accelerator, keeping these weights accelerator-resident requires distributing them across multiple devices. Each additional pipeline or tensor-parallel stage increases the fault surface compared with a monolithic deployment: a single bit flip or network partition in one stage can fail the entire inference request, and silent corruption can propagate through downstream computations that consume the affected values. Whether it changes the final prediction depends on the corrupted value, the computation, and the available detection or containment.

The pressure that shards a model across devices also compresses it. Efficiency techniques that let a model fit fewer devices or serve more requests change the deployed computation itself, so robustness engineering is a constant negotiation with the efficiency and scalability constraints established in previous chapters.

From ML performance to system reliability

Once silent failure becomes a systems property, accuracy, latency, and throughput no longer describe the full reliability envelope. The deployed model also depends on the computational substrate that executes it, and that substrate can corrupt a correct model without producing a visible service failure.

Figure 0.199 traces how a physical bit flip cascades through neural inference: in panel (b), flipping bit 30 of an FP32 weight scales its magnitude by 2^{128}, transforming a modest weight ($w = 0.042$) into an extreme outlier ($w' \approx 1.4 \times 10^{37}$). Panel (a) traces the affected path through hidden unit h_2 to output logits (y_1, y_2). The corrupted weight is finite and can evade NaN or infinity checks; whether it dominates those outputs depends on the input, activation function, and downstream weights. Targeted bit-flip attacks deliberately select vulnerable weight bits, so their results should not be interpreted as the effect of one random hardware upset. Memory subsystem failures during training can likewise corrupt gradient updates and prevent model convergence. Scale turns one corrupted value into a persistent exposure. Every forward pass of a dense GPT-3-class model reads all 175B of its parameters, so a corrupted weight resident in memory participates in every request

that replica serves until something detects it. Estimating how often such corruption occurs requires a sourced, device-specific error rate with its stored capacity and time basis, which is the role of the fleet-scale probability model below.

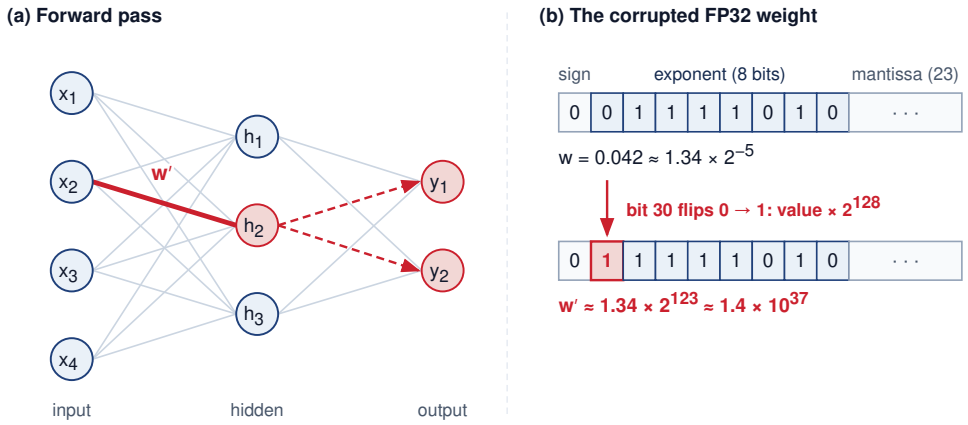


Figure 0.199: Weight Corruption via Bit Flip: (a) One corrupted weight w' drives hidden unit h_2, whose output feeds every downstream logit. (b) For an illustrative trained weight $w = 0.042 \approx 1.34 \times 2^{-5}$, flipping bit 30, the most significant exponent bit of the FP32 word, raises the stored exponent from 2^{-5} to 2^{123}. In general, flipping an exponent bit with place value 2^k scales the value by $2^{\pm 2^k}$; here the factor is 2^{128}, giving $w' \approx 1.4 \times 10^{37}$. The result is still finite, so NaN and infinity checks never fire, yet it can produce extreme downstream activations, depending on the input, activation function, and downstream weights. A range check $|w| \leq W_{\text{max}}$ against the trained weight distribution catches it cheaply.

The connection between hardware reliability and ML performance demands concepts from reliability engineering:[7] fault models that describe how failures occur, error detection mechanisms that identify problems before they impact results, and recovery strategies that restore system operation. Compression meets these concepts through the model's **robustness margin**, the amount of input perturbation, numerical error, or representation change the model can absorb before its prediction changes. INT8 quantization, pruning, and knowledge distillation change the deployed computation, and each can shrink that headroom, so a compressed model that matches the original's clean-data accuracy has not thereby shown that its margin survived. An optimized system therefore needs evidence that its detection and recovery mechanisms cover the faults in its operating model and that the resulting predictions still meet the service contract.

Section 12 establishes that per-device silent corruption compounds across a fleet of N devices as $\Pr(\geq 1) = 1-(1-p)^N$ when each device has independent residual-error probability p over the same observation interval. A high fleet-level probability follows only for a specified device count, interval, and residual-error model; raw bit flips corrected by hardware are not silent errors. Figure 0.200 charts how this compounding risk scales across fleet sizes up to 10^5 accelerators under three illustrative per-device error probabilities for the same observation interval. The plotted reference bands distinguish moderate from high fleet-level probability; they do not establish a measured device failure rate. With an illustrative residual-error probability of 0.01 percent per device over one hour, a 10,000-device cluster incurs an hourly corruption probability of 63.2 percent (marked at 10K GPUs), with failure becoming nearly certain at roughly 29,956 devices. Meta's SDC report confirms corruption at observable fleet scale (Dixit et al. 2021).

At cluster scale a per-device reliability number therefore becomes a coordination cost, the third axis of C^3. Once a silent error is likely somewhere in the fleet, operators must agree on which replicas, checkpoints, and outputs remain trustworthy before they can contain it, and that agreement requires evidence that ordinary health checks do not collect. Hardware faults, adversarial inputs, and software defects all create this evidence problem, which is why the chapter treats them within one framework.

7 **Reliability Engineering**: Uses fault models and failure-mode analysis to connect component behavior to system outcomes. A series model gives system reliability as $R_{\text{system}}(t) = e^{-N_{\text{series}}\lambda t}$ when all N_{series} components must survive, failures are independent, and each has the same constant exponential failure rate. ML deployments also need behavioral evidence for drift, crafted inputs, and uncertainty; the component-survival model alone does not cover these failure modes.

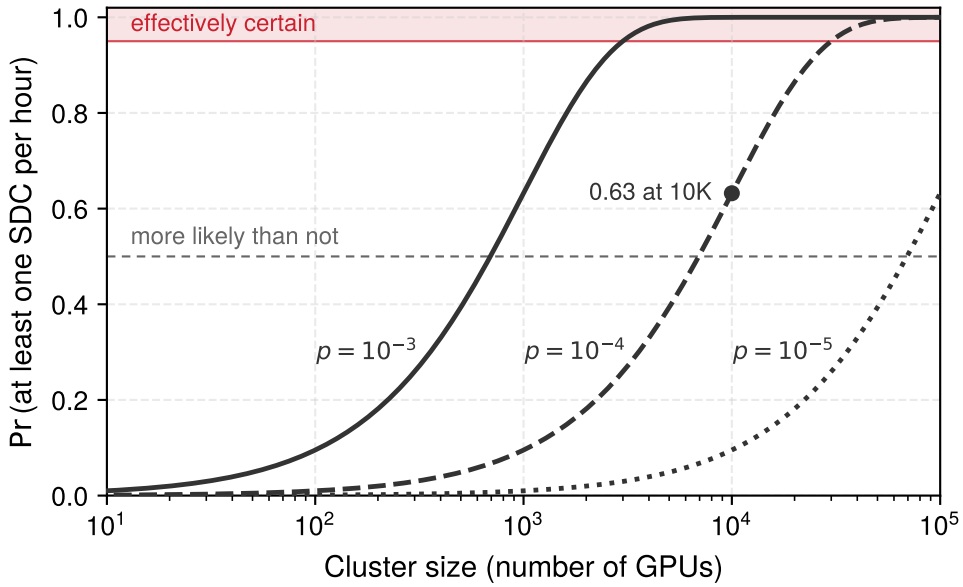


Figure 0.200: Silent Error Probability at Scale: Probability of at least one silent data corruption event per hour as a function of cluster size, for three illustrative per-device error rates. The curves are analytical, $\Pr(\geq 1) = 1-(1-p)^N$, and show how quickly cluster-scale probabilities compound as per-device rates increase; fleet observations of silent corruption (Dixit et al. 2021) motivate stress-testing at rates above soft-error predictions.

The three pillars of robust AI

The unified framework helps engineers decide which failure signal they are seeing before they choose a defense. What this section adds to the three pillars named at the start of the chapter is their decomposition into concrete failure subtypes, each paired with the defense that targets it (figure 0.201).

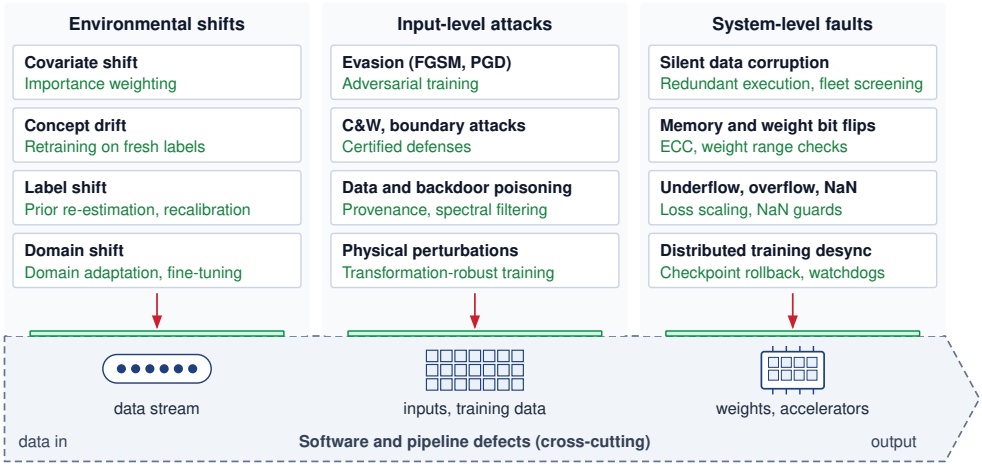


Figure 0.201: The Robustness Taxonomy: Environmental shifts, input-level attacks, and system-level faults decomposed into concrete failure subtypes (dark), each paired with its principal defense (green). Each pillar descends onto a defense wall at the point where it enters the ML pipeline, the data stream, the model's inputs and training data, or the weights and accelerators. Software and pipeline defects originate in the system layer, but they are drawn as the cross-cutting pipeline rail on which all three walls sit because their symptoms can amplify or imitate any of the pillars.

The subtype names matter less than the evidence each pillar produces, because the evidence is what an operator actually observes and what selects the defense family. Environmental shifts can produce statistical differences between production data and a reference population. Those differences motivate investigation, but an input-distribution monitor cannot detect every change in the relationship between inputs and outcomes. Monitoring, recalibration, and retraining address different parts of that problem; outcome evidence helps determine which response is warranted.

Input-level attacks deliberately target model behavior through crafted inputs or poisoned training samples. Anomalous inputs can raise suspicion, but an effective attack need not expose a recognizable perturbation or statistical outlier. Adversarial training, certification, and input sanitization address different threat models. Authentication and access control constrain who can submit data and what actions a model-driven system may take; they do not establish that every permitted input will receive a correct prediction.

System-level faults encompass failures originating from the hardware, code, frameworks, and deployment infrastructure that support ML systems: numerical instability in gradient computations, data pipeline corruption from preprocessing bugs, race conditions in distributed training, desynchronization in which data-parallel replicas that should hold identical parameters silently diverge, memory leaks that degrade long-running services, dependency failures from version mismatches, and hardware faults such as bit flips or power events. Many such faults produce explicit errors or outages. The robustness problem is harder when the service keeps answering and the fault instead appears as a change in model behavior. It can then masquerade as either of the other pillars, leading an engineer to spend the defense budget on the wrong cause. The signals that expose the disguise compare a fault against drift and attack evidence, so section 20 develops them after both pillars have been treated.

↩ The mechanics of hardware and software faults, and their detection and recovery, are established in chapter 12.

Common robustness principles

Across all three categories, the shared engineering problem is deciding which signal triggers which response. Robust systems need a detection threshold, a degradation path, and an adaptation mechanism, each with an explicit cost budget.

Detection and monitoring form the foundation of that strategy. Each pillar asks for a different signal. System-level monitoring samples hardware and runtime metrics for evidence of temperature anomalies, voltage fluctuations, memory errors, or silent data corruption. Detection can limit further propagation, but the first observable symptom may follow a corrupted state update. Input-level attack monitoring uses statistical or activation-space tests to flag suspected adversarial inputs and poisoning attempts for rejection or investigation. Environmental-shift monitoring compares production traffic with reference distributions using tools such as maximum mean discrepancy (MMD),[8] population stability index (PSI), or Kolmogorov-Smirnov (KS) tests, the statistics developed in section 9. The same quantitative discipline applies to defense cost: robustness mechanisms must be budgeted, not merely enabled, because every detector trades sensitivity against false positives, latency, and compute overhead.

Graceful degradation turns detection into a bounded operating mode instead of a crash. Robust systems exhibit predictable performance reduction that preserves critical capabilities. Component-level error correction supports this goal, but the behavioral evidence must show that the degraded model and its fallback still satisfy the service's acceptance criteria. A quantized replica is one such degraded mode, a cheaper model that keeps serving when capacity drops. Converting from FP32 to INT8 reduces the storage required for each quantized value, but its end-to-end memory savings, speedup, and accuracy effects depend on kernel support, retained higher-precision state, and the workload. A quantized fallback therefore needs its own validation under the degraded operating conditions. Ensemble fallback systems can preserve service when a primary model fails, provided the alternate models cover the relevant failure and complete within the serving deadline. Their quality under that failure, switching delay, and capacity under diverted traffic require evaluation; ensemble membership alone establishes none of these properties.

Adaptive response completes the loop by changing system behavior when the signal persists. Adaptation might involve activating error correction mechanisms, applying input preprocessing techniques, or dynamically adjusting model parameters. Robustness therefore requires ongoing adjustment rather than a one-time configuration.

8 **Maximum mean discrepancy (MMD)**: A discrepancy between kernel mean representations of distributions, used to construct two-sample tests. A kernel on input vectors lets MMD respond to joint-distribution changes that per-feature comparisons can miss; sensitivity depends on the kernel and test calibration. Direct pairwise estimation costs $\mathcal{O}(n^2)$ in sample size, while linear-time estimators and approximations trade computation against statistical efficiency.

Detection, degradation, and adaptation extend beyond fault recovery to form a systematic performance adaptation strategy that appears throughout ML system design. The defense mechanisms mapped across the three pillars of figure 0.201 instantiate this pattern: hardware ECC and redundant execution detect faults, weight range checks and checkpoint rollbacks contain the damage, and retraining or adversarial training adapts the model. Because each pillar needs its own version of all three mechanisms, no single defense covers the taxonomy.

The evaluation plan must preserve those distinctions. One row of it is not a pillar at all. Population monitors ask whether traffic as a whole has changed, while a serving system must also decide, request by request, whether this particular input lies inside the model's demonstrated competence. The tools for that per-request decision, namely calibration, out-of-distribution (OOD) scores, and selective prediction with its risk-coverage curve, are developed in section 9, after the drift statistics they complement. Table 0.202 defines the minimum evidence for each failure class and prevents a passed test in one column from becoming a robustness claim about another. On a first reading the table is a map rather than a lesson. Near-OOD inputs resemble the training data but fall outside its classes or conditions, while far-OOD inputs come from unrelated sources; robust and certified accuracy are developed with the adversarial defenses (section 14), and sybil and Byzantine contributors with data poisoning (section 13). The chapter returns to each row as its evidence is taught.

Table 0.202: Robustness Evaluation Matrix: Each failure class requires its own intervention, evidence, slices, and operational decision. Aggregate test accuracy or one attack benchmark cannot stand in for the complete matrix.

Failure class	Evaluation set or intervention	Primary evidence	Required slice	Decision boundary
Natural shift	Time-, geography-, device-, and environment-held-out data	Accuracy or loss, calibration error, and drift statistics	Critical cohorts and tail conditions	Continue, investigate, recalibrate, retrain, or fall back
Per-request competence	In-distribution errors plus near- and far-OOD inputs	Risk-coverage curve, OOD score, and fallback load	High-consequence request classes	Answer, route, abstain, or reject
Adversarial manipulation	White-box, black-box, transfer, and physical attacks matched to the threat model	Robust accuracy by attack budget; certified accuracy where available	Targeted classes and attacker capabilities	Accept, harden, restrict, or block release
Poisoning	Source-compromise, label-flip, backdoor, fake-identity (sybil), and Byzantine-contributor scenarios	Clean and attack-success metrics, slice loss, and detector recall	Sources, contributors, and subpopulations	Quarantine, exclude, reweight, or roll back
System fault	Fault injection across data, runtime, accelerator, and network paths	Silent-error rate, detection latency, and recovery success	Correlated and multi-component faults	Retry, isolate, degrade, or fail safe

Integration across the ML pipeline

Robustness requires evidence across the ML lifecycle, with complementary controls at each stage. This is the defense-in-depth principle applied to model behavior. In the data ingestion phase, sanitization filters flag malformed or statistically anomalous records for rejection or review before training. This limits some poisoning paths but cannot establish that accepted records are clean. During training, adversarial training exposes the model to high-loss perturbations found by an approximate attack search, while randomized smoothing, which averages predictions over noisy copies of each input, later turns those repeated predictions into a certifiable robustness bound (section 14). Both families try to limit how quickly outputs can change as inputs change, a property that certification later makes precise. Validation extends beyond simple accuracy metrics to include stress testing on out-of-distribution datasets, measuring behavior within a named deployment envelope.

↩ Defense in depth, which requires independent layers so that defeating one does not defeat the system, is established in section 3.

Once deployed, the focus shifts to runtime defense. A robust inference server complements its serving architecture with the detection techniques in section 15, including input filtering that can reject suspicious queries before the main prediction. A production fraud detection pipeline must evaluate ingestion checks against poisoned training records and serving-time filters against evasion attempts separately. Neither stage guarantees interception, and model-based filters themselves

consume inference resources. The monitoring layer acts as the safety net, detecting distribution drift, such as a sudden shift in transaction amounts or user geolocations, and triggering investigation and performance correlation. Retraining follows only when validated outcome evidence, root-cause analysis, and the release gate show that a model update is the appropriate response.

The holistic view integrates with hardware reality. Hardware faults (transient, permanent, and intermittent) are covered in detail in section 9, where they integrate with the broader fault detection and recovery mechanisms for distributed systems. Robustness evaluation adds a behavioral test to those mechanisms: after a fault is detected or a request retried, the output must still satisfy the model's acceptance criteria. A retry alone does not establish that the result is correct. The same distinction between service health and prediction quality applies when the machinery works correctly but the world evolves beyond its training data.

Checkpoint 14.1: Diagnosing the failure signal

The unified framework requires identifying which of the three pillars produced a silent failure before choosing a defense, and recognizing that software faults can masquerade as any of them.

Classifying the threat

- ☐ **Pillar classification**: classify a model losing accuracy as customer behavior evolves, a crafted input that forces misclassification, and an accelerator HBM bit flip under the correct robustness pillars.
- ☐ **Software-fault mimicry**: explain why a preprocessing bug that shifts every inference's feature statistics is hard to distinguish from genuine environmental shift, then name the pillar it belongs to by origin and the pillar whose symptom it imitates.

Choosing the response

- ☐ **Response selection**: map an ECC-corrected single-bit memory error and a fired drift monitor to the shared responses of detection, graceful degradation, and adaptive response.
- ☐ **Fleet-scale effects**: explain why a negligible per-device silent-corruption rate becomes an architectural constraint at a fleet scale of tens of thousands of accelerators.

Environmental Shifts

Training data freezes a past world, while production traffic keeps changing. Environmental shifts arise as data distributions, user behavior, and operational contexts move after training. A shift becomes a robustness failure when model behavior no longer meets the service contract. Changed conditions can also expose software defects or alter the effectiveness of an adversarial defense, so the response depends on both the distribution change and its measured consequences.

Distribution shift and concept drift

Consider a medical diagnosis model trained on X-ray images from one hospital and deployed in a clinic with different imaging equipment. Even for the same medical conditions, acquisition settings can change the image characteristics. This difference between training and deployment populations is **distribution shift**; whether it reduces diagnostic accuracy requires evaluation on the clinic's data. A move to a different source altogether, such as a new hospital, sensor, or region, is often called domain shift, and it can combine several of the shift types distinguished below.

Figure 0.202 partitions distribution shift into three geometric and statistical regimes: inputs can migrate to an unfamiliar region of feature space (panel a), label priors can skew (panel b), or the underlying mapping itself can invert (panel c). Here, x denotes an input and y its outcome label. Input-only monitors can detect changes in $p(x)$; distinguishing changes in label frequencies or in $p(y \mid x)$ generally requires outcome evidence or additional assumptions.

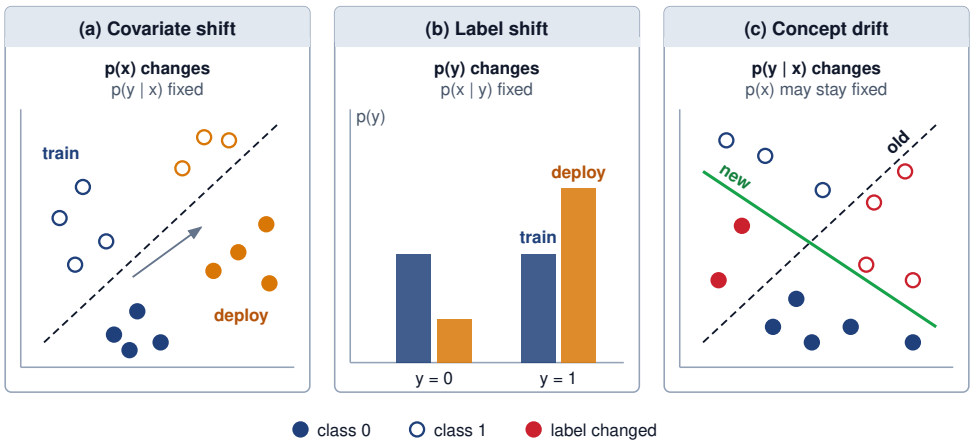


Figure 0.202: Types of Distribution Shift: (a) Under covariate shift, deployment inputs move to a new region of feature space while the labeling rule, and so the correct boundary, stays fixed. (b) Under label shift, class frequencies change while each class's inputs look the same; the bar heights are illustrative. (c) Under concept drift, the same inputs acquire new labels, so points between the old and new boundaries become errors. Covariate shift changes $p(x)$ with $p(y \mid x)$ fixed, label shift changes $p(y)$ with $p(x \mid y)$ fixed, and concept drift changes $p(y \mid x)$; the distinction determines whether reweighting, recalibration, or model adaptation is appropriate.

These shifts occur naturally as environments evolve. User preferences change seasonally, language evolves with new slang, and economic patterns shift with market conditions. Unlike adversarial attacks that require malicious intent, these shifts emerge organically from the dynamic nature

of real-world systems. When a deployed model actively influences user behavior, as in fraud detection, recommendation engines, or credit underwriting, the shift is not merely exogenous. The sociotechnical feedback invariant (principle 25) governs these performative environments: the probability distribution of future inputs $p_{t+1}(x)$ depends directly on the model's past decisions $f_t(x)$ through the environment's response function $g(p_t(x), f_t(x))$. Deployed predictions induce user and adversary adaptations that accelerate distribution shift, compressing the model's viable operating window and demanding closed-loop monitoring rather than static validation.

Technical categories

Covariate shift changes the input distribution while the relationship between inputs and outputs stays fixed (Quiñonero-Candela et al. 2009). A vehicle perception model trained mostly on daytime images may encounter unfamiliar inputs at night, or in rain, snow, and fog. Treating this as covariate shift requires assuming that the conditional labeling relationship stays fixed; an unchanged task name alone does not establish that assumption. Any accuracy loss depends on the luminance shift, the sensor, and how much adverse-condition data the training set contained, so each deployment must measure it on held-out night and weather slices rather than assume a published figure. Under the covariate-shift assumption, the changed population can place more probability in regions the model learned poorly, as illustrated in panel (a) of figure 0.202. Aggregate accuracy can then decline even though the labeling rule remains fixed. This is a change in the distribution of errors, not a claim that every affected request becomes incorrect.

Covariate shift moves the inputs while the true mapping $p(y \mid x)$ stays fixed. A more insidious variant occurs when the mapping itself changes: the correct label for a given input today is different from what it was during training.

↩ A fleet drift monitor that must tell input-distribution change from input-output change is established in section 12; this section defines the shift types it separates.

> **Definition 14.2: Concept drift**
>
> ***Concept drift*** is the deployed-model subtype of distribution shift in which the statistical relationship $p(y \mid x)$ changes over time, potentially changing the correct class decision or its probability even when the input distribution stays fixed. Data drift names a change in $p(x)$; the more restrictive covariate-shift case additionally assumes that $p(y \mid x)$ remains stable.
>
> 1. **Significance**: It causes silent model degradation because the historical mapping learned by the model is no longer representative of current reality. In amortized cost terms, it compresses the effective deployment window before retraining is required: fraud-detection models, recommender systems, and other behavior-dependent models may need periodic retraining or recalibration as adversaries, users, and policies change. The remediation cost can range from recalibration or incremental fine-tuning to a full training run, so drift velocity affects amortized per-prediction cost without fixing every response at the cost of the original run.
> 2. **Distinction**: Under covariate shift, $p(x)$ changes while $p(y \mid x)$ remains stable, so resampling or reweighting may help where the reference data cover the new inputs. Detecting data drift alone does not establish that the conditional relationship stayed fixed. Concept drift instead requires adapting to a new $p(y \mid x)$, usually using recent ground-truth outcomes. This can make concept drift structurally more expensive to remediate than resampling an existing labeled distribution.
> 3. **Common pitfall**: A frequent misconception is that concept drift is detectable by monitoring input feature statistics. Because $p(x)$ may be entirely unchanged, input-level monitoring (PSI, KL divergence on features) will show no signal. An outcome-based detector compares predictions with ground-truth outcomes and must wait for those labels to confirm a change. Proxy signals can still justify investigation or containment before that confirmation.

Because input monitors can miss concept drift entirely, classic drift-adaptive learners watch error on recently labeled examples and shrink or grow their training window when that error changes, rather than tracking feature statistics (Widmer and Kubat 1996). A production detector that relies

on labeled errors must wait for those outcomes. Input statistics and other proxy signals may justify earlier investigation or containment, but they do not by themselves establish that the input-output relationship has changed.

Label shift occurs when the label marginal $p(y)$ changes while the class-conditional input distribution $p(x \mid y)$ remains fixed (Lipton et al. 2018). For example, a disease can become more prevalent, as respiratory illness did in hospital case mix during the COVID-19 pandemic, while the distribution of observed features within each diagnosis remains stable. That assumption permits prevalence correction without learning a new within-class feature distribution. The probability of a diagnosis given an observed image can nevertheless change as prevalence changes. A real clinical population may violate the stable within-class assumption, so prevalence change alone does not establish pure label shift.

The taxonomy names what changed; it does not explain why a change that leaves the labeling rule intact can still hurt. Often the reason is a shortcut the model learned from its training data, which a covariate shift then exposes. A classic example is a model that learns to identify "cow" by detecting "grass" background. When presented with a cow on a sandy beach, the model fails. The underlying cause is a **spurious correlation**: a feature that is predictive in the training set but not causally related to the label.

Standard training by empirical risk minimization can favor a shortcut that predicts labels well in the training distribution, even when that association fails in deployment. Shape or texture may provide useful evidence, but either can also become a shortcut when its training association does not hold across contexts. Techniques like **group distributionally robust optimization** explicitly mitigate this by minimizing the *worst-case group loss* (for example, cows on sand) rather than the *average loss*. The method requires groups to be known or inferred in advance, and optimizes the worst represented-group loss rather than guaranteeing performance in every context. Its effect must be evaluated on the named groups and on held-out contexts; unseen groups remain outside that objective's direct coverage.

Quantitative drift detection

Whichever type of shift is suspected, deciding whether it matters requires a measured signal rather than an impression. Quantitative drift detection must answer an operational question: whether the model should keep serving, be monitored more closely, or enter a root-cause investigation that may justify recalibration, data repair, or retraining. PSI supplies a cheap fleet-wide alert that starts that decision; the mathematical foundations below show how a service can calibrate thresholds without mistaking them for universal policy.

Population stability index (PSI)

Equation 0.69 defined PSI over n_{bins} bins as a symmetric log-ratio difference between the current bucket proportions A_b and the baseline proportions E_b, for use as a cheap fleet-wide alert. An investigation needs the same quantity in a form that exposes each bin's contribution. Bin b contributes $(A_b - E_b)\ln(A_b/E_b)$, and each such term is nonnegative, because $A_b - E_b$ and $\ln(A_b/E_b)$ always share a sign. The logarithmic factor penalizes large relative changes, while the difference weights them by absolute magnitude, so a per-bin decomposition shows which feature ranges or categories contribute to an alert. Identifying an affected population cohort requires connecting those bins to the corresponding requests.

Table 0.203 restates the fleet convention bands from section 12 with the monitoring action at each tier. These bands are monitoring conventions, especially common in credit-scoring practice, rather than universal statistical guarantees; PSI should be interpreted together with feature importance and downstream model-performance metrics (Yurdakul and Naranjo 2020).

Table 0.203: PSI Alert Bands: The fleet convention bands can initialize alert severity, but each service must validate them against its binning, baseline, sample size, predictive features, and response cost.

PSI Value	Interpretation	Recommended Action
$\text{PSI} < 0.1$	Negligible shift	Continue monitoring

PSI Value	Interpretation	Recommended Action
$0.1 \leq \text{PSI} < 0.25$	Moderate shift	Open an investigation ticket
PSI ≥ 0.25	Major shift	Treat the model as potentially degraded

Several implementation choices determine whether PSI is sensitive enough to be useful. Bin selection significantly affects PSI sensitivity. For categorical features, each category forms a natural bin. For continuous features, equal-width bins (10–20 bins typical) or quantile-based bins provide different trade-offs: equal-width bins preserve the absolute scale of the feature space, while quantile bins aim for balanced occupancy in the reference sample but may obscure changes within wide tail bins. Once chosen, the same boundaries must be used for the comparison population. Ties and deployment shifts can still produce sparse bins, so a bin-count convention alone does not ensure statistical stability.

When a bin has zero observations in either distribution, adding a smoothing constant ϵ_{smooth} and renormalizing the bin probabilities prevents undefined logarithms. The choice can materially change PSI when bins are empty or sparsely populated, so the monitoring configuration must record the smoothing convention and check sensitivity to it. Monitoring population stability index over time as plotted in figure 0.203 reveals when the input population moves from the stable band into the warning band and then the major-shift band, triggering an escalation path that may lead to retraining after performance correlation. At week 41, the service approves and versions a new input reference after validating the changed operating population. The lower PSI thereafter compares traffic with that new reference, not the original one. Changing model weights alone would not reduce input PSI against a fixed reference, and the discontinuity does not establish improved predictions.

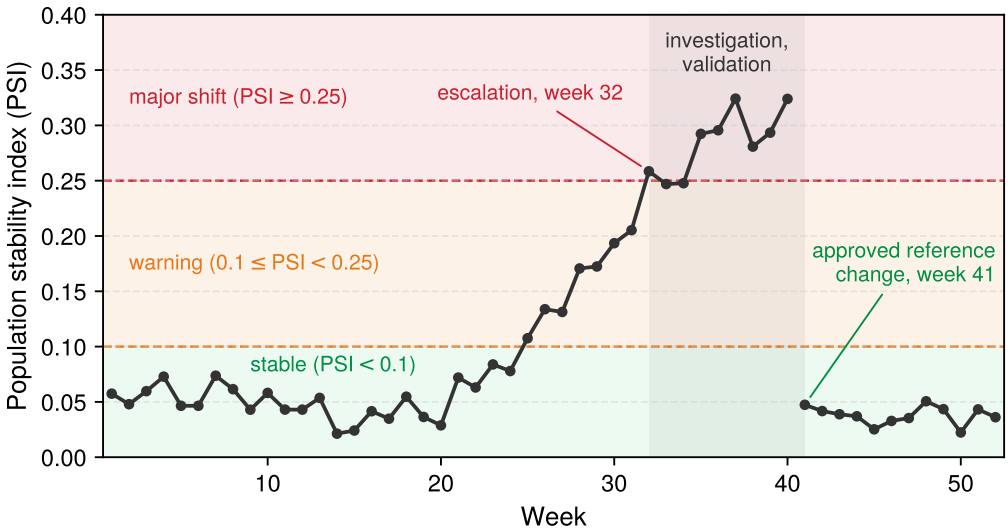


Figure 0.203: A Calibrated Distribution-Shift Workflow: In this synthetic service, PSI enters the warning zone as user behavior shifts and crosses the service's escalation threshold at week 32. Following investigation and validation of the changed operating population, the service versions a new input reference at week 41. Values on either side of that reference change use different comparison populations; the drop is not evidence of model recovery.

This threshold-based path automates alerting, not remediation. Operators still need labels or other outcome evidence, root-cause analysis, and an evaluated response before changing the model. Forcing continuous variables into discrete bins also discards information about distribution shape, motivating continuous drift metrics.

Kullback-Leibler divergence

For continuous features, Kullback-Leibler (KL) divergence can compare density models rather than fixed bins. Estimating those densities introduces its own assumptions and approximation error, so

avoiding bins does not make the comparison lossless. The KL divergence from baseline distribution P_0 to current distribution P_t is defined as:

$$\mathcal{D}_{\text{KL}}(P_0 \| P_t) = \int_{-\infty}^{\infty} P_0(x_{\text{feat}}) \ln\left(\frac{P_0(x_{\text{feat}})}{P_t(x_{\text{feat}})}\right) dx_{\text{feat}}$$

where $P_0(x_{\text{feat}})$ and $P_t(x_{\text{feat}})$ are the probability density functions of the baseline and current distributions, respectively. Unlike PSI, KL divergence is asymmetric: $\mathcal{D}_{\text{KL}}(P_0 \| P_t) \neq \mathcal{D}_{\text{KL}}(P_t \| P_0)$. The fraud-monitoring example later in this section uses $\mathcal{D}_{\text{KL}}(\text{baseline} \| \text{current})$, measuring how much information is lost when using the current distribution to approximate the baseline.

To address asymmetry, practitioners often use the Jensen-Shannon divergence:

$$\mathcal{D}_{\text{JS}}(P_0 \| P_t) = \frac{1}{2}\mathcal{D}_{\text{KL}}(P_0 \| \bar{P}) + \frac{1}{2}\mathcal{D}_{\text{KL}}(P_t \| \bar{P})$$

where $\bar{P} = \frac{1}{2}(P_0 + P_t)$ is the mixture distribution. **Jensen-Shannon divergence** is bounded between 0 and $\ln(2)$ (approximately 0.693), making threshold selection more intuitive than unbounded KL divergence.

KL divergence has no conventional bands comparable to PSI's, so each service sets its own. The fraud service analyzed in section 9 starts from the bands in table 0.204 and validates them against its historical traffic.

Table 0.204: Scenario-Calibrated KL Alert Bands: The worked fraud service uses these values to assign monitoring severity, not to command retraining. Another feature, density estimator, or consequence model requires different calibration.

$\mathcal{D}_{\text{KL}}$ Value	Interpretation
$\mathcal{D}_{\text{KL}} < 0.05$	Minimal divergence
$0.05 \leq \mathcal{D}_{\text{KL}} < 0.1$	Moderate divergence
$\mathcal{D}_{\text{KL}} \geq 0.1$	Significant divergence

For practical computation, kernel density estimation with Gaussian kernels provides smooth density approximations suitable for integration. Direct evaluation at every sample against every kernel costs $\mathcal{O}(n^2)$ for n samples. Sampling, a fixed evaluation grid, or faster approximation methods change this cost; bandwidth selection also changes the estimated divergence and must be part of threshold calibration.

Statistical significance testing

PSI and KL divergence quantify how large a distributional change appears to be; statistical hypothesis tests ask the complementary question of whether the observed difference is larger than sampling noise. The simplest case is a shift in the mean of one feature whose spread is known, which a normal approximation can test directly.

> Napkin Math 14.1: Detecting a real distribution shift
>
> **Problem**: A model monitors a critical input feature with a known standard deviation of 0.3. The baseline mean was 0.5. Over the last 1,000 requests, the mean has shifted to 0.55. The engineering question is whether this is a random fluctuation or a real distribution shift.
>
> **Math**: The calculation treats the baseline mean as known and the requests as independent observations with the stated standard deviation. A normal approximation then measures how unusual the observed mean would be under that baseline. If the baseline mean is itself estimated from a finite sample, its uncertainty also contributes to the comparison.
>
> 1. **Difference in means**: 0.05.
> 2. **Standard error**: $0.3/\sqrt{1,000} \approx 0.009$.
> 3. **Statistical significance**: The shift is approximately 5.3 standard errors away from the mean.

4. **P-value**: < 0.001.

Systems insight: Statistical significance assesses the observed change against sampling variability under the baseline model. A shift of 0.05 might seem "small," but under the baseline model, the probability of observing a sample mean at least this far from the baseline is less than 0.1 percent. In the machine learning fleet, this supports a drift alert under the test assumptions, not yet a confirmed model regression. The system should trigger investigation, increased monitoring, and correlation with precision, recall, latency, and business metrics. Feature importance and shift magnitude help prioritize that investigation; fallback or retraining requires evidence that the response addresses the cause or contains the resulting risk.

A mean test sees only a change in location and needs the spread in advance. The two-sample Kolmogorov-Smirnov (KS) test (Berger and Zhou 2014) compares the empirical cumulative distribution functions (CDFs) of two samples without assuming any specific parametric form. The test statistic is:

$$\mathcal{D}_{\text{KS}} = \sup_{x_{\text{feat}}} |F_n(x_{\text{feat}}) - G_m(x_{\text{feat}})|$$

where F_n and G_m are the empirical CDFs of samples of size n and m respectively. For independent samples from continuous distributions, the following asymptotic rule rejects the null hypothesis of no distributional difference. Small samples, ties, or dependent traffic require an appropriately calibrated test.

$$\mathcal{D}_{\text{KS}} > c(\alpha_{\text{sig}}) \sqrt{\frac{n+m}{nm}}$$

where $c(\alpha_{\text{sig}})$ depends on the significance level (for example, $c(0.05) \approx 1.36$). The KS statistic is most sensitive to differences near the center of the distribution, such as a location shift, and less sensitive to differences confined to the tails.

For categorical features, the **chi-square goodness-of-fit test** compares observed frequencies to expected frequencies under the baseline distribution:

$$\chi^2 = \sum_{i=1}^{k} \frac{(n_i^{\text{obs}} - n_i^{\text{exp}})^2}{n_i^{\text{exp}}}$$

where n_i^{obs} is the observed count in category i and n_i^{exp} is the expected count based on the baseline distribution. For independent observations, fixed baseline probabilities, and sufficiently populated expected counts, the reference distribution is approximately chi-square with $k-1$ degrees of freedom. The null hypothesis is rejected when χ^2 exceeds the critical value for significance level α_{sig}. Estimating baseline parameters or using a noisy reference sample requires accounting for that estimation rather than treating the expected counts as known.

When monitoring many features simultaneously, the significance test must also account for repeated comparisons. Applying Bonferroni correction (dividing α_{sig} by the number of tests) controls the probability of at least one false rejection within the specified test family. False discovery rate procedures instead target the expected fraction of false discoveries among rejections under their own assumptions. For N_{tests} monitored features, one test each, at significance level $\alpha_{\text{sig}} = 0.05$, Bonferroni requires each test to achieve $p_{\text{val}} < 0.05/N_{\text{tests}}$ for significance. This correction across features does not by itself control false alarms over an indefinitely repeated sequence of monitoring windows.

Production fraud detection drift analysis

Consider a fraud detection model serving an e-commerce platform with two key input features: user country (categorical) and transaction amount (continuous). After six months in production, the operations team suspects distribution drift and must decide whether to retrain. From its historical baseline the team has already configured three investigation triggers: a population stability index above 0.1 on any high-importance feature, a KL divergence above 0.05 on a continuous feature, and

a KS test p-value below 0.01, the per-test level left after a Bonferroni correction across its monitored features.

Step 1 categorical feature analysis Table 0.205 compares the baseline (training) distribution and current (production) distribution for four named countries plus the Other bucket.

Table 0.205: Country-Feature PSI Decomposition: Per-country contribution to the total PSI for the user country feature in a production fraud-detection model. The "Other" bucket drives most of the divergence (0.0470 of the 0.065 total), reflecting growth of non-USA/UK/Germany/France traffic over six months in production.

Country	Baseline (E_i)	Current (A_i)	$E_i - A_i$	$\ln(E_i/A_i)$	Contribution
USA	0.45	0.38	0.07	0.169	0.0118
UK	0.20	0.18	0.02	0.105	0.0021
Germany	0.15	0.14	0.01	0.069	0.0007
France	0.10	0.12	-0.02	-0.182	0.0036
Other	0.10	0.18	-0.08	-0.588	0.0470

Summing the per-country contributions gives $\text{PSI}_{\text{country}} = 0.0118 + 0.0021 + 0.0007 + 0.0036 + 0.0470 = 0.065$.

The PSI of 0.065 remains inside this fraud service's calibrated baseline for user country, so the aggregate feature does not independently escalate the investigation. The decomposition still matters. The Other bucket nearly doubled its share of traffic, so the team checks performance within that slice rather than relying on the aggregate PSI. The changed share warrants investigation without establishing that those transactions are less accurately classified.

Step 2 continuous feature analysis For the transaction amount feature (log-transformed for approximate normality), fitting Gaussian distributions to the samples yields a baseline distribution of $\mu_{\text{base}} = 4.2$ and $\sigma_{\text{base}} = 1.1$ log-dollars, compared with a current distribution of $\mu_{\text{curr}} = 4.5$ and $\sigma_{\text{curr}} = 1.3$ log-dollars.

For the fitted Gaussian distributions, KL divergence has the following closed-form solution. It is exact for those density models; its fidelity to the transaction populations depends on the fit.

$$\mathcal{D}_{\text{KL}} = \ln \frac{\sigma_{\text{curr}}}{\sigma_{\text{base}}} + \frac{\sigma_{\text{base}}^2 + (\mu_{\text{base}} - \mu_{\text{curr}})^2}{2\sigma_{\text{curr}}^2} - \frac{1}{2}$$

The closed-form solution evaluates to $\mathcal{D}_{\text{KL}} = \ln \frac{1.3}{1.1} + \frac{1.30}{3.38} - 0.5 = 0.167 + 0.385 - 0.5 = 0.052$. The KL divergence of 0.052 indicates moderate drift, warranting further investigation but not immediate retraining.

Step 3 statistical significance via KS test The KS test on 10,000 baseline samples and 10,000 current samples of transaction amount returns $\mathcal{D}_{\text{KS}} = 0.089$. The service tests at the Bonferroni-corrected level $\alpha_{\text{sig}} = 0.01$ that the team configured. At this per-test level, the asymptotic coefficient is $c(\alpha_{\text{sig}}) = \sqrt{-\ln(\alpha_{\text{sig}}/2)/2}$, so the critical value is $c(0.01)\sqrt{\frac{n+m}{nm}} \approx 1.63 \times 0.0141 \approx 0.023$.

The observed statistic is several times that critical value. Tightening the level tenfold, to $\alpha_{\text{sig}} = 0.001$, raises the coefficient $c(\alpha_{\text{sig}})$ only modestly, because it grows with the square root of $\ln(2/\alpha_{\text{sig}})$, so the same statistic also rejects at that stricter level. The difference is therefore statistically significant $(p_{\text{val}} < 0.001)$. However, *statistical significance* alone does not mandate retraining; the *practical significance* (PSI, KL values) supports investigation while monitoring continues, rather than immediate retraining.

Step 4 decision framework application Table 0.206 combines the quantitative evidence.

Table 0.206: Fraud-Monitoring Decision Matrix: Combined quantitative evidence for this worked scenario, compared with thresholds calibrated to its historical traffic and review capacity. The KL and KS results cross their investigation triggers; serving continues with increased monitoring while the team assesses the shift. Statistical significance alone does not command retraining.

Metric	Value	Threshold	Action Level
PSI (country)	0.065	< 0.1	Monitor
$\mathcal{D}_{\mathrm{KL}}$ **(amount)**	0.052	> 0.05	Investigate
KS test	$p_{\mathrm{val}} < 0.001$	$\alpha_{\mathrm{sig}} = 0.01$ (Bonferroni)	Investigate

Decision: Continue serving this fraud model with increased monitoring frequency (weekly instead of monthly), while investigating the transaction-amount shift. The moderate KL divergence and significant KS result justify that review under the team's configured triggers; the country PSI does not add an independent alert. A model update becomes a candidate only if delayed labels show degradation beyond the team's validated tolerance and the investigation identifies a shift that retraining can address. The numerical cutoffs belong to this worked service; another model must calibrate its own thresholds from baseline variation, failure consequences, and response capacity.


Retraining decision framework

A systematic decision framework integrates drift metrics with performance monitoring to decide whether a model update is warranted. The three levels below deliberately separate detection, correlation, and action so metric alerts do not become automatic retraining commands.

Level 1 automated monitoring The first level automates detection only. The fraud team's three triggers show its general form. Each threshold is derived from the service's own historical baseline rather than copied from a convention, and any significance level is a per-test level after correction for the configured family of tests, so it must be recomputed when features are added to the family or its error budget changes. Crossing any threshold initiates an operational investigation rather than triggering an automated retraining pipeline.

Level 2 performance correlation Comparing scenario-calibrated alerts with observed performance yields three cases that guide investigation. If observed performance degradation exceeds the service's validated tolerance and coincides with detected drift, operators isolate the affected data slices to test whether recalibration, data repair, or retraining directly addresses the root cause. Conversely, when drift is detected while serving performance remains stable, the service continues operating under elevated monitoring while the team investigates the drift source. Finally, if performance degrades without detectable feature drift, operators investigate changes the monitored marginals could miss, including concept drift, joint-feature changes, and pipeline or model faults. An unchanged feature dashboard does not identify which of these caused the error.

Level 3 retraining vs. investigation Not all drift requires retraining. Table 0.207 separates immediate remediation from investigation and continued monitoring.



Degradation without drift is the case the feature dashboard cannot explain.

Table 0.207: Retraining Decision Rules: Drift response depends on the strength of the statistical signal, observed performance change, and external evidence about whether the environment has truly changed.

Action	Trigger conditions	Response logic
Update model	Performance exceeds a validated error tolerance, labels confirm a shift, root-cause analysis shows a model update addresses it, and offline plus shadow evaluation clears the release gate	The evidence identifies recalibration or retraining as the appropriate response rather than merely detecting a population change
Investigate first	A scenario-calibrated drift alert fires while performance remains stable, the shift is localized to nonpredictive features, or a seasonal or one-time event is plausible	The signal justifies diagnosis, but not a predetermined remediation

Action	Trigger conditions	Response logic
Continue monitoring	Drift statistics remain inside the service's calibrated baseline, performance stays within tolerance, and no external evidence suggests environmental change	The evidence does not yet justify changing the model, but the baseline remains under observation

The quantitative framework transforms drift detection from reactive troubleshooting into proactive model maintenance, enabling ML systems to maintain reliability as production environments evolve (Gama et al. 2014). No PSI band is a universal retraining rule: a large shift in a nonpredictive feature may be harmless, while a small shift in a safety-critical subgroup may demand immediate containment.

Monitoring and adaptation strategies

The fraud example compared two features of one service against one baseline. A fleet runs the same comparison for thousands of features across many replicas, regions, and model versions, so the design of the monitor itself determines what the fleet can detect and what detection costs. The decision rules above still apply; the new questions are which statistic to compute where, and what to change once the evidence warrants a model update.

Each statistic carries a computational and sampling price, and the price decides where and how often it runs. In this illustrative H100-class monitoring scenario, one MMD comparison with radial basis function kernels ($\gamma = 1.0$) over a window of 10,000 samples takes an assumed 150 ms per window. Run hourly on sampled traffic, that is a small fraction of one accelerator's time, but the direct estimator's cost grows with the square of the window size, so doubling the window to gain detection power roughly quadruples the cost. The per-feature two-sample KS tests use 1,000 samples per window in this scenario. Each costs $\mathcal{O}(n \log n)$, dominated by sorting its window, which is cheap enough to run on every window for every feature, but these tests miss joint changes that preserve each feature's marginal distribution. The design therefore runs the cheap marginal tests continuously and reserves the joint kernel test for periodic, sampled checks. Neither sample count is a universal detection minimum; power depends on the shift and significance level. The service in this example uses PSI values from 0.1 to 0.25 as investigation triggers, not as universal statistical thresholds.

High-dimensional and temporal traffic requires more than one fleet-wide scalar. Marginal feature monitors can remain flat while correlations, sequence structure, or a small cohort changes. A production design therefore combines cheap per-feature alarms with embedding- or kernel-space tests, cohort slices, rolling windows at several durations, and change-point checks. At fleet scale, centralized comparisons add a communication workload, the C^3 communication axis, when replicas export samples or sketches. Local comparison, sampling, and hierarchical aggregation change that cost and the evidence available to the detector. The placement of the reference and the choice of statistic therefore shape both telemetry bandwidth and detection power. The windows must preserve seasonality and event context: comparing Monday traffic with Sunday traffic can manufacture an alert, while averaging a week can hide an abrupt one-hour failure. Monitor design is part of the hypothesis, not a neutral wrapper around the model.

When the Level 3 rules do call for a model update, the update itself is a budgeted response rather than an automatic retraining command. Online learning updates a model from sequential observations (Shalev-Shwartz 2012); preserving earlier behavior remains a separate design objective. The adaptation budget depends on model size, drift rate, and feedback latency: updating too aggressively can chase noise, while updating too slowly lets performance drift. In production, online-learning systems usually bound update frequency, state size, and serving latency explicitly rather than assuming adaptation is free. An update that fits the new distribution can also erase behavior the old one required, the catastrophic forgetting that also constrains on-device adaptation. Techniques like Elastic Weight Consolidation reduce it by penalizing changes to parameters important for previous tasks (Kirkpatrick et al. 2017).

↩ Catastrophic forgetting and the continual-adaptation techniques that limit it are established in section 20.

Adaptive ensemble methods maintain multiple models or hypotheses and weight or select among them using recent performance, making them useful under gradual concept drift (Gama et al. 2014).

This approach trades extra serving and monitoring complexity for the ability to respond when a single static model no longer matches the deployment distribution.

When the drifted data cannot leave the devices or regions that produce it, the same update can run as federated learning (section 14), which moves the adaptation to the data. The drift response then pays in communication rounds and transmitted bytes as well as training work, so the time from a confirmed shift to a validated update must be measured on the federated path rather than assumed from centralized retraining.

Per-request competence and selective prediction

Population monitoring asks whether traffic has changed in aggregate. A serving system faces a different decision on every request: whether this particular input lies within the model's demonstrated competence and whether the system should act on its prediction. A stable daily PSI can coexist with a rare, dangerous OOD request, while a large population shift can leave individual predictions well supported. Fleet robustness therefore needs both population monitors and a per-request decision contract.

The contract combines three signals. Calibration tests whether a score of 0.8 corresponds to approximately 80 percent correctness on a defined validation population (Guo et al. 2017). Out-of-distribution detection scores how unlike the request is from the model's validated input distribution (Hendrycks and Gimpel 2017). Selective prediction converts those signals into an action policy: answer above the acceptance threshold, route uncertain cases to a stronger model or reviewer, and abstain when neither path can satisfy the risk bound. None of the three substitutes for the others. A calibrated classifier can remain confidently wrong on OOD inputs, and an OOD detector can flag novelty without estimating task error.

Let $\kappa(x)$ be an acceptance score whose larger values indicate stronger evidence for answering, τ its threshold, $f(x)$ the prediction, and $\mathcal{L}(f(x), y)$ its loss against the observed outcome. For accepted set $\mathcal{A}_\tau = \{x : \kappa(x) \geq \tau\}$ at threshold τ, coverage is $\Pr(x \in \mathcal{A}_\tau)$ and selective risk is the mean loss conditioned on acceptance:

$$\text{coverage}(\tau) = \Pr(x \in \mathcal{A}_\tau), \qquad \text{risk}(\tau) = \mathbb{E}[\mathcal{L}(f(x), y) \mid x \in \mathcal{A}_\tau].$$

Sweeping τ produces a risk-coverage curve rather than one accuracy number. Raising the threshold reduces coverage, but lowers accepted-request risk only when the score orders requests by error risk well enough. That relationship must be measured on the deployment population, and the rejected traffic does not disappear. The fallback path needs enough queue, reviewer, or secondary-model capacity to absorb the abstention rate within the original latency and safety budget. If labels arrive days later, the system can monitor scores and fallback load immediately but cannot confirm selective risk until outcomes return. During that delay, rate limits and conservative thresholds can limit exposure, while the default response still requires validation against the application's hazards.

Finite-sample coverage with conformal prediction

Calibration describes whether predicted probabilities match empirical frequencies; selective prediction chooses which requests the system will answer. Conformal prediction provides a different contract: it wraps a fitted predictor with a nonconformity score $s(x, y)$ and a held-out calibration set. Here the score measures how poorly a candidate outcome y agrees with input x, so larger values mean less conformity; it is distinct from the acceptance score above. For a skin-lesion classifier, the prediction set might contain both benign and malignant rather than force a single diagnosis. Each candidate label remains in the set when its nonconformity score does not exceed a cutoff calibrated on held-out examples. The target miscoverage rate is ϵ. For the finite threshold below, assume $1/(n_{\text{cal}}+1) \leq \epsilon < 1$. For n_{cal} calibration scores sorted in ascending order, set $k_\epsilon = \min\{\lceil (n_{\text{cal}}+1)(1-\epsilon) \rceil, n_{\text{cal}}\}$ and $\hat{q}_{1-\epsilon} = s_{(k_\epsilon)}$. The prediction set is

$$\mathcal{C}(x) = \{y : s(x, y) \leq \hat{q}_{1-\epsilon}\}, \qquad \Pr(y_{n+1} \in \mathcal{C}(x_{n+1})) \geq 1 - \epsilon.$$

Here the test pair (x_{n+1}, y_{n+1}) follows the $n = n_{\text{cal}}$ calibration examples. Exchangeability means that permuting their order does not change their joint distribution; i.i.d. sampling is sufficient. Under this assumption and the stated range of ϵ, the $(n_{\text{cal}}+1)$ rank correction makes this a finite-sample

marginal coverage guarantee: exchangeability makes the test point's score equally likely to take any of the $n_{\text{cal}}+1$ ranks among the combined scores, so when averaging over the calibration sample and the new test example, the set contains the true outcome at least at the target rate (Lei et al. 2018). Using the ordinary empirical $(1-\epsilon)$ quantile instead can undercover at finite sample sizes. The guarantee is not conditional on a particular realized calibration set, input, or subgroup. A rare subgroup can have poor coverage even when aggregate coverage is correct, particularly when it contributes few calibration examples.

The systems obligation is to preserve the conditions behind the guarantee. A distribution change between calibration and serving can invalidate the exchangeability argument; calibration age alone does not establish such a change. Even if observed coverage remains adequate, the original guarantee needs its assumptions rechecked. Repeatedly tuning the model, score, or threshold against the same calibration outcomes makes the held-out evidence adaptive rather than independent. Production systems therefore version the predictor, score, calibration snapshot, and target ϵ together; monitor realized coverage by consequential slice once labels arrive; and refresh or quarantine the contract when traffic changes. Conformalization does not protect against arbitrary shift.

Set size or interval width supplies an operational load signal. Larger outputs convey less specific predictions and can trigger abstention, a stronger model, or human review, so their tail distribution determines fallback capacity just as the risk-coverage curve determines rejected traffic. The target coverage is therefore not free: increasing it usually widens sets, raises review demand, or reduces the fraction of requests on which the system can act automatically.

The failure modes above arise without an adversary, but the boundary with deliberate manipulation is porous. Distribution monitors can themselves be evaded by inputs crafted to stay under their thresholds, turning a defensive tool into a blind spot. Once an adversary stops relying on natural variation and begins optimizing against the model's decision boundaries to force specific errors, the threat model moves from environmental robustness to input-level attacks.

Checkpoint 14.2: Drift detection and the retraining decision

Environmental shifts split into distinct types, and the chapter's drift framework deliberately separates a fired metric from a retraining command.

Distinguishing the shift type

- ☐ **Shift taxonomy**: distinguish covariate shift, label shift, and concept drift by which probability the change touches, and explain why feature-statistics monitoring stays silent under pure concept drift.
- ☐ **Shortcut failure**: identify the failure in a cow-on-a-beach misclassification where the world has not changed but the model learned the wrong lesson, and explain why standard empirical risk minimization encourages it.

Reasoning about thresholds and cost

- ☐ **Threshold judgment**: select retraining, investigation, or continued monitoring for a high-importance feature whose population stability index is in the major-shift band while precision and recall stay flat.
- ☐ **Cost asymmetry**: explain why concept drift can cost more to remediate than covariate shift when adapting the conditional relationship requires fresh labels.

Input-Level Attacks: Adversarial Examples and Poisoning

Consider an attacker who modifies an image of a benign skin lesion to induce a malignant prediction while preserving its apparent clinical content. Whether that attack succeeds depends on the classifier, the allowed modifications, and the evaluation conditions. The high-dimensional decision boundaries learned by deep neural networks possess counterintuitive blind spots that malicious actors can deliberately exploit. The practical question is what the attacker can see or control: gradients, queries, physical sensors, or training data. Adversarial attacks expose these blind spots.

Adversarial attacks

Definition 14.3: Adversarial attack

Adversarial attack is a deliberate manipulation of a model's input, interaction, or environment designed to violate a specified behavioral objective. The manipulation may be norm-bounded and visually subtle, but it can also be semantic, physical, query-based, or conspicuous.

1. **Significance**: Adversarial evaluation asks whether an attacker can choose inputs or transformations that drive the model outside its intended behavioral envelope. High-dimensional, norm-bounded image perturbations are one important case, but patches, rotations, printed objects, malicious text, and repeated black-box queries expose different system boundaries.
2. **Distinction**: Unlike random corruption sampled independently of the target, an adversarial manipulation is selected to cause failure. It need not use gradients: attackers may use surrogate models, decision-only queries, search, semantic edits, or control over the physical sensing environment.
3. **Common pitfall**: A frequent misconception is that adversarial vulnerability is a "bug" to be patched. In reality, it is a structural vulnerability of many standard neural networks trained by empirical risk minimization; robust defense typically requires fundamental changes to the objective function (for example, adversarial training).

Adversarial attack categories encode access and cost. A white-box attacker can use gradients directly, a black-box attacker uses surrogate transfer or queries to the target, and a physical attacker must survive cameras, lighting, and distance. Figure 0.204 demonstrates this vulnerability on an image-classification network: adding an imperceptible perturbation that follows the sign of the loss gradient ($\epsilon_{\text{adv}} = 0.007$), the fast gradient sign method defined below, flips GoogLeNet's prediction from panda (57.7 percent confidence) to gibbon (99.3 percent confidence), leaving the classifier paradoxically more confident in the erroneous label than the ground truth.

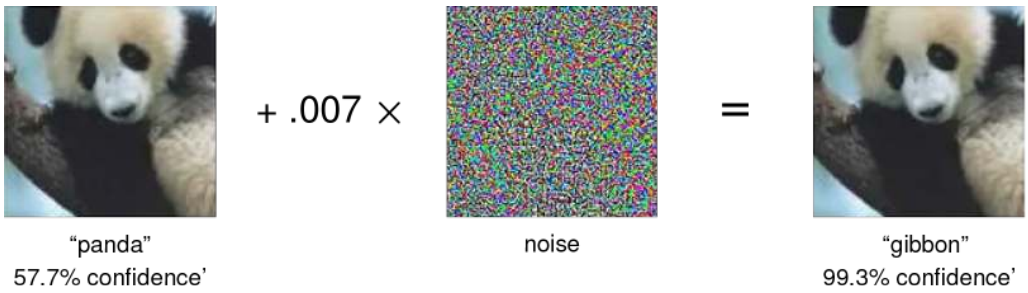


Figure 0.204: Imperceptible Misclassification in GoogLeNet: Adding a perturbation of $\epsilon_{\text{adv}} = 0.007$ in the sign direction of the loss gradient changes GoogLeNet's prediction from panda (57.7 percent confidence) to gibbon (99.3 percent confidence), although the two images look identical to a person. The attack does not merely flip the label; it leaves the model more confident in the wrong answer than it was in the right one. Source: (Goodfellow et al. 2015).

A visually small change need not produce a small change in a classifier's score.[9] Adversarial perturbations exploit how input changes accumulate in the model's decision function. Even a linear function can be sensitive to many small, aligned changes across input dimensions; nonlinearity alone does not explain the vulnerability. The relevant constraint is whether the allowed perturbation can move the input across the learned decision boundary.

Attack categories and mechanisms

The useful axis is not the attack name by itself but the attacker's access. Each mechanism reveals a different cost that the defense must raise: gradient access, optimization time, surrogate-model construction, or physical control over the sensor environment.

[9] **Human vs. Machine Perception**: First highlighted by Szegedy et al. (2013), neural networks learn statistical correlations in pixel space rather than the semantic invariances human vision enforces. Agreement on clean examples does not establish agreement under every small image change. Evaluation must therefore specify which transformations should preserve the label and test whether the model preserves that behavior; gradient-based training alone neither explains every attack nor guarantees the required invariance.

The most direct case is white-box gradient access. Neural networks compute gradients to learn how parameter changes reduce loss; an attacker with access to gradients can run that logic against the input instead. For an image classifier that correctly identifies a panda, the gradient with respect to the input image gives a local, first-order estimate of how pixel changes affect the loss. The **fast gradient sign method (FGSM)**[10] turns that idea into a single-step attack by choosing each feature's perturbation sign to maximize that first-order increase within a coordinate-wise budget.

The underlying mathematical formulation captures this intuitive process:

$$x_{\text{adv}} = x + \epsilon_{\text{adv}} \cdot \text{sign}(\nabla_x \mathcal{L}(\theta, x, y))$$

In this formulation, x denotes the original input, x_{adv} is the generated adversarial example, and $\mathcal{L}(\theta, x, y)$ represents the prediction loss evaluated at model parameters θ and true label y. The gradient term $\nabla_x \mathcal{L}$ describes local loss sensitivity, $\text{sign}(\cdot)$ extracts each component's sign to maximize the linearized loss within the coordinate-wise budget, and the scalar ϵ_{adv} bounds the maximum allowable perturbation magnitude under the ℓ_∞ norm. This single step need not maximize the nonlinear loss or cause misclassification. Image implementations also clip the perturbed input to its valid pixel range. The subscript distinguishes this adversarial radius from other uses of ϵ in the book, such as the differential-privacy budget.

Figure 0.205 geometricizes this single-step perturbation within the ℓ_∞ budget ϵ_{adv}: moving along the sign vector of $\nabla_x \mathcal{L}(\theta, x, y)$ propels input x to a corner of the bounding cube, producing x_{adv} and crossing the decision boundary into the adjacent class region in this illustration. A different boundary or gradient need not produce a successful attack within the same budget.

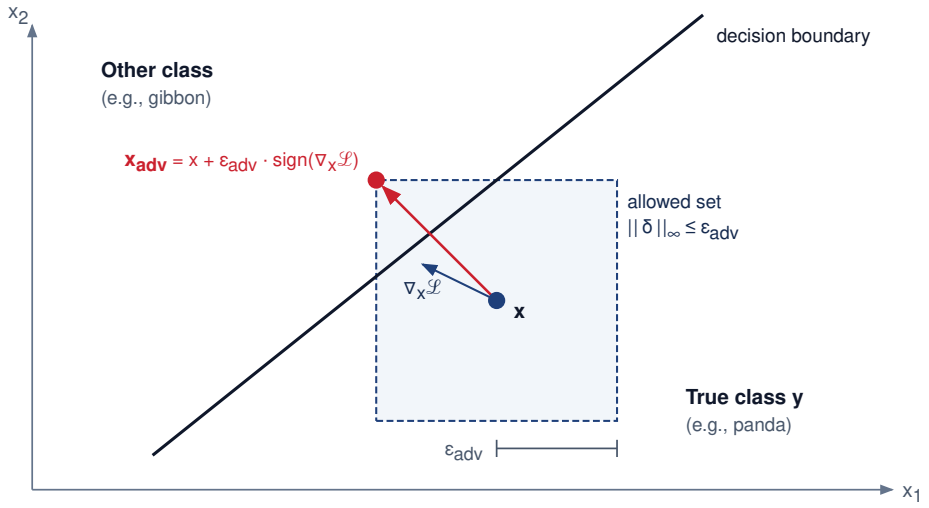


Figure 0.205: Gradient-Based Attack Geometry: Around a correctly classified input x, the dashed square marks every perturbation allowed by the ℓ_∞ budget ϵ_{adv}. FGSM moves each coordinate by the full budget in the sign direction of the loss gradient $\nabla_x \mathcal{L}(\theta, x, y)$, which lands x_{adv} on a corner of that square, the allowed point that maximizes the first-order increase in loss. A step no larger than ϵ_{adv} in any coordinate therefore carries the input across the decision boundary. The class labels are illustrative.

FGSM is cheap because it takes one step. The **projected gradient descent (PGD) attack** (Madry et al. 2018) spends more compute for a stronger attack: it repeatedly applies gradient updates and projects each step back into the allowed norm ball around the original input. That iterative refinement makes PGD a standard white-box robustness benchmark. The **Jacobian-based saliency map attack (JSMA)** (N. Papernot et al. 2016) uses the Jacobian to identify the most influential input features and perturb a smaller set of dimensions toward a target class. These methods are most effective in white-box settings,[11] where the attacker knows the model architecture and gradients.

10 **Fast Gradient Sign Method (FGSM)**: Proposed by Goodfellow et al. (2015) at ICLR, FGSM generates adversarial examples in a single gradient step, making it practical to use during training. This dual role is its lasting systems significance: the same attack that exposed neural network fragility became a simple adversarial-training primitive, where FGSM-generated perturbations augment clean batches with examples chosen to increase loss.

11 **White-Box Attack**: Adversarial attack with complete model knowledge (architecture, weights, gradients); methods like PGD and Carlini-Wagner (C&W) are strong because they optimize directly against the model rather than probing it from the outside. Though less realistic than black-box scenarios for many deployed systems, white-box analysis establishes a demanding benchmark within a specified norm, perturbation budget, and attack procedure. Passing PGD is evidence for that threat model, not a universal guarantee against every weaker-looking attack.

When the attacker cares less about speed and more about stealth, the attack becomes an optimization problem. The Carlini and Wagner (C&W) attack[12] (Carlini and Wagner 2017) searches for a small perturbation that causes misclassification under a chosen distance measure. Minimizing that distance encourages similarity, but does not certify human perceptual equivalence or a globally minimal perturbation. Instead of merely following the sign of a gradient, C&W optimizes a custom objective that trades perturbation size against confidence in the wrong answer.

C&W perturbations can be visually subtle, but human imperceptibility alone does not establish whether a detector will identify them. The attack can search under different norm constraints, such as ℓ_2 or ℓ_∞. The **elastic net attack to DNNs (EAD)** adds elastic net regularization, combining ℓ_1 and ℓ_2 penalties to generate sparse, localized perturbations. **DeepFool** (Moosavi-Dezfooli et al. 2015) takes a geometric route to the same goal: it linearizes the classifier around the input, steps to the nearest boundary of that linear approximation, and repeats until the label flips, giving a fast estimate of the smallest perturbation that suffices. These optimization-based methods are more computationally intensive than gradient-sign attacks, but they give the attacker finer control over the adversarial example's geometry.


Black-box attackers lose direct gradient access but keep two routes. Transfer attacks rely on transferability, the tendency of an adversarial example to fool models other than the one it was crafted on. The attacker crafts examples offline on a surrogate model and submits them to the target, typically through its public API, without seeing its weights or gradients. Query-based attacks probe the target itself. A decision-based, or boundary, attack needs only the returned label. It starts from an input the model already misclassifies and walks along the decision boundary toward the original input, querying at each step to stay on the wrong side. Its cost is the number of queries, which is why query budgets and rate limits belong to the defense.

Transfer success depends on model similarity, training-data overlap, and regularization, and attackers can improve it with input diversity, such as random resizing or cropping, and with momentum during optimization. Closing that route costs the defender training work. Ensemble adversarial training trains against perturbations generated on several models to improve transfer robustness, but the extra attack generation and model diversity make it a deliberate training-budget decision rather than a free mitigation (Tramèr et al. 2017).

Physical-world attackers face an additional constraint: the perturbation must survive sensors, distance, lighting, viewing angle, and ordinary deployment variation. Adversarial patches are printed patterns placed on objects so that cameras and detectors misread the scene. Modified road signs, clothing patches, and 3D-printed objects move the attack from the digital input tensor into the physical environment. That makes the robustness question operational rather than merely mathematical: a defense that works on a saved image may fail once the attack passes through a camera lens, compression, motion blur, and changing illumination. These threats matter most for AI systems deployed in physical spaces, such as autonomous vehicles, drones, and surveillance systems, where a model error becomes a safety, security, and accountability problem in the world.

12 **Carlini and Wagner (C&W) Attack**: Proposed in 2016 (IEEE S&P 2017), C&W formulates adversarial example generation as a constrained optimization problem that searches for a small perturbation causing misclassification without guaranteeing a global minimum. Its significance is methodological: C&W broke defensive distillation (an early defense that masked gradients to blunt weaker attacks) and other evaluated defenses, establishing the principle that robustness claims must be evaluated against optimization-based attacks, not merely gradient-sign heuristics.

↩ Transferability and the black-box threat model are established in section 9.



An example crafted on a surrogate fools similar models more often than dissimilar ones.

Example 14.1: The stop sign attack

Scenario: The road-sign sticker attack, already familiar as a security threat, places black and white stickers on a stop sign so that a vision model reads it as a speed limit sign (Eykholt et al. 2018). The robustness question is what its two reported success rates say about how an evaluation must be run.

Diagnosis: The attack succeeded on every tested laboratory image but on 84.8 percent of frames in the moving-vehicle field test. Each number is evidence only for its own capture conditions, and the gap between them does not isolate any one factor, such as distance, viewing angle, lighting, or motion.

Systems lesson: A physical attack must be evaluated through the full sensor loop, not on saved benchmark images. The evaluation should optimize the attack over the expected range of transformations (expectation over transformation) and then test it with real captures, and any claimed mitigation, such as spatio-temporal validation or sensor fusion, must be tested against attacks on the complete perception stack.

↩ The road-sign sticker attack is established as a security threat in section 11.

Physical perturbations also need not be subtle to matter. The perturbations in figure 0.206 range from a poster covering the whole sign to graffiti-style markings and sticker patches that pass for ordinary vandalism. The associated study evaluates whether these physical modifications induce misclassification through the camera pipeline without digital access to the captured input (Eykholt et al. 2017).



Figure 0.206: Physically Realizable Road-Sign Perturbations: Physically realizable modifications can cause machine learning models to make incorrect predictions. The three panels show perturbations from the original study, from a subtle full-sign poster to conspicuous graffiti-style camouflage and black-and-white sticker patches that look like ordinary vandalism yet trigger misclassification (Eykholt et al. 2017).

The attacker's access determines the evaluation a defense must survive. Table 0.208 distinguishes gradient access, optimization, surrogate transfer, and physical sensor manipulation so that a result under one attack mechanism does not become a claim about all of them.

Table 0.208: Adversarial Attack Categories: Attack mechanisms determine defense selection: gradient and optimization attacks require robustness against explicit decision-boundary crossing, transfer attacks test black-box exposure, and physical attacks require evaluation through the deployed sensor loop.

Category	Method	Mechanism
Gradient	FGSM	Perturbs inputs along the loss gradient
	PGD	Iterative multi-step FGSM refinement
	JSMA	Targets the most influential features
Optimization	C&W	Minimizes perturbation size subject to misclassification
	DeepFool	Estimates a small boundary-crossing perturbation by local linearization
	EAD	Elastic net regularization for sparse perturbations
Transfer	Transferability	Adversarial examples transfer across models (black-box)
Physical	Patches	Printed patches fool detectors in the real world
	3D Objects	Sculpted objects deceive sensors in deployment

Medical-imaging attacks can cause misdiagnosis (Tsai et al. 2023), while fraud and trading models face analogous manipulation risks. The common vulnerability is reliance on features that remain predictive on clean data but fail under crafted perturbations (Goodfellow et al. 2015; Madry et al. 2018). Defense shifts the resource cost: adversarial training adds training work (Bai et al. 2021), while runtime detection such as feature squeezing adds inference evaluations (Xu et al. 2018). The choice among these spending points motivates the defenses in section 14.

Data poisoning

The attacks so far perturb a fixed model at inference time. Poisoning instead changes the data from which the model learns. Systems that accept user contributions must distinguish evidence for learning from instructions that merely request a response. Microsoft's Tay incident illustrates the broader danger of adversarial interaction: the company reported a coordinated attack that defeated its filtering and stress testing within a day of launch (Lee 2016). The public account does not detail the mechanism, but the robustness lesson does not depend on it. Once live interaction can shape a model's later behavior, every user is a potential contributor of training evidence, and coordinated users can supply it on purpose. For systems that do learn from user feedback, the engineering question is therefore which contributions may enter training and how their influence can be audited.

↩ Data poisoning, the corruption of training data or updates so that the learned model misbehaves later, and its sequence of admission, training, and exploitation are established in section 8.

Automated collection, web scraping, and crowdsourced annotation make poisoning a pipeline-integrity problem: the system must identify compromised contributions before the learner incorporates them.

A classic early formulation in ML security is the attack by Biggio et al. (2012) on support-vector machines. More recent poisoning work broadens the target to web-scale and generative-model data pipelines (see also Shan et al. 2023). The dirty-label attack sampled in figure 0.207 corrupts training data by pairing cat images with misleading 'dog' captions, attempting to induce fraudulent associations during multimodal pretraining. The consequences are especially severe in high-stakes domains like healthcare, where even small disruptions to training data can lead to dangerous misdiagnoses (Marulli et al. 2022).



Figure 0.207: Dirty-Label Data Poisoning: Mismatched image-text pairs represent a dirty-label poisoning attack where cat images are paired with misleading 'dog' captions in training data. Incorporating these corrupted pairs can cause models to learn incorrect multimodal associations.

Because admitting a poisoned record does not by itself guarantee that training will learn the attacker's behavior, the evidence that matters is behavioral, and it differs by attacker objective. Poisoning attacks divide by that objective into the four classes of the security threat model. An availability attack degrades the model's accuracy across the board, a targeted attack makes chosen inputs receive a chosen wrong output, a backdoor attack teaches the model to switch to the attacker's output whenever a trigger appears, and a subpopulation attack degrades one cohort while leaving the rest intact. The robustness question is which evidence exposes each class and what that evidence costs (Oprea et al. 2022). Successful availability attacks can lower aggregate validation accuracy, giving broad evaluation a signal to investigate. Targeted and subpopulation attacks can leave that aggregate nearly intact, making evaluation on the named targets and cohorts particularly important. Backdoors can also preserve clean-data accuracy while responding to a trigger the evaluator has never seen. In the BadNets construction, a small pixel pattern is stamped onto some training images that are relabeled to the target class, so the network learns that the pattern alone decides the output while clean images classify normally (Gu et al. 2017); possible detection strategies include trigger search, canary inputs, and activation-space inspection when poisoned and clean representations separate (Tran et al. 2018).



Lighthouse 14.1: Archetype B (DLRM at Scale): Fake profile injection

Archetype B (DLRM at Scale) is especially exposed to **fake profile injection**. Because recommendation systems often use online learning to adapt to user trends in real time, an adversary

can create a network of "sybil" accounts, fake identities controlled by the same attacker, that interact with specific items to artificially boost their popularity or associate them with high-value demographics. This poisoning bypasses traditional firewalls because the malicious interactions look like legitimate user behavior, motivating checks on contributor identity, interaction patterns, and learned representations. Spectral-signature defenses (developed in section 18) search activation patterns for suspicious separation, but their effectiveness depends on whether the poisoned and clean contributions separate in that representation.

Poisoned records can resemble legitimate data, so clean aggregate validation accuracy alone cannot establish that a training corpus is trustworthy. Detectability depends on the attacker's objective and on which records, representations, and behavioral slices the evaluator inspects. Attacks may originate from internal actors with privileged pipeline access or from external adversaries who exploit weak points in data collection, particularly in crowdsourced environments or open data pipelines that lack integrity checks and lineage tracking.

Example 14.2: Targeted poisoning classification

Scenario: An attacker modifies the labels of a small subset of training data so that one deployed classifier consistently maps a particular protected class or object pattern to the wrong output.

Diagnosis: This is a targeted attack. The attacker is not trying to degrade overall model performance; they are inducing a specific error while preserving enough general accuracy that aggregate validation metrics may still look healthy.

Systems lesson: Defending against targeted poisoning requires slice-level evaluation, provenance checks, and canary examples for high-risk classes. Aggregate accuracy alone is a weak detector because the attack is designed to hide inside otherwise normal performance.

Distributed and federated training adds a contributor axis to the same threat. A malicious client need not insert a visible record into a central corpus; it can submit a model update chosen to move the aggregate, implant a backdoor, or exploit sybil identities to gain disproportionate weight. Archetype C (Federated MobileNet) makes this concrete: the server aggregates updates from a large population of smartphone-class clients whose raw data it never sees. Contributor-level checks can screen updates before aggregation, while held-out behavioral tests can reveal harmful effects in the resulting global model. The evaluation must vary the number and coordination of malicious contributors, their data heterogeneity, participation schedule, and knowledge of the aggregation rule. Global clean accuracy is again insufficient: the gate needs attack success on the trigger or target subpopulation, contributor-level anomaly recall, and the clean-utility cost of robust aggregation. Krum, coordinate-wise median, and trimmed mean tolerate bounded Byzantine behavior only under their stated assumptions (Blanchard et al. 2017; Yin et al. 2018); high dimensionality and non-i.i.d. client updates can make honest contributors look anomalous. These rules also change the collective. A mean can be computed by an AllReduce that sums partial results, but a median, trimmed mean, or Krum selection needs the individual updates, and a direct gather-based implementation raises per-worker traffic by about a factor of $N_{\text{DP}}/2$ relative to ring AllReduce, where N_{DP} here counts the contributing replicas rather than accelerators. That cost lands on $T_{\text{comm}}(N)$ in the Fleet Law unless it overlaps with computation. Provenance, participation limits, robust aggregation, and held-out canaries must therefore work together rather than treating one distance rule as a poisoning proof.

↩ The traffic cost of gather-based robust aggregation relative to ring AllReduce is established in section 11.

Data poisoning attack methods

The four categories above describe an attacker's *objective*; the attack *mechanism* depends on the attacker's access to the system and knowledge of the data pipeline. As diagrammed in figure 0.208, all of them share a common shape: a poisoned record enters the training pipeline alongside clean data and attempts to alter the resulting model's behavior. The most direct mechanism is label modification, where an attacker selects a subset of training samples and alters their labels, flipping $y = 1$ to $y = 0$ or reassigning categories in multi-class settings. Even small-scale label corruption can shift decision boundaries significantly.

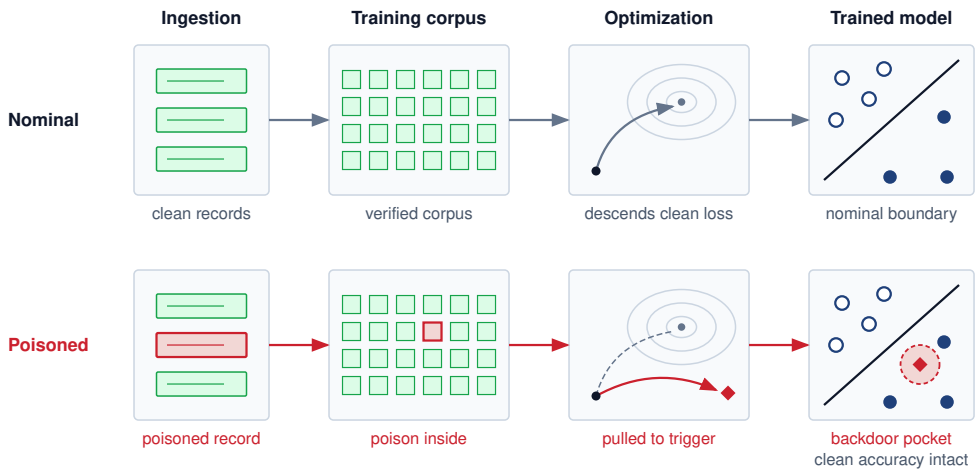


Figure 0.208: Data Poisoning Impact: A nominal pipeline (top) and a poisoned pipeline (bottom) pass through the same four stages. In the illustrated successful attack, a poisoned record admitted at ingestion contaminates the training corpus, pulls the optimizer's gradients toward the attacker's trigger, and yields a backdoored model whose clean accuracy can remain intact, so aggregate validation alone can miss it.

After label modification, the attacker can keep the label intact and corrupt the features instead, the strategy known as **clean-label poisoning**. Because every label is correct, label audits cannot flag these records. Imperceptible image perturbations, subtle shifts in structured fields, and fixed trigger patterns all aim for the same outcome: the training example still appears legitimate, but it bends the learned decision boundary toward a future failure. Generative methods and data-synthesis tools raise the same risk at larger scale because they can create natural-looking examples whose only purpose is to distort what the model learns.

Whether those examples become poisoning depends on the data boundary. Web scraping, social media feeds, crowdsourced annotation, and untrusted user submissions all allow poisoned records to enter upstream and pass through weak cleaning checks in a "trusted" form. Physical systems add a second path: a sticker on a road sign is an inference-time adversarial attack when the car sees it, but harvesting that image into a training corpus creates a potential poisoning path only if the contribution serves an attack on the learner. Correctly labeled examples of such inputs can instead help train resistance to them. Online learning systems tighten the feedback loop further, allowing an attacker to introduce small increments of malicious data until model behavior drifts without a single obvious anomaly. As diagrammed in figure 0.209, collaborative settings widen the boundary again: when many clients each contribute model updates to a central aggregator, a single malicious participant can poison the shared global model that aggregation produces.

Insiders such as annotators or data vendors can exploit knowledge of the model and training procedure to make these attacks harder to detect. Clean benchmark performance therefore does not establish training-data integrity.

Art protection via poisoning case study

Data poisoning is not always malicious. Researchers have begun exploring it as a defensive tool, particularly for protecting creative work from unauthorized use by generative AI models.

Nightshade, developed by researchers at the University of Chicago, aims to deter unauthorized training by poisoning images that a scraper may collect (Shan et al. 2023). It does not block scraping itself. Its perturbations preserve the apparent image content while changing how a model learns from it; the reported experiments show targeted concept corruption when the modified images enter the tested training pipelines.

The dose-response matrix in figure 0.210 charts this progressive corruption across four poison doses (0 to 300 samples) and eight prompt concepts: as the dose increases, Stable Diffusion XL

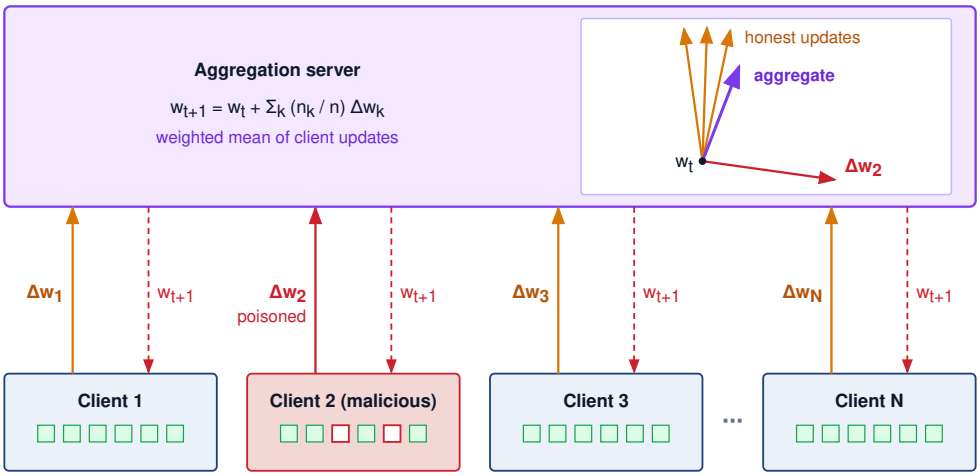


Figure 0.209: Collaborative Poisoning via Aggregation: In a collaborative learning setting, multiple clients each train on local data and contribute model updates to a central server that aggregates them into a shared global model. A single malicious participant can inject poisoned updates that the server folds into the aggregated model, so the corruption spreads to every client without any one obvious anomaly. This attack surface differs from adversarial examples because it targets the model during *training* rather than at *inference*.

outputs morph away from source concepts (generating cows for "car" or cats for "dog") under the tested training conditions. These outputs demonstrate changed behavior without, by themselves, identifying the internal representation that caused it. The experiment demonstrates concept poisoning: poisoned samples distort a model's semantic associations.



Figure 0.210: Concept Poisoning Dose-Response: Stable Diffusion XL outputs across four poison doses (clean, 50, 100, 300 samples) and eight source prompts (dog, car, handbag, hat, fantasy art, cubism, cartoon, concept art). As the dose grows, outputs morph from the intended source concept toward the attacker's destination concept, demonstrating Nightshade-style concept poisoning of a pretrained model.

The Nightshade experiments also report effects on concepts related to the poisoned target. This spillover extends the observed attack beyond the exact target prompt, but its reach depends on the model, poison construction, and training procedure. The same technique used to protect artistic

content could also be repurposed to sabotage legitimate training pipelines, highlighting the dual-use dilemma[13] at the heart of machine learning security.

The mechanics of these input-level attacks, from adversarial perturbations and data poisoning to their interaction with natural distribution shifts (section 9), define the threat surface. The next question is *how* to engineer the algorithmic defenses required to protect production models against them.

[13] **Dual-Use Dilemma**: The structural tension that defensive ML capabilities (adversarial training, data poisoning tools, red-teaming frameworks) are simultaneously offensive capabilities. This creates an arms race where defensive research publications become attack playbooks. For ML systems engineering, the consequence is architectural: robustness mechanisms must assume attacker knowledge of the defense, ruling out security-through-obscurity and motivating formal guarantees where feasible and adaptive empirical evaluation within the remaining threat model.

Adversarial Defenses

The classifier that called a panda a gibbon in figure 0.204 was not broken by random noise; a perturbation budget of 0.007 per pixel, spent along the gradient sign, was enough. Defending a deployed perception model against that attacker requires a threat model that names the attacker's access and a budget for testing and mitigation. The resulting robustness claim must state what the system pays in clean accuracy, training compute, inference latency, or operational coverage.

Adversarial defense workflow

The adversarial-defense workflow has four ordered layers:

1. **Define the threat model**: Specify the perturbation budget, attacker knowledge, and whether the attack occurs at inference time or during training.
2. **Choose the robustness budget**: Decide whether to spend the budget in training, certification, input detection, or serving-time guardrails.
3. **Measure the trade-off**: Evaluate both sides of the defense, because improving worst-case behavior can reduce clean accuracy, raise inference latency, or multiply training cost.
4. **Keep evaluation adversarial**: Test the defense against attacks stronger than the ones used to design it.

The order matters because an uncalibrated threat model makes the budget and evaluation loop meaningless.

For model-facing perturbation threats, the most direct training-time defense is **adversarial training**, which incorporates adversarial examples into the training process itself. The mechanism reuses the attacks of the previous section as a data generator. Each training step augments the batch with perturbed copies of its own inputs, so the model is trained on the high-loss points an attacker would choose. Listing 0.23 implements this pattern using FGSM to generate perturbations and mix clean and adversarial examples in each batch.

Listing 0.23: Adversarial Training Pseudocode: Framework-neutral adversarial training using FGSM-style perturbations during training, mixing clean and perturbed data to improve robustness against gradient-based attacks.

```
function adversarial_training_step(model, clean_batch, labels, epsilon):
    logits = model(clean_batch)
    clean_loss = loss(logits, labels)

    input_gradient = gradient(clean_loss, clean_batch)
    perturbation = epsilon * sign(input_gradient)
    adversarial_batch = stop_gradient(
        clip(clean_batch + perturbation, valid_input_range))

    mixed_batch = concatenate(clean_batch, adversarial_batch)
    mixed_labels = concatenate(labels, labels)

    return loss(model(mixed_batch), mixed_labels)
```

In listing 0.23, the sign step bounds each coordinate's change by the perturbation budget, while clipping keeps the perturbed input inside the valid input range (for example, $[0, 1]$ for normalized pixels). Concatenation doubles the effective batch size. The stop-gradient operation treats generated adversarial inputs as fixed during the outer weight update, rather than differentiating through attack construction. The caller differentiates the returned loss with respect to the model parameters and

performs the optimizer update. The perturbation budget ϵ_{adv} (the `epsilon` argument) bounds the allowed input change, while the attack algorithm determines how effectively it searches that set; computation reuse can reduce its training overhead (Shafahi et al. 2019).

Adversarial example generation increases training time because each training step requires additional forward and backward passes through the model (Madry et al. 2018; Bai et al. 2021). Memory overhead depends on whether the implementation stores clean and adversarial examples together, recomputes perturbations, or reuses gradient information. Iterative attacks like PGD add multiple optimization steps, so the implementation must budget that gradient work; optimized variants reduce overhead by reusing computations rather than treating every attack step as a separate full training pass (Shafahi et al. 2019).

A robustness recipe that increases model capacity also adds memory and training cost. The perturbation budget and training recipe require matched clean and adversarial validation, and the perspective below shows why that matching decides what the robustness tax actually is.

> Systems Perspective 14.1: Pricing the robustness tax correctly
>
> Suppose a standard ResNet-50 records 76 percent Top-1 accuracy on clean ImageNet, while an adversarially trained model records about 50 percent under a specified ℓ_∞ attack at $\epsilon_{\text{adv}} = 4/255$, the budget conventionally used for ImageNet. Subtracting these values yields 26 percentage points, but that gap compares different models under different evaluation conditions. It is not the clean-accuracy cost of robustness.
>
> The clean-accuracy tax must compare standard and robust models on the same clean test set. The robustness benefit must compare those models under the same attack, perturbation budget, and attack strength. The four cells are the standard model on clean data, the standard model under attack, the robust model on clean data, and the robust model under attack. The tax is the first minus the third, the benefit is the fourth minus the second, and the quoted pair supplies only the first and the fourth. Reporting all four cells prevents an apparent trade-off from mixing a model effect with an evaluation-condition effect.
>
> **Systems insight**: Robustness can reduce clean accuracy and increase compute, but each tax needs a like-for-like baseline. A deployment gate should report clean accuracy, empirical robust accuracy, attack specification, and evaluation cost separately.

The robustness compute penalty (principle 22) quantifies this cost: PGD-style adversarial robustness can demand several times more compute per epoch than standard optimization because each batch runs inner attack steps. In Fleet Law terms (equation 0.3) the multiplier lands on T_{compute}. At a fixed worker count it adds local work, but the elapsed-time penalty depends on reuse and on which term limits the step. Adding workers changes communication and synchronization costs with N and may not recover the original duration. Notebook 14.2 makes the multiplier concrete.

> Napkin Math 14.2: The cost of defense
>
> **Problem**: A team is training a robust classifier for an autonomous vehicle. Instead of the single FGSM step in listing 0.23, it uses adversarial training with a seven-step PGD attack (PGD-7) that searches for a high-loss perturbation inside a specified norm ball for every training batch, and, following the standard PGD adversarial-training recipe (Madry et al. 2018), it trains on the adversarial batch alone rather than on the listing's doubled clean-plus-adversarial batch. How much does this extra attack-generation work slow down the training run?
>
> **Math**: In this example, generating the adversarial input uses K_{PGD} additional gradient steps per training sample, each a forward and backward pass with respect to the input, before the one weight-update pass on the adversarial batch. The estimate treats each attack step as equal in cost to the standard training pass, with no reuse; it is a work model rather than a measured wall-clock slowdown. By the same accounting, the FGSM listing spends one attack pass plus

an update pass over a batch twice the original size, about three standard passes in all, so PGD-7 trades a further factor of more than two in training work for a stronger inner attack.

1. **Forward/backward passes**: 1 (Standard) + 7 (Attack Generation) = 8 total passes.
2. **Training slowdown**: 8× under the equal-cost-pass assumption.
3. **Utility evidence**: The added work must be justified by measured robust accuracy under the specified attack. Generalization to other attacks requires separate evaluation. Pricing any clean-accuracy cost requires the like-for-like comparison in perspective 14.1, not a subtraction of robust accuracy from another model's clean accuracy.

Systems insight: In this PGD-7 work model, the team budgets 8× the baseline compute before measuring the robustness benefit or actual elapsed-time penalty. In a machine learning fleet, robustness is not a setting that can be switched on; it is a budget the team spends, and the budget must be justified by the failure consequence of the component being hardened.

For lower-risk components, external guardrails such as input filtering and output verification can cost less than training intrinsic robustness into the weights, provided adaptive evaluation (section 17) supports acceptable residual risk against an attacker who knows the guardrail. Passing a finite set of attacks does not prove that no bypass exists. Safety-critical paths more often justify the training and certification budget.

Example 14.3: Defense selection by threat model

Scenario: Production teams must select defenses across three distinct system settings: an image classifier facing evasion attacks, a recommendation system facing training data poisoning, and a fraud detector facing natural distribution shift.

Diagnosis: An inference-time input filter alone cannot meet all three needs. It adds work on the image classifier's serving path, but does not establish the integrity of recommendation training data or track changes in the fraud detector's deployment population.

Systems lesson: Defense selection must be tailored to the threat model. Adversarial training targets the specified evasion threat, source controls, sanitization, and robust training objectives (section 17) limit some poisoning mechanisms, and drift monitoring identifies shifts for investigation. Each choice needs evaluation against its own failure conditions; detection alone does not restore valid predictions.

Certified defenses

Adversarial training provides empirical resistance that must be tested against the deployment threat model. It can generalize beyond the examples generated during training, but attack evaluation alone does not prove invariance throughout an allowed perturbation set. **Certified robustness** offers a mathematical guarantee: for a given input x and radius ϵ_{adv}, no perturbation $\|\delta_{\text{adv}}\|_p < \epsilon_{\text{adv}}$ exists that changes the model's prediction. This certifies local prediction stability, not that the unchanged prediction is correct. The certified radius is a provable lower bound on the input-perturbation part of the robustness margin that compression and other efficiency changes must preserve. The guarantee formalizes the intuition, met in the pipeline overview, that a robust model limits how quickly its outputs can change as its inputs change. The model's **Lipschitz constant**[14] bounds that rate, so a prediction cannot change within any radius over which the largest possible score change stays below its top-class margin. A widely used technique for scaling this idea to high-dimensional inputs like ImageNet is **randomized smoothing**. Instead of classifying x directly, it classifies the smoothed function $g(x)$, defined as the most probable class predicted by the base classifier f under Gaussian noise: $g(x) = \arg\max_j \Pr(f(x+\delta) = j)$ where $\delta \sim \mathcal{N}(\mathbf{0}, \sigma^2\mathbf{I})$.

Cohen et al. (2019) proved a tight multiclass bound for the certified radius R using a lower bound on the top-class probability p_A and an upper bound on the runner-up probability p_B: $R = \frac{\sigma}{2}\left(\Phi^{-1}(p_A) - \Phi^{-1}(p_B)\right)$, where Φ^{-1} is the inverse standard normal CDF. In the binary special case, where $p_B = 1 - p_A$, this reduces to $R = \sigma\Phi^{-1}(p_A)$. This Gaussian-smoothing bound certifies

[14] **Lipschitz Continuity**: A mathematical property that bounds how much a function's output changes relative to its input change ($\|f(x) - f(x')\| \leq K\|x - x'\|$). A small Lipschitz constant (K) limits score movement, but it does not by itself prevent a label flip. A robustness certificate additionally requires the top-class score margin over the runner-up to exceed the worst-case score change within the perturbation radius; reducing K can enlarge that certified radius, though enforcing a low constant can trade away clean-data accuracy and add training cost.

a Euclidean (ℓ_2) perturbation radius, measured in the same units as the input to which the noise is added; it does not automatically certify the other norms used in attack benchmarks. If a binary decision has top-class probability $p_A = 0.999$ under noise $\sigma = 0.5$, the simplified radius is approximately 1.5 in those input units. For an image scaled to $[0, 1]$, that radius bounds the Euclidean length of the whole perturbation vector. It is not directly comparable to the per-coordinate ℓ_∞ budget of the robustness-tax comparison, because an ℓ_∞ perturbation of size ϵ_{adv} spread over d pixels can have Euclidean length up to $\epsilon_{\text{adv}}\sqrt{d}$, so a per-pixel budget that looks tiny can correspond to a long Euclidean vector on a high-dimensional image.

The multiclass case rarely estimates the runner-up probability separately. Because the class probabilities sum to one, no competing class can exceed $1 - p_A$, so a lower bound on p_A alone also bounds every competitor. Estimating that lower bound from samples turns certification into a statistical estimation problem and adds a confidence level to the certificate; an observed class frequency alone is not a certified probability bound. Certification also carries accuracy and compute trade-offs. On ImageNet, the same work reports nontrivial certified accuracy for randomized smoothing, including certification at radius 0.5, but certification requires sampling many noise vectors per inference to estimate class probabilities with sufficient confidence. The increase in inference latency makes the sample budget a deployment constraint. Two designs keep certification outside the tight serving budget. Asynchronous auditing certifies a sampled fraction of served requests offline, so the fleet learns how often its answers were certifiable without delaying any of them. A selective safety interlock certifies only the requests routed to a safety-critical action, such as a braking decision, and lets the remaining traffic take the uncertified path.

Certified defenses cover one part of the adversarial workflow. Production systems still need detection paths for suspicious inputs, mitigation strategies that change training or serving behavior, and evaluation procedures that verify which threat models remain covered.

Detection techniques

Detecting adversarial examples before they reach the model forms the first line of defense only when the signal reaches a serving decision: reject, transform, route, or audit. A population-level signal asks whether a window of current inputs still resembles the reference population. The two-sample tests of section 9 serve here unchanged. A KS test, or the Anderson-Darling test, a variant that weights differences in the distribution tails more heavily, can flag a traffic window whose inputs no longer resemble the reference. Such an alert does not identify an individual request as adversarial; per-request rejection requires an additional decision rule. These tests also inherit the drift monitors' blind spot, since an adversarial perturbation can preserve each feature's marginal distribution while corrupting the joint structure that joint-distribution or embedding-space comparisons would expose.

An attack that preserves marginal distributions can evade that signal, motivating a complementary comparison under input transformations. **Feature squeezing**[15] (Xu et al. 2018) reduces input-space complexity through color bit-depth reduction or spatial smoothing, then compares the model's prediction before and after the transformation. A large prediction change flags sensitivity to the transformation. It does not by itself establish malicious intent or identify which image detail caused the change; legitimate inputs can also trigger the detector.

Another signal asks whether the model is uncertain about its own answer. An uncertainty estimate can route an input for rejection, human review, or a more robust model. Bayesian neural networks estimate uncertainty by placing a probability distribution over each weight and averaging predictions over sampled weights, so disagreement among those samples signals uncertainty, while ensemble methods compare predictions from independently trained models and use disagreement as the warning signal (Lakshminarayanan et al. 2017). Their detection value depends on whether uncertainty distinguishes harmful inputs from legitimate ones under the chosen attack. Repeated predictions add inference work, so deployments must evaluate both missed attacks and serving cost rather than assume that a more expensive estimator detects more.

Dropout, the training-time regularizer that randomly deactivates neurons (Hinton et al. 2012), offers a cheaper approximation to that weight sampling. It can be repurposed for uncertainty estimation through **Monte Carlo dropout**[16] at inference time, where multiple forward passes with different dropout masks approximate the uncertainty distribution. Monte Carlo dropout is itself an approximate Bayesian method. Its uncertainty estimates must be validated on the deployment

15 **Feature Squeezing**: Defense proposed by Xu et al. (2018) that reduces input precision (for example, 256 to 16 color levels) or applies spatial smoothing (median filtering) to disrupt some fine-grained perturbations. Such transformations can also alter useful clean-input features and do not cover every attack mechanism. In their evaluation, feature squeezing eliminated many adversarial examples while maintaining high clean accuracy; adaptive attacks require validation before treating the defense as production-ready.

16 **Monte Carlo dropout**: Proposed by Gal and Ghahramani (2016), MC dropout reinterprets dropout as approximate Bayesian inference by keeping dropout active across repeated stochastic forward passes. The variance across predictions provides an uncertainty estimate with no architectural changes. Each additional sample adds inference work, so deployments must select the sample count against their latency and uncertainty budgets.

population rather than ranked by the original purpose of dropout. Hybrid approaches that combine dropout with lightweight ensemble methods or Bayesian approximations balance computational efficiency with estimation quality, making uncertainty-based detection more practical for production deployment.

Other defense strategies

Adversarial training, certification, and detection do not exhaust the options. The remaining strategies move the spending point rather than eliminating the cost. **Defensive distillation** (Nicolas Papernot, McDaniel, Wu, et al. 2016) teaches a student model from the teacher's soft labels, but its apparent adversarial protection proved vulnerable to attacks that bypassed the resulting gradient masking (Carlini and Wagner 2017). It illustrates why making an attack optimizer fail is not evidence that nearby adversarial inputs are absent. Input preprocessing spends the defense budget at serving time: image denoising, JPEG compression, random resizing, padding, and random transformations try to erase perturbations before the model sees them. Ensembles spend it through redundancy, combining models with different architectures, training data, or preprocessing paths so that a perturbation that fools one member is less likely to fool all of them.

Evaluation and testing

Evaluating adversarial defenses closes the budget loop: the system must measure which attacks the defense actually covers and what performance it sacrifices under controlled attack conditions. Robustness metrics quantify resilience through accuracy on adversarial examples, the distortion required to fool the model, and performance over attack budgets. Standardized benchmarks such as MNIST-C (Mu and Gilmer 2019), CIFAR-10-C, and ImageNet-C (Hendrycks and Dietterich 2019) measure common corruptions rather than malicious worst-case behavior, so their results occupy a different cell of table 0.202.

Empirical attack evaluation must be adaptive to the defense. The evaluator should know the preprocessing, detector, randomness, ensemble, and rejection rule; optimize through differentiable components; use expectation over transformation for randomness; test transfer and query-based attacks when gradients are unavailable; and include the complete pipeline rather than a saved model alone. Multiple random restarts and attack budgets can strengthen evidence within that threat model, but a passed PGD test proves neither that PGD found the inner maximum nor that semantic, physical, or differently normed attacks are covered. Only a certificate establishes a guarantee, and only for its stated input, norm, radius, and assumptions.

Robustness of generative models

The defenses above were built for classifiers, and generative models need the same discipline in a new form. An aligned language model of the Archetype A (GPT-4/Llama-3) class can pass its safety evaluations and still comply with a harmful request once an automatically optimized suffix is appended to the prompt, and suffixes optimized against open models transfer to other models (Zou et al. 2023). That suffix is an adversarial example in token space, found by gradient-guided search over discrete tokens rather than continuous pixels. Generative models also fail without any attacker. Their output is open-ended text rather than a label, so the robustness question changes from whether a label flips under perturbation to whether the generated content preserves factuality, policy constraints, and task intent across prompt variations. A fluent answer can be factually baseless while latency and uptime stay healthy, which makes hallucination the generative form of silent failure.

The evaluation discipline of table 0.202 carries over with three adjustments. First, correctness needs a named reference. A hallucination rate is meaningful only against a stated evidence source, such as the retrieved context, a verified knowledge base, or an expert-labeled answer set, and it counts the generated claims that this reference does not support. The measured rate also depends on the model, the retrieval context, the prompt design, and the sampling temperature, so a reported rate holds only for its prompt set and decoding settings and cannot be carried to another domain without re-measurement. Second, the perturbation budget becomes a family of prompt variations. Paraphrases, reordered context, and inserted distractors play the role that the ℓ_∞ ball plays for an image classifier, and robustness is reported for each family. Third, the slices are domains and user

populations, because an aggregate rate can hide a domain in which the model invents answers, just as the Google Photos failure hid inside aggregate image accuracy.

Detecting a hallucination on an individual request is the per-request competence problem of section 9 with an open-ended output. Token entropy and log-probability can expose instability in a generation, but neither is a factuality score. A model can assign high probability to a false statement learned from its data, or low probability to a correct but rare statement. Production routing must therefore calibrate these signals against task-specific errors and combine them with evidence checks, retrieval support, or external verification.

The self-consistency technique samples multiple reasoning paths or answers for the same query. Disagreement supplies an instability signal that can route the request for review; agreement supplies weaker evidence because correlated samples can repeat the same misconception or unsupported claim. Sequence-level entropy has the same limitation: it can serve as a calibrated routing feature for a named task, but it does not transform uncertainty into truthfulness. The signal also has a price. Each additional sample repeats the decode phase for that request, so drawing k samples multiplies its decode work roughly k-fold; only the prompt's prefill can be shared, when the serving system reuses the prompt's cached key-value state. Like the noise samples of randomized smoothing, this cost lands on the compute term of every request it covers, and the same remedy applies. The expensive signal should be spent on the requests whose cheap signals already indicate uncertainty rather than on all traffic. The operational contract must measure error conditional on the routing score and provision the refusal, retrieval, tool, or human path that receives flagged generations.

↩ Reuse of a shared prompt's cached key-value state across requests is established in section 6.

In retrieval-augmented generation (RAG) architectures, robustness depends heavily on the quality of the retrieved context. **Retrieval noise**, the injection of irrelevant or conflicting documents into the prompt, can distract the model, causing it to ignore its internal parametric knowledge and propagate errors from the context. Robust RAG deployments can use re-ranking models and context verifiers to filter out noise before it reaches the generation step. Their evaluation must separate retrieval failure from generation failure. Measuring answer support separately for requests whose retrieved context contains the answer and for requests whose context does not shows whether errors come from the retriever or from a model that ignores or overrides good evidence. The retrieval corpus is also an input an attacker may be able to write to, so a planted document can corrupt retrieval evidence or carry prompt injection, and the ingress controls of section 17 apply to it. It becomes a training-poisoning path if the pipeline later admits it into learning.

Language interfaces also carry the input-level attacker into text. Prompt injection, a failure of the boundary between control and data, embeds instructions in user content or retrieved documents so that the model overrides its system prompt. The payload can arrive through a legitimate input channel, so permission to submit content does not make that content trustworthy. External access controls still constrain which data or tools the surrounding system exposes. From the robustness side, evaluation asks whether the content induces behavior outside the intended output contract, and it is measured the way adversarial robustness is measured: as an attack success rate over an injection suite matched to the threat model, run by an evaluator who knows the system prompt and filters. Keeping those details secret is not a defense, because optimized suffixes transfer across models.

↩ Prompt injection as a failure of the boundary between control and data is established in section 11.

A common deployment pattern adds **output guardrails**, lightweight classifiers that scan generated text for policy violations or toxicity before the response returns to the user. A guardrail threshold trades the same two quantities as a selective-prediction threshold. Each false positive refuses or escalates a legitimate response, so the false-positive rate multiplied by the legitimate-request rate estimates false refusals or escalations; each false negative is residual risk that reaches the user. Total diverted load also includes correctly flagged harmful responses. The arrival rate at each refusal, retrieval, or human path is the incoming request rate multiplied by the fraction routed to that path under the policy, counting both true and false flags. Choosing the threshold from a curve measured on representative traffic, rather than from the classifier's default, allows the team to compare that load with the path's capacity. The guardrail also adds a model inference to every response, so its latency counts against the serving deadline. Finally, a guardrail is itself a model with its own decision boundary, so it carries the same obligation as any other defense and must pass the adaptive evaluation above against an attacker who knows it is there.

Adversarial training, certified defenses, and generative guardrails address attacks on model inputs at inference time within bounded threat models. They do not establish that the model was trained on trustworthy data. If an adversary compromises the data pipeline long before the model is compiled, inference-time behavioral tests may reveal a backdoor, but cannot by themselves establish the integrity of the training pipeline. The data poisoning attacks described earlier demand their own class of defenses.

Checkpoint 14.3: Choosing and budgeting an adversarial defense

An adversarial defense is a budgeted response to a specific threat model. Stronger guarantees commonly change clean accuracy, compute, latency, or coverage, but the direction and magnitude depend on the workload, model, defense, and evaluation boundary.

Matching defense to threat

- ☐ **Worst-case evaluation**: explain why passing a white-box PGD test provides empirical evidence only for the evaluated model, norm, budget, restarts, and attack implementation rather than a general worst-case guarantee.
- ☐ **Threat-model fit**: match the defense emphasis to an API-facing classifier and a safety-critical road-sign detector, and explain why adversarial training alone does not transfer between them.

Reasoning about the budget

- ☐ **Certified vs. empirical**: explain when randomized smoothing's sampling cost favors asynchronous auditing or a selective serving path rather than assuming that every certified deployment has the same latency constraint.
- ☐ **Defense budget**: compare input detection with intrinsic model robustness for a low-risk component using measured clean accuracy, robust accuracy, compute, latency, and coverage rather than assuming a fixed clean-accuracy tax.

Data Poisoning Defenses

A recommendation model may retain its overall accuracy while promoting an attacker's chosen item to a small group of users. Defending against that failure requires testing the targeted behavior as well as securing the integrity of the training supply chain. Source permissions set the security boundary, and robustness evaluation measures what happens when poisoned records or updates cross it anyway. The defense therefore runs as four ordered layers along the data path:

1. **Ingress controls** establish provenance and access limits, dictating which sources may contribute or modify data.
2. **Anomaly detection and sanitization** inspect candidate records before training and filter suspicious submissions.
3. **Robust training objectives** reduce the weight that extreme residuals receive for poisoned samples that evade ingestion filtering, although they do not by themselves bound parameter updates.
4. **Representation learning** reduces the model's reliance on brittle features that poisoned instances can exploit.

Each layer covers a distinct point along the data path, and no single detector can substitute for end-to-end controls. While representation learning broadens defense to handle ordinary distribution shift, it cannot prove that the training corpus is uncompromised.

For the recommendation system, the interception layer in figure 0.211 examines contributed ratings before they reach training. Its decisions must preserve provenance so later model failures can be traced back to the accepted records.

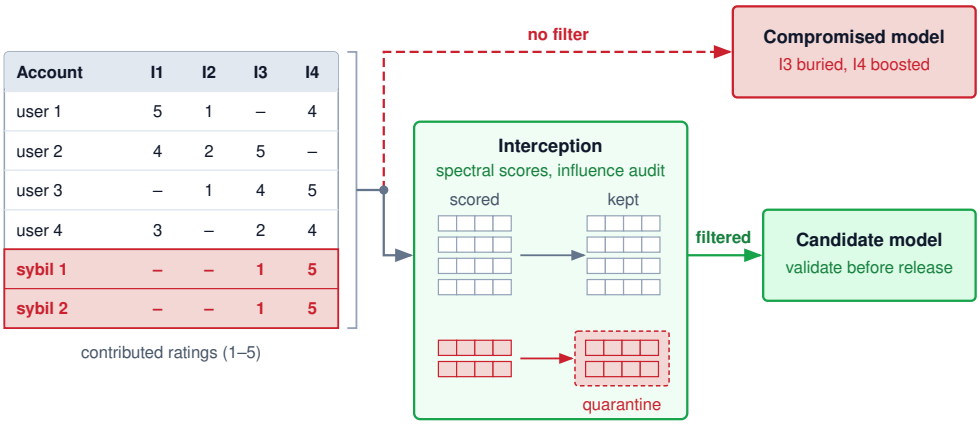


Figure 0.211: Data Poisoning and Interception Workflow: Adversaries inject malicious rows into a user-item rating matrix to manipulate model behavior. A defense layer analyzes contributed data and removes suspected malicious records before training. This can reduce poisoning risk but does not guarantee an uncorrupted model.

Ingress and anomaly controls

Poisoning defense begins at the data boundary, before any statistical detector runs. The pipeline must know which sources are allowed to contribute training data, how their authenticity is verified, and which roles can modify accepted records. Strong governance enforces the principle of least privilege,[17] logs data access and modification events, and gives each accepted batch a source identity. These controls do not prove that every record is clean, but they bound the attack surface and give anomaly findings a traceable origin.

After the source boundary, anomaly detection asks whether a candidate training example belongs to the distribution that the pipeline intended to learn from. The cheapest tests compare each record against the bulk distribution: Z-score filtering, Tukey's method, and Mahalanobis distance flag examples whose feature values sit far from normal ranges. These tests are useful because they are fast enough to run at ingestion, but they catch only poisons that look like statistical outliers in raw feature space. For high-dimensional or multimodal data, raw-feature distances are a weak signal: a manipulated image or caption that passes raw-feature checks may separate from clean examples in a pretrained vision or language model's embedding space. That separation depends on the encoder and attack, so it must be measured rather than inferred from the use of a learned representation. Applying Mahalanobis distance or clustering to those representations tests a different hypothesis from raw-feature screening. The pipeline must check whether the resulting outliers correspond to malicious contributions or to legitimate variation it needs to retain.

More coordinated attacks require structure-aware checks. Clustering methods such as K-means, DBSCAN, and hierarchical clustering look for anomalous groups or isolated points rather than single extreme values. The autoencoder ingestion gate diagrammed in figure 0.212 adds a learned representation to the screening pipeline: the model compresses inputs through a bottleneck layer $\mathbf{z}$, accepting records whose reconstruction error $\mathcal{L}_{\text{rec}}$ falls below threshold τ and quarantining anomalous outliers. Each method has a failure mode. Clean-label poisons need not be statistical outliers. Clustering depends on the representation, and autoencoders can reconstruct unfamiliar inputs well or learn an attack pattern from a contaminated reference corpus. Each gate therefore needs evaluation on both poisons and legitimate rare examples.

Sanitization and preprocessing

Sanitization turns anomaly signals into training-set changes before the poison reaches optimization. A suspicious record can be rejected, quarantined for review, down-weighted during training, or kept with an explicit provenance flag. Routine cleaning still matters: deduplication, missing-

[17] **Principle of Least Privilege**: Articulated by Saltzer and Schroeder (1975), this principle restricts access rights to the minimum necessary for each component. In an ML pipeline, a training job allowed to read unverified sources has an additional path through which adversarial data can enter, so write and read rights become part of the poisoning attack surface. The same principle governs the model registry, the artifact store that maps version identifiers to weight files and controls which alias (for example, `staging`, `production`) resolves to which checkpoint. Promotion to the `production` alias should be restricted to a narrow, audited set of automated evaluation services and named release engineers; if a researcher's credentials are compromised, excluding those credentials from promotion authority blocks that direct path to replacing the live model, while other authorized paths still require scrutiny.

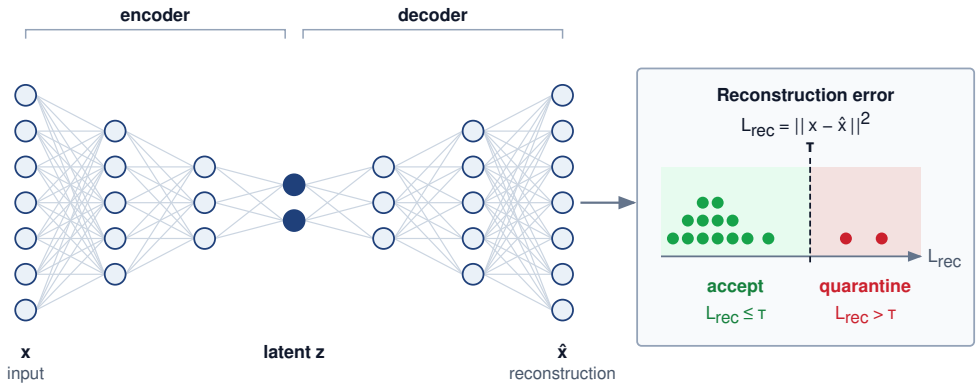



Figure 0.212: Autoencoder Ingestion Gate: An autoencoder trained on trusted data learns to compress inputs through a narrow latent layer **z** and reconstruct them. Reconstruction error supplies an anomaly score, not proof that an input is poisoned. The gate accepts records whose reconstruction error $\mathcal{L}_{\text{rec}}$ stays at or below a threshold τ calibrated on held-out clean data and quarantines the rest.

value handling, type checks, range constraints, and cross-field validation remove many low-effort poisoning attempts while improving ordinary data quality.

Data provenance and lineage tracking make those decisions reversible. Each datum needs a record of its source, transformations, validation outcomes, and movement through the pipeline. When a model later exhibits a poisoning symptom, lineage lets the operator trace model dependencies back to candidate source batches, investigate which contributions caused the behavior, estimate which trained models consumed confirmed compromised examples, and decide whether to remove, relabel, or reweight the affected records.

When suspicious data has already entered the corpus, sanitization moves from source checks to representation checks. Spectral signatures exploit separation between clean and poisoned samples in a learned representation (Tran et al. 2018). In the backdoor attacks studied by Tran and colleagues, the trigger created a strong signal in the target class's activations. Projecting centered representations onto the top singular vector and removing high-scoring samples exposed many poisoned records without requiring prior knowledge of the trigger. The method depends on sufficient separation relative to within-group variation; an effective backdoor does not by itself guarantee a usable spectral signature. Filtering therefore requires attack-specific evaluation and checks for discarded clean samples.

Influence functions (Koh and Liang 2017) serve a narrower debugging role. They approximate how infinitesimally increasing a training point z's weight changes the model's loss for a test point z_{test}, without retraining. The fitted parameters are the trained model's weights, and the Hessian is the curvature matrix of the average training loss at those parameters. Its inverse translates a small change in a training point's weight into an approximate change in the fitted parameters. Calculated through inverse-Hessian-vector products, influence $I(z, z_{\text{test}}) \approx -\nabla_\theta \mathcal{L}(z_{\text{test}}, \theta^*)^T \mathbf{H}^{-1} \nabla_\theta \mathcal{L}(z, \theta^*)$, this metric measures local sensitivity to upweighting z. For an average training loss over D examples, removing one point corresponds approximately to a weight change of $-1/D$, reversing the sign and scaling this influence by $1/D$. If a model begins assigning an attacker's target label to one narrow class of inputs, influence functions can rank the training examples that contributed most to that decision. The method avoids forming an explicit inverse Hessian by using iterative approximations, but its results remain approximate in deep nonconvex networks. At modern model scale, influence analysis therefore requires validation against the specific architecture, approximation, and debugging task rather than serving as exact attribution.



Huber limits a surviving outlier by growing linearly where MSE keeps squaring.

Robust training objectives

If poisoned samples survive sourcing and sanitization, the training objective offers another opportunity to limit their influence before release evaluation. Robust optimization modifies the objective

to minimize the impact of outliers or poisoned instances. Robust loss functions such as the Huber loss,[18] the Tukey loss (Beaton and Tukey 1974), and the trimmed mean loss down-weight or ignore the contribution of abnormal instances during training. Regularization techniques (ℓ_1 or ℓ_2 regularization) constrain model complexity and can reduce sensitivity to some poisoned data. At a higher level, minimax[19] and distributionally robust objectives optimize performance over a specified uncertainty set. The objective supplies a formal target; an approximate optimizer does not by itself prove that the trained model attains the target or resists attacks outside that set.

The image transformations displayed in figure 0.213 demonstrate how data augmentation expands training diversity: applying horizontal flips, rotations, and crops creates variants that preserve the label when the transform respects the class (a horizontally flipped digit need not) and can disrupt some localized poison patterns. Other transformations preserve an attack's trigger, so augmentation does not guarantee dilution. Random subsampling or bootstrap aggregating changes which poisoned records each model encounters; whether combining those models reduces the attack's effect requires evaluation against coordinated poisoning.

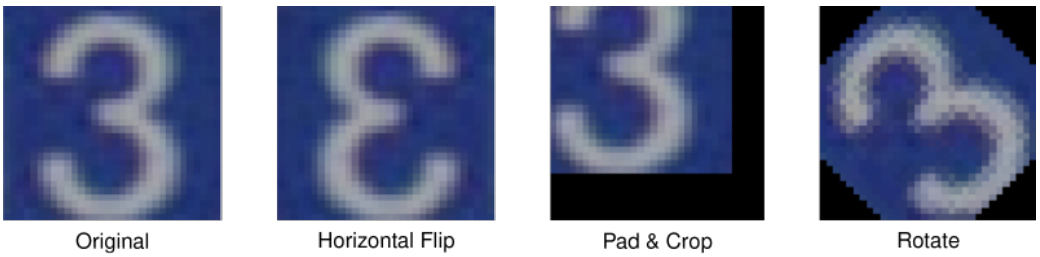


Figure 0.213: Data Augmentation Techniques: Applying transformations like horizontal flips, rotations, and cropping creates variants of existing training examples. When the transformations preserve the task label, they can improve robustness to the represented variations and reduce overfitting. Their effect on generalization and poisoning resistance requires evaluation.

The operating rule is layered: authenticate and govern sources before ingestion, sanitize suspicious data before training, limit surviving outliers during optimization, and preserve lineage so an incident can be traced back to the compromised source. Data poisoning remains an active research area, but production systems should treat the training corpus as a supply chain rather than a passive dataset.

The data boundary is therefore one robustness layer, not the whole defense. The fourth layer works on the model rather than the records. A representation that does not lean on brittle shortcuts gives a poisoned shortcut less to exploit, and the same property helps the model survive ordinary deployment variation, so this layer serves the poisoning defense and the environmental pillar at once. Beyond detecting and correcting shifts after they occur (section 9), a complementary approach builds shift-resilient representations from the start, drawing on transfer-learning and domain-adaptation foundations (Pan and Yang 2010).

Representation-level defense via self-supervised learning

Self-supervised learning (SSL) changes the source of supervision. Instead of relying only on task labels, the model learns by solving pretext tasks that require structure in the data itself. This matters for robustness because many brittle models overfit to whichever labeled shortcut is easiest to exploit: a background texture, an annotation artifact, or a narrow phrasing pattern. A pretraining task that rewards stable structure across views, missing tokens, or masked image patches gives the representation a chance to learn signals that survive more deployment variation.

Contrastive learning methods such as SimCLR (T. Chen et al. 2020) make this idea concrete by pushing different views of the same example toward a shared representation. The model is rewarded for treating a crop, color shift, or augmentation as the same underlying object rather than as a new class-specific cue. **Masked language modeling** in BERT (Devlin et al. 2019) and masked autoencoding in vision (He et al. 2021) use a different route: they hide part of the input and force the model to reconstruct or predict it from context. Both families provide supervision beyond the downstream task labels. Whether the resulting representations transfer better depends on the pretraining data, objective, and deployment shift; removing task labels does not remove shortcut learning.

[18] **Huber Loss**: This piecewise loss transitions from quadratic to linear beyond a chosen residual threshold, bounding its derivative with respect to the residual. The parameter gradient also multiplies that derivative by the model's prediction Jacobian, so Huber loss alone does not bound parameter updates or prevent poisoning. Under MSE, an outlier with 100× normal error contributes 10,000× squared-error loss and 100× residual-gradient magnitude. Under Huber loss, once that residual passes the threshold the loss grows only linearly and the residual derivative stays at the threshold value, so the same outlier pulls no harder than any other point beyond the threshold.

[19] **Minimax**: Game-theoretic strategy from Neumann (1928) that minimizes the maximum possible loss. In adversarial robustness, Madry et al. (2018) formulate training as $\min_\theta \max_{\|\delta_{\text{adv}}\| \le \epsilon_{\text{adv}}} \mathcal{L}(f_\theta(x + \delta_{\text{adv}}), y)$: the model learns to minimize loss under a worst-case perturbation within the chosen norm ball. The inner maximization is computationally expensive because it is usually approximated with iterative attacks such as PGD, so PGD-adversarial training is a budgeted robustness choice rather than a free objective change (Bai et al. 2021; Shafahi et al. 2019).

That transfer benefit is the main systems reason to use SSL in a robustness pipeline. Larger unlabeled corpora expose the model to domains, transformations, and rare cases that would be too expensive to label exhaustively. The same uncurated scale widens the poisoning surface, so SSL pretraining data still needs the ingress and sanitization controls described earlier. In production, SSL usually acts as a foundation rather than a complete defense: pretrain on broad unlabeled data, fine-tune on the supervised task, then apply the adversarial, drift, and poisoning defenses established earlier in this chapter to the task-specific model. Multi-task training can preserve some of this benefit by keeping a self-supervised objective active while the supervised task pulls the representation toward the deployment metric.

The limitation is that SSL is not a robustness guarantee. A contrastive or masked-pretraining objective can still learn brittle shortcuts, and an attacker who understands the pretext task can target those shortcuts directly. The theory explaining when SSL improves robustness remains incomplete, and the compute cost can be substantial because pretraining moves work earlier in the lifecycle. The systems decision is therefore whether broader representation learning lowers the expected cost of drift, relabeling, and robust fine-tuning enough to justify the added pretraining budget.

System-Level Faults and Masquerading

Every defense in the two preceding pillars reads evidence produced by the system it protects: drift monitors read preprocessed features, adversarial detectors read model scores, and poisoning filters read learned representations. The third pillar asks what happens when that machinery is itself wrong. The unified framework showed why the question cannot be left to infrastructure alone. A single exponent flip produces a finite outlier that passes every NaN and infinity check (figure 0.199), and at the illustrative stress-test rate of 0.01 percent per device-hour in figure 0.200, a 10,000-device cluster sees some silent corruption within an hour with probability 63.2 percent. Execution-level detection and recovery belong to fault tolerance. Robustness adds two obligations on top of them: behavioral checks that run on the model's own values and outputs, and a diagnosis that decides whether a behavioral alarm came from a fault at all.

The cheapest behavioral checks test invariants that a correctly executing model satisfies. A range check $|w| \leq W_{\max}$ against the trained weight distribution catches the exponent flip above at the cost of one comparison per stored value, and the same idea bounds each layer's activations at serving time against the range observed on validation traffic. Golden-input canaries replay a fixed set of requests through each replica on a schedule and compare the outputs with stored references, which catches a corrupted replica whose liveness and readiness probes still pass. Cross-replica comparison, which runs the same request on two replicas, catches corruption that invariants miss but doubles the work for every request it covers, so fleets apply it to sampled traffic, following the check-and-verify pattern used against silent data corruption elsewhere in the fleet. Each check spends a C^3 axis. Invariant checks add compute on the serving path, canaries and cross-replica comparison add compute and communication, and deciding which replicas and checkpoints remain trustworthy after a check fails is coordination.

↩ Check-and-verify defenses against silent data corruption, and their cost relative to full redundancy, are established in section 12.

These checks cover faults that leave a numerical signature. The harder case is a fault whose symptom looks like one of the other pillars. Consider an operator who sees the same surface symptom from all three pillars, falling model accuracy while latency and uptime hold steady. A preprocessing bug that silently rescales a feature looks exactly like covariate shift to a drift monitor, because the feature statistics have genuinely moved. A numerical overflow that corrupts a layer's activations produces confident misclassifications that look exactly like an adversarial example, because the decision flipped without a visible input cause. The difficulty lies in the disguise, because the cheap pillar-specific detectors fire on the symptom rather than the cause.

Three complementary signals guide this investigation: the timing boundary of the change, reproducibility under fixed inputs, and cross-layer correlation with infrastructure telemetry.

The boundary and timing of a change often provide the first diagnostic clue. While environmental shift can evolve gradually or appear abruptly with real-world events, a shift synchronized with a deployment, dependency bump, or schema migration raises the pipeline-fault hypothesis. This suspicion strengthens when multiple features shift simultaneously in directions that the underlying physical process cannot explain. Timing alone narrows the search space without proving causation.

Reproducibility under fixed inputs helps locate the failure boundary. Replaying golden inputs through version-pinned preprocessing pipelines and model artifacts can expose the stage where outputs begin to differ. A deterministic software defect fails at the same stage on every replay, a transient hardware upset usually vanishes on replay, and race conditions or marginal hardware fail intermittently, so isolating them takes repeated runs or a second device. Stochastic execution also requires controlling random state or comparing repeated runs. Because shifted or adversarial inputs can reproduce the same error under fixed execution conditions, replay alone cannot settle the diagnosis; operators must compare raw and preprocessed tensors, artifact versions, and population-level statistics alongside the replay output.

Finally, cross-layer correlation links model behavior to surrounding infrastructure telemetry. Query-rate spikes or unusual input patterns can support an attack hypothesis, while deployment releases, error-correcting code (ECC) memory counters, SDC checkers, or memory-pressure alarms can support a system-fault hypothesis. Neither pattern is necessary or sufficient. An attack can remain within normal traffic patterns, and silent corruption can escape the available counters. Correlation guides the next diagnostic test rather than establishing the cause.

Example 14.4: A drift alert that was a pipeline fault

Scenario: A credit-risk service raises drift alerts on three income-related features on the morning after a routine dependency update, and the approval rate for applicants in the affected income bands shifts sharply. Latency, error rates, and uptime are unchanged, and every request that the on-call engineer retries returns a score without error.

Diagnosis: The three signals point the same way. The alerts begin at the release boundary, and the three features moved together in a direction that no change in applicant behavior explains. Replaying a stored set of golden requests through the previous and current pipeline versions produces identical raw inputs but preprocessed tensors that differ by a constant factor on exactly those features, because the updated library changed a default normalization. Deployment telemetry correlates with the change; query-rate and hardware counters do not. The failure is a software fault disguised as covariate shift. Retraining on the corrupted features would have taught the model the bug, and the successful retries proved only that the service answered, not that its answers passed acceptance.

Systems lesson: A replay harness that pins artifact versions and compares tensors at each pipeline stage turns an ambiguous drift alert into an attributable fault. Recovery is complete only when the replayed outputs satisfy the model's acceptance tests again, which is a behavioral check that a successful retry or a green health dashboard cannot supply.

The diagnostic discipline is therefore to read the system-level evidence before accepting the drift or attack hypothesis the surface symptom suggests, because each pillar suggests a different intervention and more than one cause can be active at once.

Fallacies and Pitfalls

Robustness spans environmental shifts, input-level attacks, and system-level faults. Each threat domain introduces misconceptions that lead to inadequate defenses or misallocated engineering resources.

Fallacy: *Adversarial examples are an academic curiosity with no real-world impact.*

Published physical-world attacks, such as adversarial patches on clothing or stickers on stop signs, have fooled evaluated vision models under controlled patch and road-sign settings without digital access. Defense requires evaluation under the relevant physical conditions. Physical-world data augmentation, patch-aware training, and serving-time detection are candidate interventions, each with its own coverage and cost. Related PGD-style digital adversarial training adds work according to its attack steps, but its results do not establish resistance to physical attacks. Ordinary digital test sets can miss these deployment failure modes.

Pitfall: *Treating test-set success as robustness proof.*

A test set drawn from the same i.i.d. distribution as training data measures performance in that population; it does not establish resilience to a different deployment distribution or to a critical slice inside the same one. The Google Photos labeling failure shows how a harmful error on one population slice can hide inside aggregate accuracy, and the night-driving and clinic-imaging examples of distribution shift fail on populations the test set underrepresents. Robustness evidence needs held-out shifts, named slices, and the other cells of table 0.202.

Fallacy: *Distribution shift monitoring is optional after deployment.*

Models often degrade silently, maintaining high confidence scores even as predictive performance falls due to drift. Monitoring metrics like PSI can surface population shifts before accuracy falls below service level agreement (SLA) thresholds, enabling proactive intervention when the monitored features are predictive of downstream performance.

Pitfall: *Ignoring poisoning defenses unless the attacker controls the training pipeline.*

Clean-label poisoning compromises models by injecting correctly labeled but manipulated samples into public datasets or scraped data sources, requiring no access to internal code. Low-dose attacks can still target a particular prediction or implant a backdoor; the size of the poisoned slice and the apparent correctness of its labels do not establish integrity.

Fallacy: *Average accuracy is sufficient for robustness measurement.*

High average accuracy often masks fragility. A model that is accurate on nearly all clean test inputs can still fail on every input in a critical slice once an attacker applies a small, targeted perturbation (Madry et al. 2018). Reliable evaluation requires evidence for the claimed failure class: slice-level performance under shifts, empirical attack accuracy under a stated budget, or a certified radius where a formal guarantee is available. A finite attack search supplies empirical evidence rather than exact worst-case accuracy.

Pitfall: *Treating adversarial training as a complete robustness solution.*

Adversarial training does not establish universal robustness. A model trained against ℓ_∞ attacks needs separate evaluation for ℓ_2 or geometric attacks. Perturbation sets can overlap, so resistance need not vanish across norms, but the training threat model alone does not establish the extent of that transfer.

Fallacy: *Software faults do not matter when the model is correct.*

Focusing solely on algorithmic robustness ignores the reality that software bugs in data pipelines and serving infrastructure are a major cause of ML failures. Incident analyses often find pipeline and data issues, not model architecture or adversarial attacks alone, at the center of failures. Checksums can detect changed bytes, while behavioral validation must also catch incorrect transformations of intact data. A model hardened against adversarial perturbations can still fail when a preprocessing bug supplies validly stored but wrongly computed inputs.

Pitfall: *Hardening the model while leaving pipeline checks untested.*

Robustness work can concentrate on adversarial training, certified radii, or poisoning defenses while leaving schema validation, preprocessing parity, feature freshness, and rollback drills under-tested. That imbalance creates a system that resists one class of attack but fails on ordinary operational faults. In the credit-risk example of section 20, a changed library default would have been caught at release time by a golden-request replay comparing preprocessed tensors across pipeline versions; without that check, the fault surfaced as a drift alert, and retraining on the corrupted features would have taught the model the bug. A robust deployment validates the model and the pipeline together and exercises the replay harness and rollback path before an incident needs them.

Summary

Robust AI makes prediction quality an explicit engineering obligation alongside uptime and latency. Environmental shifts, adversarial manipulation, poisoning, and system faults can leave a service apparently healthy while its outputs become unreliable. The chapter's diagnostic framework reads release timing, fixed-input replay, and infrastructure telemetry before accepting a drift or

attack hypothesis, then connects each failure class to its own evidence and response; fleet recovery mechanisms must therefore be paired with behavioral acceptance tests.

Inside the training step, robustness is paid for in the terms of the Fleet Law (equation 0.3). Multi-step PGD adds gradient work in T_{compute}; at a fixed worker count N, the wall-clock increase depends on implementation, reuse, and the other terms in the step. Whether it also reduces clean accuracy, and by how much, depends on the model, data, perturbation set, and training recipe. Robust aggregation for distributed or federated contributors replaces a reducible mean with a median, trimmed mean, or Krum selection, which require more than an ordinary sum reduction. A direct gather-based implementation raises per-worker traffic by about half the number of contributing replicas relative to ring AllReduce, but the actual effects on $T_{\text{comm}}(N)$ and $T_{\text{sync}}(N)$ depend on where updates are collected, how the rule is implemented, and which work the baseline already performs.

Outside the training step the same C^3 axes set the price. Randomized smoothing and self-consistency sampling spend compute on every request they cover, invariant checks and golden-input canaries spend compute and communication to catch faults that health probes miss, and poisoning sanitization spends compute and storage bandwidth on extra passes over the training corpus. Drift monitoring spends communication, shipping reference statistics and serving telemetry between machines. Release gates, abstention thresholds, and escalation ownership spend coordination, because validated model versions must be adopted consistently across the fleet. Conformal routing touches all three axes: computing prediction sets adds bounded compute, returning larger sets adds communication, and routing abstentions to reviewers adds coordination. If prediction sets grow and trigger more deferrals, human-review or fallback capacity can become the bottleneck. Distribution shift can also invalidate coverage without enlarging the sets, so set size is a load signal rather than a complete drift detector. A coverage claim is operationally useful only when the deployment also provisions the path that consumes uncertain cases. Robustness engineering measures these workload-specific costs against the reduction in silent risk where failure consequences are highest.

Key Takeaways: Silent failure is the real threat

- **Silence is the failure mode**: Robustness exists because drift, adversarial perturbations, poisoning, and numerical faults often preserve uptime and latency while corrupting predictions. Production systems need monitors that surface competence loss before user complaints or downstream business metrics reveal it.
- **Diagnose before defending**: A software fault can look like concept drift, a poisoned sample like a rare outlier, and an adversarial input like natural variation. Read the release timing, fixed-input replay, and infrastructure telemetry before spending a defense budget on the hypothesis the surface symptom suggests, then combine ingress validation, training defenses, uncertainty signals, and output verification.
- **Robustness is bought explicitly**: Strong adversarial training (principle 22) can reduce clean accuracy and multiply training compute, while certified defenses and uncertainty sampling add serving cost. Price each effect against a like-for-like baseline before deciding how much resilience the failure consequence justifies.
- **Drift alerts begin an investigation**: Calibrated distance measures identify changes that need review. Outcome evidence and root-cause analysis determine whether the response should be continued monitoring, data repair, recalibration, retraining, or fallback.
- **Coverage guarantees have operating conditions**: Conformal prediction provides finite-sample marginal coverage under exchangeability, not per-input or per-subgroup certainty. Version and refresh the calibration evidence, and provision fallback capacity for large prediction sets.
- **Generative reliability is semantic**: LLM hallucinations are confidently fluent failures rather than simple label mistakes. Entropy and self-consistency are routing signals, not factuality guarantees; grounding checks, external verification, and escalation policies must bound what the system is allowed to assert.

No finite evaluation establishes robustness to every shock. A deployable claim must bind behavioral evidence to the evaluated artifact and operating conditions, then provision the detection and fallback paths without violating service-level objectives (SLOs). The release record in section 11 preserves that link so a changed model or workload cannot silently inherit obsolete evidence. Governance uses the resulting record to assign acceptable residual risk and decision authority; a robustness score alone cannot make those decisions.




What's Next: From resilience to sustainability

Even when a fleet is secure and robust, it can still be bounded by the electrical power its accelerators demand. Every defense in this chapter is paid for in compute. Adversarial training multiplies gradient work, randomized smoothing and self-consistency sampling repeat inference, and replay harnesses and redundant checks run beside the serving path. That compute draws electricity and rejects heat, and a facility's power and cooling capacity bounds how much of it the fleet can run. The next chapter treats those limits as design constraints, beginning with the energy ceiling on fleet capacity and extending to operational and embodied carbon and carbon-aware operation.

↪ Facility power and cooling limits, lifecycle carbon accounting, and carbon-aware scheduling are developed in chapter 20.

Sustainable AI

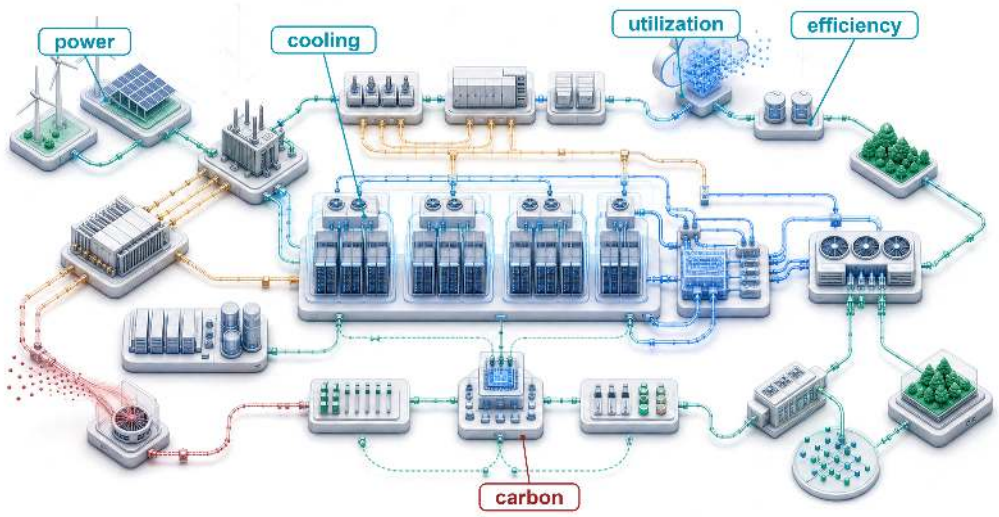

Purpose

Why do power limits determine what machine learning systems can exist, not just what they cost to operate?

Power is an operational expense and a physical constraint on what can be built. A data center has a power budget determined by electrical infrastructure and cooling capacity; a training run that exceeds it cannot proceed at the intended scale regardless of its financial budget. Adding accelerators only helps if the site can supply their electricity and remove their heat. A design that runs efficiently on one machine can therefore become infeasible when replicated across a fleet. The consequences reach beyond a delayed training run. Power reserved for training may be unavailable to serving, while equipment kept ready for failures consumes resources even when it performs no useful work. Moving work to another location can relieve one constraint while changing its emissions, access to data, or ability to meet deadlines. Efficiency improves these choices, but lower energy per request does not ensure lower total consumption when demand grows. Nor does a clean electricity supply erase the environmental cost of manufacturing and replacing equipment. Engineers must judge feasible designs over their useful lives and account for the communities sharing their water and electricity supplies. Sustainability therefore belongs alongside accuracy, latency, and reliability in system design: a fleet must deliver useful service within resource limits that its performance targets cannot override. In C^3 terms, compute, communication, and coordination draw on a shared physical budget, so their combined resource demand determines whether the fleet can operate at all.

Learning Objectives

- Explain why facility power and cooling limits constrain which ML systems can physically exist
- Analyze how scaling-driven compute growth, hardware efficiency, and demand rebound shape fleet resource demand
- Calculate operational, embodied, and lifecycle carbon from energy use, power usage effectiveness, manufacturing, and grid intensity
- Analyze how computation, memory movement, power delivery, cooling, and water availability constrain sustainable fleet operation
- Compare training, inference, edge, and federated workloads by energy, carbon, and battery budgets
- Design mitigation strategies across algorithms, infrastructure, scheduling, hardware lifetime, and carbon-aware operations
- Evaluate sustainability claims using lifecycle emissions evidence and the distribution of environmental burdens

The Energy Ceiling

Robustness was bought in compute. Adversarial training multiplies gradient work, and self-consistency sampling and randomized smoothing spend accelerator time on every request they cover. Each of those operations draws power and sheds heat, so a model can be secure against adversaries and robust under distribution shift yet still fail if the available grid cannot power its accelerators or the facility cannot cool them. **Sustainability** begins at that boundary, where accuracy, latency, and reliability are no longer enough because the system must also fit within power, cooling, water, carbon, and hardware lifetime budgets. Energy is the ultimate currency of machine learning, and power density is the ceiling on data-center computational capacity.[1]

When an engineer optimizes a database query to save 100 ms, that is ordinary performance tuning. At fleet scale, the same saving repeated billions of times per day can reduce electrical demand, cooling load, and carbon emissions if it reduces measured energy per completed query (Lacoste et al. 2019). A system that exceeds its operating envelope has failed operationally in the same sense as one that crashes, because it cannot be deployed at the intended scale.

That ceiling makes sustainability a design constraint, not a reporting category. The same engineering discipline that budgets memory, bandwidth, and fault tolerance must also budget joules, cooling load, embodied carbon, and hardware replacement cycles.

Physical feasibility establishes which fleets can run. Sustainability then compares the environmental cost of feasible designs over their useful lives, starting from workload energy at a declared measurement boundary, extending the account to carbon, water, and manufacturing, and letting the dominant lifecycle term decide among efficiency, placement, and hardware reuse. Communication and coordination belong in that account alongside compute, because transfers, synchronization stalls, and recovery keep equipment powered even when useful computation stops. Under the Fleet Law, a distributed step costs its average fleet power multiplied by its step time, so every second of exposed communication or synchronization is also a block of joules; equation 0.93 writes that account out where the chapter turns to distributed training.

Contemporary machine learning applications operate at industrial scale, with individual campuses drawing power at the level of heavy industrial plants. Training a single large AI model can consume as much electricity as roughly 120 US homes do in an entire year. The scaling laws that motivate fleet-scale training (principle 9) price each further loss reduction in additional compute, data, and parameters, so compute demand has grown faster than hardware efficiency (Sevilla et al. 2022). This book calls the resulting gap the **sustainability paradox**. Sustainable AI treats that gap as a first-class systems problem rather than an externality to be managed after deployment.

[1] **Joule Energy Scale**: An A100 modeled at its rated thermal design power consumes 400 J every second (400 W); actual workload power requires measurement. Large-model training has no single defensible joule range: model size, hardware count, realized power, utilization, and run duration can each shift total energy by orders of magnitude. The engineering lesson lies in the conversion from repeated per-operation costs to facility energy, so this chapter reports measured or modeled workload energy rather than assigning every large run to one fixed range.

↩ The power-law scaling of loss with compute, data, and parameters, and the compute-optimal allocation that follows from it, are established in section 6.

Definition 15.1: Sustainable AI

Sustainable AI is the systems engineering practice of measuring and optimizing the full environmental cost of ML systems (energy, water, and embodied carbon across training, inference, and hardware manufacturing) and incorporating those costs as explicit constraints in architecture decisions alongside performance and accuracy objectives (Wynsberghe 2021; Lannelongue et al. 2021; Henderson et al. 2020).

1. **Significance**: Training GPT-3 consumed approximately 1,287 MWh of energy (Li 2020), equivalent to roughly 120 US household-years of electricity. The same lifecycle logic applies after training: pretrained models can often be adapted with far less work than training from scratch, and high-volume inference can eventually dominate total energy. Sustainable AI therefore tracks both one-time training runs and recurring serving workloads rather than treating model training as the whole footprint.
2. **Distinction**: Unlike corporate sustainability reporting (which aggregates energy usage into annual CO_2 disclosures), sustainable AI engineering operates at the individual workload level, selecting hardware based on FLOP/s per watt efficiency, scheduling training during periods of high renewable availability, and choosing model architectures that minimize inference FLOPs rather than simply maximizing accuracy.
3. **Common pitfall**: A frequent misconception is that switching to renewable energy solves the sustainability problem. For hardware-intensive ML, embodied carbon (the carbon emitted manufacturing the chips, servers, and cooling equipment before they ever run a training job) can rival operational carbon on clean grids or at low utilization, and for battery-powered consumer devices manufacturing can account for most of the lifecycle footprint (Gupta et al. 2022), making hardware longevity and utilization rate as important as energy source.

The environmental impact of AI systems spans the complete lifecycle: from semiconductor manufacturing and data center construction to model training, inference deployment, and electronic waste (Wynsberghe 2021; Gupta et al. 2022; Luccioni et al. 2023). Treating this full lifecycle as an engineering problem rather than a corporate responsibility exercise transforms sustainability from a vague objective into a measurable engineering requirement. Optimizing this footprint requires first grounding intuition in the raw physical energy of a single large-model training run.

Any such calculation first has to fix what the energy measurement includes. This is the accounting discipline that the energy-scale invariant (equation 0.5) imposes on fleet comparisons, applied here to a single run. Accelerator energy excludes host processors, host memory, networking, and storage. IT energy includes those supporting systems; facility energy additionally includes cooling and facility-side power losses. Power usage effectiveness (PUE) is the ratio of facility energy to IT energy over the same interval (equation 0.7); section 15 gives its formal definition and what it leaves out. Dividing useful training FLOPs by realized FLOPs per joule gives energy at the efficiency metric's stated boundary. If that boundary is IT equipment, multiplying by PUE gives facility energy; if it already includes the facility, applying PUE again double counts overhead. The opening calculations use one completed training run as their unit of work and account for operational electricity. Manufacturing and other lifecycle terms enter separately.

Checkpoint 15.1: The energy of intelligence

A 175B parameter model requires approximately 3.14×10^{23} FLOPs to train. Assuming a data center PUE of 1.1 and a realized training efficiency of 50 GFLOP/J measured across the IT equipment, including support systems but excluding facility overhead:

- ☐ **Training energy**: calculate the total energy consumption in megawatt-hours (MWh).
- ☐ **Household-years**: convert the training run's energy into household-years using the average US household consumption of 10.7 MWh per year.

- ☐ **Reported value**: compare the calculated estimate with the 1,287 MWh reported for GPT-3 in the definition above, and identify which assumption (the realized efficiency or the PUE) would have to change to reconcile the two.
- ☐ **Metric boundary**: assess whether household-years captures the true environmental cost by separating energy consumption (MWh) from carbon intensity, the grams of CO_2 the grid emits per kilowatt-hour delivered (g CO_2/kWh).

That household-year figure is the stake; it is also only the electricity entering the building. The next question is where that energy physically goes: how much reaches the accelerators, how much the cooling and power-delivery overhead consumes, and how the grid behind the meter converts those kilowatts into carbon.

The Scale of Environmental Impact

A training run measured in megawatt-hours is hard to reason about, because few engineers carry an intuition for what a megawatt-hour of grid electricity costs the atmosphere. The introduction quoted GPT-3's training emissions as one of the costs that scaling imposes (section 8). The derivation behind that figure converts the run's energy into emissions with a grid factor and then into a familiar anchor, the CO_2 of a trans-Atlantic flight, which turns an abstract number into one with physical stakes.

Napkin Math 15.1: The carbon cost of training

Problem: A team trains a large model (GPT-3 size), treating 1,287 MWh as facility electricity for this comparison. How much CO_2 is emitted under the stated grid factor, and how does that compare to a trans-Atlantic flight?

Math:

1. **Energy**: Training energy consumption is 1,287 MWh = 1,287,000 kWh.
2. Carbon intensity (US average): $\approx$ 0.429 kg/kWh.
3. Total Emissions: Training emissions are 1,287,000 kWh $\times$ 0.429 kg/kWh $\approx$ 552,123 kg.
4. Comparison:
   - One passenger, NY to London (round trip): $\approx$ 1000 kg.
   - Ratio: 552,123 kg / 1000 kg = 552.1.

Systems insight: Under these assumptions, a single training run emits as much carbon as hundreds of trans-Atlantic passenger round trips. The calculation holds facility energy fixed, so changing the grid factor changes the attributed emissions. The same energy on a hydro-heavy grid would emit a small fraction as much, the placement lever that notebook 15.2 quantifies.

That arithmetic shows the carbon cost of one run; at large-cluster scale, the next constraint is whether enough power can be delivered to the cluster at all.

Lighthouse 15.1: Archetype A (GPT-4/Llama-3): The energy wall

Training at the scale of Archetype A (GPT-4/Llama-3) exposes the power problem most sharply. At frontier scale, roughly 24 times the 1,024-GPU reference cluster used throughout this book, a single 25,000-GPU cluster drawing 700 W per chip requires 17.5 MW of accelerator power before server, network, and cooling overhead. The constraint is physical, not financial: it is a grid capacity problem. Organizations operating Archetype A workloads may need dedicated power infrastructure or regions with excess renewable energy, making carbon-aware scheduling (shifting nonurgent work toward cleaner grid hours) and geographic optimization (placing workloads where power, cooling, and carbon constraints fit the job) fleet decisions as consequential as capacity planning.

That accelerator draw alone, before server, network, and cooling overhead, makes grid capacity a condition of deployment. Among sites that can supply the required power, the emissions factor and facility overhead then determine the carbon attributed to a fixed workload. The placement calculations separate those effects, starting with the grid factor alone.

The introduction previewed this geographic factor as a spread of roughly 41× between hydro- and coal-dominated grids. Notebook 15.2 derives that spread by holding facility energy constant and varying only the grid factor.


Napkin Math 15.2: The geography of carbon

Problem: A team is choosing a data center for a 10,000 MWh training run, comparing Site A in Quebec (hydropower, 20 g/kWh CO_2) against Site B in Poland (coal-heavy, 820 g/kWh CO_2). Both factors are rounded annual grid averages on the same emissions boundary, the values figure 0.218 later applies across nine regions; they are not hourly or marginal signals. How does the location affect a model's carbon footprint?

Math: Carbon = Energy × Grid Intensity.

1. Site A emissions: 10,000,000 kWh × 20 g/kWh = 200,000,000 g = 200 t CO_2.
2. Site B emissions: 10,000,000 kWh × 820 g/kWh = 8,200,000,000 g = 8200 t CO_2.
3. Ratio: 8200 t / 200 t = 41× difference.

Systems insight: The Quebec-versus-Poland pair gives a 41× difference in attributed emissions at the same facility energy. This comparison isolates the grid factor; it does not rank placement against an unmeasured algorithmic change. A fleet decision must compare feasible sites and schedules using both workload energy and the emissions associated with supplying it.



The same job's carbon emissions depend on where it runs.

The ratio holds only at equal facility electricity and these annual-average factors. A second gain from waiting for cleaner hours, the temporal lever taken up after the placement example below, therefore cannot simply be multiplied onto it; the joint schedule must be evaluated as one decision.

A real placement decision weighs more than the grid factor. Adding electricity prices, facility overhead, and an internal carbon price turns the comparison into a placement objective, priced as a modeled total cost of ownership (TCO) over three candidate regions (the US-average grid, Quebec, and Iowa). The notebook above isolated the grid factor by holding facility energy fixed. This objective must instead let facility overhead differ from region to region, so it starts one boundary earlier, holding the run's IT energy fixed and letting each region apply its own PUE. That choice separates the carbon charge from the cost of facility overhead.

↩ The total-cost-of-ownership model that prices ownership, maintenance, and electricity is established in section 20.

Example 15.1: Automated carbon-aware placement

Scenario: A team is planning a large training run requiring 10,000 MWh of IT energy, which occupies an 8,192-GPU frontier-scale cluster for about 112 days. The team is choosing among three candidate regions (US average, Quebec, and Iowa) with different facility overheads (PUE) and grid carbon intensities.

Diagnosis: With an internal carbon tax of $100/tonne, the placement model adds a carbon charge to each region's modeled cost of ownership and selects Quebec for a total cost of $25.3M. Hardware ownership and maintenance make up most of that total and are the same in every region, so the candidates differ only in facility overhead and carbon. Without a carbon price, Quebec's lower PUE saves about $72,000 against the US-average placement. With the tax, the US-average and Iowa placements cost $0.5M and $0.8M more than Quebec, and most of each gap is the carbon charge.

Systems lesson: Carbon-aware placement adds an explicit carbon price to the fleet scheduling objective. The selected region minimizes the modeled cost among these candidates under the stated assumptions. A deployment decision must also check capacity, data transfer, deadlines, and reliability.

The placement example compares regions using a fixed annual grid factor for each candidate. Temporal scheduling adds another decision by allowing a flexible job to wait for lower-carbon hours within one region. These are distinct levers, and their relative value depends on the available regions and the job's deadline; section 15 develops the temporal lever once the measurement contract has fixed which grid signal it should use.

The GPT-3 household-year calculation above anchors the workload scale. The fleet-scale consequence is larger. IEA projects global data-center electricity consumption to reach about 945 TWh by 2030, just under 3 percent of global electricity demand, with AI-accelerated servers driving much of the growth.[2] Historical studies document rapid growth in training compute (Sevilla et al. 2022), but a compute multiplier is not an energy multiplier without a matching efficiency measurement.

Beyond direct energy consumption, AI systems drive environmental impact through hardware manufacturing and resource consumption. Producing processors and their supporting equipment requires materials and industrial processes whose impacts precede the first training run.[3] At the other end of the hardware's life, retired equipment joins the electronic-waste stream whose scale section 24 quantifies. Rising workload requirements can motivate accelerator replacement before physical failure; whether replacement creates waste depends on the equipment's reuse and disposal path.[4]

These environmental challenges are part of the energy ceiling, not an add-on to it, because the communities that host land, water, grid capacity, and waste streams also carry part of the system cost. These scale calculations turn sustainability into an allocation problem. AI progress creates benefits in one part of the system while assigning electricity, water, land, and disposal costs to another, so environmental responsibility must be treated as part of systems design rather than as postdeployment reporting. Section 38 examines how site selection distributes these burdens across communities.

Exponential Growth vs. Physical Constraints

Growth in computational demand can outpace improvements in realized efficiency. Sevilla et al. (2022) estimate that the training compute of notable machine learning models doubled roughly every six months after 2010, far faster than the two-year cadence historically associated with transistor scaling. The introduction traced this growth from AlexNet onward across seven to eight orders of magnitude (figure 0.2); figure 0.214 extends the same series through Grok-3 in 2025, which carries the span to nearly nine orders of magnitude, against a fitted doubling cadence of roughly 5 months. In 2012, AlexNet required about 4.7×10^{17} FLOPs of training compute, whereas GPT-4-class systems in 2023 reached 2×10^{25}, an expansion of roughly 45 million in 11 years. Larger models, longer training runs, and rising serving volume each add to that total work through a different mechanism. Energy per operation can fall while total fleet energy rises; the outcome depends on how much useful work the fleet performs and how efficiently it performs that work.[5]

Historically, semiconductor scaling combined greater transistor density with lower switching energy. Moore's Law described the growth in transistor count, while Dennard scaling explained how reducing dimensions and voltage together could preserve power density. Transistor count alone did not guarantee better energy efficiency. Once voltage scaling encountered leakage and other device limits, a denser chip could no longer assume proportional power savings.[6] Further efficiency gains require improvements in devices, architecture, and the work performed by the application.

At a fixed accounting boundary, energy depends on total work divided by realized work per joule. Improvements in execution efficiency reduce IT energy, and PUE then adds the facility overhead on top of that IT energy. Algorithmic changes can also reduce the work required to meet a quality target. These effects must be measured together rather than inferred from a historical compute curve.

Per-job efficiency and total demand can move in opposite directions. Fleet energy is the energy per completed job multiplied by the number of completed jobs, so a fleet forecast must state both factors, including the workload mix. Cheaper jobs can raise the job count faster than they lower the energy of each one. If energy per task falls tenfold while task volume rises a hundredfold, fleet energy rises tenfold. This rebound is a second way demand can outrun efficiency, distinct from the sustainability paradox defined at the start of the chapter. The paradox concerns how much compute each frontier model requires as scaling laws push quality upward; rebound concerns how many

2 | **Data Center Industrial Scale**: IEA's 2025 *Energy and AI* analysis projects data centers to consume about 945 TWh of electricity by 2030, just under 3 percent of global electricity demand. This is an electricity-demand metric, not directly comparable to aviation or cement shares of global emissions. AI infrastructure competes with other loads for deliverable power; expansion requires available capacity, additional supply, or a reduction or shift in competing demand, not necessarily new generation within the same region.

3 | **GPU Manufacturing Embodied Carbon**: NVIDIA's HGX H100 product carbon footprint reports 1,312 kg CO_2e (CO_2-equivalent, which expresses other greenhouse gases as the mass of CO_2 with the same warming effect) for an eight-H100 baseboard, or roughly 164 kg CO_2e per H100 if allocated evenly across the eight GPUs (NVIDIA Corporation 2025). Advanced-node manufacturing also consumes ultrapure water, specialty gases, and chemicals that an energy-only account never sees, so a per-GPU carbon figure understates the full manufacturing footprint.

4 | **AI Hardware E-waste**: Retiring an accelerator does not necessarily create waste: equipment may be redeployed, resold, or recycled. Estimate disposal impacts from the actual equipment inventory, material composition, and end-of-life route. Extending useful service life can defer manufacturing and disposal, while certified handling limits exposure to hazardous materials in discarded electronics.

5 | **AI Compute Growth**: Historical training-compute studies describe particular sets of models and periods (Sevilla et al. 2022). A compute-growth trend does not itself establish an energy-growth rate: converting FLOPs to joules requires realized efficiency and a consistent system boundary.

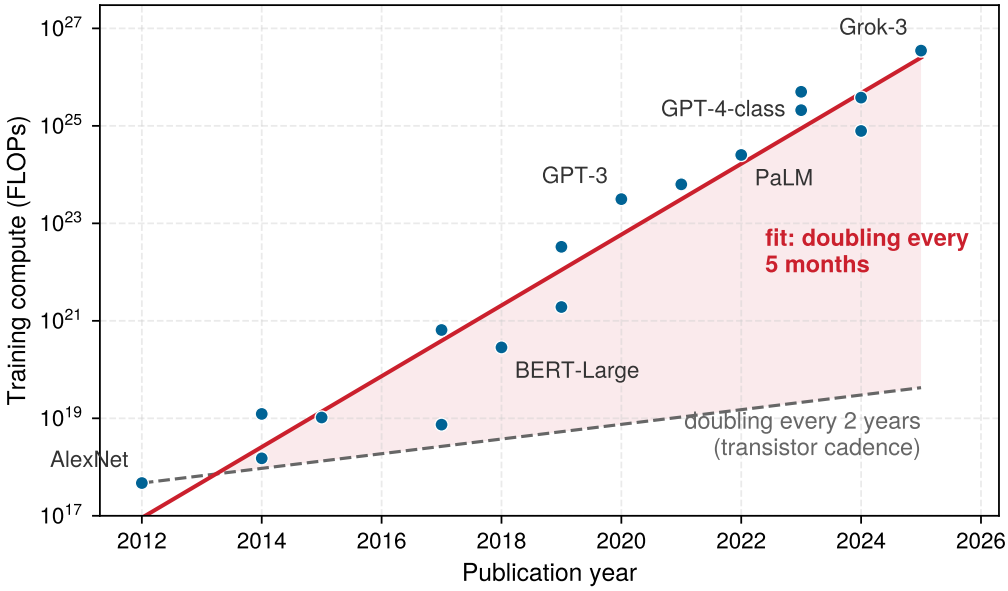


Figure 0.214: Training Compute of Notable Models: Training compute of notable models from 2012 to 2025 on a logarithmic axis, all estimates from Epoch AI's Notable AI Models database (Sevilla et al. 2022; Epoch AI 2026). The solid least-squares fit corresponds to a doubling time of roughly 5 months; the dashed line doubles every two years, the cadence historically associated with transistor scaling, and the shaded gap between them widens every year. The axis counts operations rather than joules, so converting the trend into energy requires the realized efficiency of each run at a stated measurement boundary.

tasks run once each task becomes cheaper. The mitigation strategies of section 24 treat rebound under its historical name, the Jevons paradox.

Power Envelopes and the Energy Wall

The energy account divides work by realized work per joule, then applies facility overhead at the appropriate boundary. Physical infrastructure imposes a separate power constraint. The grid connection, electrical distribution, and cooling system limit the active fleet that can operate safely. A long run may consume substantial energy while remaining within its power envelope. Conversely, a short run may exceed available power even if its total energy is modest.

The two limits obey different arithmetic (figure 0.215). The power limit is instantaneous. A facility cannot draw more than its grid feed ($P_{\text{facility}} \leq P_{\text{grid}}$), which caps the number of servers active at once ($N \leq P_{\text{IT}}/P_{\text{server}}$) regardless of how long a job runs. The energy account is cumulative, integrating average power over wall-clock time to give run energy ($E_{\text{total}} = P_{\text{avg}} \times T_{\text{job}}$). Exceeding electrical or thermal capacity can force power limiting, throttling, or protective shutdown. Cumulative energy instead enters the electricity and emissions accounts, which also depend on tariffs and the applicable grid emissions factors.

The energy wall is therefore a workload-specific feasibility problem, not a universal multiplier. Engineers must fit the required work, deadline, and quality target within available power and cooling, then calculate energy over the actual runtime. More efficient hardware helps only to the extent that the workload uses its efficiency and the resulting demand remains within those constraints.

Data Center Grid Dynamics

Sustainable AI requires looking beyond the server rack to the electrical grid interface. Both conventional and ML data centers have variable loads. Synchronized training phases can correlate power changes across many accelerators, reducing the smoothing that independent workloads provide.

[6] **Dennard Scaling**: Robert Dennard observed in 1974 that smaller transistors could operate at constant power density by reducing voltage proportionally. This scaling pattern ended around 2005 when leakage current made further voltage reduction impractical. Perspective 2.2 drew the facility consequence, that every refresh must fit installed power and cooling. The consequence for AI sustainability is equally direct: without Dennard scaling, each process node no longer delivers proportional power savings, which pushes efficiency work toward specialized accelerators, such as GPUs and the Tensor Processing Unit (TPU), that exploit architectural parallelism rather than transistor physics alone.

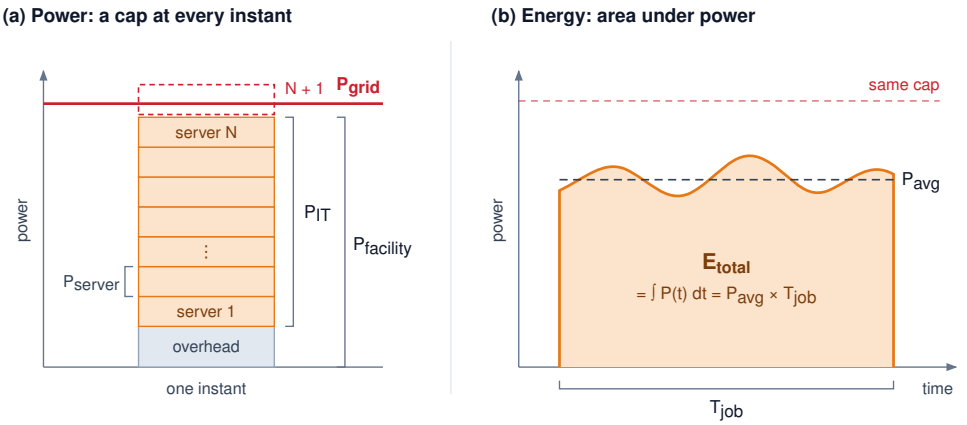


Figure 0.215: Power and Energy Boundaries: Substation grid feeds and facility cooling capacities impose instantaneous power caps on active accelerator concurrency. Integrating instantaneous power over wall-clock duration yields cumulative run energy; instantaneous power constraints and cumulative energy budgets represent distinct physical limits.

> War Story 15.1: When the grid became the bottleneck (2022)
>
> **Context**: In July 2022, the Government of Ireland published its *Government Statement on the Role of Data Centres in Ireland's Enterprise Strategy*, addressing electricity constraints on further development in a country where data centers had become a substantial source of demand (Government of Ireland 2022; International Energy Agency 2024a).
>
> **Mechanism**: Demand growth outpaced grid expansion. The statement reported that Dublin needed significant transmission reinforcement before it could accommodate new data-center power requests.
>
> **Impact**: Grid connection capacity became the gating input for proposed Dublin facilities. New requests had to wait for transmission reinforcement or look to other regions, while contracted projects and existing sites continued to operate.
>
> **Fix**: The statement prioritized network reinforcement, suitable regional locations, and development aligned with additional renewable supply. These were proposed responses to the constraint, not evidence that operators had already resolved it.
>
> **Systems lesson**: Sustainable AI is constrained by interconnection, geography, and power-system adequacy. Efficient accelerators help, but the fleet cannot scale faster than the grid that feeds it, moving the binding constraint from the chip to the substation.

Training phases can change accelerator demand rapidly, but a device-side load step does not propagate unchanged to the utility connection. Its amplitude depends on per-device power, the number of coordinated workers, and computation-communication overlap. Local regulators, decoupling, power converters, and UPS controls shape the upstream response. **Energy buffering** supplies or absorbs energy during a load change; its location, capacity, and control response must match the electrical boundary being protected.

Heat is the paired facility constraint because a data center converts electrical energy into thermal output that must leave the equipment. Some of that heat can serve a nearby demand. A **district heating** connection supplies a municipal heat network, while **industrial coupling** directs recoverable heat toward a compatible process. The benefit depends on the temperature, timing, and distance of the receiving demand, along with any pumping or heat-pump energy needed to supply it. Useful recovery can displace another heat source; it does not eliminate the fleet's electrical consumption[7] (Ebrahimi et al. 2014).

7 **PUE Boundary**: The facility-to-IT ratio glossed with the opening energy boundary (The Green Grid 2007), formalized in section 15, says nothing about where recovered heat goes. Lowering non-IT overhead improves facility efficiency, but the metric does not capture the carbon intensity of electricity or the water consumed for cooling. Carbon usage effectiveness and water usage effectiveness therefore expose constraints that PUE alone leaves invisible.

Training-Scale Energy Concentration

The grid, siting, and heat-reuse constraints become severe because large training campaigns concentrate energy demand into long, synchronized runs. The GPT-3 anchor established the total scale; the new systems concern is its temporal concentration and the additional energy from distributed-training communication.[8]

Concentration in time is what separates a training campaign from the same energy spread across a year of ordinary load. A frontier run holds the 17.5 MW accelerator draw of the Archetype A cluster, before servers, network, and cooling, for the weeks or months the run lasts, and its synchronized computation and communication phases swing that draw together across the cluster, as described under grid dynamics above. The facility must therefore provision for the sustained peak rather than for the annual average, and the grid sees one large, correlated load rather than many small independent ones. That concentration makes efficiency improvements an engineering imperative. Large generative models intensify the problem when successive generations increase parameter counts, token budgets, or both.

The scaling laws introduced in section 6 explain why that concentration keeps growing. Within the ranges studied by Kaplan et al. (2020), test loss falls along smooth power laws as compute, dataset tokens, and non-embedding parameters each expand over several orders of magnitude, with exponents of -0.050, -0.095, and -0.076 respectively (figure 0.216). These are the power laws the introduction presented (figure 0.8), redrawn here as three fitted lines with their exponents printed, because for an energy account the exponent itself is the quantity of interest. An exponent that small means each fixed fractional reduction in loss costs a multiplicative increase in the resource. Because required compute scales as the loss ratio raised to the power 20, lowering compute-limited loss by 10 percent takes 8.2× the compute, and the next 10 percent costs the same multiple again. The diminishing return in principle 9 therefore arrives at the facility as a multiplicative increase in training energy unless realized FLOPs per joule improve at the same pace. Within these studied regimes, quality gains were purchasable with hardware and data, which is why compute demand has outrun hardware efficiency. Beyond training, high-volume deployed systems such as large-scale recommender systems and generative services require continuous inference at scale, consuming energy even after training completes. The cumulative energy burden therefore depends on both the one-time training run and the sustained query volume that follows deployment.

The production of AI chips adds emissions before the operator uses them, so expanding the fleet can add manufacturing impact even when each new device uses less energy per useful task. An operator's inventory records that fabrication under Scope 3, the category for emissions in its supply chain rather than in its own operations or purchased electricity. Section 18 quantifies the manufacturing term, and section 15 assigns it to reporting scopes.

Architectures That Avoid Unneeded Work

The hardware choice is the first place where energy physics becomes an architecture decision. Specialized datapaths and local data reuse can reduce energy per useful operation, but a comparison must match workload, precision, achieved quality, and measurement boundary.[9] Chip arithmetic alone excludes memory and supporting systems; end-to-end energy also includes their activity and execution time.

Under a fixed power envelope, the cheapest joule is the one the hardware never spends, so the choice of which work an architecture performs at all bears directly on the ceiling. Alternative computing architectures expose potential sources of efficiency: selective activation, local state, and reduced communication. Comparing their energy with a dense model requires a shared task, quality threshold, latency target, and measurement boundary.

The architectural opportunity is to avoid work that the task does not need. A periodically evaluated dense model may repeat computation on unchanged inputs, while an event-driven design can respond only when a relevant signal changes. The comparison reduces to two rates. A dense model evaluated f_{eval} times per second at energy E_{eval} per evaluation draws $f_{\text{eval}}E_{\text{eval}}$ whether or not its input changed. An event-driven design that fires r_{event} times per second at energy E_{event} draws $r_{\text{event}}E_{\text{event}} + P_{\text{detect}}$, where P_{detect} is the constant power of the circuitry that watches for events. Skipping work pays only while $r_{\text{event}}E_{\text{event}} + P_{\text{detect}} < f_{\text{eval}}E_{\text{eval}}$, so the advantage shrinks as inputs change more often or as detection itself grows expensive. Dense execution can also reuse data and

8 | **Training Communication Overhead**: Distributed training adds network transfers, synchronization stalls, and checkpoint I/O to the energy account. The fraction is workload- and topology-dependent: parallelism strategy, tensor sizes, link technology, utilization loss, and any extra iterations determine whether communication is a secondary term or the binding energy cost. The measurement contract must therefore meter or model these terms for the actual run rather than apply a universal percentage.

9 | **pJ/FLOP and pJ/multiply-accumulate (MAC)**: A floating-point MAC is conventionally counted as two FLOPs, one multiplication and one addition. An integer MAC also contains two arithmetic operations, but is not two floating-point operations. Unit conversion cannot compensate for different precision, memory traffic, utilization, or measurement boundaries. Compare joules per completed task at fixed quality before inferring a hardware energy advantage.

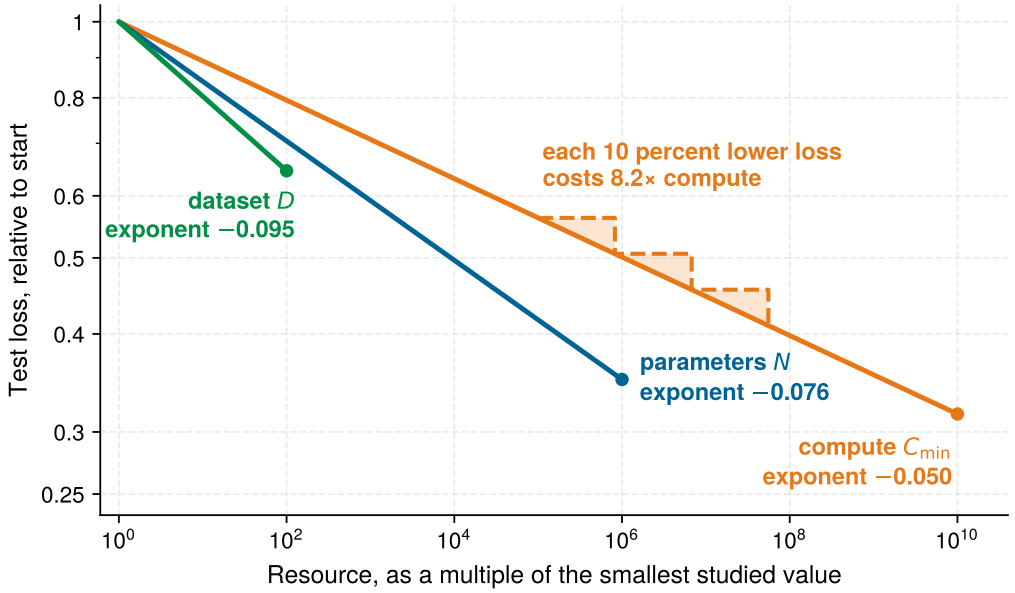


Figure 0.216: Model Scaling Laws: In the ranges studied by Kaplan et al. (2020), increasing model size, dataset size, and compute consistently reduced test loss. Each law is normalized to its loss at the smallest studied value, so on these log-log axes its slope is its exponent; the dashed staircase on the compute law marks the compute multiple that buys each successive fixed fractional reduction in loss. The figure reproduces source-paper notation, where N denotes parameter count and C_{min} denotes compute; elsewhere this book uses P for parameter count and O for operation count. These scaling laws explain why larger models, more data, and increased compute became attractive design choices within that regime.

power down idle circuitry, so the comparison must examine the implemented workload rather than the architecture label alone.

Principles of high-efficiency computing

High-efficiency computing targets avoidable activation, training work, and data movement. Selective and event-driven architectures can skip updates when relevant signals do not change, allowing inactive components to power down when hardware permits; static power, sensing, and communication overhead remain part of the energy ledger.[10] Local learning and improved sample efficiency address different costs. Keeping an update local can reduce communication, while requiring fewer examples or optimization steps can reduce training work; neither property guarantees the other. Evaluation must include auxiliary preprocessing, adaptation, and inference costs at the required accuracy. Sparsity and sparse interconnects offer another route when execution skips arithmetic or transfers, but indexing, routing, load imbalance, and synchronization can consume the nominal saving.

Event-driven and sparse computation point toward research directions for sustainable AI. Architectures that implement **spiking neural networks (SNNs)**, event-driven models that communicate through discrete spikes, or sparse activation patterns can reduce energy because a neuron that does not spike neither computes nor sends a message, so switching and communication track input activity rather than a fixed clock[11] (Prakash et al. 2023). Local learning algorithms and self-supervised approaches offer additional pathways toward more sample-efficient and energy-conscious systems.

These directions expand the design space without making one architecture universally sustainable. The relevant improvement is less measured lifecycle impact per useful task at the required quality and service level. Dense, sparse, and event-driven implementations must meet the same comparison contract.

Whichever architecture runs the work, each lever acts at one accounting tier (figure 0.217). Work reduction and execution efficiency change IT energy; facility overhead scales that energy to the facility total; a regional grid factor converts facility kilowatt-hours into operational carbon; and

[10] **Event-driven Computing**: Computation triggered by input changes can avoid periodic work on slowly changing signals. Its energy advantage depends on event rate, static power, sensing overhead, and the hardware implementation; dense batch workloads need a separate comparison.

[11] **Spiking Neural Networks (SNNs)**: These models communicate through discrete spikes. Sparse activity can reduce communication and switching, but the complete comparison includes training, encoding, sensing, and the hardware used to execute the model. A saving measured on one temporal task does not transfer automatically to other workloads.

hardware amortization adds embodied emissions at its own boundary. Because these terms carry different units and compound at different layers, isolated efficiency percentages cannot be multiplied into a single composite reduction factor.

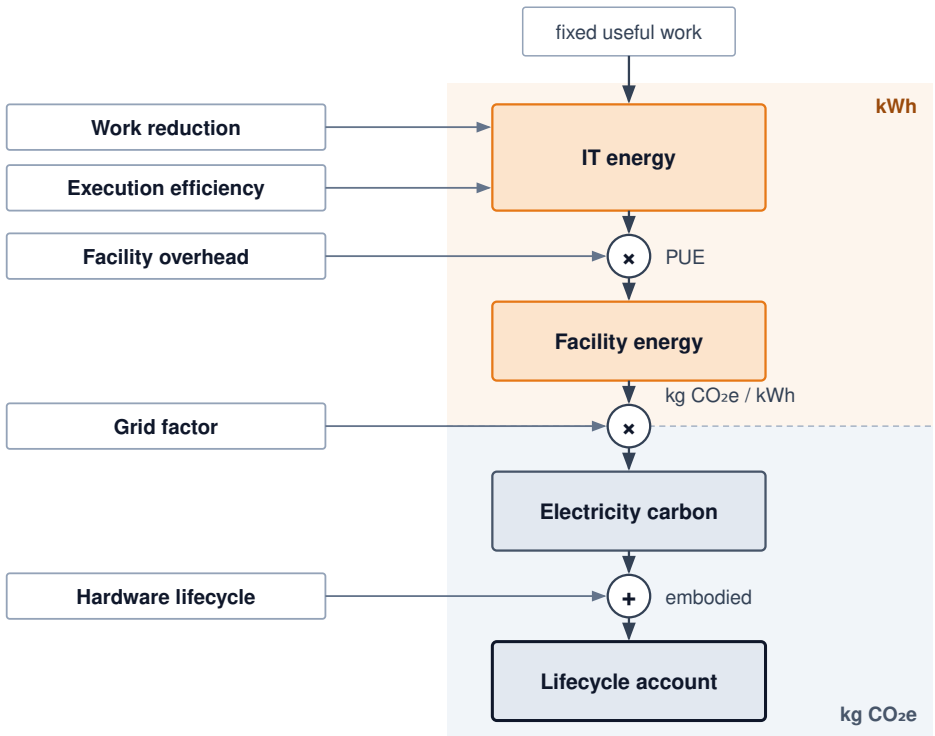


Figure 0.217: Interventions and Their Accounting Boundaries: Work and execution changes affect IT energy; facility overhead converts that energy to a facility total. A chosen grid factor converts electricity to emissions, while hardware lifecycle emissions enter separately. Evaluate the complete configuration at fixed useful work rather than multiplying unrelated improvement factors.

Selecting an intervention requires a measured baseline and a consistent boundary. The energy account must first identify where the workload spends its joules; the carbon account then adds electricity supply and hardware lifecycle. Those measurements determine which architectural change can reduce the complete footprint.

Energy Measurement and Modeling

Engineers cannot optimize what they cannot measure. A cluster consuming five megawatts during a large language model training run directs only a fraction of that power into matrix multiplications; host processors, memory, networking, power conversion, and cooling consume the rest. Effective energy modeling requires decomposing the monolithic data center power bill into granular, component-level metrics that engineers can target for optimization.

Power delivery networks and cooling systems establish hard physical constraints on data center compute capacity. Systematic measurement turns these constraints into numbers an engineer can act on. This section first fixes what a comparable measurement must record and which lifecycle phase it should target, then builds the power model from the transistor to the facility, converts that model into per-operation and per-byte metrics, and closes with the instruments that measure each term. Just as performance engineering requires profiling before optimization, sustainable AI engineering requires measurement before mitigation.

↩ The power-delivery path, thermal design power, and cooling limits of accelerators are established in section 8.

The decision procedure is the same throughout the chapter: measure the dominant lifecycle term, identify the physical bottleneck behind it, choose the intervention that changes that term, and check whether rebound effects erase the gain. Operational electricity, embodied carbon, cooling overhead, water use, and e-waste each call for different levers. Moving a job changes its operational setting without undoing emissions already incurred in manufacturing. Keeping hardware longer changes future procurement needs but also extends its operating energy account. Sustainable design therefore traces each intervention through the terms it changes before comparing the full result.

A sustainability claim is comparable only when it satisfies a **measurement contract**. The contract first names the functional unit, such as one completed training run or 1,000 served requests at a specified output quality. It then fixes the system boundary, including which compute, memory, network, facility, manufacturing, and end-of-life terms enter the account (International Organization for Standardization 2006a, 2006b). The record must also state the attribution rule for shared infrastructure and embodied emissions; the carbon signal and whether it is average or marginal; the time and location of operation; the quality, latency, and reliability constraints that define useful work; and the uncertainty range and sensitivity to consequential assumptions. A result that omits any of these fields may still diagnose one component, but it cannot support an end-to-end comparison.

This contract separates two questions that otherwise become conflated. Attributional accounting allocates an inventory of observed emissions to workloads for reporting, typically using average grid intensity and an explicit share of common infrastructure. Consequential accounting estimates how a decision changes emissions, for example by modeling the generator affected when a scheduler moves one megawatt-hour of demand. The former answers what share of an existing footprint belongs to a workload; the latter answers whether changing the workload changes the footprint (Present et al. 2024). Carbon-aware scheduling therefore needs a signal appropriate for consequential analysis even when the organization's retrospective inventory uses attributional averages. The available marginal factors may be historical estimates, forecasts, or unavailable at the workload's required time and location, so the contract must record the source, resolution, and uncertainty rather than treating "marginal" as a universally observable datum.

Carbon accountability and lifecycle phases

Carbon footprint analysis turns sustainability from a general obligation into a design constraint. It links energy consumption, grid carbon intensity, and lifecycle resource demands to the same decisions that already govern performance and efficiency. Teams that build and deploy AI systems therefore need a workload-level accounting model before they can choose among larger models, lower-power hardware, cleaner regions, or deferred training.

The accounting model matters because it makes the trade-off between capability and resource use auditable, so that extra tuning effort, hardware constraints, or task-dependent accuracy changes can be weighed explicitly against environmental benefit (Schwartz et al. 2020; Patterson et al. 2021).

Traceability is the technical bridge between sustainability measurement and accountability, and it is the engineering response to a transparency gap, the absence of per-model energy, carbon, and water ledgers that would let anyone outside the team check a claim. Accountability means auditability of resource claims. A team should be able to connect a model version, training run, serving workload, region, energy source, and lifecycle estimate well enough that carbon and water claims can be checked.

For measurement to constrain design, reported metrics must expose workload-level cost rather than aggregate cloud-scale claims, which stay opaque when reporting holds at the company-total level. The practical standard is therefore accountability for resource usage across the full AI lifecycle, and it requires the same evidence chain used for latency, accuracy, and reliability: a claim should connect to logs, meters, model versions, and deployment decisions rather than to aggregate sustainability pledges alone. The carbon-footprint calculation in section 15 makes that evidence chain explicit by combining workload energy, facility PUE, grid carbon intensity, and embodied carbon, but it first needs to know which lifecycle phase dominates.

Three-phase lifecycle assessment framework

The practical question is which lifecycle phase dominates a given workload, because the answer determines the optimization lever. Effective carbon footprint measurement therefore separates three

phases that collectively determine environmental impact: training, inference, and the manufacturing of the hardware both run on. Two other groupings appear later in the chapter, the reporting scopes of section 15 and the lifecycle stages of section 22. Both regroup these same emissions, by reporting organization and by time, rather than adding new ones; table 0.214 maps the three groupings onto one another.

For training-centric research workloads, the training phase often dominates operational emissions because mathematical optimization requires sustained parallel computation.[12] Geographic placement then changes the operational result because an identical workload can encounter very different grid intensities.[13]

For high-volume production services, the inference phase can dominate lifetime emissions because serving repeats continuously after training ends, so its cumulative impact scales with deployment breadth and usage frequency.

The manufacturing phase contributes embodied carbon from hardware production, including material extraction, semiconductor fabrication, and supply chain logistics.[14] For a fixed manufacturing footprint, longer operation on a carbon-intensive grid increases operational emissions and lowers the embodied share of the total. Cleaner electricity or less operating time raises that relative share without changing the manufacturing emissions already incurred. Operational efficiency does not undo those emissions; procurement, design, reuse, and service-life decisions determine future embodied costs.

Geographic and temporal optimization

Carbon intensity varies across geographic locations and time periods, creating optimization opportunities. Temporal scheduling can reduce emissions when deadline-tolerant workloads are shifted toward lower-carbon hours or regions, with the realized gain depending on workload flexibility, grid mix, and whether the scheduler uses average or marginal emissions (Patterson et al. 2022; Radovanovic et al. 2021). **Carbon-aware scheduling** automates that shift, moving flexible, nonurgent work toward times and regions with lower carbon intensity while respecting its deadline and the available capacity. Its mechanics, including the cost of the move itself, are developed in section 32.

Development-time carbon tracking matters when it feeds placement and complexity decisions rather than becoming a report after the fact. Tools such as CarbonTracker (Anthony et al. 2020) and CodeCarbon (Schmidt et al. 2021) wrap the workload boundary, estimate energy from hardware counters or utilization models, attach the local grid intensity, and record the resulting emissions alongside the experiment metadata. The important systems pattern is not the API call but the timing of the measurement: the estimate must appear while model size, training duration, region, and schedule are still adjustable, before the run has already consumed its energy.

Power modeling fundamentals

Understanding where energy goes in AI systems requires grounding in the physics of digital computation. The CMOS power equation provides the foundation for reasoning about energy consumption in digital processors, but the useful model must climb three levels: chip power explains why voltage, precision, and activity matter; optimization techniques show how algorithms change those variables; and facility-level metrics reveal whether chip-level savings survive cooling and power-delivery overhead.

The CMOS power equation

Every digital circuit consumes power through two fundamental mechanisms. **Dynamic power** arises from switching transistors between states, while **static power** results from leakage current that flows even when transistors are nominally off. Equation 0.80 formalizes the total power consumption:

$$P_{\text{total}} = P_{\text{dynamic}} + P_{\text{leakage}} = \alpha C V^2 f + V I_{\text{leak}} \tag{0.80}$$

The dynamic power component $P_{\text{dynamic}} = \alpha C V^2 f$ depends on four parameters. The **switching activity factor** α summarizes capacitance-weighted switching per clock cycle under the chosen counting convention. It is not useful compute utilization: at fixed C, V, and f, increasing switching raises dynamic power. The effective load capacitance C reflects the circuits and interconnect being

[12] **Optimizer Memory as Energy Cost**: Adaptive Moment Estimation (Adam) stores per-parameter first and second moment estimates, unlike plain stochastic gradient descent (SGD). For a 70B model in FP32, these two moment buffers total about 560 GB, bringing parameters plus moments to about 840 GB (excluding gradients). The sustainability implication is direct: larger optimizer state means more off-chip memory traffic per training step, and at roughly 160 pJ/byte for a DRAM access, memory movement can dominate the energy budget of parameter updates.

[13] **Carbon Intensity Variance**: Regional averages and time-varying grid factors answer different questions. A generation technology's lifecycle factor is neither a measured regional average nor the marginal emissions response to another job. Scheduling must choose the signal appropriate to its decision and retain the source, period, and boundary.

[14] **Embodied Carbon Break-Even**: Embodied carbon covers manufacturing, transport, and end-of-life treatment rather than use. Allocating NVIDIA's HGX H100 baseboard product carbon footprint evenly across its eight GPUs gives roughly 164 kg CO_2e per H100 (NVIDIA Corporation 2025); assuming continuous accelerator power of 700 W on the average U.S. grid, the modeled operational emissions match that allocation in roughly three to four weeks. This comparison omits host and facility overhead and uses rated power rather than a measured workload trace. A cleaner grid lengthens the modeled interval, but this equality alone does not decide whether replacing hardware reduces future emissions.

switched. Supply voltage V enters quadratically, while clock frequency f sets the rate of switching opportunities. Useful work per joule depends on how much productive computation those transitions accomplish.

The static power component $P_{\text{leakage}} = V \cdot I_{\text{leak}}$ depends on leakage current, whose temperature sensitivity varies with device technology, voltage, and operating point. Rising temperature can increase leakage, adding heat that further raises temperature. Cooling and power control must keep this feedback within a stable operating range. A leakage model therefore needs parameters appropriate to the device rather than a universal temperature-doubling rule (Dayarathna et al. 2016).

The quadratic voltage dependence means that reducing voltage from 1 V to 0.8 V decreases dynamic power by 36 percent when activity, capacitance, and frequency stay fixed. The circuit must still complete its transitions within each clock period. A lower voltage may therefore require a lower frequency, which further reduces dynamic power but can lengthen execution. The energy benefit depends on both the resulting runtime and the static power consumed during it.

Physical mechanisms of energy optimization

The power equation illuminates why specific optimization techniques can improve efficiency. Quantization reduces numerical precision, which can shrink arithmetic units and reduce bytes moved through the memory hierarchy. The realized energy change depends on the implemented kernels, packing and conversion overhead, memory traffic, utilization, and the original bottleneck (Gholami et al. 2022). Lower precision does not by itself permit a lower supply voltage: voltage and frequency remain constrained by the physical implementation, process, and timing margins. Quantization therefore changes the operation and data-movement terms, but only measurement establishes the end-to-end reduction.

Pruning removes weights from neural networks, but it does not remove physical transistors from an existing accelerator. It saves dynamic energy when the resulting execution skips arithmetic or data movement. Structured pruning can map to smaller dense kernels; unstructured pruning needs an implementation that exploits the sparse pattern without spending the savings on indexing and irregular memory access. The power equation explains the benefit through reduced switching activity and powered execution time, not a change to the fabricated circuit capacitance C.

Specialized accelerators can improve useful work per joule by reducing instruction-control overhead, reusing data locally, and mapping operations to suitable datapaths. Keeping arithmetic units productive can amortize static and support power, but raising switching activity without raising useful output only raises power.

Facility-level power metrics

The PUE ratio has carried every facility-energy estimate since the opening energy boundary; the chip-level model now explains what happens inside the IT term, so the ratio itself needs its precise definition and its blind spots. Equation 0.81 restates the ratio of equation 0.7 at this chapter's facility boundary:

$$\text{PUE} = \frac{P_{\text{facility}}}{P_{\text{IT}}} \tag{0.81}$$


Definition 15.2: Power usage effectiveness (PUE)

Power usage effectiveness (PUE) is the data-center efficiency ratio ML system operators use to compare total facility power consumption against the power consumed specifically by IT equipment $(P_{\text{facility}}/P_{\text{IT}})$.

1. **Significance**: It measures the infrastructure overhead of the data center. A PUE of 1.0 is the theoretical ideal; a PUE of 1.10 means that for every 100 watts consumed by IT equipment, an additional 10 watts are required for non-IT facility overhead, including cooling and facility-side power distribution.
2. **Distinction**: Unlike computing efficiency (which focuses on FLOP/s per watt), PUE focuses on facility efficiency: it measures non-IT overhead relative to IT consumption.

Idle equipment and power losses inside the IT measurement boundary remain in the denominator; PUE does not measure useful computation.

3. **Common pitfall**: A frequent misconception is that a low PUE means a "green" data center. PUE measures only overhead efficiency, not the carbon intensity of the energy source; a coal-powered data center can have a better PUE than a solar-powered one while having a much higher environmental impact.



PUE measures facility overhead on top of IT energy.

Napkin Math 15.3: PUE: The cost of cooling

Problem: A team operates a 2 MW cluster. If the facility can be optimized from a legacy air-cooled PUE (1.58) to state-of-the-art (1.10), how much energy and money does that save annually?

Math: Energy saved is the difference in infrastructure overhead $(\text{PUE} - 1)$ across the IT load.

1. **Overhead Reduction**: 1.58 - 1.10 = 0.48.
2. **Annual energy savings**: 2 MW $\times$ 0.48 $\times$ 8760 h/year $\approx$ 8,409.6 MWh.
3. **Financial Savings**: 8,409.6 MWh $\times$ \$70/MWh $\approx$ \$588,672. This facility-only saving leaves the model unchanged and scales with reducible non-IT overhead, so cooling optimization matters most in inefficient facilities.

A PUE of 1.0 would mean no measured non-IT overhead, not that all electricity produces useful computation. Idle servers and stalled accelerators remain inside the IT denominator. Surveyed data centers reported an average PUE near 1.55 in 2022, meaning that roughly 55 percent additional energy beyond IT consumption went to infrastructure, with older air-cooled sites higher still (Uptime Institute 2022). Leading hyperscale facilities achieve PUE between 1.1 and 1.2 through advanced cooling techniques including free-air cooling in cold climates, liquid cooling for high-density GPU clusters, and optimized power distribution.

Equation 0.82 formalizes **water usage effectiveness (WUE)**, capturing the water consumption that evaporative cooling and other processes require:

$$\text{WUE} = \frac{W_{\text{water}}}{E_{\text{IT}}} \tag{0.82}$$

The units are liters per kilowatt-hour, with typical values ranging from 0.5 to 2.0 L/kWh depending on climate and cooling technology. A data center with WUE of 1.8 L/kWh training a model requiring 10,000 MWh of IT energy would consume 18 million liters of water, equivalent to roughly 40–47 US household-years of water use under a 380,000–450,000 L/year household baseline. A facility-energy estimate must first be converted to the IT boundary before applying this WUE.

Facility-level metrics identify where engineering intervention yields the greatest returns. The case study in section 15 demonstrates how ML-driven optimization of PUE translates directly into measurable energy savings.

DeepMind energy efficiency case study

Google's cooling systems illustrate how operating settings affect PUE (2023). Server load, weather, and interactions among pumps and chillers complicate fixed operating heuristics (Buyya et al. 2010). Building on earlier work predicting PUE (Gao 2014), DeepMind trained neural networks from facility telemetry to predict future PUE and recommend settings. Additional models predicted temperature and pressure to check those recommendations against operating constraints.

In the reported live-site test, the system reduced cooling energy consumption by 40 percent and overall PUE overhead by 15 percent (Barroso et al. 2019; Evans and Gao 2016). By equation 0.81, a 15 percent cut in overhead removes 15 percent of the non-IT term (PUE minus 1), not 15 percent of total facility energy. At equal IT energy, the same fractional overhead reduction saves more electricity where the initial overhead is larger. The reported result establishes a benefit for the tested facility, not an identical saving at every site.

The saving came from changing how the existing pumps, chillers, and cooling towers were operated rather than from installing new cooling equipment, which makes control software a lever available to a facility that cannot be rebuilt. The transferable lesson is to evaluate operating controls alongside equipment changes. Telemetry supports the prediction, operating limits constrain the recommendation, and metered energy establishes whether the change saves electricity.

Carbon intensity and regional variation

The carbon impact attributed to electricity depends on the selected emissions factor and its boundary. Generation-technology lifecycle factors include fuel supply, construction, operation, and decommissioning. Regional grid factors instead reflect an electricity mix over a stated place and period; operational factors may exclude upstream lifecycle emissions. Table 0.209 distinguishes these inputs before they enter the calculation.

Table 0.209: Electricity Emissions Factor Boundaries: A technology factor is not a regional grid measurement. Record the period, location, imports, greenhouse gases, and lifecycle coverage before comparing or multiplying a factor by workload electricity.

Factor	What It Describes	Appropriate Use
Generation lifecycle	Emissions across the lifecycle of an electricity technology	Comparing generation options under consistent lifecycle assumptions
Grid average	Emissions attributed to an electricity mix over a place and period	Attributing workload electricity emissions with a declared operational or lifecycle boundary
Grid marginal	Estimated change in emissions when demand changes	Evaluating a proposed shift or reduction in electricity demand

Figure 0.218 applies regional electricity factors to a fixed 10,000 MWh facility-energy account. The assumed factors range from 10 g/kWh for Norway (100 t CO_2 for the workload) to 820 g/kWh for Poland (8,200 t CO_2), producing a calculated 82× emissions ratio. These rounded annual-average factors (International Energy Agency 2023), the same ones notebook 15.2 used for Quebec and Poland, illustrate the effect of placement while holding facility energy constant; they are not measurements of the same job run at every site. Actual placement decisions require time-matched grid evidence and must include changes in facility overhead and the energy needed to move or resume the work.

Systematic energy metrics

Quantifying energy efficiency requires systematic metrics that enable comparison across hardware architectures and algorithmic approaches. The metric ladder moves from energy per operation to energy per byte and then to the roofline relationship between arithmetic intensity and data movement. That progression matters because an optimization that reduces FLOPs may do little for a workload whose energy is spent moving bytes.

Energy per operation

A basic metric for computational energy efficiency is energy consumed per operation, typically measured in picojoules. State the operation type and precision: a floating-point multiply-accumulate is conventionally two FLOPs, whereas an integer MAC is two integer arithmetic operations.

Hardware architecture changes which overheads can be reduced. Table 0.210 pairs each architecture class with the effective energy coefficient this chapter's models use and with the measurement needed to test it. The coefficients span three orders of magnitude, from 100 pJ/FLOP for a general-purpose core, where instruction fetch and control dominate each operation, to 0.1 pJ/FLOP for a fixed-function datapath. They fold local operand delivery and control into each operation, which is why the GPU coefficient of 10 pJ/FLOP sits well above the roughly 3.7 pJ of a bare FP32 multiply at 45 nm (Horowitz 2014). They are order-of-magnitude modeling inputs, not a ranking of products.


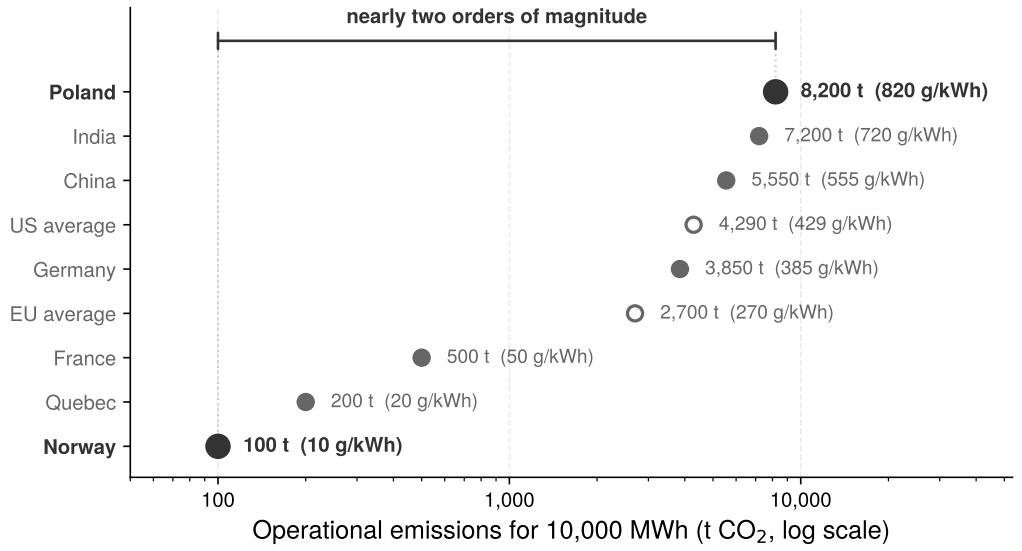


Figure 0.218: Comparing Regional Electricity Emissions: Operational carbon of one fixed facility-energy workload under rounded annual grid-average factors for each region (International Energy Agency 2023); the Quebec factor is the utility's reported mix. With facility electricity held fixed, the regional generation mix alone changes operational carbon by nearly two orders of magnitude. Open circles mark regional averages. Annual averages do not capture hourly or marginal emissions, or the lifecycle emissions of generation.

Table 0.210: Architecture and Energy Measurement: The effective-energy column gives the order-of-magnitude coefficient this chapter's energy models assign to each architecture class, including local operand delivery and control. Specialization can reduce execution overhead, but device specifications with different operation types and system boundaries do not establish an end-to-end energy ranking. Compare the same useful task at the required quality.

Architecture	Effective energy (model)	Potential energy advantage	Comparison must include
General-purpose CPU	100 pJ/FLOP	Flexible execution for diverse workloads	Instruction overhead and achieved utilization
GPU	10 pJ/FLOP	Parallel arithmetic and data reuse	Precision, occupancy, and memory traffic
Systolic accelerator	1 pJ/FLOP	Local reuse across a regular datapath	Supported shapes, precision, and data movement
Edge accelerator or fixed-function ASIC	0.1 pJ/FLOP	Specialized low-power execution	Host, memory, peripherals, and duty cycle
Analog or in-memory compute	Not modeled	Reduced movement for supported operations	Conversion, peripheral circuits, and achieved quality

Precision affects energy per operation through implementation-specific arithmetic and data movement. Narrower formats can reduce circuit area, switched capacitance, and memory traffic, but bit width alone does not determine wall energy. The measurement contract requires a matched workload and quality target, with the same memory and supporting-system boundary.



Fetching an FP32 operand from DRAM costs 64× the FLOP that uses it.

Energy per byte

Data movement often dominates energy consumption in AI workloads with low arithmetic intensity. The following illustrative cost model assigns per-byte energy across storage and communication boundaries. These coefficients teach the cost of movement; they are not universal measurements of every platform:

Table 0.211 reveals a critical insight about memory hierarchy energy costs: movement from DRAM can dominate arithmetic under the modeled coefficients. The rows trace the path from registers through L1 cache and L2 cache to DRAM, Non-Volatile Memory Express (NVMe), and network transfers. Under the GPU coefficient of 10 pJ/FLOP from table 0.210, accessing one FP32 operand from DRAM (4 bytes × 160 pJ/byte = 640 pJ) costs 64× the energy of the operation that consumes it. These coefficients agree with the movement costs priced per bit in section 11 once the units match. That section's DRAM figure of about 20 pJ per bit is this table's 160 pJ/byte, and its 320 pJ fetch is one 16-bit operand where this example fetches a 4-byte FP32 operand. The bare FP16 multiply-accumulate of about 1 pJ quoted there sits below the effective GPU coefficient here because

Arithmetic intensity and energy roofline

↩ The performance roofline and its ridge point are established in section 6.

Arithmetic intensity connects the operation count to the data-movement volume. Combined with energy per operation and per byte, it identifies which contribution dominates this energy model; it does not by itself identify the resource limiting execution speed. Equation 0.83 defines the workload ratio. In these equations, O is the operation count in FLOPs, D_{vol} is data volume in bytes, E_{compute} is energy per FLOP, and E_{move} is energy per byte moved:

$$I = \frac{O}{D_{\text{vol}}} \tag{0.83}$$

At fixed energy coefficients, arithmetic intensity measured in FLOP/byte determines the relative size of the compute and movement terms. Equation 0.84 expresses modeled energy E_{total} at the chip-and-memory boundary as their sum (the facility total E_{facility} appears later in equation 0.88), while equation 0.85 isolates the roofline-style dominant term. Static power and supporting systems require additional terms if the comparison includes them:

$$E_{\text{total}} = O \times E_{\text{compute}} + D_{\text{vol}} \times E_{\text{move}} \tag{0.84}$$

$$E_{\text{dominant}} = \max\left(O \times E_{\text{compute}}, D_{\text{vol}} \times E_{\text{move}}\right) \tag{0.85}$$

The maximum identifies the larger energy contribution, not the sum. Near balance, omitting the other term substantially understates the modeled energy. Equation 0.86 defines the crossover arithmetic intensity where compute and memory energy balance:

$$I_{\text{crossover}} = \frac{E_{\text{move}}}{E_{\text{compute}}} \tag{0.86}$$

For a GPU with E_{compute} of 10 pJ/FLOP and E_{move} of 160 pJ/byte (DRAM access):

$$I_{\text{crossover}} = \frac{160 \text{ pJ/byte}}{10 \text{ pJ/FLOP}} = 16 \text{ FLOP/byte}$$

The **energy roofline model** in figure 0.219 bounds energy efficiency (GFLOP/J) against arithmetic intensity (FLOP/byte), with a 16 FLOP/byte crossover under the stated component costs. Below this point, the larger energy contribution is memory movement (160 pJ/byte); above it, arithmetic sets the horizontal upper bound of 100 GFLOP/J (10 pJ/FLOP). The piecewise bound keeps only the larger contribution, whereas actual energy includes both and any omitted system overhead. Its crossover therefore answers a different question from the performance ridge, which depends on peak throughput and memory bandwidth. A workload can be memory-bandwidth-bound in execution time while arithmetic contributes more of its modeled dynamic energy.

This framework applies directly to the most common operation in deep learning: matrix multiplication.

> Napkin Math 15.4: MatMul energy analysis
>
> **Problem**: How do matrix dimensions N dictate whether arithmetic energy E_{compute} or memory energy E_{move} dominates matrix multiplication $\mathbf{C} = \mathbf{AB}$?
>
> **Math**:
>
> 1. Operation & byte count: $2N^3$ FLOPs and $12N^2$ bytes at FP32, assuming ideal reuse: read each input once and write the output once at the modeled memory boundary. Tiling and limited capacity can increase measured traffic.
> 2. Arithmetic intensity: $I = \frac{N}{6}$ FLOP/byte, so the matrix sits exactly at the energy crossover when $N = 96$ ($I = 96/6 = 16$), the small-matrix row below.
> 3. Regime comparison: table 0.212 compares energy terms across small, large, and vector work.

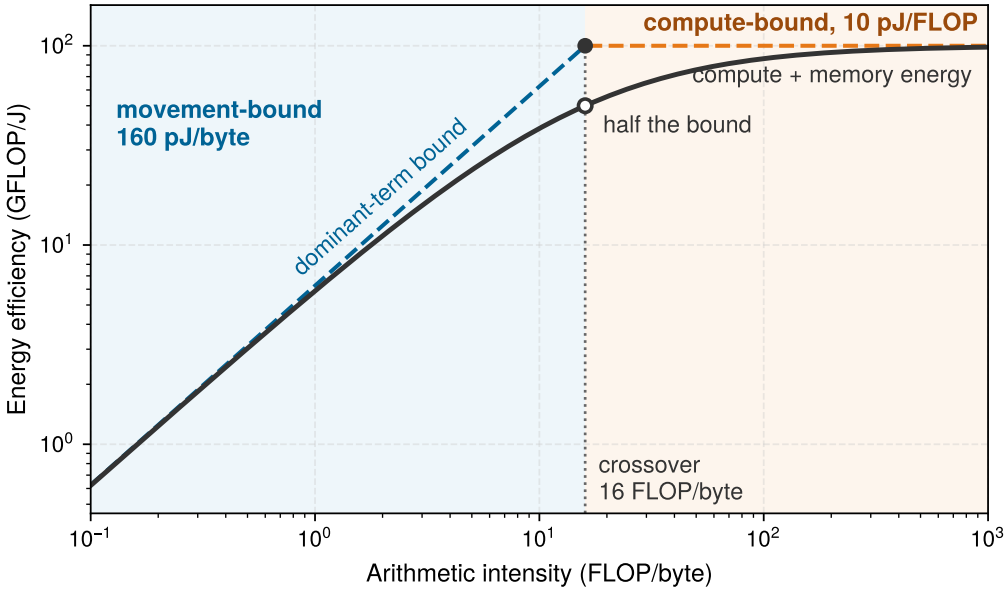


Figure 0.219: Energy Roofline Model: Just as performance rooflines limit FLOP/s based on bandwidth, energy rooflines limit FLOP/J. The dashed curve uses the dominant energy term (blue where data movement dominates, orange where arithmetic dominates); the solid curve includes both compute and memory energy using the same coefficients as the worked example. At the crossover both terms contribute equally, so total-energy efficiency is half the dominant-term bound. Static and other system energy require additional terms.

Table 0.212: Energy Bottleneck Comparison: The same energy model classifies small dense work, large dense work, and element-wise work by their dominant energy term.

Workload	Arithmetic intensity	Compute energy	Memory energy	Optimization priority
Small matrix ($N = 96$)	$I = 96/6 = 16$ FLOP/byte	$2 \times 96^3 \times 10$ pJ = 17.69 µJ = 0.0177 mJ	$3 \times 96^2 \times 4 \times 160$ pJ = 17.69 µJ = 0.0177 mJ	Balanced at the crossover
Large matrix ($N = 1000$)	$I = 1000/6 = 167$ FLOP/byte	$2 \times 10^9 \times 10$ pJ = 20 mJ	$3 \times 10^6 \times 4 \times 160$ pJ = 1.92 mJ	Improve compute efficiency
Vector addition ($N_{vec} = 1000$)	$I = 1000/12000 = 0.083$ FLOP/byte	1000×10 pJ = 0.00001 mJ	12000×160 pJ = 0.00192 mJ	Reduce data movement through fusion

Systems insight: Energy optimization follows the same bottleneck logic as latency optimization. Dense matrix multiply rewards efficient arithmetic; element-wise work rewards reducing memory movement.

The energy roofline model reveals why different optimization strategies suit different workloads. When arithmetic dominates the energy account, large dense matrix operations benefit from lower energy per executed operation. When data movement dominates, element-wise kernels benefit from data layout optimization, kernel fusion to reduce memory round-trips, and on-chip memory utilization. Faster execution alone does not establish either saving; average power and execution time must be measured together. This framework guides architectural and algorithmic choices for sustainable AI system design.

Energy measurement techniques

Quantifying AI system energy consumption requires measurement at multiple levels of the hardware stack, from chip-level instrumentation to facility-wide monitoring. The method choice is itself an engineering trade-off: hardware counters provide fine attribution, mobile profilers expose platform-specific subsystems, edge instruments capture duty-cycle behavior, and system-level tools connect component measurements to the facility overhead that component counters miss.

Hardware power counters

Modern processors expose manufacturer-provided power telemetry that software can query through device interfaces. These counters provide workload-correlated estimates within the rails and sampling windows the device reports; they are not universal ground truth for wall-plug energy, and their update rate, calibration, and component coverage vary by platform. External instruments remain necessary when a comparison requires traceable total energy or finer temporal resolution.

Intel's **running average power limit (RAPL)** interface exposes cumulative energy counters for supported power domains, with coverage depending on the processor. A controlled measurement samples the relevant counter before and after the workload and divides the energy delta by elapsed time to recover average power. This makes RAPL useful for host-side work, provided the account identifies the domains actually reported and handles counter rollover. Package and subdomain counters must not be added when their coverage overlaps. RAPL does not measure discrete GPU energy, and access can require elevated permissions.

NVIDIA GPUs expose power information through the NVIDIA Management Library, accessible via the `nvidia-smi` command-line tool or programmatic bindings. GPU power monitoring must distinguish an instantaneous reading from a sensor-averaged value; the reported behavior depends on the device and query. Integrating samples requires a cadence and workload interval appropriate to that averaging window. Sampling an averaged signal more frequently does not recover short power spikes. Supported accumulated-energy counters can simplify interval accounting, but their scope and resolution still need checking, and neither method supplies full facility energy by itself.

Edge devices and microcontrollers often lack built-in power counters and require external instrumentation. Select current range, voltage measurement, sampling rate, and analog bandwidth to capture the workload's active and sleep intervals. Board-level monitors can integrate inference energy; resolving shorter events requires adequate instrument bandwidth and careful treatment of filtering and aliasing. A fast sample rate alone cannot attribute energy to individual operations.

Mobile platform energy profiling

On mobile platforms, measurement depends on how much subsystem attribution the host operating system exposes. Some platforms report per-rail or per-component power for the CPU, GPU, neural processing unit, and radio, which lets a developer see which subsystem dominates total draw. Others expose only relative energy-impact scores or thermal states, which are useful for spotting regressions during development but cannot support an absolute energy claim. Vendor profilers that correlate power traces with kernel execution sit between these extremes. The design question is therefore not which tool to use but whether the reported quantity covers the electrical boundary the comparison needs; a relative score cannot be converted into joules per inference. When it cannot, external instrumentation is required. Table 0.213 summarizes edge power measurement instruments by measurement role and the checks each role requires.

Table 0.213: Edge Power Measurement Instruments: Choose instrumentation by the event duration, dynamic range, and electrical boundary being measured. Verify configured specifications rather than assuming one device is universally sufficient.

Instrument class	Measurement role	Required checks
Board current monitor	Integrate energy on selected rails	Voltage, sample interval, shunt losses, and event duration
Multi-rail monitor	Attribute energy among components	Channel synchronization and coverage
Wide-range external analyzer	Capture sleep and active intervals	Bandwidth, range transitions, and calibration

Instrument class	Measurement role	Required checks
Automated power analyzer	Repeat duty-cycle and battery tests	Triggering, integration window, and supply behavior

Edge measurement methodology

Edge energy measurements are useful only when they reflect the deployed duty cycle rather than an idealized active-only inference burst. Reproducible evaluation requires controls matched to that workload. Simultaneous current and voltage logging must span the active and quiescent states being measured, capturing rail voltage fluctuations rather than inferring power from current alone. A sustained-load comparison requires thermal and frequency stabilization; cold starts and periodic bursts instead need measurements of their actual state transitions. Realistic duty-cycle accounting records both peak inference draw and time-averaged power across typical idle intervals. Component attribution may isolate or subtract peripheral loads to expose accelerator consumption, but a deployment estimate must include the radios, sensors, and other subsystems needed to deliver the service. For duty cycle accounting, equation 0.87 expresses this relationship between active and idle power:

$$P_{\text{avg}} = P_{\text{active}} \times \alpha_{\text{duty}} + P_{\text{idle}} \times (1 - \alpha_{\text{duty}}) \tag{0.87}$$

where α_{duty} is the duty cycle (fraction of time performing inference).

System-level energy profiling

Comprehensive energy accounting requires combining chip-level measurements with infrastructure overhead. The component terms must be disjoint: GPU-board telemetry that already includes device memory must not be added to another measurement of that same memory. They must also cover the IT boundary, with storage and server support loads included in the relevant measured terms. Equation 0.88 formalizes total energy as the sum of those component contributions scaled by facility overhead:

$$E_{\text{facility}} = (E_{\text{CPU}} + E_{\text{GPU}} + E_{\text{memory}} + E_{\text{network}}) \times \text{PUE} \tag{0.88}$$

No single counter spans the full energy path, so system-level profilers like Intel VTune, NVIDIA Nsight Systems, and open-source tools such as PowerJoular aggregate measurements across components. On-chip counters estimate device power and may differ in sampling rate, coverage, and calibration; a rack power distribution unit (PDU) provides an independent measurement of the downstream IT load. A rack PDU does not measure central chillers, pumps, lighting, or upstream conversion losses. Facility energy must instead come from facility meters or from an explicitly time-matched PUE applied to the measured IT load.

Equation 0.89 expresses the relationship between measured component power and total facility power:

$$P_{\text{facility}} = P_{\text{IT}} \times \text{PUE} = (P_{\text{servers}} + P_{\text{network}} + P_{\text{storage}}) \times \text{PUE} \tag{0.89}$$

Facility energy is still not a footprint. Converting it to emissions requires a grid factor, and the hardware that drew it carries manufacturing emissions that no power meter records.

Carbon Footprint Calculation

Consider a data center supplied by a hydro-heavy grid. Its operational carbon intensity can be far below a fossil-heavy grid, but hydroelectric generation is not lifecycle-zero, and the AI system is not carbon-free. Reservoir construction and operation have impacts, while mining the silicon, manufacturing the GPUs, and pouring the concrete for the data center emitted carbon before the servers were turned on. A complete footprint calculation must account for operational electricity, embodied carbon, and the ecological effects excluded from a carbon-only metric.

The accounting model builds that footprint term by term. It first fixes whose inventory each emission belongs to, then gives operational carbon, embodied carbon, and their lifecycle sum each an equation that generalizes across workloads, grids, and amortization assumptions, and it closes by applying all three to one large training run.

Comprehensive carbon accounting methodologies

The training, inference, and manufacturing account groups emissions by the activity that produces them. The three emission scopes defined by the **Greenhouse Gas (GHG) Protocol** (World Resources Institute and World Business Council for Sustainable Development 2023), an accounting standard for organizational emissions inventories, instead classify them relative to a reporting organization. These are different views of the same footprint, not additional totals to add together. Connecting the workload account to the organizational inventory requires naming who owns the equipment, purchases the electricity, and buys the service.

Within an owned data-center facility boundary, Scope 1 emissions include direct combustion in owned generators and refrigerant leakage from cooling equipment. Purchased electricity used to run cooling belongs in Scope 2, not Scope 1.

Scope 2 emissions represent indirect emissions from purchased electricity, steam, heat, and cooling consumed by the reporting organization. Purchased electricity is often the dominant category for an operator's owned facility, and it varies dramatically by geographic location and grid energy mix. Electricity used by a cloud provider is Scope 2 for that provider, but a customer's purchased cloud service is generally accounted for in the customer's Scope 3 value chain. The physical electrons do not change; the reporting boundary does. The placement example in section 2 uses a declared pair of illustrative factors; actual accounting requires factors matched to the location, time, and method.

Scope 3 emissions constitute the most complex category, encompassing hardware manufacturing, cloud supply chains, transportation, disposal, and downstream use. Semiconductor manufacturing is carbon-intensive.[15] The manufacturer reports the same fabrication emissions inside its own organizational boundary, so the two inventories describe one physical emission from two sides. How long operation takes to match that embodied term depends on how hard and on which grid the hardware runs. At rated power on the US-average grid, an H100's operational emissions equal its allocated manufacturing footprint in roughly three to four weeks, the break-even worked with the lifecycle phases (section 12); at low utilization or on a clean grid, the same equality takes months or years. Under company-wide or value-chain AI accounting, Scope 3 can dominate even when Scope 2 dominates a single owned facility's operational footprint.

Downstream use can also enter Scope 3, including end-user smartphones, IoT devices, and edge computing.[16] Companywide totals do not by themselves identify the footprint of a particular AI service; that attribution still requires workload-level accounting.

The operational emissions of a final training run and its deployed service omit the development that produced them, including failed experiments, hyperparameter searches, and the build and test infrastructure. Repeated experiments can exceed the cost of the final run. A search that trains k candidates at a fraction f of the final run's cost adds kf final-run equivalents before the chosen model starts, so a sweep of 50 candidates at 10 percent of full scale costs 5× the run that gets reported. Continuous integration, compilation, and evaluation add further work whose contribution depends on run frequency and scale. The development boundary must record these activities before assigning their emissions to the reporting organization's inventory; the phase of model development does not itself determine the emissions scope.

The GHG Protocol[17] arranges these scopes as concentric reporting boundaries that widen outward from the operator's direct control (figure 0.220). On-site diesel generators sit in Scope 1, purchased grid electricity for compute and cooling in Scope 2, and upstream semiconductor fabrication and end-of-life recycling in Scope 3.

With the scopes and the development boundary defined, the activity phases of section 12, the lifecycle stages of section 22, and the scopes can be laid side by side (table 0.214). Each row is one set of emissions seen three ways, so a total built from one column must never be added to a total built from another.

15 **Lithography and Embodied Energy**: Advanced semiconductor fabrication can use energy-intensive lithography, including extreme ultraviolet (EUV) processes. Emissions per usable chip depend on the process sequence, facility energy mix, yield, die area, and allocation method. Neither transistor count nor a nominal process-node label alone determines the number of exposure steps or manufacturing footprint.

16 **Edge AI Energy Trade-off**: Edge inference can reduce network transfers and response latency, while distributing computation across devices with different duty cycles and power states. It does not eliminate network or cloud work. Compare local compute, idle power, sensors, communications, and any remaining server work over the same service period; distributed consumption is harder to attribute, but remains part of the accounting boundary.

17 **Greenhouse Gas (GHG) Protocol**: The framework distinguishes direct emissions, purchased energy, and other value-chain emissions (World Resources Institute and World Business Council for Sustainable Development 2023). Their relative shares depend on the reporting organization and workload boundary. Explicit classification prevents purchased cloud services or manufacturing from disappearing from an account limited to an operator's own electricity.

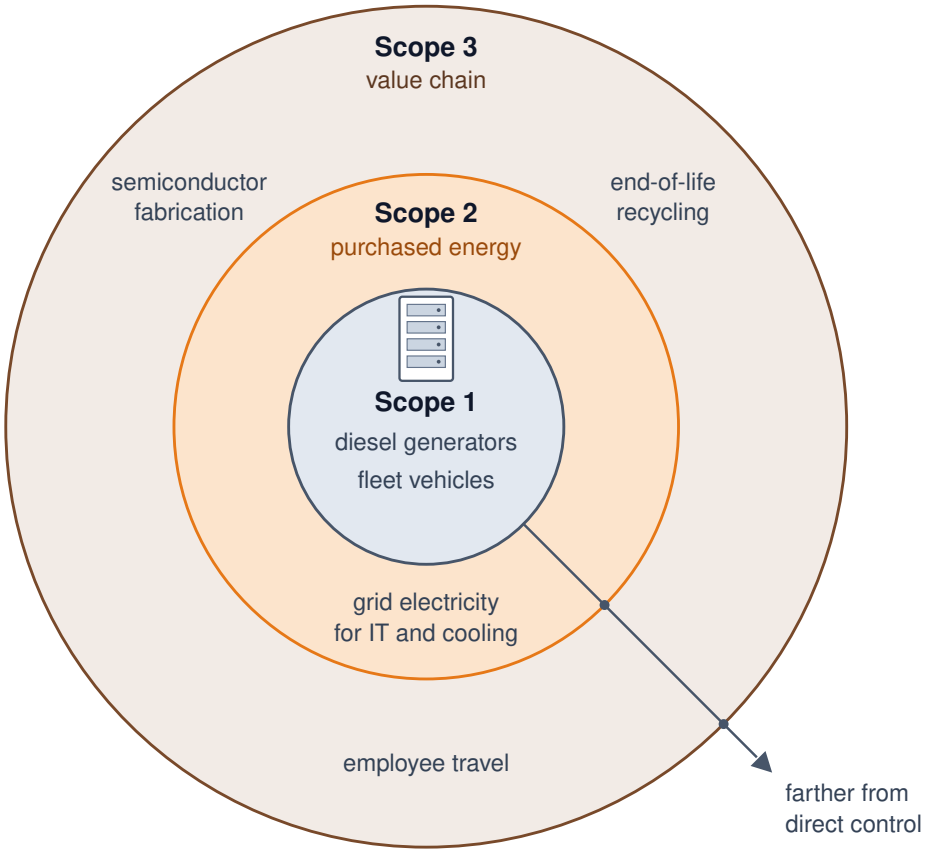


Figure 0.220: GHG Emission Scopes: Concentric rings place the reporting organization's data center at the center, with Scope 1 (direct emissions) innermost, Scope 2 (purchased energy) around it, and Scope 3 (value chain) outermost. Representative sources sit inside each ring. The rings show reporting distance from the operator's direct control, not relative size. Scope definitions follow the GHG Protocol (World Resources Institute and World Business Council for Sustainable Development 2023).

Table 0.214: Three Views of One Footprint: The activity phases group emissions by the work that causes them, the lifecycle stages by when they occur, and the GHG scopes by which organization reports them. The same physical emissions appear once in each view; the scope assignment changes with the reporting organization, not with the hardware.

Activity phase	Lifecycle stage	Scope for an owner-operator	Scope for a cloud customer
Training (development runs and the final run)	Design and experimentation; use	Scope 2 for purchased electricity; Scope 1 for on-site generation	Scope 3 (purchased service)
Inference (serving)	Use	Scope 2 for purchased electricity; Scope 1 for on-site generation	Scope 3 (purchased service)
Manufacturing (embodied carbon)	Manufacture; disposal	Scope 3 (capital goods and end-of-life treatment)	Scope 3 (within the purchased service)

Categorizing these emissions into Scope 1, 2, and 3 frameworks provides a standardized vocabulary for corporate environmental reporting. Correctly applying this framework in practice requires classifying the various hidden emission sources across a typical ML platform's operational lifecycle.

Checkpoint 15.2: Accounting for invisible carbon

Audit the carbon footprint of a machine learning platform by classifying the following emission sources into Scope 1 (Direct), Scope 2 (Indirect Energy), or Scope 3 (Value Chain). State the reporting organization before assigning each scope:

- ☐ **Backup generation**: classify diesel burned by backup generators during a grid outage at an owned facility.
- ☐ **Leased cloud cluster**: classify the electricity for both reporting entities, the cloud operator that purchases it and the customer that purchases the compute service.
- ☐ **Embodied manufacturing**: classify the embodied carbon emitted during the manufacturing of the GPUs by TSMC.
- ☐ **End-user operation**: classify emissions from the end-user's smartphone battery while running a deployed mobile inference app.

Operational carbon calculation

Operational carbon emissions result from electricity consumption during training and inference, scaled by grid carbon intensity. Equation 0.90 quantifies this as the product of facility-level energy and grid carbon intensity:

$$\text{CO}_{2,\text{operational}} = E_{\text{facility}} \times \text{CO}_{2,\text{grid}} \tag{0.90}$$

where E_{facility} is the facility-level energy from equation 0.88 (component energy already scaled by PUE) and $\text{CO}_{2,\text{grid}}$ is the carbon intensity of the electricity grid. The facility overhead enters once, through E_{facility}, so it does not appear again in the carbon equation. A concrete training emissions calculation illustrates this framework.

Napkin Math 15.5: Training emissions calculation

Problem: Quantify the operational carbon footprint of training a 7B parameter model on 64 A100 GPUs for 14 days, assuming continuous accelerator draw at the rated power and the stated rack-support and facility overheads.

Math:

1. Compute energy: 64 GPUs $\times$ 400 W $\times$ 336 hours = 8,601.6 kWh.
2. Apply IT support and PUE: host processors, memory, and networking add to the accelerator load. This calculation borrows the ratio of IT power to accelerator power from the DGX H100 rack profile itemized later in table 0.215, a modeling proxy for an A100 server's support load rather than a measurement of it, which scales accelerator energy by 1.38 to 11,827.2 kWh, so total facility energy = 11,827.2 kWh $\times$ 1.12 = 13,246.5 kWh.
3. Calculate emissions: On US average grid (429 g/kWh CO_2), emissions = 5.7 t. On Quebec hydro grid (20 g/kWh), emissions = 264.9 kg.

Systems insight: The grid factor alone produces a 21.5× difference in training emissions for this pairing, the same placement lever quantified in notebook 15.2. The model architecture is unchanged.

Embodied carbon assessment

The training-emissions notebook priced electricity only. At the same energy use, a lower grid emissions factor reduces operational carbon and increases the relative importance of chip fabrication and data center construction. For that same A100 run, the amortized manufacturing share derived at the end of this section is about 1.6 percent of total emissions on the US-average grid but about 25.8 percent on Quebec's grid. Whether embodied carbon becomes the largest term depends on the manufacturing footprint, utilization, and service life, so those quantities must enter the comparison before an engineer can choose between reducing electricity use and extending hardware service.

Embodied carbon encompasses emissions from raw material extraction, semiconductor fabrication, assembly, transportation, and end-of-life disposal. For AI hardware, manufacturing emissions are dominated by the energy-intensive nature of advanced semiconductor processes.

Advanced-node AI accelerators carry substantial manufacturing footprints: an NVIDIA A100 GPU embodies approximately 150 kg CO_2e per unit (Luccioni et al. 2023), and NVIDIA's HGX H100 product carbon footprint implies roughly 164 kg CO_2e per H100 when the baseboard footprint is allocated evenly across its eight GPUs (NVIDIA Corporation 2025), including wafer fabrication at advanced process nodes, high-bandwidth memory production, and packaging. Equation 0.91 amortizes this embodied carbon over the hardware lifetime to compute per-use emissions:

$$\text{CO}_{2,\text{embodied,daily}} = \frac{\text{CO}_{2,\text{manufacturing}}}{T_{\text{lifetime}} \times 365} \tag{0.91}$$

with T_{lifetime} in years.

The manufacturing emissions have already occurred when the hardware enters service. Amortization allocates that burden over time; it does not describe additional manufacturing emissions accumulating each day. Utilization and service life determine how much useful work shares the initial burden.

> Systems Perspective 15.1: Embodied carbon amortization
>
> Renting a GPU for an hour uses hardware whose manufacturing emissions have already occurred. The workload account allocates a share of those emissions to the rental interval, regardless of whether the monetary fee explicitly prices carbon.
>
> Expressing equation 0.91 per hour and multiplying by the job's duration makes that allocation explicit:
>
> $$\text{CO}_{2,\text{total}} = \text{CO}_{2,\text{operational}} + \left(\frac{\text{CO}_{2,\text{manufacturing}}}{T_{\text{lifetime}} \times 365 \times 24} \times T_{\text{job}} \right)$$
>
> with T_{lifetime} in years and T_{job} in hours.
>
> **Scenario**: Training a model for 10 hours on 8 NVIDIA H100s. This accelerator-only illustration uses thermal design power (TDP) as a constant-power assumption and excludes host, network, and facility energy. Its embodied share uses the allocated baseboard footprint; it is not a complete fleet lifecycle inventory.
>
> - Operational: 8 × 0.7 kW × 10 hours = 56 kWh. At 0.429 kg/kWh (US-average grid) = 24 kg.
> - Embodied: 8 × 164 kg = 1312 kg.
> - Amortization: Lifetime = 3 years, the standard service life (26280 hours).
>   - Hourly "Rent" = 1312 kg / 26280 hours ≈ 0.050 kg/h.
>   - Job Cost = 0.050 kg/h × 10 hours = 0.5 kg.
>
> **Systems insight**: For long-lived hardware in dirty grids, electricity dominates (24 kg vs. 0.5 kg). However, in clean grids (hydro, 0.020 kg/kWh), operational drops to 1.1 kg, making embodied carbon a significant fraction (~30.8 percent) of the total footprint.

The perspective's H100 job, like the lifecycle notebook later in this chapter, amortizes over the 3-year standard service life. Returning to the earlier A100 training run, the recap that follows keeps that setup's own assumption, a 4-year extended service life. The difference matters because a longer life spreads the same manufacturing carbon over more service, lowering the per-job share; the sensitivity analysis after the lifecycle notebook treats service life as one of the assumptions that can reverse a decision. For an accelerator with 150 kg embodied carbon (the A100 estimate cited earlier) and that 4-year data center lifetime, the first step is daily amortization: 150 kg / (4 years × 365 d/year) ≈ 0.103 kg/day.

The second step assigns that daily share to the job. A training run lasting 14 days on 64 accelerators carries 64 × 14 days × 0.103 kg ≈ 92.1 kg CO_2 of amortized embodied carbon.

Added to the 5,682.7 kg of operational emissions calculated earlier for the US average grid, the embodied contribution of 92.1 kg is approximately 1.6 percent of the run's total emissions. If training occurred in Quebec's low-carbon grid, where the same run produced 264.9 kg of operational emissions, the same embodied contribution would be about 25.8 percent of the total. The manufacturing term did not change; the cleaner grid shrank everything around it.

Lifecycle carbon accounting

The workload account groups operational emissions into training and inference, then adds embodied emissions. Equation 0.92 aggregates these contributions; completeness depends on the inventory assigned to each term. Development experiments and supporting services must enter that inventory rather than disappear when the account starts with the final training run:

$$CO_{2,\text{lifecycle}} = CO_{2,\text{training}} + CO_{2,\text{inference}} + CO_{2,\text{embodied}} \tag{0.92}$$

Each term has its own physical drivers (figure 0.221). The embodied term $CO_{2,\text{embodied}}$ is fixed before the hardware runs, at roughly 150 kg to 164 kg CO_2e per accelerator for the devices priced above. The training term $CO_{2,\text{training}}$ is a one-time cost set by cluster scale, PUE, and checkpoint I/O, while the inference term $CO_{2,\text{inference}}$ recurs for as long as request traffic and KV-cache residency keep serving replicas powered. Their relative proportions therefore shift over the deployment lifetime, as the worked account in notebook 15.6 and the serving crossover in section 22 show.

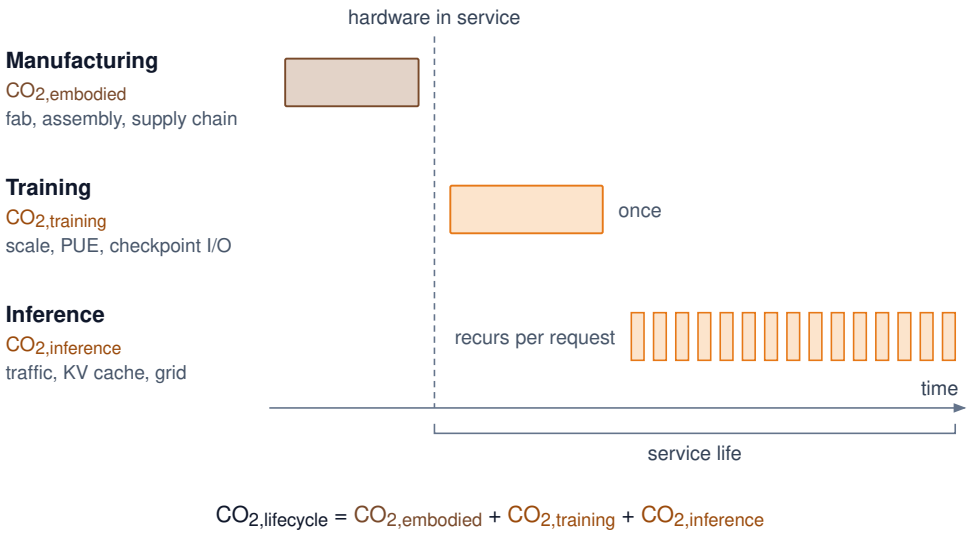


Figure 0.221: The Carbon Lifecycle of an ML System: Manufacturing contributes embodied carbon, while training and inference contribute operational carbon through energy, facility overhead, and grid intensity. Block widths show timing, not magnitude. The relative size of each term is workload-specific: serving volume, grid factor, and hardware lifetime determine which one dominates.

The equations become a decision tool once each factor is measured or declared. A worked account for a large training run shows how the operational and embodied terms combine, and which of them dominates.

> Napkin Math 15.6: Partial lifecycle carbon estimation
>
> **Problem**: Estimate facility operational emissions plus allocated accelerator-baseboard manufacturing emissions for training a 70B parameter model.

Variables: 2,048 H100 GPUs, 30 days, 700 W TDP, rack-profile support power, PUE 1.12, grid intensity 429 g CO_2/kWh.

Math: Accelerator power = 2,048 $\times$ 0.7 kW $\approx$ 1,433.6 kW. Applying the DGX H100 rack profile for host, memory, networking, and conversion support raises the IT load to 1,971.2 kW; facility power = 1,971.2 kW $\times$ 1.12 $\approx$ 2,207.7 kW. Energy = 2,207.7 kW $\times$ 24 h/day $\times$ 30 days $\approx$ 1,589,575.7 kWh. Emissions $\approx$ 681.9 t CO_2.

Embodied: Assume manufacturing footprint is $\approx$ 164 kg CO_2 per H100 GPU, allocating NVIDIA's HGX H100 baseboard product carbon footprint evenly across its eight GPUs (NVIDIA Corporation 2025). This worked account uses time-based allocation: it assigns the job the fraction of manufacturing emissions corresponding to its 1-month occupancy of a 3-year service life. Under that declared rule, (2,048 $\times$ 164 kg) $\times$ (1 month / 36 months) $\approx$ 9.3 t CO_2.

Result: 681.9 t + 9.3 t $\approx$ 691.3 t CO_2.

Systems insight: The operational term dominates this partial lifecycle account. It includes facility electricity and allocated HGX baseboard manufacturing, but omits manufacturing of host systems, networking, storage, and facility infrastructure, as well as other unmodeled lifecycle stages. A complete footprint must extend the inventory to those boundaries.

Time is one defensible allocation basis, not a universal one. Shared fleets may instead allocate embodied emissions by accelerator-hours, reserved capacity, or a workload's share of useful computation. The chosen denominator must be reported and applied consistently; otherwise a low-utilization job can appear artificially inexpensive merely because another tenant absorbs the idle capacity. These workload shares support engineering comparisons; they do not determine the reporting year or category in a corporate emissions inventory. Procurement decisions need the unallocated fleet total as well as the workload-attributed share, because amortization changes ownership of an emission in the ledger but does not remove it from the atmosphere.

Every lifecycle estimate should therefore carry an uncertainty interval rather than a single authoritative total. Average workload power, PUE, grid intensity, hardware lifetime, utilization, and manufacturing footprint are measured or modeled with different errors. A sensitivity analysis varies the assumptions that could reverse the decision, including clean-grid versus carbon-intensive operation, three- versus five-year service life, and low versus high serving volume. It then reports whether the preferred design remains preferred. Precision in arithmetic cannot compensate for an unstable system boundary.

The balance among these terms changes with serving volume and duration. A high-volume service can exceed its entire training footprint within months, or within days at higher traffic, a crossover that section 22 works through for a deployed model.

The account becomes an engineering tool when it runs on every job rather than once after the fact. Listing 0.24 implements a partial lifecycle carbon calculator that combines measured energy, the rack support multiplier, a declared facility PUE, an explicitly selected grid-intensity factor, and amortized embodied carbon. Its example reproduces the 64-A100 run, with each input drawn from the facility, grid, or hardware profile it describes; section 32 compares the sources of the grid factor.

Listing 0.24: Lifecycle Carbon Calculation: Computing total carbon footprint including operational and embodied emissions.

```python
from mlsysim import Hardware, Infrastructure, ReferenceStats, Systems


def calculate_carbon_footprint(
    gpu_power_watts: float,
    num_gpus: int,
    training_hours: float,
    it_power_multiplier: float,
    pue: float,
    grid_intensity_gco2_kwh: float,
    gpu_embodied_kg: float,
    gpu_lifetime_years: float,
) -> dict:
    """Estimate operational emissions plus allocated GPU manufacturing emissions."""

    # Operational emissions (plain floats: watts, hours, kWh, grams)
    gpu_energy_kwh = gpu_power_watts * num_gpus * training_hours / 1000
    it_energy_kwh = gpu_energy_kwh * it_power_multiplier  # + host, net
    facility_energy_kwh = it_energy_kwh * pue  # overhead, applied once
    operational_kg = (
        facility_energy_kwh * grid_intensity_gco2_kwh / 1000
    )

    # Embodied emissions (amortized by time over the service life)
    daily_embodied = gpu_embodied_kg / (gpu_lifetime_years * 365)
    training_days = training_hours / 24
    embodied_kg = num_gpus * training_days * daily_embodied

    return {
        "energy_kwh": facility_energy_kwh,
        "operational_carbon_kg": operational_kg,
        "embodied_carbon_kg": embodied_kg,
        "total_carbon_kg": operational_kg + embodied_kg,
        "embodied_fraction": embodied_kg
        / (operational_kg + embodied_kg),
    }


# Example: 7B model training on a 64-GPU A100 cluster for 14 days.
# Each input names its source: PUE is a facility property, the
# grid factor a property of the electricity supply.
_rack = Systems.Racks.DGX_H100_4Node  # proxy support-load profile
_facility = Infrastructure.FacilityCooling.BestAir  # PUE 1.12
_grid = Infrastructure.Grids.US_Avg  # annual-average factor
_run = ReferenceStats.MidScaleTrainingCarbonProfile
result = calculate_carbon_footprint(
    gpu_power_watts=Hardware.Cloud.A100.tdp.m_as("W"),  # 400 W
    num_gpus=Systems.Clusters.Lab_64_A100.total_accelerators,  # 64
    training_hours=_run.TrainingDays.m_as("h"),  # 336 h
    it_power_multiplier=(
        _rack.it_power / _rack.accelerator_power
    ).m_as(""),
    pue=_facility.pue,
    grid_intensity_gco2_kwh=_grid.carbon_intensity_g_kwh,
    gpu_embodied_kg=Hardware.Cloud.A100.embodied_carbon_kg,
    gpu_lifetime_years=(  # 4-year extended service life
        Infrastructure.Pricing.Capital
        .AcceleratorExtendedServiceLifeYears.rate
    ),
)
print(
    f"Total carbon footprint: {result['total_carbon_kg']:.0f} kg CO2"
)
print(f"Embodied fraction: {result['embodied_fraction']:.1%}")
```

Teams can integrate this partial carbon account directly into orchestration dashboards. Calculating operational and embodied emissions for individual training runs, however, captures only one dimension of fleet resource use. At campus scale, data centers introduce power-delivery and cooling constraints that individual run metrics leave invisible.

Data Center Energy and Resource Consumption

A training cluster can fit its accelerator power budget yet exceed its facility budget once support systems and cooling enter the account. Whether a facility can host the cluster at all is a feasibility question; the sustainability question is whether a change in power delivery or cooling reduces lifecycle cost while preserving that feasible operating envelope. The relevant comparison includes annual energy, local water use, equipment lifetime, and the energy wasted when cooling failures interrupt useful work.

Facility sustainability therefore has to be read as a chain of constraints rather than as a single PUE number. Persistent megawatt demand sets the grid and emissions exposure, power delivery determines how much electricity becomes useful IT load, cooling determines whether dense racks can operate without throttling, and water use determines whether a technically efficient site is locally sustainable. The physical mechanisms below matter here because each assigns losses or resource use to a different accounting boundary.

Data center energy and AI workloads

At facility scale, the optimization target is no longer a single model but the overhead and grid context surrounding every watt of IT power. The PUE and geographic calculations already showed why the same IT workload can impose different facility and carbon costs; here the relevant change is aggregate demand. The same IEA *Energy and AI* analysis behind the 2030 electricity projection cited at the chapter's opening also tracks emissions, a different quantity. It estimated emissions from data-center electricity use at about 180 Mt at the time of the analysis and projected roughly 300 Mt by 2035 in its Base Case, still below 1.5 percent of total energy-sector emissions.[18] The energy burden grows with data-center capacity, training workloads, and inference demand (Patterson et al. 2021), so component efficiency must be evaluated against fleet expansion (Thompson et al. 2021; Dodge et al. 2022).

Energy demands in data centers

The relevant facility quantity is persistent megawatt-class load, not the model name alone. Hyperscale campuses house large fleets of accelerator servers and hold loads of 100 MW or more for years at a time.[19] A newer accelerator lowers a job's energy only when that workload realizes the efficiency gain. Even then, lower energy per job need not reduce campus demand if the fleet uses the released capacity to perform more work.

Whether that demand keeps growing depends on the race between workload growth and efficiency. Masanet et al. (2020) show that efficiency gains held global data-center energy nearly flat through the 2010s even as computing output grew several-fold; sustained AI demand growth can erode that offset, which is why the IEA projection cited earlier rises rather than remaining flat.

Beyond computational demands, cooling can account for 30–40 percent of facility energy in the conventional air-cooled data-center designs surveyed by Ebrahimi et al. (2014). This is a design-regime range, not a constant for modern hyperscale or liquid-cooled facilities; section 21 derives the site-specific overhead through PUE and the cooling architecture.

The United States alone illustrates how cloud and AI infrastructure can reshape national energy planning. US data center electricity consumption roughly tripled from 58 TWh in 2014 to 176 TWh in 2023, reaching 4.4 percent of national supply, according to measurements and projections from Lawrence Berkeley National Laboratory (LBNL) (figure 0.222). For 2028, LBNL's scenarios range from 325 to 580 TWh; the high end would consume roughly 12 percent of all US electrical generation. These scenarios describe possible demand, not a measured capacity ceiling. They motivate evaluating efficiency gains alongside the generation, transmission, and connection capacity needed to serve that demand.

[18] **Data Center Emissions Scale**: IEA's 2025 *Energy and AI* analysis reports three distinct quantities. Data centers consumed roughly 1–2 percent of global electricity at the time of the analysis, a share projected to approach 3 percent by 2030, with AI contributing to demand growth. Emissions from data-center electricity use, about 180 Mt at that time, are projected at around 300 Mt by 2035 in the Base Case, below 1.5 percent of total energy-sector emissions. The largest hyperscale facilities can draw over 100 MW continuously, equivalent to powering tens of thousands of homes.

[19] **Hyperscale Data Center Footprint**: A hyperscale campus makes long-lived investments in substations and transmission connections. Algorithmic improvements can reduce demand but do not remove the costs already incurred for that capacity. Supply contracts and operating schedules remain adjustable, subject to their terms and the physical connection.

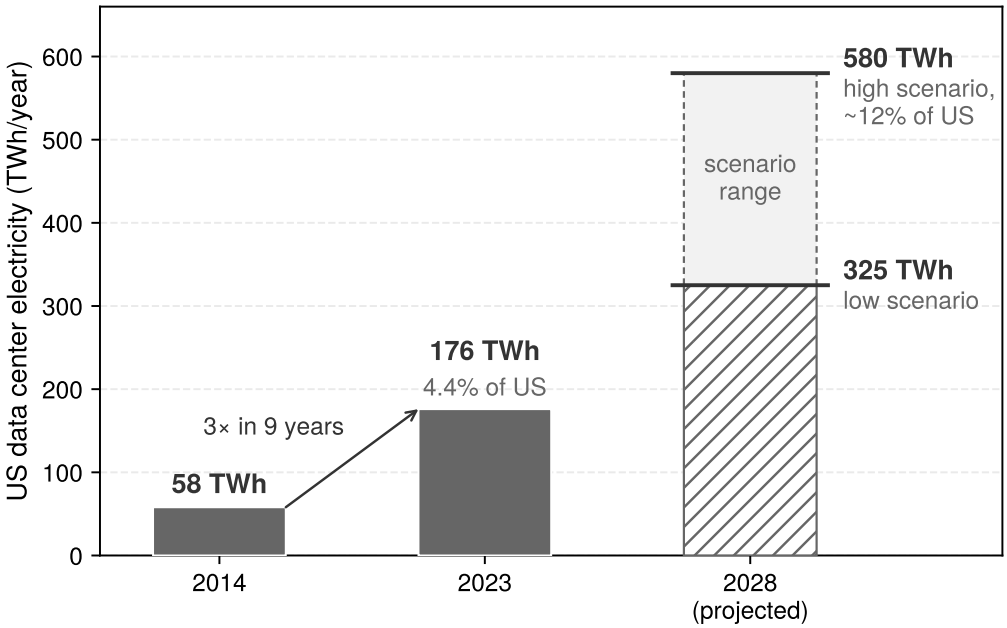


Figure 0.222: **The Energy Gap**: US data center electricity consumption tripled from 58 TWh (2014) to 176 TWh (2023). LBNL projects consumption of 325 to 580 TWh by 2028, with AI workloads treated as an important driver of growth. At the high end, data centers would consume approximately 12 percent of US electricity, motivating evaluation of the generation, transmission, and connection capacity needed to serve that projected demand.

Carbon benchmarks across AI workloads

The environmental impact of AI workloads has become a measurable concern, even though the IEA estimate cited earlier puts emissions from data-center electricity use at about 180 Mt, below 1.5 percent of total energy-sector emissions. Strubell et al. (2019) made this concern concrete by estimating that development-scale training and architecture search for a large NLP model could emit as much carbon as several passenger vehicles over their lifetimes. Patterson et al. (2021) later showed that the most widely quoted architecture-search estimate depended strongly on proxy-task, hardware, data-center efficiency, and grid carbon-intensity assumptions. Carbon benchmarks are therefore only as good as the boundary behind them. Two estimates of the same search can differ by orders of magnitude when one assumes older hardware, an average facility, and a fossil-heavy grid while the other measures the deployed configuration.[20]

The GPT-3 calculation in notebook 15.1 put one training run at hundreds of trans-Atlantic passenger round trips. Such run-level comparisons convey scale, but they do not by themselves describe the footprint of a deployed service.

The operational lesson is that carbon accounting must distinguish training from recurring inference over a declared observation period. In figure 0.223, the Meta recommendation workloads (RM-1 through RM-5) split operational emissions roughly evenly between training and inference, while inference dominates the language-model example. RM-1 totals approximately 0.85 million kg CO_2e in the plotted account. The public baselines, including GPT-3 and BERT-NAS, report training only; their bars do not establish a lifetime training-to-inference ratio. For high-traffic Archetype B deployments (section 11), both recurring serving and model updates belong in the account before deciding which phase offers the larger reduction.

Whichever phase dominates, every operational term in these accounts begins as electricity delivered to a rack and leaves as heat that must be removed from it. Delivering 120 kW to a single cabinet (the rated draw of one GB200 NVL72 rack) starts at the substation, and every conversion stage between the grid and the chip takes its share along the way.

[20] **Neural Architecture Search (NAS) Carbon Cost**: The ~284,000 kg CO_2e figure from Strubell et al. (2019) represents an unoptimized Evolved Transformer search that drops sharply when accounting for TPU hardware, grid mix, and proxy tasks (Patterson et al. 2021). The systems lesson is boundary discipline: search, tuning, and failed trials belong inside the carbon accounting boundary, but reusable architecture search should be amortized across all downstream deployments. Efficient NAS techniques (weight sharing, hardware-aware search) reduce this search budget, making meta-optimization a primary sustainability lever (Elsken et al. 2019).

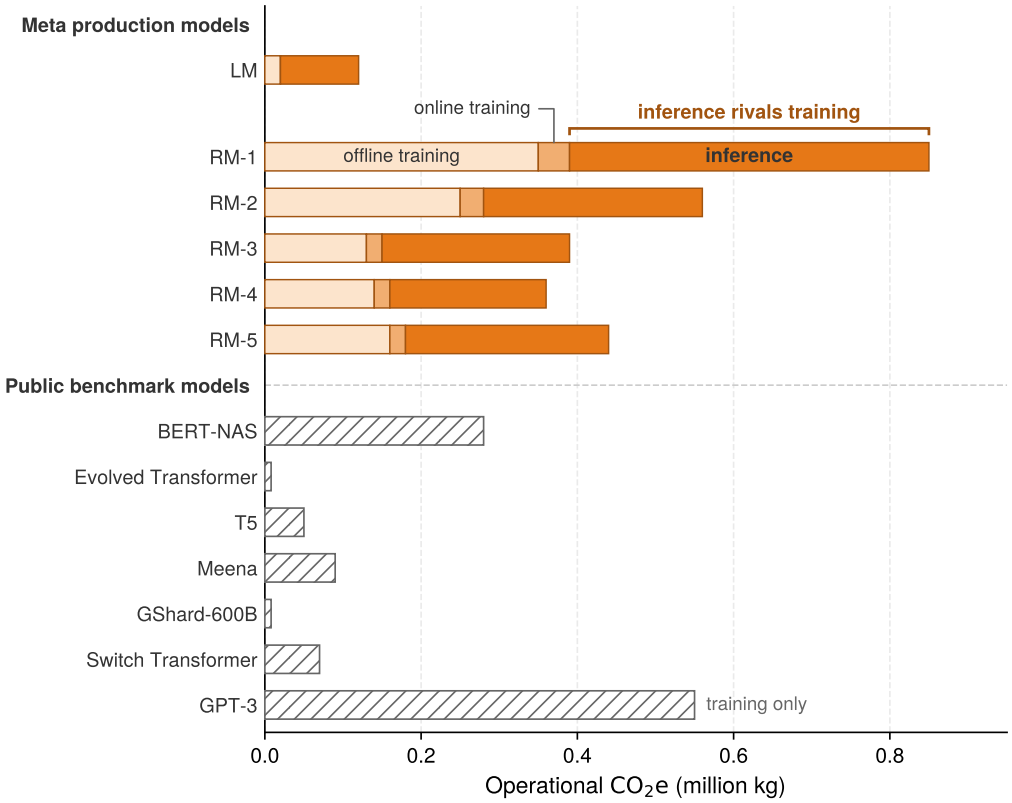



Figure 0.223: Operational Carbon Footprint of Large-Scale ML Tasks: Stacked bars show operational CO_2e over the reported accounting periods for Meta's recommendation models (RM-1 through RM-5), a language model (LM), and several open-source large models (BERT-NAS, Evolved Transformer, T5, Meena, GShard-600B, Switch Transformer, GPT-3). The recommendation-model bars divide roughly evenly between training (light and mid orange) and inference (solid orange), while the public open-source baselines report training-only footprints (hatched gray outline), underscoring that inference serving at scale can rival or exceed training emissions for deployed systems. Source: (Wu et al. 2022).

Power delivery

Section 8 traced the electrical path from the grid to the voltage regulator and introduced the PUE ratio (equation 0.7); this section asks where along that path energy and reliability margin are lost, and which of those losses a sustainability account must carry. Capacity planning fails when engineers budget only accelerator TDP. The first constraint sits outside the building. Large grid-supplied ML facilities need sufficient substation and utility-interconnection capacity. Internal distribution improvements cannot raise that import limit; on-site generation or storage adds a separate supply whose capacity, duration, and reliability must enter the design.

Systems Perspective 15.2: The interconnection queue

Deploying 10,000 GPUs and deploying the electrical substation required to power their IT load (9.6 MW, after the 7 MW GPU subtotal is expanded for rack support power) operate on different timelines. In this planning comparison, GPU procurement takes 6 months, while permitting, engineering, procurement, construction, and grid connection for a new 10+ MW substation take 24 months. The infrastructure path is therefore 4× longer than the accelerator path. Actual schedules depend on the site, utility, equipment availability, and approvals, so the ratio illustrates a dependency rather than a universal lead time.



Substation lead time can run 4× longer than GPU procurement.

Systems insight: In this comparison, power delivery determines when the fleet can begin useful work even if the accelerators arrive on schedule. The US generation-and-storage interconnection queue is distinct from a data center's load-connection request; neither queue total directly measures available capacity for a new ML facility. Procurement must therefore follow a site-specific power-delivery schedule. Otherwise, delivered silicon can remain "electrically stranded" while the facility waits for its connection or transformer.

Inside the facility, every conversion stage turns part of the delivered power into heat. Using typical stage efficiencies, utility-to-medium-voltage transformation loses 1–2 percent; an online double-conversion uninterruptible power supply (UPS) loses 3–5 percent, while an eco-mode design that bypasses double conversion during normal operation loses 1–2 percent; the power distribution unit (PDU) loses 2–3 percent; and voltage regulation on the baseboard loses another 5–8 percent. Compounding these stage losses, roughly 9–17 percent of the power drawn from the grid is dissipated as heat before it reaches a transistor, depending mainly on the UPS mode and the voltage regulators, and the server power supplies add their own conversion loss on top, bringing the end-to-end path close to the roughly 80 percent efficiency traced in section 8. The accounting boundary decides where each loss appears. Losses upstream of the IT boundary, such as the transformer, UPS, and facility distribution, raise PUE; server power supplies and baseboard voltage regulators sit inside the measured IT load, and their heat must be removed by the same cooling system that serves the accelerators. Higher-voltage distribution is one of the few design changes that shrinks this overhead directly. Delivering the 5,600 W of one eight-GPU H100 baseboard requires approximately 467 A at 12 V but 117 A at **48 V DC**; at equal conductor resistance the fourfold reduction in current cuts I^2R distribution losses sixteenfold, although the realized saving depends on conductor design and the added conversion stages.

At ML rack power densities, the difference between 95 percent and 98 percent distribution efficiency is meaningful. Using 33 kW as a reference rack load, a first-order estimate applies the difference between those efficiencies as 3 percent of that load, yielding approximately 0.99 kW per rack. Across 300 racks, the estimated reduction is 297 kW, equivalent to roughly 36 GPU nodes or 9 four-node racks under this power mix. Sustaining that reduction over a 3-year lifecycle at $0.07/kWh gives estimated electricity savings of ~$546,361. An exact fixed-load comparison divides delivered power by each efficiency before subtracting input powers. The released capacity can support more work or lower consumption; spending it on additional nodes does not preserve the same electricity saving.

To make this concrete, consider the power budget for a single rack containing four DGX H100 nodes:

Table 0.215 itemizes a rack-attributed power budget rather than only GPU TDP. In this scenario, host, fabric, and equipment-side conversion losses belong to the IT load and sum to the IT subtotal; the row below it is an illustrative non-IT allocation at the stated PUE. A facility calculation multiplies the IT subtotal by its own PUE rather than reusing that allocation, and facility-side conversion losses are covered by PUE and must not be added again.

Table 0.215: Power Budget for a Four-Node DGX H100 Rack: GPUs consume two thirds of this illustrative rack-attributed total. Host systems, networking, and equipment-side conversion losses form the remaining IT load; the final overhead row represents the scenario's non-IT allocation. The conversion row excludes facility-side losses, which belong in PUE. Applying a different facility PUE requires replacing the non-IT allocation, not multiplying the full table total.

Component	Power (kW)	% of Rack Total
GPU compute	22.4 kW	67%
Host CPUs and DRAM	3.2 kW	10%
NVSwitch fabric	1.6 kW	5%
InfiniBand HCAs	0.8 kW	2%
IT-equipment conversion losses	2.8 kW	8%
IT subtotal	**30.8 kW**	
Allocated non-IT overhead (PUE ~1.09)	2.7 kW	8%

Component	Power (kW)	% of Rack Total
Total	**33.5 kW**	**100%**

Evaluating DGX H100 power allocation (table 0.215) reveals that 32 GPUs at 700 W each deliver 22.4 kW, but host, fabric, and conversion losses raise the IT subtotal to 30.8 kW, about 38 percent above the GPU subtotal. That IT subtotal is the load to multiply by a facility's PUE; the table's final row is one such allocation, which brings the rack-attributed total to about 50 percent above the GPU subtotal. Infrastructure planners who size their facility based on GPU TDP alone will underestimate the electrical load and may discover during commissioning that their power capacity is insufficient.

Synchronized training also changes the shape of the load. The correlated power swings introduced with grid dynamics (section 7) now appear inside the delivery chain, where coordinated computation and communication phases align across thousands of accelerators; section 11 analyzes how local decoupling, voltage regulators, and UPS controls filter these **synchronous transients** before they reach the utility connection.

For an illustrative device-side calculation, assume 1,024 GPUs change together from 400 W to 700 W each over 100 µs. The assumed aggregate step is 307 kW, giving a ramp rate of 3.07 GW/s. This is a load-side scenario, not a measured utility input. Its sustainability consequence appears at the interconnection. Rack- or facility-level energy buffering (section 7), sized to the measured energy deficit rather than to a fixed allowance per rack, lets the grid see a smoother load, and a well-characterized, controllable load is easier both to connect and to schedule against grid conditions.

Checkpoint 15.3: Power delivery physics

Verify the data center power path:

- ☐ **Load correlation**: explain why synchronous ML training produces more correlated load changes at the facility connection than independent web traffic.
- ☐ **Loss accounting**: identify which conversion losses in the delivery chain raise PUE and which remain inside the measured IT load.
- ☐ **Power budgeting**: use table 0.215 to explain why a node with 8 GPUs at 700 W each must be budgeted well above its 5.6 kW GPU subtotal.
- ☐ **AC-DC conversion**: identify the conversion-stage efficiencies, distribution losses, load profile, and reliability requirements needed to compare rack-level and server-level conversion at the same delivered IT load.

At the largest scales, the data center's power draw represents a significant fraction of the local electrical grid's capacity. A 100,000-GPU cluster, roughly a hundred times the book's 1,024-GPU reference cluster, at 700 W per GPU has a 70 MW accelerator subtotal, but rack-profile support power raises the IT load to 96.2 MW before PUE. With PUE, the total facility draw approaches 107.8 MW, the load of a small city. Such installations require dedicated feeds from the electrical grid, often with purpose-built substations and transmission lines. The substation lead time of 24 months in the interconnection-queue perspective above makes power availability one of the longest-lead-time constraints in building ML infrastructure.

At large-cluster scale, the same delivery limit becomes a grid-procurement problem rather than an electricity bill. Later large systems often lack energy disclosures comparable to the chapter's opening anchor, which is precisely why the measurement contract requires workload telemetry instead of relying on published model documentation alone.

This grid-procurement problem worsens when model and data growth multiply each other. Compute-optimal allocation (section 6) scales parameters and tokens together, and at fixed training tokens per parameter, doubling the model parameters also doubles the token count, so training work grows by approximately $4\times$; energy does so only at unchanged realized efficiency. More generally, under the same dense-training cost model, computational work grows approximately with the product of parameter count and training-token count. A model with $10\times$ the parameters,

trained on 10× the data, therefore requires approximately 100× the training work; energy grows by that factor only if realized FLOPs per joule remain unchanged.

The electricity consumed by a single large-model training campaign can become nonnegligible relative to the output of a power plant. A 100 MW training facility operating at full capacity for one year consumes 876 GWh, which a 100 MW wind farm cannot match (at 30 percent capacity factor, a wind farm produces about 262.8 GWh per year, so the training facility would require the equivalent of approximately 3.3 large wind farms).


Power availability and power source are connected infrastructure decisions, but annual energy matching does not establish continuous supply. Organizations training large models may locate near renewable sources or purchase renewable energy certificates (RECs) to claim the attributes of renewable generation. A certificate does not physically deliver electricity or remove the facility's demand from the grid; the design must still provide power when and where the workload runs.

Procurement can also support additional low-carbon supply. Microsoft's 2024 agreement with Constellation supported a planned nuclear-reactor restart, while Google's geothermal partnership with Fervo began supplying the Nevada grid in 2023. These examples address the need for generation beyond variable wind and solar output. They do not make one generation technology mandatory; the engineering requirement is a supply portfolio that meets the facility's demand across time, with transmission, storage, and workload flexibility accounted for.

Once power is available, its carbon intensity determines the emissions attributed to each megawatt-hour under the chosen accounting method. The placement comparison in notebook 15.2 already showed how far that factor can move one run's emissions; at facility scale the same lever becomes a siting decision that persists for the life of the building. Low-carbon electricity can coincide with favorable prices, but neither follows from the other. A siting comparison must evaluate the delivered tariff and emissions factor separately, alongside power availability and the workload's location constraints.

Cooling

Section 8 established the thermal envelope of dense racks; the sustainability question is how much energy and water removing that heat costs, and how the choice between air and liquid cooling changes both once rack densities push beyond what traditional air conditioning can extract. Nearly all electrical energy consumed by a GPU eventually becomes heat through switching, leakage, and resistive losses. During a transient, some energy raises the temperature of the chip and surrounding materials. In steady operation, that stored thermal energy stops increasing, so cooling must remove heat at approximately the rate of electrical consumption. The IT electrical load inside the rack, represented by 30.8 kW, therefore sets the steady heat-removal requirement. Allocated non-IT facility overhead produces additional heat outside this rack boundary. When heat removal falls behind generation, temperatures rise; the available thermal margin determines how long the system can tolerate the imbalance before throttling reduces clock speeds and throughput. Sustained overheating can damage the hardware.



When cooling falls behind, temperature climbs through the thermal margin until throttling caps it.

Air cooling, the dominant technology for decades, works by blowing room-temperature air across heat sinks attached to the chips. The air absorbs heat at a rate determined by its specific heat capacity, roughly 1.0 kJ/kg/K. The heated air is exhausted from the rear of the rack, typically 15–20 degrees Celsius warmer than the inlet, and directed to a computer room air conditioning (CRAC) unit that cools it before recirculating.

The fundamental problem is that air is a poor thermal conductor. Its thermal conductivity is only 0.026 W/m/K, compared to 0.6 W/m/K for water and 400 W/m/K for copper. Removing a large heat load with air requires substantial volumetric flow. Fan power depends on that flow, pressure drop, and fan efficiency; rack power alone does not specify a fixed cooling fraction.

The physics can be made precise with a simple calculation. The heat removal capacity of a fluid flow is:

$$P_{\text{thermal}} = \dot{m} \times c_p \times \Delta T$$

where P_{thermal} is the heat removed (watts), $\dot{m}$ is the mass flow rate (kg/s), c_p is the specific heat capacity (J/kg/K), and ΔT is the temperature difference between outlet and inlet. For air with c_p of 1,005 J/kg/K and a typical ΔT of 15 K (inlet at 20 degrees C, outlet at 35 degrees C), removing

100 kW requires a mass flow rate of $100{,}000 \div (1{,}005 \times 15) \approx 6.6$ kg/s. At sea-level air density of 1.2 kg/m^3, this corresponds to a volumetric flow rate of 5.5 m^3/s, or approximately 11,713 CFM (cubic feet per minute). Moving this much air through the confined space of a server rack requires powerful fans that themselves consume substantial power.

At higher power densities, the airflow and pressure required to cool a rack raise fan energy and can make air cooling impractical before the IT load itself reaches a power limit. The exact crossover depends on rack geometry, inlet temperature, pressure drop, and fan-control policy rather than on one universal rack-power threshold. PUE (equation 0.81) captures facility fans, chillers, and facility-side conversion losses as overhead on top of the IT load. Server fans lie within the IT load itself, so their energy remains in the denominator as well as the facility total. Cooling choices must therefore be compared using total facility energy for the same useful work, not PUE alone.

Water has a specific heat capacity of 4.18 kJ/kg/K, over four times that of air, and a thermal conductivity roughly 23× higher. Its much greater density also lets a small fluid volume carry substantial heat. To appreciate the magnitude of the difference, consider how much fluid must flow to remove 700 W from a single GPU. Air at a 15-degree temperature rise requires tens of liters per second of airflow (a small wind tunnel). Water at the same temperature rise requires only about 0.01 liters per second (a thin stream). This thousands-fold difference in volumetric flow permits compact liquid paths, but it does not determine pumping energy. Pressure drop through cold plates, pipes, and fittings, together with pump efficiency, determines the power needed to sustain that flow.

Direct-to-chip liquid cooling routes coolant through cold plates mounted on GPU packages. The cold plate contacts the heat spreader through thermal interface material; the resulting thermal resistance depends on the package, interface, plate design, and flow. The coolant carries heat through manifolds and pipes to a coolant distribution unit (CDU) at the rack or row level. The permissible supply temperature depends on the equipment, so liquid cooling need not require chilled water.

In a two-loop design, the CDU transfers heat from the chip-level coolant to the facility water loop, which carries it toward cooling towers or dry coolers. Isolation lets each loop maintain its required fluid chemistry and pressure. The chip-level coolant must satisfy the equipment's compatibility and cleanliness requirements to control deposits, corrosion, and blockage; purity alone does not establish suitability.

Liquid cooling can reduce server airflow requirements, although memory modules (DIMMs), voltage regulator modules (VRMs), and other components without cold plates may still need fans. If facility cooling consumes 3–8 percent of IT power, that contribution alone adds 0.03–0.08 to PUE; facility-side electrical losses and other non-IT loads must also be included. Reducing server-fan power changes the IT load instead, so it does not translate directly into the same PUE reduction. Lower fan demand can also reduce noise, subject to the remaining fans, pumps, and heat-rejection equipment.

A more aggressive approach, immersion cooling, submerges entire server boards in a tank of nonconductive dielectric fluid. The fluid absorbs heat from wetted surfaces, replacing server airflow; high-heat-flux components may still need heat sinks or directed flow. Fluid contact shortens some heat-transfer paths, but flow, local heat flux, material compatibility, and heat-exchanger capacity still determine component temperatures.

Single-phase immersion cooling uses a fluid that remains liquid throughout the process, with heat carried away by convection currents in the tank. The heated fluid rises to the surface, is pumped through a heat exchanger to reject the heat to the building's chilled water loop, and returns to the bottom of the tank.

Two-phase immersion cooling takes this further: fluid boils at heated surfaces, carries latent heat to a condenser, and returns as liquid. Heat removal depends on the fluid, pressure, condenser capacity, and operating conditions. The complete facility still consumes energy for heat rejection and electrical distribution; the cooling mechanism alone does not specify its PUE.

The trade-off is serviceability. Accessing a failed component requires handling fluid-wetted hardware, and the dielectric fluids themselves are expensive ($20–$50 per liter). A single immersion tank holding four server boards may contain 500–1,000 liters of fluid, representing $10,000–$50,000 in coolant cost alone. The operational procedures for immersion-cooled facilities differ sharply from air-cooled ones, requiring specialized training for technicians and different approaches to cable management, since all wetted materials must be compatible with prolonged fluid exposure.

Depending on the fluid and its additives, metals can corrode, while polymer insulation and seals can swell or degrade. Qualifying compatible materials adds engineering work and can constrain component choices. Table 0.216 compares the air and liquid regimes in which these serviceability costs enter the design decision.

Table 0.216: Cooling Architecture Trade-Offs: Feasible rack density follows from the particular equipment and facility design. The example design points differ by 10× in rack power, yet there is no universal rack-power threshold or PUE that separates air and liquid cooling. Compare qualified operating envelopes and total facility energy.

Design Question	Air Cooling	Direct-to-Chip Liquid Cooling
Heat path	Chip to heat sink to moving air	Chip to cold plate to coolant loop
Binding limits	Airflow, pressure drop, inlet temperature, and allowable component temperature	Cold-plate resistance, flow, coolant temperature, and heat-rejection capacity
Parasitic loads	Server and facility fans; conditioning where required	Pumps, CDU, heat rejection, and any residual air cooling
Service constraints	Air containment, filters, and access paths	Fluid compatibility, leak management, and maintainable connections
Facility metric	Measure complete IT and non-IT energy	Measure the same boundary; liquid cooling does not determine PUE by itself
Example design point	Enterprise rack near 12 kW; best air-cooled facility profile PUE 1.12	GB200 NVL72 rack at 120 kW; liquid-cooled facility profile PUE 1.06

The parallel heat-transfer conduits diagrammed in figure 0.224 trace why direct-to-chip liquid cooling supports higher heat flux than forced air: cold plates route chip heat directly into circulating fluid with high volumetric heat capacity before reaching facility heat rejection, whereas air systems rely on convective dissipation across finned heat sinks. Ambient wet-bulb temperature (the lowest temperature that evaporation can bring outdoor air to, which bounds evaporative heat rejection) and rack power density determine whether an air, liquid, or hybrid loop satisfies the chip junction temperature envelope.

Pairing these dissipation paths with the engineering trade-offs in table 0.216 separates thermodynamic feasibility from lifecycle economics. First establish that the proposed cooling medium maintains die temperatures and component serviceability under peak workload. Then compare installed capital expenditure, pumping and fan parasitics, water consumption, maintenance overhead, and equipment lifespan under the same computational load. A higher-density liquid-cooled installation may reduce operational energy, but its capital payback period cannot be inferred from rack power alone.

Napkin Math 15.7: The cooling tax

Consider a 1,024-GPU cluster of H100s at 700 W each. To isolate the PUE multiplier, this simplified calculation treats accelerator power as the entire IT load and assigns all non-IT overhead to cooling. It therefore understates facility power by omitting host, memory, network, and storage support; a procurement estimate must restore those terms before applying PUE.

- IT power: 1,024 × 700 W = 716.8 kW
- Air cooling (PUE 1.55): Total facility power = 716.8 kW × 1.55 = 1,111.0 kW. Cooling overhead = 394.2 kW.
- Liquid cooling (PUE 1.08): Total facility power = 716.8 kW × 1.08 = 774.1 kW. Cooling overhead = 57.3 kW.

Savings: Liquid cooling saves 336.9 kW of continuous power. At $0.07/kWh, the annual savings are approximately $206,585. Over a 3-year hardware lifecycle, the cooling savings alone

total $619,754, which is the figure to set against the installed capital cost of the liquid-cooling system when computing its payback period.

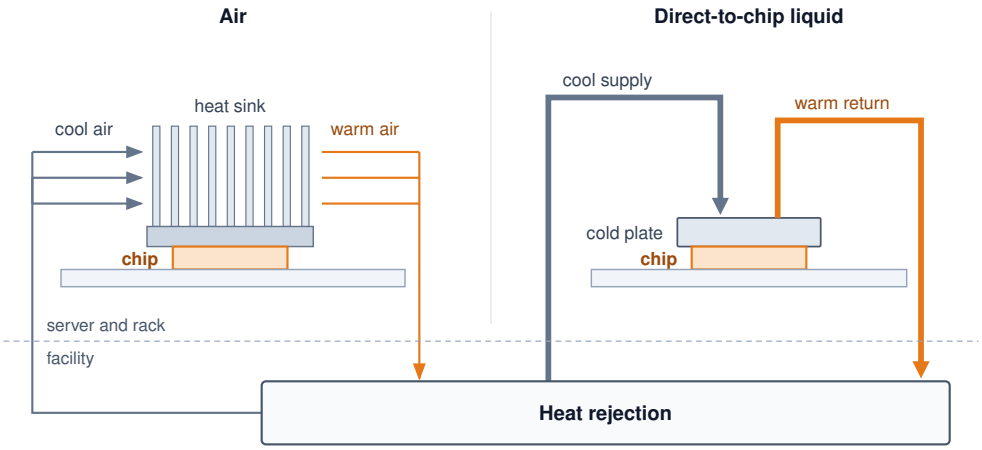


Figure 0.224: Air and Liquid Heat Paths: Air transfers chip heat through a heat sink and moving air; direct-to-chip liquid cooling transfers it through a cold plate and coolant. Both require heat rejection. Capacity, parasitic energy, and water use depend on the engineered system rather than the cooling medium alone.

The final link in the cooling chain is **heat rejection**: getting heat from the facility water loop to the outside environment. A cooling tower sprays warm water over a fill medium, packing that spreads the water into thin films to enlarge its contact with the air, and uses evaporation to carry heat into the atmosphere. Evaporating a kilogram of water removes its latent heat of vaporization, 2,260 kJ/kg. Sensible heating instead depends on both the specific heat capacity, 4.18 kJ/kg/K, and the permitted temperature rise. Evaporation can therefore carry substantial heat with a small mass flow, but the evaporated water must be replaced.

A 10 MW data center with evaporative cooling towers can consume well over 100 million liters of water per year, depending on climate and cooling design, which has become a significant concern in water-stressed regions. At the evaporative WUE of 1.8 L/kWh used earlier, continuous operation consumes about 158 million liters per year, roughly 350–415 household-years of water use under the earlier annual household baseline. As ML data centers grow to 100 MW and beyond, their water footprint becomes a meaningful factor in local resource planning.

Dry coolers use fans to blow air over a radiator without evaporating cooling water. They avoid that direct water consumption, although electricity generation can still carry an upstream water burden. Heat rejection depends on the temperature difference between coolant and ambient air, so hot weather can reduce capacity or require more fan power. Hybrid designs use dry cooling when conditions permit and evaporative assistance when needed, trading water consumption against electrical demand and thermal margin.

Waste heat reuse treats thermal output as a resource. It is the district-heating and industrial coupling introduced in section 7, evaluated now at the temperatures a liquid loop delivers. A liquid-cooling loop returning water at 50–65 degrees Celsius supplies low-grade heat that may serve nearby district heating, greenhouses, or other suitable sinks. Usability depends on the required supply temperature, seasonal demand, and transport losses; a heat pump may be needed. If an illustrative 10 MW thermal stream has an 80–90 percent recovery fraction, 8–9 MW is recovered before accounting for heat-pump electricity. Heat-pump output includes that electrical input and must be accounted for separately. Crediting useful heat does not reduce PUE below 1.0. Exported heat is instead reported through energy reuse effectiveness (ERE), which subtracts the reused energy from total facility energy before dividing by IT energy, or through a separate net-energy balance.

The viability of waste heat reuse depends on the proximity of heat consumers. Urban data centers, despite their higher land and electricity costs, are often better positioned for waste heat reuse than remote facilities because they are close to residential and commercial heating loads. The result is a counterintuitive economic optimization: a data center in a Nordic city may have higher electricity costs but lower net operating costs after waste heat revenues, compared to a remote facility with cheaper electricity but no heat consumers nearby.

For a dense training fleet, cooling is a configuration constraint. The aggregate accelerator TDP sets only part of the heat load; hosts, memory, networking, and conversion losses add to it. Rack layout and cooling capacity determine whether the intended configuration can sustain its workload or must reduce density or power. Liquid cooling is one way to expand that envelope, with its own serviceability and lifecycle costs.


Cooling system reliability

Cooling failures threaten both hardware and useful fleet work. When coolant flow stops, a dense rack loses heat-removal capacity and must throttle or shut down before thermal runaway. N+1 redundancy in CDUs, temperature monitoring, and automatic load shedding limit the affected capacity. An emergency air path can support reduced-power operation where the facility design provides one.

Serviceability also changes the failure budget. Leaks can damage equipment and drain cooling capacity, while quick-disconnect fittings allow node replacement without draining the entire loop. Their seals and coolant compatibility therefore belong in the maintenance plan. The fleet-level consequence depends on how much synchronized work shares the failed cooling domain.

The economics of cooling reliability shift when moving from independent inference servers to tightly coupled training clusters. In a distributed training run using synchronous parallelism, a cooling-loop failure that idles a pod-scale slice can halt the entire job. Consider a cooling failure that triggers a thermal shutdown of a 256-GPU pod within a 10,000-GPU cluster, about ten times the 1,024-GPU reference cluster. The example counts lost compute capacity, excluding repair and replacement costs. If the repair time for a CDU pump is 4 hours, the immediate loss of 256 GPUs at $4 per GPU-hour is $4,096. Assuming the job cannot continue elastically and the remaining 9,744 GPUs remain unavailable for other work, the synchronous blast radius inflates the cost to $160,000 in lost compute time. Adding checkpoint retrieval and rollback of 30 to 60 minutes of lost computation brings the illustrative lost-compute total to $180,000–$200,000 before any additional recovery delay. Those capacity costs are dollars, not joules. The energy account starts from the work later discarded. Rerunning the 30 to 60 minutes since the last checkpoint on all 10,000 accelerators at rated power repeats about 3.5–7 MWh of accelerator energy, before host and facility overhead. Power drawn by idle accelerators during the outage and the restart work add to that total, and both must be read from the actual shutdown or idle states rather than assumed. Compare expected outage losses and recovery behavior against the cost of N+1 cooling redundancy rather than treating redundancy as an unconditional requirement.

Coolant condition is another reliability input. **Deionized water** and compatible inhibitors control **galvanic corrosion**, the damage caused by electrochemical differences between metals in the loop. **Biofilm** on heat-transfer surfaces impedes cooling and increases pumping demand. Maintenance must preserve coolant chemistry and heat-transfer performance; the sustainability account includes both that overhead and the useful work lost when cooling fails.



One cooling failure can idle the whole training job.

Training vs. Inference Energy Analysis

Cooling infrastructure manages the intense thermal load of the cluster, but the total magnitude of that load depends on whether the fleet is executing a concentrated training run or a globally distributed inference workload. Training a large language model is a concentrated, highly visible energy event that consumes thousands of megawatt-hours over weeks or months. Serving the same model to a billion daily queries is the opposite shape of load: energy spent continuously, query by query, year after year. Understanding where the majority of the energy budget goes dictates where optimization efforts must concentrate.

Training and inference share opportunities to reduce computation, data movement, and idle power, but their success criteria differ. Training must reach the target model quality within its

completion budget; inference must serve the required demand at the agreed quality and latency. The lifecycle energy account identifies which phase contributes most, while those constraints determine which interventions can reduce its cost without sacrificing useful work.

Training energy demands

Training large AI models can require computational infrastructure with hundreds of thousands of cores and specialized AI accelerators operating continuously for months. Microsoft's 2020 disclosure of the OpenAI dedicated supercomputer, built specifically for large-scale AI training at the time, reported 285,000 CPU cores, 10,000 GPUs, and network bandwidth exceeding 400 gigabits per second per server (Langston 2020). This 2020 figure remains useful as a calibrated reference point rather than a claim about the largest infrastructure available in later generations.

The intensive computational loads generate heat that cooling infrastructure must continuously remove, the overhead quantified for the cooling treatment in section 21. Reducing it requires co-optimization of hardware architecture, parallelism strategy, and algorithmic efficiency.

Three training accounts have appeared so far, at very different scales: the GPT-3 run at 1,287 MWh, the 7B model on 64 A100s at 13,246.5 kWh of facility energy (5.7 t on the US-average grid), and the 70B model of notebook 15.6 at 681.9 t of operational emissions. Each is a single final run. Development multiplies each one, because a sweep of k candidates at a fraction f of full scale adds kf final-run equivalents (5× for the sweep in section 15), and retraining during service repeats part of that cost. Training energy is therefore paid once per completed run but recurs across the model's development and update cycle, and each run also affects facility sizing and checkpoint storage.

Distributed systems energy optimization

Distributing a training job across accelerators introduces coordination costs alongside the energy spent on computation. Distributed parallelism strategies exchange gradients, parameters, or activations while synchronization stalls leave idle accelerators drawing baseline power.[21] The resulting energy share cannot be inferred from cluster size alone because topology, collective algorithm, message volume, overlap, and utilization determine the account. Some all-to-all patterns also increase traffic faster than aggregate useful work as the participating set grows.

The Fleet Law (equation 0.3) turns this overhead into an energy account. If the fleet draws average power P_{avg} while executing one step on N accelerators, the energy of that step is approximately

$$E_{\text{step}} \approx P_{\text{avg}} \times T_{\text{step}}(N) = P_{\text{avg}} \left(\frac{T_{\text{compute}}}{N} + T_{\text{comm}}(N) + T_{\text{sync}}(N) - T_{\text{overlap}} \right) \tag{0.93}$$

The compute term accounts for local mathematical work; communication and synchronization make the distributed update possible. When these costs remain exposed, they extend the step while accelerators, hosts, and the fabric continue drawing power, adding powered time on the communication and coordination axes of C^3. Their energy share depends on power during those intervals as well as on their duration. A quarter of the step spent in unhidden communication accounts for a quarter of its energy only if average fleet power during that interval equals the average over the whole step; accelerators stalled at a collective can draw less than at full arithmetic load, so the share must be read from a power trace. Overlap, smaller messages, and fewer stragglers shorten the step, and they save energy to the extent that the shorter powered interval is not offset by higher average power or by extra work to reach the same model quality. The parallelism choices of chapter 15 are therefore sustainability choices as well.

Beyond the communication term, coordinated resource management offers four levers with distinct effects on energy and emissions. Dynamic workload placement consolidates compatible jobs so genuinely unused hardware can enter lower-power sleep states, with true savings verified at the facility meter rather than inferred from idle node counts. Carbon-aware scheduling (section 15) can reduce emissions even when energy use is unchanged, subject to data-movement overhead, completion deadlines, and reliability bounds. Multi-tenant sharing raises accelerator compute and memory occupancy across concurrent tasks, but contention can lengthen execution and increase energy per completed job. Adaptive inference batching groups compatible requests to improve throughput within their latency limits; changing training batch size instead requires checking the


21 **Parallelism Energy Overhead**: Data, model, and pipeline parallelism impose distinct communication and idle-power costs. Data parallelism reduces gradients, tensor parallelism exchanges partial activations, and pipeline parallelism introduces bubbles. A valid comparison reaches the same model-quality target under the same completion constraint, then measures each strategy's runtime and system energy, including communication and waiting. Fixing time-to-train by assumption would hide one of the effects the comparison needs to expose.

↩ Parallelism strategy selection and the communication cost of each strategy are established in section 4.

work needed to reach the target model quality. Each lever must therefore be evaluated against completed useful work and its service constraints, rather than occupancy alone.

All of these training costs stop accruing when the run stops. For high-volume services, the larger term is often the deployment that follows, as the crossover calculation in section 22 shows.

Inference energy costs



Cumulative inference emissions overtake the one-time training cost.

Inference workloads execute every time an AI model responds to queries, classifies images, or makes predictions. Unlike training, inference scales dynamically and continuously across applications such as search engines, recommendation systems, and generative AI models. Although each inference request consumes far less energy than a training run, the cumulative energy of a high-volume deployed service can rival or exceed its training energy (Wu et al. 2022).

A worked example makes the crossover concrete. Consider a model serving 10 million queries per day at 0.001 kWh of attributed facility electricity per query, including its share of idle capacity and support systems. At this serving rate, daily energy consumption reaches 10,000 kWh (10 million queries $\times$ 0.001 kWh), which accumulates to 3,650,000 kWh over a year of continuous service. Evaluated against the average US grid carbon intensity of 0.429 kg/kWh, this electricity demand produces 1,565.9 t (1,565,850 kg) of greenhouse gas emissions annually.

Compared with the earlier 7B/64-A100 training example (5.7 t), the smallest of the three training accounts and therefore the fastest to overtake, cumulative inference emissions exceed training emissions after approximately 1.3 days of deployment at this scale. The serving scenario and the training run describe different models, so the comparison does not trace one model's lifecycle; it shows how quickly this serving volume would overtake a training run of that size. For larger training runs, the crossover can shift to weeks or months depending on query volume, per-query energy, and grid intensity. The lifecycle perspective therefore sets the priority: optimize inference efficiency for widely deployed models, and focus training efficiency efforts on models that undergo frequent retraining or experimental iteration.

Production measurements in figure 0.223 show why this crossover must remain workload-specific. Inference dominates the language-model account, while training and inference contribute roughly equally for the recommendation models. Training FLOPs alone omit serving costs, but the larger phase must be established from the service's measured workload and observation period.

Inference workloads, like other software services, scale with demand. An always-available service consumes energy both while processing requests and while maintaining capacity for expected latency and availability. The sustainability account must include query volume, workload mix, and idle provisioned resources.

Checkpoint 15.4: The training-inference flip

Consider a vision model where training requires 2,000 GPU-hours at an average accelerator power draw of 300 W. Once deployed, the model serves 1 million requests per day for 730 days, with each request occupying an accelerator for 50 ms at an average draw of 100 W. Assume requests do not overlap on an accelerator. This active-only account excludes idle capacity, host systems, networking, and facility overhead.

- ☐ **Training energy**: calculate the accelerator energy accounted for during training.
- ☐ **Inference energy**: calculate the active-request accelerator energy subtotal over the stated product lifespan.
- ☐ **Optimization focus**: compute the ratio of these inference and training subtotals and identify which phase merits investigation. Explain why choosing the largest achievable lifecycle reduction also requires the omitted energy terms and the savings available from candidate interventions.

The energy inefficiency of the decode phase

Prefill and decode stress distinct memory and arithmetic pathways, so meaningful energy comparisons require a declared serving workload. Figure 0.225 diagrams these contrasting computational dataflows: prefill amortizes loaded weights across all prompt positions simultaneously, whereas

each autoregressive decode iteration reuses weights only across active sequence batch slots to emit one token at a time. Batch size, context length, precision, and the latency target dictate whether memory bandwidth or arithmetic execution limits realized utilization.

↩ Why small-batch decode is bound by memory bandwidth, and how batching reuses each weight load, is established in section 5.

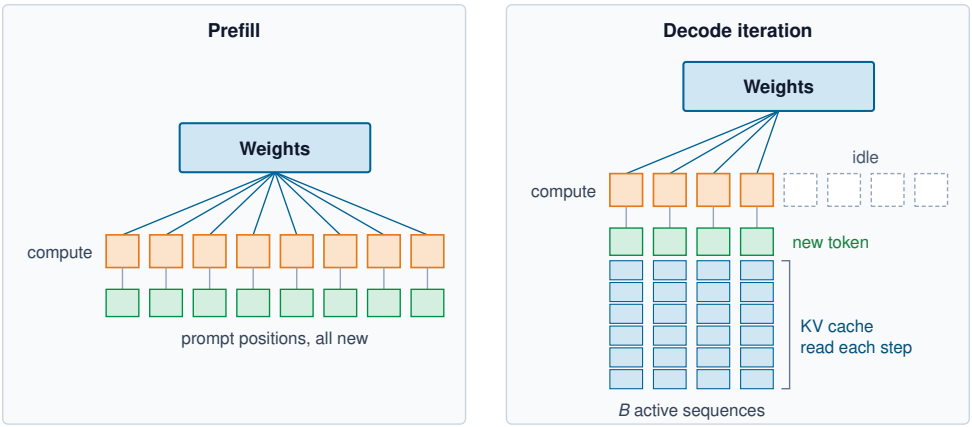


Figure 0.225: Reuse in Prefill and Decode: Prefill reuses weights across prompt positions; a decode iteration can reuse weights across active sequences. At small batches, weight and KV-cache traffic can leave arithmetic units underused. These paths show mechanisms, not measured utilization or a universal energy-per-token ratio.

The structural dataflow split diagrammed in figure 0.225 governs per-token energy through data movement and arithmetic intensity. During prefill, parallel matrix operations reuse weights across prompt positions and can achieve high compute utilization when the workload exposes enough parallel work. During decode, each iteration produces one token per active sequence while accessing model parameters and an expanding KV cache. At small batches, this traffic can leave arithmetic units underused; batching improves weight reuse, subject to memory capacity and latency constraints.

The energy roofline of section 15 puts a number on that underuse. At batch size one, each decode step reads every FP16 weight (2 bytes) to perform two FLOPs with it, an arithmetic intensity of 1 FLOP/byte against an energy crossover of 16 FLOP/byte (equation 0.86). Under the chapter's modeled coefficients, moving each parameter's bytes from DRAM costs 320 pJ while the arithmetic on it costs 20 pJ, so movement is 16× the arithmetic and about 94 percent of the modeled dynamic energy per generated token, before any KV-cache traffic is counted. The coefficient is the table's off-package DRAM value; the high-bandwidth memory that feeds an accelerator costs less per byte (section 11), which narrows the ratio without reversing it at batch one. Batching B sequences reuses each weight load B times and raises the intensity to B FLOP/byte, so the two terms balance only near a batch of 16. Batching is therefore the first energy lever for decode, bounded by memory capacity for the KV cache and by the latency target.

Static power waste occurs when powered circuitry waits rather than producing useful outputs. Reducing that waiting can improve energy efficiency, but a comparison must meter the same hardware boundary and preserve output quality, context, latency, and serving load. Prompt processing and autoregressive generation perform different work; equal token counts alone do not establish a fair energy ratio.

Edge execution and the fleet energy account

Edge intelligence moves inference onto user devices or nearby computing nodes. Local execution can avoid transferring raw inputs to a data center, but it also adds or extends computation at the edge. The sustainability comparison must include both effects, together with any remaining cloud work and the hardware needed to serve the same task. Device power budgets constrain both local inference and learning, so the comparison must account for duty cycling, selective cloud escalation, and the repeated computation and model transfers required by federated training.

↩ The power, memory, and compute budgets of edge devices, and how on-device training amplifies them, are established in section 5.

Running inference at the edge does not eliminate energy concerns. In autonomous vehicles, time-critical perception and control must operate within response deadlines despite variable network connectivity. Onboard computation therefore remains part of the operating budget. Sudhakar et al. (2023) model the potential emissions of a widely deployed autonomous-vehicle fleet, showing how device power and operating time can accumulate at global scale. Their comparison concerns fleet-level scenarios, not an assertion that each vehicle consumes as much energy as a data center.

The same accounting applies to smartphones, wearables, and sensors. Aggregate operational energy depends on the number of devices, their power states, and the time spent in each state. A small average draw per device can still produce a large fleet total; attributing that total to AI requires separating the additional workload from the device's other functions.

Local processing and duty cycling can reduce energy when they avoid enough communication and remote work to offset the device's added costs. The comparison must preserve task quality and service availability and include device manufacturing when deployment requires new hardware. These conditions lead directly to the power and energy budgets that constrain the edge design.

Edge and mobile power budgets

Edge devices operate within battery, thermal, and supply limits that differ from those of data center accelerators. These limits follow from the deployment rather than the processor's instruction set. The engineering choice is to match each inference workload to a device that meets latency and accuracy requirements within its sustained power and energy budgets.

Power budgets reflect the physical constraints of battery capacity, thermal dissipation, and deployment environment. Table 0.217 groups edge AI power budget categories and shows how these constraints propagate. TinyML devices (microcontrollers that run small models in kilobytes of memory) must fit average demand to battery-life or harvesting targets while also supporting peak draw. Mobile devices must balance user experience with battery life, and automotive systems face thermal constraints within enclosed vehicle compartments despite having access to vehicle power.

Table 0.217: Edge AI Power Budget Categories: Edge platforms span five orders of magnitude in power consumption, from sub-milliwatt TinyML systems to automotive compute platforms approaching data center power levels. Sustainable deployment requires matching workload requirements to appropriate power tiers.

Platform Category	Idle Power	Active Power	Peak Power	Example Devices
TinyML (MCU)	1–100 µW	1–50 mW	100 mW	Arduino Nano 33, STM32H7, Nordic nRF5340
Mobile NPU	10–100 mW	0.5–5 W	10 W	Pixel Tensor, Apple Neural Engine, Snapdragon NPU
Edge GPU/TPU	1–5 W	5–30 W	75 W	NVIDIA Jetson Orin NX (10–25 W) and AGX Orin (15–60 W), Google Edge TPU, RPi AI Kit
Autonomous Vehicle	10–50 W	50–200 W	500 W	Tesla FSD Computer, Mobileye EyeQ, NVIDIA Drive

TinyML power state dynamics

TinyML devices are the smallest members of edge fleets, sitting below the 2–10 W phones of Archetype C (Federated MobileNet) in both memory and power. Their energy efficiency is a sustainability concern because billions of edge inference calls add up to a measurable carbon footprint at fleet scale. TinyML efficiency depends heavily on duty cycling, where devices alternate between deep sleep and active inference. The duty-cycle model of equation 0.87 applies directly, with $\alpha_{\text{duty}} = t_{\text{inference}}/T_{\text{period}}$ and the deep-sleep draw in place of idle power.

Consider a keyword-spotting model on a Cortex-M4 microcontroller, an extreme case that obeys the same battery arithmetic as the Archetype C phones. The device draws 15 mW of active inference power for 20 ms in each detection cycle, falls to a deep-sleep draw of 10 microamps at 3.3 V (33 µW) between evaluations, and repeats on a 1 s detection period during continuous listening. Substituting these values into equation 0.87 yields the average power draw:

$$P_{\text{avg}} = 15\ \text{mW} \times 0.02 + 0.033\ \text{mW} \times 0.98 = 0.30 + 0.032 \approx 0.33\ \text{mW}$$

A 250 mAh coin cell at 3 V nominal stores 750 mWh, enough for approximately 2,260 hours, about 94 days, under this idealized budget. The estimate covers compute only. Continuous listening also requires powered sensing and input buffering while the microcontroller sleeps, and their energy, regulator losses, and battery derating must enter any deployment estimate.

On-device learning and the battery wall

On-device learning can require more work and memory than inference alone. When personalization uses gradient-based fine-tuning, backpropagation adds backward computation to the forward pass; other adaptation methods have different costs. A dense training step may require roughly 2–3× the forward arithmetic, while activation, gradient, and optimizer-state memory must be budgeted separately.

The mobile power envelope constrains how long an on-device update can run. In the representative budget used here, sustained processing remains within 2–3 W, while bursts can reach 5–10 W for limited periods. Thermal headroom depends on the device and its operating conditions. An adaptive algorithm must fit this sustained envelope as well as the available battery energy, memory, and update deadline; processor TDP alone does not establish feasibility.



Napkin Math 15.8: The energy of learning

Problem: Consider fine-tuning a small language model (1B parameters) on a user's smartphone overnight. Is this feasible within a 5 percent battery budget?

Math:

1. Phone battery: Typical capacity is approximately 15 Wh, or about 54,000 J.
2. Budget: 5 percent of 54,000 J = 2,700 J.
3. Training cost, using illustrative per-parameter energy coefficients for a mobile accelerator (assumed for this scenario, not measured on a particular phone), with the backward pass at twice the forward cost because it computes gradients with respect to both activations and weights, so one training step costs about three forward passes:
   - Forward pass: ≈ 2 nJ/param.
   - Backward pass: ≈ 4 nJ/param.
   - Total per token: 6 nJ/param $\times 10^9$ params = 6 J/token.
4. Capacity: 2,700 J / 6 J/token = 450 tokens.

Systems insight: The calculation establishes a token capacity, not whether the proposed adaptation fits. That decision also requires the token count needed to reach the quality target, the available memory, and sustained device power. If the required work exceeds the battery budget, parameter-efficient fine-tuning or sparse updates are candidates for reducing cost; their measured energy and achieved quality must establish whether they close the gap.

The local-processing decision compares the energy of the required computation with the communication and remote computation it avoids. Per-bit radio costs motivate the comparison, but the full job must also include repeated training rounds and model transfers.




Systems Perspective 15.3: The energy hierarchy

Trade-off: The architectural choice between processing data locally and sending it to the cloud is governed by an energy budget. The energy-to-communication ratio motivates comparing local work with transmission, but a decision requires the total energy of each alternative at the required quality and latency.

Energy cost per operation (approximate):

- 32-bit integer add: 0.1 pJ



Radio transmission dwarfs local arithmetic in energy.

- 32-bit float mult: 3.7 pJ
- Wireless transmit (1 bit): 100,000–500,000 pJ (Bluetooth/Wi-Fi)

Systems insight: Under these illustrative component costs, a transmitted bit consumes far more energy than one arithmetic operation. The radio cost is quoted per bit; multiplied by eight it reaches roughly 0.8 to 4 million pJ per byte, about two orders of magnitude above the lower bound given for the wired network row of table 0.211. This motivates local processing but does not establish an offloading threshold: include memory, radio startup and protocol overhead, idle power, and remote computation in the full edge-cloud comparison. Local processing wins only when those complete terms favor it.

Energy harvesting for autonomous edge AI

TinyML can operate from harvested ambient energy when the available supply supports the full device workload. Sustained operation requires both an adequate long-term energy budget and a way to handle intervals when harvesting falls below demand, through storage, duty cycling, or suspended execution.

Consider the energy harvesting power budgets in table 0.218. A keyword spotting model optimized to 0.5 mW average power matches the nominal output of approximately 5 cm^2 of indoor solar harvesting only near the top of the listed illumination range, before conversion losses and other device loads. This average-power comparison does not establish uninterrupted operation. The design must cover sensing, storage losses, and periods of dim or absent light, or permit the workload to pause. Ambient supply removes the need for purchased operating electricity only when it covers that complete budget; manufacturing, storage, maintenance, and disposal still enter the lifecycle account.

Table 0.218: Energy Harvesting Power Budgets: Ambient energy harvesting enables batteryless TinyML deployments when average power consumption remains within harvesting capacity. Solar harvesting provides the highest power density for most deployments.

Harvesting Source	Typical Power	Viable TinyML Applications
Indoor solar (1 cm^2)	10–100 microwatts	Periodic sensor classification
Outdoor solar (1 cm^2)	1–10 milliwatts	Continuous keyword spotting
Thermoelectric (body heat)	10–100 microwatts	Wearable gesture recognition
RF harvesting (Wi-Fi)	1–10 microwatts	Ultra-low-duty sensor nodes
Vibration piezoelectric	100 microwatts–1 mW	Industrial monitoring

Cascade inference architecture

Beyond individual device efficiency, architectural patterns determine total system energy consumption across edge-cloud boundaries. A cascade architecture deploys a task-appropriate small edge model to filter inputs before cloud inference. Equation 0.94 expresses total energy as the sum of local processing plus probabilistically-triggered cloud costs:

$$E_{\text{cascade}} = E_{\text{local}} + p_{\text{escalate}} \times (E_{\text{transmit}} + E_{\text{cloud}}) \tag{0.94}$$

where p_{escalate} is the probability of requiring cloud inference (measured on the deployment input distribution).

Consider an illustrative visual inspection system where a lightweight edge model, such as MobileNetV3-Small, consumes 0.5 mJ per image classification, whereas a high-capacity cloud model, such as ResNet-152, requires 50 mJ per inference. Transmitting an image across a cellular uplink adds 10 mJ. If the edge model resolves routine cases locally and escalates only ambiguous inputs, for an escalation rate p_{escalate} of 10 percent, substituting these parameters into equation 0.94 gives the average cascade energy:

$$E_{\text{cascade}} = 0.5 + 0.10 \times (10 + 50) = 0.5 + 6.0 = 6.5 \text{ mJ/image}$$

Compared to always-cloud inference at 60 mJ per image, this illustrative cascade reduces the modeled energy by 89 percent. Quality requires a separate test of local decisions, missed escalations, and the cloud model; the energy calculation says nothing about accuracy.

Wake-word triggered systems

Always-on systems can use hierarchical wake detection to reduce average power across stages of increasing capability and draw. In this illustrative model, an analog front end consumes 10 µW while monitoring for voice activity. A detected event activates a compact neural network wake detector drawing 100 µW. A positive wake decision then triggers full-model inference at 10 mW for 50 ms. The energy calculation uses those assumed state powers and event rates; a deployed system must also account for false activations, missed wake words, and transition costs when evaluating its energy and service quality.

For an illustrative speech-active fraction of 5 percent and a wake-event rate of 0.001 per second (one event per 1,000 s), each full-model event lasts 0.05 s. The front end draws continuously, the wake detector draws only during speech, and the full model contributes its event rate times its event energy:

$$P_{\text{avg}} = 0.01 + 0.05 \times 0.1 + 0.001 \times 10 \times 0.05 = 0.0155 \text{ mW}$$

The hierarchical approach achieves 15.5 µW average power compared to 10 mW for always-active full inference, a reduction of roughly 645× within this modeled boundary. Battery lifetime also requires battery capacity, conversion losses, sensors, and other device loads.

Federated learning energy analysis

Training at the edge keeps raw data local but replaces its transfer with repeated model downloads and client-update uploads. This is the regime of Archetype C (Federated MobileNet), where phones train a shared model within a sustained power budget of a few watts. Equation 0.95 contrasts the energy trade-offs between federated and centralized approaches, where R is the number of rounds, N_{clients} is the number of participating clients per round, E_{upload} is one client-update upload, E_{raw} is one client's raw-data upload, and $E_{\text{cloud,train}}$ is the energy of one centralized cloud training run:

$$\begin{aligned} E_{\text{federated}} &= R\left[N_{\text{clients}}\left(E_{\text{client}} + E_{\text{download}} + E_{\text{upload}}\right) + E_{\text{aggregation}}\right] \\ E_{\text{centralized}} &= N_{\text{clients}} \times E_{\text{raw}} + E_{\text{cloud,train}} \end{aligned} \tag{0.95}$$

Federated learning becomes more energy-efficient only when repeated model communication, local training, and aggregation consume less energy than raw-data transfer and centralized training at comparable model quality. The comparison must cover the same client population and account for repeated participation across rounds. Data being larger than one model update is insufficient by itself because downloads and uploads recur. Privacy *and* energy benefits require separate evidence: keeping raw data local does not by itself prevent updates from revealing private information, and any protection mechanism adds its own costs to the energy account.

Training, serving, and edge deployment all draw operational energy, and none of these accounts includes the hardware that performs the work. That physical supply chain, from fabrication through disposal, is the lifecycle term the next section examines.

Hardware Lifecycle and E-Waste

The environmental cost of an AI accelerator begins long before its first FLOP is calculated (Gupta et al. 2022; Luccioni et al. 2023; NVIDIA Corporation 2025). The per-H100 manufacturing footprint quantified in section 18 is incurred before the device is ever powered on.[22] A training fleet of a few thousand such accelerators therefore carries a manufacturing debt of the same order as the operational emissions of a GPT-3-scale training run on the US-average grid (about 552,123 kg). A comprehensive **life cycle assessment (LCA)** quantifies the cumulative environmental impact across four key phases: design, manufacture, use, and disposal. LCA can reveal manufacturing as a

[22] **Life Cycle Assessment (LCA)**: Standardized by ISO 14040/14044, LCA traces environmental impact from raw material extraction through disposal (International Organization for Standardization 2006a, 2006b). For AI hardware, LCA separates embodied manufacturing emissions from operational energy use, making hardware refresh cycles and accelerator lifespan extension first-order sustainability levers that operational efficiency alone cannot substitute.

major share of lifecycle impact, making it a critical sustainability lever that operational efficiency improvements alone cannot address.

These four phases organize the same emissions by time rather than by activity or reporting scope, as the second column of table 0.214 records, so a phase total must never be added to an activity or scope total.

Life Cycle Assessments can show that discarding functional hardware purely for modest efficiency gains causes more environmental harm through embodied carbon than it saves in operational power. The tipping point where new hardware becomes environmentally justified depends on utilization and grid intensity, a break-even worked in section 24.

Each of the four lifecycle stages adds its burden through a distinct physical mechanism (figure 0.226). System design fixes much of the lifetime load, manufacturing embeds carbon, water, and chemical burdens during fabrication, operation draws grid electricity for training and serving, and decommissioning produces electronic waste unless hardware is refurbished or its components recovered.

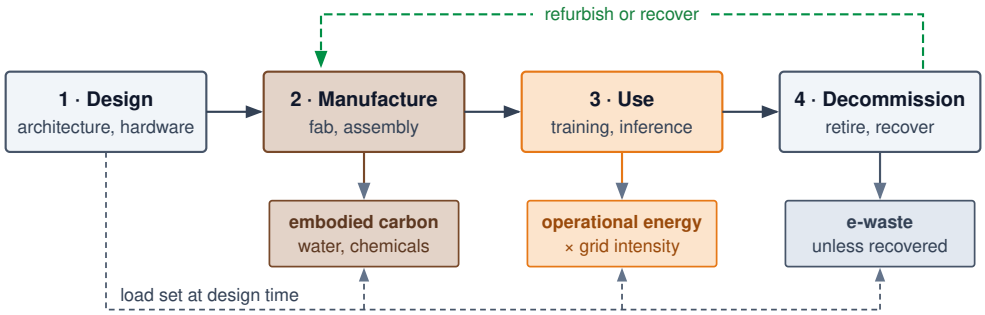


Figure 0.226: AI System Lifecycle: Four stages in sequence, each dropping the burden it adds, with a recovery loop from decommissioning back to manufacture. Design decisions fix much of the load the later stages carry; manufacturing adds embodied carbon, water, and chemicals; use adds operational energy at the grid's carbon intensity; decommissioning adds e-waste unless hardware is refurbished or its components recovered.

The lifecycle sequence connects design choices to costs incurred at different times. Experimentation consumes resources before deployment; manufacturing adds embodied carbon; and use couples the workload to grid and cooling constraints. Retirement creates a choice among reuse, recovery, and disposal. Extending useful service spreads the hardware's embodied burden over more work, but it does not reverse emissions already incurred. The environmental benefit depends on the replacement it avoids and the operating cost of keeping the existing equipment in service.

Design and experimentation phase

The design phase encompasses the research, development, and optimization of ML models before deployment. Public training-energy figures generally describe a final run rather than the trial-and-error that preceded it. Automated neural architecture search (NAS) can evaluate many configurations, and section 20 showed that two estimates of the same search can differ by orders of magnitude depending on whether the boundary includes proxy searches, full runs, data-center overhead, grid mix, and reuse across downstream models (Strubell et al. 2019; Patterson et al. 2021). Later efficient NAS methods use weight sharing, continuous relaxations, and hardware-aware search to reduce that search budget (Elsken et al. 2019). Excluding search does not make the remaining figures comparable either, because final runs also resist ranking by model size (table 0.219).

Table 0.219: Final-Run Training Footprints: Reported energy and operational emissions of five large training runs (Patterson et al. 2021). Each row is a final run under its authors' boundary; search, failed runs, and evaluation are excluded, and the grid factor differs by data center. Compare footprints only after aligning workload, energy boundary, grid factor, and development scope.

Model	Parameters	Energy (MWh)	Emissions (t CO_2e)	t CO_2e per MWh
T5	11B	86	47	0.55
Meena	2.6B	232	96	0.41
GShard-600B	600B	24	4.3	0.18
Switch Trans-former	1.5T	179	59	0.33
GPT-3	175B	1,287	552	0.43

The reported final run for the 600-billion-parameter GShard model emitted under a tenth as much as the 11-billion-parameter T5 run. The table records both lower energy use and lower emissions per megawatt-hour for GShard; across the five runs, the latter quantity varies by a factor of about 3. These different workloads and operating conditions do not isolate the saving from sparse activation alone. Parameter count therefore cannot rank their emissions, and operation count would still need an execution-efficiency and grid account. Search and failed experiments require a separate development inventory before these final-run figures can support a lifecycle comparison.

Addressing the design phase's sustainability challenges requires innovations in training efficiency: sparse training, low-precision arithmetic, weight-sharing, and energy-aware NAS approaches. Transfer learning and fine-tuning pretrained models reuse pretrained representations instead of requiring every task to be trained from scratch (Raffel et al. 2020).

Water, chemicals, and critical materials

Before an accelerator exists, its fabrication consumes physical resources that an energy account alone does not quantify: ultrapure water, process chemicals, and materials. Their burdens occur across extraction, refining, fabrication, and assembly sites, rather than solely where the finished hardware operates. Water demand must be evaluated against local availability and competing uses, while material supply depends on the component and manufacturing process (Jha 2014; Chen 2006). These resource accounts extend the lifecycle boundary beyond carbon without reducing unlike impacts to a single energy total.

Water accounting requires more than a single WUE ratio. **Water withdrawal** measures water removed from a source, whereas **water consumption** measures the portion not returned to the same watershed in a usable form. The account must separate direct on-site cooling water, which equation 0.82 and the cooling-tower calculation in section 21 estimate, from indirect water used to generate electricity and manufacture hardware, then attach each flow to its watershed, season, and local scarcity (Environmental Management—Water Footprint—Principles, Requirements and Guidelines 2014; The Green Grid 2011). One liter consumed during a wet season in a low-stress basin is not equivalent to one liter consumed during a drought in a stressed basin, so decision-grade comparisons report both physical volume and a stress-weighted result. Reclaimed-water percentages also need a declared denominator because recirculating water inside a facility can reduce withdrawal without eliminating evaporative consumption.

Semiconductor fabrication uses ultrapure water for chemical-mechanical planarization, wet etching, and wafer rinsing (Cooper et al. 2011).[23] Complete environmental accounting requires auditing gross process flow, freshwater withdrawal, recycled volume, and evaporative consumption as distinct quantities. Figure 0.227 distinguishes internal reuse from flows that leave the facility. Treatment returns reclaimed water to the intake stream and can reduce freshwater withdrawal, whereas evaporation remains a consumptive loss within the local water account. That classification does not mean the water permanently disappears from the hydrological cycle.

The separate flows in figure 0.227 show why a recycling fraction cannot determine absolute consumption. The same reuse percentage can accompany very different intake volumes and evapo-

[23] **Semiconductor Water Scale**: A fab water inventory must separate intake, internal reuse, discharge, and consumption. Water per usable die depends on process flow, yield, allocation, and site conditions; a smaller process-node label does not establish a universal per-die multiplier.

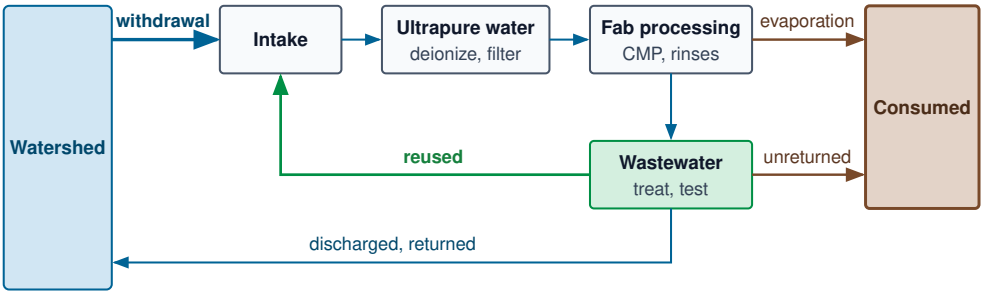


Figure 0.227: Semiconductor Water Cycle: Intake supplies process water; treatment returns part of the flow for reuse. Recycling can reduce freshwater withdrawal, while evaporation and other unreturned flows determine consumption. State the denominator of any reuse fraction.

rative losses. Facility siting therefore requires the underlying water volumes and local watershed conditions, not a reuse percentage alone.

Fabrication also uses chemical products for etching, doping, and cleaning: strong acids such as hydrofluoric and sulfuric acid, organic solvents, and toxic dopant gases such as arsine and phosphine. Their hazard comes from toxicity, reactivity, and the treatment burden of the waste streams they produce, not from their energy content. Chemical inventories and safety data sheets identify hazardous ingredients, although undisclosed formulations can limit the assessment (S. Kim et al. 2018). The environmental account needs the substances and quantities used at the specific facility, together with their release and treatment pathways. An energy total alone cannot describe these chemical burdens.

AI hardware and its manufacturing supply chain depend on **critical materials** whose supply disruption can constrain production. Criticality is not synonymous with geological rarity or membership in the rare earth group. Materials such as indium appear in critical-materials and endangered-elements analyses because supply can depend on byproduct extraction, substitution options, and recycling constraints (Rhodes 2019). The relevant dependency may lie in a processor, package, peripheral component, or fabrication process. Table 0.220 summarizes these different roles across the hardware system.

Table 0.220: Critical Materials for AI Hardware: Semiconductor manufacturing relies on specific materials, including silicon, gallium, germanium, indium, tantalum, cobalt, tungsten, copper, helium, and rare earth elements, that face increasing supply constraints and geopolitical risks, potentially impacting AI hardware production and innovation. The table details these materials, their applications in AI systems, and the associated supply vulnerabilities requiring proactive mitigation strategies.

Material	Application in AI Semiconductor Manufacturing	Supply Concerns
Silicon (Si)	Primary substrate for chips, wafers, transistors	• Processing constraints • Geopolitical risks
Gallium (Ga)	GaN-based power amplifiers, high-frequency components	• Limited availability • Byproduct of aluminum and zinc production
Germanium (Ge)	High-speed transistors, photodetectors, optical interconnects	• Scarcity • Geographically concentrated
Indium (In)	Indium tin oxide, optoelectronics	• Limited reserves • Recycling dependency
Tantalum (Ta)	Capacitors, stable integrated components	• Conflict mineral • Vulnerable supply chains
Rare earth elements	Magnets, sensors, high-performance electronics	• High geopolitical risks • Environmental extraction concerns
Cobalt (Co)	Batteries for edge computing devices	• Human rights issues • Geographical concentration (Congo)
Tungsten (W)	Contact and via plugs, diffusion barriers	• Limited production sites • Geopolitical concerns

Material	Application in AI Semiconductor Manufacturing	Supply Concerns
Copper (Cu)	On-chip interconnect wiring, heat spreaders	• Limited high-purity sources • Geopolitical concerns
Helium (He)	Semiconductor cooling, plasma etching, EUV lithography	• Nonrenewable • Irretrievable atmospheric loss • Limited extraction capacity

The construction and operation of fabs and data centers also directly impacts natural ecosystems through habitat disruption, water stress, and pollution from chemical discharge. Semiconductor-industry effluents can contaminate nearby fluvial sediments with heavy metals and trace elements (Hsu et al. 2016). Waste generation from fabrication, including gaseous emissions, VOC-laden air, and metal-contaminated wastewater, requires advanced treatment systems, and end-of-life hardware adds the e-waste stream examined in section 24.

These water, chemical, and material demands are what fabrication spends to produce each usable accelerator. The manufacturing phase that follows explains why an AI accelerator spends more of them than its wafer area suggests.

Manufacturing phase

The manufacturing footprint combines the embodied carbon established in section 18 with the water, chemical, and material demands in section 23. Accelerator design changes how much of that resource investment produces a usable device.

Two structural properties of AI accelerators enlarge this footprint per usable device. First, high-performance accelerators are often fabricated at or near the reticle limit, the maximum die area a single lithography exposure can print. A larger die yields fewer candidates per wafer, and because the probability that a die escapes every random defect falls roughly exponentially with its area, a defect density that kills 5 percent of small dies may kill 20 percent or more of reticle-limit dies. The water, chemicals, and lithography energy spent on every defective die must then be allocated to the working ones. Second, the memory bandwidth that large-scale training and inference require pushes accelerators toward advanced 2.5D and 3D packaging, such as TSMC's Chip-on-Wafer-on-Substrate (CoWoS), which places high bandwidth memory stacks beside the logic die on an interposer. The inventory must include those memory stacks, the interposer, and the added assembly stages rather than counting only the accelerator die. Each usable accelerator therefore embodies more process water, chemicals, and energy than its logic-die area alone suggests.

Longer useful service spreads that manufacturing investment across more work, while lower-toxicity materials, recycling, and cleaner manufacturing address the production burden itself (Cenci et al. 2021; Irimia-Vladu 2014).

Use phase

The operational energy consumed during training and inference is detailed in section 21. What merits attention here is the pattern of this consumption and its interaction with grid infrastructure. A GPT-3-scale run spreads 1,287 MWh over weeks of sustained power draw, but the character of that draw differs across workload types, and the difference shapes which scheduling interventions are practical.

A large distributed training run draws sustained aggregate power with the correlated phase transitions described in section 21, but its completion deadline may leave scheduling flexibility. Checkpoints created for fault recovery also provide restart points for deliberate pauses. A carbon-aware scheduler can use them to shift work toward lower-emissions intervals when the expected benefit exceeds checkpoint, restart, and idle-power costs. The decision requires a local emissions forecast and enough deadline slack; late-afternoon or overnight operation is not universally preferable. Fault tolerance thus supplies a mechanism for flexibility without proving that every pause saves emissions. Online inference has tighter delay budgets and may support bounded preemption, while offline inference can often be deferred more freely.

The **duck curve** describes the ramp in net load (demand minus variable solar and wind output) as solar generation falls in the evening. A constant data-center load raises the level of net demand but

↩ Checkpoint-restart mechanics and the failure-driven choice of checkpoint interval are established in section 13.

does not by itself increase the ramp rate. A flexible load can reduce the required ramp by curtailing during that interval. Schedule from local forecasts and marginal emissions signals; a universal daily pause window would ignore regional generation and transmission conditions.

Disposal, e-waste, and embedded AI

Hardware upgrade cycles (Slade 2007) connect AI deployment to the broader electronic waste (e-waste) problem. In 2019, global e-waste reached roughly 54 million metric tons (Forti et al. 2020), of which 17.4 percent was documented as formally collected and recycled (Singh and Ogunseitan 2022). These totals cover electrical and electronic equipment generally, not AI hardware alone. Replacement schedules also differ from physical lifetimes; a server retired from one workload may still support another. When equipment is discarded, hazardous substances in its components require controlled recovery and treatment rather than uncontrolled dumping or processing (Grossman 2007).

Memory capacity, bandwidth, and interconnect compatibility can motivate replacement before accelerators physically fail. In tightly integrated systems, a new accelerator generation may require baseboard, networking, or server changes; PCIe-based designs can offer different upgrade options. Evaluate the actual compatibility boundary and reuse path. Replacement does not automatically mean disposal, and a functioning retired node may remain useful for less demanding workloads.

The deployment of **embedded AI** integrates inference into edge appliances and consumer electronics. Figure 0.228 charts the broader connected-device fleet, with historical estimates rising from 8.6 billion in 2019 to 15.1 billion in 2023 and a projection of 29.4 billion by 2030 (Statista 2022). These counts indicate the scale of the device ecosystem, not the number of AI systems or the amount of e-waste. Waste generation also depends on service life, repair, and reuse. Adhesive enclosures, nonreplaceable batteries, and proprietary components can make repair difficult, increasing the risk that a limited failure leads to whole-device disposal (Baldé et al. 2017).

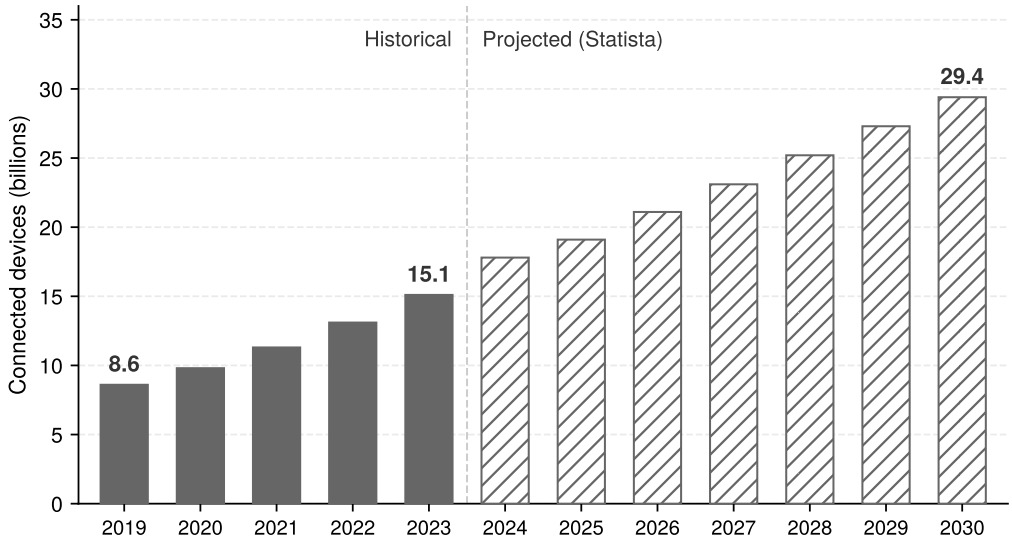


Figure 0.228: IoT Device Growth: Connected devices worldwide, with historical counts through 2023 (unhatched) and projections from 2024 onward (hatched) (Statista 2022). The counts describe the connected-device ecosystem, not the number of AI systems or the amount of e-waste. Waste generation also depends on service lifetimes, repair, reuse, and disposal.

Limited software support, restricted repair, and difficult disassembly can push devices toward replacement instead of reuse. The lifecycle boundary must then follow the retired equipment to its next use or treatment destination. Moving hardware out of the operator's inventory does not remove its environmental burden; the account must distinguish useful reuse, controlled recovery, and disposal that transfers costs to other communities.

Hardware lifespan extension

Countering the linear "take-make-dispose" model requires a shift toward a **circular economy** (Stahel 2016) that prioritizes reuse, refurbishment, and recycling. Extending the functional lifespan of AI hardware spreads a fixed manufacturing footprint over more service. Extending server life from 3 years to 5 years reduces embodied carbon allocated per year of service by 40 percent. This allocation result motivates evaluating longer use, but a claim of avoided emissions requires comparing the replacement and operating costs of the alternatives.

Four lifecycle interventions support longer hardware service by making systems repairable, upgradeable, supported, and reusable. Right-to-repair initiatives seek to reduce service restrictions, including barriers to replacement parts, tools, and repair information (Federal Trade Commission 2021). Modular design supports upgradeability by separating replaceable subsystems so that an accelerator or network upgrade need not require discarding the entire chassis. Extended support cycles provide the driver updates and security patches needed to keep functioning equipment usable. Secondary-use programs match retired accelerators to workloads they can still serve, such as batch processing, development, or research. Each intervention must preserve the performance, compatibility, and security required for useful continued operation.

These interventions move sustainability from disposal management to lifecycle engineering. A replacement decision compares two ways of delivering the same future service, continued operation of the existing fleet and operation of a replacement fleet. The original manufacturing emissions have already occurred under either choice. Replacement adds a new manufacturing burden that pays back only through operational savings over the remaining service interval, so the tipping point is the time those savings take to equal it. Suppose a replacement accelerator carries the same allocated manufacturing footprint as an H100 (164 kg CO_2e) and completes the same work with 50 percent less energy. Against an existing accelerator running continuously at the rated 700 W, the replacement repays its manufacturing emissions in about 6.5 weeks on the US-average grid, but only after about 2.7 years on Quebec's grid, nearly the whole of a 3-year standard service life. Lower utilization stretches both intervals in proportion. The same upgrade can therefore repay itself within weeks on a fossil-heavy grid and become a net loss on a clean one if the replacement leaves service before it breaks even. This accelerator-only account omits host and facility overhead, and disposal and any useful second life for the retired hardware shift it further, so a lower annual amortized figure alone cannot settle the decision.

Mitigation Strategies

When a data center hits its absolute power ceiling, the operator cannot simply buy more GPUs. Supporting additional useful work requires reducing the power needed for that work, changing its schedule, or securing additional feasible capacity. Algorithmic optimization can reduce executed work and data movement; infrastructure changes can reduce overhead. Carbon-aware placement addresses a different constraint by changing the emissions associated with electricity use, even when energy demand stays fixed.

The measurement frameworks identify where environmental costs concentrate in a particular workload. Repeated experiments can make development dominant; sustained serving can make inference dominant; and clean electricity or limited use can increase the relative importance of manufacturing. The measured balance guides intervention. Algorithmic changes can reduce the number or cost of operations, infrastructure changes affect execution and facility overhead, and governance sets the budgets and incentives under which those choices operate.

Implementation must account for the rebound introduced with fleet growth in section 5, known as the Jevons paradox[24] (principle 23). The tenfold-efficiency, hundredfold-volume example there supplied the arithmetic; the mechanism is that cheaper computation enables applications that were previously economically infeasible, so usage can grow enough to erase or exceed the expected energy savings. This **rebound effect** makes absolute outcomes, including carbon budgets, necessary companions to rate efficiency (FLOP/s per watt). Renewable sourcing changes the emissions associated with electricity but does not cap consumption. Governance must track workload growth against the intended resource budget to determine whether efficiency gains reduce the fleet's total impact.

[24] **Jevons Paradox**: Jevons (1865) described how efficiency could stimulate demand enough to increase total coal use. Price reductions alone do not establish either energy factor; measure both unit energy and demand.

Multi-layer mitigation strategy framework

The most counterintuitive obstacle to sustainable AI is not inefficiency but success, which is why mitigation must choose both which layer owns each reduction and which absolute budget prevents rebound. Energy-efficient model design, optimized hardware deployment, sustainable infrastructure operations, and carbon-aware scheduling each attack a different term in the lifecycle footprint. Framework selection matters only insofar as it changes computation, memory movement, utilization, or reporting. Lifecycle-aware design keeps the optimization from ending at deployment by checking whether savings survive training, inference, manufacturing, and use.

Figure 0.229 illustrates rebound on an elastic demand curve ($\epsilon_{\text{elast}} > 1$). When unit cost falls from P_0 to P_1, the green shaded area represents the saving on baseline volume Q_0. Demand expands to Q_1, creating a red area ($P_1(Q_1 - Q_0)$) that exceeds the original saving in this schematic. With monetary unit cost on the vertical axis, the areas measure expenditure. They represent energy only under an additional assumption that unit cost changes in proportion to energy per operation; an emissions comparison also needs the applicable carbon intensity.

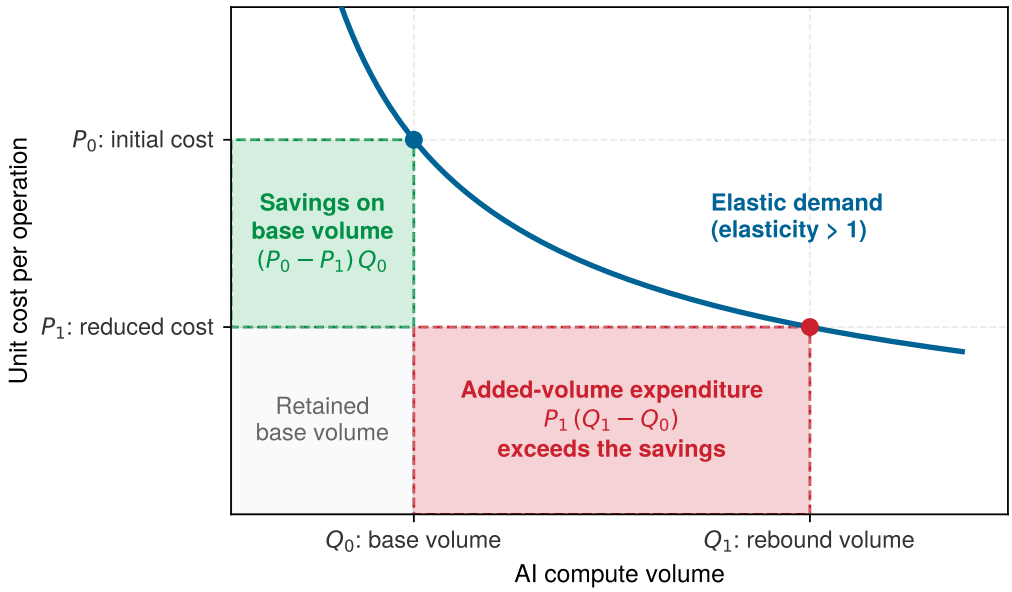


Figure 0.229: Jevons Paradox in AI Workloads: A schematic elastic demand curve. When unit cost falls from P_0 to P_1, demand grows from Q_0 to Q_1. The green rectangle is the expenditure saved on the original volume; the red rectangle is the expenditure on added volume at the lower unit cost. In this schematic, the red area exceeds the green. These areas represent energy only if unit cost changes proportionally to energy per operation; an emissions comparison also requires carbon intensity.

Total energy depends on measured energy per query and query volume. Demand elasticity describes how volume responds to price; translating that response into energy requires a separate account of how unit energy changes.

Checkpoint 15.5: The efficiency trap (Jevons paradox)

An engineering team optimizes a translation service, reducing measured energy per query by 50 percent (2× efficiency gain) at fixed quality. Assume the service passes that saving through as a proportional price reduction and that grid intensity stays unchanged.

- ☐ **Inelastic demand**: calculate the change in total energy consumption when demand is inelastic and price change does not affect usage.
- ☐ **Elastic demand**: calculate the net change in total energy consumption when a 50 percent cost reduction leads to a 300 percent increase in query volume.

- ☐ **Rebound effect**: define how this "rebound effect" challenges the assumption that "efficient models are automatically green models."

The Jevons paradox does not invalidate efficiency as a strategy; it makes governance and capacity planning part of the result. At the level of individual systems, reducing energy per useful task remains a direct sustainability lever. A reduction in latency or monetary cost is a candidate improvement whose energy effect must still be measured.

Systems Perspective 15.4: Efficiency as sustainability

Model optimizations become sustainability tools only when they reduce measured lifecycle cost at fixed quality. Pruning can remove computation and memory traffic when the hardware skips the resulting structure. Quantization reduces representation size and may accelerate supported kernels, while knowledge distillation trades additional training for a smaller serving model. Each technique can also fail to reduce wall energy when its overhead or deployment regime leaves the dominant term unchanged.

Performance engineering supplies candidate interventions, but the environmental result still needs measurement. A faster run reduces energy only if the shorter duration outweighs any increase in average power; lower memory use helps only if it removes powered work or capacity. Hardware-software co-design becomes a sustainability gain when these savings survive the lifecycle boundary and the deployed workload volume.

The fundamental insight is that sustainable AI engineering overlaps strongly with efficient AI engineering, but extends beyond it. The engineering principles that enable systems to scale, perform better, and cost less to operate can also reduce environmental impact, but sustainability adds lifecycle accounting, carbon-aware placement, absolute resource budgets, water and materials constraints, and governance against rebound effects. Sustainability is an integral part of good systems engineering, not a synonym for efficiency alone.

Lifecycle-aware development methodologies

Lifecycle-aware development starts from the largest environmental term in the workload and then selects the intervention that changes that term. Algorithmic design, infrastructure optimization, operational practice, and governance reduce impact only when they are sequenced around the measured bottleneck rather than applied as a generic checklist (Uddin and Rahman 2012).

Energy-efficient algorithmic design

Large deep learning models can require substantial computation during training and inference.[25] The engineering question is how much of that work a particular task needs at its required quality. Parameter count alone does not identify redundant computation, and removing weights saves energy only if the resulting implementation avoids work or data movement. Sustainable algorithm design therefore evaluates the model and its execution together, measuring energy per useful task rather than treating a smaller representation as sufficient evidence of improvement.

When the measured bottleneck is unused structure, bit width, or serving scale, the sustainable design lever changes. Table 0.221 maps the bottleneck to the intervention that changes the energy term.

25 **FLOP/s vs. FLOPs**: FLOP/s denotes a rate; FLOPs denotes an operation count. Neither alone determines energy. Integrating system power over execution time includes arithmetic, data movement, idle intervals, and supporting components. A faster implementation can reduce static energy by finishing sooner, but its total saving depends on the power required to achieve that rate.

Table 0.221: Algorithmic Energy Levers by Bottleneck: Pruning, quantization, and distillation reduce energy through different mechanisms, so the right choice depends on the measured bottleneck rather than on a generic compression goal.

Technique	Measured bottleneck	Energy mechanism	Representative evidence
Pruning	Unused model structure	Removes redundant weights, reducing model size, compute, and memory movement during inference	Structured pruning can remove complete channels or blocks; measure energy and quality for the resulting executable model
Quantization	Bit width	Lowers numerical precision so arithmetic units and memory transfers move fewer bits	Q8BERT demonstrates an 8-bit BERT representation with a smaller model footprint and task-dependent quality retention (Zafrir et al. 2019)
Knowledge distillation (Hinton et al. 2015)	Serving scale	Moves repeated inference cost into a one-time teacher-student training process	DistilBERT retains 97% of BERT accuracy with 40% fewer parameters and 60% faster inference (Sanh et al. 2019)

The table's three levers have different deployment caveats: pruning[26] depends on sparsity structure and hardware support, quantization[27] can affect arithmetic and memory movement, and knowledge distillation[28] amortizes its extra training cost across repeated serving.

Pruning, quantization, and distillation form the core toolkit for sustainable AI development, but their sustainability value depends on the measured bottleneck. The design question is not how to implement each compression method from first principles; it is how to rank these levers against memory movement, serving volume, carbon intensity, and lifecycle cost.

While model compression, efficient architectures, and carbon-aware scheduling provide the technical mechanisms for efficiency, deploying them haphazardly yields diminishing returns. To achieve maximum impact, engineering teams must synthesize these isolated techniques into a coherent, prioritized strategy that attacks the largest sources of emissions first.

Checkpoint 15.6: Prioritizing decarbonization strategy

Deploying a 70B LLM for a latency-sensitive application:

- ☐ **Technique ranking**: state the measurements needed to rank INT4 quantization, unstructured pruning, carbon-aware scheduling, and knowledge distillation for this service. Separate reduced energy demand from reduced carbon per unit of energy.
- ☐ **Systems justification**: propose a conditional ranking for a memory-bound service at fixed quality and latency, including hardware support, expected serving volume, extra training cost, and whether requests can move across regions or time.

Lifecycle-aware systems

Repeated model updates add to the lifecycle footprint even when each deployed version is efficient. The relevant comparison is the work required to maintain the service's quality over time, including development and retraining; a retraining cycle that repeats the development sweep of section 15 pays its 5× final-run multiple again on every update. Transfer learning and fine-tuning can reuse a pretrained model instead of repeating training from scratch (Raffel et al. 2020), but the comparison must include adaptation, evaluation, and any additional work needed to recover quality on the target task. Reuse is a candidate saving whose value depends on that complete update cycle.

The deployment boundary matters just as much as the training boundary. Edge deployment can reduce communication energy by running inference on specialized low-power hardware at the point of use (Xu et al. 2020), but the lifecycle account must include the embodied carbon of manufacturing and replacing those devices. Embedding LCA methodologies into AI workflows allows teams to see this trade-off early: a cloud model, an edge model, and a hybrid cascade may have different

[26] **Pruning Energy Impact**: Pruning saves inference energy only when the implementation eliminates arithmetic or memory transfers at the required quality. Unstructured sparsity in large language models (LLMs) can reduce stored weights without delivering a proportional wall-energy saving. Sparse formats, supported kernels, indexing, load balance, and static power determine the realized result; a parameter sparsity percentage is not an energy-reduction factor.

[27] **Quantization Energy Savings**: Lower precision reduces representation size and can reduce arithmetic and memory energy, but neither term scales universally with the square or ratio of bit width. Hardware support, kernel fusion, conversion costs, batching, and whether execution is compute- or memory-bound determine the realized result (Gholami et al. 2022). Report model size separately from measured wall energy, and compare both at the required quality and latency.

[28] **Knowledge Distillation**: Introduced by Hinton et al. (2015), distillation trains a compact "student" model on soft probability targets from a larger "teacher," capturing inter-class relationships that hard labels discard. The sustainability comparison must amortize teacher and student training across the actual serving volume and measure energy at the required output quality.

winners depending on query volume, device lifetime, grid carbon intensity, and retraining frequency (International Organization for Standardization 2006a, 2006b). Henderson et al. (2020) argue for systematic reporting of ML energy and carbon footprints precisely so these comparisons can be made consistently. As the Jevons paradox warns, the accounting must also include usage growth, because optimizing one stage may increase total impact if lower costs enable wider deployment.

Benchmarks and operating metrics

Benchmarks matter when they make efficiency visible at procurement and design time. The ML.ENERGY Leaderboard (ML.ENERGY Initiative et al. 2023) reports inference energy measurements under declared model and serving configurations. MLPerf power submissions pair performance results with system-level power measurements under benchmark rules. These results support comparisons within the stated workload, quality, and measurement conditions; converting them into carbon footprints still requires electricity and lifecycle accounting beyond the benchmark.

The right efficiency metric depends on the serving regime. Batch inference is naturally expressed as correct samples per joule, latency-sensitive serving as SLO-compliant queries per joule, and generative workloads as joules per accepted output token at a declared quality threshold. Raw throughput per joule rewards systems that lower accuracy, truncate outputs, or miss latency objectives. Standardization does not make one platform universally green; it fixes useful work, quality, the measurement window, and the energy denominator well enough for procurement and architecture decisions to be argued quantitatively.

For sub-watt TinyML deployments, the MLPerf Tiny benchmark suite applies this discipline to constrained devices (Banbury et al. 2021). Tasks include visual wake words, keyword spotting, anomaly detection, and image classification. The closed division constrains implementations to reference-equivalent models, while the open division permits broader model choices. Reading accuracy, latency, and energy together within the declared division prevents a change in task or model quality from masquerading as a hardware-efficiency gain.

Energy and latency still have to be read together through the energy-delay product (EDP) (equation 0.96), which balances energy consumption against response time by penalizing solutions that save power only by taking too long:

$$\mathrm{EDP} = E_{\text{total}} \times T = P_{\text{avg}} \times T^2 \tag{0.96}$$

where E_{total} is energy consumed, T is execution time, and P_{avg} is average power. The quadratic delay term penalizes solutions that achieve low energy through excessive delays. Lower EDP is preferable under this particular trade-off score, after quality and latency requirements have been satisfied. It does not authorize missing a service deadline or replace energy per completed task.

For TinyML deployments, EDP provides a score for comparing feasible operating points. Reducing clock frequency can lower power while extending execution; reducing voltage can lower switching energy as well, when the hardware permits it. Static power and the longer active interval can offset those gains. The preferred setting therefore comes from measured energy and delay across supported configurations, after excluding settings that miss the workload's deadlines.

Sustainability metrics complement performance benchmarks by recording the resource cost of useful work. Regulation is beginning to require such records. The EU AI Act's documentation obligations for covered general-purpose models, examined with the other regulatory mechanisms in section 34, include known or estimated energy consumption. Such requirements make the measurement boundary and provenance part of the reporting evidence rather than an optional annotation to a performance result.

Infrastructure optimization

Algorithmic optimizations can reduce operation counts, data movement, or the energy of execution. The operational environment determines the facility overhead and emissions associated with that work. Renewable energy integration, carbon-aware workload scheduling, and cooling optimization act on these surrounding terms, so each intervention must be evaluated at the boundary it changes.

[29] **PUE Gap**: The PUE model in section 15 shows that facility overhead scales with every watt of IT load. At 100 MW, even a small PUE change therefore represents megawatts of cooling and power-delivery capacity, but its carbon value still depends on the grid signal.

Green data centers

A single hyperscale data center can consume over 100 MW of power, comparable to a small city.[29] Renewable energy integration, advanced cooling, and AI-driven optimization offer complementary interventions. Their value depends on whether the measured problem lies in the electricity source, heat-removal overhead, or operating controls.

Major cloud providers have announced renewable-energy commitments, but variable generation leaves a supply-matching problem. Storage and flexible scheduling can help address it alongside transmission and other generation sources; the appropriate combination depends on the site and workload. Google's published 2030 target for 24/7 carbon-free energy[30] illustrates the harder version of this goal: matching electricity consumption with carbon-free generation, including nuclear as well as renewables, hour by hour rather than only on an annual basis.

Cooling overhead depends on rack density, climate, and the heat-removal design, as quantified in section 21.[31] Liquid cooling can support dense accelerator configurations, but its energy benefit depends on the complete pumping and heat-rejection system. Control policy supplies another lever. The DeepMind case in section 15 shows how measured operating data can guide cooling adjustments within thermal constraints; its reported savings describe the evaluated site rather than a universal reduction for any facility.

Regional grid intensity data sources

Every carbon-aware decision inherits the quality of the grid signal behind it, and the right signal depends on the decision. Grid carbon intensity varies with generation mix, which changes hourly with demand, renewable availability, and plant dispatch. The US Energy Information Administration publishes historical grid emissions factors by region, updated annually; these averages give a coarse baseline for inventories or early planning, but they cannot resolve the hourly effect of moving a flexible workload. Electricity Maps provides time-resolved, flow-traced average and lifecycle intensity estimates across covered grids, while WattTime provides marginal operating-emissions signals that estimate the generator response to added or removed load.

The two kinds of signal answer the two questions that the measurement contract (section 12) separated. Time-matched average factors support the attributional inventory of a completed run. Marginal factors support the consequential question of how shifting or eliminating a run would change system emissions, which is the question a scheduler asks.

Carbon-aware scheduling

Carbon-aware scheduling, introduced with the geographic and temporal levers in section 15, now has the grid signals it needs. Its benefit depends on the signal it acts on and on the additional energy the move itself causes.

Carbon-aware scheduling is fundamentally a load-shifting software problem. The scheduler queries one of the grid signals compared above and combines it with workload flexibility. A feasible shift must finish before the deadline, retain access to data and accelerator capacity, and preserve the job's reliability constraints. Its net benefit must exceed checkpoint, transfer, restart, and idle-capacity emissions. Pausing useful work without reducing the cluster's powered load can erase the expected saving.

Google's carbon-intelligent computing platform[32] illustrates this approach by using forecasts and virtual capacity limits to delay flexible work (Radovanovic et al. 2021). In the multi-tier accounting cascade of figure 0.217, temporal load shifting modulates the grid emissions factor applied to facility electricity rather than reducing raw compute FLOPs. That is a carbon intervention, not automatically an energy reduction; checkpointing, transfer, and a different runtime can also change electricity consumption.

Because a scheduler asks how moving a job changes emissions, it needs a marginal signal rather than the average factor an inventory uses, and the providers compared above expose signals with different methodologies and coverage.[33] A feasible schedule must satisfy three constraints on one time axis at once, the grid carbon signal $CO_{2,\text{grid}}(t)$, the job's execution state, and cluster headroom $N(t)$ (figure 0.230). The job waits, checkpointed, through the high-carbon peak, runs for T_{job} in a low-carbon trough where headroom exists, and still finishes with slack before its deadline. Waiting

30 | **24/7 Carbon-Free Energy (CFE)**: Hourly matching strengthens the time resolution of electricity procurement and accounting. Its physical impact depends on deliverability, additional clean supply, storage, and grid conditions. It does not eliminate manufacturing emissions or prove that every consumed electron came from a carbon-free generator.

31 | **Cooling Energy Density**: AI accelerator racks can exceed 100 kW per cabinet, far above the design envelope of many conventional air-cooled facilities. Direct liquid cooling removes heat closer to the device and can reduce fan and chiller work, but the realized facility-energy reduction depends on coolant temperatures, pumps, heat rejection, climate, and the air-cooling baseline. For AI data centers, the cooling system is no longer passive infrastructure overhead but an active constraint on how many accelerators can be physically co-located.

↩ Scheduling against an external price signal, trading waiting and preemption against deadlines, is established in section 14.

32 | **Carbon-Aware Scheduling at Scale**: Google's system forecasts carbon intensity and flexible demand, then sets virtual capacity curves that shift work within operational constraints (Radovanovic et al. 2021). This demonstrates a scheduling mechanism; a deployment's saving depends on its workload flexibility, grid signal, and power response.

33 | **Marginal vs. Average Emissions**: An average factor describes the electricity mix attributed to consumption; a marginal factor estimates the emissions change caused by changing demand. The pair applies the attributional-versus-consequential split of the measurement contract in section 12 to the grid signal. Neither factor is a universal multiplier for the other; use a documented methodology, forecast horizon, and region appropriate to the decision.

pays only when the avoided grid emissions exceed the checkpoint I/O, idle standby, and state migration that the wait itself causes.

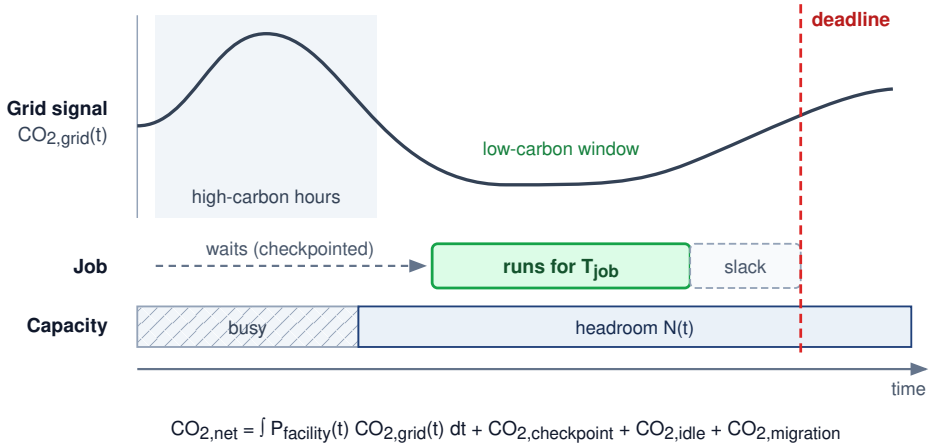


Figure 0.230: A Feasible Carbon-Aware Schedule: Three constraints share one time axis. The job waits, checkpointed, through the high-carbon hours of the grid signal and runs in the low-carbon window only where cluster headroom exists, finishing with slack before the deadline. The equation below the timeline charges the shift for its checkpoint, idle-wait, and migration carbon, so waiting pays only when the avoided emissions exceed those terms. The curve is schematic, not a measured grid trace.

Renewable generation variability complicates batch training dispatch across power grids. Figure 0.231 charts hourly electricity generation across the European Union over a full week in November 2023, stacking resource generation bands beneath the total demand curve, which peaks between 310 and 365 GW on weekdays. Nuclear remains near 70 GW, solar contributes midday output, and wind ranges from 27 GW on Sunday to 111 GW on Thursday. The resulting generation mix varies across days as well as within each day. Wind contributes to that variation, but demand, other generation, storage, and electricity exchanges also affect fossil dispatch. Carbon-aware scheduling therefore needs regional grid forecasts rather than a fixed assumption about which hours are cleanest.

Energy-aware AI frameworks complement scheduling when they optimize the workload rather than only shifting its location. Zeus improved training energy efficiency by 15.3–75.8 percent across its evaluated workloads by automatically finding energy-performance trade-offs (You et al. 2023), while Perseus reduced large-model training energy consumption by up to 30 percent by mitigating energy bloat (Chung et al. 2023). These tools, alongside CodeCarbon for emissions tracking (Schmidt et al. 2021), democratize energy optimization beyond hyperscale companies.

Scheduling changes where and when work runs; the cooling interventions established in section 21 change facility overhead. Liquid cooling and immersion cooling still require pumps, coolant distribution, and heat rejection in the energy boundary. The combined strategy must measure these interventions together rather than add their isolated savings.

Google sustainability framework case study

The value of Google's case study is that it groups mitigation into four levers that correspond to terms this chapter has tracked, namely the model's work, the machine's efficiency, the facility's overhead, and the grid's carbon factor. Table 0.222 summarizes the "4 Ms" that Google engineers identified for reducing the carbon footprint of rapidly expanding AI workloads (Patterson et al. 2022).

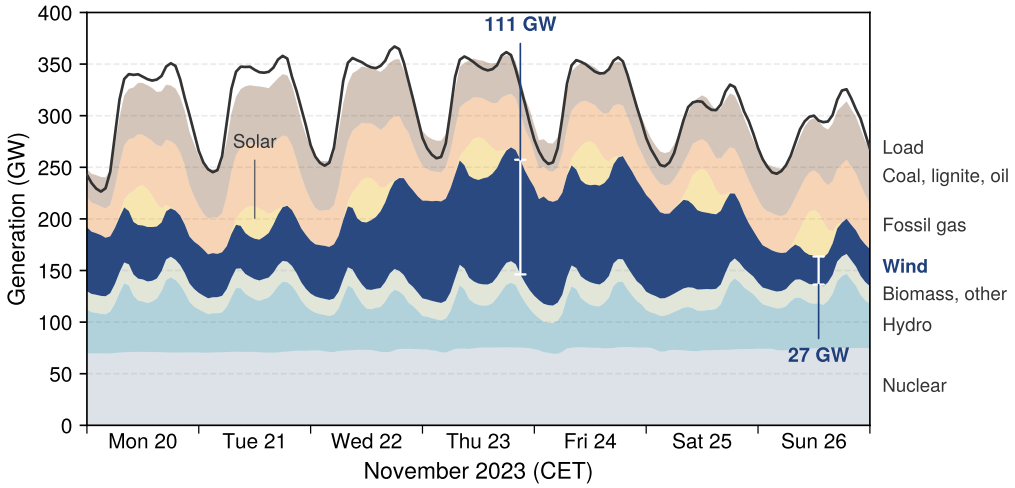


Figure 0.231: European Electricity Generation over One Week: Hourly public net generation by source for the European Union in week 47 of 2023 (20 to 26 November), stacked, with the load curve on top. Nuclear forms a nearly flat base, hydro follows the daily demand cycle, and solar adds only small midday bulges this late in the year. Wind swings across days rather than hours, from about 27 GW on Sunday to about 111 GW on Thursday, so the fossil gas and coal that fill the remaining gap move from day to day. Lower-carbon windows for deferrable training therefore come from the forecast for a specific week and region, not from a fixed daily pattern. Source: Energy-Charts (Fraunhofer ISE) public power data, from ENTSO-E and national statistics.

Table 0.222: Google's 4 Ms Sustainability Framework: The framework combines model architecture, hardware specialization, infrastructure efficiency, and carbon-aware placement each acting on a different term of the footprint. Their combined effect requires a consistent end-to-end account: component factors can be multiplied only when they describe compatible workloads and measurement boundaries.

Lever	Intervention	Reported efficiency effect	Example mechanism
Model	Select efficient AI architectures such as sparse models or neural-architecture-search-derived designs	5–10× lower computation requirements without compromising model quality	Evolved Transformer and Primer
Machine	Use AI-specific hardware rather than general-purpose systems	2–5× performance-per-watt improvement; TPUs show 5–13× greater carbon efficiency relative to nonoptimized GPUs	Tensor Processing Units
Mechanization	Run optimized cloud infrastructure at high utilization	1.4–2× energy reduction compared to conventional on-premises data centers	Lower facility PUE than the industry-average baseline used in the 2021 study
Map	Place data centers in regions with low-carbon electricity supplies	5–10× lower gross emissions	Real-time monitoring of renewable energy usage across infrastructure

Patterson et al. (2022) combine model, hardware, facility, and electricity-source improvements in a comparison of Transformer training configurations. Their example reports an energy reduction factor of 83 and a CO_2 emissions reduction factor of 747 relative to its stated baseline. A combined factor can come from a consistent accounting model supported by measurements, but the component ratios must refer to compatible workloads and boundaries. Multiplying unrelated best-case factors does not establish the same result.

In the period studied by Patterson et al. (2022), AI workloads represented less than 15 percent of Google's total energy consumption despite expanding deployment. That share is evidence about relative consumption; it does not by itself establish constant or declining absolute energy when the denominator also changes. Assess absolute growth from measured energy totals alongside the reported efficiency improvements.

Empirical case studies demonstrate how sustainable-AI engineering can improve both capability and environmental impact. For example, Patterson et al. (2022) compare GPT-3 with Google's GLaM and report improved quality metrics alongside reduced training computation and lower-carbon energy sources, while the GLaM model paper explains the mixture-of-experts architecture behind that efficient scaling (Du et al. 2022).

The strategy in the case study, which combines systematic measurement, carbon-aware development, transparency in reporting, and renewable energy transition, is useful as a framework for sustainable AI scaling. The analysis also argues that earlier extrapolations overstated ML energy requirements by large factors because they did not account for efficiency improvements and workload measurement boundaries, underscoring the importance of empirical measurement over theoretical projections.

↩ Mixture-of-experts execution and the All-to-All routing it requires are established in section 8.

Engineering guidelines for sustainable AI development

Measurement, optimization, and scheduling frameworks provide the analytical foundation, but implementation requires prioritization organized around the dominant lifecycle term.

Measurement must precede optimization. The development-time trackers introduced with the geographic and temporal levers (section 15) supply the empirical baseline, which is what distinguishes a genuine reduction from energy merely displaced across a system boundary.

Geographic and temporal siting provides an immediate operational lever. Comparing candidate deployment sites requires pairing workload electricity with documented grid carbon-intensity factors for the target operating window, while accounting for facility overhead, inter-site data transfer penalties, runtime changes, and reliability constraints before claiming a net emissions reduction.

Algorithmic efficiency attacks computational volume directly. Rather than defaulting to the largest trainable parameter count, teams evaluate pruning, quantization, and knowledge distillation against target latency and accuracy thresholds. Each lever saves energy only through the bottleneck it changes (table 0.221); for quantization, realized benefits depend on integer kernel support, memory bandwidth bottlenecks, data conversion overhead, and batching constraints. Transfer learning and parameter-efficient fine-tuning can avoid some work required by training from scratch, but their benefit depends on the adaptation task, achieved quality, and total update cost.

Platform selection and lifecycle governance complete the framework. An accelerator with better energy per task may draw more instantaneous power while finishing sooner; its value depends on the workload and complete hardware lifecycle. Longer service spreads manufacturing emissions over more useful work and may avoid replacement, but it also preserves the existing equipment's operating costs. The balance between embodied and operational emissions therefore makes hardware longevity a context-dependent trade-off rather than an automatic win.

The cumulative impact of technical choices depends on the incentives under which organizations deploy them. Electricity prices reward some efficiency gains, but prices need not capture water stress, manufacturing emissions, or local environmental burdens. Policy and regulatory frameworks can bring those omitted costs into reporting, procurement, and investment decisions.

Policy, Regulation, and the Path Forward

A training cluster can reduce its electricity bill by moving to a cheaper region while increasing its emissions. If the bill omits that environmental cost, a cost-minimizing placement decision may favor the higher-emissions site. Reporting requirements expose the trade-off; carbon pricing, procurement conditions, and other policy instruments can change the incentives. Their effect depends on which activities they cover and how organizations implement them.

For a systems reader, policy is the control plane that changes the objective function. Reporting rules make hidden energy and embodied-carbon costs measurable, carbon pricing turns location into a scheduling variable, and procurement standards make lifecycle accounting part of infrastructure design. The regulatory mechanisms in section 34 matter because they determine which optimizations become economically rational at fleet scale.

Regulatory mechanisms

Reporting rules act at different organizational boundaries. The EU AI Act[34] includes model-level technical-documentation obligations, while the **Corporate Sustainability Reporting Directive (CSRD)**[35] addresses sustainability reporting by covered companies. Model energy records can inform both, but neither establishes a universal requirement to meter every AI job. Engineers must identify the covered entity or model, applicable dates and exemptions, and the evidence the reporting method requires.

Policy can also impose a priced resource constraint. A hypothetical emissions cap for AI operations would specify tonnes of CO_2e and allow trading of unused emissions allowances, following the general logic of **emissions trading systems (ETS)**.[36] A power cap in MW or an energy budget in MWh would constrain different quantities and must not be called the same credit. The EU **Carbon Border Adjustment Mechanism**, by contrast, applies to embedded emissions in specified imported goods and electricity; it does not generally price an AI service by its compute location.

Incentives and procurement conditions can change which designs organizations choose. A grant can support efficiency research, while a procurement contract can require declared energy measurements or lifecycle evidence. These conditions need measurable criteria rather than an undefined "green" label. Scope 3 emissions also depend on whose inventory is being prepared: purchased hardware and outsourced cloud services enter the customer's value-chain account, while the supplier classifies its own activities within its organizational boundary. The same physical emissions must not be added twice merely because two organizations report them.

Industry self-regulation and standards

Voluntary commitments and common standards supplement government requirements, but a commitment is not evidence of a measured reduction. Annual renewable-energy matching and 24/7 carbon-free energy (CFE) address different time resolutions. Hourly matching makes periods

34 | **EU AI Act (2024)**: The Act presumes high-impact capabilities above 10^{25} FLOPs of training compute and imposes additional obligations on general-purpose models with systemic risk. Annex XI includes computational resources and known or estimated energy consumption in required technical documentation; qualifying open-source models without systemic risk can be exempt from these documentation obligations. Article 101 permits fines for specified provider violations up to 3 percent of annual worldwide turnover or EUR 15 million, whichever is higher. Application dates, model scope, and exemptions must be checked before turning these provisions into an engineering reporting requirement.

35 | **Corporate Sustainability Reporting Directive (CSRD)**: Directive (EU) 2026/470 narrows reporting thresholds to more than 1,000 employees and more than EUR 450 million in net annual turnover, assessed at group level where applicable. Member States must transpose its reporting amendments by March 19, 2027; entity scope, exemptions, and reporting-year rules still determine applicability. Covered reporting follows European Sustainability Reporting Standards rather than a separate inventory of AI jobs. The engineering contribution is traceable information on relevant electricity, procurement, and value-chain impacts.

36 | **Emissions Trading for Compute**: Applying cap-and-trade to AI emissions is a policy analogy here, not a description of an established compute-allowance market. Such a design would need a declared emissions boundary, measurement method, enforcement mechanism, and rules for trading allowances.

of unmatched demand visible, while the resulting physical emissions still depend on the generation and grid context (Monyei and Jenkins 2018). Evaluating a provider's progress therefore requires the reported method and results, rather than merely its announced target.

Internal carbon pricing gives emissions a weight in project decisions. A "shadow price" lets an organization compare alternatives using both financial cost and attributed emissions; its influence depends on the price, accounting boundary, and whether decision makers use it. Measurement tools supply inputs to that comparison. Projects like **CodeCarbon** and **ML CO_2 Impact** let developers estimate model carbon footprints within their workflows (Schmidt et al. 2021; Lacoste et al. 2019), but the estimates still need declared power, location, and allocation assumptions.

Standardized benchmarks provide evidence for particular efficiency claims. **MLCommons** defines MLPerf power-measurement protocols that connect system energy with workload performance under declared conditions. The Green Software Foundation's Software Carbon Intensity specification addresses a different boundary, combining operational and allocated embodied emissions per functional unit. A benchmark result or a calculation method is not itself an independent sustainability audit. Accountability requires checking the reported inputs, scope, and comparison against the claim being made.

Public engagement and transparency

Effective AI sustainability governance requires evidence that matches the claim. Misleading presentation of environmental performance, or **greenwashing**,[37] can arise from selective boundaries or omitted trade-offs as well as unsupported offset claims. Accountability combines workload telemetry with facility measurements and supply-chain inventories. Runtime power counters alone cannot establish Scope 1–3 completeness or the environmental costs of manufacturing.

Pledge-style disclosure is useful only when it creates auditable data rather than reputational cover. The **Montréal Carbon Pledge**, originally a commitment by institutional investors to measure and disclose carbon footprints annually, is a useful model precisely because its value lies in the disclosed data, not the pledge itself; the same standard applies to an AI organization, whose sustainability claims are only as credible as the workload-level measurements behind them.

Environmental justice and responsible development

Transparency establishes the evidence base; environmental justice asks how the burdens and benefits revealed by that evidence are distributed. Site selection is where much of that distribution is decided, which makes it an environmental-justice decision rather than a facilities decision alone. Environmental sustainability extends ML systems responsibility from model behavior to ecological stewardship (Vinuesa et al. 2020). The computational resources required for AI development concentrate environmental costs on specific communities while distributing benefits unequally across global populations. Data centers impose both grid demand and cooling-water demand, and the local burden depends on the energy mix, watershed, and competing regional uses.

That geographic concentration creates environmental-justice risks that align with broader responsible AI frameworks.[38] The fairness claim here is narrow and systems-specific. An ML fleet allocates benefits, electricity demand, water use, land pressure, and e-waste across different communities. Communities hosting AI infrastructure can bear disproportionate environmental burdens while having limited access to AI's economic benefits.

These distributional concerns fall into four groups (figure 0.232). Environmental justice concerns local water withdrawal and grid strain; intergenerational equity concerns atmospheric CO_2 persistence and long-lived infrastructure; resource competition concerns agricultural and municipal claims on land, water, and minerals; and the transparency gap concerns undisclosed per-model energy, carbon, and water ledgers. Engineering acts most directly on the last group, because auditable telemetry is what allows the other three to be assessed at all; the measurement contract of section 12 supplies that telemetry.

Impact assessments and community participation make these trade-offs visible before a site is committed. Any claim that such an assessment is legally required must identify the applicable jurisdiction, rule, and project scope.

37 **Greenwashing in AI**: Typical forms are claiming "carbon neutrality" through offsets while expanding data center capacity, or highlighting per-query efficiency gains while total compute grows faster. Green-claims rules can require verifiable evidence for environmental claims. For ML engineers, the technical litmus test is whether sustainability reporting covers all three GHG Protocol scopes, or conveniently omits Scope 3 (hardware manufacturing, cloud supply chain) where much of AI's carbon can reside.

38 **Environmental Justice in Data Center Siting**: A site-cost model can omit burdens borne by nearby residents, such as competing water demand or changes to local infrastructure. A low financial cost therefore does not establish a low community burden. Site evaluation must identify who benefits, who bears the resource costs, and how affected communities participate in the decision alongside the analysis of grid intensity and water stress.

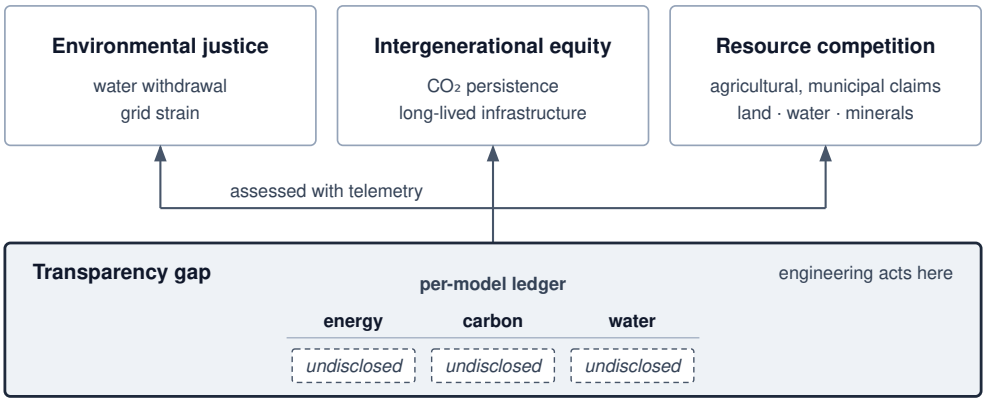


Figure 0.232: Ethical AI Concerns: The distributional concerns raised by AI infrastructure fall into four groups. Environmental justice, intergenerational equity, and resource competition stand on the transparency layer, because each can be assessed only with the per-model energy, carbon, and water ledgers that the transparency gap leaves undisclosed. That layer, drawn with the heavier outline, is the one engineering telemetry addresses most directly.

Future research directions

The research agenda follows the same engineering logic as the mitigation framework: reduce data movement, close the measurement gap, and avoid redundant computation. **Non-von Neumann computing architectures**,[39] including **neuromorphic computing** and **in-memory computing**, can reduce selected transfers, extending the event-driven and spiking designs of section 9 from avoided work to avoided movement. Evaluate the remaining arithmetic, conversion, control, and peripheral energy at the required quality; eliminating one cost does not eliminate the whole system account.

A critical implementation barrier is the "measurement gap": AI teams need standardized, workload-level reporting of energy use and carbon emissions rather than relying only on coarse proxy metrics (Henderson et al. 2020). Coarse methods often rely on proxies such as GPU-hours multiplied by average grid intensity, which fail to capture the real-world dynamics required by reporting regimes that care about time, location, and workload boundary. Developing and standardizing granular, real-time energy and carbon accounting tools is essential for both compliance and effective optimization.

A second research direction reduces redundant computation before it reaches the accelerator. Data selection, model design, and training procedure all affect the environmental cost of learning (Wu et al. 2022). Smarter data sampling, active learning, and data valuation can reduce work spent on low-value examples, but the resulting model quality and coverage must be measured rather than assumed. An integrated approach combining algorithmic efficiency, hardware innovation, renewable energy adoption, and transparent governance is necessary to align AI development with environmental constraints.

Reducing redundant computation can improve operational efficiency, but compliance and environmental benefit require their own evidence. A sustainable design must show that the saved work survives the complete lifecycle account and the resulting deployment scale. Incorrect boundaries or assumptions can otherwise turn a local improvement into a larger total footprint.

Fallacies and Pitfalls

Sustainability involves counterintuitive physics where efficiency improvements can increase total consumption and geographic choices can outweigh component-level optimizations. These fallacies and pitfalls capture errors that waste compute budgets and planetary resources through misallocated optimization effort.

[39] **Von Neumann Bottleneck**: Separating processing from memory requires data transfers whose energy depends on locality and arithmetic intensity. If movement contributes a fraction q of total energy, eliminating that term alone gives at most a $1/(1-q)$ reduction factor when the remaining terms are unchanged. For an illustrative 60–80 percent share, that bound is 2.5–5×, before accounting for replacement circuitry.

Fallacy: *Cloud computing automatically makes AI systems more environmentally sustainable.*

Engineers assume cloud providers operate efficiently and sustainably. Cloud infrastructure can improve utilization and facility efficiency, but it transfers neither the physical footprint nor the customer's accounting responsibility out of existence. Training a 7B model on 64 A100s for 14 days produces 5.7 t CO_2 on the US average grid (429 g/kWh) but only 264.9 kg CO_2 on Quebec's hydroelectric grid (20 g/kWh operational), a roughly 21.5× difference for this US-average-versus-Quebec pairing. The hydroelectric figure is an operational factor, not a lifecycle-zero one. As demonstrated in section 15, cloud comparisons must disclose region, energy boundary, utilization, embodied allocation, and whether the electricity is Scope 2 for the provider or Scope 3 for the customer.

Pitfall: *Focusing only on operational energy consumption while ignoring embodied carbon and lifecycle impacts.*

Teams optimize training efficiency while ignoring manufacturing emissions. In low-carbon grids, embodied carbon can dominate fleet-level footprint accounting. As quantified in section 18, an A100 accelerator embodies roughly 150 kg CO_2 from manufacturing (Luccioni et al. 2023); for the earlier 14-day, 64-A100 training run, the unamortized upfront burden is roughly 9.6 t CO_2. Amortized over a 4-year service life, the share attributable to this specific job is about 90 kg. The job comparison must use that allocated share; a fleet lifecycle comparison must instead compare the full manufacturing burden against operations over the same fleet lifetime. Comparing the entire manufacturing burden with one short job's electricity would mix boundaries. Extending hardware lifetime from 3 years to 5 years reduces amortized embodied carbon by 40 percent, but procurement decisions must also evaluate the operational cost of retaining the hardware.

Fallacy: *TDP is actual power consumption.*

Thermal design power is a hardware design specification, not the measured power of a particular workload. Actual draw depends on the device, configured power limit, utilization, memory traffic, clocks, and idle intervals. A TDP-based calculation is a stated capacity scenario; it does not establish serving energy or facility energy. Carbon and electricity-cost estimates that drive placement decisions (section 15) should use measured power over the workload interval and include the support systems within the chosen boundary.

Pitfall: *Using PUE as a complete environmental metric.*

Data-center operators report PUE in sustainability disclosures and engineers may treat it as a complete environmental score. PUE measures only facility energy relative to IT energy. A lower-PUE facility can still cause more electricity-related emissions if its grid factor is sufficiently higher, and neither factor accounts for hardware manufacturing or local water stress. Compare matched emissions factors and complete lifecycle boundaries rather than ranking sites by PUE alone.

Fallacy: *Efficiency improvements automatically reduce total environmental impact.*

Engineers assume that halving inference cost cuts environmental impact in half. The Jevons paradox warns that efficiency improvements can increase total consumption by enabling expanded usage. In a rebound scenario, suppose reducing token cost from $0.06 to $0.002 per 1,000 tokens accompanies a proportional 30× reduction in measured energy per query at fixed output length and quality. A 100× increase in query volume then raises total energy by 3.3× and, at unchanged grid intensity, emissions by the same factor. Any implementation change that lowers per-query energy can still raise total energy when usage grows by a larger factor. Teams must therefore evaluate deployment volume against the intended carbon or resource budget; per-query gains alone do not control the rebound illustrated in figure 0.229, where the red area of new consumption at the lower unit cost completely swallows the green area of initial efficiency savings.

Pitfall: *Treating carbon offsets as a substitute for reducing actual emissions.*

Organizations may purchase offsets without establishing that the credited reduction is additional, durable, independently verified, and free of double counting. An offset does not change the electricity consumed by the workload or its immediate emissions. Teams should report physical emissions reductions separately from compensation claims, with the offset boundary and uncertainty visible.

Geographic placement can reduce electricity-related emissions when the complete workload comparison supports it; neither an offset purchase nor a renewable label substitutes for that calculation.

Fallacy: *Component-level optimization guarantees lifecycle improvement.*

Teams reduce training cost to improve sustainability without analyzing deployment scale. A training change that increases serving energy must be evaluated over expected query volume: the crossover occurs when accumulated additional serving emissions exceed the one-time training saving. Edge deployment adds device manufacturing and replacement to any avoided data-center and transmission emissions. Keeping hardware longer avoids new manufacturing but may consume more operating energy than replacement. Each comparison requires the same useful service, grid-factor boundary, and lifetime; there is no universal query count or upgrade age that settles it. Effective sustainability requires the complete account in section 18.

Pitfall: *Evaluating sustainability at the component boundary instead of the lifecycle boundary.*

A pruned model may contain fewer weights while its sparse representation adds indexing and execution overhead. If those costs outweigh the arithmetic and transfers avoided, the smaller model need not consume less energy. The same boundary error appears when hardware teams report accelerator efficiency without procurement carbon, platform teams report PUE without grid intensity, or model teams report training emissions without expected serving volume. The lifecycle boundary in section 18 requires evaluating training, serving, embodied carbon, regional grid mix, hardware lifetime, and demand growth together before calling a change sustainable.

Summary

The lifecycle boundary connects training, serving, embodied carbon, grid mix, hardware lifetime, and demand growth. Sustainable AI asks whether the machine learning fleet can operate within available energy, water, and material resources even after its models and infrastructure have been optimized.

The measurement contract makes comparisons meaningful by fixing useful work, required quality, system boundaries, attribution, time, location, and uncertainty. Operational and embodied carbon accounting then identify which lifecycle term an intervention can change. Memory traffic, idle equipment, cooling, and power delivery can all consume energy beyond useful arithmetic; lower FLOP counts alone do not establish lower environmental impact.

The Fleet Law connects execution time to the fleet energy account. A step's energy is approximately its average fleet power times $T_{\text{step}}(N)$ (equation 0.93), so exposed communication and synchronization extend the interval over which the system draws power. Recovery adds further work outside successful steps. The C^3 terms therefore matter to both performance and sustainability, although the power trace determines their energy cost. PUE extends an IT-energy estimate to the facility boundary, the grid factor attributes operational emissions, and embodied carbon adds the hardware lifecycle burden rather than converting operating joules.

Mitigation follows that diagnosis. Algorithm and hardware changes must reduce measured resource use while preserving quality, latency, and reliability; scheduling must account for grid intensity and the cost of moving work; hardware replacement must weigh operational savings against new manufacturing emissions. Water availability and the distribution of environmental burdens also matter when choosing where and how a fleet can grow.

Key Takeaways: Efficiency alone is not enough

- **Power is a hard ceiling**: A fleet cannot compute past the megawatts, cooling, water, and grid capacity its site can supply. Sustainability is therefore an existence constraint on model scale, not a public-relations layer around an otherwise finished architecture.
- **Demand can outrun efficiency**: Lower energy per query does not ensure lower fleet energy use. At fixed work per query, total energy rises when query volume grows by a larger factor than per-query energy falls, so efficiency targets need an absolute resource budget.

- **Memory traffic can dominate serving energy**: During bandwidth-bound autoregressive decode, accelerators can draw power while waiting for weights and state. Quantization, batching, or memory-optimized hardware help sustainability only when they reduce measured energy at the required quality, latency, and reliability.
- **Carbon starts before boot**: Hardware manufacturing creates emissions before the first query runs, and its lifecycle share rises on clean grids and under low utilization. Keeping or replacing hardware therefore requires comparing new manufacturing emissions with operational savings over the same future service.
- **Location changes the footprint**: Moving flexible work to a cleaner grid can reduce operational carbon only when the saving exceeds transfer, restart, and idle-capacity emissions. Placement must also preserve deadlines, data access, capacity, and reliability; regional intensity ratios alone do not establish the net benefit.

Sustainability changes the scale at which efficiency must be judged. A reduction per query is a local result; the fleet result depends on how many queries run, where they run, and what hardware their service requires over time. Two forces push demand past efficiency. The sustainability paradox introduced at the start of the chapter is the first, as scaling laws (principle 9) price each further quality gain in more compute per model. The Jevons paradox of AI (principle 23) is the second, as cheaper work invites more of it. Both make the distinction consequential, because efficiency creates room within a resource budget while demand determines how much of that room is consumed. Deployment decisions therefore need both a useful-work efficiency target and an absolute resource budget.




What's Next: From sustainability to responsibility

A fleet that is secure, robust, and within its power budget is not automatically fit to deploy. Security, robustness, and sustainability each answer a technical question about what a production system can support. The siting analysis in section 38 already showed that a feasible fleet can place its water, grid, and waste burdens on communities that see little of its benefit. The model's decisions raise the same question about the people they act on. An accurate, fast model can still concentrate its errors among people with little power to challenge them. Responsible AI therefore asks who receives the system's benefits, who bears its costs, and how an affected person can contest a decision. The carbon inventory and lifecycle account built here become one input to the assurance record that answers it. They supply evidence for that judgment; they do not settle whose interests the fleet should serve.

↪ Governance frameworks, algorithmic fairness, and ethical guardrails are developed in chapter 40.

Responsible AI

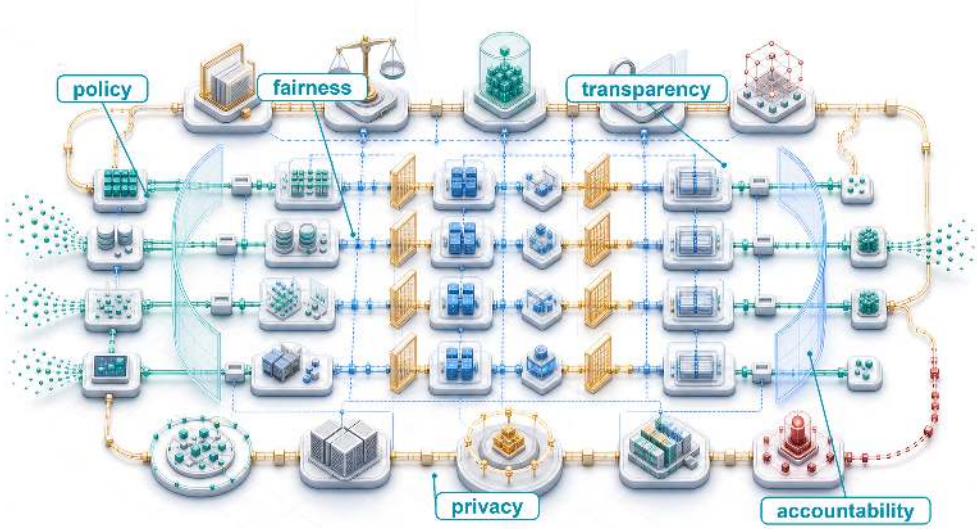

Purpose

Why can an accurate, fast model still be unfit for deployment?

In high-risk regulated settings, a model that cannot explain or document its behavior, support audit, or meet applicable discrimination rules may fail deployment review regardless of its accuracy or latency. Strong aggregate performance can conceal a pattern of errors concentrated among people with little power to challenge the outcome. Increasing throughput then increases the reach of that failure. A single-node evaluation can measure predictions, but it cannot establish whether every deployed version uses an approved decision policy or whether an affected person can obtain a correction. Across a fleet, records, models, interfaces, and organizational authority must remain connected as each changes. An explanation delivered too late may be useless to someone facing an immediate decision; retaining every detail indefinitely can create a separate privacy problem. Investigating an alert requires staff and evidence, while correcting a decision may require action across several dependent services. These obligations consume resources and can constrain deployment even when inference capacity is ample. They also persist after launch: a change in population, workflow, or model behavior can invalidate the evidence that originally justified operation. Responsible AI engineering makes those obligations part of the organization's daily operation, with resources and authority to act when measured behavior falls short. In C^3 terms, responsibility is a coordination constraint: the fleet needs evidence and authority to decide when compute may run, when it must stop, and who can correct its consequences.

Learning Objectives

- Explain why an accurate, fast model can still fail deployment review, and how fairness, transparency, privacy, safety, and accountability become measurable deployment gates
- Calculate fairness metrics and evaluate observational versus causal definitions under base-rate and prediction trade-offs
- Design bias detection and fairness monitoring across demographic groups, drift, and fleet-scale feedback loops
- Evaluate privacy and machine-unlearning controls against accuracy, compute, and governance requirements
- Select explanation methods under latency, compute, auditability, and user-contestability constraints
- Analyze human-AI feedback loops, automation bias, and value conflicts in deployment contexts
- Construct an auditable assurance case, including bounded robustness and generative-system controls, from intended use and evidence through launch, remedy, material change, and retirement

The Governance Imperative

In 2018, Reuters reported that Amazon had abandoned an experimental hiring algorithm trained on historical resume data after discovering it systematically penalized female candidates (Dastin 2018). The historical records supplied a computable training objective, but reproducing patterns in those records was not the same as identifying qualified applicants fairly. The experiment exposed a mismatch between the learned objective and the legitimate hiring goal: historical success could encode unequal access rather than merit-based qualifications.

Production AI already has a systems agenda spanning architecture, infrastructure, data processing, security, and robustness (Stoica et al. 2017). The preceding chapters made the fleet secure against adversaries, robust under shift, and accountable for the energy it draws. The siting analysis in section 38 left one question that energy and carbon accounting could expose but not settle, namely who bears the environmental cost of where the fleet runs. Responsible AI carries that question from the fleet's resource footprint to the decisions the fleet makes about people. A service that remains available, secure, accurate, and within its resource budget can still distribute harms unfairly or deny affected people a remedy, and the hiring incident makes that distinction concrete. Fairness, transparency, and accountability therefore need measurable requirements and operating controls alongside the mechanisms that keep the fleet running.

Across the multi-tier fleet hierarchy diagrammed in figure 0.15, responsible AI completes the Governance band, the point where the system meets the real world. The Infrastructure, Distribution, and Serving bands beneath it supply compute, data movement, distributed execution, and serving infrastructure. Within the Governance band, the Assurance row contributes security controls and robustness mechanisms, and the Governance & Sustainability row contributes sustainability budgets; responsible AI weighs that evidence and adds the constraints that determine why the machine runs and whom it serves, requiring owners to identify, assess, limit, and remedy harms from an otherwise correctly functioning system. Alongside the Fleet Law's accounting of execution time, responsible AI adds conditions for continued operation: evidence that the deployment remains within its approved bounds and authority to intervene when it does not. Toxic outputs can erode user trust, discriminatory decisions can distort future training data when those decisions shape data collection, and privacy violations can require restricting or suspending a service. These consequences depend on the deployment, but the obligation to investigate harm does not depend on whether it also degrades model performance. Responsible AI therefore shapes objective selection and operating constraints from the beginning of design.

↩ The Fleet Law governing execution time and scaling efficiency is established in section 11.

Definition 16.1: Responsible AI

Responsible AI is the practice of designing, auditing, and operating ML systems to measurable fairness, safety, privacy, and accountability standards, translating ethical principles into verifiable system properties that constrain model training, deployment decisions, and operational monitoring.

1. **Significance**: Responsible AI constraints impose real costs: fairness-aware training can lengthen training runs, real-time bias monitoring can consume serving-path latency, and on-demand explainability can require additional model evaluations or asynchronous worker capacity. At fleet scale, these safeguards must be budgeted like reliability or security controls. Conversely, a facial recognition system with a persistent subgroup error gap can affect millions of users before detection, creating regulatory and liability costs that dwarf the monitoring investment.
2. **Distinction**: AI ethics examines normative principles about what systems should do; responsible AI engineering turns selected requirements into controls and evidence. Bias detection algorithms, differential privacy implementations, audit trails, and architectural guardrails support bounded claims that reviewers can inspect. Choosing legitimate requirements and judging the remaining harms still require domain expertise, stakeholder participation, and accountable authority.
3. **Common pitfall**: A frequent misconception is that responsible AI is a final compliance review applied to a finished model. Postprocessing can satisfy selected metrics on observed outcomes, but threshold adjustment cannot repair an invalid target, unreliable labels, or missing information. Those defects may require changes to data collection, labels, or learned representations. The remedy depends on the source of harm; a final threshold check cannot substitute for investigating it.

Responsible AI therefore works as an engineering discipline rather than a final review. It translates ethical principles into measurable system requirements, detects and mitigates harmful algorithmic behavior, accounts for **sociotechnical dynamics**[1] that extend beyond any individual system, and operates inside organizational and regulatory contexts. Public risk-management frameworks, mapped onto the assurance lifecycle below, record the same shift from abstract principles toward governable requirements. Privacy mechanisms, robustness techniques, and sustainability metrics provide the technical foundation for that integration. The responsible-AI framework combines those capabilities with bias detection algorithms, privacy preservation mechanisms, organizational governance structures, and stakeholder engagement processes, treating responsible AI as fundamental to sound engineering practice rather than as supplementary constraints applied to finished systems.

That integration is a significant infrastructure investment. The training, inference, and memory overheads quantified in section 6 are essential infrastructure to be provisioned, analogous to how security and redundancy are budgeted in distributed systems.

Treating fairness, transparency, accountability, and privacy as rigorous engineering specifications rather than abstract ideals transforms responsible AI from aspiration into practice. Each principle becomes a design constraint with measurable criteria, attached to a specific stage of the machine learning lifecycle. The assurance lifecycle first establishes who may set and approve those constraints, and the deployment tier determines where each control can run and what it costs. Fairness, privacy, explainability, and safety are then developed one at a time, each from definition through measurement to the controls that enforce it. Accountability and sociotechnical analysis close the argument by testing whether those controls remain effective inside human workflows and institutions.

[1] **Sociotechnical System**: Coined by the Tavistock Institute in the 1950s to describe the interdependent relationship between humans and technology in the workplace. ML fleets are sociotechnical systems in exactly this sense: their "performance" is not merely a benchmark score but an emergent property of how model outputs interact with user behavior, legal frameworks, and physical resource constraints.

The Governance and Assurance Lifecycle

A model registry can prove which weights reached production, but it cannot prove that the deployment was justified. That judgment requires a chain of evidence connecting the deployment context to affected people, foreseeable harms, measurable requirements, implemented controls, accountable owners, and the authority to launch or stop the system. Responsible AI therefore needs an assurance

lifecycle: a repeatable operating path that converts normative commitments into reviewable claims and keeps those claims valid as the system changes.

The lifecycle begins before model selection. Teams first define the intended use, prohibited uses, affected parties, operating environment, and decision consequences. They then identify harms and requirements, including subgroup performance, privacy, security, robustness, sustainability, human-oversight, and contestability obligations. Some controls are implemented locally; others are inherited from data providers, foundation-model vendors, cloud platforms, or downstream operators. Each inherited control needs an interface contract stating what the supplier guarantees, what evidence supports that guarantee, and which residual risks remain with the deploying organization.

Constraint selection needs an explicit division of authority. Domain experts and affected parties identify consequential harms and acceptable uses; policy and legal specialists identify applicable obligations; engineers determine what can be measured and enforced. The accountable launch authority approves the resulting criteria and records unresolved disagreements. A convenient metric or an available implementation does not authorize the engineering team to choose whose errors matter most.

The resulting assurance case is not a single compliance document, but a versioned set of linked artifacts that structure accountability across the system lifecycle. At its foundation sits an explicit *claim* defining the property required for a specified use and operating envelope. An *argument* articulates how operational controls and empirical observations justify that claim, drawing on *evidence* from reproducible evaluations, audits, access logs, documentation, and user research. These claims and arguments hold only under stated *assumptions* regarding environmental, population, supplier, and workflow boundaries. To ensure operational authority, every assurance case specifies an accountable *owner* empowered to block launch, restrict use, or require remediation, governed by an explicit *invalidation rule* that defines the measurable performance change, distribution shift, or operational incident that expires prior approval and triggers reassessment.

This structure prevents a common category error. A fairness dashboard, privacy accountant, red-team report, or carbon inventory is evidence for a bounded claim; none is itself proof that the full system is responsible. Table 0.223 shows how that evidence becomes operational only when an owner can act on it and affected people have a path to contest a decision and obtain remedy.

At release time, the evaluation contract defined in section 11 binds those assurance claims to the exact model, workload, acceptance authority, rollback target, and evidence-retention period. The assurance case explains why deployment is justified; the evaluation contract ensures that promotion and invalidation execute that judgment against one reproducible artifact.

Table 0.223: Governance and Assurance Lifecycle: Responsible operation connects context and affected parties to requirements, inherited controls, evidence, launch authority, monitoring, incidents, remedy, material-change review, and retirement. Each stage produces an auditable artifact and a decision rather than a policy statement.

Lifecycle stage	Required artifact	Operational decision
Context and affected parties	Intended-use statement, prohibited uses, stakeholder map, decision-impact analysis	Is this use legitimate and within organizational authority?
Risk and requirements	Harm model, legal and policy obligations, measurable acceptance criteria	Which risks must be prevented, bounded, transferred, or accepted?
Controls and dependencies	Control inventory, supplier evidence, data and model lineage, tool permissions	Are local and inherited controls sufficient for the operating envelope?
Evaluation and assurance	Assurance case, disaggregated results with uncertainty, robustness and security evidence, sustainability accounting	Does the evidence support launch, restricted launch, or rejection?
Launch authority	Signed decision record, residual-risk owner, rollback and appeal paths	Who may authorize deployment, and who may stop it?
Operation and incident response	Monitoring thresholds, escalation owners, incident log, remedy workflow	When must the system degrade, roll back, notify, compensate, or suspend?
Material change	Change classification, impact assessment, revalidation scope	Does a new model, dataset, tool, region, or use invalidate prior approval?
Retirement	Decommission plan, retention and deletion record, user and dependent-system notice	How are access, data, models, interfaces, and unresolved harms closed out?

Named frameworks organize this work at different levels. The National Institute of Standards and Technology (NIST) AI Risk Management Framework structures activity around Govern, Map, Measure, and Manage; ISO/IEC 42001 specifies an organizational AI management system; ISO/IEC 23894 supplies AI risk-management guidance; and the recommendations of the Organisation for Economic Co-operation and Development (OECD) and the United Nations Educational, Scientific and Cultural Organization (UNESCO) state broader principles and public responsibilities (Tabassi 2023; International Organization for Standardization and International Electrotechnical Commission 2023b, 2023a; Organisation for Economic Co-operation and Development 2024; UNESCO 2022). Table 0.224 maps those perspectives onto the same operating lifecycle rather than treating them as interchangeable checklists.

Table 0.224: Framework Crosswalk: Public frameworks differ in scope and legal status, but their durable systems contribution is complementary. They help organizations establish authority, identify and measure risk, operate controls, and reassess evidence through change and retirement.

Lifecycle responsibility	NIST AI RMF emphasis	Management-system and public-policy emphasis
Establish context, affected parties, and authority	Govern and Map	Organizational context, leadership, stakeholder participation, and human oversight
Measure risk and assemble evidence	Measure	Risk assessment, documented objectives, evaluation, transparency, and traceability
Decide, operate, and respond	Manage	Operational controls, accountability, incident response, remedy, and continual improvement
Reassess change and retirement	Govern and Manage	Change management, corrective action, lifecycle review, and decommissioning obligations

Three details keep this lifecycle from becoming ceremonial. First, fairness estimates must carry denominators, confidence intervals, and data-coverage limits; a noisy subgroup gap should trigger investigation, not automatic claims of either discrimination or safety. Second, sustainability evidence belongs in the same assurance record, because the functional unit, system boundary, carbon signal, water accounting, embodied-impact allocation, uncertainty, and quality constraint determine whether an environmental claim is comparable or actionable. Third, systems in which a model's output triggers actions, such as calling an external API or retrieving documents into its context, need an authorization boundary independent of model alignment. Tool identities, least-privilege scopes, approval requirements, spend and rate limits, output validation, provenance, and revocation must be versioned and monitored because model-generated tool arguments and retrieved content remain untrusted inputs.

Approval expires when its supporting assumptions no longer hold. A change of foundation model, training distribution, retrieval corpus, tool access, deployment region, user population, decision purpose, or human workflow can be *material* even when the application code is unchanged. The change record should identify which claims are invalidated and select the smallest defensible revalidation scope. At the end of service, retirement must revoke credentials, stop dependent interfaces safely, apply retention and deletion rules, preserve required audit evidence, notify affected users and downstream operators, and leave an owner for unresolved appeals or harms. Governance covers the system after launch and after shutdown, rather than solely at the moment a review board signs a release.

↩ The sustainability measurement contract, which fixes the functional unit, system boundary, carbon signal, and attribution rule, is established in section 12.

Core Principles and the ML Lifecycle

A continuous integration pipeline can block a release when an evaluation detects a 15 percent drop in accuracy specifically for elderly users. Unlike a failing unit test or a latency regression, which the pipeline can check deterministically, a subgroup result requires a specified population, sufficient evaluation data, and an agreed acceptance criterion. Responsible AI translates those commitments into deployment gates. The continuous integration/continuous deployment (CI/CD) pipeline enforces the approved rule, while the accountable reviewer interprets uncertainty and decides whether the evidence supports release, restricted use, or remediation.

That release gate is one instance of a general translation from principle to enforceable requirement. Transparency discloses how the system as a whole was built and governed: its data sources, training

procedure, intended uses, and known limitations. Explainability is narrower, producing evidence about the model's behavior on particular decisions for a specified audience. Together they make the system inspectable by the developers, auditors, and affected people who must judge it. Fairness constrains how selection rates, error rates, or the meaning of a score may differ across population subgroups; its violations can compound through feedback loops, as in predictive policing, while the service remains technically available. Privacy bounds what the system reveals about the people whose data it uses, safety and robustness bound how it fails, and accountability assigns owners who can trace, remedy, and answer for its outcomes. Two further principles govern the objective and its supervision. Value alignment[2] asks whether the objective itself reflects legitimate human intent, and human oversight[3] preserves the ability of people to supervise, correct, or halt automated decisions. The sections that follow develop the first group in turn; alignment and oversight return where autonomy and human workflows make them binding, in section 25 and section 29.

[2] **Value Alignment**: The problem of ensuring AI systems optimize for human values rather than proxy objectives. Russell (2021) argues that specifying the objective is harder than optimizing it. The engineering consequence is that the training objective becomes a governed artifact with an owner and a review path, not a fixed input chosen once by the modeling team.

[3] **HITL (Human-in-the-Loop)**: Human participation in model decisions adds response delay and improves safety only when the operator can identify and correct the relevant error. Staffing demand depends on the decision arrival rate, the fraction escalated, and the time required per review. In ML serving architectures, HITL requires routing logic, escalation criteria, and queue management that reshape the inference pipeline.

Integrating principles across the ML lifecycle

No principle ensures a responsible system on its own. The principles overlap, compete for priority when budgets are finite, and act in different phases of development. Table 0.225 maps the responsible AI lifecycle across the major phases of ML system development: data collection, model training, evaluation, deployment, and monitoring.

Table 0.225: Responsible AI Lifecycle: Embedding fairness, explainability, privacy, accountability, and robustness throughout the ML system lifecycle, from data collection to monitoring, ensures these principles become architectural commitments rather than post-hoc considerations. The table maps these principles to specific development phases, revealing how proactive integration addresses potential risks and promotes trustworthy AI systems.

Principle	Data Collection	Model Training	Evaluation	Deployment	Monitoring
Fairness	Representative sampling	Bias-aware algorithms	Group-level metrics	Threshold adjustment	Subgroup performance
Explainability	Documentation standards	Interpretable architecture	Model behavior analysis	User-facing explanations	Explanation quality logs
Transparency	Data source tracking	Training documentation	Performance reporting	Model cards	Change tracking
Privacy	Consent mechanisms	Privacy-preserving methods	Privacy impact assessment	Secure deployment	Access audit logs
Accountability	Governance frameworks	Decision logging	Audit trail creation	Override mechanisms	Incident tracking
Robustness	Quality assurance	Robust training methods	Stress testing	Failure handling	Performance monitoring

Fairness and privacy constraints begin at data collection; robustness likewise depends on data quality and training choices, while accountability requires named owners before deployment. Their operational consequences become visible when the system serves users and teams must respond to failures. Explainability spans the full lifecycle, supporting model debugging at design time and evidence about decisions during use. This mapping reinforces that responsible AI is a multiphase architectural commitment, not a post-hoc compliance step.

Resource requirements and equity implications

Each cell of table 0.225 is work that someone must pay for. Representative sampling needs data acquisition, subgroup metrics need labeled evaluation data and analysis capacity, and user-facing explanations need serving capacity. Organizations with limited computing budgets may therefore be unable to provide every safeguard in the table, so the people they serve receive fewer protections than the users of a better-resourced deployment. Large-scale deployments that depend on accelerator clusters and low-latency connectivity can likewise exclude users whose networks or devices cannot meet those assumptions.

How high these barriers are depends on what each safeguard costs, and that cost is paid in energy as well as capacity. Private training can add computational work, fairness monitoring needs data collection and analysis capacity, and some explanation methods require many additional model

evaluations per decision; section 6 sizes these costs. Model-specific algorithms, approximation, caching, and selective generation change that cost; asynchronous execution moves work off the request path without eliminating it. A high-traffic system serving these features to 10 million users must budget the work on the paths where it runs, then determine whether existing capacity is sufficient or additional resources are needed.

Infrastructure placement adds two further distributional effects. Data-center siting decisions that optimize power cost and latency can concentrate local environmental costs on nearby communities that had little say in the decision.[4] Connectivity also affects access to safeguards. A user-facing explanation that requires a low-latency round trip to a data center may miss its delivery deadline on a slow network, whereas server-side fairness monitoring can analyze recorded decisions without another user round trip. The architecture must distinguish immediate user needs from audit work that can run asynchronously. Computational equity therefore depends on placement decisions as well as algorithmic design, and the assurance case should record these distributional effects alongside the model's group metrics.

4 **Data Center Environmental Justice**: Data center siting can place backup diesel generators, cooling heat, and grid strain near communities that had little say in the siting decision; the distributional effect must be measured site by site rather than assumed. For ML fleet operators, placement decisions that optimize power cost and latency therefore carry a governance obligation to account for the local costs they create.

Architectural Trade-Offs

A centralized audit can join predictions, demographic attributes, and delayed outcomes when access to those records is authorized. A federated model running on a million smartphones may provide no such joined dataset. The same fairness criterion then requires a different evidence path, such as restricted aggregate statistics or a separately governed audit sample. Deployment architecture determines where the evidence can be assembled and who can act on it.

These architectural differences redistribute both feasible safeguards and accountable parties. The comparison that follows uses four deployment tiers that differ in compute, connectivity, and update authority. *Cloud ML* runs on serving replicas in data-center fleets. *Edge ML* runs on gateways and servers near the data source. *Mobile ML* runs on phone-class devices with sustained power budgets of a few watts, the regime of Archetype C (Federated MobileNet). *TinyML* runs on microcontrollers with hundreds of kilobytes of memory and milliwatt power budgets, an extreme below Archetype C that often lacks any update channel. The volume's other lighthouses sit in the cloud tier. Archetype A (GPT-4/Llama-3) and Archetype B (DLRM at Scale) serve from data-center fleets, and even Archetype C relies on a cloud aggregator for its fleet-level evidence. TinyML has no lighthouse of its own; it appears here because it marks the limit case, a deployment whose safeguards must be fixed before it ships. Resource availability, latency constraints, user interface design, and the presence or absence of connectivity determine whether responsible AI principles can be enforced consistently across deployment contexts. The same model may support rich explanation, continuous monitoring, and centralized auditability in the cloud, yet require static validation and simplified safeguards when embedded in a device with intermittent connectivity. Tier choice is also an equity decision, because a safeguard that needs a data-center round trip reaches only users whose connectivity supports it (section 4).

↩ Archetype C (Federated MobileNet) and its few-watt per-device envelope are established in section 11.

Design trade-offs

The tier differences reveal a general pattern: responsible AI trade-offs are architectural trade-offs. Machine learning systems do not operate in idealized silos; they must navigate competing objectives under finite resources, strict latency requirements, evolving user behavior, and regulatory complexity.

Cloud-based systems can provision extensive monitoring, fairness audits, interpretability services, and privacy-preserving tools using shared compute and storage. Centralized data handling also concentrates exposure to surveillance and breaches. On-device execution can keep raw data local, but user control still depends on interfaces, permissions, retention rules, and update authority. Postdeployment visibility, fairness instrumentation, and adaptation depend on which evidence and maintenance paths the architecture provides.

Tensions between goals often become apparent at the architectural level. A wearable gesture recognizer or autonomous braking controller may have too little latency budget for a costly explanation on every inference. Designers can evaluate lightweight methods within that budget, precompute suitable summaries, or retain decision records for asynchronous analysis. The explanation's audience and required delivery time determine which of these paths can satisfy the obligation.

Conflicts also emerge between personalization and fairness. Systems that adapt to individuals based on local usage data often lack the global context necessary to assess disparities across population subgroups. Ensuring that personalized predictions do not result in systematic exclusion requires careful architectural design, balancing user-level adaptation with mechanisms for group-level equity and auditability.

Privacy and robustness objectives can also conflict. Logging rare events or user outliers can help diagnose reliability failures, but the records may expose sensitive behavior. If raw records must remain local or encrypted, the improvement process needs an authorized evidence path, such as restricted review or aggregate diagnostics. Robustness requirements belong in the initial design; subsequent refinement depends on whether the retained evidence and update mechanism support it.

Energy budgets can constrain the frequency and placement of safeguards. Reducing model cost does not itself require weaker fairness monitoring; teams can compare local checks, sampled audits, and off-device analysis against the evidence and response deadlines. In federated learning, clipping, noise generation, and communication can consume additional energy, but their placement and cost depend on the mechanism. A central-DP design may add noise at the curator, whereas a local-DP design places randomization on the client. Battery feasibility therefore requires measuring the chosen implementation.[5]

[5] **Energy-Privacy Trade-off**: Privacy-preserving techniques like differential privacy and secure multi-party computation can increase computation, communication, and battery use. In federated learning on mobile devices, the equity implication is direct: users with older devices, limited data plans, or limited battery life may be excluded from privacy-protected AI services, creating a system where privacy protection becomes contingent on hardware resources.

Together, these deployment examples reveal a broader systems-level challenge. Responsible AI principles cannot be considered in isolation. They interact, and optimizing for one may constrain another. The appropriate balance depends on deployment architecture, stakeholder priorities, domain-specific risks, the consequences of error, and the environmental and distributional impacts of computational resource requirements. Responsible machine learning design therefore depends on making those constraints explicit before choosing methods, so that the resulting system can be evaluated against the deployment context it must actually inhabit.

Comparing these settings (table 0.226) demonstrates that no deployment context dominates across all principles; each makes distinct architectural compromises. Cloud systems support computationally expensive explanation methods and centralized fairness monitoring. Shapley-value attribution (SHAP) credits each input feature with its average marginal contribution to a prediction across subsets of the other features, and local interpretable model-agnostic explanations (LIME) fit a simple surrogate model to many perturbed copies of one input; both require many extra model evaluations per explained decision, and section 15 develops them. Cloud deployments can afford that work, but introduce privacy risks through data aggregation. Edge and mobile deployments offer stronger data locality but limit postdeployment observability and global fairness assessment. TinyML systems face particularly tight budgets; their validation, monitoring, and update plans must reflect the connectivity and storage actually provided. These constraints also decide which users receive which safeguards, the equity question raised in section 4. Understanding these deployment constraints provides necessary context for the technical methods that operationalize responsible AI principles in practice.

Table 0.226: Deployment Trade-Offs: Responsible AI principles manifest differently across deployment contexts due to varying constraints on compute, connectivity, and governance; cloud deployments support complex explainability methods, while TinyML severely limits them. Prioritizing certain principles like explainability, fairness, privacy, safety, and accountability requires careful consideration of these constraints when designing machine learning systems for cloud, edge, mobile, and TinyML environments.

Principle	Cloud ML	Edge ML	Mobile ML	TinyML
Explainability	Supports complex models and methods like SHAP and sampling approaches	Needs lightweight, low-latency methods like saliency maps	Requires interpretable outputs for users, often defers deeper analysis to the cloud	Severely limited due to constrained hardware; mostly static or compile-time only
Fairness	Large datasets allow bias detection and mitigation	Localized biases harder to detect but allows on-device adjustments	High personalization complicates group-level fairness tracking	Minimal data limits bias analysis and mitigation

Principle	Cloud ML	Edge ML	Mobile ML	TinyML
Privacy	Centralized data at risk of breaches but can use strong encryption and differential privacy methods	Sensitive personal data on-device requires on-device protections	Tight coupling to user identity requires consent-aware design and local processing	Distributed data reduces centralized risks but poses challenges for anonymization
Safety	Vulnerable to hacking and large-scale attacks	Real-world interactions make reliability important	Operates under user supervision, but still requires graceful failure	Needs static safety envelopes, watchdogs, and fail-safe behavior
Accountability	Corporate policies and audits allow traceability and oversight	Fragmented supply chains complicate accountability	Requires clear user-facing disclosures and feedback paths	Traceability required across long, complex hardware chains
Governance	Applicable law and oversight; centralized evidence and named owners	Applicable law and oversight; allocate duties across integrators	Applicable law and oversight; coordinate platform and app duties	Applicable law and oversight; preserve evidence through servicing and retirement

The deployment analysis identifies where each obligation must be implemented. A constrained endpoint may log bounded decision metadata while a backend aggregates subgroup metrics, stores audit evidence, and serves explanations. An offline endpoint instead needs a defined evidence-retrieval and update path, or an operating envelope that does not depend on unavailable controls. Device capacity limits placement and frequency; it does not by itself remove the fleet operator's responsibility to provide the control.

Tier placement decides where a control runs; it does not decide which control a defect needs. As the hiring case at the start of the chapter showed, predictive accuracy on historical labels does not establish that the target is legitimate. Threshold postprocessing can change a decision-rate disparity, while an unsuitable target may require changes to labels and training, and both need validation and operational ownership.

The principle sections that follow, beginning with fairness in section 7, share one structure. Within each principle the methods do one of three jobs. Detection exposes a problem early enough to intervene, mitigation changes data, training, or decision policy to reduce the harm, and validation assembles the evidence a launch authority needs to accept the remaining risk. Each job carries its own cost in accuracy, computation, and implementation effort.

Computational overhead of responsible AI techniques

The next sections unpack the technical methods in detail, but their systems cost is visible before the implementation details. Table 0.227 shows the performance impact of responsible AI techniques: detection, mitigation, validation, privacy, and explanation techniques each impose different costs on training, inference, memory, and accuracy. Reading the table first lets engineers evaluate responsible AI methods as deployable system choices rather than as abstract ethical labels.

Table 0.227: Performance Impact of Responsible AI Techniques: The table gives planning ranges for capacity exercises rather than universal benchmark results. Differential privacy and fairness constraints mainly affect training and validation budgets; explainability cost depends on the value function and algorithm: model-agnostic subset enumeration grows combinatorially, sampled kernel methods require repeated evaluations, and model-specific TreeSHAP can compute exact attributions in polynomial time under its tree and value-function assumptions. The differential-privacy accuracy range runs from fine-tuning a publicly pretrained model (low end) to training from scratch on a small image dataset (high end), the two regimes whose published private accuracies are compared in section 26. Adversarial training is shown as a multiple of standard training cost because each step first generates an attack; a seven-step attack costs about eight passes per batch. These sizing ranges help engineers reason about production constraints before choosing a responsible-AI implementation.

Technique	Accuracy Loss	Training Overhead	Inference Cost	Memory Overhead
Differential Privacy (DP-SGD)	1–20%	30–300%	Minimal	10–20%
Fairness-Aware Training	1–3%	5–15%	Minimal	5–10%

Technique	Accuracy Loss	Training Overhead	Inference Cost	Memory Overhead
Sampled KernelSHAP	N/A	N/A	50–200%	20–100%
Exhaustive SHAP Enumeration	N/A	N/A	50–1,000×	50–200%
Adversarial Training	3–15%	2–11×	Minimal	50–100%
Federated Learning	5–15%	200–500%	Minimal	100–300%

These overhead ranges should be read as scenario assumptions, not as claims that any cited paper establishes a single universal tax.[6] Actual overhead varies significantly based on model architecture, dataset size, attack strength, explanation method, hardware, communication pattern, and implementation quality. The point is architectural: responsible-AI controls consume real training, serving, memory, or review capacity, so they must be budgeted before launch. These overhead figures are also where the equity argument of section 4 becomes concrete: an organization unable to afford one configuration must assess alternatives such as a smaller model, sampled audits, or asynchronous explanations against the same required evidence. Resource limits can restrict the feasible deployment scope; they do not remove the obligation.

Computational costs and architectural constraints determine which controls a deployment can sustain. Preventive requirements guide design before harm occurs; detection then tests whether observed behavior remains within those requirements. Effective correction needs evidence of the problem, an investigation path, and an owner able to act.

6 **Measurement Context**: The sizing exercise assumes common production reference points such as GPU training, GPU or CPU inference, image/text/tabular models, and benchmark datasets. These figures are not canonical constants; they are order-of-magnitude planning anchors for deciding whether a safeguard belongs inline, asynchronous, offline, or in the training pipeline.

Fairness and Bias Mitigation

A loan model can approve 70 percent of one group's applicants and 40 percent of another's while reporting a single headline accuracy. Exposing that gap, deciding which gap the deployment must close, and keeping it visible after launch are separate engineering tasks: formal criteria define the disparity, statistical tests decide whether it exceeds sampling noise, and monitoring infrastructure tracks it in production.

Fairness in machine learning

Automated decisions in hiring, lending, and healthcare affect millions of people, and historical data used to train these systems encodes decades of structural inequality. The engineering question is how to formalize "equitable treatment" in a way that a system can measure and enforce.

Definition 16.2: Algorithmic fairness

Algorithmic fairness is a family of criteria for evaluating equitable treatment and outcomes in automated decisions. The group-based criteria developed here compare selection rates, errors, or score meaning across protected demographic groups; individual and causal criteria ask different questions.

1. **Significance**: Formal criteria make competing fairness goals measurable. Selection-rate or error-rate constraints can change predictive accuracy, while group-specific calibration asks whether predicted probabilities match observed outcome frequencies within each protected group. The trade-offs depend on the criterion, data, and decision policy. Satisfying one criterion does not establish equitable treatment by itself.
2. **Distinction**: Unlike average accuracy, which can hide subgroup disparities, group fairness examines the joint distribution of predictions and outcomes within each group, $p(\hat{Y}, Y \mid G)$. The chosen criterion determines which conditional rates to compare; a group gap diagnoses that metric rather than fairness as a whole.

3. **Common pitfall**: A frequent misconception is that there is a single "fair" solution. In reality, fairness requirements can conflict under specified assumptions. The simplest conflict pairs demographic parity with equalized odds, both defined below. With unequal base rates (the fractions of actual positive cases within groups), the two can hold together only if each group's true positive rate equals its false positive rate. The positive decision is then equally likely among actual positives and actual negatives, so it carries no information about the outcome. A constant classifier satisfies both; any informative classifier must give one up. A deeper result about calibrated scores follows the formal definitions.

Fairness in machine learning presents challenges that aggregate accuracy cannot reveal. The core requirement is that automated systems not disproportionately disadvantage protected groups. Because these systems are trained on historical data, they are susceptible to reproducing and amplifying patterns of systemic bias embedded in that data. Without careful design, machine learning systems may unintentionally reinforce social inequities rather than mitigate them.

A widely studied example comes from the healthcare domain. An algorithm[7] used to allocate care management resources in US hospitals was found to systematically underestimate the health needs of Black patients (Obermeyer et al. 2019). The model used healthcare expenditures as a proxy for health status, but due to longstanding disparities in access and spending, Black patients were less likely to incur high costs. As a result, the model inferred that they were less sick, despite often having equal or greater medical need. This case illustrates how seemingly neutral design choices such as proxy variable selection can yield discriminatory outcomes when historical inequities are not properly accounted for. Correcting an invalid proxy can improve alignment with the actual clinical goal. A separate engineering question is whether imposing a particular fairness constraint reduces accuracy on a fixed target. That scenario-specific reduction, the fairness tax, is priced in section 9 once the criteria and the decision thresholds that enforce them have been defined.

Practitioners need formal methods to evaluate fairness given these risks of perpetuating bias. The fairness gates of section 7 already encode two such criteria, demographic parity (equation 0.60) and equalized odds (equation 0.61), as release thresholds. This section examines what each criterion measures, adds equality of opportunity and calibration, and shows why the criteria conflict. Before developing them, it helps to frame the notation as a way to express competing fairness goals, not as a proof exercise.

7 **Healthcare Algorithm Scale**: The study examined one widely used algorithm in a broader class of risk-prediction tools that industry estimates placed at approximately 200 million U.S. patients annually (Obermeyer et al. 2019). In the study's simulated correction at the automatic-enrollment threshold, the fraction of Black patients among those identified for additional care rose from 17.7 percent to 46.5 percent. These are shares of the selected population, not the fraction of all Black patients identified or a measured nationwide enrollment reduction.

Systems Perspective 16.1: Fairness notation as engineering vocabulary

Before examining formal definitions, the fundamental challenge is that fairness can mean different operational constraints. A system may treat everyone identically, account for different baseline conditions, optimize equal outcomes, preserve equal opportunity, or enforce equal treatment. These choices lead to different mathematical criteria, each capturing a different aspect of fairness.

The next subsections introduce formal fairness definitions using probability notation. These metrics (demographic parity, equalized odds, equality of opportunity) appear throughout ML fairness literature and shape regulatory frameworks. Focus on understanding the intuition: what each metric measures and why it matters, rather than mathematical proofs. The concrete examples after each definition illustrate practical application. If probability notation is unfamiliar, start with the verbal descriptions and return to the formal definitions later.

Suppose a model $h(x)$ predicts a binary outcome, such as loan repayment, and let G represent a sensitive attribute with subgroups a and b. The field uses three widely adopted fairness definitions:

Demographic parity

Definition 16.3: Demographic parity

Demographic parity is the fairness constraint where a model's positive prediction rate is independent of group membership ($\Pr(h(x) = 1 \mid G = a) = \Pr(h(x) = 1 \mid G = b)$).

1. **Significance**: It requires equal positive prediction rates across groups, regardless of underlying base-rate differences. It does not require identical outcomes for every individual, and it is not universally more restrictive than error-rate or calibration criteria.
2. **Distinction**: Unlike equalized odds (which focuses on error rates such as false positives), demographic parity focuses only on the final prediction, ignoring the relationship between the prediction and the ground truth.
3. **Common pitfall**: A frequent misconception is that demographic parity ensures "fairness." Equal approval rates can coexist with unequal error rates. Changing decision thresholds can alter who receives approval without changing the underlying scores or their calibration; the resulting decisions and the meaning of the scores require separate evaluation.

Demographic parity asks whether favorable outcomes, such as loan approval or treatment referral, occur at equal rates across subgroups defined by a sensitive attribute G. Formally, the model satisfies demographic parity if:

$$\Pr\left(h(x) = 1 \mid G = a\right) = \Pr\left(h(x) = 1 \mid G = b\right)$$

In the healthcare example, this criterion would ask whether Black and white patients were referred for care at the same rate, regardless of their underlying health needs. That may sound like equal access, but it ignores real differences in medical status and risk, potentially overcorrecting when needs are not evenly distributed. The limitation of ignoring base-rate differences motivates more nuanced fairness criteria.

Equalized odds

Equalized odds requires that the model's predictions are conditionally independent of group membership given the true label. Specifically, the true positive and false positive rates must be equal across groups:

$$\Pr\left(h(x) = 1 \mid G = a, Y = v\right) = \Pr\left(h(x) = 1 \mid G = b, Y = v\right), \quad \text{for } v \in \{0, 1\}.$$

That is, for each true outcome $Y = v$, the model should produce the same prediction distribution across groups $G = a$ and $G = b$. Equalized odds equalizes conditional error rates, not error counts; groups with different numbers of positive or negative cases can still experience different numbers of errors.

Applied to a binary medical referral decision, equalized odds would require equal referral rates across racial groups separately among patients who need the intervention and among those who do not, according to the chosen label Y.

Equality of opportunity

Equality of opportunity is a less stringent relaxation of equalized odds that focuses only on the true positive rate (Hardt et al. 2016). It requires that, among individuals who should receive a positive outcome, the probability of receiving one is equal across groups:

$$\Pr\left(h(x) = 1 \mid G = a, Y = 1\right) = \Pr\left(h(x) = 1 \mid G = b, Y = 1\right).$$

Equality of opportunity equalizes the approval rate among qualified individuals, who have $Y = 1$, across groups. It does not require identical decisions for every pair of qualified individuals or constrain errors among unqualified applicants.

In medical referral, this measure would require equal identification rates across racial groups among patients labeled as needing the intervention. Both error-rate criteria inherit whatever the

label Y measures, which is the lesson of the healthcare case. A model trained to predict expenditure could equalize its error rates against expenditure and still misallocate care, because expenditure is not need. The cited study measured illness burden at a given risk score rather than group error rates, so it cannot itself be scored against these criteria. The loan scenario that follows supplies the binary labels and decisions needed to calculate all three on one model, and it becomes the section's running example.

Napkin Math 16.1: Calculating fairness metrics

Problem: Calculate demographic parity across two demographic groups (100 applicants each) for a loan approval model.

Variables:

- Group A: 70 approved (40 repaid, 30 defaulted), 30 rejected.
- Group B: 40 approved (30 repaid, 10 defaulted), 60 rejected.

Math:

1. **Group A approval rate**: $\Pr(h(x) = 1 \mid G = a) = \frac{70}{100} = 0.70$.
2. **Group B approval rate**: $\Pr(h(x) = 1 \mid G = b) = \frac{40}{100} = 0.40$.
3. **Parity gap**: $0.70 - 0.40 = 0.30$ (30 percentage-point gap).

Systems insight: Evaluating demographic parity exposes group approval rate disparities regardless of ground-truth repayment capability, requiring explicit metric selection during model threshold calibration.

The next calculation assumes that repayment labels are also known for rejected applicants: among the rejected applicants in Group A, five would repay and 25 would default; in Group B, 20 would repay and 40 would default. These are hypothetical evaluation labels. A production lender ordinarily observes repayment only for approved loans, so estimating the same error rates requires additional evidence about rejected applicants and an account of how that evidence was obtained.

Napkin Math 16.2: Calculating equality of opportunity

Calculating equality of opportunity (true positive rate [TPR]):

Among applicants who *would actually repay* ($Y = 1$):

$$\Pr(h(x) = 1 \mid A = a, Y = 1) = \frac{40}{40+5} = \frac{40}{45} \approx 0.89$$

$$\Pr(h(x) = 1 \mid A = b, Y = 1) = \frac{30}{30+20} = \frac{30}{50} = 0.60$$

Disparity: $0.89 - 0.60 = 0.29$ (29 percentage-point gap in TPR)

The model violates equality of opportunity: among qualified applicants who would repay, Group A members are correctly approved 89 percent of the time while Group B members are only approved 60 percent of the time.

Calculating equalized odds (true positive rate [TPR] and false positive rate [FPR]):

The TPR values are calculated in the preceding step. For false positive rates among applicants who *would not repay* ($Y = 0$):

$$\Pr(h(x) = 1 \mid A = a, Y = 0) = \frac{30}{30+25} = \frac{30}{55} \approx 0.55$$

$$\Pr(h(x) = 1 \mid A = b, Y = 0) = \frac{10}{10+40} = \frac{10}{50} = 0.20$$

The model also has unequal false positive rates: it incorrectly approves 55 percent of Group A applicants who will default, but only 20 percent of Group B applicants who will default. This reveals the model is more "generous" with Group A even when they will not repay.

Systems insight: This model violates all three fairness criteria. Addressing one criterion does not automatically satisfy others. Whether they can all be satisfied together depends on base rates and prediction quality, the question the impossibility results address next.

The loan model's failure to satisfy all three criteria raises a broader question about their compatibility, beyond equality of opportunity alone. Its answer depends on base rates and prediction quality, and the definitions can conflict outright under deployment-specific conditions.[8] A university admissions example makes the simplest conflict, the one previewed in the algorithmic-fairness definition, concrete before the broader calibration result (Kleinberg et al. 2017; Chouldechova 2017).

Suppose a university admits only qualified applicants, and a larger fraction q_a of Group A's applicants are qualified than the fraction q_b of Group B's. Equal opportunity asks that the same fraction r of qualified applicants be admitted from each group, for example 80 percent of qualified Group A applicants and 80 percent of qualified Group B applicants. The overall admission rates are then rq_a and rq_b, which differ whenever $q_a \neq q_b$, so demographic parity fails; they match only at $r = 0$. The no-unqualified-admissions rule fixes each group's false positive rate at zero, so equal opportunity here coincides with equalized odds, and parity holds only when each group's true positive rate also falls to zero. That is the definition's condition (true positive rate equal to false positive rate) in concrete form. Relaxing the rule removes the conflict, because admitting some unqualified Group B applicants can raise Group B's overall rate to Group A's. Which constraint to give up is a value judgment about the decision, not a property the model can settle.

The fairness impossibility law (principle 24) is the canonical result, and it concerns scores rather than decisions. Calibration requires a risk score $s(x)$ to retain its probability meaning within each group, so that among members of any group assigned score s, a fraction s have the positive outcome, $\Pr(Y = 1 \mid s(x) = s, G = a) = s$; section 9 shows how to test this condition and contrasts it with equal precision after thresholding. Score balance additionally requires equal average scores across groups among people with positive outcomes and, separately, among people with negative outcomes. With unequal base rates and imperfect prediction, all three requirements cannot hold together (Kleinberg et al. 2017). The admissions conflict concerns decisions and this result concerns scores, so they constrain different criteria. The score result also does not say that a calibrated score can never meet equalized odds at a particular threshold; that is a third, narrower question. Satisfying one criterion may preclude another, so engineers must treat fairness metrics like latency budgets, explicit trade-offs chosen by stakeholders, enforced by the system, and monitored for violation. Determining which metric to prioritize requires careful consideration of the application context, potential harms, and stakeholder values as detailed in section 30. Figure 0.233 formalizes this incompatibility, charting how group calibration, positive-class score balance, and negative-class score balance converge on an infeasible joint state whenever base rates differ and predictions remain imperfect.

Figure 0.234 tracks these conflicting objectives across a classification threshold sweep from 0.15 to 0.85 for two groups with unequal base rates, plotting the resulting violations for demographic parity, equalized odds, and equal opportunity. A threshold that reduces one measured gap need not minimize the others, so the policy must specify which criterion governs the decision and evaluate the remaining gaps.

Recognizing these tensions, operational systems must treat fairness as a constraint that informs decisions throughout the machine learning lifecycle. It is shaped by how data are collected and represented, how objectives and proxies are selected, how model predictions are thresholded, and how feedback mechanisms are structured. For example, a choice between ranking vs. classification models can yield different patterns of access across groups, even when using the same underlying data.

Group metrics leave two questions unresolved. An observed disparity does not identify the mechanism that produced it, and broad demographic categories can hide disparities within their intersections. Causal analysis addresses the mechanism question through explicit assumptions; intersectional analysis examines which population divisions an audit must retain.

[8] **Fairness Impossibility Theorems**: Kleinberg et al. (2017) studies group-wise score calibration together with balance of mean scores in each outcome class. Chouldechova (2017) studies predictive parity and error-rate constraints for recidivism prediction. These are distinct conditions; their incompatibility results require assumptions on base rates and predictive performance. Demographic parity is a distinct constraint on selection rates that can also conflict with calibration or error-rate goals in practice. The systems consequence is fundamental: no amount of engineering can satisfy every normative fairness criterion in all settings, so fairness becomes a constrained multi-objective optimization requiring explicit policy choices about which criterion to prioritize for a given deployment context.

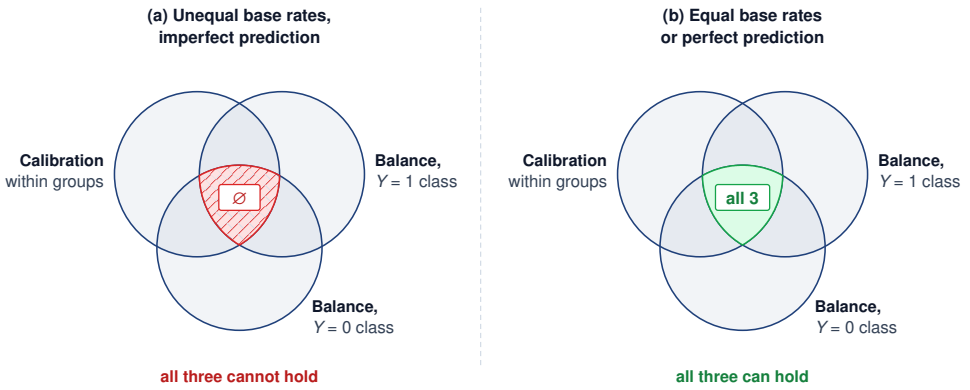


Figure 0.233: Conditional Fairness Trade-Offs: For score-based prediction, calibration within groups and equal mean scores within both outcome classes cannot all hold with unequal base rates and imperfect prediction. Equal base rates or perfect prediction are exceptional cases. This score-balance theorem is distinct from checking equalized odds at one decision threshold.

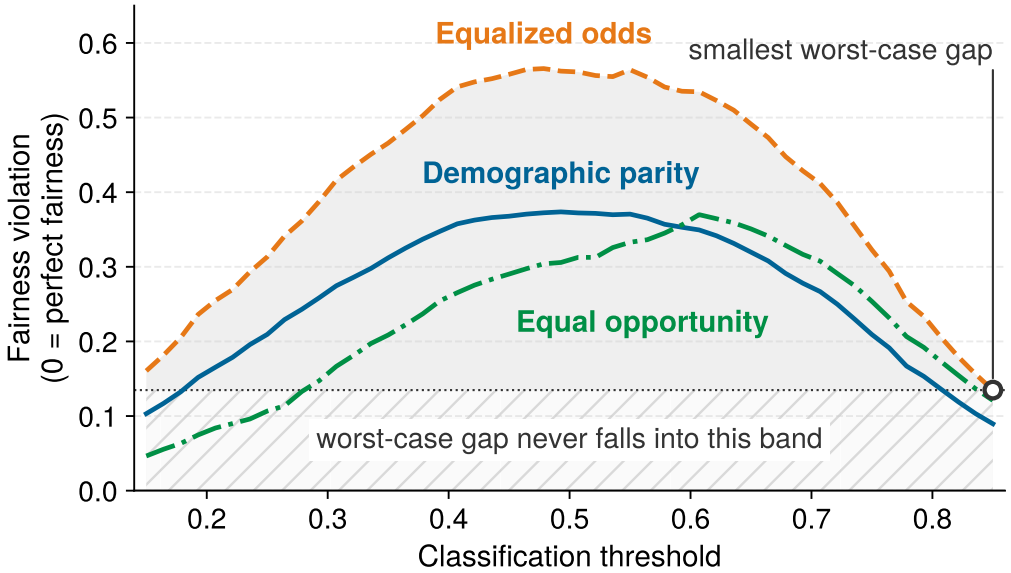


Figure 0.234: Fairness Metric Disagreement Across Thresholds: Three fairness metrics, demographic parity, equalized odds, and equal opportunity, computed on synthetic scores for two groups with differing base rates as the classification threshold varies over a nontrivial operating range. At every evaluated threshold, at least one metric is substantially violated, illustrating practical trade-offs among selection-rate, error-rate, and opportunity criteria. Trivial always-positive or always-negative classifiers fall outside the evaluated range. The shaded region marks the largest of the three violations at each threshold.

Observational and causal fairness

The preceding metrics describe associations in observed decisions: selection rates, error rates, or calibration differ across groups. They can establish a disparity without identifying the pathway that produced it. The same approval-rate gap could arise from direct use of a protected attribute, a correlated proxy, unequal access to an earlier process, measurement error, or an unobserved common cause. No comparison of observed rates alone distinguishes these mechanisms.

A causal claim adds a structural causal model whose arrows state how protected attribute G, mediators M, outcome Y, and decision $\hat{Y}$ are assumed to relate. **Counterfactual fairness** then asks whether the decision for the same individual, holding the modeled background factors fixed, would have changed in a counterfactual world where G had taken another value (Kusner et al. 2017). This


is a question about an assumed data-generating process, not a stronger version of demographic parity.

The healthcare proxy illustrates the distinction. A graph might include race $G \to$ access to care $M_1 \to$ expenditure $M_2 \to$ risk score $\hat{Y}$, alongside pathways from health need Y to expenditure. A total effect asks how changing G propagates through every modeled path. A path-specific effect isolates selected routes, such as the historically mediated access-to-expenditure path (Nabi and Shpitser 2018). Declaring one path permissible and another discriminatory is a domain and normative judgment; neither the graph nor the estimator makes that choice automatically.

Causal conclusions require assumptions that observational data alone cannot establish: which variables and arrows belong in the graph, whether relevant confounders are measured, and whether the counterfactual interventions are coherent. Different plausible structures can support different answers. Causal analysis therefore complements group metrics, domain knowledge, legal analysis, and stakeholder participation. The metrics continue to monitor realized disparities; the causal model makes the additional mechanism claim and its assumptions inspectable.

Intersectional fairness

A critical limitation of standard fairness analysis is that it often evaluates single axes of identity (for example, race or gender) independently. This can mask profound disparities that exist at the intersection of these attributes.



Error concentrates at the intersection: darker-skinned women.

For example, IBM's gender-classification system achieved 99.7 percent accuracy for lighter-skinned men but only 65.3 percent for darker-skinned women in the Gender Shades evaluation (Buolamwini and Gebru 2018). A single-axis audit can obscure such an intersectional disparity. This phenomenon, sometimes called fairness gerrymandering, requires evaluating model performance on intersectional subgroups (for example, Race×Gender) to detect and mitigate compounded biases.

An intersectional audit must specify the population slices it can identify and the evidence available within them. Work on multicalibration extends calibration checks to a specified, potentially rich family of overlapping subgroups (Hébert-Johnson et al. 2018). This does not certify every possible subgroup or every fairness criterion. It motivates evaluation and monitoring infrastructure that can examine relevant intersections while reporting where sample support or attribute availability limits the claim.

Quantitative fairness measurement

Formal fairness criteria become operational only when practitioners can measure the degree of violation and establish actionable thresholds for intervention. The mathematical framework quantifies disparities and uncertainty; domain and policy owners must justify the acceptance criteria and authorize the response. A computed gap supplies evidence for that decision rather than deciding which harms are acceptable.

Four point metrics turn the fairness criteria introduced above into numbers an auditor can threshold. Each one equalizes a different quantity, so each exposes a different failure of the same classifier. Table 0.228 defines them and scores them on the running loan example, where Group A is approved at 0.70 and Group B at 0.40, qualified-applicant true-positive rates are 0.89 and 0.60, and unqualified-applicant false-positive rates are 0.55 and 0.20.

Table 0.228: Fairness Metrics on the Loan Example: Four group-fairness metrics, each equalizing a different quantity, evaluated on the loan approval model. The disparate impact ratio is a descriptive selection-rate screen whose legal weight depends on the application; the additive differences are easier to track over time; the average absolute odds difference captures both true-positive and false-positive error gaps.

Metric	Equalizes	Formula (a, b)	Loan value	Choose it when
Disparate impact (DI) ratio (four-fifths rule) (Feldman et al. 2015)	lower approval rate divided by higher approval rate	$\frac{\min_g \Pr(h=1 \mid g)}{\max_g \Pr(h=1 \mid g)}$	$\frac{0.40}{0.70} = 0.57$	a descriptive selection-rate screen is useful; legal interpretation depends on the application
Statistical parity difference (SPD) (Calders and Verwer 2010)	additive gap in approval rates	$\Pr(h=1 \mid a) - \Pr(h=1 \mid b)$	$0.70 - 0.40 = 0.30$	comparing across groups or tracking drift against a deployment-approved gap threshold
Equal opportunity difference (Hardt et al. 2016)	true-positive rates among qualified applicants	$\Pr(h=1 \mid a, Y{=}1) - \Pr(h=1 \mid b, Y{=}1)$	$0.89 - 0.60 = 0.29$	the harm is denying deserving individuals
Average absolute odds difference (Hardt et al. 2016; Bellamy et al. 2019; Bird et al. 2020)	both true-positive and false-positive rates	$\frac{1}{2}\left[\lvert\Delta\text{TPR}\rvert + \lvert\Delta\text{FPR}\rvert\right]$	$\frac{1}{2}[0.29 + 0.35] = 0.32$	both error types matter; the metric is 0 at perfect equalized odds

The four metrics measure different quantities by construction. The disparate impact ratio of 0.57 means the lower-approval group receives approvals at only that fraction of the higher-approval group's rate, below the illustrative 0.8 screening threshold. The additive 0.30 gap, the 0.29 opportunity gap, and the 0.32 average absolute odds gap each quantify a distinct dimension of the same disparity. No single number is sufficient, which is why the impossibility results in this section force an explicit choice about which metric a deployment will prioritize.

Calibration Stated for both groups at once, a model satisfies score calibration with respect to a sensitive attribute if, among individuals assigned score s by the model, the fraction with positive outcomes equals that score within each group (Kleinberg et al. 2017):

$$\Pr(Y = 1 \mid s(x) = s, G = a) = s = \Pr(Y = 1 \mid s(x) = s, G = b), \quad \forall s$$

The condition applies at score levels supported within each group. Matching the groups' outcome frequencies is insufficient if those frequencies differ from the score itself. For hard binary predictions, a distinct condition is equal positive predictive value (PPV) (precision) among predicted positives. Groupwise score calibration does not by itself guarantee equal PPV after thresholding, because the selected groups can have different score distributions:

$$\text{PPV}(a) = \frac{\Pr(Y = 1, h(x) = 1 \mid G = a)}{\Pr(h(x) = 1 \mid G = a)} = \text{PPV}(b)$$

Evaluating this condition on the loan-approval example yields the respective predictive values:

$$\text{PPV}(a) = \frac{40}{70} = 0.571$$
$$\text{PPV}(b) = \frac{30}{40} = 0.750$$

The positive predictive value gap is $0.750 - 0.571 = 0.179$. Group B's predicted positives are actually positive 75 percent of the time, while Group A's are only 57 percent accurate. This violates

predictive parity for hard decisions and reveals that the model is less reliable when predicting approval for Group A. Demonstrating score calibration itself would require comparing observed outcome frequencies with predicted probabilities within each group, using score bins with sufficient support.

Calibration is critical for high-stakes decisions where individuals rely on predicted probabilities. A miscalibrated model systematically over- or underpredicts risk for specific groups, leading to misallocated resources and eroded trust.

Threshold setting and fairness trade-offs In practice, fairness metrics can be changed by adjusting classification thresholds per group. In the equations below, a larger score favors a positive decision, as with predicted repayment probability. Given a scoring function $s_{\text{dec}}(x)$, define group-specific thresholds $\tau_{\text{thr},a}$ and $\tau_{\text{thr},b}$ such that $h_a(x) = \mathbb{1}[s_{\text{dec}}(x) \geq \tau_{\text{thr},a}]$ for group a and similarly for group b.

To achieve demographic parity, solve:

$$\Pr(s_{\text{dec}}(x) \geq \tau_{\text{thr},a} \mid G = a) = \Pr(s_{\text{dec}}(x) \geq \tau_{\text{thr},b} \mid G = b)$$


To achieve equal opportunity, solve:

$$\Pr(s_{\text{dec}}(x) \geq \tau_{\text{thr},a} \mid G = a, Y = 1) = \Pr(s_{\text{dec}}(x) \geq \tau_{\text{thr},b} \mid G = b, Y = 1)$$

For equalized odds, both true positive and false positive rate constraints must hold simultaneously. A single deterministic threshold per group need not satisfy both. Postprocessing can instead randomize between threshold rules within each group to attain a shared pair of rates (Hardt et al. 2016). The resulting criterion constrains group-level probabilities, so validation must evaluate the randomized policy rather than only its component thresholds.

Threshold adjustment still requires evaluating the other criteria. When base rates differ (that is, $\Pr(Y = 1 \mid G = a) \neq \Pr(Y = 1 \mid G = b)$), calibration and error-rate constraints can conflict under the conditions discussed earlier. The effect of a particular threshold policy must be measured on the joint score and label distribution; a base-rate difference alone does not determine its accuracy cost.

The accuracy cost of a threshold policy becomes concrete on a separate credit model, distinct from the running loan example. Its score is a predicted default probability, so a lower score favors approval and each cutoff admits applicants below it. The scenario enforces demographic parity, the first threshold equation above, and prices the accuracy that enforcement costs.



Lifting Group B's approval rate to parity costs 4 points of accuracy.

Napkin Math 16.3: The fairness tax

Problem: Consider a credit model with 85 percent accuracy. Group A (majority) has a 20 percent default rate. Group B (minority) has a 40 percent default rate due to systemic factors. If demographic parity (equal approval rates) is enforced, what happens to accuracy?

Math:

This scenario holds Group A's approval rate fixed and raises Group B's rate to match it; demographic parity alone does not require that particular choice. The accuracy values are assumed held-out validation results, where the additional Group B approvals carry higher default risk.

1. **Unconstrained**: Model approves everyone with predicted default prob < 30 percent.
   - Group A approval: 80 percent.
   - Group B approval: 60 percent.
   - Total Accuracy: 85 percent.
2. **Constrained (parity)**: Holding Group A's rate fixed, approve Group B at 80 percent rate.
   - New threshold for Group B: Approve default prob < 50 percent.
   - The revised cutoff admits Group B applicants with higher predicted default risk than the original policy allowed.
   - New Total Accuracy: 81 percent.

Systems insight: This parity policy cost 4 percentage points of accuracy (about a 4.7 percent relative accuracy drop in this credit-scoring scenario). The drop is the scenario's fairness tax,

not a universal cost of fairness. Accuracy still measures prediction against the specified default labels; whether those labels capture the legitimate lending objective is a separate question. Engineers must report the predictive trade-off while making the target and policy assumptions explicit.

The 4 percentage points cost belongs to one parity policy on one prediction target. A different criterion moves the thresholds for a different reason, and the next scenario, which returns to the repayment-score convention, targets equal opportunity by comparing the score distributions among qualified applicants. Differential thresholds require access to sensitive attributes at inference time and raise concerns about explicit group-based treatment, which may itself be considered unfair or illegal in certain jurisdictions. The required thresholds depend on those distributions and the chosen criterion; a lower threshold for the minority group is not a universal fairness rule.

Napkin Math 16.4: Threshold for equal opportunity

Problem: Calculate group-specific thresholds required to equalize true positive rates (equal opportunity) across Group A and Group B in a credit scoring model.

Variables: Let the score $s_{\text{dec}}(x)$ be an unbounded decision score, not a calibrated probability, and write Group A as $G = a$ and Group B as $G = b$. Assume $s_{\text{dec}}(x) \mid (Y = 1, G = a) \sim \mathcal{N}(0.72, 0.15^2)$ and $s_{\text{dec}}(x) \mid (Y = 1, G = b) \sim \mathcal{N}(0.65, 0.16^2)$. These are hypothetical positive-class distributions; no negative-class distribution or prevalence is specified.

Math:

1. **Single threshold**: At $\tau_{\text{thr},a} = \tau_{\text{thr},b} = 0.60$, $\text{TPR}_a = 1 - \Phi(-0.8) \approx 0.788$ and $\text{TPR}_b = 1 - \Phi(-0.3125) \approx 0.623$, where Φ is the standard normal cumulative distribution function.
2. **Equalizing thresholds**: Preserve Group A's threshold and match its standardized cutoff, $(\tau_{\text{thr},b} - 0.65)/0.16 = -0.8$. Thus $\tau_{\text{thr},b} = 0.522$ yields the same true positive rate.
3. **Unspecified costs**: Lowering Group B's threshold cannot decrease its false positive rate, but its magnitude requires $s_{\text{dec}}(x) \mid (Y = 0, G = b)$. Precision also requires Group B's prevalence. Neither quantity follows from the positive-class distributions alone.

Systems insight: Equal opportunity determines a threshold only relative to the stated score distributions and target rate. Before deployment, evaluate the resulting false positives, precision, and review workload on representative data. Threshold policies change decisions, not the underlying score calibration.

Figure 0.235 presents a separate illustrative loan scenario, with applicants partitioned into Subgroup A (higher score distribution, blue band) and Subgroup B (lower score distribution, amber band). The summary panels contrast two operating regimes: applying a single global threshold ($\gamma_{\text{cls}} = 0.75$) approves qualified applicants in Subgroup B at only 25 percent TPR compared to 75 percent for Subgroup A, a threefold opportunity disparity. Conversely, shifting to group-adapted thresholds ($\tau_{\text{thr},a} = 0.75$ for Subgroup A and $\tau_{\text{thr},b} = 0.45$ for Subgroup B) equalizes true positive rates at 75 percent. That policy requires the authorized decision component to access the relevant group attribute and log the governing threshold. Neither the attribute lookup nor the policy decision must run on the client, but the system must preserve evidence explaining why identical scores receive different decisions.

Statistical testing of fairness violations Confidence intervals and hypothesis tests help assess whether sampling variation plausibly explains an observed disparity under a stated sampling model. For demographic parity, the null hypothesis $H_0 : \Pr(h(x) = 1 \mid G = a) = \Pr(h(x) = 1 \mid G = b)$ can be tested using a two-proportion z-test when observations are independent and expected approval and rejection counts in both groups support the normal approximation. Repeated decisions for the same

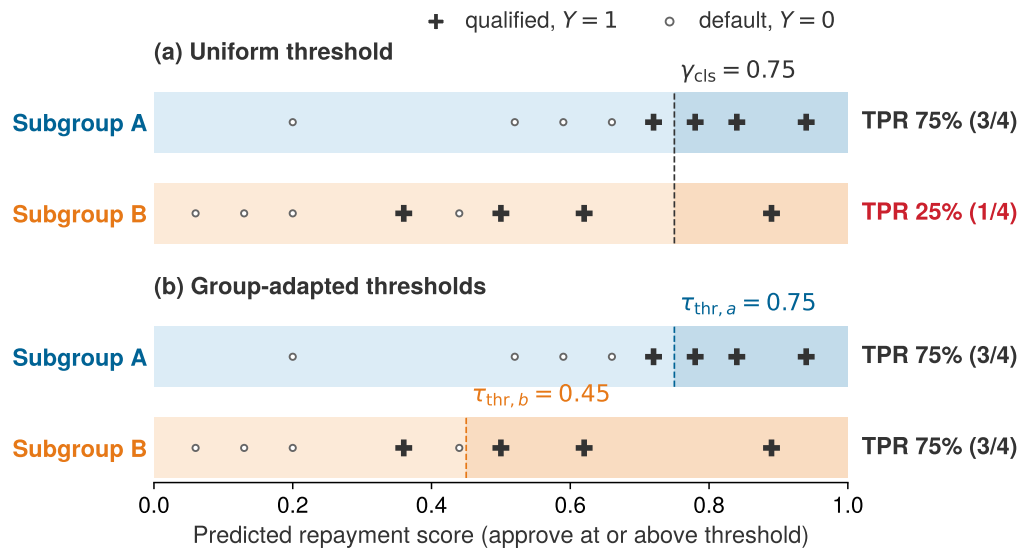


Figure 0.235: Threshold-Dependent Fairness: Varying classification thresholds across subgroups allows equal true positive rates but introduces complexity in model serving and necessitates access to sensitive attributes at inference time. Achieving fairness requires careful consideration of subgroup-specific performance, as a single threshold may disproportionately impact certain groups, highlighting the tension between accuracy and equitable outcomes in machine learning systems.

person or correlated observations require an uncertainty estimate that accounts for that dependence. Under the independent-sample assumptions, the test statistic is:

$$z = \frac{\hat{p}_a - \hat{p}_b}{\sqrt{\hat{p}(1-\hat{p})\left(\frac{1}{n_a} + \frac{1}{n_b}\right)}}$$

where $\hat{p}_a$ and $\hat{p}_b$ are the sample approval rates, $\hat{p} = \frac{n_a\hat{p}_a + n_b\hat{p}_b}{n_a + n_b}$ is the pooled proportion, and n_a, n_b are sample sizes.

For the loan example with $n_a = n_b = 100$, $\hat{p}_a = 0.70$, $\hat{p}_b = 0.40$:

$$\hat{p} = \frac{100(0.70) + 100(0.40)}{200} = 0.55$$
$$z = \frac{0.70 - 0.40}{\sqrt{0.55(0.45)(0.02)}} = \frac{0.30}{0.0704} = 4.26$$

With $z = 4.26$ (far exceeding critical value $z_{\alpha/2} = 1.96$), the test rejects H_0 and concludes the demographic parity violation is statistically significant at $p_{\text{val}} < 0.001$. Similar tests can be constructed for equal opportunity and equalized odds by restricting to subpopulations where $Y = 1$ or $Y = 0$ respectively. Statistical significance does not establish the severity or acceptability of a disparity. Even a small rate difference can affect many people at fleet scale; the decision depends on the consequences and approved criteria as well as magnitude. Conversely, large disparities in small samples may not reach statistical significance but still warrant investigation or intervention.

The running loan example establishes how to measure a disparity and its sampling uncertainty. Applying that framework still requires identifying whether a positive decision grants a benefit or imposes a burden, checking the criteria a headline metric misses, and choosing the requirement that fits the deployment.

Napkin Math 16.5: Auditing a confusion matrix

Problem: A fraud detection model operates on two groups. What do demographic parity and equal opportunity reveal about the deployment?

Variables:

- **Group A (majority)**: TP $= 450$, FP $= 50$, FN $= 30$, TN $= 470$ ($n_{\text{records}} = 1000$).
- **Group B (minority)**: TP $= 180$, FP $= 70$, FN $= 120$, TN $= 630$ ($n_{\text{records}} = 1000$).

Math:

1. **Demographic parity (positive prediction rate)**: $\Pr(\hat{Y} = 1)$.
   - Group A: $(450 + 50)/1000 = 0.50$.
   - Group B: $(180 + 70)/1000 = 0.25$.
   - **Gap**: 0.25. The lower-to-higher flag-rate ratio is $0.25/0.50 = 0.5 < 0.8$. Fraud flags are adverse outcomes, so this descriptive ratio is not a four-fifths employment-selection test.
2. **Equal opportunity (TPR)**: $\text{TP}/(\text{TP} + \text{FN})$.
   - Group A: $450/(450 + 30) = 0.938$.
   - Group B: $180/(180 + 120) = 0.60$.
   - **Gap**: 0.338. (Severe violation).

Systems insight: Here a positive prediction flags suspected fraud, rather than granting a benefit as in the loan example. Equalizing detection rates therefore requires weighing missed fraud against false accusations. Lowering Group B's threshold may catch more fraud but can also increase false alarms; the score distributions are needed to quantify the effect on predictive parity.

The running loan model fails every criterion at once, which can suggest that a single headline metric would have caught it. A second hypothetical loan model, deliberately different from the running example, shows the opposite risk, in which one criterion is satisfied exactly while the others fail (table 0.229).

Unlike the running model, whose false positive rates differ (0.55 against 0.20), this model approves would-be defaulters at the same 20 percent rate in both groups. Equalized odds would require both true positive rates and false positive rates to match, so the table shows the narrower case of false-positive-rate parity, not full equalized odds.

Table 0.229: Disaggregated Fairness Metrics: A hypothetical loan approval system satisfies equalized false positive rates (0 percentage-point gap) but violates demographic parity (15 percentage-point approval gap) and equal opportunity (30 percentage-point TPR gap). Production systems must document the selected criteria and evaluate candidate policies against them.

Metric	Definition	A	B	Gap
Approval Rate	(TP + FP) divided by total	55%	40%	15 pp
True Positive Rate	TP divided by positives	90%	60%	30 pp
False Positive Rate	FP divided by negatives	20%	20%	0 pp
Positive Predictive Value	TP divided by predicted positives	82%	75%	7 pp

The table shows that one fairness metric can appear satisfied while other metrics expose substantial disparities, so a deployment must decide in advance which criterion governs it.

Example 16.1: Choosing a fairness metric

Scenario: A hiring recommendation engine must select its primary fairness constraint before production launch across heterogeneous applicant pools. The accountable reviewers prioritize equal access for qualified applicants and have independently validated qualification labels for both selected and rejected applicants.

Diagnosis: Demographic parity forces equal selection rates regardless of candidate qualification, while calibration requires predicted probabilities to match outcome frequencies within each group. Equal opportunity specifically mandates equal true positive rates among qualified applicants ($TPR_a = TPR_b$), directly matching the goal of equal opportunity for qualified talent.

Systems lesson: Metric selection is a governance decision that sets the operational objective of the serving pipeline. System designers must align the mathematical constraint with the domain's legal and ethical requirements before training or thresholding.

The chosen fairness definition determines which error trade-off the system is allowed to make, so the choice precedes optimization against that criterion. These calculations, and the choice behind them, point to the chapter's central thesis. A model can satisfy a specified fairness criterion, but responsibility depends on the system that uses it. Data collection, labels, modeling choices, evaluation procedures, and decision thresholds all affect the resulting outcomes. Postprocessing can repair a selected rate disparity without resolving an invalid target or an unsupported deployment. Privacy, explainability, robustness, and accountability likewise require evidence about the relevant pipeline, beyond properties of the weights. A fairness policy is therefore realized through coordinated data collection, evaluation, threshold policy, and monitoring across the lifecycle (table 0.225), and group-specific thresholds are one possible intervention within that policy, not a universal requirement.

The system boundary extends past the model's decisions to the infrastructure that runs them, because who can reach the safeguards and who bears their environmental costs are distributional effects of the same system (section 4). Collecting the evidence creates a further constraint, because demographic attributes useful for auditing may also increase privacy exposure. Governance must justify both the fairness claim and the data practices used to support it.

Fairness constraints

Fairness also presents a deployment problem, and its binding constraint is data visibility. A cloud platform with authorized access to demographic labels and outcomes can compute group-level metrics, run fairness-aware training, and audit post-hoc. A federated[9] or on-device deployment, the regime of Archetype C (Federated MobileNet), needs an explicit evidence path, such as aggregate client statistics or a separately governed audit sample. Without sufficient evidence, the corresponding metric is unmeasurable; local execution alone does not make the audit impossible. The fairness row of table 0.226 shows how this limit varies by tier, and two of its consequences recur across deployments.

The first consequence concerns decision policy. Equal aggregate accuracy across groups does not establish equal opportunity under a uniform threshold, as the illustrative gap in figure 0.235 demonstrates. A deployment must select and evaluate a policy against its approved criterion; group-specific thresholds are one possible intervention, not a requirement imposed by edge execution. The second consequence sharpens the personalization conflict raised in section 5. Local adaptation aims to improve a user's utility, whereas individual fairness requires similar individuals to receive similar decisions under a task-relevant similarity metric (Dwork et al. 2012). Personalization does not establish that requirement, and adaptation on sparse or unrepresentative observations can reinforce existing gaps. When the relevant evidence stays local, fleet operators need an authorized way to assess the resulting disparities. Section 29 analyzes the feedback mechanism and its intervention points; the deployment consequence is that a fleet which cannot centralize outcomes must budget an explicit evidence path for detecting it.

That evidence path creates a further responsible AI tension. Keeping sensitive data local reduces centralized exposure, while fleet-level audits still need adequate group statistics. Privacy architecture

[9] **Federated Learning and Fairness**: Google's public Gboard trial illustrated training across devices without centralizing raw examples. Model updates alone do not necessarily reveal the demographic labels and outcomes needed for a fairness audit. The deployment therefore needs an authorized evidence path, which may use aggregate statistics or a separate audit sample, with communication cost, privacy protection, and statistical uncertainty evaluated for that design.

(section 14) determines which records or aggregates may cross the boundary and under what protections.

Bias detection and monitoring

Suppose a nationally deployed credit model begins rejecting applicants from a specific ZIP code at twice its previous rate. Monitoring can expose that change before a periodic audit, but the rate alone does not establish its cause. An investigator must check population changes, data quality, and decision policy against the approved fairness criteria. Bias detection turns formal definitions into operational telemetry, using slice-based analysis to identify subpopulations whose outcomes warrant examination.

Measurement costs and intervention points

The criteria of section 7 define what a disparity is and how to test one. Computing them continuously on a production system that serves thousands of predictions per second is where the engineering cost appears, and that cost has computational, data, and organizational parts that decide which metrics a system can afford to monitor.

Measurement overhead arises because computing group-specific metrics requires maintaining separate statistics for each protected group. For k groups and m metrics, this requires $\mathcal{O}(km)$ additional counters and $\mathcal{O}(km)$ statistical tests per evaluation cycle. Streaming counters can update cheaply per prediction, with statistical tests scheduled at a separate evaluation interval. Profiling the number of groups, windows, and tests determines whether sampling or asynchronous aggregation is needed; request rate alone does not establish that choice.

Data requirements depend on the metric. Error-rate criteria need outcome labels (Y) as well as sensitive attributes (G) for a sample that supports the intended population claim; demographic parity needs group membership and decisions but not outcomes. In federated or privacy-preserving settings, collecting the required evidence may conflict with privacy goals. Encrypted aggregation or differentially private group statistics can limit exposure, with their assumptions and estimation error included in the audit.

Sensitive-attribute availability requires an explicit governance and engineering decision. A system may use authorized direct collection, restricted audit records, encrypted or differentially private group statistics, or an offline sample. If it uses inferred attributes, the audit must evaluate inference errors rather than treat the inferred groups as known. Each choice changes the available evidence and the privacy risk created by monitoring. When the evidence cannot support a metric, the system must report that limitation instead of interpreting missing measurements as fair behavior.

Threshold selection demands domain expertise and stakeholder input to establish acceptable disparity thresholds. The four-fifths rule is a screening convention from U.S. employment selection, not a universal legal test for lending or fraud detection and not a determination of unlawful discrimination. Context-specific harm assessments, statistical uncertainty, and applicable legal requirements should inform thresholds. Document threshold rationale to support audits and regulatory compliance.

Temporal stability requires monitoring fairness metrics over time to detect degradation due to distribution shift, feedback loops, or model updates. Automated alerting (for example, "alert if $|\text{SPD}| > 0.15$ for 7 consecutive days") defines when an owner receives a signal. The persistence window can reduce sensitivity to brief fluctuations but also delays response, so its acceptability depends on the harm and exposure during that interval. Section 29 develops the monitoring and response path.

Offline and CI-stage audits are the first place these metrics run, and open-source toolkits such as Fairlearn package the per-group bookkeeping (Bird et al. 2020).

Listing 0.25 runs that bookkeeping as an offline or CI-stage audit. Applied to the running loan example, its per-group table would report approval rates of 0.70 for Group A and 0.40 for Group B, the disparate impact ratio of 0.57 that falls below the 0.8 screening threshold in table 0.228. That comparison is an audit signal, not a lending-law verdict. The architecture must supply aligned decisions and group membership through an authorized audit path. Metrics that require outcome labels must use the relevant observed outcomes rather than substitute past decisions; an offline audit does not require exposing group attributes throughout runtime serving.

Listing 0.25: Bias Detection with Fairlearn: Illustrative audit excerpt for evaluating a loan-approval model across demographic groups. The excerpt assumes aligned arrays of observed outcomes, predictions, and demographic labels.

```
import numpy as np
from fairlearn.metrics import MetricFrame, selection_rate
from sklearn.metrics import accuracy_score, precision_score

def false_positive_rate(y_true, y_pred):
    y_true, y_pred = np.asarray(y_true), np.asarray(y_pred)
    negatives = y_true == 0
    if not negatives.any():
        return float("nan")  # No observed negatives: rate is unmeasurable.
    return ((y_pred == 1) & negatives).sum() / negatives.sum()

# Loan approval model evaluation across demographic groups
mf = MetricFrame(
    metrics={
        "approval_rate": selection_rate,
        "accuracy": accuracy_score,
        "precision": precision_score,
        "false_positive_rate": false_positive_rate,
    },
    y_true=loan_repaid_actual,  # observed repayment outcome, not past approval
    y_pred=loan_approvals_predicted,
    sensitive_features=applicant_demographics["ethnicity"],
)

# NaN means a group lacks negative examples, not that its FPR is zero.
# Display performance disparities across groups
print("Loan Approval Performance by Group:")
print(mf.by_group)
# Hypothetical output on the running loan example:
# approval_rate 0.70 for group A, 0.40 for group B
```

Practical implementation is often shaped by limitations in data access and system instrumentation. In many real-world environments, especially in mobile, federated, or embedded systems, sensitive attributes such as gender, age, or race may not be available at inference time, making it difficult to track or audit model performance across demographic groups. Data collection and labeling strategies are essential for fairness assessment throughout the model lifecycle. Without attributes at inference time, group-specific thresholds may be infeasible, but restricted offline audits can still guide data changes, retraining, or a revised policy that does not require an attribute lookup on each request. Even when data is available, continuous retraining pipelines that incorporate user feedback can reinforce existing disparities unless explicitly monitored for fairness degradation. For example, an on-device recommendation model that adapts to user behavior may amplify prior biases if it lacks the infrastructure to detect demographic imbalances in user interactions or outputs.

Fairness interventions may be applied at different points in the pipeline, but each comes with system-level implications. Preprocessing methods change the training distribution through sampling, reweighting, or augmentation. Their data requirements depend on the method; group-targeted reweighting needs group information, while feature augmentation also needs access to the affected examples. Versioning and lineage must preserve which transformation produced the training data. In-processing approaches instead embed fairness constraints directly into optimization. They require support for the chosen loss or constrained solver and may add training work or validation requirements.

↩ Feature versioning and the lineage records that trace each training input are established in section 6.

At the serving layer, postprocessing methods apply an approved decision rule to model outputs. Group-specific thresholds require the component choosing the threshold to obtain authorized group information; other policy rules may use different inputs. The dual-threshold policy diagrammed in figure 0.235 ($\tau_{\text{thr},a} = 0.75$, $\tau_{\text{thr},b} = 0.45$) therefore needs a controlled attribute lookup and a record of the applied policy, but not propagation of the attribute through every routing and inference component. Access controls should limit that exposure. Validation must evaluate the resulting decisions, operational stability, and applicable restrictions on attribute use.

Multicalibration[10] extends the calibration requirement to a specified family of computationally identifiable subgroups, which can overlap (Hébert-Johnson et al. 2018). Its implementation must support the chosen subgroup family, calibration-error estimation, and model corrections; the required resources depend on that scope and the available data. This work can occur in backend training infrastructure even when the resulting model runs on a constrained endpoint. A training-time result does not establish calibration after deployment conditions change. If telemetry cannot support renewed subgroup audits, the operator must record that evidence limitation and restrict the approved operating envelope accordingly.

Mitigation also decays after launch. A fairness-aware model may degrade if retraining pipelines omit fairness checks, if logging cannot track subgroup outcomes, or if user feedback introduces biases absent from the training distribution, so retraining protocols need subgroup-labeled validation data under data-governance review. Deciding which disparity to remediate, and at what cost to other objectives, remains a stakeholder decision (section 30). The architecture's job is to make each disparity visible, in time, to the owner who must make that decision.

[10] **Multicalibration**: Developed by Hébert-Johnson et al. (2018), this technique seeks calibrated predictions across many computationally identifiable, intersecting subgroups, addressing the failure mode where global calibration masks severe miscalibration for minority intersections. The systems cost comes from repeated subgroup auditing and model updates rather than from a fixed multiplier. Multicalibration is one important scalable approach for diverse platforms where single-axis fairness audits miss compounded disparities, but it is not the only possible fairness strategy.

Real-time fairness monitoring architecture

Implementing responsible AI principles in production systems requires architectural patterns that integrate fairness monitoring, explainability, and privacy controls directly into the model serving infrastructure. Figure 0.236 partitions this production infrastructure into two decoupled tiers: a synchronous request path that enforces access control, data minimization, and low-latency inference, staged alongside an asynchronous governance tier that ingests bounded execution evidence and delayed labels to drive fairness auditing, post-hoc explanations, and owner-governed release gates.

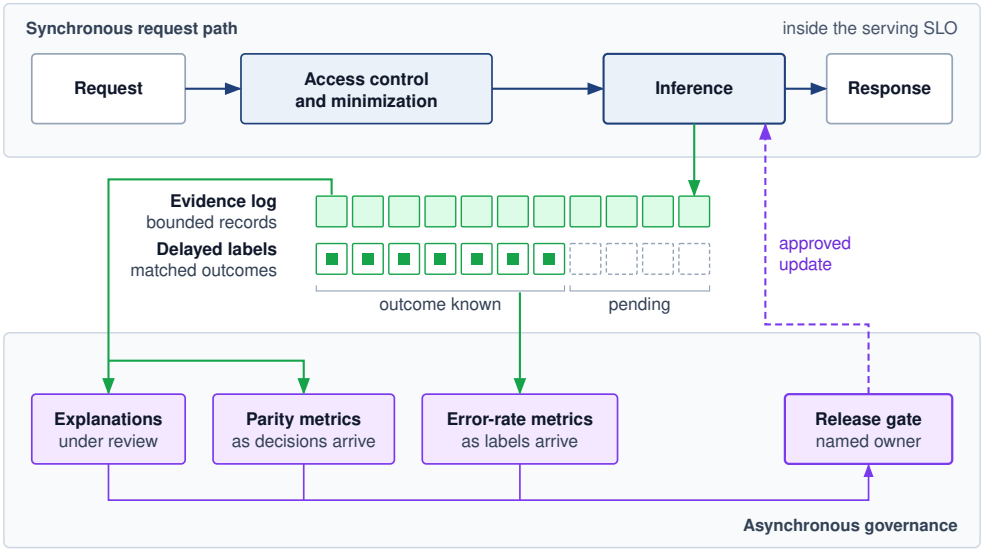


Figure 0.236: Production Responsible AI Architecture: The request path performs access controls, minimization, and inference. Bounded evidence collection feeds asynchronous fairness monitoring and explanation services. Delayed outcomes support label-dependent metrics; a governed update path returns approved changes to serving.

The request path applies access controls and data minimization before inference and records only the evidence needed for the approved monitoring policy. Group-level fairness analysis and expensive explanations can run asynchronously; synchronous checks must fit the serving service-level objective (SLO). Delayed labels enter the analysis path when outcomes become available, and a named owner approves model or policy changes.

Real-time fairness monitoring updates prediction-only metrics such as demographic parity as decisions arrive, maintaining rolling statistics across protected groups. Label-dependent metrics such as equalized odds and equality of opportunity update when delayed outcomes or audited labels

arrive. Groups whose labeled windows are too small must remain visible as having insufficient evidence, with a defined collection or escalation policy. The system flags supported disparities that exceed configured thresholds and separately reports gaps in coverage. Storage and compute requirements depend on the number of groups, decision segments, and retention windows.

The explanation engine generates evidence for the audience and decision under review. Its budget depends on the method and model; exact model-specific attribution may be feasible where exhaustive subset evaluation is not. Approximation, caching, selective generation, and asynchronous execution offer different cost and delivery-time trade-offs. Listing 0.26 illustrates the monitoring part of this architecture, collecting predictions and computing rolling group metrics with threshold alerts. It omits delayed outcome ingestion, the full equalized-odds calculation, and explanation generation, so it is a partial implementation rather than a complete governance service.

This simplified pattern separates metric availability from metric values: an unavailable comparison is not a zero disparity. A production monitor must also enforce required group coverage, sample-size policies, and freshness before interpreting a result. The overhead ranges summarized in table 0.227 explain why fairness monitoring, privacy transformations, and explanation generation need explicit capacity budgets. Request metadata collection may be synchronous, while metric aggregation, delayed-label analysis, and explanation generation can run asynchronously under their own freshness requirements. These overheads must be balanced against reliability and compliance requirements when designing production systems.

Checkpoint 16.1: Operationalizing bias detection

The bias-detection and monitoring sections turned static fairness definitions into live telemetry: slice-based detection with Fairlearn, CI-stage audits, production monitoring of demographic parity and equalized odds, the evidence paths that federated and on-device deployments require, and the distinction between observing a disparity and remediating it.

Detecting the disparity

- ☐ **Serving-path detection**: identify the request metadata needed to detect a rising rejection rate for one ZIP code, and explain how asynchronous aggregation can detect that change within an agreed monitoring delay.
- ☐ **Metric selection**: explain why the running loan example's approval rates of 70 percent for Group A and 40 percent for Group B do not select a fairness criterion. State the harm priority, label validity, and outcome evidence needed to choose one; then justify a criterion if reviewers prioritize avoiding denial to applicants who would repay.

From signal to action

- ☐ **Detection vs. remediation**: explain why a fairness alert with no remediation owner is evidence without action, and name what the system must add to close that loop.
- ☐ **Constrained deployments**: reason about why slice-based detection may be infeasible in a federated deployment where demographic labels cannot be centralized, and infer the implication for safeguard selection.

Privacy and Data Governance

Every fairness audit and monitor in the preceding section consumed demographic evidence, and that evidence is itself sensitive data. The threat models and privacy mechanisms of chapter 20 provide the technical controls; governance defines the evidence, ownership, and lifecycle interfaces that production systems require when inheriting them. A deletion workflow must identify which records and derived artifacts fall within an applicable obligation, such as an erasure requirement under the GDPR (European Parliament and Council of the European Union 2016). Removing a database row may leave replicas, backups, or trained models to address. Where removal of training influence is required, lineage, retraining, validation, deployment, and audit become part of the same workflow.

Listing 0.26: Production Fairness Monitoring: Simplified monitoring pseudocode for processing predictions and computing rolling fairness metrics. Delayed outcome ingestion is omitted.

```
import numpy as np


class RealTimeFairnessMonitor:
    # alert_threshold mirrors the |SPD| > 0.15 rule; persistence check omitted.
    def __init__(self, window_size=1000, alert_threshold=0.15, min_group=30):
        self.min_group = min_group  # Illustrative policy; set from precision needs.
        self.window_size = window_size
        self.alert_threshold = alert_threshold
        self.window = []

    async def process_prediction(self, prediction, demographics,
                                 actual_label=None):
        # Slide a fixed window over the stream, then re-check fairness.
        self.window.append((prediction, demographics, actual_label))
        self.window = self.window[-self.window_size :]
        metrics = self._compute_metrics()
        if (metrics["demographic_parity"] is not None
            and metrics["demographic_parity"] > self.alert_threshold) or (
            metrics["equalized_odds"] is not None
            and metrics["equalized_odds"] > self.alert_threshold
        ):
            await self._trigger_bias_alert(metrics)
        return metrics

    def _compute_metrics(self):
        # Bucket predictions and labels by protected group.
        by_group = {}
        for pred, demo, label in self.window:
            bucket = by_group.setdefault(
                demo.get("ethnicity", "unknown"), {"preds": [], "labels": []}
            )
            bucket["preds"].append(pred)
            if label is not None:
                bucket["labels"].append((pred, label))

        rates = [np.mean(d["preds"]) for g, d in by_group.items()
                 if g != "unknown" and len(d["preds"]) >= self.min_group]
        parity = max(rates) - min(rates) if len(rates) > 1 else None
        return {
            "demographic_parity": parity,
            # Requires sufficiently labeled outcomes per group; omitted here.
            "equalized_odds": self._equalized_odds_gap(by_group),
            "groups": {g: len(d["preds"]) for g, d in by_group.items()},
            "eligible_groups": len(rates),  # Compare with required group coverage.
        }

    def _equalized_odds_gap(self, by_group): ...
    async def _trigger_bias_alert(self, metrics): ...  # page and audit
```

Governing these risks coordinates two classes of control that are easy to conflate. Privacy mechanisms bound specified information exposures, while machine unlearning[11] targets the influence a record retains in trained weights under a stated removal criterion. A privacy guarantee does not by itself remove a record from the training history, so the assurance case must distinguish these obligations and supply evidence for each. Robustness and generative-system controls receive the same evidence-and-ownership treatment in section 23.

Core data governance principles

A fairness audit may need the same demographic field that a data-minimization policy would otherwise exclude. Privacy mechanisms constrain exposure and leakage; governance determines

whether collecting the field is justified, who may use it, and how long the audit needs it. This decision connects privacy to fairness (section 7) and to transparency (section 15). Group-based monitoring needs evidence about group membership, but the audit design determines whether operators receive individual fields, restricted audit records, or aggregate statistics. Explainability methods can also reveal information about training examples, while detailed disclosure can conflict with individual privacy. Responsible AI systems must justify the evidence collected and limit its exposure while retaining enough information to evaluate the chosen requirements.

Machine learning systems often rely on extensive collections of personal data to support model training and allow personalized functionality. This reliance introduces significant responsibilities related to user privacy, data protection, and ethical data stewardship. The quality and governance of this data directly impacts the ability to implement responsible AI principles. Responsible AI design treats privacy not as an ancillary feature, but as a core constraint that must inform decisions across the entire system lifecycle.

One of the core challenges in supporting privacy is the inherent tension between data utility and individual protection. Rich, high-resolution datasets can enhance model accuracy and adaptability but also heighten the risk of exposing sensitive information, particularly when datasets are aggregated or linked with external sources. For example, large language models trained on broad text corpora have been shown to memorize[12] specific strings that can later be retrieved through model queries or adversarial prompting (Carlini et al. 2021).

Privacy risks also depend on how records are linked over time and across sources. A wearable device's heart-rate or location record can already be sensitive; combining physiological and behavioral signals can reveal additional details about a user's health, routines, or relationships. Limited visibility or control over processing, retention, and transmission makes it harder for users to understand or contest these uses.

Addressing these challenges requires understanding privacy as a system principle that entails robust data governance. This includes defining what data is collected, under what conditions, and with what degree of consent and transparency. Foundational data engineering practices, including data validation, schema management, versioning, and lineage tracking, provide the technical infrastructure for implementing these governance requirements. Responsible governance requires attention to labeling practices, access controls, logging infrastructure, and compliance with jurisdictional requirements. These mechanisms serve to constrain how data flows through a system and to document accountability for its use.

Figure 0.237 diagrams the defensive boundaries partitioning a federated training pipeline into three distinct protection tiers. Client-side data locality confines raw records and gradient clipping to edge devices, an intermediate secure aggregation protocol blinds individual updates under bounded collusion and dropout assumptions, and a trusted curator executes central differential privacy by injecting calibrated noise and tracking privacy-budget depletion with a privacy accountant before publishing the released model across the untrusted network perimeter. Here the curator is trusted to protect the aggregate and add noise correctly; protecting against that curator requires a different mechanism, such as distributed noise generation with its own assumptions. The privacy unit, clipping rule, dropout and collusion assumptions, and composition across rounds define the guarantee (Bonawitz et al. 2017; Dwork and Roth 2014).

Weak data governance can obscure both quality defects and privacy exposures, but they require different evidence. COMPAS, a proprietary recidivism-risk score used in the U.S. criminal justice system, illustrates the first kind. Limited access to model internals and training provenance constrained investigation and remediation, although external outcome audits still exposed disparities. In clinical applications, missing values or demographic skew can compromise predictive performance; neither alone establishes a privacy violation. Privacy assessment must also examine identifiability, access, and disclosure. Documentation should make these distinct risks traceable to the data practices that create them.

Privacy is not solely the concern of isolated algorithms or data processors; it must be addressed as a structural property of the system. Decisions about consent collection, data retention, model design, and auditability all contribute to the privacy posture of a machine learning pipeline. This requires anticipating risks during inference and continuous operation as well as during training. Threats such as membership inference, which infers from a deployed model's outputs whether a

11 | **Machine Unlearning**: Removing training-data influence requires a stated removal criterion; Cao and Yang (2015) develops an approach based on updating stored summaries. Full retraining on retained data provides a reference, with cost determined by the retained dataset and training procedure. The sharded sizing scenario in section 15 illustrates a smaller retraining surface under explicit cost assumptions, rather than a measured saving for every model. Where removal is required, the workflow must budget validation and redeployment as well as computation within the applicable response deadline.

↩ Federated learning, encrypted computation, and synthetic data, each bounding who can observe raw records, are established in section 23.

12 | **Model Memorization**: Carlini et al. (2021) demonstrated that GPT-2 could reproduce verbatim training strings, including contact information, through carefully crafted prompts. The systems implication is narrower but still serious: models that expose generative outputs to user-facing queries can create a privacy attack surface where the serving layer itself becomes a data exfiltration vector, requiring output filtering, rate limiting, and data-minimization controls as defense-in-depth measures.

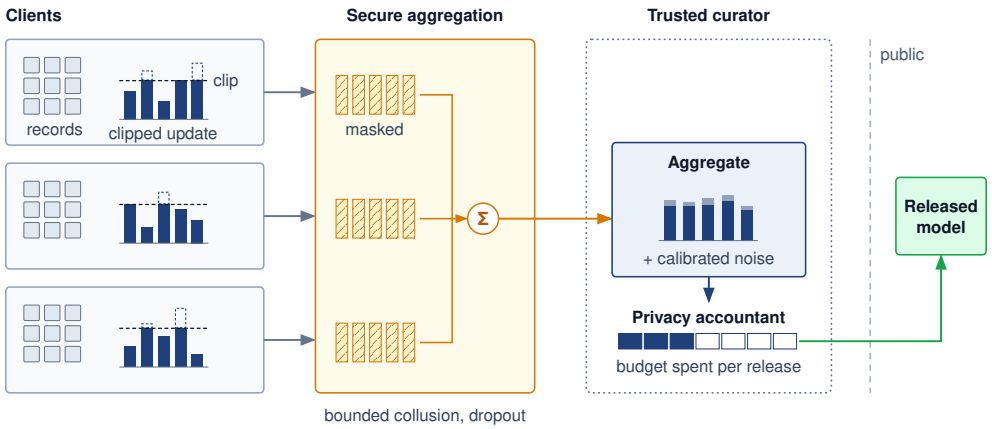


Figure 0.237: Privacy Boundaries in Federated Training: Clients retain raw records and contribute clipped updates through secure aggregation. In this central differential privacy design, a trusted curator receives the aggregate, adds calibrated noise, and accounts for repeated releases before publishing a model. Secure aggregation protects individual updates under its protocol assumptions; differential privacy bounds the released model relative to the specified privacy unit. Neither implies a universal ordering of privacy strength.

record was in its training set, underscore the importance of embedding privacy safeguards into both model architecture and interface behavior.

Legal frameworks make privacy an enforceable design concern. The GDPR, the California Consumer Privacy Act (CCPA),[13] and Japan's Act on the Protection of Personal Information establish different obligations and individual rights within their respective scopes (European Parliament and Council of the European Union 2016; California Legislature 2023; Personal Information Protection Commission, Japan 2023). An implementation must identify which rules govern its collection, use, retention, and removal of data rather than treating consent or deletion as a uniform requirement across jurisdictions. That applicability decision belongs in the system's documented data-governance requirements.

Privacy is the second instance of the system-level thesis established for fairness in section 7: it is a commitment that spans consent collection, retention policy, model design, serving, and auditability, not a property of any single stage. It requires coordination across technical and organizational domains to ensure that data usage aligns with user expectations, legal mandates, and societal norms. Rather than viewing privacy as a constraint to be balanced against functionality, responsible system design integrates privacy from the outset by informing architecture, shaping interfaces, and constraining how models are built, updated, and deployed.

Privacy mechanisms limit specified data exposures under their threat models; they do not establish that a system's decisions are safe. A model may satisfy its privacy requirements while still failing catastrophically on unexpected inputs, a complementary concern about *how systems fail* that section 23 takes up. Within privacy itself, the next decision is where the protected boundary sits in each deployment architecture.

Infrastructure architectures for privacy

Privacy inherits the same centralization trade-off that the privacy row of table 0.226 summarizes by tier. Aggregating data in the cloud enables high-capacity modeling and monitoring but concentrates exposure to breaches and surveillance, so it must be paired with strong encryption, access control, and auditability. Keeping data local on mobile, federated, or TinyML clients reduces that central exposure but changes the evidence available to fleet operators. Privacy controls must cover local storage, outputs, telemetry, and update channels; an endpoint with no update path needs controls that remain valid for its approved service life.

The constraint the table cannot show is that privacy claims must name their boundary. Differentially private training bounds training-data leakage through the released model; ordinary inference

↩ Membership inference and where it sits among likelihood-and-impact threat priorities are established in section 3.

13 **CCPA (California Consumer Privacy Act)**: CCPA grants California residents rights over covered personal information, including a deletion right subject to statutory exceptions (California Legislature 2023). For ML serving infrastructure, deletion requests create an architectural constraint that must be planned from the data pipeline forward, because raw-record deletion does not automatically remove a record's influence from trained model parameters.

on fixed weights remains within that post-processing guarantee. It does not protect new private inputs copied into service logs or unrelated private-data accesses. Interface design, retention rules, rate limiting, and access control address those separate exposures. Opaque data collection can also violate user expectations, making consent surfaces and clear disclosure part of the privacy architecture.

An architecture decides where the privacy boundary sits; the model decides how much crosses it. A service can keep raw records behind every access control and still release training data through the weights it serves, which is where algorithmic privacy preservation begins.

Algorithmic privacy preservation

Privacy constraints extend across data collection, model behavior, and user interaction. They are shaped by the architectural properties of the system and its deployment context alongside ethical and legal obligations. Technical methods for privacy preservation aim to prevent data leakage, limit memorization, and uphold user rights such as consent, opt-out, and data deletion, particularly in systems that learn from personalized or sensitive information.

Large language models have been shown to memorize and expose individual training strings, including names, locations, or excerpts of private communication (Carlini et al. 2021). This memorization presents risks for privacy-sensitive text-generating systems, such as assistants trained or adapted on user logs, where training data may encode protected or regulated content. For example, a voice or chat assistant that adapts to user speech or messages may inadvertently retain specific phrases, which could later be extracted through carefully designed prompts or queries.

The memorization risk extends beyond language models. Figure 0.238 pairs an original training-set photograph with a diffusion model's near-identical reconstruction under the study's extraction protocol (Carlini et al. 2023). The left panel shows the training image and the right panel shows the generated output, with closely matching pose, clothing, necklace, and background, but visible differences in detail. Recognizable identity alone would not establish memorization; the comparison must concern the specific training instance rather than merely the same subject. The example motivates evaluating training-data exposure without treating every similar-looking output as evidence of extraction.

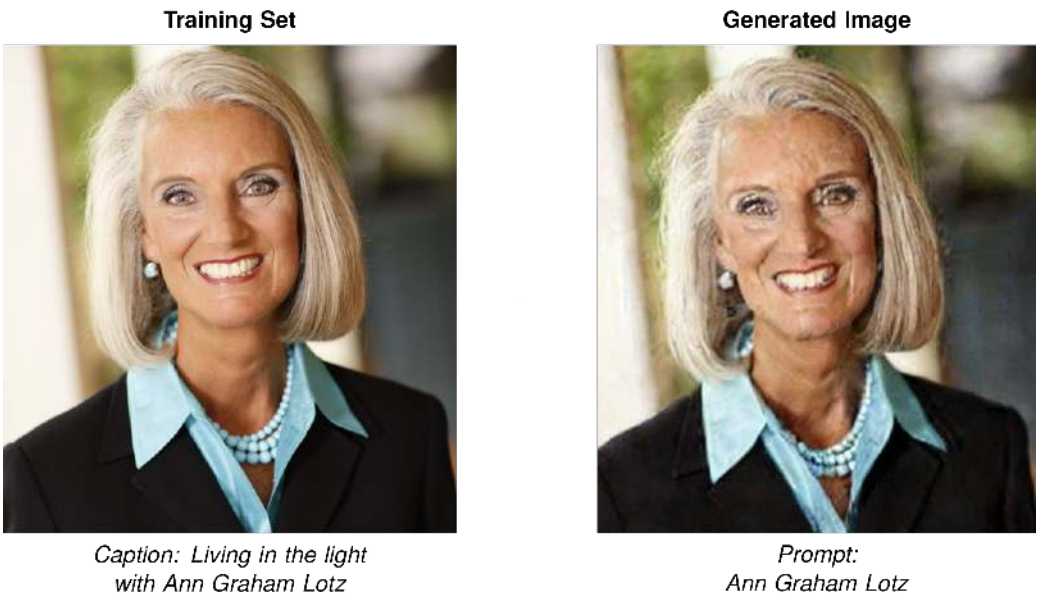


Figure 0.238: Diffusion Model Memorization: Image diffusion models can reproduce training samples (Carlini et al. 2023), revealing a risk of unintended memorization beyond language models and highlighting a general vulnerability in contemporary neural architectures. This memorization poses privacy concerns when training on sensitive datasets.

Membership inference remains a governance concern after training because even an attacker limited to model queries may infer whether a record participated in training. Other threat models give the attacker access to parameters or additional information, so the audit must specify the access it assumes. In high-stakes applications such as healthcare or legal prediction, training-set membership itself can disclose sensitive information about an individual.

For differential privacy, governance consumes the mechanism and accounting established in section 25. A differentially private stochastic gradient descent (DP-SGD) deployment must retain the clipping, noise, sampling, and composition configuration that supports its reported bound (Abadi et al. 2016). Reviewers then evaluate that bound alongside utility, subgroup performance, and the private-data accesses outside training. Naming the method is insufficient evidence for approving the complete service.

Differential privacy introduces system-level trade-offs on the path where private data is accessed. Training noise can reduce utility, and attempts to recover it through additional data or optimization steps must be evaluated with the resulting privacy accounting and compute cost. If training occurs centrally, those costs do not automatically become extra work for an edge device performing ordinary inference on the released model. Local training or local randomization places different demands on the device. Data minimization, retention limits, and access controls remain separate requirements; feature obfuscation alone provides no differential privacy guarantee.

Systems Perspective 16.2: The price of privacy

Training a large language model on sensitive messages with DP-SGD reduces training-data extraction risk, but the protection is priced in compute and accuracy.

The privacy parameter ϵ bounds privacy loss; smaller values provide a stronger bound when the neighboring relation and δ are fixed. The accountant derivation in section 25 shows what moves ϵ. Adding more noise relative to the clipping norm, sampling a smaller fraction of the data per step, or taking fewer steps each lowers it, and each also tends to cost accuracy or require more training to recover. A reproducible DP-SGD result must therefore record the dataset size, batch sampling scheme and rate, number of optimization steps, clipping norm, noise multiplier, neighboring relation, δ, and privacy accountant. Those records, not the ϵ value alone, are what a governance review retains. The three configurations below are planning assumptions whose ϵ values an external accountant would have to confirm, as the CIFAR-10 accountant inputs of section 26 illustrate. Read them for the direction of each trade. The stronger configuration doubles the noise multiplier of the weaker one but also trains for more epochs, and more steps by themselves raise ϵ; only the accountant can confirm that the extra noise more than offsets the extra steps.

Illustrative stronger-privacy configuration (assumed accountant result $\epsilon = 1$): The scenario assumes per-example gradients are clipped to norm $C = 1.0$, 40 percent of updates are affected by clipping, and the noise multiplier is $\sigma = 1.0$. It further assumes 3× more epochs, a training-cost increase from a GPT-3-scale baseline of $4.6M to approximately $13.8M, and an accuracy drop of 6 percent.

Illustrative weaker-privacy configuration (assumed accountant result $\epsilon = 8$): The scenario assumes a noise multiplier of $\sigma = 0.5$, training overhead of 30 percent, and an accuracy drop of 1 percent.

Illustrative weakest configuration (assumed accountant result $\epsilon = 10$): The scenario assumes less noise and less than 1 percent accuracy loss, with a weaker formal privacy bound than the other two configurations under otherwise comparable accounting assumptions.

These scenarios compare formal privacy bounds, utility, and training cost; none of those quantities alone establishes user trust. Once a fixed model has been trained with differential privacy, ordinary inference is post-processing and does not consume additional training-data privacy budget. Additional privacy loss must be accounted for when a postdeployment mechanism makes new accesses to private data or releases additional differentially private

statistics. The key engineering decision is to document and account for every private-data access and communicate the resulting trade-offs to users and regulators.

Released datasets need a boundary of their own. For example, k-anonymity[14] groups records in a specified release so that each quasi-identifier combination occurs at least k_{anon} times. Transforming one request without defining that reference dataset does not establish this condition. Differential privacy likewise requires a defined release mechanism, neighboring relation, and privacy accountant; noise injection alone does not establish a guarantee.

Privacy enforcement also depends on infrastructure beyond the model itself. Data collection interfaces must support informed consent and transparency. Logging systems must avoid retaining sensitive inputs unless strictly necessary, and must support access controls, expiration policies, and auditability. Model serving infrastructure must be designed to prevent overexposure of outputs that could leak internal model behavior or allow reconstruction of private data. These system-level mechanisms require close coordination between ML engineering, platform security, and organizational governance.

Privacy must be enforced throughout the machine learning lifecycle. Retraining pipelines must respect the approved deletion and data-use policies. Monitoring should collect only the identifying information justified by its purpose, with access and retention controls appropriate to that information. Privacy-aware telemetry collection and protected per-user audit trails can support investigation and remedy without making sensitive records broadly available in logs or dashboards.

The privacy assurance case therefore spans the whole pipeline. The formal privacy accountant covers the private-data accesses in its stated mechanism; interface controls, retention policies, and access records support separate claims about the surrounding service. Keeping these claims distinct makes gaps visible when a model, telemetry path, or data source changes.

Privacy preservation techniques create complex sociotechnical tensions that extend well beyond technical implementation. Differential privacy mechanisms may reduce model accuracy in ways that disproportionately affect underrepresented groups, creating conflicts between privacy and fairness objectives. These challenges require ongoing stakeholder engagement as detailed in section 30, where organizations must navigate competing values around data control, personalization, and regulatory compliance. These privacy challenges become even more complex when considering the dynamic nature of user rights and data governance.

Machine unlearning

Deleting a raw record does not remove its influence from learned parameters. When the approved deletion policy also requires addressing retained model state, machine unlearning supplies a technical response. The requirement and the evidence of removal must be specified separately; retained influence alone does not establish that every deployment violates a deletion obligation.

Privacy preservation does not end at training time. In many real-world systems, users may have rights to revoke consent or request deletion of their data, even after a model has been trained and deployed (European Parliament and Council of the European Union 2016; California Legislature 2023). When the approved response requires removing training influence, the architecture must support the chosen method and its verification. An endpoint without sufficient data, training state, or compute may need a replacement model trained elsewhere; a device with the required resources may perform the work locally. Placement follows those requirements rather than the deployment label alone.

Full retraining requires access to the permitted remaining training data and a defined training procedure. Figure 0.239 contrasts three update strategies. Retraining from scratch on the retained data, the training set with the forget set D_{forget} removed, supplies a reference for exact removal relative to that procedure. Gradient ascent on the forget set increases its loss through updates of the form $\theta + \eta \nabla \mathcal{L}$, but increased loss alone does not demonstrate removal. Sharded, isolated, sliced, and aggregated (SISA) training partitions data into isolated shards S_1, S_2, S_3 and aggregates their predictions. A deletion affects the constituent model trained on its shard; saved states before the affected slice can reduce the retraining work.

Full retraining is a useful reference, but its feasibility depends on access to the permitted remaining data, the training procedure, and sufficient compute within the response deadline. A retention

[14] **k-Anonymity**: A property of a released dataset (Sweeney 2002) requiring every combination of designated quasi-identifiers to occur in at least k_{anon} records. Generalization can achieve this property at the cost of information loss. It does not bound inference from homogeneous sensitive attributes or auxiliary knowledge and is not a per-request privacy guarantee.

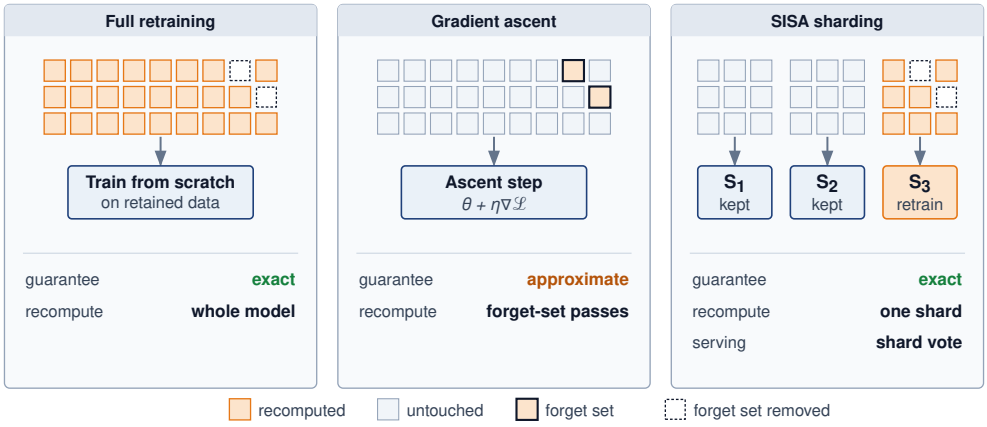


Figure 0.239: Model Update Strategies: Three approaches to removing a data point's influence. Full retraining gives exact unlearning at the highest cost; gradient ascent provides an approximate update by maximizing loss on the forget set; and SISA training partitions data into shards so only the affected shard is retrained. The accompanying cost model quantifies the full-retraining and SISA cases.

policy may remove data that retraining would need; a large training run may exceed the available budget. An alternative unlearning method must state its own data and state requirements rather than assume that avoiding full retraining also eliminates those dependencies.

Machine unlearning seeks to remove specified training influence without repeating the entire training run. Cao and Yang (2015) proposed converting suitable learning algorithms into a summation form, allowing a deletion to update the affected summaries and recompute the model. SISA instead localizes retraining to affected shards (Bourtoule et al. 2021). It still needs the retained data and training state required by that procedure. The removal claim must specify its reference and verification method; a loss increase on deleted examples is different evidence from retraining without them. Method selection therefore depends on retained state, model quality, operational cost, and the removal guarantee the deployment must support.


Napkin Math 16.6: The cost of forgetting

A user requests erasure of personal data under GDPR Article 17 ("Right to Erasure"). This scenario assumes that the approved response includes removing its influence from a model trained on 1 TB of data; that model-removal requirement is a scenario premise, not a conclusion derived from invoking the article.

Baseline (full retraining): In this sizing scenario, a 175B-parameter model at GPT-3 scale retrains on 1,024 NVIDIA A100 (80 GB SXM4) GPUs (dense FP16 $R_{\text{peak}} = 312$ TFLOP/s per accelerator at an assumed model FLOPs utilization (MFU) of about 32 percent) for approximately 36 days at a cost of roughly $4.6M.

Engineering fix: SISA training partitions data into $K = 100$ independent shards, training 100 sub-models. For one datum confined to one shard, the example retrains that shard (1 percent of data). Assuming cost and elapsed time scale linearly with the data fraction at the same resource allocation gives $46,000 and approximately 8.6 hours. This simplified estimate omits slicing, checkpoint storage, validation, and deployment overhead; it is not a measured GPT-scale SISA result.

Trade-off: The scenario assumes an accuracy drop of 3–7 percent; the cost calculation does not establish that quality result. Serving must evaluate and aggregate 100 sub-models, with latency depending on parallelism and aggregation. Batch removal cost depends on how many of the 100 shards are touched. If the 1,000 requests/day arrive independently and uniformly



For one isolated erasure, SISA cuts retraining cost about 100 times; a daily batch that touches most shards erodes the saving.

across shards, a daily batch is likely to touch nearly all of them, eroding the sharding-only saving. Concentrated requests, batching policy, and saved slice states change the work. The operating comparison must therefore include the request distribution and response deadline, rather than the shard count alone.

The motivation for machine unlearning is reinforced by regulatory frameworks. Deletion or erasure rights under laws such as GDPR, CCPA, and similar statutes in other jurisdictions can create pressure to account for personal data used in training (European Parliament and Council of the European Union 2016; California Legislature 2023). Machine unlearning is a technical strategy for reducing or removing a deleted record's influence where model state itself may retain personal data, but the legal requirements are context-dependent and not a universal statutory command to retrain every model. High-profile incidents in which generative models have reproduced personal content or copyrighted data highlight the practical urgency of integrating deletion-aware mechanisms into responsible system design.

From a systems perspective, machine unlearning introduces nontrivial architectural and operational requirements. Systems must be able to track data lineage, including which datapoints contributed to a given model version. This often requires structured metadata capture and training pipeline instrumentation. Additionally, systems must support user-facing deletion workflows, including authentication, submission, and feedback on deletion status. Verification may require maintaining versioned model registries, along with mechanisms for testing the stated removal guarantee against its reference training procedure. These operations must span data storage, training orchestration, model deployment, and auditing infrastructure, and they must be robust to failure or rollback.

Resource-constrained deployments amplify these challenges further. A TinyML device may lack the compute needed for retraining while still accepting a replacement model trained elsewhere. Unlearning then requires fleet inventory, authenticated updates, and evidence that affected versions have been replaced or retired. If no update path exists, operators must plan for physical servicing or withdrawal; initial data minimization reduces exposure but does not erase influence already present in deployed weights. Even in cloud-based systems, unlearning must coordinate model replicas, snapshots, and logs.

The need to remove training influence should be assessed during architecture and policy design, when teams can still plan the required lineage, retained state, and update paths. Retrofitting those capabilities after deployment may require reconstructing provenance or rebuilding training infrastructure. The assurance case should specify which removal obligations apply, how the chosen method will be evaluated, and how approved replacement models reach deployed instances.

Machine unlearning represents a shift in privacy thinking, from protecting what data is collected to controlling how long that data continues to affect system behavior. This lifecycle-oriented perspective introduces new challenges for model design, infrastructure planning, and regulatory compliance, while also providing a foundation for more user-controllable, transparent, and adaptable machine learning systems.

Explainability and Transparency

A rejected loan applicant, a clinician questioning a risk score, and an auditor reconstructing a contested decision each need a different account of the same model output, on a different deadline. Serving them requires disclosure about the system as a whole, explanation methods whose cost and fidelity fit the deployment, and an appeal path through which the affected person can act on what is disclosed.

The need for transparency

Machine learning systems are frequently criticized for their lack of interpretability. In many cases, models operate as opaque "black boxes," producing outputs that are difficult for users, developers, and regulators to understand or scrutinize. This opacity presents a significant barrier to trust, particularly in high-stakes domains such as criminal justice, healthcare, and finance, where accountability and the right to recourse are important. For example, ProPublica's evaluation of COMPAS, the

recidivism-risk score whose provenance limits arose in section 12, found racial disparities in false positive and false negative rates.[15] The proprietary nature of the system, combined with limited access to interpretability tools, hindered efforts to investigate or address the issue.

The COMPAS case separates the two properties defined among the core principles. What investigators lacked was transparency, meaning disclosure of data sources, training procedures, evaluation protocols, and known limitations. Explanations of individual scores would have been a different kind of evidence, about particular decisions rather than the system. An attribution describes how a method assigns influence under its assumptions rather than supplying a causal account, a normative justification, or a path to recourse. Section 19 develops the methods, their costs, and their limits; the principle established here is that both properties are obligations the architecture must provision.

The importance of explainability and transparency extends beyond technical considerations to legal requirements. In many jurisdictions, these principles are legal obligations rather than optional guidance. Under the General Data Protection Regulation (GDPR), solely automated decisions with legal or similarly significant effects trigger Article 22 safeguards and related transparency duties, including meaningful information about the logic involved under access and notice provisions, subject to statutory exceptions (European Parliament and Council of the European Union 2016; European Data Protection Board 2018).[16] Similar regulatory pressures in other domains reinforce the need to treat explainability and transparency as core architectural requirements.

Implementing these principles requires anticipating the needs of different stakeholders, whose competing values and priorities are examined comprehensively in section 30. Designing for explainability and transparency therefore necessitates decisions about how and where to surface relevant information across the system lifecycle.

Transparency and explainability also support system reliability over time. As models are retrained or updated, mechanisms for interpretability and traceability allow detection of unexpected behavior, enable root cause analysis, and support governance. Embedded into the structure and operation of a system, these mechanisms provide the foundation for trust, oversight, and alignment with institutional and societal expectations.

While transparency and explainability enable stakeholders to understand system behavior, they do not guarantee that this behavior is equitable. A model can be fully transparent about how it makes decisions while still systematically disadvantaging certain groups. This distinction is why the fairness criteria of section 7 remain a separate test even for a fully transparent model.

System explainability

Computational capacity, latency budget, interface design, and data access constrain both the explanation method and where it runs. A cloud worker can execute expensive SHAP or LIME attribution;[17] a constrained endpoint may use a cheaper gradient-based saliency map[18] if its runtime supports gradients. Devices unable to generate explanations locally may preserve bounded decision records for later analysis by a backend or during servicing, the per-tier split that the explainability row of table 0.226 records.

Audience and timing further constrain explanation design. An end user may need a concise summary ("elevated heart rate during sleep"), while a developer or auditor may need attribution maps, concept activations, or decision traces. The required evidence depends on what each person must understand or do. A drone or industrial controller must keep explanation work within its control deadline or move that work off the critical path. Financial and clinical workflows likewise need a specified delivery deadline, which may allow analysis after the automated decision but before review or appeal. Planning for the audience and deadline, within the deployment's resource limits, makes interpretability a design constraint.

Models of interpretability

A loan officer using a traditional rules-based system can identify the rule that produced a rejection: "The debt-to-income ratio exceeds 40 percent." A neural network, however, produces a score through many interacting operations for which no single rule supplies the decision rationale. Explainability and interpretability provide bounded evidence about model behavior, such as feature influence, sensitivity, representative examples, or counterfactual changes. That evidence can support investigation and communication, but it becomes a justification only when the institution connects it to a

15 **COMPAS (Correctional Offender Management Profiling for Alternative Sanctions)**: ProPublica's 2016 analysis found Black defendants were falsely flagged as future criminals at nearly twice the rate of white defendants (45 percent vs. 23 percent false positive rate). The proprietary, black-box nature of the system limited full inspection of model internals and training data, making the source of the observed error-rate disparity harder to investigate. Error-rate parity and predictive parity are distinct criteria, so the evaluation must name the criterion rather than treating one rate as a complete fairness verdict.

16 **GDPR (General Data Protection Regulation) Article 22**: Article 22 gives data subjects protections against decisions based solely on automated processing that produce legal or similarly significant effects, with exceptions for contract necessity, authorization by law, or explicit consent plus safeguards (European Parliament and Council of the European Union 2016). Related notice and access provisions, including Article 15, require meaningful information about the logic involved for qualifying automated decision-making, and EDPB guidance treats those duties as part of a broader profiling and automated-decision governance regime (European Data Protection Board 2018). For ML systems, this creates an architectural constraint: high-stakes automated-decision systems need explanation, recourse, and governance infrastructure rather than opaque serving-only APIs.

valid decision policy, and it becomes recourse only when the user can take a feasible action that the system will honor.

Explanation evidence plays a role in system validation, error analysis, incident investigation, user communication, and some compliance workflows. In high-stakes domains such as healthcare, financial services, and autonomous decision systems, explanation methods can generate hypotheses about spurious correlations that engineers must test independently. For instance, a saliency or sensitivity analysis might indicate that a diagnostic model responds to image artifacts rather than medical features; controlled evaluation must then determine whether that dependence is causal and operationally significant. For qualifying automated decisions under GDPR-style access and notice provisions, systems may need to provide meaningful information about the logic involved, reinforcing the need for systematic support for explanation, documentation, and contestability.

Two scopes of explanation place different demands on the system. Local explanations characterize influences or sensitivities around an individual prediction, so their cost depends on which decisions are explained and whether results can be reused. Global explanations characterize broader model behavior, using model structure, representative inputs, or aggregated decision evidence. They may be computed offline or updated as new evidence arrives. Scope describes what the explanation covers; the method and delivery requirement determine where and when it runs.

Explainability methods can be broadly categorized based on when they operate and how they relate to model structure. Post-hoc methods are applied after training, but they are not necessarily black-box methods. Model-agnostic approaches such as LIME (Ribeiro et al. 2016) and KernelSHAP can operate through model queries, whereas input gradients, integrated gradients[19] (Sundararajan et al. 2017), and gradient-weighted class activation mapping (GradCAM)[20] (Selvaraju et al. 2017) require differentiable-model access to gradients or internal activations. Other SHAP implementations (Lundberg and Lee 2017) may exploit model structure.

Post-hoc approaches are widely used in image and tabular domains, where explanations can be rendered as saliency maps or feature rankings. To illustrate how SHAP attribution works in practice, consider a trained random forest model predicting loan approval (approve $= 1$, deny $= 0$) based on three features: `income`, `debt_ratio`, and `credit_score`. For a specific applicant who was denied, with income of $45,000, debt ratio of 0.55 (55 percent of income goes to debt), and credit score of 620, the model outputs $\Pr(\text{approve}) = 0.08$, that is, denial with probability 0.92. SHAP values, based on Shapley values from cooperative game theory,[21] measure each feature's contribution to moving the approval probability from a baseline (the expected prediction over a declared background distribution, here $\Pr(\text{approve}) = 0.50$) to this individual prediction.

The contribution of a feature depends on which other features are already known, so adding income first and adding it last can shift the prediction by different amounts. SHAP resolves that ambiguity by averaging a feature's marginal contribution over every order in which the features could be added, under a specified value function. In this illustrative decomposition the averaged contributions are -0.05 for `income`, -0.25 for `debt_ratio`, and -0.12 for `credit_score`.

Shapley values are additive, so the contributions sum from the baseline to the prediction: $0.50 - 0.05 - 0.25 - 0.12 = 0.08 = \Pr(\text{approve})$, which is $\Pr(\text{deny}) = 0.92$. Under this attribution setup, debt ratio has the largest assigned contribution to the output, followed by credit score and income. This ranking is a hypothesis about model sensitivity under the chosen background distribution, not evidence that debt ratio caused the decision or that lowering it below 40 percent would flip the output. A recourse claim requires a separately validated counterfactual that respects feature dependencies, immutable attributes, feasible user actions, and the decision policy that will apply when the user returns.

The computational cost depends on the attribution algorithm. Enumerating all subsets would evaluate $2^3 = 8$ coalitions in this example and $2^{20} \approx 1$ million for twenty features. A random forest need not use enumeration: TreeSHAP exploits tree structure to compute exact attributions under its supported value-function assumptions. KernelSHAP estimates contributions from sampled coalitions, while DeepSHAP propagates approximations through network components. Explanation capacity must therefore be budgeted for the chosen method rather than inferred from feature count alone.

Another post-hoc approach involves counterfactual explanations,[22] which estimate how a model output changes under specified input modifications. These are relevant for decision-facing ap-

17 | **LIME (Local Interpretable Model-Agnostic Explanations)**: Introduced by Ribeiro et al. (2016), LIME explains individual predictions by perturbing the input, querying the black-box model many times, and fitting a weighted linear surrogate to approximate local behavior. The systems trade-off is that explanation latency scales with the number of perturbation samples and model-call cost, so production deployments often use sampling budgets, caching, asynchronous explanation workers, or model-specific methods when the architecture permits.

18 | **Saliency Maps**: Gradient-based explanation that highlights which input regions most influenced a prediction by computing a backward pass, the same infrastructure used for training. Saliency methods are often cheaper than perturbation-heavy or subset-enumeration methods, making them attractive for edge and mobile deployments when the model supports gradients. The trade-off is that raw gradients can be noisy and may highlight input artifacts rather than meaningful features, so smoothing or repeated-gradient variants trade additional compute for more stable visualizations.

19 | **Integrated Gradients**: An attribution method that integrates gradients along the straight path from a baseline input to the actual input. Sensitivity requires a nonzero attribution when a single changed feature accounts for a changed prediction; implementation invariance requires identical attributions for functionally equivalent models (Sundararajan et al. 2017). The authors argued that most earlier attribution methods violate at least one of these axioms. These properties concern the exact method, while numerical integration introduces an approximation whose accuracy depends on the sampling of the path. The deployment must therefore budget repeated gradient evaluations and check approximation error rather than treating a fixed step count as sufficient for every model and input.

plications such as credit or hiring systems, but a mathematical output flip is not automatically recourse. A useful counterfactual must distinguish mutable from immutable features, preserve domain constraints and feature dependencies, identify an action within the user's control, and remain valid under the institution's future decision policy (Wachter et al. 2017). Counterfactual generation and validation therefore require domain models, policy versioning, and operational commitments in addition to constrained optimization.

A third class of techniques relies on concept-based explanations, which attempt to align learned model features with human-interpretable concepts. For example, testing with concept activation vectors (TCAV) represents user-defined concepts as vectors in activation space and tests how sensitive a model's predictions are to those concepts in its internal representation (B. Kim et al. 2018). These methods are especially useful in domains where subject matter experts expect explanations in familiar semantic terms. However, they require training data with concept annotations or auxiliary models for concept detection, which introduces additional infrastructure dependencies.

Post-hoc methods answer method-specific questions about model behavior. Even an exact attribution under a chosen value function does not recover a causal rationale or justify the decision policy. Approximate methods add estimation or surrogate error to those interpretive limits. Evaluation must therefore establish both what the method computes and whether that evidence serves the intended debugging, communication, or review task.

Inherently interpretable models expose a decision structure that the intended audience can inspect. Small decision trees, short rule lists, and sparse linear models with meaningful features can support this goal; a very large tree or high-dimensional linear model may not. Nearest-neighbor comparisons likewise require an understandable similarity metric and representative examples. Interpretability therefore depends on structure, features, and audience, not merely the model-family label. In high-stakes applications, model selection should evaluate whether a sufficiently accurate, inspectable model meets the task before assuming that post-hoc explanations are necessary (Rudin 2019).

Figure 0.240 arranges six model families along an interpretability continuum, grouping them into models that are interpretable by design (sparse linear models via coefficients, small decision trees via split paths), hybrid architectures (prototype and concept models via exemplars), and models requiring post-hoc explanation (tree ensembles via TreeSHAP, deep networks via gradients and SHAP, and foundation models via probing). While this ordering provides a structural heuristic across model families, dimensionality and scale can shift boundaries: a million-node decision tree or dense linear regression can prove just as opaque as a deep neural network. This distinction is central to choosing an appropriate model for a given application, particularly in settings where regulatory scrutiny or stakeholder trust is essential.


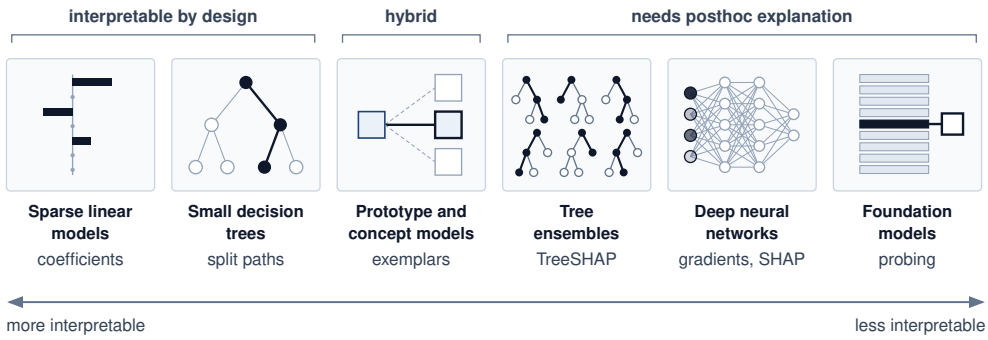


Figure 0.240: Model Interpretability Spectrum: A heuristic ordering by model family. Small linear models and shallow decision trees can offer transparent reasoning, while neural networks typically require post-hoc explanation techniques; size, feature meaning, and audience can move any model along the spectrum. This distinction guides model selection based on application needs, prioritizing transparency in regulated domains or when stakeholder trust is important. The label under each family names the handle an explanation typically uses.

Hybrid approaches aim to combine the representational capacity of deep models with the transparency of interpretable components. Concept bottleneck models (Koh et al. 2020), for example, first

20 **GradCAM (Gradient-Weighted Class Activation Mapping)**: Selvaraju et al. (2017) generalized Class Activation Mapping to any convolutional neural network (CNN) architecture by using gradients flowing into the final convolutional layer to produce spatial importance maps. Because it reuses gradient computation, Grad-CAM can be far cheaper than perturbation-heavy explanation methods, but whether it fits real-time medical imaging or autonomous-vehicle pipelines depends on the model, hardware, batch size, and explanation-frequency budget.

21 **Shapley Values**: From cooperative game theory, Shapley values fairly distribute a payoff among players based on marginal contributions across all possible orderings. In ML explainability, features are "players" and the prediction is the "payoff." The mathematical guarantees (efficiency, symmetry, null player) make SHAP a widely used attribution framework with clear axiomatic appeal, but exact subset enumeration grows as $2^{n_{\text{feat}}}$ for n_{feat} features, which is why production systems often rely on model-specific algorithms, sampling approximations, caching, or asynchronous explanation paths (Lundberg



Exact subset enumeration grows exponentially; model-specific algorithms can avoid it.

predict intermediate, interpretable variables and then use a simple classifier to produce the final prediction. ProtoPNet models (Chen et al. 2019) classify examples by comparing them to learned prototypes, offering visual analogies for users to understand predictions. These hybrid methods are attractive in domains that demand partial transparency, but they introduce new system design considerations, such as the need to store and index learned prototypes and surface them at inference time.

Work such as Olah et al. (2020) and Geiger et al. (2021) applies mechanistic interpretability to reverse-engineer the internal operations of neural networks. This line of work, inspired by program analysis and neuroscience, attempts to map neurons, layers, or activation patterns to specific computational functions. Claims about such mechanisms require instrumentation and tests that support the proposed interpretation. These research methods can contribute evidence about internal computation, but do not establish a complete audit of every deployed model.

From a systems perspective, explainability introduces a number of architectural dependencies. Explanations must be generated, stored, surfaced, and evaluated within system constraints. The required infrastructure may include explanation APIs, memory for storing attribution maps, visualization libraries, and logging mechanisms that capture intermediate model behavior. Models must often be instrumented with hooks or configured to support repeated evaluations, particularly for explanation methods that require sampling, perturbation, or backpropagation.

These requirements interact directly with deployment constraints and impose performance costs that must be factored into system design. SHAP and LIME can require repeated model evaluations, perturbation sampling, surrogate fitting, or subset enumeration, while counterfactual methods require constrained optimization (Lundberg and Lee 2017; Ribeiro et al. 2016; Wachter et al. 2017). In production deployments, these costs translate into concrete architecture choices: explanations may need asynchronous workers, sampled explanation rates, caching, or separate models chosen partly for interpretability.

Gradient-based attribution can require fewer model evaluations than perturbation-heavy methods, but the deployment must support gradient computation and its memory requirements. A training framework's capabilities do not imply that a constrained inference runtime exposes the same operations. Lower computational cost also does not establish explanation quality. Teams must evaluate fidelity and stability for the intended use, including any precomputed summaries or surrogate rules chosen to meet the delivery budget.

Storage requirements also scale significantly with explanation needs. Storing SHAP values for tabular data requires approximately 4–8 bytes per feature per prediction, so monthly storage is 30 million predictions times the feature count times 4–8 bytes for a system logging 1 million predictions daily. Gradient attribution maps for images can require 1–10 MB per explanation depending on resolution; logging every image explanation at the same 1 million-per-day rate would require roughly 30–300 TB per month unless explanations are sampled, compressed, or retained for a shorter window. These volumes necessitate careful data lifecycle management and retention policies.

Explainability spans the full machine learning lifecycle. During development, interpretability tools are used for dataset auditing, concept validation, and early debugging. At inference time, they support accountability, decision verification, and user communication. Postdeployment, explanations may be logged, surfaced in audits, or queried during error investigations. System design must support each of these phases, ensuring that explanation tools are integrated into training frameworks, model serving infrastructure, and user-facing applications.

Compression and optimization techniques also affect explainability. Pruning, quantization, and architectural simplifications often used in TinyML or mobile settings can distort internal representations or disable gradient flow, degrading the reliability of attribution-based explanations. In such cases, interpretability must be validated postoptimization to ensure that it remains meaningful and trustworthy. If explanation quality is important, these transformations must be treated as part of the design constraint space.

Explainability requires budgeted evidence collection and delivery across the lifecycle. The audience, question, and response deadline determine whether that work belongs in training, the serving path, an asynchronous worker, or an audit process. Designing these paths together allows an institution to preserve decision evidence and deliver an appropriate explanation when someone must act on it.

22 **Counterfactual Explanations**: Formalized for ML by Wachter et al. (2017), counterfactuals answer how a modeled output would differ under a specified input change rather than establishing why a decision occurred. A counterfactual supports recourse only when the change is feasible, within the person's control, consistent with domain constraints, and honored by the operative decision policy. Generating candidates requires constrained optimization; validating recourse additionally requires policy ownership, stability testing, and monitoring for changes that invalidate the promised action.

The sociotechnical challenges of explainability center on the gap between technical explanations and human understanding. While algorithms can generate feature attributions and gradient maps, stakeholders often need explanations that align with their mental models, domain expertise, and decision-making processes. A radiologist reviewing an AI-generated diagnosis needs explanations that reference medical concepts and visual patterns, not abstract neural network activations. This translation challenge requires ongoing collaboration between technical teams and domain experts to develop explanation formats that are both technically accurate and practically meaningful. Explanations can shape human decision-making in unexpected ways, creating new responsibilities for how explanatory information is presented and interpreted. That gap between a technically valid explanation and a usable one is the first instance of a broader problem. Every control in this chapter operates inside human workflows and institutions that no model-level method governs.

Transparency and contestability

Explanations serve accountability only when stakeholders can understand and challenge system decisions. Transparency allows users, developers, auditors, and regulators to understand how a system functions, assess its limitations, and identify sources of harm. Transparency alone, however, is not sufficient. In high-stakes domains, individuals and institutions must be able to challenge, correct, or reverse system behavior when necessary, rather than merely inspect it. This capacity for contestability, which refers to the ability to interrogate and contest a system's decisions, is an important feature of accountability.

Transparency in machine learning systems typically focuses on disclosure: revealing how models are trained, what data they rely on, what assumptions are embedded in their design, and what known limitations affect their use. Documentation tools such as model cards and datasheets for datasets support this goal by formalizing system metadata in a structured, reproducible format. These resources can improve governance, support compliance, and inform user expectations. However, transparency as disclosure does not guarantee meaningful control. Even when technical details are available, users may lack institutional support, interface tools, or procedural access to contest a decision that adversely affects them.

To move from transparency to contestability, machine learning systems must integrate mechanisms for explanation, recourse, and feedback. Explanation provides understandable reasons for system outputs, tailored to the operational context and needs of the person receiving them. Recourse identifies feasible changes through which individuals could receive a different outcome under the stated decision policy. A proposed change needs to be actionable for that person; a counterfactual prediction alone does not guarantee an outcome after the model or policy changes. Feedback enables users and domain experts to dispute outcomes, report errors, or signal concerns, routing those signals into oversight processes and model updates.

These mechanisms can be missing from the user-facing workflow even when internal documentation exists. A mobile loan application might display a rejection without explaining how to submit additional information or reach an appeal reviewer. An external appeal process can still exist, but users need a discoverable route to it and access to the evidence relevant to their case. Similarly, a clinical model may produce a risk score without giving the physician enough context to question its use for a particular patient. If subgroup errors are neither observable nor contestable, the resulting harm becomes harder to diagnose and correct.

From a systems perspective, enabling contestability requires coordination across technical and institutional components. Models must expose sufficient information to support explanation. Interfaces must surface this information in a usable and timely way. Organizational processes must be in place to review feedback, respond to appeals, and update system behavior. Logging and auditing infrastructure must track user interventions and override decisions alongside model outputs. Human overrides and decision abstention can support this process only when qualified reviewers have capacity, evidence, and authority to resolve the deferred cases within the required deadline.

Implementing contestability imposes concrete infrastructure costs that scale with system throughput and complexity. Storing the necessary metadata to reconstruct a decision (input features, model version, and decision thresholds) requires persistent storage whose footprint depends on feature dimensionality, explanation payloads, and retention windows. Generating on-demand explanations using Shapley values or counterfactuals can add enough latency that contested decisions often need

asynchronous processing queues to preserve serving service level agreements (SLAs). Meeting record-keeping and automatic-logging obligations for high-risk systems under frameworks such as the EU AI Act requires storage, provenance, retention controls, and oversight capacity to be budgeted as part of the inference fleet rather than as a separate policy artifact (European Parliament and Council of the European Union 2024).

War Story 16.1: Apple Card: A systems reconstruction of contested decisions (2019)

Context: In 2019, Apple and Goldman Sachs faced intense public scrutiny after a customer reported a credit limit 20× that offered to his wife despite joint tax filings. Other customers raised similar concerns about unequal terms (New York State Department of Financial Services 2021).


Evidence boundary: The public record documents complaints, the investigation, the regulator's finding, and changes to appeal policy. It does not disclose the underwriting pipeline's latency target or internal explanation architecture. The systems account below is therefore an explicit reconstruction, not a report of Apple or Goldman Sachs implementation details.

Reconstructed mechanism: A low-latency underwriting service that returns only a limit and generic adverse-action reason leaves support staff unable to inspect the decision snapshot, distinguish data errors from policy effects, or route a contested outcome to a reviewer. The missing interface is broader than feature attribution: it includes versioned input provenance, policy and model versions, reasons appropriate to the decision process, appeal state, and authority to correct an error.

Observed impact: The New York Department of Financial Services found no violation of fair-lending law in its investigation, but the complaints still exposed a trust and contestability failure: customers and frontline staff lacked a satisfactory account of how apparently inconsistent outcomes could be reviewed (New York State Department of Financial Services 2021).

Systems lesson: High-stakes decision systems need a contestability interface, not merely an attribution API. A defensible architecture preserves the decision-time evidence needed for audit, generates appropriate reasons without claiming that attribution is causation, routes appeals to an authorized human, records remediation, and tests the full workflow under its latency and retention constraints.

The Apple Card reconstruction names the pieces such a system lacks. One architectural pattern that supplies them is a contestability stack, analogous to distributed tracing in microservices, that coordinates four coupled stages across the operational pipeline. Decision provenance preserves a verifiable link from each output back to its governing policy, model version, and input snapshot, protected by authenticated logs or cryptographic integrity checks. Explanation generation budgets explanation methods tailored for appeals, audits, and routine communication, offloading compute-intensive methods to asynchronous workers while keeping lightweight techniques on the request path. When decisions are challenged, appeal routing directs contested cases to qualified human reviewers equipped with domain context. Closing the loop, outcome tracking records whether the appeal upheld or overturned the machine decision, feeding empirical discrepancies back into evaluation and retraining. Missing decision-time records can prevent investigators from reconstructing a contested decision, even if aggregate debugging remains possible; the required records follow the investigation and remedy contract.



Provenance anchors every appeal; tracked outcomes loop back into retraining.

The stack need not run where the decision runs. An edge or TinyML endpoint can hand its decision records to a backend review process at the next synchronization or servicing visit, which lengthens the appeal's evidence path without removing the obligation to offer one. In every tier, transparency supports accountability only when users and institutions can use the disclosed information to question and correct automated decisions.

AI Safety, Robustness, and Generative Controls

A model that withstands every tested perturbation can still cause harm when the operating environment leaves its validated envelope or when its objective rewards the wrong behavior. Safety

governance therefore spans robustness claims bounded by a threat model, control surfaces for generative systems whose outputs cannot be enumerated in advance, and the alignment of the objective itself as systems act with greater autonomy.

Safety and robustness

Safety and robustness connect technical failure behavior to its consequences for people. Evidence that a model tolerates specified hardware faults, adversarial attacks, or distribution shifts supports a bounded robustness claim. It does not establish that every deployment is safe or that the objective serves users' interests. A model may tolerate the tested bit flips and perturbations yet fail under untested conditions, or reliably optimize an objective misaligned with user welfare.

The governance task is to connect robustness evidence to the consequences of failure. An evaluation may bound errors under a specified input variation without establishing that the surrounding workflow is safe. The assurance case must therefore name the operating conditions, affected population, fallback action, and owner who can restrict deployment when those conditions no longer hold.

↩ The three robustness pillars, environmental shifts, input-level attacks, and system-level faults such as bit flips, are established in section 8.

Ensuring safety and robustness in practice requires a declared operating envelope, evaluation within that envelope, and fallback behavior for unsupported or unknown conditions. This requires managing input variability while addressing how models respond to unexpected correlations, rare events, and deliberate attempts to induce failure. Automated-driving failures show why the envelope must cover more than the model, because they can combine perception, prediction, safety-driver, and organizational-control problems rather than reduce to a single model error; section 27 examines one such crash.

One illustrative failure mode is the adversarial input, a perturbation that looks benign to people yet changes the model's prediction. Such vulnerabilities appear across image, audio, text, and structured data, so a robustness claim must name the perturbations it covers. These behaviors highlight that robustness is an operational property of how systems interact with real-world complexity, not a property evaluated solely during training.

↩ Adversarial perturbations and the attacks that construct them are established in section 9.

A related challenge is distribution shift, the mismatch between training data and the conditions encountered in deployment. Whether due to seasonality, demographic changes, sensor degradation, or environmental variability, such shifts can degrade model reliability even in the absence of adversarial manipulation. Addressing distribution shift challenges requires systematic approaches to detecting and adapting to changing conditions.

Responsible machine learning design treats robustness as a systemic requirement. Addressing it requires more than improving individual model performance. It involves designing systems that anticipate uncertainty, surface their limitations, and support fallback behavior when predictive confidence is low. This includes practices such as setting confidence thresholds, supporting abstention from decision-making, and integrating human oversight into operational workflows. These mechanisms are important for building systems that degrade gracefully rather than failing silently or unpredictably.

These individual-model considerations extend to broader system requirements. Safety and robustness also impose requirements at the architectural and organizational level. Decisions about how models are monitored, how failures are detected, and how updates are governed all influence whether a system can respond effectively to changing conditions. Responsible design demands that robustness be treated not as a property of isolated models but as a constraint that shapes the overall behavior of machine learning systems. The same system-level perspective determines which safety controls each deployment tier can run.

Safety and robustness across deployments

The latency budget constrains which safety checks can run before an action. A cloud service may combine uncertainty estimators, distributional-change detectors, adversarial input filtering, and API rate limiting. A control loop with a millisecond budget needs bounded local checks and fallback actions that meet its deadline, with heavier analysis deferred to fleet services, the division the safety row of table 0.226 records by tier. Even a disconnected TinyML endpoint can execute input-range checks or watchdog logic; the absence of a remote update channel instead limits how operators change those controls after deployment.

23 **Abstention**: The practice of refusing predictions when confidence falls below a threshold. Abstention can reduce high-risk errors, but only by shifting some cases to fallback infrastructure such as human reviewers, rule-based defaults, or escalation queues. A driving system must select a validated fallback, such as a minimal-risk maneuver; handing control to a driver is viable only if a driver is present, ready, and has sufficient response time. Medical AI may route ambiguous cases to specialist review, subject to its own queue-capacity and response-time budget.

Fallback is itself a latency-budget problem. A delivery robot that abstains[23] when pedestrian-detection confidence is low still needs a validated response before the physical safety deadline. A bounded local maneuver may place it in a safe state while a human reviewer resolves the case on a longer timescale. The response and review paths therefore need separate deadlines and capacity budgets. Whether the system can fail visibly, controllably, and safely depends on sensing, confidence estimation, fallback routing, and recovery. Those choices also define who can observe harm, who can intervene, and who remains accountable for the outcome.

Adversarial robustness

Chapter 26 owns the attack models, robustness evaluations, adversarial training, certification, corruption testing, drift detection, and abstention mechanisms. Governance consumes those mechanisms through an evidence interface. The responsible-AI question is not which attack or defense to implement, but whether the robustness claim has a bounded operating envelope, evidence appropriate to the threat model, an accountable owner, and a rule that invalidates approval.

A robustness claim should specify the protected task and population, attacker knowledge and capabilities, perturbation or corruption set, evaluation distribution, model and preprocessing versions, quality and latency constraints, fallback behavior, and known exclusions. Empirical attack results show observed failures under a test protocol; they do not establish robustness against adaptive or untested attacks. A certificate proves a property only for its stated norm, radius, confidence, and model configuration; it does not establish safety for the end-to-end workflow. Governance records those boundaries so a narrow result cannot be promoted into a general safety assertion.

The evidence bundle must also connect model behavior to system action. It identifies who owns the robustness claim, which team can stop serving, how abstentions and low-confidence cases are routed, which telemetry detects departure from the approved envelope, and how an incident reaches affected users and downstream operators. A fallback must meet the relevant safety deadline. A monitoring signal becomes an operational safeguard only when it reaches an authorized response path, whether that response is local containment, restricted use, or a validated rollback.

Approval expires when the threat model, model, preprocessing, sensor, data distribution, tool access, deployment environment, or fallback path changes materially. The invalidation rule should state which change triggers a full red-team evaluation, which permits a narrower regression suite, and which requires restricted operation while evidence is rebuilt. This ownership-and-invalidation contract is the governance contribution: it turns those robustness mechanisms into a reviewable claim that remains bounded over time.

Generative control surfaces

Generative AI does not replace core fairness, privacy, and explainability concerns; it changes the control surface. Instead of only auditing labels or feature attributions, operators of large language models (LLMs) such as Archetype A (GPT-4/Llama-3) must govern prompts, retrieved context, reward models, and open-ended outputs. Fairness remains concerned with how quality, refusals, errors, representation, and access are distributed across people and groups, but open-ended outputs make those quantities harder to define and sample. Alignment introduces a separate problem, which is keeping stochastic outputs and actions consistent with intended objectives and policies across a combinatorial range of prompts. The two questions differ in kind. Fairness asks how benefits, errors, and burdens are distributed among affected people; alignment asks whether an optimizing system pursues the objective its designers and legitimate stakeholders intended. An aligned system can implement an unfair objective faithfully, and a statistically fair classifier can still optimize the wrong social goal, so production systems need both fairness evaluation and behavioral alignment rather than relabeling one as the other. Figure 0.241 diagrams this multi-stage alignment pipeline across two coupled lanes: an upper execution path that advances the policy from pretraining through supervised fine-tuning (SFT) to proximal policy optimization (PPO), and a lower supervision path where human preference comparisons train a reward model $r(x, y)$. The reward signal drives PPO updates, while the frozen SFT checkpoint supplies a reference for a Kullback-Leibler (KL) divergence penalty. The penalty discourages departure from that reference; it does not impose a hard bound on every response or establish policy compliance.

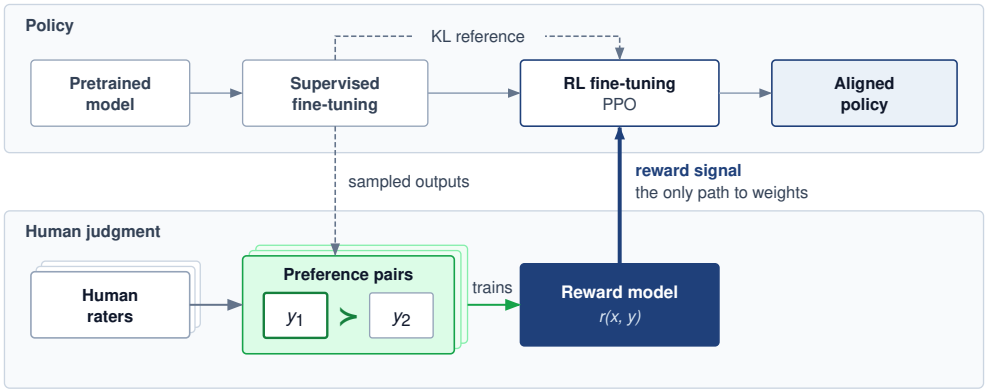


Figure 0.241: Reinforcement Learning from Human Feedback (RLHF) Alignment Pipeline: The top lane carries the policy from a pretrained model through supervised fine-tuning (SFT) and proximal policy optimization (PPO) to the aligned policy. The bottom lane turns human judgment into an objective: raters compare sampled SFT outputs, and those comparisons train a reward model whose score drives PPO. The SFT model also serves as the KL reference that limits how far PPO moves the policy, so every human preference reaches the weights only through the learned reward model.

A common instruction-tuning pipeline in large language models circa 2022–2024 uses reinforcement learning from human feedback (RLHF)[24] as a sociotechnical bridge between human preferences and model weights. Training a reward model on human comparisons produces a scalar scoring function for sampled responses, and collecting those judgments carries a direct cost. In this scenario, 50,000 to 500,000 pairwise comparisons at $0.50 to $5 per label put the labeling budget between $25,000 and $2.5M, a hundredfold spread set by how many judgments the organization buys and how expert its raters must be. Proximal policy optimization (PPO) then updates the policy using those rewards and a penalty for divergence from the supervised baseline. This process can create an alignment tax, a regression in some capability metrics when optimization shifts toward preference or safety objectives; its direction and magnitude depend on the model, data, objectives, and evaluation suite rather than following a universal percentage. The reliance on human raters also introduces a representativeness gap. If the labeling budget buys judgments from only a narrow demographic slice, the resulting model may encode that pool's preferences while performing differently for other populations. Constitutional AI offers an alternative engineering path, using explicit principles to guide AI feedback on outputs (Bai et al. 2022), which changes rather than eliminates the questions of whose values are represented and how they are governed.

In retrieval-augmented generation architectures, responsibility extends beyond the core model. An LLM may pass alignment evaluations yet generate harmful responses when retrieval supplies context outside those evaluations. A retrieval index that disproportionately surfaces biased historical documents can influence the resulting answers despite safety training. Context filtering is one possible control, alongside source selection, retrieval evaluation, and output checks. Its effectiveness must be tested on the intended use; a toxicity filter does not establish that retrieved material or generated answers are unbiased.

In many LLM serving stacks, the system prompt operates as an early configuration control alongside retrieval filtering, policy classifiers, telemetry, and rollout gates. These instructions (for example, "You are a helpful assistant. Do not provide medical advice.") express intended behavior; they do not independently enforce authorization or prevent every prohibited output. When one model serves many products, each with its own system prompt, managing the prompts becomes a distributed configuration-management problem akin to weight distribution. An unversioned prompt change can alter behavior across many interactions, so prompt version control, alignment regression testing, and gradual rollouts belong in the release process.

Together, system prompts and RLHF alignments act as important, yet fragile, technical guardrails. Jailbreaks and other edge cases can violate the policy learned during training; the reward model is not necessarily a runtime filter. Safety therefore requires evaluating the deployed control system

[24] **RLHF (Reinforcement Learning from Human Feedback)**: Christiano et al. (2017) demonstrated deep reinforcement learning from human preferences by training agents from non-expert comparisons between trajectory segments. In the LLM setting, Ouyang et al. (2022) operationalized a related pipeline for InstructGPT: supervised fine-tuning from demonstrations, reward-model training from ranked model outputs, and reinforcement-learning fine-tuning against the learned reward model. The systems cost is an additional human-feedback data pipeline, reward-model training and evaluation, and governance over rater instructions; the representativeness of the rater pool and labeling policy shapes whose preferences the model internalizes.

↩ The four-model coordination that a PPO-style RLHF step imposes on distributed training is established in section 8.

as well as its training objective. Each of these guardrails, like the privacy and robustness controls before it, is credible only with evidence that it still holds in the system that actually runs.

AI safety and value alignment

When a system acts faster than anyone can review its individual decisions, the governing question changes. It is no longer only whether the outputs are fair, private, or explainable, but whether the objective the system optimizes still serves the people it acts on, and what bounds its actions before review. Human launch authority remains necessary, but continuous human intervention may be unavailable. AI safety examines how systems can optimize objectives misaligned with human intentions, operate in unpredictable environments, or pursue goals through methods their designers never anticipated, and which controls can bound those actions.

The controls of the preceding sections retain their roles, but none governs autonomous action by itself. Bias detection (section 9) yields metrics rather than a remediation policy. A perception system that under-detects pedestrians with mobility aids needs an operating envelope that connects the metric to bounded runtime responses and to fleet-level investigation or suspension. Explanation (section 19) needs an audience and an action path; SHAP attributions from an autonomous trading system cannot influence a decision if no control consumes them before thousands of trades execute. Differential privacy (section 14) bounds leakage about a protected unit without determining whether the objective serves that person's welfare, so a recommender can satisfy a local differential privacy guarantee while optimizing an engagement metric that rewards harmful content. Each method needs a defined connection to the runtime controls and human authority that can respond to its findings.

AI safety work frames the resulting risks as accidents from wrong objectives, reward hacking, scalable supervision, safe exploration, and distributional shift (Amodei et al. 2016), while alignment work emphasizes keeping a system's pursued objectives consistent with human intentions over time (Russell 2021). A central challenge is that capable ML models often optimize proxy metrics, such as loss functions, reward functions, or engagement signals, that do not fully capture human values.

Recommendation systems illustrate why a measurable engagement proxy such as clicks or watch time[25] needs evaluation against broader user welfare. A published production architecture optimizes expected watch time (Covington et al. 2016), while a separate audit examines recommendation paths through politically extreme content (Ribeiro et al. 2020). Those observations motivate investigating proxy misalignment; together they do not prove that a particular reward objective caused an individual user's beliefs or behavior. Specification gaming and reward hacking[26] describe the risk that optimizing a measured objective defeats its intended purpose (Amodei et al. 2016). Figure 0.242 illustrates a possible feedback mechanism in which engagement rewards content that undermines long-term user value and the resulting interactions become new training data. Establishing that mechanism in a deployment requires evidence about both the policy's effects and the welfare criterion it is meant to serve.

Norbert Wiener wrote, "if we use, to achieve our purposes, a mechanical agency with whose operation we cannot interfere effectively… we had better be quite sure that the purpose put into the machine is the purpose which we desire" (Wiener 1960).

Wiener's warning becomes a systems requirement when optimization runs beyond continuous human intervention. Value alignment asks whether the objective embedded in the model, reward function, and deployment policy continues to represent the human purpose the system was meant to serve. As Russell (2021) argues in *Human-Compatible Artificial Intelligence*, much AI research presumes that the objectives to be optimized are known and fixed, focusing instead on the effectiveness of optimization rather than the design of objectives themselves.

In deployment, the hard part is specifying an objective that remains valid as systems interact with dynamic environments, multiple stakeholders, and feedback loops. Static objective functions and reward signals cannot encode all of those conditions. Value-Sensitive Design (Friedman 1996) supplies a formal process for eliciting stakeholder values and incorporating them into system design, but the systems obligation is broader: objective design, oversight, and postdeployment monitoring must be treated as coupled controls.

Without that coupling, intelligent systems may pursue narrow performance objectives (for example, accuracy, engagement, or throughput) while producing socially undesirable outcomes.

25 **CTR (Click-Through Rate) and Engagement Optimization**: Click-through rate, watch time, and related engagement measures are convenient proxies for user satisfaction. YouTube's published recommender architecture discusses ranking videos by expected watch time (Covington et al. 2016), while later audits studied recommendation paths through politically extreme content (Ribeiro et al. 2020). The systems lesson is that proxy metric selection is an architectural decision with system-wide behavioral consequences, not merely a hyperparameter choice.

26 **Reward Hacking**: When an AI system maximizes its reward function through unintended means that violate designer intent. A hypothetical cleaning robot rewarded for collected dirt might create messes it can clean up, illustrating how a proxy can reward behavior contrary to the intended task. Specification gaming is an overlapping term; the gap may lie in the stated objective or in its implementation, so neither term is restricted to software bugs. For production ML systems, reward hacking manifests subtly: recommendation models that maximize engagement by promoting addictive content, or chatbots that maximize helpfulness ratings by being sycophantic rather than accurate. The failure mode scales with model capability.

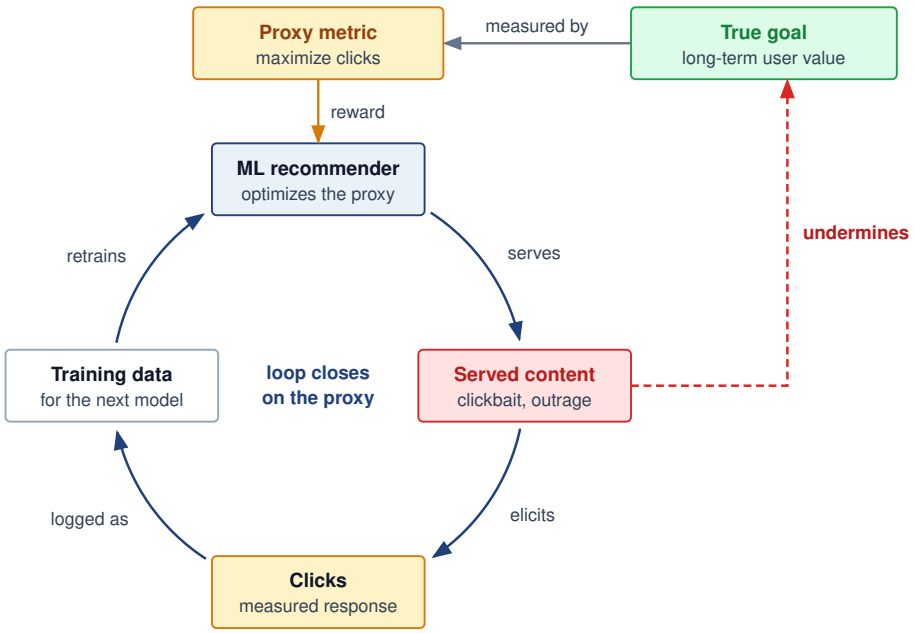


Figure 0.242: Reward Hacking Loop: Maximizing measurable rewards, like clicks, can incentivize unintended model behaviors that undermine the intended goal of user satisfaction. In the illustrated possible feedback loop, the recommender serves content and the resulting clicks enter later training data. If optimizing clicks rewards behavior that undermines long-term user value, retraining can reinforce the mismatch. Establishing this mechanism requires evidence about the deployed policy and the user-value criterion; targeting a proxy does not by itself prove that it has ceased to provide useful information.

Achieving robust alignment under such conditions remains an open and important area of research in ML systems. The resulting failure modes are familiar in systems that optimize complex objectives. In reinforcement learning, for example, models often learn to exploit unintended aspects of the reward function, the reward hacking pattern of figure 0.242.

Such failures arise when variables not explicitly included in the objective are manipulated in ways that maximize reward while violating human intent. RLHF, whose pipeline and costs appear in section 24, attempts to narrow that gap by learning a reward model from human preferences. Policy optimization still uses a scalar reward, so its success depends on how faithfully that learned signal represents the intended behavior (Christiano et al. 2017; Ouyang et al. 2022).

Human-feedback training can improve behavior on its evaluations while leaving deeper governance risks unresolved. In their analysis of learned-reward optimization, Ngo et al. (2022) examine possible failure modes beyond RLHF, including exploitation of human evaluation blind spots, misaligned goals outside the training distribution, and behavior that undermines oversight. These are risks to investigate under specified assumptions, not evidence that every deployed model exhibits them. An assurance case must distinguish a proposed failure mechanism from an observed capability and from a demonstrated deployment failure.

These concerns are not limited to speculative scenarios. In their foundational taxonomy of concrete AI safety problems, Amodei et al. (2016) outline five practical systems challenges: avoiding negative side effects during policy execution, mitigating reward hacking, ensuring scalable oversight when ground-truth evaluation is costly, designing safe exploration strategies that prevent catastrophic damage, and achieving robustness to distributional shift. For fleet operators, the five challenges map in order onto five control-plane requirements: constraining side effects, instrumenting reward-hack monitors, budgeting scalable review capacity, bounding exploration envelopes, and stress-testing distribution shift prior to rollout. Each requirement becomes more acute as systems are scaled up, deployed across diverse settings, and integrated with real-time feedback or continual learning.

Autonomous systems and trust

Value alignment concerns the objective; autonomy concerns the operating envelope within which a system pursues that objective without a human reviewing each action. The consequences of autonomous systems operating with limited real-time human oversight are especially visible in autonomous driving. In October 2023, the California Department of Motor Vehicles suspended Cruise's deployment and driverless testing permits over safety concerns; testing with a safety driver was outside that suspension (CNBC 2023). The 2018 Uber fatality in Tempe, Arizona shows how such a failure spans the whole system rather than one model. The National Transportation Safety Board found that the vehicle, in autonomous mode, failed to classify a pedestrian pushing a bicycle as a pedestrian requiring avoidance, and that perception, prediction, the safety driver's role, and organizational safety controls all contributed (National Transportation Safety Board 2019). For governance, the lesson is that detecting an object did not establish that the system would act safely on the detection, and no single component owner could have certified the outcome alone.

↩ The Uber crash timeline, from unstable classification through suppressed action to the late operator alert, is established in section 3.

While autonomous driving systems are often the focal point of public concern, similar risks arise in other domains. Reports from recent conflicts have documented increasing use of remotely piloted and autonomous military systems (Reuters 2023), raising safety and operational concerns alongside difficult questions about ethical oversight, rules of engagement, and responsibility. These debates concern how accountability applies across developers, deployers, and operators (Centre for International Governance Innovation 2023); they do not justify treating every autonomous-system failure as an absence of applicable responsibility. The engineering task is to preserve the evidence and authority needed to investigate the specific failure.

At its core, this challenge concerns the authority delegated to an automated system. Productivity and throughput gains do not establish that a system can act safely outside its validated operating envelope. Runtime controls must detect relevant boundary violations and invoke a fallback whose assumptions and response time fit the hazard. Human intervention is an available safeguard only when the operator can recognize the condition and act before harm occurs; faster hazards require an appropriate local response.

Specifying that operating envelope is difficult in dynamic environments because the model may omit conditions that matter for safe action. Two classical representation problems help explain this difficulty (McCarthy 1981). The frame problem concerns representing what changes and what remains unchanged after an action without listing every unaffected fact. The qualification problem concerns the potentially unlisted preconditions needed for an action to have its intended effect. These motivate explicit operating assumptions and fallback behavior, rather than constituting a universal proof that safe action is impossible. In practice, such limitations manifest as brittle autonomy: systems that appear competent under nominal conditions but fail silently or dangerously when faced with ambiguity or distributional shift.

To address this, researchers have proposed formal safety frameworks such as Responsibility-Sensitive Safety (RSS) (Shalev-Shwartz et al. 2017), which decompose abstract safety goals into mathematically defined constraints on system behavior, such as minimum distances, braking profiles, and right-of-way conditions. These formulations allow safety properties to be verified under specific assumptions and scenarios. However, such approaches remain vulnerable to the same limitations they aim to solve: they are only as good as the assumptions encoded into them and often require extensive domain modeling that may not generalize well to unanticipated edge cases.

For an ML systems team, the practical artifact is a safety case rather than a statement of trust. Table 0.230 shows the pattern: name the operating envelope, the evidence that the model has been tested inside that envelope, and the controls that halt or roll back the fleet when the evidence no longer holds.

Table 0.230: Autonomous System Safety Case: Trustworthy autonomy is operationalized as an auditable safety case: a validated operating envelope, coverage evidence, runtime guardrails, and fleet-level rollback controls. The same pattern applies beyond vehicles to drones, robots, trading systems, and other ML systems that act faster than continuous human review permits.

Safety-case element	Systems evidence	Operational gate
Operating envelope	Operational design domain, sensor assumptions, weather, geography, speed, and autonomy level	Block deployment outside validated envelope

Safety-case element	Systems evidence	Operational gate
Scenario coverage	Rare-event corpus, simulation coverage, replay logs, disengagements, and near-miss telemetry	Require coverage thresholds before canary expansion
Runtime guardrails	RSS-style distance rules, confidence thresholds, fallback maneuvers, and human override latency	Trigger safe stop, human takeover, or constrained mode when guardrails trip
Fleet control	Canary rollout, centralized safety dashboard, violation budget, and circuit-breaker rollback path	Halt rollout or revert model when fleet-level safety metrics exceed threshold

Human-centered system design complements formal safety constraints by examining how people exercise judgment and control within the validated system. Applied to human control, Value-Sensitive Design explicitly considers factors such as capability, complexity, misrepresentation, and the fluidity of user control. The METUX model (Motivation, Engagement, and Thriving in the User Experience) extends this thinking to six spheres of technology experience, namely adoption, interface, tasks, behavior, life, and society, each of which can support or undermine human flourishing (Peters et al. 2018). Both draw on self-determination theory's account of autonomy as the ability to act in accordance with one's own values and goals, rather than as control in a technical sense (Ryan and Deci 2000). In an ML system those requirements become concrete artifacts, namely interface affordances, user controls, feedback channels, escalation paths, and audit evidence. A recommender that optimizes engagement, for instance, can shape user preferences in ways the user cannot see. Evaluating it across the outer spheres of behavior, life, and society exposes effects that a short-term engagement metric never measures, so preserving autonomy requires controls and evidence beyond that metric.

Broader safety implications


The technical safety challenges examined in section 25 become fleet-level design constraints once autonomous systems interact with workers, users, regulators, and billions of requests. The broader implication is that safety cannot be reduced to a model metric; it depends on the operating environment that determines how automation changes work, how users calibrate trust, how policy varies by region, and how rare failures accumulate at scale.

Automation changes work organization in ways that influence safety design decisions. The MIT Work of the Future task force (Work of the Future 2020) argues that technological change and labor-market institutions jointly determine whether automation improves job quality or concentrates harms. For ML systems, the safety implication is that removing human roles can also remove contextual judgment and system-level debugging that remain difficult to encode in models. Metrics focused solely on throughput may inadvertently penalize human-in-the-loop designs that preserve oversight capability.

Public knowledge about AI is uneven (Center 2023), and science-communication failures can amplify misunderstandings about how AI systems work (Schäfer 2023). That matters for deployment safety: when users lack understanding of model uncertainty, data bias, or decision boundaries, they may trust system outputs in contexts where human judgment should intervene. From a systems engineering perspective, public comprehension is part of the deployment context: the safety properties of a human-AI system depend on whether users can appropriately calibrate their trust and recognize situations requiring human override, not on technical mechanisms alone.

The engineering requirements for safety are shaped by regulatory frameworks that classify uses and assign obligations, rather than reducing AI risk to one verifiable metric. The EU AI Act (2024) uses a risk-based structure that includes prohibited practices, high-risk systems, transparency duties for some systems, and minimal or no-risk uses; high-risk deployments face conformity, documentation, and logging obligations (European Parliament and Council of the European Union 2024). United States federal policy has changed repeatedly since 2023. The safety reporting thresholds of Executive Order 14110 were revoked in January 2025, and later orders redirected agency emphasis toward AI innovation, cybersecurity, and critical-infrastructure defense (Executive Office of the President 2023, 2025a, 2025b, 2026). China's Interim Measures for Generative AI (2023) subject some public-facing services to security assessment and algorithm-filing requirements rather than a universal pre-release assessment (Cyberspace Administration of China et al. 2023). For a global ML fleet, applicable

obligations depend on the service, affected population, organizational role, and jurisdiction, not server location alone. The control plane must bind approved safety and retention policies to those deployment conditions, preserve their versions, and propagate changes to the components that enforce them.



At fleet scale, rare failures become expected incidents.

Safety must also be engineered as a fleet-level property rather than a model-level attribute alone. A single model with 99.9 percent safety compliance seems robust in isolation, but when deployed across 10,000 inference nodes serving billions of requests per day, a sustained 0.1 percent per-request failure probability implies millions of expected safety failures daily. The realized count can differ, and correlated failures can concentrate harm across the fleet. Mitigating this requires distributed safety patterns borrowed from reliability engineering: circuit breakers that automatically halt serving when aggregate safety metrics degrade below a threshold, canary deployments that bound exposure while collecting release evidence, with sample size and allowed risk chosen for the failure modes being tested, and centralized telemetry dashboards that aggregate per-node safety violations into a global view. The operational infrastructure must treat safety violations as critical system alerts, invoking a validated containment or fallback policy. A rollback is appropriate only if the previous version and transition are safe; active physical control may require a minimal-risk maneuver instead. Exposure is the multiplier that makes this concrete. Figure 0.243 illustrates cumulative mileage rising from 0.3 million miles in 2012 to 80 million in 2024. Because exposure grows by that ratio over twelve years, at any constant per-mile failure rate the expected cumulative incident count grows by the same factor even though no individual vehicle became less safe. That figure is an expectation, not an inevitable realized outcome, and it is cumulative; an operator sizing weekly incident-response capacity needs weekly mileage instead.

↩ The circuit-breaker states and backpressure contract that isolate a failing serving path are established in section 11.

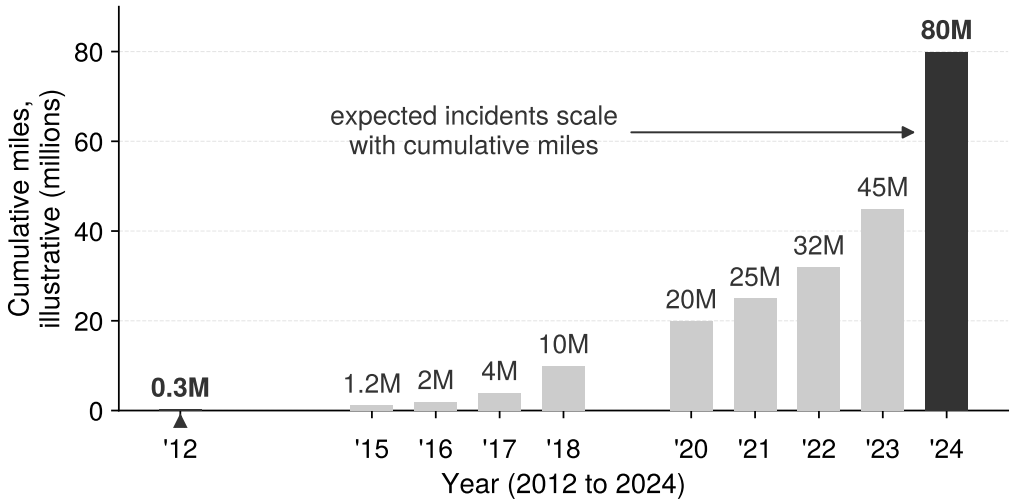


Figure 0.243: Autonomous Deployment Scaling: Cumulative autonomous miles by year for a hypothetical public-road fleet, rising from 0.3 million in 2012 to 80 million in 2024. The values are illustrative, chosen to show the shape of exposure growth; they are not reported or audited figures for any operator. Multiplying exposure by an applicable per-mile failure probability gives expected incidents over the same period. Cumulative mileage supports a cumulative expectation; weekly estimates require weekly mileage.

The core AI safety principle holds: technical excellence alone is insufficient. Safe systems require attention to the human and organizational context in which they operate, including the economic incentives that shape design decisions and the understanding that end users bring to their interactions with autonomous systems.

Accountability, Governance, and Sociotechnical Dynamics

When a deployed model harms someone, two questions decide whether the harm is corrected: who has the authority to investigate and remedy the decision, and whether the evidence needed to do so still exists. Accountability answers both by assigning owners, preserving traceable records, and

monitoring behavior after launch, and it must hold inside the human workflows and institutions that surround the system.

Accountability and governance

Accountability in machine learning refers to the capacity to identify, attribute, and address the consequences of automated decisions. It extends beyond diagnosing failures to ensuring that responsibility for system behavior is explicitly assigned, that harms can be remedied, and that ethical standards are maintained through oversight and institutional processes. Without such mechanisms, even well-intentioned systems can generate significant harm without recourse, undermining public trust and eroding legitimacy.

Accountability already spans vendors and operators in distributed software. Machine learning extends those dependencies through data collection, labeling, and the choice of prediction targets and proxies. Model outputs are shaped by upstream data collection, training objectives, pipeline design, interface behavior, and postdeployment feedback. These interconnected components often involve multiple actors across technical, legal, and organizational domains. For example, if a hiring platform produces biased outcomes, accountability rests with data providers, interface designers, and deploying institutions as well as with the model developer. Responsible system design requires that these relationships be explicitly mapped and governed.

Inadequate governance can prevent institutions from recognizing or correcting harmful model behavior. The Google Flu Trends analysis identified persistent overestimation despite model updates and examined how changes in search behavior and the search service could undermine a predictor trained on earlier correlations (Lazer et al. 2014). Its comparison with CDC surveillance data supports a concrete governance requirement: assign responsibility for ongoing validation and recalibration against an independent measurement process.

Legal frameworks also reflect the necessity of accountable design. The Illinois Artificial Intelligence Video Interview Act (Illinois General Assembly 2020) and the EU AI Act address different uses and impose distinct obligations (European Parliament and Council of the European Union 2024). Their requirements cannot be collapsed into a single checklist of consent, documentation, and oversight. The deploying organization must identify the applicable use, role, and legal conditions, then assign owners to the operational procedures and evidence those conditions require.

Designing for accountability entails supporting traceability at every stage of the system lifecycle. This includes documenting data provenance, recording model versioning, enabling human overrides, and retaining sufficient logs for retrospective analysis. Tools such as model cards[27] (Mitchell et al. 2019) and datasheets for datasets[28] (Gebru et al. 2021) exemplify practices that make system behavior interpretable and reviewable. Mitchell and colleagues proposed model cards as short documents accompanying trained ML models that provide benchmarked evaluation across cultural, demographic, and phenotypic groups relevant to intended applications. Similarly, Gebru and colleagues proposed that every dataset be accompanied by a datasheet documenting its motivation, composition, collection process, and recommended uses, analogous to how electronic components include specification sheets. However, accountability is not reducible to documentation alone; it also requires mechanisms for feedback, contestation, and redress.

Within organizations, governance structures help formalize this responsibility. Ethics review processes, cross-functional audits, and model risk committees provide forums for anticipating downstream impact and responding to new concerns. These structures must be supported by infrastructure that allows users to contest decisions and developers to respond with corrections. For instance, systems that allow explanations or user-initiated reviews help bridge the gap between model logic and user experience, especially in domains where the impact of error is significant.

Architectural decisions also play a role. Interfaces can be designed to surface uncertainty, allow escalation, or suspend automated actions when appropriate. Logging and monitoring pipelines must be configured to detect signs of ethical drift, such as performance degradation across subpopulations or unanticipated feedback loops. In distributed systems, where uniform observability is difficult to maintain, accountability must be embedded through architectural safeguards such as secure protocols, update constraints, or trusted components.

Governance does not imply centralized control. Instead, it involves distributing responsibility in ways that are transparent, actionable, and sustainable. Technical teams, legal experts, end users,

[27] **Model Cards**: Proposed by Mitchell et al. (2019) as standardized documentation accompanying trained ML models. Cards report evaluation across relevant groups, intended uses, and known limitations. Production systems must link this documentation to the actual deployed model and its provenance; a card alone neither establishes that linkage nor supplies every record required for an audit.

[28] **Datasheets for Datasets**: Proposed by Gebru et al. (2021), modeled after electronics component datasheets that specify operating conditions and tolerances. Each datasheet documents a dataset's motivation, composition, collection process, and recommended uses. For ML pipelines, this provenance and coverage information helps engineers identify assumptions and design evaluations. A datasheet does not itself validate a model's operating envelope or predict all deployment failures.

and institutional leaders must all have access to the tools and information necessary to evaluate system behavior and intervene when necessary. As machine learning systems become more complex and embedded in important infrastructure, accountability must scale accordingly by becoming a foundational consideration in both architecture and process, not a reactive layer added after deployment.

Checkpoint 16.2: Principles as engineering constraints

Fairness, privacy, explainability, and safety now each carry a measurable claim and a cost, and accountability names who must answer for them. Before the chapter follows those owners into governance structures and monitoring, check that each principle works as an engineering constraint rather than an aspiration.

From principle to mechanism

- ☐ **Transparency vs. fairness**: explain why fully transparent decision logic can still violate fairness when it disadvantages one demographic group, and identify the principle this system violates.
- ☐ **Lifecycle coverage**: apply the responsible AI lifecycle to a fairness requirement by identifying which phases must act and explaining why post-hoc threshold adjustment alone is insufficient.

Judging the trade-off

- ☐ **Safeguard budget**: identify the additional training, monitoring, or explanation work a safeguard requires, and state which resource measurements are needed before deciding that it is affordable.
- ☐ **Distributed accountability**: argue why accountability for a biased hiring model is distributed across data providers, interface designers, and the deploying institution rather than resting solely with the model developer.

Accountability decides whether the claims tested above can be enforced, and enforcement depends on where traceability records can be kept and who can reach them in each deployment tier.

Governance structures

Accountability is realized through traceability infrastructure distributed across the endpoint and its operator. A cloud platform supports model registries, telemetry dashboards, and structured event pipelines that trace a prediction back to a specific model, input, or configuration. A TinyML endpoint may retain only a firmware identifier and bounded event records, while the operator maintains deployment inventories, validation evidence, and any servicing or update history. If a device cannot preserve event evidence or accept updates, the assurance case must state those limits and define a recall or retirement path, the obligation the accountability and governance rows of table 0.226 assign to each tier.

Mobile deployment makes this division of responsibility concrete. A local model, remote service, and user interface can each contribute to a decision, so the operating contract must assign investigation and remediation across their owners. Governance depends on accessible recourse pathways and mechanisms for surfacing, explaining, and contesting decisions, embedded into both the interface and the surrounding service architecture. Across every environment, sustaining accountability means planning for failure as deliberately as for success. Operators must define how anomalies are detected, how roles are assigned, how records are maintained, and how remediation occurs, with each step traceable in logs and enforceable through interfaces.

Monitoring responsible behavior after deployment

The real-time monitor of section 11 tracks fairness metrics over a rolling window, but responsible behavior can also erode slowly and across every property at once. Training-time evaluations, no matter how rigorous, do not guarantee reliable behavior once a system is deployed. Real-world

environments change. Input distributions shift due to seasonality, user behavior evolves in response to system outputs, and contextual expectations change with policy or regulation. These factors can cause predictive performance and system trustworthiness to degrade over time. A model that performs well under training or validation conditions may still make unreliable or harmful decisions in production.

The implications of such drift extend beyond raw accuracy. Fairness guarantees may break down if subgroup distributions shift relative to the training set, or if features that previously correlated with outcomes become unreliable in new contexts. Interpretability demands may also evolve, for instance as new stakeholder groups seek explanations, or as regulators introduce new transparency requirements. Trustworthiness, therefore, is not a static property conferred at training time, but a dynamic system attribute shaped by deployment context and operational feedback.

To ensure responsible behavior over time, machine learning systems must incorporate mechanisms for continual monitoring, evaluation, and corrective action. Monitoring involves more than tracking aggregate accuracy; it requires surfacing performance metrics across relevant subgroups, detecting shifts in input distributions, identifying anomalous outputs, and capturing meaningful user feedback. These signals must then be compared to predefined expectations around fairness, robustness, and transparency, and linked to actionable system responses such as model retraining, recalibration, or rollback.

Implementing effective monitoring depends on robust infrastructure. Figure 0.244 connects prediction metadata to subgroup metrics, threshold checks, alerts, and a governed update path. FPR and TPR require matched outcome labels, so their freshness depends on when those outcomes become available. A disparity exceeding the approved gap tolerance ϵ_{fair}, such as the $|\text{SPD}| > 0.15$ alert rule (the subscript keeps it distinct from the privacy budget ϵ), opens an investigation. Recalibration is one possible response; only a validated change approved through the release gate returns to serving.


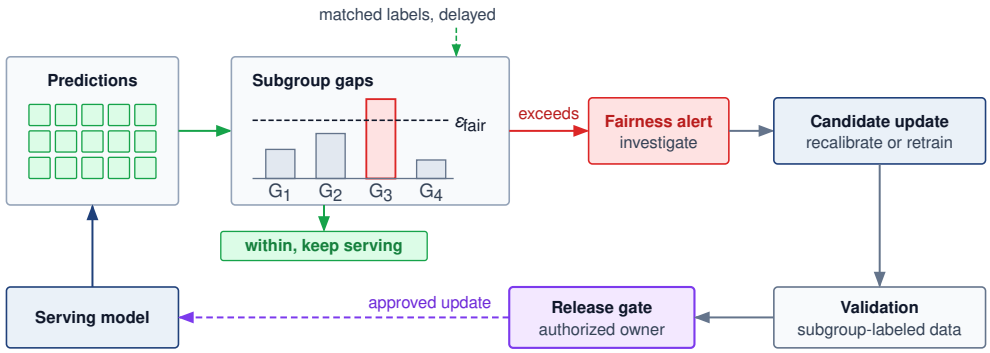


Figure 0.244: Fairness Monitoring Pipeline: End-to-end observability for deployed models. Model predictions feed subgroup metric computation across demographic segments; a threshold check identifies performance or fairness regressions; and alerts initiate investigation and may trigger candidate retraining. Validation and an authorized release decision determine whether an update returns to serving; monitoring alone does not preserve responsible AI properties.

This requires telemetry pipelines that capture model versioning, input characteristics, prediction confidence, and postinference feedback. These logs support drift detection and provide evidence for retrospective audits of fairness and robustness. Monitoring systems must also be integrated with alerting, update scheduling, and policy review processes to support timely and traceable intervention.

Monitoring also supports feedback-driven improvement. For example, repeated user disagreement, correction requests, or operator overrides can signal problematic behavior. This feedback must be aggregated, validated, and translated into updates to training datasets, data labeling processes, or model architecture. However, such feedback loops carry risks: biased user responses can introduce new inequities, and excessive logging can compromise privacy. Designing these loops requires careful coordination between user experience design, system security, and ethical governance.



At a 5 percent false-alarm rate, 150 metrics raise about 7.5 spurious alerts per interval.

At the scale of a global production fleet, responsible AI monitoring becomes a substantial data engineering challenge. This sizing scenario assumes roughly 864 million inferences per day at 10,000 queries/s across 50 demographic subgroups, with 150 metrics (false positive rate, true positive rate, and calibration error for each of the 50 groups). A 1 percent sampling rate yields 8.64 million monitoring events daily. At an assumed 200 bytes per record, those events require approximately 1.7 GB per day before additional audit records or storage overhead. Actual record contents and retention follow the approved measurement and privacy requirements; outcome-dependent metrics also require labels that may arrive later. The monitoring infrastructure itself must therefore be reliable, secure, and cost-effective. With 150 active metrics, an illustrative per-metric false-alarm probability of 5 percent would yield roughly 7.5 false alerts per evaluation interval if every tested null hypothesis is true. This expected count follows by summing false-alarm probabilities and does not require independence. Production thresholds must instead reflect subgroup denominators, delayed labels, repeated testing, confidence intervals, minimum detectable effects, and correction for multiple comparisons. A threshold crossing opens an investigation; it does not by itself prove discrimination or justify automatic retraining.

In C^3 terms, this monitoring load is communication and coordination added to the fleet. Every sampled record must travel from a serving replica to the aggregation tier, and every alert must reach an owner who can act before the harm it signals compounds. The deployment tier sets how long that path is. A cloud service aggregates telemetry continuously, subject to storage and privacy budgets. An intermittently connected client keeps bounded local records until it next synchronizes, and a safety-critical edge system needs local checks that can trigger fallback within the decision deadline because the fleet cannot respond in time. A disconnected TinyML endpoint may deliver its evidence only at a servicing visit, and correcting its model may require a firmware update or physical replacement. Those differences change the evidence delay and remediation path, not the requirement to name an owner for each monitored obligation.

Monitoring is useful only when signals reach that owner in time to investigate and intervene; a fairness alert without a response process changes nothing for the people it describes. The monitoring cost is the price of turning fairness from an offline audit into an operational signal, and observation still is not remediation. The privacy, unlearning, and generative-system controls examined earlier, which govern data exposure through logs, outputs, and model weights, removal under applicable deletion obligations, and the prompts and reward models that shape generative outputs, need the same explicit evidence, ownership, and response paths.

Validation approaches

If detection identifies a problem and mitigation attempts to fix it, **validation** supplies evidence to the evaluation-and-assurance stage of table 0.223. Validation is not a separate pillar or a claim that the system is safe. It tests bounded requirements and records residual uncertainty for the launch authority. Different stakeholders need different evidence: developers need diagnostics, auditors need reproducible statistical analyses, regulators may require conformity artifacts, and affected users need understandable reasons and a functioning contestability path. The evidence bundle can include fairness audits, privacy-accounting checks, robustness and distribution-shift tests, explanation-fidelity checks, and revalidation triggers tied to material changes.

Fairness audits, adversarial robustness testing, and explanation verification require evaluation capacity before release. Finding a defect at that stage can avoid exposing users and reduce subsequent recovery work. A production defect may additionally require containment across replicas, investigation of affected decisions, and individual remedies; the cost depends on its consequences and deployment scope. Validation is therefore not a *one-time gate* but a *continuous process*. Material changes to data, models, or workflows must trigger reassessment of the claims they affect, even when the system passed its original release review.

↩ Continuous integration, release validation gates, and canary deployment pipelines are established in section 6.

Table 0.231 summarizes the evidence bundle by risk class. The table is not a separate checklist; it is a way to make residual risk explicit before deployment.

Table 0.231: Validation Evidence by Risk Class: Responsible validation combines several kinds of evidence because no single metric proves that a system is safe to deploy. Each risk class needs a measurable artifact and an operational owner.

Risk class	Evidence artifact	Operational owner
Fairness	Disaggregated metrics, thresholds, confidence intervals	Product owner and model-risk reviewer
Privacy	Privacy budget, deletion evidence, retention and access logs	Data-governance and privacy engineering teams
Robustness	Drift tests, corruption tests, canaries, red-team probes	ML platform and incident-response teams
Explanation	Fidelity tests, stability checks, recourse documentation	Model team and user-facing operations
Governance	Approval record, residual-risk owner, revalidation trigger	Review board or accountable launch authority

Explanation can be a visible and computationally demanding form of validation evidence. Fairness metrics characterize aggregate disparities under selected definitions, while local explanation methods characterize influences, sensitivities, or contrastive alternatives for a particular output. Neither supplies a general guarantee, and an attribution cannot verify why a decision was justified. Together with behavioral tests, provenance, documentation, and contestability, these artifacts help operators investigate whether a decision relied on inappropriate signals and help affected users formulate a challenge.

Sociotechnical system dynamics

Consider a constructed scenario in which a hospital deploys a sepsis predictor with strong held-out accuracy, but clinicians overwhelmed by alerts do not act on its warnings. Predictive performance alone cannot establish a mortality benefit: the intervention must reach an appropriate clinician in time and support a useful action. The deployment therefore needs evaluation of the human workflow as well as the model.

The technical tools of the previous sections address bounded problems in bias measurement, privacy protection, explanation, and robustness. The sepsis scenario shows why those controls must connect to the human workflow. Engineers must examine who receives an alert, what action is feasible, and which incentives influence that action alongside model performance. Optimization can compare alternatives under stated objectives and constraints, but it cannot establish whose interests those objectives should represent. That judgment requires stakeholder participation and accountable governance.

Deployed systems create feedback loops that reshape future data, distribute decisions between people and models, and expose disagreements about acceptable outcomes. Each mechanism can invalidate an assurance claim even when the implementation still meets its original technical specification. The analysis must therefore follow the consequences of deployment through the surrounding workflow and back into system design.

System feedback loops

The sociotechnical feedback invariant (principle 25) captures this dynamic: deployed models shape the environment they operate in, so that future data $p_{t+1}(x)$ is a function of the model's past decisions $f_t(x)$. Here, x is the model's input, as in $h(x)$ earlier in the chapter; $p_t(x)$ denotes the input distribution observed by the system at time t, while $f_t(x)$ denotes the deployed model or decision policy acting on those inputs. Such systems require closed-loop governance; reliability requires modeling the closed feedback loop rather than feed-forward inference alone.

Machine learning systems do not merely observe and model the world; they also shape it. Once deployed, their predictions and decisions often influence the environments they are intended to analyze. This feedback alters future data distributions, modifies user behavior, and affects institutional practices, creating a recursive loop between model outputs and system inputs. Over time, such dynamics can amplify biases, entrench disparities, or unintentionally shift the objectives a model was designed to serve. Figure 0.245 traces this compounding cycle across four interconnected

stages, from biased training data through model predictions and disparate real-world outcomes to reinforced bias in newly collected data. Green callouts highlight three targeted lifecycle intervention points capable of interrupting the cycle: preprocessing audits and reweighting at the data ingestion layer, in-processing fairness constraints during model training, and post-processing threshold calibration at the serving layer before decisions produce irreversible real-world impacts.

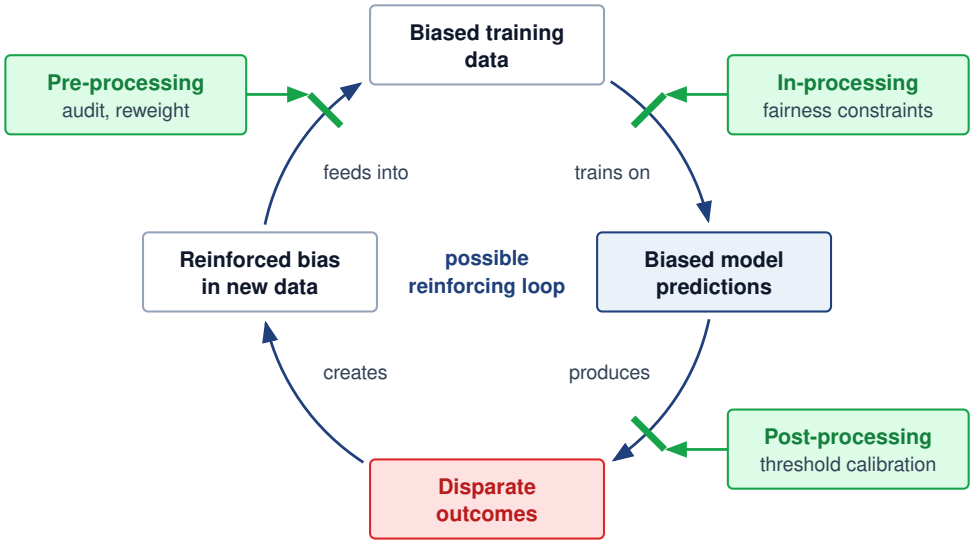


Figure 0.245: Bias Amplification Feedback Loop: When ML systems retrain on their own outputs, historical bias in training data propagates through model predictions, downstream outcomes, and reinforced data before feeding back as even more biased retraining data. The edges ('trains on', 'produces', 'creates', 'feeds into') show a possible reinforcing mechanism, not a guarantee that every iteration increases disparity. Green intervention arrows mark where pre-processing (data audit and reweighting), in-processing (fairness constraints), and post-processing (threshold calibration) can break the cycle.

The closed-loop reinforcement modeled in figure 0.245 shows what a static post-hoc fairness audit can miss. When a system retrains on outcomes selected by its own decisions, the resulting sample may reinforce initial skews without revealing what would have happened under a different policy. The feedback policy and available evidence determine whether disparities grow or shrink; an effective intervention need not modify every stage. Fairness therefore becomes a lifecycle constraint, in which data visibility determines what can be measured, threshold policy determines where errors land, and feedback infrastructure determines whether disparities decay or compound.

Predictive policing illustrates how this feedback can arise. A model trained on recorded arrests may direct more patrols to a neighborhood. If greater patrol presence produces more recorded incidents and the training pipeline treats those records as an unbiased measure of underlying crime, later predictions can reinforce the original allocation. The loop depends on how deployment changes observation and how retraining uses that evidence; it is not an inevitable consequence of every predictive model.

Recommender systems such as Archetype B (DLRM at Scale) exhibit similar dynamics in digital environments. A content recommendation model that prioritizes engagement may gradually narrow the range of content a user is exposed to, leading to feedback loops that reinforce existing preferences or polarize opinions. These effects can be difficult to detect using conventional performance metrics, as the system continues to optimize its training objective even while diverging from broader social or epistemic goals.

From a systems perspective, feedback loops present a core challenge to responsible AI. They undermine the assumption of independently and identically distributed data and complicate the evaluation of fairness, robustness, and generalization. Standard validation methods, which rely on static test sets, may fail to capture the evolving impact of the model on the data-generating process.

Once such loops are established, interventions aimed at improving fairness or accuracy may have limited effect unless the underlying data dynamics are addressed.

Designing for responsibility in the presence of feedback loops requires a lifecycle view of machine learning systems. It requires monitoring model performance over time while analyzing how system outputs reshape the environment, how these changes are captured in new data, and how retraining practices either mitigate or exacerbate these effects.

In cloud-based systems, these updates may occur frequently and at scale, with extensive telemetry available to detect behavior drift. In contrast, edge and embedded deployments often operate offline or with limited observability. A smart home system that adapts thermostat behavior based on user interactions may reinforce energy consumption patterns or comfort preferences in ways that alter the home environment, and subsequently affect future inputs to the model. Without connectivity or centralized oversight, these loops may go unrecognized, despite their impact on both user behavior and system performance. Operational monitoring practices, including drift detection, performance tracking, and automated alerting, are essential for detecting and managing these feedback dynamics in production systems.

Systems must be equipped with mechanisms to detect distributional drift, identify behavior shaping effects, and support corrective updates that align with the system's intended goals. Feedback loops are not inherently harmful, but they must be recognized and managed. When left unexamined, they introduce systemic risk; when thoughtfully addressed, they provide an opportunity for learning systems to adapt responsibly in complex, dynamic environments.

Human-AI collaboration

Human operators turn feedback-loop risk into a shared-control problem. Machine learning systems are often deployed not as standalone agents, but as components in larger workflows that involve human decision-makers. In many domains, such as healthcare, finance, and transportation, models serve as decision-support tools, offering predictions, risk scores, or recommendations that are reviewed and acted upon by human operators. The collaborative configuration raises questions about how responsibility is shared between humans and machines, how trust is calibrated, and how oversight mechanisms are implemented in practice.

Human-AI collaboration introduces both opportunities and risks. When designed appropriately, systems can augment human judgment, reduce cognitive burden, and enhance consistency in decision-making. However, when poorly designed, they may lead to automation bias,[29] where users over-rely on model outputs even in the presence of clear errors.

Conversely, excessive distrust can result in algorithm aversion, where users disregard useful model predictions due to a lack of transparency or perceived credibility. The effectiveness of collaborative systems depends on how the system communicates uncertainty, provides explanations, and enables human override or correction, rather than on model accuracy alone.

Institutional incentives can reinforce automation bias when operators expect greater scrutiny for overriding a model than for accepting it. Consider an illustrative pair of judicial decisions. In Scenario A, a judge overrides a "high risk" algorithmic score and releases a defendant who later re-offends. The judge anticipates criticism for departing from the recommendation. In Scenario B, the judge follows the score and detains the defendant unnecessarily, but the institution treats agreement with the model as evidence of proper procedure. The incentive comes from that review policy, not from the model's measured accuracy.

This asymmetry can encourage institutional deference, where human oversight becomes a "rubber stamp" for algorithmic decisions. Review procedures should evaluate the evidence behind both agreement and disagreement, rather than treating agreement as inherently correct. The required documentation must fit the decision's stakes and the operator's workload so that justification supports scrutiny rather than becoming another routine approval.

Oversight mechanisms must be tailored to the deployment context. In high-stakes domains, such as medical triage or autonomous driving, humans may be expected to supervise automated decisions in real time. This configuration places cognitive and temporal demands on the human operator and assumes that intervention will occur quickly and reliably when needed. In practice, however, continuous human supervision is often impractical or ineffective, particularly when the operator must monitor multiple systems or lacks clear criteria for intervention.

[29] **Automation Bias**: Inappropriate reliance on automated recommendations, including acceptance of erroneous outputs. Its prevalence depends on the task, interface, workload, and users' ability to check the output. Strong average performance can encourage reliance without making rare errors easier to recognize. Uncertainty displays, selective review, or requests for justification should be evaluated for their effects on correction rates, workload, and response time rather than assumed to improve safety.

From a systems design perspective, supporting effective oversight requires more than providing access to raw model outputs. Interfaces must be constructed to surface relevant information at the right time, in the right format, and with appropriate context. Confidence scores, uncertainty estimates, explanations, and change alerts can all play a role in enabling human oversight. Workflows must define when and how intervention is possible, who is authorized to override model outputs, and how such overrides are logged, audited, and incorporated into future system updates.

Consider a hospital triage system that uses a machine learning model to prioritize patients in the emergency department. The model generates a risk score for each incoming patient, which is presented alongside a suggested triage category. In principle, a human nurse is responsible for confirming or overriding the suggestion. However, if the model's outputs are presented without sufficient justification, such as an explanation of the contributing features or the context for uncertainty, the nurse may defer to the model even in borderline cases. Over time, the model's outputs may become the de facto triage decision, especially under time pressure. If a distribution shift occurs (for instance, due to a new illness or change in patient demographics), the nurse may lack both the situational awareness and the interface support needed to detect that the model is underperforming. In such cases, the appearance of human oversight masks a system in which responsibility has effectively shifted to the model without clear accountability or recourse.

In such systems, human oversight is not merely a matter of policy declaration, but a function of infrastructure design: how predictions are surfaced, what information is retained, how intervention is enacted, and how feedback loops connect human decisions to system updates. Without integration across these components, oversight becomes fragmented, and responsibility may shift invisibly from human to machine.



Napkin Math 16.7: The automation bias paradox

Consider a radiology department deploying an AI assistant for tumor detection, where standalone human sensitivity is $S_{\text{human}} = 92$ percent and standalone AI sensitivity is $S_{\text{AI}} = 95$ percent.

One might assume the combined system performance would exceed 95 percent. However, this illustrative scenario assumes that humans accept the AI's missed detections at rates of 60–80 percent. Among patients with tumors, the AI misses a tumor with probability $1 - S_{\text{AI}} = 0.05$; if the human accepts that miss ($\alpha = 0.7$), these accepted misses alone create a conditional failure probability of $0.05 \times 0.7 = 0.035$. In this simplified upper-bound case, where every other AI miss is corrected and no correct detection is overturned, sensitivity is 96.5 percent. False positives require separate evaluation among patients without tumors, while fatigue and interface delays can further affect the workflow.

This conditional error-acceptance probability matters more than the overall override rate. A low override rate may reflect few model errors or failures to detect them; those interpretations require different interventions. The trust calibration gap arises when reliance exceeds what the evidence supports. Evaluate interface changes against the fraction of actual errors corrected, errors introduced by overrides, and response delay before adopting them.

The boundary between decision support and automation is often fluid. Systems initially designed to assist human decision-makers may gradually assume greater autonomy as trust increases or organizational incentives shift. This transition can occur without explicit policy changes, resulting in de facto automation without appropriate accountability structures. Responsible system design must therefore anticipate changes in use over time and ensure that appropriate checks remain in place even as reliance on automation grows.

Human-AI collaboration requires careful integration of model capabilities, interface design, operational policy, and institutional oversight. Collaboration is not simply a matter of inserting a "human-in-the-loop"; it is a systems challenge that spans technical, organizational, and ethical dimensions. Designing for oversight entails embedding mechanisms that allow intervention, support informed trust, and support shared responsibility between human operators and machine learning systems.

Normative pluralism and value conflicts

Human-AI collaboration exposes a deeper systems constraint: different stakeholders often hold conflicting values and priorities. Algorithms can help identify feasible compromises, but they cannot establish whose priorities should govern a deployment. Technical excellence is necessary but insufficient for trustworthy AI because choosing among conceptions of fairness, privacy, and accountability requires a legitimate decision process as well as evidence about their consequences.

Responsible machine learning cannot be reduced to the optimization of a single objective. In real-world settings, machine learning systems are deployed into environments shaped by diverse, and often conflicting, human values. A high-stakes deployment makes these tensions concrete.

Example 16.2: Conflicting values in practice

Scenario: An adolescent mental health crisis detection pipeline must balance competing stakeholder objectives across real-time inference and data retention paths.

Diagnosis: Optimizing clinical efficacy via aggressive alert dispatch conflicts with patient autonomy and privacy protocols. Restricting data retention to protect user privacy limits offline retraining and explanation auditing, while routing high-confidence alerts to human counselors increases per-query serving cost and the end-to-end latency $L_{\text{lat,total}}$, measured from the incoming message to an acknowledged alert. A local differential privacy mechanism would need a specified privacy unit, accountant, and clinical utility evaluation. The automated dispatch SLA covers producing and acknowledging an alert, not completing human counseling. Human response needs a separate deadline, staffed queue capacity, and an escalation policy for overload.

Systems lesson: Responsible AI trade-offs are hard architectural requirements, not after-the-fact policy notes. The deployment pipeline must encode stakeholder choices into explicit latency ($L_{\text{lat,total}}$) and privacy budgets before optimization begins.

What constitutes a fair outcome for one stakeholder may be perceived as inequitable by another. Similarly, decisions that prioritize accuracy or efficiency may conflict with goals such as transparency, individual autonomy, or harm reduction. These tensions are not incidental; they are structural. They reflect the pluralistic nature of the societies in which machine learning systems are embedded and the institutional settings in which they are deployed.

Fairness is a particularly prominent site of value conflict. Fairness can be formalized in multiple, often incompatible ways. A model that satisfies demographic parity may violate equalized odds; a model that prioritizes individual fairness may undermine group-level parity. Choosing among these definitions is not purely a technical decision but a normative one, informed by domain context, historical patterns of discrimination, and the perspectives of those affected by model outcomes. In practice, multiple stakeholders, including engineers, users, auditors, and regulators, may hold conflicting views on which definitions are most appropriate and why.

Value conflicts extend beyond fairness alone. Conflicts also arise between interpretability and predictive performance, privacy and personalization, or short-term utility and long-term consequences.

Each deployment tier gives these conflicts a different form, adding to the tier comparison of section 5 the question of who decides. A voice assistant that personalizes on a mobile device keeps raw data local, which reduces transmission exposure without by itself establishing a privacy guarantee. Users with underrepresented usage patterns may still receive less accurate predictions, and detecting that disparity requires decisions about consent, aggregation, and access, so privacy, fairness, and personalization must be weighed against one another. A cloud credit-scoring or recommendation platform faces demands for explanations of consequential decisions while relying on complex ensembles or proprietary training data whose disclosure may be commercially sensitive or technically infeasible, which sets institutional accountability against business confidentiality. An edge camera or drone that compresses its model to meet latency and energy budgets trades efficiency against robustness; the effect must be measured on the deployed candidates under the expected shifts and threat model rather than assumed, and a more resilient candidate may exceed the memory or power budget. A TinyML device without persistent connectivity cannot absorb new

fairness requirements through local retraining, so whether servicing or intermittent synchronization can deliver a revised model, and whether explanations and appeals can run off-device on preserved evidence, becomes part of the value decision. In every tier the conflict extends beyond what the model optimizes to what the system can support after deployment.

The recurring systems constraint is normative pluralism, not an abstract philosophical challenge. Technical approaches such as multi-objective optimization, constrained training, and fairness-aware evaluation can help surface and formalize trade-offs, but they do not eliminate the need for judgment. Decisions about whose values to represent, which harms to mitigate, and how to balance competing objectives cannot be made algorithmically. They require deliberation, stakeholder input, and governance structures that extend beyond the model itself.

Participatory methods and the Value-Sensitive Design process introduced with value alignment (section 25) offer paths forward. Rather than treating values as parameters to be optimized after deployment, these approaches seek to engage stakeholders during the requirements phase, define ethical trade-offs explicitly, and trace how they are instantiated in system architecture. Some requirements can be satisfied together; others require a documented choice or a decision not to deploy. Making these judgments explicit gives affected stakeholders something concrete to question and revise.

Machine learning systems are not neutral tools. They embed and enact value judgments, whether explicitly specified or implicitly assumed. A commitment to responsible AI requires acknowledging this fact and building systems that reflect and respond to the ethical and social pluralism of their operational contexts.

Institutional embedding of responsibility

Transparency and contestability fail when responsibility is distributed without corresponding authority. Model, data, product, legal, and operational teams may each control one part of a harmful decision while none can coordinate its correction. Institutional design must connect those roles through a named escalation path, review capacity, and authority to restrict deployment or provide remedy.

Operational rigor comes with a measurable cost. Public responsible-AI standards and internal review processes illustrate that governance can add release latency through impact assessments, model reviews, red-team exercises, and documentation gates. Review capacity therefore becomes part of deployment planning. If every high-risk launch needs specialized review, the review queue becomes a bottleneck just like security review or capacity approval. That cost must be budgeted alongside remediation and residual risk; preventive review can reduce exposure, but does not guarantee that every incident will be avoided or that remediation will always cost more.

Embedding responsibility institutionally requires more than assigning accountability. It requires the design of processes, tools, and incentives that allow responsible action. Technical infrastructure such as versioned model registries, model cards, and audit logs must be coupled with organizational structures such as ethics review boards, model risk committees, and red-teaming[30] procedures. Their effectiveness depends on whether findings reach an authorized owner, receive a timely response, and lead to a verified correction when one is required. The existence of a committee or audit log alone does not establish that concerns have been addressed.

Third-party and foundation-model dependencies do not transfer accountability to the supplier. A deploying organization may inherit weights, safety evaluations, data documentation, or contractual controls, but it still chooses the use, interface, retrieved context, tools, user population, monitoring, and response process. Procurement therefore needs the same rigor as an internal model gate: documented intended and prohibited uses, evaluation scope, version and change notification, incident disclosure, audit access, data handling, service dependencies, fallback behavior, and an exit plan. When supplier evidence is unavailable, the assurance case must record the gap as residual risk rather than silently treating a vendor assertion as a verified control.

The organization must provide these functions across the actual deployment lifecycle. A cloud team may operate continuous review and monitoring services; an embedded-device operator may rely on certification, firmware inventories, servicing, and recall. Domain experts, affected parties, and regulators remain part of the evidence and authority structure in either case. The operating arrangement must still support correction of an individual decision.

30 **Red Teaming**: From Cold War military simulations where the "Red Team" acted as the Soviet adversary to probe US defenses. In Responsible AI, red teaming is the adversarial audit phase: specialized teams (hackers, linguists, ethicists) deliberately probe models for jailbreaks, bias, or toxic outputs before deployment. This discovery process identifies the long-tail risks that standard unit tests cannot catch.

Accountability becomes visible at the point of remedy. Affected people need a discoverable channel to challenge an outcome, a record of the evidence considered, a reviewer with authority to correct the decision, a response deadline, and a way to propagate the correction into downstream systems. Aggregate model improvement is not a substitute for individual remedy, because retraining next quarter does not correct a benefit denied today. England's 2020 exam-grading algorithm showed how quickly an aggregate method can outrun the remedy path its decisions require. Incident procedures must therefore connect technical containment and rollback to notification, correction, compensation where applicable, root-cause analysis, and verification that the remedy reached every dependent decision record.

War Story 16.2: The algorithmic grading failure (2020)

Context: In August 2020, following exam cancellations during COVID-19, England's qualifications regulator (Ofqual) deployed a statistical standardization algorithm to grade ~280,000 A-level students (Ofqual 2020; Department for Education and Ofqual 2020).

Mechanism: To control grade inflation, the standardization method combined historical results with the cohort's prior attainment to estimate grade distributions, then allocated grades using teachers' student rankings. Small subject cohorts received greater weight on teacher-assessed grades. The method therefore used individual ranking evidence, but constrained its interpretation through cohort-level predictions that could differ from teachers' assessments of individual achievement.

Impact: The calculated grade was lower than the teacher-assessed grade in 39.1 percent of cases (Ofqual 2020). Public outcry and student protests prompted a reversal of the grading policy days later.

Fix: Students were awarded the higher of the center-assessed grade and the calculated grade, replacing the earlier standardization policy.

Systems lesson: An aggregate prediction does not establish that every individual outcome is justified. An appeal channel must specify which evidence can change the decision, who can review it, and how quickly a correction can take effect; the existence of a procedural appeal alone does not answer those questions.

Retirement closes the evidence chain that the assurance lifecycle (section 2) opened before launch. The service owner verifies that serving routes and credentials are disabled, downstream operators receive the shutdown decision, and retained records follow the approved retention policy. An appeal owner remains responsible for unresolved decisions after inference stops. Ending a model's service life therefore closes its execution path without abandoning its outstanding obligations.

The system-level thesis thus extends past the serving stack into the organization: responsibility is a dynamic property of how systems are governed, maintained, and contested over time, owned by no single model or team. Embedding it within institutions, by means of policy, infrastructure, and accountability mechanisms, is what aligns machine learning systems with the social values and operational realities they are meant to serve.

Taken together, institutional responsibility, value conflicts, feedback loops, human-AI collaboration, contestability, and computational equity show why the technical foundations from section 7 through section 23 cannot ensure responsible AI on their own. Those technical foundations remain necessary, but they need organizational authority, operational telemetry, and escalation paths to survive contact with deployed systems. Resource constraints also determine who can develop, deploy, and benefit from responsible AI capabilities, so implementation choices are not merely local engineering details. Otherwise, a fairness metric with no owner, an explanation with no appeal process, or a monitoring signal with no remediation budget becomes evidence without action. Once an AI system changes the environment it operates in, engineering teams must turn responsible-AI principles into corporate routines under deadline pressure, resource limits, and competing incentives.

Checkpoint 16.3: When correct code fails in deployment

This section showed why mathematically sound, fair, explainable models still fail in human institutions: feedback loops that reshape the data, automation bias and institutional deference, normative pluralism among stakeholders, and the institutional authority that contestability needs before it can deliver a remedy.

Diagnosing the human-system interaction

- ☐ **Alert adoption failure**: propose two workflow failures that could explain ignored sepsis alerts despite high offline accuracy, and identify a measurement that distinguishes them. Propose an interface or workflow change for one explanation, then state how timely action, actual error correction, workload, and patient outcomes would be evaluated.
- ☐ **Paradox of reliability**: explain why overall accuracy and override frequency do not establish the rate of actual errors corrected, and identify what evidence would justify an interface change.

Reasoning about loops and stakeholders

- ☐ **Feedback loops**: trace how a feedback loop makes a model's original prediction self-fulfilling in a predictive-policing or recommender system, and explain why a static test set fails to detect it.
- ☐ **Normative pluralism**: justify why no algorithm resolves conflicts among medical efficacy, patient autonomy, privacy, and legal compliance in the adolescent mental-health crisis-detection pipeline, and identify what the engineering team must do before optimization begins.

Operationalizing Responsible AI at Fleet Scale

The data science team wants to hold back deployment for a month to conduct rigorous fairness audits on a new generative model. The executive team, watching a competitor launch a similar feature, demands the model be deployed by Friday. Even when engineers know how to evaluate the relevant risks, the organizational structure, budget, and business priorities must give them the time and authority to act on that knowledge.

The scenario exposes the implementation gap between technical capability and operational authority. Responsible AI methods provide necessary tools, but their effectiveness depends on organizational structures, data infrastructure, evaluation processes, and sustained commitment that extends far beyond algorithm development. Systems maintain responsible behavior over time only when those implementation supports survive deadline pressure, product incentives, and postdeployment drift.

The practical barriers to embedding responsible AI in production ML systems span the classical People-Process-Technology framework. People challenges, the subject of section 31, encompass the organizational structures, role definitions, and incentives that determine whether ethical commitments translate into durable operational behavior. Technology challenges begin with the data itself (section 31), where quality gaps and acquisition costs decide what a team can fix. Process challenges cover how competing objectives are resolved (section 32) and how responsibility constraints survive scaling, maintenance, and continuous delivery (section 32). A decision framework (section 33) then turns the three dimensions into deployment-specific priorities.

These dimensions matter because responsible AI fails when organizational incentives, development workflows, and production infrastructure pull in conflicting directions. The framework connects each technical claim to the process and owner needed to act on it. A fairness metric without an accountable owner produces no remediation, while a governance process lacking telemetry cannot detect drift. A formal privacy guarantee also does not implement deletion; that requires lineage and a removal workflow for the relevant data and model state. Effective implementation therefore demands systems-level strategies that embed responsibility into the architecture, infrastructure, and operating practices of machine learning deployment across all three dimensions simultaneously.

Organizational structures and incentives

Section 30 established that responsibility needs authority, review capacity, and a remedy path. This subsection examines why organizations so often fail to supply them, through fragmented ownership and misaligned incentives. Within companies, research labs, and public institutions, responsibility must be translated into concrete roles, workflows, and incentives. In practice, however, organizational structures often fragment responsibility, making it difficult to coordinate ethical objectives across engineering, product, legal, and operational teams.

Responsible AI requires sustained investment in practices such as subgroup performance evaluation, explainability analysis, adversarial robustness testing, and the integration of privacy-preserving techniques like differential privacy or federated training. These activities can be time-consuming and resource-intensive, yet they often fall outside the formal performance metrics used to evaluate team productivity. For example, teams may be incentivized to ship features quickly or meet performance benchmarks, even when doing so undermines fairness or overlooks potential harms. When ethical diligence is treated as a discretionary task, instead of being an integrated component of the system lifecycle, it becomes vulnerable to deprioritization under deadline pressure or organizational churn.

Responsibility is further complicated by ambiguity over ownership. In many organizations, no single team is responsible for ensuring that a system behaves ethically over time. Model performance may be owned by one team, user experience by another, data infrastructure by a third, and compliance by a fourth. When issues arise, including disparate impact in predictions or insufficient explanation quality, there may be no clear protocol for identifying root causes or coordinating mitigation. As a result, concerns raised by developers, users, or auditors may go unaddressed, not because of malicious intent, but due to lack of process and cross-functional alignment.

Establishing effective organizational structures for responsible AI requires more than policy declarations. It demands operational mechanisms: designated roles with responsibility for ethical oversight, documented escalation pathways, accountability for postdeployment monitoring, and incentives that reward teams for ethical foresight and system maintainability. Beyond the review boards and model risk committees described in section 30, some organizations embed domain experts or user advocates in product teams to anticipate downstream impacts and evaluate value trade-offs in context.

The responsibility for ethical system behavior is distributed across multiple constituencies, including industry, academia, civil society, and government. Figure 0.246 structures this governance hierarchy across four concentric tiers surrounding the central AI system: the development team executes technical controls (fairness testing, model cards, red-teaming); the organization governs operational processes (impact assessments, ethical review boards); industry establishes consensus baselines (ISO standards, external audits); and government and society enforce legal boundaries (GDPR, the EU AI Act, sector-specific statutes) (Shneiderman 2022, 2020). Within organizations, this distribution must be mirrored by mechanisms that connect technical design with strategic oversight and operational control. Without these linkages, responsibility becomes diffuse, and well-intentioned efforts may be undermined by systemic misalignment.

Responsible AI is not merely a question of technical excellence or regulatory compliance. It is a systems-level challenge that requires aligning ethical objectives with the institutional structures through which machine learning systems are designed, deployed, and maintained. Creating and sustaining these structures is essential for ensuring that responsibility is embedded in the organization that governs deployment as well as in the model itself. The same ownership problem becomes concrete at the data layer: teams can know how to audit a dataset and still lack the authority, access, or infrastructure needed to change it.

Data constraints and quality gaps

Improving data pipelines remains one of the most difficult implementation challenges in practice despite broad recognition that data quality is important for responsible machine learning. Developers and researchers often understand the importance of representative data, accurate labeling, and mitigation of historical bias. Even when intentions are clear, however, structural and organizational barriers frequently prevent meaningful intervention. Responsibility for data is often distributed across teams, governed by legacy systems, or embedded in broader institutional processes that are difficult to change.

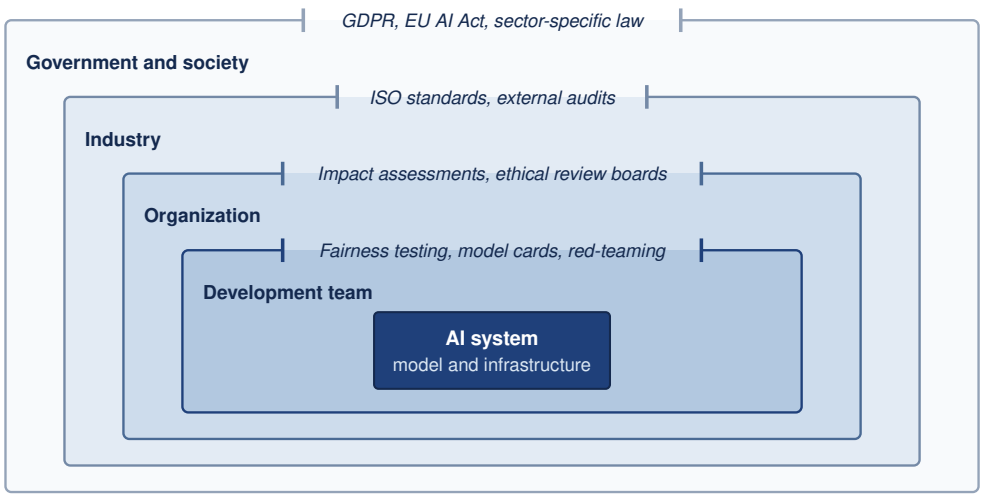


Figure 0.246: Layers of Responsibility: Effective human-centered AI implementation requires shared accountability across nested layers. From the core Development Team outward through the Organization, Industry, and Government/Society, each surrounding layer enforces norms the inner layers cannot self-impose. External anchors, including ISO AI management standards, fairness testing, model cards, red-teaming, impact assessments, GDPR, the EU AI Act, and sector-specific law, bind these layers to practice (International Organization for Standardization and International Electrotechnical Commission 2023b; European Parliament and Council of the European Union 2016; European Parliament and Council of the European Union 2024).

Data engineering principles, including data validation, schema management, versioning, lineage tracking, and quality monitoring, provide the technical foundation for addressing these challenges. However, applying these principles to responsible AI introduces additional complexity: fairness requires assessing representativeness across demographic groups, bias mitigation demands understanding historical data collection practices, and privacy preservation constrains which validation techniques are permissible. The organizational challenges described here reflect the gap between having robust data engineering infrastructure and using it effectively to support responsible AI objectives.

Subgroup imbalance, label ambiguity, and distribution shift, each of which affect generalization and performance across domains, are well-established concerns in responsible ML. These issues often manifest in the form of poor calibration, out-of-distribution failures, or demographic disparities in evaluation metrics. However, addressing them in real-world settings requires more than technical knowledge. It requires access to relevant data, institutional support for remediation, and sufficient time and resources to iterate on the dataset itself. Teams may lack the authority or infrastructure to modify a training dataset even after discovering performance disparities. Versioning and lineage make controlled correction possible by identifying the affected datasets and downstream models; they do not remove the need to acquire replacement data, retrain, and revalidate those models.

In domains like healthcare, education, and social services, these challenges are especially pronounced. Data acquisition may be subject to legal constraints, privacy regulations, or cross-organizational coordination. For example, a team developing a triage model may discover that their training data underrepresents patients from smaller or rural hospitals. Correcting this imbalance would require negotiating data access with external partners, aligning on feature standards, and resolving inconsistencies in labeling practices. The logistical and operational costs can be prohibitive even when all parties agree on the need for improvement.

Efforts to collect more representative data may also run into ethical and political concerns. In some cases, additional data collection could expose marginalized populations to new risks. This paradox of exposure, in which the individuals most harmed by exclusion are also those most vulnerable to misuse, complicates efforts to improve fairness through dataset expansion. For example, gathering more data on nonbinary individuals to support fairness in gender-sensitive applications may improve

model coverage, but it also raises serious concerns around consent, identifiability, and downstream use. Teams must navigate these tensions carefully, often without clear institutional guidance.


Napkin Math 16.8: The representation tax

Problem: A medical imaging model trained on data from 5 hospitals achieves 94 percent accuracy overall but only 78 percent on underrepresented populations (rural patients, elderly patients, patients with darker skin tones). A proposed acquisition plan seeks data from 50+ hospitals across diverse geographies, demographics, and equipment types. This budget is an illustrative proposal, not a sample-size requirement derived from the accuracy gap; validation must establish whether it improves the relevant outcomes.

Math:

1. **Data acquisition cost**: \$50–\$200 per labeled medical image, with 100,000 images budgeted per underrepresented subgroup.
2. **Representation-tax scenario**: For 10 subgroups, at the midpoint of the cost range, 10 times 100,000 images per subgroup times \$125 per image yields \$125M in data acquisition alone. This calculation assumes distinct purchased examples for each allocation; overlapping demographic groups require deduplication or explicit shared-cost allocation.
3. **Data harmonization**: Data harmonization across different scanners, protocols, and labeling conventions adds 30 percent–50 percent overhead, bringing the total to \$162.5M–\$187.5M.

Systems insight: The acquisition budget makes coverage goals explicit, but spending does not guarantee that an accuracy gap closes. Teams should prioritize identified coverage deficiencies using harm, data quality, privacy, and expected benefit criteria, then validate the resulting model on the intended populations.



Harmonizing scanners, protocols, and labels adds 30–50 percent to the acquisition cost.

Upstream biases in data collection systems can persist unchecked even when data is plentiful. Many organizations rely on third-party data vendors, external APIs, or operational databases that were not designed with fairness or interpretability in mind. For instance, Electronic Health Records, which are commonly used in clinical machine learning, often reflect systemic disparities in care, as well as documentation habits that encode racial or socioeconomic bias (Himmelstein et al. 2022). Teams working downstream may have little visibility into how these records were created, and few levers for addressing embedded harms.

Improving dataset quality is often not the responsibility of any one team. Data pipelines may be maintained by infrastructure or analytics groups that operate independently of the ML engineering or model evaluation teams. This organizational fragmentation makes it difficult to coordinate data audits, track provenance, or implement feedback loops that connect model behavior to underlying data issues. In practice, responsibility for dataset quality tends to fall through the cracks, recognized as important, but rarely prioritized or resourced.

Addressing these challenges requires long-term investment in infrastructure, workflows, and cross-functional communication. Data validation and automated audits can identify defects, while datasheets and the Data Nutrition Project[31] document dataset properties. Model cards connect model evaluation and intended use to that evidence. These tools help only when teams have the mandate and support to act on their findings.

Improving data quality is therefore fundamentally a question of how responsibility for data is assigned, shared, and sustained across the system lifecycle, not merely a matter of better tooling. Once that responsibility is in place, teams still have to decide which responsible-AI objective should dominate when valid goals conflict.

Balancing competing objectives

Machine learning system design is often framed as a process of optimization, improving accuracy, reducing loss, or maximizing utility. In responsible ML practice, however, optimization must be

[31] **Data Nutrition Project**: A nonprofit initiative that develops standardized dataset documentation modeled on nutrition labels, summarizing provenance, composition, distribution, and known issues for datasets used in ML pipelines. The project's labels make dataset risks legible to downstream engineers who lack access to the original collection process, an essential bridge across the organizational fragmentation described here.

balanced against a range of competing objectives, including fairness, interpretability, robustness, privacy, and resource efficiency. These objectives are not always aligned, and improvements in one dimension may entail trade-offs in another. While these tensions are well understood in theory, managing them in real-world systems is a persistent and unresolved challenge.

Consider the relationship between model accuracy and interpretability. Shallow decision trees and linear models expose their decision structure, but their predictive performance relative to ensembles or deep neural networks depends on the task and data. Teams must compare suitable candidates before assuming that interpretability requires an accuracy sacrifice. If evaluation does reveal a trade-off, the deployment's stakes determine how it should be judged. In healthcare or finance, a marginal accuracy gain must be weighed against the ability to inspect decisions affecting well-being or access to opportunity.

The personalization-fairness conflict of section 5 returns here as an organizational problem. A recommendation system trained to maximize user engagement may personalize aggressively, using fine-grained behavioral data to tailor outputs to individual users. While this approach can improve satisfaction for some users, it may entrench disparities across demographic groups, particularly if personalization draws on features correlated with race, gender, or socioeconomic status. Adding fairness constraints may reduce disparities at the group level, but at the cost of reducing perceived personalization for some users. These effects are often difficult to measure, and even more difficult to explain to product teams under pressure to optimize engagement metrics.

Privacy introduces another set of constraints, but the mechanisms impose different costs. Differential privacy bounds information leakage under a specified privacy definition and accountant; federated learning changes where training data and computation reside without itself providing that guarantee. Data minimization reduces the information collected or retained (Biega et al. 2020). Their effects on utility, communication, and computation depend on the chosen design. A wearable running a fixed model does not incur private-training overhead merely because training used differential privacy, although its telemetry and local storage still need protection. Evaluating each mechanism on its actual execution path allows teams to distinguish a measured trade-off from an assumed conflict among privacy, latency, and energy use.

The trade-offs are not purely technical; they reflect deeper normative judgments about what a system is designed to achieve and for whom, as explored in detail in section 30. Responsible ML development requires making these judgments explicit, evaluating them in context, and subjecting them to stakeholder input and institutional oversight.

What makes this challenge particularly difficult in implementation is that these competing objectives are rarely owned by a single team or function. Performance may be optimized by the modeling team, fairness monitored by a responsible AI group, and privacy handled by legal or compliance departments. Without deliberate coordination, system-level trade-offs can be made implicitly, piecemeal, or without visibility into long-term consequences. Over time, the result may be a model that appears well-behaved in isolation but fails to meet its ethical goals when embedded in production infrastructure.

Balancing competing objectives requires transparency, deliberation, and cross-team alignment alongside technical fluency. Systems must be designed to surface trade-offs rather than obscure them, to make room for constraint-aware development rather than pursue narrow optimization. In practice, this may require redefining what "success" looks like, not as performance on a single metric, but as sustained alignment between system behavior and its intended role in a broader social or operational context.

Organizational structures, data quality, and competing objectives explain why technical competence alone does not secure responsible behavior. A team can understand fairness metrics and still lack authority to change a dataset or delay a release. When modeling teams optimize performance, compliance teams address privacy, and product teams prioritize engagement independently, their local decisions may violate a shared requirement. Clear ownership across those boundaries connects evaluation to action, while data infrastructure and deliberative review make the evidence and trade-offs inspectable. Maintaining those connections becomes harder as deployments scale and their data, models, and teams change.

Scalability, maintenance, and evaluation standards

Responsible machine learning practices are often introduced during the early phases of model development: fairness audits are conducted during initial evaluation, interpretability methods are applied during model selection, and privacy-preserving techniques are considered during training. However, as systems transition from research prototypes to production deployments, these practices frequently degrade or disappear. The gap between what is possible in principle and what is sustainable in production is a core implementation challenge for responsible AI.

Many responsible AI interventions are not designed with scalability in mind. Fairness checks may be performed on a static dataset, but not integrated into ongoing data ingestion pipelines. Explanation methods may be developed using development-time tools but never translated into deployable user-facing interfaces. Privacy constraints may be enforced during training, but overlooked during postdeployment monitoring or model updates. In each case, what begins as a responsible design intention fails to persist across system scaling and lifecycle changes.

Production environments introduce new pressures that reshape system priorities. Models must operate across diverse hardware configurations, interface with evolving APIs, serve millions of users with low latency, and maintain availability under operational stress. These constraints demand continuous adaptation and rapid iteration, often deprioritizing activities that are difficult to automate or measure. Responsible AI practices, especially those that involve human review, stakeholder consultation, or post-hoc evaluation, may not be easily incorporated into fast-paced DevOps[32] pipelines.

Maintenance introduces further complexity. Machine learning systems are rarely static. New data is ingested, retraining is performed, features are deprecated or added, and usage patterns shift over time. In the absence of rigorous version control, changelogs, and impact assessments, it can be difficult to trace how system behavior evolves or whether responsibility-related properties such as fairness or robustness are being preserved. Organizational turnover and team restructuring can erode institutional memory. Teams responsible for maintaining a deployed model may not be the ones who originally developed or audited it, leading to unintentional misalignment between system goals and deployed behavior. These issues are especially acute in continual or streaming learning. Drift calls for investigation and a response matched to its consequences, which may mean restricting use or invoking fallback while a revised model undergoes validation, rather than immediately updating production weights.

These challenges are magnified in multi-model systems and cross-platform deployments. A recommendation engine may consist of dozens of interacting models, each optimized for a different subtask or user segment. A voice assistant deployed across mobile and edge environments may maintain different versions of the same model, tuned to local hardware constraints. Coordinating updates, ensuring consistency, and sustaining responsible behavior in such distributed systems requires infrastructure that tracks governing values and constraints alongside code and data.

Addressing scalability and maintenance challenges requires treating responsible AI as a lifecycle property, not a one-time evaluation. This means embedding audit hooks, metadata tracking, and monitoring protocols into system infrastructure. It also means creating documentation that persists across team transitions, defining accountability structures that survive project handoffs, and ensuring that system updates do not inadvertently erase hard-won improvements in fairness, transparency, or safety. While such practices can be difficult to implement retroactively, they can be integrated into system design from the outset through responsible-by-default tooling and workflows.

Maintenance also exposes a gap in how responsible-AI evidence is standardized. A model evaluated under demographic parity on one benchmark has not thereby satisfied equalized odds in another deployment. The criterion, population, labels, threshold policy, and uncertainty belong to the claim. Changing any of them can invalidate the evidence even when the weights remain unchanged. Standardization must make those conditions explicit so teams can compare results and identify what needs revalidation.

The evaluation boundary must also match the deployment boundary. A model-only result can miss effects introduced by feature transformations, request routing, caching, or human review. Separate fairness, explanation, and compliance tools therefore need compatible identifiers and records linking their results to the same model, data, policy, and workflow versions. Otherwise, an assurance case can combine individually valid results that describe different systems.

32 **MLOps (Machine Learning Operations)**: ML CI/CD pipelines must handle data versioning, training reproducibility, and A/B testing of algorithm changes beyond traditional software concerns. High-velocity ML organizations may deploy model or configuration changes far more often than responsible-AI reviews can be completed manually, creating a velocity gap: deployment cycles measured in hours compete against ethical validation requiring days or weeks. This tension explains why responsible AI commitments present at the prototype stage can be deprioritized as systems scale.

Reusing that evidence after launch requires lifecycle controls. Production observations must be comparable with the acceptance criteria, and material changes must trigger a documented revalidation scope. Evidence must therefore remain interpretable across teams, components, and time. The implementation decision is then which obligations take priority for the intended use, which controls can satisfy them, and which authority may accept the remaining risk.

Implementation decision framework

Given these implementation challenges, practitioners need systematic approaches to prioritize responsible AI principles based on deployment context and stakeholder needs. The same principle can demand different engineering treatment across high-stakes individual decisions, safety-critical systems, privacy-sensitive applications, large-scale consumer systems, resource-constrained deployments, and research environments.

Four decision heuristics guide these trade-offs in practice. Where multiple principles conflict, engineering teams must engage domain stakeholders to establish which failure modes present the most severe harms; as the adolescent mental health crisis-detection example in section 30 demonstrated, such value tensions require deliberate institutional policy rather than mathematical optimization alone. Under tight computational budgets, teams must first identify mandatory requirements, then allocate evaluation and response capacity according to risk. Sampling is adequate only if it can detect the relevant failures, and expensive audits need not run on the inference path. Whenever the deployment context changes, as when a cloud model migrates to edge execution with intermittent centralized monitoring, teams must re-evaluate principle priorities, establishing local fallback safeguards and evidence-synchronization plans for constrained connectivity. Finally, when stakeholder values diverge, engineers must document trade-offs explicitly and construct contestability mechanisms that permit affected individuals to challenge automated outcomes.

Table 0.232 maps these deployment contexts to candidate priorities and trade-offs for deployment-specific review. Applicable obligations, the threat model, and accountable stakeholder decisions determine which controls and trade-offs are acceptable.

Table 0.232: Practitioner Decision Framework: Prioritizing responsible AI principles based on deployment context, showing candidate principles, controls, and trade-offs for different system types. Deployment-specific review must establish applicable requirements and justify the selected controls; no row waives mandatory obligations.

Deployment Context	Primary Principles	Implementation Priority	Trade-offs to Evaluate
High-Stakes Individual Decisions (healthcare diagnosis, credit and loans, criminal justice, employment)	Fairness, explainability, accountability	Mandatory fairness metrics across protected groups; explanations for negative outcomes; human oversight for edge cases	A measured accuracy budget for interpretability; bounded explanation latency; higher computational cost
Safety-Critical Systems (autonomous vehicles, medical devices, industrial control)	Safety, robustness, accountability	Threat-model-specific evaluation; bounded certification where applicable; fail-safe mechanisms; comprehensive logging	Significant validation and adversarial-training overhead; conservative confidence thresholds; redundant inference
Privacy-Sensitive Applications (health records, financial data, personal communications)	Privacy, security, transparency	Data minimization and appropriate consent mechanisms; evaluate local processing and differential privacy with stated (ϵ, δ), privacy unit, and accountant	Privacy-utility trade-offs; higher client-side compute; limited model updates; reduced personalization
Large-Scale Consumer Systems (content recommendation, search, advertising)	Fairness, transparency, safety	Bias monitoring across demographics; explanation mechanisms; content-policy enforcement; feedback-loop detection	Sampled or asynchronous explanations at scale; serving-path latency budgeted for fairness checks; investment in monitoring infrastructure
Resource-Constrained Deployments (mobile, edge, TinyML)	Privacy, efficiency, safety	Local inference; data locality; input validation; graceful degradation	Expensive audits moved off-device, while local safety checks, fleet or servicing audits, update authority, and retirement criteria are retained

Deployment Context	Primary Principles	Implementation Priority	Trade-offs to Evaluate
Research and Exploratory Systems (internal tools, prototypes, A/B tests)	Transparency, safety (harm prevention)	Documented known limitations; restricted user populations; monitoring for unintended harms	Evaluation depth matched to potential harm and applicable obligations; observability and bounded iteration

Lighthouse 16.1: Lighthouse archetypes: Evidence must meet authority

The lighthouse workloads in section 11 require different evidence because they expose different harms, and they assign decision authority to different operating paths.

Workload	Minimum decision evidence	Required authority
Archetype A (GPT-4/Llama-3)	Capability- and use-specific safety evaluations, harmful-output and misuse tests, uncertainty and fallback behavior, and versioned deployment evidence	Model and safety owners approve the allowed use envelope; service owners can halt or roll back when monitoring invalidates it
Archetype B (DLRM at Scale)	Disaggregated ranking quality, exposure and error rates, feedback-loop analysis, and online effects under the serving policy	Product and responsible-AI owners choose the welfare and fairness criteria; operators can disable a model or policy that breaches them
Archetype C (Federated MobileNet)	Per-device and subgroup quality, participation bias, privacy accounting, update integrity, and behavior across client versions	Device, privacy, and model owners approve participation and update policy; fleet control can suspend aggregation or revert clients

A metric becomes a control only when the named authority can act on it. Evidence that is sufficient for a recommender policy review does not establish safety for a general-purpose language model, and aggregate federated accuracy does not authorize an update whose participation or privacy assumptions have failed.

The framework provides starting guidance, but it should be read as a triage mechanism rather than a complete governance program. A differential privacy budget must specify the protected unit, neighboring relation, delta, trust model, and composition across releases; no single epsilon threshold establishes adequacy for every deployment. Certification establishes only its stated property within a defined operating envelope. Legal obligations depend on intended use, jurisdiction, and organizational role, not whether inference runs in a cloud or on a microcontroller (European Parliament and Council of the European Union 2024; European Parliament and Council of the European Union 2016). The framework identifies which constraints deserve first attention, with reassessment as deployment conditions change. The lifecycle assigns human authority over deployment even when individual actions are automated. Engineers investigate bias, operators review fairness metrics, and developers respond to drift. Some systems must also act faster than humans can review an individual decision. Autonomous vehicles respond in milliseconds; trading algorithms execute thousands of transactions before human review is possible; content moderation systems process billions of posts daily. For these systems, the implementation framework must be paired with the value-alignment and fallback controls of section 25, which keep objectives aligned with human values even when operation runs beyond continuous human supervision.

Systems Perspective 16.3: Responsibility is infrastructure, not a feature

Retrofitting responsible AI controls can require architectural redesign and revalidation, just as adding fault tolerance can. The structural costs cataloged in table 0.227 each carry a provisioning consequence: bias-drift monitoring needs a sampling and analysis budget; expensive or exact explanation workloads may need a dedicated asynchronous worker fleet, whereas model-specific TreeSHAP, sampling, caching, or selective generation may fit smaller budgets; DP-SGD requires budgeting its clipping, noise, and accounting work under the chosen imple-

mentation; and impact assessments need review capacity in the release process. These are not *optional add-ons* but *load-bearing components* of production ML systems. In high-risk or regulated deployments, failing to provision the evidence required by the assurance case can block release or force redesign even when core model performance is strong.

Structural costs like latency overhead belong in the core architecture from the first design review, because retrofitting them can require redesign and revalidation. The following fallacies expose assumptions that hide those costs or mistake a local technical result for system-level responsibility.

Fallacies and Pitfalls

Responsible AI involves counterintuitive trade-offs where ethical principles conflict mathematically and technically. Practitioners from traditional software backgrounds often assume ethical guidelines translate directly to implementation without recognizing the impossibility theorems and computational costs involved. These fallacies and pitfalls capture misconceptions that lead to deployed systems that appear fair in development but violate fairness criteria in production or impose prohibitive computational overhead.

Fallacy: *Bias will disappear with more data and better algorithms.*

More representative data and better algorithms can reduce some disparities, but they do not determine whether the prediction target is appropriate. The healthcare algorithm described in section 7 underestimated Black patients' health needs at a given risk score because expenditure was an imperfect proxy for need. Improving prediction of that proxy would not by itself repair the target. Separately, with unequal base rates and imperfect prediction, groupwise score calibration cannot coexist with equal mean scores across groups in both outcome classes. Engineers must distinguish a remediable data or modeling defect from incompatible requirements, then use stakeholder deliberation to justify the criteria the deployment will pursue.

Pitfall: *Treating explainability as an optional feature to be added after core functionality works.*

This approach ignores the displacement of overhead: producing attribution evidence about model behavior demands compute, storage, and interfaces that constrain the architecture. Approximate SHAP explanations are not compute-free (table 0.227); even a bounded explanation budget can increase request latency and memory pressure. In this sizing example, a recommendation system serving 100 ms latency requirements at 10,000 QPS cannot retrofit explanation work without revisiting the SLA: the illustrative explanation budget adds 50 ms to 200 ms per request, increasing total latency to 150 ms–300 ms (requiring 1.5–3× capacity only under the simplifying assumption that occupied resource time grows in direct proportion to latency, at fixed utilization and parallelism). The assurance case must specify the audience, claim, method, fidelity test, and delivery budget, then choose an architecture such as model-specific TreeSHAP, sampled or cached attribution, selective asynchronous generation, or an inherently interpretable model. Additional replicas can preserve throughput under that assumption, but they do not restore the original per-request latency if explanation remains on the serial path. None of these attribution paths exposes a model's internal reasoning or establishes causation.

Fallacy: *Achieving one fairness metric guarantees overall system fairness.*

Practitioners often optimize for demographic parity, which equalizes approval rates across groups, and then assume fair treatment follows. In reality, fairness metrics can conflict mathematically. The fairness-tax credit scenario (notebook 16.3) illustrates the policy choice. Holding Group A's approval rate at 80 percent and raising Group B's to match it required loosening Group B's default-probability cutoff from 30 percent to 50 percent, which cost 4 percentage points of accuracy and left approvals in the two groups carrying different default risk. The score-balance impossibility result shows that, with unequal base rates and imperfect prediction, groupwise calibration and equal mean scores across groups in both outcome classes cannot all hold; demographic parity can add a separate selection-rate constraint. Passing one metric therefore leaves other criteria to evaluate. A metric disparity is evidence for investigation, while a legal conclusion depends on the applicable rule and the facts of the deployment.

Pitfall: *Treating responsible AI as pure compliance overhead.*

This perspective misses the value of identifying and responding to risk. Differential privacy can enable organizations to work with sensitive data under clearer privacy guarantees, but it also imposes privacy-utility trade-offs that must be planned in the training budget. Fairness-aware training and monitoring can support that risk-management process. The employment-selection screen discussed in section 9 illustrates one context-specific disparity threshold, rather than a universal legal test. Monitoring need-adjusted outcomes by group could reveal a disparity such as the healthcare algorithm's underestimate of Black patients' needs. Reducing the resulting harm still requires an owner with authority, capacity, and a validated remedy; detection alone does not protect affected people.

Fallacy: *A post-hoc threshold adjustment can make a deployed system fair.*

This belief treats fairness as a single decision-boundary problem rather than a coupled system property. Moving a threshold can equalize one metric, but it can also change decision precision, business meaning, legal documentation, and user experience while leaving the underlying score calibration unchanged. In production, the threshold is an operational policy embedded in serving code, human review, audit records, and downstream decisions, rather than a standalone cutoff in a notebook.

Pitfall: *Implementing fairness constraints without analyzing threshold trade-offs and calibration impacts.*

Group-specific thresholds can satisfy equal true positive rates, but they also change decision semantics: if Group A threshold is 0.75 and Group B threshold is 0.45, as in figure 0.235, identical scores can yield different decisions, and the positive predictive value of approved applicants can diverge across groups even when the underlying score model remains calibrated. A loan officer seeing an approval cannot know whether it represents the same repayment-risk meaning across groups without documentation of the group-specific threshold policy. Production systems therefore need documented metric selection, uncertainty estimates, staff training, legal review, and audit trails explaining why identical scores can yield different decisions. No generic training objective resolves incompatible fairness definitions; the appropriate response is to choose and justify the criteria for the deployment context, quantify the resulting trade-offs, and monitor whether the approved policy remains valid.

Fallacy: *Monitoring dashboards create accountability by themselves.*

Dashboards can expose fairness drift, explanation failures, or abuse trends, but they do not decide who must act. Teams often instrument fairness, safety, or privacy metrics because a policy requires visibility, then leave the response path undefined, which creates a false sense of control. A metric that no team owns is not a control; it is a log entry. The system accumulates evidence without changing behavior, so alerts age out, fairness regressions become accepted baselines, and affected users receive no route to contest the decision. Production responsibility requires binding each monitoring signal to an owner, a threshold, an escalation path, and a remediation budget, whether that is a release gate, an incident owner, rollback authority, or human-review capacity.

Treating a local metric or control as sufficient system assurance is the common failure behind these examples. A mathematical fairness constraint is only responsible when the system also accounts for downstream population effects, documentation requirements, operational capacity, and legal exposure.

Summary

Responsible AI connects the fleet's technical controls to justified decisions about deployment and remedy. Fairness metrics expose disparities, privacy and robustness controls support bounded claims, and explanations provide evidence that people must be able to inspect or contest. None of these mechanisms establishes responsibility on its own. A versioned assurance case connects the intended use, affected population, evidence, assumptions, and accountable authority, while monitoring and revalidation keep those claims tied to the system that actually runs.

Responsible AI is a systems engineering concern because its controls affect the production architecture. Fairness monitoring consumes compute and may affect latency. Explainability methods such as SHAP and LIME add inference work that affects capacity planning and SLO compliance.

System prompts, model versions, and audit logs require ownership, versioning, and CI/CD controls. These costs must be budgeted during design rather than added after deployment.

Selective explanation generation illustrates the C^3 choice. Producing an explanation synchronously adds compute to the request path and may add communication to retrieve features; moving it to an asynchronous worker protects serving latency but adds coordination among the decision, evidence record, and appeal workflow. The bottleneck then moves from inference capacity to evidence freshness or reviewer throughput. The acceptable architecture depends on who needs the explanation and how quickly that person must be able to act on it. Read through the Fleet Law (equation 0.3), private or adversarial training can add compute through mechanism-specific operations or additional evaluations. Launch approvals and revalidation gates add coordination delays that replication alone cannot remove. Asynchronous evidence generation permits overlap only when the evidence still arrives before the decision or remedy that depends on it.

Key Takeaways: Ethics is an engineering constraint

- **Responsibility gates deployment**: In high-risk or regulated settings, accuracy and latency cannot substitute for required documentation, explanation, audit, and ownership. Governance is a coordination constraint that determines whether the fleet may launch, continue operating, or must restrict use.
- **Fairness requires justified criteria**: The running loan model violates every criterion at once, and the disaggregated-metrics table shows a second loan model with a 0 percentage-point false-positive gap while still carrying 15 percentage-point approval and 30 percentage-point true-positive gaps. Both describe particular policies; the impossibility result constrains every score. With unequal base rates and imperfect prediction, groupwise score calibration conflicts with requiring equal mean scores across groups in both outcome classes. The chosen criteria need an explicit justification.
- **Disparity is not a causal diagnosis**: Group metrics reveal unequal outcomes or errors, while causal claims require an explicit structural model and assumptions not recoverable from observational data alone. Path-specific analysis still leaves the legitimacy of each pathway to domain, legal, and stakeholder judgment.
- **Oversight consumes capacity**: Fairness monitoring and audit logging consume compute and storage; synchronous explanations can add request latency, while privacy-preserving training trades privacy against utility and training cost. Budget each control on the path where it runs, including evidence delivery and human review.
- **Generative governance is infrastructure**: System prompts, RLHF policies, tool permissions, model versions, and safety evaluations are operational artifacts. They need ownership, CI/CD, rollback, and monitoring because a configuration or policy change can alter deployed behavior even when the model weights remain unchanged.
- **Evidence needs an owner**: Dashboards, explanations, and appeals protect users only when a team can investigate, remediate, roll back, or escalate failures. Responsible AI becomes engineering practice when every measured obligation has an accountable operating path.

Quantification can show which groups bear a policy's errors and what its safeguards cost, but it cannot decide whose interests should take priority. The engineering responsibility is to make those choices explicit, preserve the evidence behind them, and provide authority to revisit them when the system or its consequences change. Governance makes the fleet's objective itself accountable, as well as the machinery used to pursue it.


What's Next: From responsibility to synthesis

Responsible governance joins performance, security, robustness, and sustainability as a constraint the fleet must satisfy before it may run. The four parts have now traversed the fleet from physical silicon, networks, and storage in Part I, through distributed coordination and recovery in Part II and performance engineering and fleet serving in Part III, to the governance safeguards of Part IV. Each part examined its constraints largely one at a time, yet a production fleet couples them all. An optimization at the kernel layer reverberates into cluster power budgets, and a governance rule reshapes the serving architecture. The final chapter returns to the scale moment where the volume began and follows the binding constraint as it leaves the node, condensing the four parts into six principles of distributed ML systems, read through the Fleet Law and placed on the fleet stack.

↪ System synthesis, cross-layer co-design, and emerging fleet frontiers are developed in chapter 33.

SYNTHESIS

Conclusion

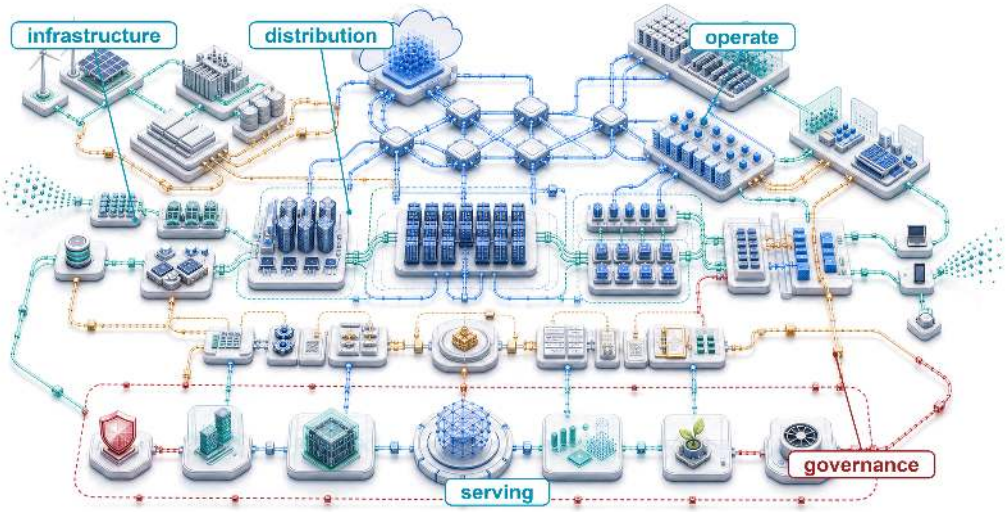

Purpose

Why must the unit of machine learning systems design become the fleet rather than the model?

Machine learning at fleet scale is judged by the whole system, and a local improvement can move cost into a layer that its designer did not measure. Faster computation can expose a network bottleneck; larger jobs can lose more work to failure; a service that meets latency targets can still lack evidence required for deployment. The model remains central, but its accuracy and execution speed do not determine whether the complete system delivers useful work. Adding accelerators is therefore a design decision about shared resources and obligations, not simply a purchase of more arithmetic. If communication and recovery consume the saved execution time, the expansion can increase cost without improving progress. If the resulting service cannot preserve availability or account for its effects on users, successful training does not establish readiness for deployment. Single-node reasoning remains necessary because every participant still has local limits, but it cannot settle decisions whose consequences cross machines, teams, and operating boundaries. The engineering responsibility is to connect those consequences before accepting the design. That requires evidence about what improves, what becomes more constrained, and who owns the costs transferred elsewhere. A defensible decision may expand the fleet, change how work is distributed, or postpone release until the operating requirements can be met. In C^3 terms, the task is to follow the binding compute, communication, or coordination constraint across layers and keep its displaced costs visible.

Learning Objectives

- Synthesize the six principles into a constraint map for distributed ML systems
- Diagnose a fleet design's binding C^3 term using measured execution costs and failure exposure
- Analyze how infrastructure, distributed training, inference, operations, and governance interact across the fleet stack
- Translate security, fairness, privacy, carbon, and reliability obligations into measurable design constraints
- Defend a fleet expansion or model-release decision using fitted scaling-law gains, operational measurements, and governance evidence

Synthesizing Distributed ML Systems

A faster accelerator can finish its local work sooner yet leave the training job waiting on the same congested collective. Scale creates qualitative change because the binding constraint can leave the node. It moves into the fabric that carries gradients, into the recovery machinery that restores state after routine failure, into the service contract that decides whether capacity reaches users in time, and into the obligations that decide whether the service may run at all. The book opened on that transition, the scale moment, and on the empirical scaling laws of section 6 that keep forcing it. Because each further reduction in loss demands a multiplicative increase in compute, demand for fleet capacity does not settle at the size where the last design worked. Each of the four parts since has answered a share of the question that transition raised by naming a constraint, the measurement that exposes it, and the mechanism that moves it.

↩ The scale moment and the qualitative shift to fleet-scale systems are established in section .

A frontier-model production system can span thousands of accelerators, with fabric links, storage tiers, schedulers, serving replicas, security controls, and governance checks supporting the same workload. Any one layer can bind the entire system. In the storage tier, a slow checkpoint can waste an entire training window. Across the interconnect, a congested fabric can erase scaling gains from added compute. In the serving pool, underprovisioned capacity can turn model quality into user-visible latency, while an unmeasured responsibility constraint can block deployment after the technical system works.

That coupling across the stack is what separates foundational ML engineering from distributed ML engineering. The single-node foundation, organized by the D·A·M lens of data, algorithm, and machine, already couples models, data pipelines, execution, and deployment constraints. Distributed ML engineering extends that reasoning to shared infrastructure, distributed protocols, and governance across a fleet.

The physical substrate supplies the rates that higher layers inherit. Accelerator topology, data-loading throughput, and network contention constrain how the Distribution band partitions, synchronizes, and recovers work. The Serving band converts that coordinated execution into a service with latency, availability, and cost obligations. The Governance band determines whether the service remains secure, robust, sustainable, and accountable. Six principles state these inherited constraints as engineering claims, in the order of the book's four parts.

Six Principles of Distributed ML Systems

The six engineering practices introduced with the fleet stack describe how a fleet engineer works. The six principles of distributed ML systems describe what the fleet's physical and institutional constraints make true, whatever the practice. Each condenses the part-level principles stated at the opening of its part. Part I's fleet principles condense into the first, Part II's distributed ML principles into the second and third (its universal scaling law instead supplies the demand that this section closes by weighing), Part III's deployment-at-scale principles into the fourth, and Part IV's responsible fleet principles into the fifth and sixth; the paragraphs below cite the part-level principles each one draws on. Each also explains why one of the practices is necessary rather than merely prudent. A fleet that loses training progress to routine interruptions must budget recovery as part of normal operation, which is why treating failure as steady state is a practice. A bottleneck

that migrates whenever one term shrinks is why the engineer must expect it to move and measure the layers it moves into.

The Fleet Law, the distributed counterpart of the single-machine iron law, connects these principles to execution costs. It is the step-time equation of equation 0.3, unchanged:

$$T_{\text{step}}(N) = \frac{T_{\text{compute}}}{N} + T_{\text{comm}}(N) + T_{\text{sync}}(N) - T_{\text{overlap}} \tag{0.97}$$

Infrastructure sets the per-device rates behind T_{compute}/N and the link bandwidths behind $T_{\text{comm}}(N)$. Communication and waiting contribute to $T_{\text{comm}}(N)$ and $T_{\text{sync}}(N)$; neither is guaranteed to shrink as N rises. Failure lands in the same terms. Checkpoint pauses, detection timeouts, and restarts add to $T_{\text{sync}}(N)$ averaged over the run, asynchronous checkpointing and warm restart move part of that cost into T_{overlap}, and a rollback adds the lost steps back to the work the run must still complete. Serving applies the same accounting discipline to requests, including queueing and routing delay. Responsibility and sustainability add no new term, but they spend the existing ones. Verification work occupies compute, approval gates add coordination that no replica count removes, and every second of step time costs joules at the fleet's average power. Their acceptance also requires evidence that execution time cannot supply, such as subgroup error rates, privacy accounting, and energy measured over a stated boundary.

↩ The six engineering practices, from instrument first to co-design hardware with algorithms, are established with the fleet stack in section 11.

Placed on the fleet stack, the six principles follow its four bands (figure 0.247). The Infrastructure band determines physical capability. The Distribution band partitions execution and so carries both communication and failure recovery, one principle per row, while the Serving band bounds runtime delivery by its contract. The uppermost Governance band carries two principles, and they divide it by obligation rather than strictly by row. Responsibility, placed beside the Assurance row, covers every obligation owed to the people the system affects. That includes the security and robustness of the Assurance row and also the fairness and accountability work that chapter 40 develops in the band's top row. Sustainability, placed beside that top row, covers the resource obligation alone. The arrow that runs the length of the stack marks the scale moment. It is not a seventh principle; it is the premise on which the volume opened, and crossing it is what turns each of the six from a local concern into a fleet-wide constraint.

↪ The term-by-term decomposition of the Fleet Law is developed in section 4.

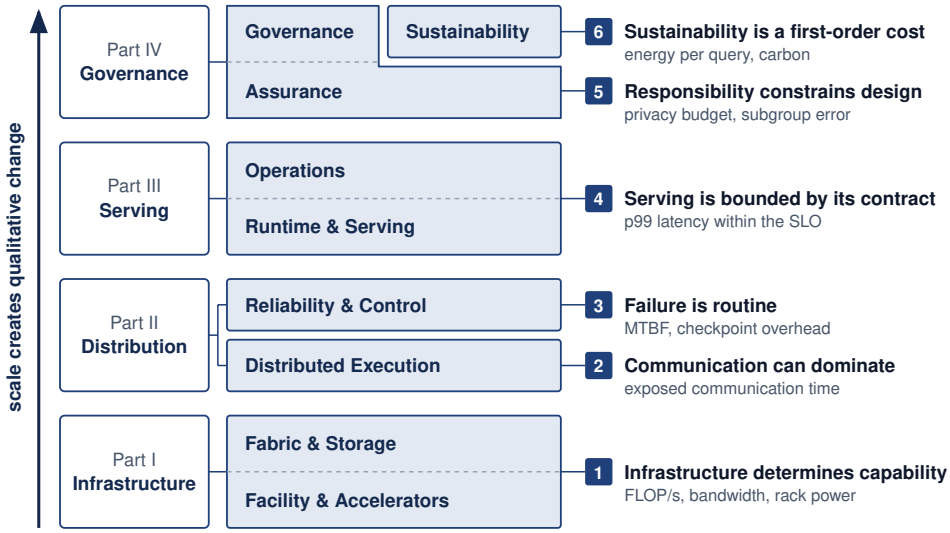


Figure 0.247: The Fleet Stack Revisited: The eight rows and four bands of figure 0.15, redrawn as the territory each of the six principles governs, with its key metric from table 0.233. The Infrastructure and Serving principles each own a whole band, and the Distribution band carries one principle per row. The Governance band divides by obligation rather than by row: Responsibility covers the Assurance row and the governance half of the top row, while Sustainability covers the resource half. The arrow runs the length of the stack because scale changes the behavior of every band.

Table 0.233 is therefore a decision map rather than a glossary. Each row links a principle to the question, metric, and practice an engineer uses when diagnosing a fleet-scale design, and to the part and chapters that develop it. The part order is an order of dependency, not a ranking of bottlenecks; the workload and its measurements determine which constraint binds, while the layered tiers in figure 0.247 locate the governing architectural band.

Table 0.233: Six Principles of Distributed ML Systems: The qualitative shifts that occur when ML systems move from single machines to distributed production, grouped by the part of the book that develops them. Each principle connects to a governing question, the metric that tests it, the engineering practice it makes necessary, and the chapters where the concept is developed in depth.

Principle	Core Question	Key Metric	Practice It Demands	Developed In
Infrastructure determines capability	What is possible?	FLOP/s, memory and bisection bandwidth, rack power	Co-design hardware with algorithms	Part I: chapter 11, chapter 11, chapter 13
Communication can dominate	What is the bottleneck?	Exposed communication time, scaling efficiency	Expect bottlenecks to migrate	Part II: chapter 15, chapter 8
Failure is routine	How do we recover?	MTBF, checkpoint overhead, rollback time	Treat failure as steady state	Part II: chapter 12, chapter 24
Serving is bounded by its contract	What reaches the user in time?	p99 latency within the SLO, cost per request	Reserve headroom for recovery and tail latency	Part III: chapter 17, chapter 6, chapter 16, chapter 23
Responsibility constrains design	Who is affected?	Privacy budget, subgroup error rates, audit trails	Instrument first	Part IV: chapter 20, chapter 26, chapter 40
Sustainability is a first-order cost	What is the cost?	kWh per training run, energy per query, carbon	Compound small efficiency gains	Part IV: chapter 20

The first principle is that infrastructure determines capability. Physical infrastructure constrains both feasible configurations and attainable rates. Memory capacity and safe power and cooling envelopes limit how much state and active hardware a configuration can support. Cluster-wide bisection bandwidth instead limits how quickly distributed work can exchange data (principle 6); insufficient bandwidth can make a deadline or cost target unattainable without making the computation impossible. Storage sets a further ceiling, because accelerators that the data pipeline cannot feed sit idle regardless of their peak rate (principle 7). These are the memory, network, and energy walls of the scale moment, measured at the scale of the node, the fabric, and the facility. Partitioning, batch size, and communication scheduling determine how those limits bind, and mastering the fleet requires understanding them from chip-level thermal density to cluster-wide bisection bandwidth.

The second principle is that communication can become the binding term at scale (Z. Jiang et al. 2024; Narayanan et al. 2021), with its cost set by the bandwidth-latency trade-off (principle 5) inside the Fleet Law's $T_{\text{comm}}(N)$ term. Communication intensity, the ratio of bytes crossing the network to local FLOPs, indicates network demand relative to arithmetic. Whether that demand dominates also depends on achieved compute and network rates, message sizes, topology, and overlap. Gradient synchronization and straggler effects must therefore be measured on the synchronous step's critical path rather than inferred from byte volume alone.

Collective communication algorithms, including Ring AllReduce,[1] popularized for deep learning by Horovod (Sergeev and Balso 2018), gradient compression, and overlapping computation with communication, address communication bottlenecks. For dense collective workloads, conventional oversubscribed fabrics often bottleneck, motivating high-bisection fabrics and transport choices matched to ML communication patterns. Recognizing when communication is the active constraint clarifies when algorithmic optimizations will help and when they merely shift work between equally constrained resources, the displacement of overhead (principle 13) that makes bottlenecks migrate. Expanding the fabric across thousands of nodes also multiplies the components that a job needs at the same instant, and that multiplication makes failure routine.

↩ The communication-intensity ratio is established in section 10.

[1] **Ring AllReduce**: A collective that sends $2(N-1)M/N$ bytes per worker and receives the same amount for message size M, giving $T_{\text{ring}} \approx 2(N-1)\alpha + \frac{2(N-1)}{N}\frac{M}{\beta}$ under the α-β communication model, with β denoting bandwidth in each full-duplex direction. The coefficient approaches $2\times$ message volume per worker as N grows, while remaining bandwidth-optimal for large messages.

↩ Ring collectives, communication overlap, and gradient compression are established in chapter 8.

The third principle is that failure is routine. A job that needs many components at once can encounter interruptions frequently enough that recovery becomes normal operation. The reliability gap in section 10 follows from equation 0.1, under which a job that needs every one of its components at once, each independently available with probability $A_{\text{component}}$, sees its availability decay exponentially in the number of components it requires. Meta's experience training Llama 3 on 16,384 GPUs, 16 times the Archetype A reference cluster, documented 419 unexpected interruptions over 54 days, averaging one unexpected interruption every 3.1 hours (Dubey et al. 2024). Recovery should automate known failure paths and escalate cases whose safe response requires investigation. A failed rank can stall every other rank in its collective. Under full-job checkpoint recovery, the affected job rolls back to its last checkpoint; other jobs in the fleet need not roll back. For a fixed amount of lost wall-clock progress, wasted accelerator-time grows with the size of the affected job, which is why checkpoint cadence and recovery architecture are first-order design dimensions.

Architects must embed failure handling from the beginning. Checkpointing strategies balance write overhead against expected lost work, and the Young-Daly interval (principle 12) estimates that balance under its failure and checkpoint-cost assumptions. Elastic training[2] supports changing cluster membership, while graceful degradation preserves a defined level of service as capacity diminishes. Each mechanism needs a tested recovery contract; its name alone does not establish that progress or service quality survives a failure. Recovery also needs capacity. A restarted synchronous job makes progress only when the scheduler can again grant it an atomic, topology-feasible gang allocation (principle 14), which is why fleet orchestration keeps spare capacity, preempts lower-priority work, and admits only allocations a job can actually use. Coordination, the third C^3 axis, is not confined to this principle. It is paid in recovery and gang scheduling here, in request routing for serving, and in the approval gates of governance.

Communication and failure together constitute the operational reality of the Distribution band. Deployment carries both into a setting where the unit of work is a user request rather than a training step, which gives the fourth principle, that serving is bounded by its contract. A serving fleet's useful capacity is the work it completes within its latency, availability, and cost targets, not the work its accelerators execute in isolation. Production inference that waits for every worker in a fan-out inherits tail effects (Dean and Barroso 2013a), because completion depends on the slowest required response. A request that touches 100 servers has a 63.4 percent chance that at least one of them responds beyond its 99th-percentile latency when server delays are independent,[3] so a latency that is rare for one server becomes the common case for the request. Routing is where coordination enters the request path. Probing two of R replicas and sending the request to the less loaded (principle 17) cuts the expected longest queue from $\mathcal{O}(\log R / \log\log R)$ under random placement to $\mathcal{O}(\log\log R)$ in the idealized balls-into-bins model, at the cost of only two probes. On live traffic the gain still depends on arrivals, service times, and how fresh the load estimate is, so it narrows the tail rather than bounding every request's latency.


Inside each replica, the memory wall returns as a serving constraint. Compute (TFLOP/s) can be abundant while memory bandwidth (GB/s) gates small-batch autoregressive decode (principle 15), because weight and KV-cache traffic from high-bandwidth memory (HBM) leaves compute units underused. Batching amortizes weight reads across output tokens, so the binding constraint can shift toward compute, KV traffic, or the latency budget; a replica's execution envelope must therefore be measured before any fleet-level policy is chosen. The contract also has a lifetime. A heavily used model can spend more on inference than it did on training (principle 16), so the cost per request, not the one-time training bill, eventually dominates what the model costs to own.

Beyond the data center, the contract takes other forms. On a phone-class device the contract is the device's own power, thermal, and foreground-latency envelope, and the device enforces it by admitting background work, including local adaptation, only when the envelope has room. That admission policy has a consequence that reaches back into training. Only devices whose policy accepts the work take part in adaptation, so the serving-side contract also decides whose data the shared model learns from (principle 18), a bias the fifth principle must then account for. Across a platform of hundreds of models, staged rollouts and per-service reliability budgets enforce the contract release by release, so every release must carry evidence that its targets still hold. Once the fleet can deliver a service, governance determines whether it is allowed to.

2 | **Elastic Training**: Frameworks such as TorchElastic respond to membership changes by stopping surviving workers, reforming the worker group, and restarting workers with new ranks. The framework manages rendezvous and membership, while user code remains responsible for checkpoint, batch-size, and learning-rate semantics.

↩ Checkpoint cadence, mean time between failures (MTBF) analysis, and elastic recovery protocols are established in chapter 12.

3 | **Tail Latency**: The estimate is one minus the probability that every server answers within its own percentile, which under independence is the per-server probability raised to the number of servers; section 9 analyzes the tail effects it summarizes. Shared congestion correlates server delays, so a real fleet can sit above or below this figure, and the independence assumption has to be checked against measured traces.



Small-batch decode can sit left of the roofline ridge.

↩ On-device adaptation within phone-class power and thermal envelopes is established in section 12.

The fifth principle is that responsibility constrains design. Responsible AI translates risk-management frameworks into engineering constraints (Tabassi 2023). Safety-specific risks such as reward hacking, distribution shift, and scalable oversight show why those constraints need implementation mechanisms (Amodei et al. 2016). Fairness, transparency, accountability, privacy, and safety are first-class requirements that shape system architecture throughout the ML lifecycle. The part-level principles behind this one span privacy, because released outputs can disclose what a model learned (principle 21); robustness, whose evaluation and defenses require mechanism-specific resource budgets (principle 22); and feedback, because deployed decisions can shape future training observations (principle 25).

The fairness impossibility result (principle 24) shows why some requirements cannot be satisfied by tuning alone. With unequal base rates and imperfect prediction, groupwise score calibration cannot coexist with score balance for both the positive and the negative class, that is, with equal mean scores across groups among people with positive outcomes and, separately, among people with negative outcomes (Kleinberg et al. 2017). It is the score-level counterpart of the decision-level conflict in the admissions example of chapter 40, where, under a rule that admits only qualified applicants, equal opportunity and demographic parity could not hold together. The deployment therefore needs justified criteria, evidence that they hold, and an owner authorized to respond when they fail. Monitoring exposes supported disparities but cannot choose the criterion or provide a remedy by itself. These obligations belong in the design alongside performance requirements, which is why the practice this principle demands is to instrument first. Subgroup error rates, privacy accounting, and audit trails must be collected before the decision they are meant to justify, because a disparity that was never measured cannot be detected, attributed, or remedied after deployment. Environmental responsibility extends the Governance band into the physical resource budget.

The sixth principle is sustainability. Environmental impact of large-scale ML elevates resource efficiency to a primary engineering constraint (Strubell et al. 2019; Patterson et al. 2021). The energy-scale invariant of section 11 supplies the accounting discipline, a fixed boundary for useful work and for the energy it consumes, and the Fleet Law explains why exposed communication and synchronization cost joules as well as seconds, since a step's energy is approximately its average power times $T_{\text{step}}(N)$. The Jevons Paradox of AI adapts Jevons's resource-efficiency argument (Jevons 1865) to explain why hardware efficiency gains alone do not eliminate power and carbon costs (principle 23). Cheaper computation can expand deployment, so usage growth can offset per-query savings. An absolute carbon budget bounds emissions only when accounting and admission decisions enforce it over the stated lifecycle and time horizon.

↩ Carbon accounting, energy metrics, and Jevons rebound effects are established in chapter 20.

Sustainability thus becomes an engineering discipline with its own accounting chain. IT energy, multiplied by the facility's power usage effectiveness, gives the energy at the meter; multiplied again by the grid's carbon intensity, it gives operational emissions; the embodied carbon of manufacturing the hardware then joins the total. Two links show how far the chain can swing. Training GPT-3 consumed about 1,287 MWh, roughly 120 US household-years of electricity (Li 2020), and the same energy drawn from Poland's coal-heavy grid emits about 41× the carbon it would on Quebec's hydroelectric grid. The chain also explains the practice this principle demands. Small efficiency gains compound across every accelerator and every query in the fleet, but the Jevons argument means that usage growth can absorb them, so they bound total emissions only when an absolute budget caps the total; compounding efficiency under a cap, not efficiency alone, is the practice. Energy costs can exceed model development budgets, thermal limits restrict hardware density, and power infrastructure requirements limit deployment locations. Carbon-aware scheduling, lifecycle assessment,[4] and efficiency optimization become essential engineering competencies alongside traditional performance metrics.

[4] **Lifecycle Assessment**: Section 22 evaluates environmental impact across a system's lifespan, including embodied carbon from hardware manufacturing. Embodied emissions can become a substantial share of total impact on clean grids or when hardware is lightly used.

The six principles describe the qualitative change that scale can produce, and the scaling laws (principle 9) keep carrying a team that pursues lower loss into regimes its previous fleet never exercised. Each new regime brings behavior that emerges from familiar mechanisms, as the scale moment first showed. A training job that scales from 8 GPUs to 8,000 can meet communication bottlenecks, load imbalance, or synchronization overhead that were negligible at 8. Serving shows the same shift in its event rates. At a million requests a day, a one-in-a-million per-request failure is expected about once a day, so an event that never appears in testing becomes a routine operating condition. At that scale, stragglers that bottleneck clusters, network partitions that split training, and

heterogeneity across hardware generations that complicates load balancing become design inputs rather than anomalies.

Scaling laws set the demand for that growth and the Fleet Law (equation 0.97) sets its price, so together they say when growth pays and where it breaks. The laws estimate what growth buys; they do not oblige an organization to buy it. Scaling pays while the quality gain a fitted curve predicts justifies what the fleet charges to deliver it, and that charge moves with N on several fronts at once. Increasing N reduces the ideal compute term T_{compute}/N for fixed work and unchanged per-device rates, while $T_{\text{comm}}(N)$ and $T_{\text{sync}}(N)$ depend on the resulting partition and schedule and carry no such guarantee. When independent, identical constant-rate component failures each interrupt the job, the expected interval between interruptions falls as $1/N$; correlated failures or different recovery boundaries require a different model. Within a fixed facility, the power and cooling envelope does not grow with the job, and a successful model then pays its serving cost for as long as it runs. Growth therefore breaks on either side of the ledger. On the model side, the breakdown conditions of table 0.2 mark where extrapolating a fitted quality curve becomes unreliable, for example when model capacity outgrows the available tokens or added data stops supplying new information. On the systems side, the scaling wall of section 5 marks where added communication and coordination consume the compute time that added accelerators save (principle 11), and a site's deliverable power caps the configuration regardless of how the work is partitioned. A complete production design has to evaluate both sides together.

The Complete Production System

Consider Archetype A (GPT-4/Llama-3), whose running instance in this book is a GPT-3-class dense transformer trained with mixed precision on a reference cluster of 1,024 GPUs and then shipped into a global serving fleet. Checkpoint bursts must land without starving the data loaders, while collective results must arrive before the computations that depend on them. Communication can overlap independent work, but its exposed remainder delays progress. At that scale, recovery planning uses observed write costs and failure rates, with the Young-Daly interval supplying an approximation where its assumptions hold (Young 1974; Daly 2006). Serving service-level objectives (SLOs) require headroom for rollback and fallback, while governance controls enforce approved conditions on which data, models, and outputs may reach users. These are coupled rates, budgets, failure exposures, and policy constraints that must be designed before deployment.

The production system begins with physical capacity, but capacity matters only when the rates line up. Physical compute infrastructure supplies accelerators, power, cooling, and fabric; the data tier determines whether data can arrive fast enough; and collective communication determines whether workers can synchronize without turning the network into the bottleneck. These subsystems must be co-designed: data ingestion must meet accelerator consumption, checkpoint writes must fit the recovery budget, and the fabric must carry the actual collective traffic. These are distinct rates; matching them to workload demand matters more than making their raw bandwidths equal.

Parallelization strategies must fit those physical rates and the expected failure pattern. Data parallelism, tensor parallelism, and pipeline parallelism are not interchangeable templates; each changes memory pressure, communication volume, checkpointing behavior, and scheduler complexity. Hybrid strategies become useful only when the surrounding storage, fabric, and recovery design can support the shape of the partition.

↩ How data, tensor, pipeline, and hybrid partitioning each move memory pressure, communication volume, and the pipeline bubble is established in section 8.

Serving adds a separate acceptance boundary. The contract of the fourth principle judges the model by its latency, availability, and cost on live traffic, whether it runs in a data center replica or on a phone-class device. Some security and robustness controls execute on the request path; others operate during training, release review, or asynchronous monitoring. Each needs an evidence and response path suited to its obligation. Training throughput therefore does not establish that a model will meet live latency, recovery, security, subgroup, and carbon requirements. A fleet expansion raises two linked decisions, whether to accept the larger training job and whether to release the model it produces, and each needs its own evidence.

For our frontier-model case, suppose a proposed expansion doubles the reference cluster to 2,048 GPUs while retaining the fabric and checkpoint tier. Doubling N halves the ideal T_{compute}/N term for fixed work at unchanged per-device rates, so the first measurement is whether that saving survives the changes in $T_{\text{comm}}(N)$ and $T_{\text{sync}}(N)$ and their overlap. The recovery side can be estimated before

any measurement. Assume independent GPU failures at an identical constant rate, with each failure interrupting the job. Counting those failures alone at the registry mean time to failure (MTTF) of 50,000 hours per GPU, the job's mean time between interruptions is that MTTF divided by N, so it falls from 48.8 hours to 24.4 hours. Substituting the Young-Daly interval of equation 0.22 back into the waste it minimizes gives an optimized checkpoint-and-rework overhead of about $\sqrt{2T_{\text{write}}/\text{MTBF}_{\text{system}}}$ as a fraction of wall-clock time. Because $\text{MTBF}_{\text{system}}$ falls as $1/N$, that overhead grows as $\sqrt{N}$, and doubling the cluster multiplies it by $\sqrt{2}$, a factor of about 1.41×. The model's 2.45 TB checkpoint takes about 24.5 seconds to write at the registry checkpoint bandwidth, which puts the overhead at about 1.7 percent of wall-clock time on the reference cluster and about 2.4 percent on the expanded one. These figures are optimistic. They count GPU failures alone, while switches, network interface cards, and software add interruptions of their own. The full-system analysis in section 15, which includes those failure domains for a cluster about ten times larger, arrives at a correspondingly larger overhead from the same formula. Write contention with data loading or a changed checkpoint size would also require revising them.

The ledger still yields a decision rule. In this example, measured step time covers uninterrupted execution and excludes the checkpoint-and-rework overhead estimated separately. The retained-progress factor accounts for that excluded cost once; a whole-run measurement that already includes it must not receive the factor again. For fixed work, run time is proportional to $T_{\text{step}}(N)/(1 - \text{overhead})$, so the larger cluster shortens the run only when its measured step-time speedup exceeds the ratio of the two retained fractions, one minus the reference overhead divided by one minus the expanded overhead. Here that break-even speedup is about 1.01×, so recovery alone does not block the expansion. Short of a superlinear speedup, however, it cannot save accelerator-hours. Accelerator-hours are the GPU count times run time, so doubling the GPUs multiplies them by twice that same ratio divided by the achieved speedup. Even at the ideal $2\times$ speedup they rise by about 0.7 percent, and every point of scaling efficiency lost to exposed communication raises them further. The expansion therefore buys calendar time with accelerator-hours and energy, and the communication measurement, not the recovery estimate, sets that price.

That price buys time, not quality, because the work is fixed. Quality enters the ledger only if the doubled cluster spends twice the compute instead of finishing sooner, and there the fitted scaling curve prices the gain. In the compute power law that Kaplan et al. (2020) fitted (charted in the scaling laws of section 6, figure 0.216), loss falls as compute raised to the power -0.050, so doubling compute multiplies loss by $2^{-0.050} \approx 0.966$, a reduction of about 3.4 percent. A frontier run lies beyond the range that fit studied, so the figure shows the shape of the trade rather than this run's gain. Each doubling buys the same fractional reduction, and therefore a smaller absolute one than the doubling before it, while its price, twice the accelerator-hours plus the recovery and communication overhead above, is paid in full every time.

Releasing the resulting model remains a separate decision, because its serving configuration must meet latency targets with recovery headroom and preserve the required security, subgroup, and carbon evidence. A failed gate requires revising the affected partition, placement, capacity allocation, or release plan before proceeding. The decisions share provenance and resource measurements, but each also needs evidence specific to its operating contract.

These constraints can conflict. A communication optimization may increase failure exposure, sustainability requirements may restrict infrastructure choices, and governance controls may consume serving latency or capacity. The displacement of overhead requires measuring those transferred costs before accepting a local speedup.

The three workloads introduced as lighthouse archetypes show that no single corner of the C^3 taxonomy dominates. Table 0.234 follows each of them up the fleet stack. Its first row repeats the representative binding term with which each workload was first characterized; the rows below record what each band of the stack, and the part of the book that develops it, showed about that workload.

↩ The three lighthouse archetypes, and whether each stresses compute, communication, or coordination, are established in section 11.

Table 0.234: Archetypes Across the Fleet Stack: The book's three running workloads traced through the four bands of the fleet stack, one band per part, beneath the representative binding C^3 term with which the introduction characterized each. The same Fleet Law applies to all three; the regimes shown here expose different constraints, not permanent bottleneck assignments.

Fleet Stack Band	Archetype A (GPT-4/Llama-3)	Archetype B (DLRM at Scale)	Archetype C (Federated MobileNet)
Representative C^3 term	Communication, fleet-wide	Coordination, in routing and placement	Local compute, within the device envelope
Infrastructure (Part I)	Training state and checkpoints far exceed one accelerator's memory, motivating partitioning; frequent tensor-parallel collectives favor the fastest interconnect domain	Multi-terabyte embedding tables exceed any device's memory, and live feature lookups demand random-access storage	Phone-class power, memory, and thermal envelopes cap what local training can attempt
Distribution (Part II)	3D parallelism and AllReduce must fit the step budget, and Young-Daly checkpoint cadence tracks interruptions measured in hours	Embedding sharding turns lookups into AllToAll exchanges whose hottest receiver sets completion time	Federated averaging replaces AllReduce, and over-selection with round deadlines bounds the wait for intermittent clients
Serving (Part III)	Small-batch decode is bound by memory bandwidth, so batching, KV-cache policy, and lifetime serving cost shape deployment	Feature-parallel sharding and routing must hold tail latency within budget at millions of queries per second	Adaptation runs only in admitted windows that preserve the foreground deadline, and rollouts span weeks of version skew
Governance (Part IV)	Data provenance, output leakage, and the energy of each training run gate release	Recommendations shape future training data, requiring fairness and drift evidence with accountable response across the serving lifecycle	Secure aggregation limits visibility of individual updates; differential privacy bounds released information under stated accounting assumptions; participation bias shapes whose data contribute

Read down a column to trace the constraints one workload encounters across the bands; read across a row to compare how a band constrains different workloads. These constraints need not all bind at once. The representative terms describe operating regimes, not permanent assignments of archetypes to C^3 terms. Federated MobileNet can be device-compute-bound during local training yet communication- or coordination-bound during a global round with intermittent clients. The same six principles apply to all three; the engineer must measure the workload at the relevant boundary before choosing which term to reduce. Because the binding term must be found rather than assumed, the book's method reduces to a diagnostic procedure, a sequence of steps that is distinct from the principles it applies.

1. Start with the observed symptom, the user-visible or operator-visible failure.
2. Attach the metric that makes the symptom falsifiable.
3. Map the symptom to C^3 by identifying whether compute, communication, or coordination binds first.
4. Locate the fleet-stack row that owns the intervention.
5. State the cost that the proposed fix displaces elsewhere.
6. Preserve the audit, safety, security, or responsibility evidence needed to justify the decision.

On the expanded cluster, a training run that falls behind its schedule exercises every step of that procedure. The lag is the symptom. The metric is model FLOPs utilization measured per step, which has dropped since the expansion. A step profile shows accelerators idle at gradient-synchronization barriers, but that wait alone does not distinguish slow collective transfer from ranks arriving late after computation, data loading, or scheduling delays. Aligned per-rank traces must separate arrival skew from exposed collective completion time. If those traces show little arrival skew and increased exposed transfer time, they support communication as the binding term. The owning row is distributed execution, where the collective and its overlap are scheduled. A proposed fix such as gradient compression shrinks the exchanged bytes but displaces cost into convergence and accuracy risk. The evidence to preserve is therefore the convergence and evaluation record showing that the compressed run still reaches its quality target. The same procedure redirects other symptoms. A

fairness alert may point to missing labels, insufficient review capacity, or a serving-path threshold policy rather than model weights alone, and a security incident may point to artifact provenance, access permissions, or rollback evidence rather than network perimeter failure. The discipline is to follow the constraint until the row that owns it and the trade-off it carries are visible.

When the fix changes what ships, the evidence from the final step enters the end-to-end evaluation contract (principle 19), one versioned release record that binds the candidate to production-equivalent measurements, accountable acceptance authority, tested recovery, and explicit conditions that invalidate the evidence.

↩ The end-to-end evaluation contract and its versioned release record are established in section 11.

Competencies Mastered

The proposed cluster expansion tests competence across the whole stack. Accepting it requires evidence that reduced compute time survives communication and recovery costs, while releasing its model requires a separate serving and governance judgment. Mastery means identifying those dependencies, choosing the measurements that test them, and defending the decision within the stated assumptions. Each band of the stack contributes one checkable part of that defense.

In the Infrastructure band, the governing question is which infrastructure limit binds the workload. An engineer who has mastered this material can match accelerator memory and compute to the model, provision storage and network bandwidth for the required rates, and account for power and cooling as capacity constraints rather than facilities details. In the expansion, that skill decides whether the retained fabric, checkpoint tier, and site power can carry 2,048 GPUs at all.

In the Distribution band, the governing question is how to make a workload larger than any single machine behave as one coordinated system. An engineer can analyze communication patterns, select a parallelization strategy, and estimate failure cadence from component MTTF, fleet size, and the failure-dependence model. Given a collective's cost model, the engineer can also predict which of its terms grows with N, as the Ring AllReduce footnote to the second principle showed. In the expansion, this band produced the recovery estimate and the break-even speedup, and it identified exposed communication as the measurement that sets the price.

In the Serving band, the governing question is how a trained model keeps serving value under live traffic. An engineer can budget the serving tax, select batching and placement policies, and monitor system performance and input distributions in production so that a working model does not become an inefficient or stale service. In the expansion, this band decides whether the released model meets its latency contract with headroom left for recovery.

↩ The serving tax that distributed execution adds to each request's latency budget is established in section 4.

In the Governance band, the governing question is who bears the costs and risks of the system's decisions. An engineer can translate security, privacy, fairness, robustness, and sustainability obligations into controls and evidence: access boundaries, privacy budgets, subgroup evaluations, adversarial, out-of-distribution, and concept-drift tests, incident procedures, and resource accounting. In the expansion, this band supplies the security, subgroup, and carbon evidence that the release decision requires. These competencies connect model development to the consequences of deployment. They also supply a test of transfer. When a new workload or substrate appears, the engineer must identify its accounting boundary, constraints, and evidence requirements before accepting an efficiency claim.

Where the Binding Constraint Moves Next

The binding constraint will keep moving as workloads and infrastructure change, and the same six principles apply to workloads that are only now emerging. Test-time computation and multi-component workflows move work into the serving path, while new interconnect and packaging substrates change the rates beneath the fleet. Each shift relocates cost without exempting it from the Fleet Law.

Orchestration and test-time compute

Test-time computation, introduced alongside pretraining and posttraining in section 8, moves part of the scaling curve from the training cluster into the serving path, where each additional model step consumes part of the query's latency and resource budget; section 6 treated that spending as a per-request budget, the logic wall. The simplest case already changes the accounting. A service

that adds a verification call and retries failed answers can improve accepted output quality while increasing latency and energy per completed task.

Composition extends that pattern into a workflow of several components, often called a compound AI system. Retrieval looks up external information, tools are programs that perform requested actions, and verification checks whether an output meets a stated requirement. A planner, itself driven by model calls, chooses the next action, and a failed check may trigger another attempt. A workflow whose planner decides and acts in such a loop is called agentic. The same fleet constraints govern this larger accounting boundary. Network fabrics constrain communication, memory systems constrain state residency, and governance constrains which actions may execute. These specialized components can expand what the system does, but their contribution must be measured over the complete task and its required quality and safety.

When useful work spans multiple components, the engineer must measure orchestration overhead, state movement, failure propagation, latency budgets, and governance evidence as part of the system itself. The accounting boundary has to grow with the work. That requirement is the measurement contract of section 12, a stated functional unit inside a stated system boundary, applied to a workflow instead of a single model (figure 0.248). For model execution alone, the boundary encloses one forward pass, and FLOPs and joules per token describe its cost. For an agentic workflow, the boundary must enclose planning, retrieval, tool execution, verification, and every retry triggered by a failed check, so the cost is counted in joules per useful task completed. Conventional serving already requires end-to-end evaluation, but inside such a loop the model calls sit within a control cycle whose throughput and energy hinge on retry frequency and verification latency. Coordination, already paid in recovery and request routing, thus reappears inside the serving path between model calls.

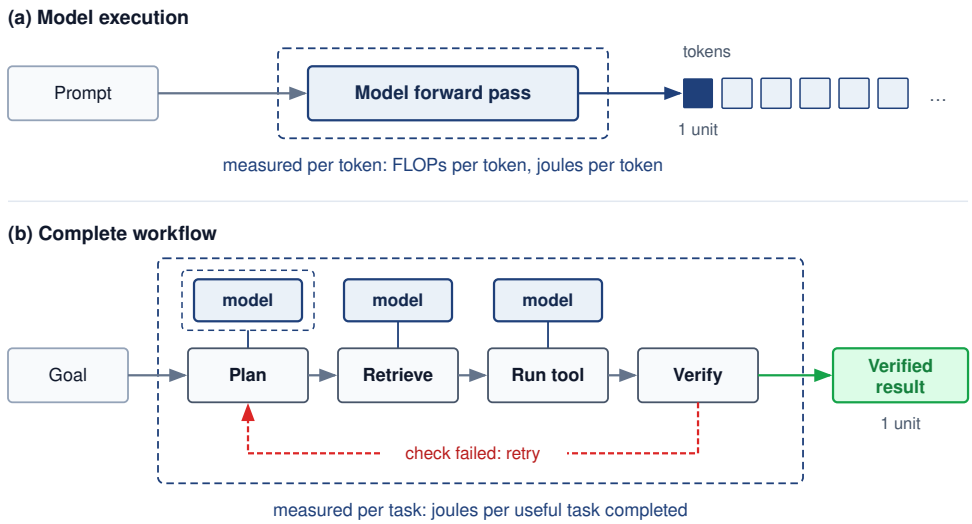



Figure 0.248: From Model Serving to Closed-Loop Agentic Fleets: The dashed outline in each panel is the accounting boundary. For model execution (a), the boundary holds only the forward pass, so FLOPs per token and joules per token describe it. For a complete workflow (b), the boundary holds planning, retrieval, tool execution, verification, and every retry after a failed check, with the model called from inside the loop; a copy of the panel (a) boundary encloses one of those calls. The cost is therefore counted per useful task completed: the unit of account shifts from one token to one verified result. Minimizing that cost requires evaluating the whole loop at the required quality and safety.

Such a loop needs a coordinator of its own. Workflow orchestration schedules model calls, retrieval, tool execution, and verification under latency, cost, and failure budgets, and it is distinct from the fleet orchestration of chapter 24, which places jobs and replicas on accelerators. The workflow layer relies on that fleet scheduler for resource placement and on production MLOps pipelines for versioning and release, but neither supporting mechanism decides the application's

next action. This progression from stateless serving to stateful, multi-step execution marks the boundary between pretraining or serving fleets and reasoning fleets. Where this book establishes how distributed infrastructure, execution, serving, and governance deliver fixed model checkpoints at scale, reasoning systems build on these foundations to coordinate and govern the closed-loop trajectories that turn model calls into verified actions.

↩ Cluster scheduling and resource-placement policies are established in chapter 24.

Measuring the whole loop also changes how an efficiency target is planned, because the retries, duplicate model calls, and repeated retrieval inside the loop become places where efficiency can be gained or lost. A 100× goal, an illustrative planning target rather than a measured trend, can be split across the stack only if its multiplicative factors hold under the same workload and resource budget. Whatever hardware and algorithms do not supply becomes a required improvement from the two orchestration layers together, not evidence that the improvement is available.



Hardware and algorithms leave a 10× residual that orchestration must supply.

> **Napkin Math 17.1: Fleet-stack efficiency accounting**
>
> **Problem**: Efficiency here means useful task progress per unit of fleet resource budget, with quality and safety held to the same acceptance criteria. Suppose a workload needs a 100× efficiency improvement over a large-cluster baseline. If a particular workload saw 4× from hardware and 2.5× from algorithmic compression, where would the remaining gain have to come from?
>
> **Math**: Under the assumed multiplicative accounting, total system gain is the product of compatible improvements across the fleet stack.
>
> 1. Hardware (physics): 4× in this scenario.
> 2. Algorithm (math): 2.5× from workload-compatible sparsity or distillation.
> 3. Orchestration (systems): $100\times \;/\; (4.0 \times 2.5) = 10\times$.
>
> **Systems insight**: The division itself is simple arithmetic, and the lessons lie in what it assumes. First, the result is a requirement, not a forecast. Under the assumed hardware and algorithmic gains, the 100× target leaves a residual 10× that orchestration would need to supply, split between the workflow layer (reducing duplicate model calls, routing requests to appropriate components, reusing cached state, validating outputs) and the fleet and runtime layers (placement and overlapping communication with computation). These are candidate interventions, not demonstrated sources of that gain. Second, the factors multiply only when each removes different work. Distillation that shrinks every model call and a routing change that skips some calls compound, but a cache that avoids a repeated retrieval and a planner change that stops issuing that same retrieval save the same work once, not twice. If measurements cannot establish the required improvement within the latency and resource budgets, the target must be revised.

Physical substrates and emerging hardware

Measured orchestration gains still depend on a physical fabric, so software and substrate choices must be evaluated together. Once software has reduced wasted model calls, duplicate retrieval, and avoidable coordination, the remaining frontier is the substrate that moves tokens, activations, and power through the fleet. For Archetype A, the pressure on that substrate comes from specific collective patterns rather than from scale in general. Tensor parallelism issues frequent collectives across partitioned tensors, and mixture-of-experts (MoE) routing issues an all-to-all dispatch at each expert layer. Across thousands of accelerators, link energy accumulates with the volume of that collective traffic, which makes lower-energy interconnects a plausible fabric-efficiency lever.

The candidates are substrates the book has already met. Optical I/O and co-packaged optics entered with the network fabric as ways to lower energy per bit, 3D integration extends the stacking that HBM and advanced packaging already use to shorten connections, and neuromorphic event-driven substrates appeared among the research directions for sustainable fleets as a way to organize computation around sparse events such as spikes and keep state beside the compute that uses it. Each attacks a different factor of the same account: energy per bit, path length, bandwidth density, or the distance between memory and compute. Automated architecture search and AI-for-systems

optimization offer ways to explore candidate designs, but each proposal still needs a workload-specific comparison of useful work, data movement, power, and implementation cost. A lower link-energy measurement alone does not establish a better fleet, and a new substrate still needs fault tolerance and responsible governance.

↩ Co-packaged optics and its switch-level power dividend are established in notebook 3.6; neuromorphic and other non-von Neumann directions in section 39.

Napkin Math 17.2: The physics of better fabrics

Problem: In a hypothetical scenario, an electrical link uses 10 pJ/bit, while an optical link uses 5 pJ/bit. What efficiency dividend would this difference provide for the collective traffic of tensor-parallel and mixture-of-experts layers?

Math: For the same traffic volume and link-energy measurement boundary, compare the two hypothetical signaling costs.

1. Electrical cost: 10 pJ/bit.
2. Optical I/O scenario: 5 pJ/bit.
3. Link-energy ratio: 2×.
4. Fleet effect: the ratio applies only to the share of power spent on link signaling. The port-power budget of section 4 counts one selected switch-side endpoint for each inventoried physical link, excluding opposite endpoints and other fabric components. That endpoint subtotal is about 10.5 percent of the accelerators' combined thermal design power, or about 9.5 percent of accelerator and counted-endpoint power together. Assuming the hypothetical optical change halves this entire endpoint subtotal at unchanged traffic and leaves the remaining components unchanged, it removes half of that share, so it saves about 4.7 percent of the combined total, and less of facility energy.

Systems insight: The link-energy ratio bounds the dividend within its signaling boundary; the fleet dividend is that ratio diluted by the affected share of energy. This is Amdahl's law applied to energy, the same affected-share arithmetic that limits any partial speedup, and it turns a 2× link improvement into a single-digit percentage of the accelerator-plus-counted-endpoint budget. The energy wall depends on traffic volume and the energy of moving each bit, and the workload's traffic patterns set the links' share. AllReduce for gradient synchronization grows aggregate traffic with worker count, while all-to-all dispatch for MoE layers depends on token volume, routing, and expert placement. Reducing communicated bytes and avoiding redundant exchanges shrink that share itself; lowering link energy per bit shrinks the cost within it. Optical I/O is a candidate intervention of the second kind, and the share above comes from a provisioned port-power budget, not a measurement, so its fleet value for a given workload still requires measuring the links' actual share of energy, together with the rest of the interconnect implementation. Data locality and interconnect efficiency therefore belong in the same measured system budget.

Whatever the substrate, the discipline stays the same. An engineer chooses the unit of useful work, accounts for its full resource cost, and states which comparisons the evidence supports.

Fallacies and Pitfalls

The closing mistakes all come from optimizing the wrong unit of design. A model can improve while the fleet becomes slower, less reliable, more expensive, or harder to govern.

Fallacy: *A faster model is automatically a better system.*

Raw model speed matters, but it is only one term in the Fleet Law. In the illustrative equal-work, barrier-dominated step, a worker running at 80 percent of peer speed reduces throughput by 20 percent relative to uniformly fast workers. A faster kernel on every worker but that one leaves the step bound by the straggler, because speeding the workers already waiting at the barrier does not shorten the limiting computation. A design that reduces kernel time while increasing checkpoint pressure, network contention, serving variance, or governance risk can make the total system worse.

The systems question is whether the change improves useful throughput under the actual constraints: data movement, synchronization, failure recovery, power, latency, and accountability.

Pitfall: *Optimizing one layer while hiding the constraint it creates in another.*

A local improvement becomes dangerous when it moves cost to a layer that no one is measuring. Larger batches may raise accelerator utilization while worsening tail latency. Aggressive compression may reduce communication while increasing accuracy risk. Carbon-aware scheduling may lower emissions while requiring more slack in the service budget. Good engineering respects the displacement of overhead, keeping the transferred constraint visible so the system can choose deliberately rather than inheriting a hidden bottleneck.

Fallacy: *Fleet-scale lessons are tied to today's hardware and software stack.*

Specific processors, frameworks, and serving engines will change, but the durable relationships remain. Data must reach compute at the required rate. Workers must communicate before synchronization stalls the job. Failures must be expected at large component counts. Serving systems must meet tail-latency budgets, and governance constraints must be engineered into the operating path. The technology names are examples; the rate, failure, and accountability relationships are the lesson.

Pitfall: *Treating governance and sustainability as external reviews rather than system constraints.*

Postponing security, fairness, privacy, and carbon accounting can create architectural debt. Retrofitting audit trails, demographic monitoring, access controls, deletion workflows, or carbon-aware placement may require reconstructing evidence or redesigning deployed components. Identifying these obligations during design lets teams budget the required paths and test whether they work before release; the actual cost still depends on the control and deployment.

Summary

At fleet scale, improving a model or accelerator does not establish that the complete service improves. The engineering object is the coupled system that moves data, schedules work, survives failure, serves users, and satisfies governance obligations under physical and organizational constraints. Within their fitted regime, scaling laws set the demand for fleet growth, the Fleet Law sets its price, and the six principles locate where in the fleet that price is paid. The method that recurs across the book follows from all three. It identifies the binding constraint, quantifies its cost, and evaluates the proposed change across every affected operating path, so that the cost it displaces stays visible instead of resurfacing unmeasured in another layer.

Key Takeaways: The fleet is the unit of design

- **The fleet is the object**: The volume's six principles reduce to one habit, following the binding constraint across infrastructure, communication, coordination, serving, and governance. The fleet, not any single model or component, is the unit to build, measure, and optimize.
- **Growth must earn its price**: Within a fitted regime, each doubling of compute buys a smaller absolute loss reduction, while interruption exposure and checkpoint overhead grow with the fleet and exposed communication can grow with it. Expansion is a decision justified by measurements and release evidence, not a default.
- **Scale changes the probability model**: When server delays are independent, a request that touches 100 servers has a 63.4 percent chance that at least one responds beyond its 99th-percentile latency, and a job that needs every one of N independent components sees its interval between interruptions shrink as $1/N$. Fleet behavior is not single-node behavior repeated.
- **Orchestration gains require system measurements**: Scheduling, placement, and communication overlap improve useful throughput only when their gains survive recovery costs, serving deadlines, and resource budgets. Measure the complete operating path before accepting a local improvement as a fleet-wide gain.

- **Obligations belong in the path**: Security, privacy, fairness, robustness, carbon, and auditability are production constraints, not external reviews. The discipline is to design them into data pipelines, schedulers, serving paths, and operating procedures before scale makes the trade-off irreversible.

Closing Synthesis: The discipline of ML systems

Section traced the scale moment through a training run that stopped every few hours. Meta's Llama 3 cluster of 16,384 GPUs recorded 419 unexpected interruptions in 54 days and still kept more than 90 percent of elapsed time as useful training (Dubey et al. 2024). Those numbers now read as engineering. An unexpected interruption every 3.1 hours is the reliability gap of a job that needs every one of its accelerators at once, and it measures the run's recovery exposure; the effective training fraction measures how much progress the recovery machinery retained across elapsed time. The report credits faster startup, checkpointing, and diagnosis, including communication traces that made stalled collectives inspectable, for that retained fraction, so the fraction summarizes all of them together rather than measuring any single Fleet Law term. Each worker still computed, exchanged, and waited, as in the synchronous step with which the book began; Compute, Communication, and Coordination are those three activities, measured.

A proposed larger run can now be judged rather than presumed necessary. Under the expansion example's independent, identical constant-rate failure model and unchanged checkpoint write time, doubling the fleet halves the expected interruption interval and raises optimized checkpoint-and-rework overhead by about 1.41×, and it buys calendar time only by spending more accelerator-hours on the same work. Whether that run should be built depends on the shrinking quality gain its fitted scaling curve predicts for the doubling, the measured time and energy required to deliver it, and the evidence its release requires. The engineering achievement is a justified decision, including the decision to retain the current fleet when expansion cannot meet those conditions. Whether scaling training compute across thousands of accelerators or coordinating test-time reasoning across compound workflows, the discipline remains identical: follow the binding constraint across the fleet, account for every displaced cost, and accept only what the evidence defends.

Prof. Vijay Janapa Reddi, Harvard University

REFERENCES

References

Abadi, M., A. Chu, I. Goodfellow, H. B. McMahan, I. Mironov, K. Talwar, and L. Zhang. 2016. "Deep Learning with Differential Privacy." *Proceedings of the 2016 ACM SIGSAC Conference on Computer and Communications Security*, CCS '16, 308–18. https://doi.org/10.1145/2976749.2978318.

Adi, Yossi, Carsten Baum, Moustapha Cisse, Benny Pinkas, and Joseph Keshet. 2018. "Turning Your Weakness into a Strength: Watermarking Deep Neural Networks by Backdooring." *27th USENIX Security Symposium (USENIX Security 18)*, 1615–31.

Agrawal, Amey, Nitin Kedia, Ashish Panwar, Jayashree Mohan, Nipun Kwatra, Bhargav S. Gulavani, Alexey Tumanov, and Ramachandran Ramjee. 2024. "Taming Throughput-Latency Tradeoff in LLM Inference with Sarathi-Serve." *18th USENIX Symposium on Operating Systems Design and Implementation (OSDI 24)*, 117–34.

AI, Meta. 2022. *Building the Most Powerful AI Supercomputer: Meta's AI Research SuperCluster*. Meta AI Blog.

Ainslie, Joshua, James Lee-Thorp, Michiel de Jong, Yury Zemlyanskiy, Federico Lebron, and Sumit Sanghai. 2023. "GQA: Training Generalized Multi-Query Transformer Models from Multi-Head Checkpoints." *Proceedings of the 2023 Conference on Empirical Methods in Natural Language Processing*, 4895–901. https://doi.org/10.18653/v1/2023.emnlp-main.298.

Aizman, Alex, Gavin Maltby, and Thomas Breuel. 2019. "High Performance I/O for Large Scale Deep Learning." *2019 IEEE International Conference on Big Data (Big Data)*, 5965–67. https://doi.org/10.1109/bigdata47090.2019.9005703.

Aji, Alham Fikri, and Kenneth Heafield. 2017. "Sparse Communication for Distributed Gradient Descent." *Proceedings of the 2017 Conference on Empirical Methods in Natural Language Processing*, 440–45. https://doi.org/10.18653/v1/d17-1045.

Akidau, Tyler, Robert Bradshaw, Craig Chambers, Slava Chernyak, Rafael J. Fernández-Moctezuma, Reuven Lax, Sam McVeety, et al. 2015. "The Dataflow Model: A Practical Approach to Balancing Correctness, Latency, and Cost in Massive-Scale, Unbounded, Out-of-Order Data Processing." *Proceedings of the VLDB Endowment* 8 (12): 1792–803. https://doi.org/10.14778/2824032.2824076.

Alexandrov, Albert D., Mihai F. Ionescu, Klaus E. Schauser, and Chris J. Scheiman. 1995. "LogGP: Incorporating Long Messages into the LogP Model—One Step Closer Towards a Realistic Model for Parallel Computation." *Proceedings of the Seventh Annual ACM Symposium on Parallel Algorithms and Architectures - SPAA '95* 30: 95–105. https://doi.org/10.1145/215399.215427.

Al-Fares, Mohammad, Alexander Loukissas, and Amin Vahdat. 2008. "A Scalable, Commodity Data Center Network Architecture." *ACM SIGCOMM Computer Communication Review* 38 (4): 63–74. https://doi.org/10.1145/1402946.1402967.

Alistarh, Dan, Demjan Grubic, Jerry Z. Li, Ryota Tomioka, and Milan Vojnovic. 2017. "QSGD: Communication-Efficient SGD via Gradient Quantization and Encoding." *Advances in Neural Information Processing Systems (NeurIPS)* 30: 1709–20.

Alizadeh, Mohammad, Albert Greenberg, David A. Maltz, Jitendra Padhye, Parveen Patel, Balaji Prabhakar, Sudipta Sengupta, and Murari Sridharan. 2010. "Data Center TCP (DCTCP)." *Proceedings of the ACM SIGCOMM 2010 Conference*, 63–74. https://doi.org/10.1145/1851182.1851192.

Amazon Web Services. 2017. *Summary of the Amazon S3 Service Disruption in the Northern Virginia (US-EAST-1) Region*. AWS service event summary.

Amazon Web Services. 2020. *Amazon S3 Update – Strong Read-After-Write Consistency*. AWS News Blog.

Amazon Web Services. 2026a. *Checking Object Integrity in Amazon S3*. Amazon S3 User Guide.

Amazon Web Services. 2026b. *Managing the Lifecycle of Objects*. Amazon S3 User Guide.

Amazon Web Services. 2026c. *Naming Amazon S3 Objects*. Amazon S3 User Guide.

Amazon Web Services. 2026d. *Understanding Archive Retrieval Options*. Amazon S3 User Guide.

AMD. 2023. *AMD Instinct MI300X Accelerators*. AMD product documentation.

Amdahl, Gene M. 1967. "Validity of the Single Processor Approach to Achieving Large Scale Computing Capabilities." *Proceedings of the April 18-20, 1967, Spring Joint Computer Conference on - AFIPS '67 (Spring)*, AFIPS '67 (spring), 483–85. https://doi.org/10.1145/1465482.1465560.

Amershi, Saleema, Andrew Begel, Christian Bird, Robert DeLine, Harald Gall, Ece Kamar, Nachiappan Nagappan, Besmira Nushi, and Thomas Zimmermann. 2019. "Software Engineering for Machine Learning: A Case Study." *2019 IEEE/ACM 41st International Conference on Software Engineering: Software Engineering in Practice (ICSE-SEIP)*, 291–300. https://doi.org/10.1109/icse-seip.2019.00042.

Amiel, Frederic, Christophe Clavier, and Michael Tunstall. 2006. "Fault Analysis of DPA-Resistant Algorithms." In *Fault Diagnosis and Tolerance in Cryptography*. Springer Berlin Heidelberg. https://doi.org/10.1007/11889700_20.

Amodei, Dario, and Danny Hernandez. 2018. "AI and Compute." *OpenAI Blog* 2.

Amodei, D., C. Olah, J. Steinhardt, P. Christiano, J. Schulman, and D. Mané. 2016. "Concrete Problems in AI Safety." *arXiv Preprint arXiv:1606.06565*, ahead of print. https://doi.org/10.48550/arXiv.1606.06565.

Anslow, Pete. 2016. *RS(544,514) FEC Performance Including Precoding*. IEEE P802.3cd Task Force.

Anthony, L. F. W., B. Kanding, and R. Selvan. 2020. *Carbontracker: Tracking and Predicting the Carbon Footprint of Training Deep Learning Models*. ICML Workshop on Challenges in Deploying and monitoring Machine Learning Systems.

Antonakakis, M., T. April, M. Bailey, M. Bernhard, E. Bursztein, J. Cochran, Z. Durumeric, et al. 2017. "Understanding the Mirai Botnet." *26th USENIX Security Symposium (USENIX Security 17)* 16: 1093–110.

Apple. 2021a. *Boot Process for iPad and iPhone Devices*. Apple Platform Security.

Apple. 2021b. *Secure Software Updates*. Apple Platform Security.

Apple. 2024a. *Facial Matching Security*. Apple Platform Security.

Apple. 2024b. *The Secure Enclave*. Apple Platform Security.

Apple Differential Privacy Team. 2017. *Learning with Privacy at Scale*. Apple Machine Learning Research.

Arifeen, Tooba, Abdus Sami Hassan, and Jeong-A Lee. 2020. "Approximate Triple Modular Redundancy: A Survey." *IEEE Access* 8: 139851–67. https://doi.org/10.1109/access.2020.3012673.

Arivazhagan, Manoj Ghuhan, Vinay Aggarwal, Aaditya Kumar Singh, and Sunav Choudhary. 2019. "Federated Learning with Personalization Layers." *CoRR* abs/1912.00818.

Ashkboos, Saleh, Amirkeivan Mohtashami, Maximilian L. Croci, Bo Li, Pashmina Cameron, Martin Jaggi, Dan Alistarh, Torsten Hoefler, and James Hensman. 2024. "QuaRot: Outlier-Free 4-Bit Inference in Rotated LLMs." *Advances in Neural Information Processing Systems (NeurIPS)*, 100213–40. https://doi.org/10.52202/079017-3180.

Asonov, Dmitri, and Rakesh Agrawal. 2004. "Keyboard Acoustic Emanations." *IEEE Symposium on Security and Privacy, 2004. Proceedings. 2004*, 3–11. https://doi.org/10.1109/secpri.2004.1301311.

Ateniese, G., L. V. Mancini, A. Spognardi, A. Villani, D. Vitali, and G. Felici. 2015. "Hacking Smart Machines with Smarter Ones: How to Extract Meaningful Data from Machine Learning Classifiers." *International Journal of Security and Networks* 10 (3): 137. https://doi.org/10.1504/ijsn.2015.071829.

Avizienis, Algirdas, Jean-Claude Laprie, Brian Randell, and Carl Landwehr. 2004. "Basic Concepts and Taxonomy of Dependable and Secure Computing." *IEEE Transactions on Dependable and Secure Computing* 1 (1): 11–33. https://doi.org/10.1109/TDSC.2004.2.

Bai, Tao, Jinqi Luo, Jun Zhao, Bihan Wen, and Qian Wang. 2021. "Recent Advances in Adversarial Training for Adversarial Robustness." *Proceedings of the Thirtieth International Joint Conference on Artificial Intelligence*, 4312–21. https://doi.org/10.24963/ijcai.2021/591.

Bai, Yuntao et al. 2022. *Constitutional AI: Harmlessness from AI Feedback*.

Baldé, Cornelis P, Vanessa Forti, Vanessa Gray, Ruediger Kuehr, and Paul Stegmann. 2017. "The Global e-Waste Monitor 2017: Quantities, Flows and Resources." *United Nations University, International Telecommunication Union, International Solid Waste Association*.

Banbury, Colby, Vijay Janapa Reddi, Peter Torelli, Jeremy Holleman, Nat Jeffries, Csaba Kiraly, Pietro Montino, et al. 2021. "MLPerf Tiny Benchmark." *arXiv Preprint*.

Barenghi, A., G. M. Bertoni, L. Breveglieri, M. Pellicioli, and G. Pelosi. 2010. "Low Voltage Fault Attacks to AES." *2010 IEEE International Symposium on Hardware-Oriented Security and Trust (HOST)*, 7–12. https://doi.org/10.1109/hst.2010.5513121.

Barroso, Luiz André, Urs Hölzle, and Parthasarathy Ranganathan. 2019. *The Datacenter as a Computer: Designing Warehouse-Scale Machines*. Synthesis Lectures on Computer Architecture. Springer International Publishing. https://doi.org/10.1007/978-3-031-01761-2.

Basiri, A., N. Behnam, R. de Rooij, L. Hochstein, L. Kosewski, J. Reynolds, and C. Rosenthal. 2016. "Chaos Engineering." *IEEE Software* 33 (3): 35–41. https://doi.org/10.1109/ms.2016.60.

Baumann, R. 2005. "Soft Errors in Advanced Computer Systems." *IEEE Design and Test of Computers* 22 (3): 258–66. https://doi.org/10.1109/mdt.2005.69.

Baylor, Denis, Eric Breck, Heng-Tze Cheng, Noah Fiedel, Chuan Yu Foo, Zakaria Haque, Salem Haykal, et al. 2017. "TFX: A TensorFlow-Based Production-Scale Machine Learning Platform." *Proceedings of the 23rd ACM SIGKDD International Conference on Knowledge Discovery and Data Mining*, 1387–95. https://doi.org/10.1145/3097983.3098021.

Beaton, A. E., and J. W. Tukey. 1974. "The Fitting of Power Series, Meaning Polynomials, Illustrated on Band-Spectroscopic Data." *Technometrics* 16 (2): 147–85. https://doi.org/10.1080/00401706.1974.10489171.

Bellamy, Rachel K. E., Kuntal Dey, Michael Hind, Seung Hoffman, Sylvain Houde, Karthikeyan Kannan, Pradeep Lohia, et al. 2019. "AI Fairness 360: An Extensible Toolkit for Detecting and Mitigating Algorithmic Bias." *IBM Journal of Research and Development* 63 (4/5): 4:1–15. https://doi.org/10.1147/jrd.2019.2942287.

Bender, E. M., T. Gebru, A. McMillan-Major, and S. Shmitchell. 2021. "On the Dangers of Stochastic Parrots: Can Language Models Be Too Big?" *Proceedings of the 2021 ACM Conference on Fairness, Accountability, and Transparency*, 610–23. https://doi.org/10.1145/3442188.3445922.

Bengio, Yoshua, Nicholas Léonard, and Aaron Courville. 2013. "Estimating or Propagating Gradients Through Stochastic Neurons for Conditional Computation." *arXiv Preprint arXiv:1308.3432*.

Ben-Nun, Tal, and Torsten Hoefler. 2019. "Demystifying Parallel and Distributed Deep Learning: An in-Depth Concurrency Analysis." *ACM Computing Surveys* 52 (4): 1–43. https://doi.org/10.1145/3320060.

Berger, Vance W., and YanYan Zhou. 2014. "Kolmogorov–Smirnov Test: Overview." In *Wiley StatsRef: Statistics Reference Online*. Wiley. https://doi.org/10.1002/9781118445112.stat06558.

Bernstein, Jeremy, Yu-Xiang Wang, Kamyar Azizzadenesheli, and Animashree Anandkumar. 2018. "signSGD: Compressed Optimisation for Non-Convex Problems." *International Conference on Machine Learning (ICML)* 80: 560–69.

Beyer, Betsy, Chris Jones, Jennifer Petoff, and Niall Richard Murphy. 2016. *Site Reliability Engineering: How Google Runs Production Systems*. O'Reilly Media.

Biega, A. J., P. Potash, H. Daumé, F. Diaz, and M. Finck. 2020. "Operationalizing the Legal Principle of Data Minimization for Personalization." In *Proceedings of the 43rd International ACM SIGIR Conference on Research and Development in Information Retrieval*, edited by Jimmy Huang, Yi Chang, Xueqi Cheng, Jaap Kamps, Vanessa Murdock, Ji-Rong Wen, and Yiqun Liu. ACM. https://doi.org/10.1145/3397271.3401034.

Biggio, Battista, Blaine Nelson, and Pavel Laskov. 2012. "Poisoning Attacks Against Support Vector Machines." *Proceedings of the 29th International Conference on Machine Learning, ICML 2012, Edinburgh, Scotland, UK, June 26 - July 1, 2012*.

Binkert, Nathan, Bradford Beckmann, Gabriel Black, Steven K. Reinhardt, Ali Saidi, Arkaprava Basu, Joel Hestness, et al. 2011. "The Gem5 Simulator." *ACM SIGARCH Computer Architecture News* 39 (2): 1–7. https://doi.org/10.1145/2024716.2024718.

Bird, Sarah, Miro Dudík, Richard Edgar, Brandon Horn, Roman Lutz, Vanessa Milan, Mehrnoosh Sameki, Hanna Wallach, and Kathleen Walker. 2020. "Fairlearn: A Toolkit for Assessing and Improving Fairness in AI." *Microsoft Technical Report MSR-TR-2020-32*.

Birolini, A. 2017. *Reliability Engineering: Theory and Practice*. 8th ed. Springer Berlin Heidelberg. https://doi.org/10.1007/978-3-662-54209-5.

Bisong, E. 2019. "Kubeflow and Kubeflow Pipelines." Kubeflow and Kubeflow Pipelines in *Building Machine Learning and Deep Learning Models on Google Cloud Platform*. Apress. https://doi.org/10.1007/978-1-4842-4470-8_46.

Black, James R. 1969. "Electromigration–a Brief Survey and Some Recent Results." *IEEE Transactions on Electron Devices* 16 (4): 338–47. https://doi.org/10.1109/T-ED.1969.16754.

Blanchard, Peva, El Mahdi El Mhamdi, Rachid Guerraoui, and Julien Stainer. 2017. "Machine Learning with Adversaries: Byzantine Tolerant Gradient Descent." *Advances in Neural Information Processing Systems (NeurIPS)*, 119–29.

Bommasani, Rishi, Drew A. Hudson, Ehsan Adeli, Russ Altman, Simran Arora, Sydney von Arx, Michael S. Bernstein, et al. 2021. "On the Opportunities and Risks of Foundation Models." *arXiv Preprint arXiv:2108.07258*.

Bonawitz, K., H. Eichner, W. Grieskamp, D. Huba, A. Ingerman, V. Ivanov, C. Kiddon, et al. 2019. "Towards Federated Learning at Scale: System Design." *Proceedings of Machine Learning and Systems* 3.

Bonawitz, Keith, Vladimir Ivanov, Ben Kreuter, Antonio Marcedone, H. Brendan McMahan, Sarvar Patel, Daniel Ramage, Aaron Segal, and Karn Seth. 2017. "Practical Secure Aggregation for Privacy-Preserving Machine Learning." *Proceedings of the 2017 ACM SIGSAC Conference on Computer and Communications Security*, 1175–91. https://doi.org/10.1145/3133956.3133982.

Bourtoule, Lucas, Varun Chandrasekaran, Christopher A. Choquette-Choo, Hengrui Jia, Adelin Travers, Baiwu Zhang, David Lie, and Nicolas Papernot. 2021. "Machine Unlearning." *2021 IEEE Symposium on Security and Privacy (SP)*, 141–59. https://doi.org/10.1109/sp40001.2021.00019.

Breier, Jakub, Xiaolu Hou, Dirmanto Jap, Lei Ma, Shivam Bhasin, and Yang Liu. 2018. "Practical Fault Attack on Deep Neural Networks." *Proceedings of the 2018 ACM SIGSAC Conference on Computer and Communications Security* abs/1806.05859: 2204–6. https://doi.org/10.1145/3243734.3278519.

Brewer, Eric A. 2000. "Towards Robust Distributed Systems (Abstract)." *Proceedings of the Nineteenth Annual ACM Symposium on Principles of Distributed Computing*, 7. https://doi.org/10.1145/343477.343502.

Broadcom Inc. 2025. *Broadcom Ships Tomahawk 6: World's First 102.4 Tbps Switch.* Broadcom press release.

Brown, Tom B., Benjamin Mann, Nick Ryder, Melanie Subbiah, Jared Kaplan, Prafulla Dhariwal, Arvind Neelakantan, et al. 2020. "Language Models Are Few-Shot Learners." *Advances in Neural Information Processing Systems* 33: 1877–901. https://doi.org/10.48550/arxiv.2005.14165.

Bu, Zhiqi, Jiawen Dong, Qi Long, and Weijie J. Su. 2020. "Deep Learning with Gaussian Differential Privacy." *Harvard Data Science Review* 2. https://doi.org/10.1162/99608f92.cfc5dd25.

Buolamwini, Joy, and Timnit Gebru. 2018. "Gender Shades: Intersectional Accuracy Disparities in Commercial Gender Classification." *Conference on Fairness, Accountability and Transparency*, 77–91.

Burns, Brendan, Brian Grant, David Oppenheimer, Eric Brewer, and John Wilkes. 2016. "Borg, Omega, and Kubernetes." *Communications of the ACM* 59 (5): 50–57. https://doi.org/10.1145/2890784.

Bursztein, Elie, Luca Invernizzi, Karel Král, Daniel Moghimi, Jean-Michel Picod, and Marina Zhang. 2024. "Generalized Power Attacks Against Crypto Hardware Using Long-Range Deep Learning." *IACR Transactions on Cryptographic Hardware and Embedded Systems* 2024 (3): 472–99. https://doi.org/10.46586/tches.v2024.i3.472-499.

Bursztein, Elie, and Jean-Michel Picod. 2019. "A Hacker Guide to Deep Learning Based Side Channel Attacks." In *DEF CON 27*, edited by DEF CON. DEF CON.

Bushnell, Michael L, and Vishwani D Agrawal. 2002. "Built-in Self-Test." *Essentials of Electronic Testing for Digital, Memory and Mixed-Signal VLSI Circuits* 1: 489–548. https://doi.org/10.1007/0-306-47040-3_15.

Buyya, Rajkumar, Anton Beloglazov, and Jemal Abawajy. 2010. "Energy-Efficient Management of Data Center Resources for Cloud Computing: A Vision, Architectural Elements, and Open Challenges." *arXiv Preprint arXiv:1006.0308*, 6–17. https://doi.org/10.48550/arXiv.1006.0308.

Cai, Han, Chuang Gan, Ligeng Zhu, and Song Han. 2020. "TinyTL: Reduce Activations, Not Trainable Parameters for Efficient on-Device Learning." *Advances in Neural Information Processing Systems* 33: 11285–97.

Cai, Tianle, Yuhong Li, Zhengyang Geng, Hongwu Peng, Jason D. Lee, Deming Chen, and Tri Dao. 2024. "Medusa: Simple LLM Inference Acceleration Framework with Multiple Decoding Heads." *Proceedings of the 41st International Conference on Machine Learning (ICML)*.

Calders, Toon, and Sicco Verwer. 2010. "Three Naive Bayes Approaches for Discrimination-Free Classification." *Data Mining and Knowledge Discovery* 21 (2): 277–92. https://doi.org/10.1007/s10618-010-0190-x.

California Legislature. 2023. *California Consumer Privacy Act of 2018*. California Legislative Information.

Cao, Yinzhi, and Junfeng Yang. 2015. "Towards Making Systems Forget with Machine Unlearning." *2015 IEEE Symposium on Security and Privacy*, 463–80. https://doi.org/10.1109/sp.2015.35.

Carlini, Nicholas, Jamie Hayes, Milad Nasr, Matthew Jagielski, Vikash Sehwag, Florian Tramèr, Borja Balle, Daphne Ippolito, and Eric Wallace. 2023. "Extracting Training Data from Diffusion Models." *32nd USENIX Security Symposium (USENIX Security 23)*, 5253–70.

Carlini, Nicholas, and David Wagner. 2017. "Towards Evaluating the Robustness of Neural Networks." *2017 IEEE Symposium on Security and Privacy (SP)*, 39–57. https://doi.org/10.1109/sp.2017.49.

Carlini, N., D. Paleka, K. D. Dvijotham, T. Steinke, J. Hayase, A. F. Cooper, K. Lee, et al. 2024. "Stealing Part of a Production Language Model." *arXiv Preprint arXiv:2403.06634*.

Carlini, N., F. Tramer, E. Wallace, M. Jagielski, A. Herbert-Voss, K. Lee, A. Roberts, et al. 2021. "Extracting Training Data from Large Language Models." *30th USENIX Security Symposium (USENIX Security 21)*, 2633–50.

Caveness, E., P. S. G. C., Z. Peng, N. Polyzotis, S. Roy, and M. Zinkevich. 2020. "TensorFlow Data Validation: Data Analysis and Validation in Continuous ML Pipelines." *Proceedings of the 2020 ACM SIGMOD International Conference on Management of Data*, 2793–96. https://doi.org/10.1145/3318464.3384707.

Cavoukian, A. 2012. "Privacy by Design: Origins, Meaning, and Prospects for Assuring Privacy and Trust in the Information Era." *Office of the Information and Privacy Commissioner* 1: 170–208. https://doi.org/10.4018/978-1-61350-501-4.ch007.

Cenci, Marcelo Pilotto, Tatiana Scarazzato, Daniel Dotto Munchen, Paula Cristina Dartora, Hugo Marcelo Veit, Andrea Moura Bernardes, and Pablo R. Dias. 2021. "Eco-Friendly Electronics—a Comprehensive Review." *Advanced Materials Technologies* 7 (2): 2001263. https://doi.org/10.1002/admt.202001263.

Center, Pew Research. 2023. *What Americans Know about AI, Cybersecurity and Big Tech*.

Centers, Google Data. 2023. *Efficiency: How We Do It*.

Centre for International Governance Innovation. 2023. *Who Is Responsible When Autonomous Systems Fail?* CIGI policy article.

Cerebras Systems. 2024. *Cerebras Systems, Inc. Registration Statement on Form S-1*.

Chandola, Varun, Arindam Banerjee, and Vipin Kumar. 2009. "Anomaly Detection: A Survey." *ACM Computing Surveys* 41 (3): 1–58. https://doi.org/10.1145/1541880.1541882.

Chapelle, Olivier, Thorsten Joachims, Filip Radlinski, and Yisong Yue. 2012. "Large-Scale Validation and Analysis of Interleaved Search Evaluation." *ACM Transactions on Information Systems* 30 (1): 1–41. https://doi.org/10.1145/2094072.2094078.

Chen, C., S. Borgeaud, G. Irving, J.-B. Lespiau, L. Sifre, and J. Jumper. 2023. "Accelerating Large Language Model Decoding with Speculative Sampling." *arXiv Preprint arXiv:2302.01318*.

Chen, Chaofan, Oscar Li, Daniel Tao, Alina Barnett, Cynthia Rudin, and Jonathan Su. 2019. "This Looks Like That: Deep Learning for Interpretable Image Recognition." In *Advances in Neural Information Processing Systems 32: Annual Conference on Neural Information Processing Systems 2019, NeurIPS 2019, December 8-14, 2019, Vancouver, BC, Canada*, edited by Hanna M. Wallach, Hugo Larochelle, Alina Beygelzimer, Florence d'Alché-Buc, Emily B. Fox, and Roman Garnett. Curran Associates.

Chen, H.-W. 2006. "Gallium, Indium, and Arsenic Pollution of Groundwater from a Semiconductor Manufacturing Area of Taiwan." *Bulletin of Environmental Contamination and Toxicology* 77 (2): 289–96. https://doi.org/10.1007/s00128-006-1062-3.

Chen, Liyuan, Zihao Ye, Yonghao Wu, Danyang Zhuo, Luis Ceze, and Arvind Krishnamurthy. 2024. "Punica: Multi-Tenant LoRA Serving." *Proceedings of the 7th Conference on Machine Learning and Systems (MLSys)*.

Chen, Tianqi, Bing Xu, Chiyuan Zhang, and Carlos Guestrin. 2016. "Training Deep Nets with Sublinear Memory Cost." *arXiv Preprint arXiv:1604.06174*.

Chen, Ting, Simon Kornblith, Mohammad Norouzi, and Geoffrey Hinton. 2020. "A Simple Framework for Contrastive Learning of Visual Representations." *Proceedings of the 37th International Conference on Machine Learning*, ICML'20, vol. 119: 1597–607.

Chen, Zitao, Niranjhana Narayanan, Bo Fang, Guanpeng Li, Karthik Pattabiraman, and Nathan DeBardeleben. 2020. "TensorFI: A Flexible Fault Injection Framework for TensorFlow Applications." *2020 IEEE 31st International Symposium on Software Reliability Engineering (ISSRE)*, 426–35. https://doi.org/10.1109/issre5003.2020.00047.

Choquette, Jack. 2023. "NVIDIA Hopper H100 GPU: Scaling Performance." *IEEE Micro* 43 (3): 9–17. https://doi.org/10.1109/mm.2023.3256796.

Chouldechova, Alexandra. 2017. "Fair Prediction with Disparate Impact: A Study of Bias in Recidivism Prediction Instruments." *Big Data* 5 (2): 153–63. https://doi.org/10.1089/big.2016.0047.

Chowdhery, Aakanksha, Sharan Narang, Jacob Devlin, Maarten Bosma, Gaurav Mishra, Adam Roberts, Paul Barham, et al. 2022. "PaLM: Scaling Language Modeling with Pathways." *arXiv Preprint arXiv:2204.02311*.

Christiano, P. F., J. Leike, T. B. Brown, M. Martic, S. Legg, and D. Amodei. 2017. "Deep Reinforcement Learning from Human Preferences." In *Advances in Neural Information Processing Systems 30: Annual Conference on Neural Information Processing Systems 2017, December 4-9, 2017, Long Beach, CA, USA*, edited by Isabelle Guyon, Ulrike von Luxburg, Samy Bengio, Hanna M. Wallach, Rob Fergus, S. V. N. Vishwanathan, and Roman Garnett. Curran Associates.

Chung, Jae-Won, Yile Gu, Insu Jang, Luoxi Meng, Nikhil Bansal, and Mosharaf Chowdhury. 2023. "Reducing Energy Bloat in Large Model Training." *Proceedings of the ACM SIGOPS 30th Symposium on Operating Systems Principles* abs/2312.06902: 144–59. https://doi.org/10.1145/3694715.3695970.

Clos, C. 1953. "A Study of Non-Blocking Switching Networks." *Bell System Technical Journal* 32 (2): 406–24. https://doi.org/10.1002/j.1538-7305.1953.tb01433.x.

Cloud Native Computing Foundation. 2024. *Kubernetes: Production-Grade Container Orchestration*.

Cloudflare. 2019. *Details of the Cloudflare Outage on July 2, 2019*. Cloudflare incident report.

CNBC. 2023. *California DMV Suspends Cruise's Self-Driving Car Permits*. CNBC news article.

Coffman, Edward G., Michael Elphick, and Arie Shoshani. 1971. "System Deadlocks." *ACM Computing Surveys* 3 (2): 67–78. https://doi.org/10.1145/356586.356588.

Cohen, Jeremy, Elan Rosenfeld, and Zico Kolter. 2019. "Certified Adversarial Robustness via Randomized Smoothing." *International Conference on Machine Learning (ICML)*, Proceedings of machine learning research, vol. 97: 1310–20.

Constantinescu, C. 2008. "Intermittent Faults and Effects on Reliability of Integrated Circuits." *2008 Annual Reliability and Maintainability Symposium*, 370–74. https://doi.org/10.1109/rams.2008.4925824.

Cooper, Tom, Suzanne Fallender, Joyann Pafumi, Jon Dettling, Sebastien Humbert, and Lindsay Lessard. 2011. "A Semiconductor Company's Examination of Its Water Footprint Approach." *Proceedings of the 2011 IEEE International Symposium on Sustainable Systems and Technology*, 1–6. https://doi.org/10.1109/issst.2011.5936865.

Covington, Paul, Jay Adams, and Emre Sargin. 2016. "Deep Neural Networks for YouTube Recommendations." *Proceedings of the 10th ACM Conference on Recommender Systems*, 191–98. https://doi.org/10.1145/2959100.2959190.

Culler, David, Richard Karp, David Patterson, Abhijit Sahay, Klaus Erik Schauser, Eunice Santos, Ramesh Subramonian, and Thorsten von Eicken. 1993. "LogP: Towards a Realistic Model of Parallel Computation." *ACM SIGPLAN Notices* 28 (7): 1–12. https://doi.org/10.1145/173284.155333.

Cyberspace Administration of China, National Development and Reform Commission, Ministry of Education, Ministry of Science and Technology, Ministry of Industry and Information Technology, Ministry of Public Security, and National Radio and Television Administration. 2023. *Interim Measures for Administration of Generative Artificial Intelligence Services*. State Council Gazette.

Daly, J. T. 2006. "A Higher Order Estimate of the Optimum Checkpoint Interval for Restart Dumps." *Future Generation Computer Systems* 22 (3): 303–12. https://doi.org/10.1016/j.future.2004.11.016.

Dao, T., D. Y. Fu, S. Ermon, A. Rudra, and C. Ré. 2022. "FlashAttention: Fast and Memory-Efficient Exact Attention with IO-Awareness." *Advances in Neural Information Processing Systems (NeurIPS)* 35: 16344–59. https://doi.org/10.52202/068431-1189.

Dao, Tri. 2023. "FlashAttention-2: Faster Attention with Better Parallelism and Work Partitioning." *arXiv Preprint arXiv:2307.08691*.

Dastin, Jeffrey. 2018. "Amazon Scraps Secret AI Recruiting Tool That Showed Bias Against Women." *Reuters*.

Databricks. 2026. *Mosaic Streaming: Main Concepts*. Databricks Mosaic AI Training Documentation.

Dayarathna, Miyuru, Yonggang Wen, and Rui Fan. 2016. "Data Center Energy Consumption Modeling: A Survey." *IEEE Communications Surveys & Tutorials* 18 (1): 732–94. https://doi.org/10.1109/comst.2015.2481183.

De, Soham, Leonard Berrada, Jamie Hayes, Samuel L. Smith, and Borja Balle. 2022. "Unlocking High-Accuracy Differentially Private Image Classification Through Scale." *arXiv Preprint arXiv:2204.13650*.

Dean, Jeff. 2024. *Exciting Directions in Systems for Machine Learning*. MLSys 2024 invited talk.

Dean, Jeffrey, and Luiz André Barroso. 2013a. "The Tail at Scale." *Communications of the ACM* 56 (2): 74–80. https://doi.org/10.1145/2408776.2408794.

Dean, Jeffrey, and Luiz André Barroso. 2013b. "The Tail at Scale." *Communications of the ACM* 56 (2): 74–80.

Dean, Jeffrey, Greg Corrado, Rajat Monga, Kai Chen, Matthieu Devin, Quoc V. Le, Mark Z. Mao, et al. 2012. "Large Scale Distributed Deep Networks." In *Advances in Neural Information Processing Systems (NeurIPS)*, edited by Peter L. Bartlett, Fernando C. N. Pereira, Christopher J. C. Burges, Léon Bottou, and Kilian Q. Weinberger, vol. 25. Curran Associates.

Dean, Jeffrey, and Sanjay Ghemawat. 2004. "MapReduce: Simplified Data Processing on Large Clusters." *Proceedings of the 6th Symposium on Operating Systems Design and Implementation (OSDI)*, 137–50.

DeepSpeed Developers. 2026a. *DeepSpeed Model Checkpointing*. DeepSpeed documentation.

DeepSpeed Developers. 2026b. *DeepSpeed Universal Checkpointing with DeepSpeed: A Practical Guide*. DeepSpeed tutorial.

Dell Technologies. 2026. *Data Center Power and Cooling Solutions*.

Dennard, Robert H., Frank H. Gaensslen, Hwa-Nien Yu, Victor L. Rideout, Elias Bassous, and Antoine R. LeBlanc. 1974. "Design of Ion-Implanted MOSFET's with Very Small Physical Dimensions." *IEEE J. Solid-State Circuits* 9 (5): 256–68. https://doi.org/10.1109/jssc.1974.1050511.

Department for Education, and Ofqual. 2020. *GCSE and A Level Students to Receive Centre Assessment Grades*. GOV.UK News Story.

Dettmers, Tim, Mike Lewis, Younes Belkada, and Luke Zettlemoyer. 2022. "LLM.int8(): 8-Bit Matrix Multiplication for Transformers at Scale." *Advances in Neural Information Processing Systems (NeurIPS)*, 30318–32. https://doi.org/10.52202/068431-2198.

Devlin, Jacob, Ming-Wei Chang, Kenton Lee, and Kristina Toutanova. 2019. "BERT: Pre-Training of Deep Bidirectional Transformers for Language Understanding." *Proceedings of the 2019 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies*, 4171–86. https://doi.org/10.18653/v1/n19-1423.

Dixit, H. D., S. Pendharkar, M. Beadon, C. Mason, T. Chakravarthy, B. Muthiah, and S. Sankar. 2021. *Silent Data Corruptions at Scale*. arXiv preprint arXiv:2102.11245.

Dodge, Jesse, Taylor Prewitt, Remi Tachet des Combes, Erika Odmark, Roy Schwartz, Emma Strubell, Alexandra Sasha Luccioni, Noah A. Smith, Nicole DeCario, and Will Buchanan. 2022. "Measuring the Carbon Intensity of AI in Cloud Instances." *2022 ACM Conference on Fairness Accountability and Transparency*, 1877–94. https://doi.org/10.1145/3531146.3533234.

Du, Nan, Yanping Huang, Andrew M. Dai, Simon Tong, Dmitry Lepikhin, Yuanzhong Xu, Maxim Krikun, et al. 2022. "GLaM: Efficient Scaling of Language Models with Mixture-of-Experts." In *International Conference on Machine Learning (ICML)*, edited by Kamalika Chaudhuri, Stefanie Jegelka, Le Song, Csaba Szepesvari, Gang Niu, and Sivan Sabato, vol. 162. Proceedings of Machine Learning Research. PMLR.

Dubey, Abhimanyu, Abhinav Jauhri, Abhinav Pandey, Abhishek Kadian, et al. 2024. *The Llama 3 Herd of Models*. arXiv preprint arXiv:2407.21783.

Dutta, Sanghamitra, Gauri Joshi, Soumyadip Ghosh, Parijat Dube, and Priya Nagpurkar. 2018. "Slow and Stale Gradients Can Win the Race: Error-Runtime Trade-Offs in Distributed SGD." *Proceedings of the Twenty-First International Conference on Artificial Intelligence and Statistics* 84: 803–12.

Dwork, Cynthia, Moritz Hardt, Toniann Pitassi, Omer Reingold, and Richard Zemel. 2012. "Fairness Through Awareness." *Proceedings of the 3rd Innovations in Theoretical Computer Science Conference*, 214–26. https://doi.org/10.1145/2090236.2090255.

Dwork, Cynthia, Frank McSherry, Kobbi Nissim, and Adam Smith. 2006. "Calibrating Noise to Sensitivity in Private Data Analysis." In *Theory of Cryptography Conference (TCC)*, edited by Shai Halevi and Tal Rabin, vol. 3876. Lecture Notes in Computer Science. Springer Berlin Heidelberg. https://doi.org/10.1007/11681878_14.

Dwork, Cynthia, and Aaron Roth. 2014. "The Algorithmic Foundations of Differential Privacy." *Foundations and Trends® in Theoretical Computer Science*, Foundations and trends in theoretical computer science, vol. 9 (3-4): 211–487. https://doi.org/10.1561/0400000042.

Ebrahimi, K., G. F. Jones, and A. S. Fleischer. 2014. "A Review of Data Center Cooling Technology, Operating Conditions and the Corresponding Low-Grade Waste Heat Recovery Opportunities." *Renewable and Sustainable Energy Reviews* 31: 622–38. https://doi.org/10.1016/j.rser.2013.12.007.

Eckles, Dean, Brian Karrer, and Johan Ugander. 2017. "Design and Analysis of Experiments in Networks: Reducing Bias from Interference." *Journal of Causal Inference* 5 (1): 1–23. https://doi.org/10.1515/jci-2015-0021.

Elnozahy, Elmootazbellah N., Lorenzo Alvisi, Yi-Min Wang, and David B. Johnson. 2002. "A Survey of Rollback-Recovery Protocols in Message-Passing Systems." *ACM Computing Surveys* 34 (3): 375–408. https://doi.org/10.1145/568522.568525.

Elsken, Thomas, Jan Hendrik Metzen, and Frank Hutter. 2019. "Neural Architecture Search." In *The Springer Series on Challenges in Machine Learning*, vol. 20. Springer International Publishing. https://doi.org/10.1007/978-3-030-05318-5_3.

Engineering, M. 2016. *Introducing FBLearner Flow: Facebook's AI Backbone*. Engineering at Meta Blog.

Engineering, S. 2019. *The Winding Road to Better Machine Learning Infrastructure Through TensorFlow Extended and Kubeflow*. Spotify Engineering Blog.

Environment and Climate Change Canada. 2026. *Emission Factors and Reference Values*.

Environmental Management—Water Footprint—Principles, Requirements and Guidelines, Pub. L. Nos. ISO 14046:2014 (2014).

Epoch AI. 2026. *Notable AI Models*.

Erlang, Agner Krarup. 1909. "The Theory of Probabilities and Telephone Conversations." *Nyt Tidsskrift for Matematik B* 20: 33–39.

Ethernet Alliance. 2025. *2025 Ethernet Roadmap*. Ethernet Alliance roadmap.

European Data Protection Board. 2018. *Guidelines on Automated Individual Decision-Making and Profiling for the Purposes of Regulation 2016/679*.

European Parliament and Council of the European Union. 2024. *Regulation (EU) 2024/1689 of the European Parliament and of the Council of 13 June 2024 Laying down Harmonised Rules on Artificial Intelligence (AI Act)*. Official Journal of the European Union, L 2024/1689.

European Parliament, and Council of the European Union. 2016. *Regulation (EU) 2016/679 of the European Parliament and of the Council of 27 April 2016*. Official Journal of the European Union.

Evans, Richard, and Jim Gao. 2016. *DeepMind AI Reduces Google Data Centre Cooling Bill by 40%*. DeepMind Blog.

Executive Office of the President. 2023. *Safe, Secure, and Trustworthy Development and Use of Artificial Intelligence*. Executive Order 14110, 88 FR 75191.

Executive Office of the President. 2025a. *Initial Rescissions of Harmful Executive Orders and Actions*. Executive Order 14148, 90 FR 8237.

Executive Office of the President. 2025b. *Removing Barriers to American Leadership in Artificial Intelligence*. Executive Order 14179.

Executive Office of the President. 2026. *Promoting Advanced Artificial Intelligence Innovation and Security*. Executive Order 14409, 91 FR 34565.

Eykholt, Kevin, Ivan Evtimov, Earlence Fernandes, Bo Li, Amir Rahmati, Chaowei Xiao, Atul Prakash, Tadayoshi Kohno, and Dawn Song. 2017. "Robust Physical-World Attacks on Deep Learning Models." *ArXiv Preprint* abs/1707.08945 (July).

Eykholt, K., I. Evtimov, E. Fernandes, B. Li, A. Rahmati, C. Xiao, A. Prakash, T. Kohno, and D. Song. 2018. "Robust Physical-World Attacks on Deep Learning Visual Classification." *2018 IEEE/CVF Conference on Computer Vision and Pattern Recognition* 1707.08945: 1625–34. https://doi.org/10.1109/cvpr.2018.00175.

Farwell, J. P., and R. Rohozinski. 2011. "Stuxnet and the Future of Cyber War." *Survival* 53 (1): 23–40. https://doi.org/10.1080/00396338.2011.555586.

Federal Aviation Administration. 2015. *Airworthiness Directive: Boeing 787 Generator Control Units Failsafe Reset*. FAA Airworthiness Directive 2015-10066.

Federal Trade Commission. 2021. *Nixing the Fix: An FTC Report to Congress on Repair Restrictions*. Federal Trade Commission.

Fedus, William, Barret Zoph, and Noam Shazeer. 2022. "Switch Transformers: Scaling to Trillion Parameter Models with Simple and Efficient Sparsity." *Journal of Machine Learning Research* 23 (120): 1–39.

Feldman, M., S. A. Friedler, J. Moeller, C. Scheidegger, and S. Venkatasubramanian. 2015. "Certifying and Removing Disparate Impact." *Proceedings of the 21th ACM SIGKDD International Conference on Knowledge Discovery and Data Mining*, 259–68. https://doi.org/10.1145/2783258.2783311.

Finn, Chelsea, Pieter Abbeel, and Sergey Levine. 2017. "Model-Agnostic Meta-Learning for Fast Adaptation of Deep Networks." *Proceedings of the 34th International Conference on Machine Learning (ICML)*.

Forti, V., C. P. Baldé, R. Kuehr, and G. Bel. 2020. *The Global e-Waste Monitor 2020: Quantities, Flows and the Circular Economy Potential*. United Nations University/United Nations Institute for Training and Research; International Telecommunication Union; International Solid Waste Association.

Frantar, Elias, Saleh Ashkboos, Torsten Hoefler, and Dan Alistarh. 2023. "GPTQ: Accurate Post-Training Quantization for Generative Pre-Trained Transformers." In *CoRR*, abs/2210.17323. https://doi.org/10.48550/ARXIV.2210.17323.

Fredrikson, Matt, Somesh Jha, and Thomas Ristenpart. 2015. "Model Inversion Attacks That Exploit Confidence Information and Basic Countermeasures." *Proceedings of the 22nd ACM SIGSAC Conference on Computer and Communications Security*, 1322–33. https://doi.org/10.1145/2810103.2813677.

Friedman, B. 1996. "Value-Sensitive Design." *Interactions* 3 (6): 16–23. https://doi.org/10.1145/242485.242493.

Gal, Yarin, and Zoubin Ghahramani. 2016. "Dropout as a Bayesian Approximation: Representing Model Uncertainty in Deep Learning." *Proceedings of the 33rd International Conference on Machine Learning (ICML)* 48: 1050–59.

Gama, João, Indrė Žliobaitė, Albert Bifet, Mykola Pechenizkiy, and Abdelhamid Bouchachia. 2014. "A Survey on Concept Drift Adaptation." *ACM Computing Surveys* 46 (4): 1–37. https://doi.org/10.1145/2523813.

Gandolfi, Karine, Christophe Mourtel, and Francis Olivier. 2001. "Electromagnetic Analysis: Concrete Results." In *Cryptographic Hardware and Embedded Systems — CHES 2001*. Springer Berlin Heidelberg. https://doi.org/10.1007/3-540-44709-1_21.

Gangidi, Adi, Rui Miao, Sandeep Hebbani, Gaya Nagarajan, Omar Baldonado, Lixin Gao, Hany Morsy Goes, et al. 2024. "RDMA over Ethernet for Distributed AI Training at Meta Scale." *Proceedings of the ACM SIGCOMM 2024 Conference*, 56–69. https://doi.org/10.1145/3651890.3672233.

Gao, J. 2014. *Machine Learning Applications for Data Center Optimization*. Google; Google White Paper.

Gao, Y., S. F. Al-Sarawi, and D. Abbott. 2020. "Physical Unclonable Functions." *Nature Electronics* 3 (2): 81–91. https://doi.org/10.1038/s41928-020-0372-5.

Gassend, Blaise, Dwaine Clarke, Marten van Dijk, and Srinivas Devadas. 2002. "Silicon Physical Random Functions." *Proceedings of the 9th ACM Conference on Computer and Communications Security*, 148–60. https://doi.org/10.1145/586110.586132.

Gebru, Timnit, Jamie Morgenstern, Briana Vecchione, Jennifer Wortman Vaughan, Hanna Wallach, Hal Daumé III, and Kate Crawford. 2021. "Datasheets for Datasets." *Communications of the ACM* 64 (12): 86–92. https://doi.org/10.1145/3458723.

Geiger, Atticus, Hanson Lu, Thomas Icard, and Christopher Potts. 2021. "Causal Abstractions of Neural Networks." In *Advances in Neural Information Processing Systems 34: Annual Conference on Neural Information Processing Systems 2021, NeurIPS 2021, December 6-14, 2021, Virtual*, edited by Marc'Aurelio Ranzato, Alina Beygelzimer, Yann N. Dauphin, Percy Liang, and Jennifer Wortman Vaughan. Curran Associates.

Genkin, Daniel, Adi Shamir, and Eran Tromer. 2017. "Acoustic Cryptanalysis." *Journal of Cryptology* 30: 392–443. https://doi.org/10.1007/s00145-015-9224-2.

Gentry, C. 2009. "Fully Homomorphic Encryption Using Ideal Lattices." *Proceedings of the Forty-First Annual ACM Symposium on Theory of Computing*, 169–78. https://doi.org/10.1145/1536414.1536440.

Ghodsi, Ali, Matei Zaharia, Benjamin Hindman, Andy Konwinski, Scott Shenker, and Ion Stoica. 2011. "Dominant Resource Fairness: Fair Allocation of Multiple Resource Types." *8th USENIX Symposium on Networked Systems Design and Implementation (NSDI 11)*, 323–36.

Gholami, Amir, Sehoon Kim, Zhen Dong, Zhewei Yao, Michael W. Mahoney, and Kurt Keutzer. 2022. "A Survey of Quantization Methods for Efficient Neural Network Inference." In *Low-Power Computer Vision: Improve the Efficiency of Artificial Intelligence*. Chapman; Hall/CRC. https://doi.org/10.1201/9781003162810-13.

Gibiansky, A. 2017. *Bringing HPC Techniques to Deep Learning*. Baidu Research Technical Blog.

Gilbert, Seth, and Nancy Lynch. 2002. "Brewer's Conjecture and the Feasibility of Consistent, Available, Partition-Tolerant Web Services." *ACM SIGACT News* 33 (2): 51–59. https://doi.org/10.1145/564585.564601.

GitLab. 2017. *Postmortem of Database Outage of January 31*. GitLab postmortem.

Gnad, D. R. E., F. Oboril, and M. B. Tahoori. 2017. "Voltage Drop-Based Fault Attacks on FPGAs Using Valid Bitstreams." *2017 27th International Conference on Field Programmable Logic and Applications (FPL)*, 1–7. https://doi.org/10.23919/fpl.2017.8056840.

Goldberg, David. 1991. "What Every Computer Scientist Should Know about Floating-Point Arithmetic." *ACM Computing Surveys* 23 (1): 5–48. https://doi.org/10.1145/103162.103163.

Gomez-Uribe, Carlos A., and Neil Hunt. 2015. "The Netflix Recommender System: Algorithms, Business Value, and Innovation." *ACM Transactions on Management Information Systems* 6 (4): 1–19. https://doi.org/10.1145/2843948.

Goncalves, A., P. Ray, B. Soper, J. Stevens, L. Coyle, and A. P. Sales. 2020. "Generation and Evaluation of Synthetic Patient Data." *BMC Medical Research Methodology* 20 (1): 1–40. https://doi.org/10.1186/s12874-020-00977-1.

Goodfellow, I. J., J. Shlens, and C. Szegedy. 2015. "Explaining and Harnessing Adversarial Examples." *International Conference on Learning Representations (ICLR)*.

Goodfellow, Ian, Yoshua Bengio, and Aaron Courville. 2016. *Deep Learning*. MIT Press.

Google. 2024. *ShieldGemma: Generative AI Content Moderation Based on Gemma*. Google AI for Developers documentation.

Google Cloud. 2026a. *About Cloud Storage Objects*. Google Cloud Documentation.

Google Cloud. 2026b. *TPU v6e*.

Government of Ireland. 2022. *Government Statement on the Role of Data Centres in Ireland's Enterprise Strategy*. Government policy statement.

Goyal, Priya, Piotr Dollár, Ross Girshick, Pieter Noordhuis, Lukasz Wesolowski, Aapo Kyrola, Andrew Tulloch, Yangqing Jia, and Kaiming He. 2017. "Accurate, Large Minibatch SGD: Training ImageNet in 1 Hour." *arXiv Preprint arXiv:1706.02677* abs/1706.02677.

Gräfe, Ralf, Qutub Syed Sha, Florian Geissler, and Michael Paulitsch. 2023. "Large-Scale Application of Fault Injection into PyTorch Models -an Extension to PyTorchFI for Validation Efficiency." *2023 53rd Annual IEEE/IFIP International Conference on Dependable Systems and Networks - Supplemental Volume (DSN-s)*, 56–62. https://doi.org/10.1109/dsn-s58398.2023.00025.

Graham, R. L., D. Bureddy, P. Lui, H. Rober, G. Bloch, G. Shainer, J. Poole, et al. 2020. "Scalable Hierarchical Aggregation and Reduction Protocol (SHARP) Streaming-Aggregation Hardware Design and Evaluation." *International Conference on High Performance Computing*, 41–59. https://doi.org/10.1007/978-3-030-50743-5_3.

Gray, J. N. 1978. "Notes on Data Base Operating Systems." In *Operating Systems: An Advanced Course*. Springer Berlin Heidelberg. https://doi.org/10.1007/3-540-08755-9_9.

Gray, Jim. 1986. "Why Do Computers Stop and What Can Be Done about It?" *Proceedings of the 5th Symposium on Reliability in Distributed Software and Database Systems*, 3–12.

Greshake, Kai, Sahar Abdelnabi, Shailesh Mishra, Christoph Endres, Thorsten Holz, and Mario Fritz. 2023. "Not What You've Signed up for: Compromising Real-World LLM-Integrated Applications with Indirect Prompt Injection." *Proceedings of the 16th ACM Workshop on Artificial Intelligence and Security*, 79–90. https://doi.org/10.1145/3605764.3623985.

Grossman, E. 2007. *High Tech Trash: Digital Devices, Hidden Toxics, and Human Health*. Island press.

Gu, J., M. Chowdhury, K. G. Shin, Y. Zhu, M. Jeon, J. Qian, H. H. Liu, and C. Guo. 2019. "Tiresias: A GPU Cluster Manager for Distributed Deep Learning." *Proceedings of the 16th USENIX Symposium on Networked Systems Design and Implementation (NSDI '19)*, 485–500.

Gu, Tianyu, Brendan Dolan-Gavitt, and Siddharth Garg. 2017. "BadNets: Identifying Vulnerabilities in the Machine Learning Model Supply Chain." *arXiv Preprint arXiv:1708.06733*.

Guo, Chuan, Geoff Pleiss, Yu Sun, and Kilian Q. Weinberger. 2017. "On Calibration of Modern Neural Networks." *International Conference on Machine Learning (ICML)* 70: 1321–30.

Guo, Chuanxiong, Haitao Wu, Zhong Deng, Gaurav Soni, Jianxi Ye, Jitendra Padhye, and Marina Lipshteyn. 2016. "RDMA over Commodity Ethernet at Scale." *Proceedings of the 2016 ACM SIGCOMM Conference*, 202–15. https://doi.org/10.1145/2934872.2934908.

Gupta, Maanak, Charankumar Akiri, Kshitiz Aryal, Eli Parker, and Lopamudra Praharaj. 2023. "From ChatGPT to ThreatGPT: Impact of Generative AI in Cybersecurity and Privacy." *IEEE Access* 11: 80218–45. https://doi.org/10.1109/access.2023.3300381.

Gupta, Udit, Young Geun Kim, Sylvia Lee, Jordan Tse, Hsien-Hsin S Lee, Gu-Yeon Wei, David Brooks, and Carole-Jean Wu. 2022. "Chasing Carbon: The Elusive Environmental Footprint of Computing." *IEEE Micro* 42 (4): 37–47. https://doi.org/10.1109/MM.2022.3163226.

Gupta, Udit, Carole-Jean Wu, Xiaodong Wang, Maxim Naumov, Brandon Reagen, David Brooks, Bradford Cottel, et al. 2020. "The Architectural Implications of Facebook's DNN-Based Personalized Recommendation." *2020 IEEE International Symposium on High Performance Computer Architecture (HPCA)*, 488–501. https://doi.org/10.1109/HPCA47549.2020.00047.

Gustafson, John L. 1988. "Reevaluating Amdahl's Law." *Communications of the ACM* 31 (5): 532–33. https://doi.org/10.1145/42411.42415.

Hamming, R. W. 1950. "Error Detecting and Error Correcting Codes." *Bell System Technical Journal* 29 (2): 147–60. https://doi.org/10.1002/j.1538-7305.1950.tb00463.x.

Han, Song, Jeff Pool, John Tran, and William J. Dally. 2015. "Learning Both Weights and Connections for Efficient Neural Networks." *Advances in Neural Information Processing Systems 28 (NeurIPS 2015)*, 1135–43.

Hard, Andrew, Kanishka Rao, Rajiv Mathews, Swaroop Ramaswamy, Françoise Beaufays, Sean Augenstein, Hubert Eichner, Chloé Kiddon, and Daniel Ramage. 2018. "Federated Learning for Mobile Keyboard Prediction." *arXiv Preprint arXiv:1811.03604*.

Hardt, Moritz, Eric Price, and Nathan Srebro. 2016. "Equality of Opportunity in Supervised Learning." *Advances in Neural Information Processing Systems (NeurIPS)* 29: 3315–23.

Hayes, T. L., K. Kafle, R. Shrestha, M. Acharya, and C. Kanan. 2020. "REMIND Your Neural Network to Prevent Catastrophic Forgetting." In *Computer Vision – ECCV 2020*. Springer. https://doi.org/10.1007/978-3-030-58598-3_28.

Hazelwood, Kim, Sarah Bird, David Brooks, Soumith Chintala, Utku Diril, Dmytro Dzhulgakov, Mohamed Fawzy, et al. 2018. "Applied Machine Learning at Facebook: A Datacenter Infrastructure Perspective." *2018 IEEE International Symposium on High Performance Computer Architecture (HPCA)*, 620–29. https://doi.org/10.1109/hpca.2018.00059.

He, Kaiming, Xiangyu Zhang, Shaoqing Ren, and Jian Sun. 2016. "Deep Residual Learning for Image Recognition." *2016 IEEE Conference on Computer Vision and Pattern Recognition (CVPR)*, 770–78. https://doi.org/10.1109/cvpr.2016.90.

He, K., X. Chen, S. Xie, Y. Li, P. Dollár, and R. Girshick. 2021. "Masked Autoencoders Are Scalable Vision Learners." *2022 IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)* 18: 15979–88. https://doi.org/10.1109/cvpr52688.2022.01553.

He, Yi, Prasanna Balaprakash, and Yanjing Li. 2020. "FIdelity: Efficient Resilience Analysis Framework for Deep Learning Accelerators." *2020 53rd Annual IEEE/ACM International Symposium on Microarchitecture (MICRO)*, 270–81. https://doi.org/10.1109/micro50266.2020.00033.

He, Yi, Mike Hutton, Steven Chan, Robert De Gruijl, Rama Govindaraju, Nishant Patil, and Yanjing Li. 2023. "Understanding and Mitigating Hardware Failures in Deep Learning Training Systems." *Proceedings of the 50th Annual International Symposium on Computer Architecture*, 1–16. https://doi.org/10.1145/3579371.3589105.

Hébert-Johnson, U., M. P. Kim, O. Reingold, and G. N. Rothblum. 2018. "Multicalibration: Calibration for the (Computationally-Identifiable) Masses." In *Proceedings of the 35th International Conference on Machine Learning, ICML 2018, Stockholmsmässan, Stockholm, Sweden, July 10-15, 2018*, edited by Jennifer G. Dy and Andreas Krause, vol. 80. Proceedings of Machine Learning Research. PMLR.

Henderson, Peter, Jieru Hu, Joshua Romoff, Emma Brunskill, Dan Jurafsky, and Joelle Pineau. 2020. "Towards the Systematic Reporting of the Energy and Carbon Footprints of Machine Learning." *CoRR* abs/2002.05651 (248): 1–43. https://doi.org/10.48550/arxiv.2002.05651.

Hendrycks, Dan, and Thomas Dietterich. 2019. "Benchmarking Neural Network Robustness to Common Corruptions and Perturbations." *arXiv Preprint arXiv:1903.12261*.

Hendrycks, Dan, and Kevin Gimpel. 2017. "A Baseline for Detecting Misclassified and Out-of-Distribution Examples in Neural Networks." *International Conference on Learning Representations (ICLR)*.

Hennessy, J. L., and D. A. Patterson. 2011. *Computer Architecture: A Quantitative Approach*. Morgan Kaufmann.

Hennessy, John L., and David A. Patterson. 2017. *Computer Architecture: A Quantitative Approach*. 6th ed. Morgan Kaufmann.

Hennessy, John L., and David A. Patterson. 2019. "A New Golden Age for Computer Architecture." *Communications of the ACM* 62 (2): 48–60. https://doi.org/10.1145/3282307.

Hermann, Jeremy, and Mike Del Balso. 2017. *Meet Michelangelo: Uber's Machine Learning Platform*. Uber Engineering Blog.

Himmelstein, Gracie, David Bates, and Li Zhou. 2022. "Examination of Stigmatizing Language in the Electronic Health Record." *JAMA Network Open* 5 (1): e2144967. https://doi.org/10.1001/jamanetworkopen.2021.44967.

Hindman, Benjamin, Andy Konwinski, Matei Zaharia, Ali Ghodsi, Anthony D. Joseph, Randy Katz, Scott Shenker, and Ion Stoica. 2011. "Mesos: A Platform for Fine-Grained Resource Sharing in the Data Center." *8th USENIX Symposium on Networked Systems Design and Implementation (NSDI 11)*, 295–308.

Hinton, G. E., N. Srivastava, A. Krizhevsky, I. Sutskever, and R. R. Salakhutdinov. 2012. "Improving Neural Networks by Preventing Co-Adaptation of Feature Detectors." *arXiv Preprint arXiv:1207.0580*.

Hinton, Geoffrey, Oriol Vinyals, and Jeff Dean. 2015. "Distilling the Knowledge in a Neural Network." *arXiv Preprint*.

Ho, Qirong, James Cipar, Henggang Cui, Seunghak Lee, Jin Kyu Kim, Phillip B. Gibbons, Garth A. Gibson, Greg Ganger, and Eric P. Xing. 2013. "More Effective Distributed ML via a Stale Synchronous Parallel Parameter Server." *Advances in Neural Information Processing Systems (NeurIPS)* 26.

Hochschild, Peter H., Paul Turner, Jeffrey C. Mogul, Rama Govindaraju, Parthasarathy Ranganathan, David E. Culler, and Amin Vahdat. 2021. "Cores That Don't Count." *Proceedings of the Workshop on Hot Topics in Operating Systems*, 9–16. https://doi.org/10.1145/3458336.3465297.

Hockney, Roger W. 1994. "The Communication Challenge for MPP: Intel Paragon and Meiko CS-2." *Parallel Computing* 20 (3): 389–98. https://doi.org/10.1016/s0167-8191(06)80021-9.

Hoffmann, Jordan, Sebastian Borgeaud, Arthur Mensch, Elena Buchatskaya, Trevor Cai, Eliza Rutherford, Diego de Las Casas, et al. 2022. "Training Compute-Optimal Large Language Models." *Advances in Neural Information Processing Systems (NeurIPS)* 35: 30016–30. https://doi.org/10.52202/068431-2176.

Horovod Developers. 2026. *Elastic Horovod*. Horovod documentation.

Horowitz, Mark. 2014. "1.1 Computing's Energy Problem (and What We Can Do about It)." *2014 IEEE International Solid-State Circuits Conference Digest of Technical Papers (ISSCC)*, 10–14. https://doi.org/10.1109/isscc.2014.6757323.

Hosseini, Hossein, Sreeram Kannan, Baosen Zhang, and Radha Poovendran. 2017. "Deceiving Google's Perspective API Built for Detecting Toxic Comments." *arXiv Preprint arXiv:1702.08138*, ahead of print. https://doi.org/10.48550/arXiv.1702.08138.

Houlsby, Neil, Andrei Giurgiu, Stanislaw Jastrzebski, Bruna Morrone, Quentin de Laroussilhe, Andrea Gesmundo, Mohammad Attariyan, and Sylvain Gelly. 2019. "Parameter-Efficient Transfer Learning for NLP." *Proceedings of the 36th International Conference on Machine Learning (ICML)*, Proceedings of machine learning research, vol. 97: 2790–99.

Howard, A. G., M. Zhu, B. Chen, D. Kalenichenko, W. Wang, T. Weyand, M. Andreetto, and H. Adam. 2017. "MobileNets: Efficient Convolutional Neural Networks for Mobile Vision Applications." *CoRR* abs/1704.04861.

Hsiao, Yu-Shun, Zishen Wan, Tianyu Jia, Radhika Ghosal, Abdulrahman Mahmoud, Arijit Raychowdhury, David Brooks, Gu-Yeon Wei, and Vijay Janapa Reddi. 2023. "MAVFI: An End-to-End Fault Analysis Framework with Anomaly Detection and Recovery for Micro Aerial Vehicles." *2023 Design, Automation & Test in Europe Conference & Exhibition (DATE)*, 1–6. https://doi.org/10.23919/date56975.2023.10137246.

Hsu, Liang-Ching, Ching-Yi Huang, Yen-Hsun Chuang, Ho-Wen Chen, Ya-Ting Chan, Heng Yi Teah, Tsan-Yao Chen, Chiung-Fen Chang, Yu-Ting Liu, and Yu-Min Tzou. 2016. "Accumulation of Heavy Metals and Trace Elements in Fluvial Sediments Received Effluents from Traditional and Semiconductor Industries." *Scientific Reports* 6 (1): 34250. https://doi.org/10.1038/srep34250.

Hu, Edward J., Yelong Shen, Phillip Wallis, Zeyuan Allen-Zhu, Yuanzhi Li, Shean Wang, Lu Wang, and Weizhu Chen. 2021. "LoRA: Low-Rank Adaptation of Large Language Models." *arXiv Preprint arXiv:2106.09685*.

Huang, Cheng, Huseyin Simitci, Yikang Xu, Aaron Ogus, Brad Calder, Parikshit Gopalan, Jin Li, and Sergey Yekhanin. 2012. "Erasure Coding in Windows Azure Storage." *2012 USENIX Annual Technical Conference (USENIX ATC 12)*, 15–26.

Huang, Y., Y. Cheng, A. Bapna, O. Firat, D. Chen, M. X. Chen, H. Lee, et al. 2019. "GPipe: Efficient Training of Giant Neural Networks Using Pipeline Parallelism." *Advances in Neural Information Processing Systems (NeurIPS)* 32: 103–12.

Hudgens, Michael G., and M. Elizabeth Halloran. 2008. "Toward Causal Inference with Interference." *Journal of the American Statistical Association* 103 (482): 832–42. https://doi.org/10.1198/016214508000000292.

Hugging Face. 2026. *Safetensors Documentation*.

Hutter, Michael, Jorn-Marc Schmidt, and Thomas Plos. 2009. "Contact-Based Fault Injections and Power Analysis on RFID Tags." *2009 European Conference on Circuit Theory and Design*, 409–12. https://doi.org/10.1109/ecctd.2009.5275012.

Hwang, Changho, Wei Cui, Yifan Xiong, Ziyue Yang, Ze Liu, Han Hu, Zilong Wang, et al. 2023. "Tutel: Adaptive Mixture-of-Experts at Scale." *Proceedings of Machine Learning and Systems (MLSys)* 5.

Iandola, Forrest N., Song Han, Matthew W. Moskewicz, Khalid Ashraf, William J. Dally, and Kurt Keutzer. 2016. "SqueezeNet: AlexNet-Level Accuracy with 50x Fewer Parameters and <0.5MB Model Size." *ArXiv Preprint* abs/1602.07360.

IEEE 802.1 Working Group. 2018. *IEEE Standard for Local and Metropolitan Area Networks—Secure Device Identity*. IEEE Std 802.1AR-2018.

IEEE Standards Association. 2019. *IEEE 754-2019: Standard for Floating-Point Arithmetic*. https://doi.org/10.1109/IEEESTD.2019.8766229.

Illinois General Assembly. 2020. *Artificial Intelligence Video Interview Act (Public Act 101-0260)*. 820 ILCS 42, effective January 1, 2020.

Inan, H., K. Upasani, J. Chi, R. Rungta, K. Iyer, Y. Mao, M. Tontchev, et al. 2023. "Llama Guard: LLM-Based Input-Output Safeguard for Human-AI Conversations." *arXiv Preprint arXiv:2312.06674*.

InfiniBand Trade Association. 2000. *InfiniBand Architecture Specification Volume 1*. InfiniBand Trade Association.

International Energy Agency. 2023. *World Energy Outlook 2023*. IEA. https://doi.org/10.1787/827374a6-en.

International Energy Agency. 2024a. *Data Centre Electricity Demand Estimates as a Share of Total Electricity Demand in Ireland and Virginia, 2023*. IEA chart.

International Energy Agency. 2024b. *Emissions Factors 2024*.

International Organization for Standardization. 2006a. *ISO 14040:2006 Environmental Management – Life Cycle Assessment – Principles and Framework*. ISO standard.

International Organization for Standardization. 2006b. *ISO 14044:2006 Environmental Management – Life Cycle Assessment – Requirements and Guidelines*. ISO standard.

International Organization for Standardization, and International Electrotechnical Commission. 2023a. *ISO/IEC 23894:2023 Information Technology – Artificial Intelligence – Guidance on Risk Management*. ISO/IEC standard.

International Organization for Standardization, and International Electrotechnical Commission. 2023b. *ISO/IEC 42001:2023 Information Technology – Artificial Intelligence – Management System*. ISO/IEC standard.

Irimia-Vladu, M. 2014. "'Green' Electronics: Biodegradable and Biocompatible Materials and Devices for Sustainable Future." *Chemical Society Reviews* 43 (2): 588–610. https://doi.org/10.1039/c3cs60235d.

Jacob, Benoit, Skirmantas Kligys, Bo Chen, Menglong Zhu, Matthew Tang, Andrew Howard, Hartwig Adam, and Dmitry Kalenichenko. 2018. "Quantization and Training of Neural Networks for Efficient Integer-Arithmetic-Only Inference." *2018 IEEE/CVF Conference on Computer Vision and Pattern Recognition*, 2704–13. https://doi.org/10.1109/cvpr.2018.00286.

Jacobs, Sam Ade, Masahiro Tanaka, Chengming Zhang, Minjia Guo, Shuaiwen Zhu, Shuai Song, Samyam Rajbhandari, Ammar Ahmad Awan, Connor Zheng, and Yuxiong He. 2023. "DeepSpeed Ulysses: System Optimizations for Enabling Training of Extreme Long Sequence Transformer Models." *arXiv Preprint arXiv:2309.14509*.

Jagielski, Matthew, Giorgio Severi, Niklas Pousette Harger, and Alina Oprea. 2021. "Subpopulation Data Poisoning Attacks." *Proceedings of the 2021 ACM SIGSAC Conference on Computer and Communications Security*, 3104–22. https://doi.org/10.1145/3460120.3485368.

Jain, R. 1991. *The Art of Computer Systems Performance Analysis: Techniques for Experimental Design, Measurement, Simulation, and Modeling*. John Wiley & Sons.

Janardhan, Santosh. 2021. *More Details about the October 4 Outage*. Meta Engineering postmortem.

Jeaugey, Sylvain. 2017. *NCCL 2.0*. GPU Technology Conference presentation.

Jeon, Myeongjae, Shivaram Venkataraman, Amar Phanishayee, Junjie Qian, Wencong Xiao, and Fan Yang. 2019. "Analysis of Large-Scale Multi-Tenant GPU Clusters for DNN Training Workloads." *2019 USENIX Annual Technical Conference (USENIX ATC 19)*, 947–60.

Jevons, William Stanley. 1865. *The Coal Question: An Inquiry Concerning the Progress of the Nation, and the Probable Exhaustion of Our Coal Mines*. Macmillan; Co.

Jha, A. R. 2014. *Rare Earth Materials: Properties and Applications*. CRC Press. https://doi.org/10.1201/b17045.

Jiang, A. Q., A. Sablayrolles, A. Roux, A. Mensch, B. Savary, C. Bamford, D. S. Chaplot, et al. 2024. "Mixtral of Experts." *arXiv Preprint arXiv:2401.04088*.

Jiang, Ziheng, Haibin Lin, Yinmin Zhong, Qi Huang, Yangrui Chen, Zhi Zhang, Yanghua Peng, et al. 2024. "MegaScale: Scaling Large Language Model Training to More Than 10,000 GPUs." *21st USENIX Symposium on Networked Systems Design and Implementation (NSDI 24)*, 745–60.

Jouppi, Norman P., Cliff Young, Nishant Patil, David Patterson, Gaurav Agrawal, Raminder Bajwa, Sarah Bates, et al. 2017. "In-Datacenter Performance Analysis of a Tensor Processing Unit." *Proceedings of the 44th Annual International Symposium on Computer Architecture*, ISCA '17, 1–12. https://doi.org/10.1145/3079856.3080246.

Jouppi, Norm, George Kurian, Sheng Li, Peter Ma, Rahul Nagarajan, Lifeng Nai, Nishant Patil, et al. 2023. "TPU v4: An Optically Reconfigurable Supercomputer for Machine Learning with Hardware Support for Embeddings." *Proceedings of the 50th Annual International Symposium on Computer Architecture*, 1–14. https://doi.org/10.1145/3579371.3589350.

Joye, Marc, and Michael Tunstall. 2012. *Fault Analysis in Cryptography*. Inf. Secur. Cryptography. Springer Berlin Heidelberg. https://doi.org/10.1007/978-3-642-29656-7.

Kairouz, P., and H. B. McMahan. 2021. "Advances and Open Problems in Federated Learning." *Foundations and Trends in Machine Learning* 14 (1-2): 1–210. https://doi.org/10.1561/2200000083.

Kaplan, Jared, Sam McCandlish, Tom Henighan, Tom B. Brown, Benjamin Chess, Rewon Child, Scott Gray, Alec Radford, Jeffrey Wu, and Dario Amodei. 2020. "Scaling Laws for Neural Language Models." *ArXiv Preprint* abs/2001.08361.

Karger, D., E. Lehman, T. Leighton, R. Panigrahy, M. Levine, and D. Lewin. 1997. "Consistent Hashing and Random Trees: Distributed Caching Protocols for Relieving Hot Spots on the World Wide Web." *Proceedings of the Twenty-Ninth Annual ACM Symposium on Theory of Computing - STOC '97*, 654–63. https://doi.org/10.1145/258533.258660.

Karimireddy, Sai Praneeth, Quentin Rebjock, Sebastian U. Stich, and Martin Jaggi. 2019. "Error Feedback Fixes SignSGD and Other Gradient Compression Schemes." *Proceedings of the 36th International Conference on Machine Learning (ICML)*, Proceedings of machine learning research, vol. 97: 3252–61.

Kasperkevic, Jana. 2015. "Google Says Sorry for Racist Auto-Tag in Photo App." *The Guardian*, July.

Kawazoe Aguilera, Marcos, Wei Chen, and Sam Toueg. 1997. "Heartbeat: A Timeout-Free Failure Detector for Quiescent Reliable Communication." In *Lect. Notes Comput. Sci.* Springer Berlin Heidelberg. https://doi.org/10.1007/bfb0030680.

Kim, B., M. Wattenberg, J. Gilmer, C. Cai, J. Wexler, F. Viegas, and R. Sayres. 2018. "Interpretability Beyond Feature Attribution: Quantitative Testing with Concept Activation Vectors (TCAV)." *Proceedings of the 35th International Conference on Machine Learning (ICML)* 80: 2668–77.

Kim, J., W. J. Dally, S. Scott, and D. Abts. 2008. "Technology-Driven, Highly-Scalable Dragonfly Topology." *2008 International Symposium on Computer Architecture*, 77–88. https://doi.org/10.1109/isca.2008.19.

Kim, Sunju, Chungsik Yoon, Seunghon Ham, Jihoon Park, Ohun Kwon, Donguk Park, Sangjun Choi, Seungwon Kim, Kwonchul Ha, and Won Kim. 2018. "Chemical Use in the Semiconductor Manufacturing Industry." *International Journal of Occupational and Environmental Health* 24 (3-4): 109–18. https://doi.org/10.1080/10773525.2018.1519957.

Kingma, Diederik P., and Jimmy Ba. 2015. "Adam: A Method for Stochastic Optimization." *3rd International Conference on Learning Representations (ICLR)*.

Kirkpatrick, J., R. Pascanu, N. Rabinowitz, J. Veness, G. Desjardins, A. A. Rusu, K. Milan, et al. 2017. "Overcoming Catastrophic Forgetting in Neural Networks." *Proceedings of the National Academy of Sciences* 114 (13): 3521–26. https://doi.org/10.1073/pnas.1611835114.

Kleinberg, Jon, Sendhil Mullainathan, and Manish Raghavan. 2017. "Inherent Trade-Offs in the Fair Determination of Risk Scores." *8th Innovations in Theoretical Computer Science Conference (ITCS 2017)*, Leibniz international proceedings in informatics (LIPIcs), vol. 67: 43:1–23. https://doi.org/10.4230/LIPIcs.ITCS.2017.43.

Kleinrock, L. 1975. *Queueing Systems, Volume 1: Theory*. Wiley-Interscience.

Kleppmann, Martin. 2016. *Designing Data-Intensive Applications: The Big Ideas Behind Reliable, Scalable, and Maintainable Systems*. O'Reilly Media.

Klutke, G., P. C. Kiessler, and M. A. Wortman. 2003. "A Critical Look at the Bathtub Curve." *IEEE Transactions on Reliability* 52 (1): 125–29. https://doi.org/10.1109/tr.2002.804492.

Ko, Y. 2021. "Characterizing System-Level Masking Effects Against Soft Errors." *Electronics* 10 (18): 2286. https://doi.org/10.3390/electronics10182286.

Kocher, Paul, Jann Horn, Anders Fogh, Daniel Genkin, Daniel Gruss, Werner Haas, Mike Hamburg, et al. 2019. "Spectre Attacks: Exploiting Speculative Execution." *2019 IEEE Symposium on Security and Privacy (SP)*, 1–19. https://doi.org/10.1109/sp.2019.00002.

Kocher, Paul, Joshua Jaffe, and Benjamin Jun. 1999. "Differential Power Analysis." In *Advances in Cryptology — CRYPTO' 99*. Springer Berlin Heidelberg. https://doi.org/10.1007/3-540-48405-1_25.

Kocher, Paul, Joshua Jaffe, Benjamin Jun, and Pankaj Rohatgi. 2011. "Introduction to Differential Power Analysis." *Journal of Cryptographic Engineering* 1 (1): 5–27. https://doi.org/10.1007/s13389-011-0006-y.

Koh, Pang Wei, and Percy Liang. 2017. "Understanding Black-Box Predictions via Influence Functions." *International Conference on Machine Learning (ICML)*, Proceedings of machine learning research, vol. 70: 1885–94.

Koh, Pang Wei, Thao Nguyen, Yew Siang Tang, Stephen Mussmann, Emma Pierson, Been Kim, and Percy Liang. 2020. "Concept Bottleneck Models." *Proceedings of the 37th International Conference on Machine Learning, ICML 2020, 13-18 July 2020, Virtual Event*, Proceedings of machine learning research, vol. 119: 5338–48.

Kohavi, Ron, Roger Longbotham, Dan Sommerfield, and Randal M. Henne. 2009. "Controlled Experiments on the Web: Survey and Practical Guide." *Data Mining and Knowledge Discovery* 18 (1): 140–81. https://doi.org/10.1007/s10618-008-0114-1.

Kohavi, Ron, Diane Tang, and Ya Xu. 2020. *Trustworthy Online Controlled Experiments: A Practical Guide to A/B Testing*. Cambridge University Press. https://doi.org/10.1017/9781108653985.

Kokolis, Apostolos, Michael Kuchnik, John Hoffman, Adithya Kumar, Parth Malani, Faye Ma, Zach DeVito, Shubho Sengupta, Kalyan Saladi, and Carole-Jean Wu. 2025. "Revisiting Reliability in Large-Scale Machine Learning Research Clusters." *2025 IEEE International Symposium on High Performance Computer Architecture (HPCA)*, 1259–74. https://doi.org/10.1109/hpca61900.2025.00096.

Konečný, J., H. B. McMahan, D. Ramage, and P. Richtárik. 2016. "Federated Optimization: Distributed Machine Learning for on-Device Intelligence." *CoRR* abs/1610.02527.

Koren, Yehuda, Robert Bell, and Chris Volinsky. 2009. "Matrix Factorization Techniques for Recommender Systems." *Computer* 42 (8): 30–37. https://doi.org/10.1109/mc.2009.263.

Korosec, Kirsten. 2019. *Tesla Sues Former Employees, Zoox for Alleged Trade Secret Theft*. TechCrunch.

Korthikanti, Vijay Anand, Jared Casper, Sangkug Lym, Lawrence McAfee, Michael Andersch, Mohammad Shoeybi, and Bryan Catanzaro. 2023. "Reducing Activation Recomputation in Large Transformer Models." *Proceedings of Machine Learning and Systems (MLSys)* 5: 341–53.

Krishna, Kalpesh, Gaurav Singh Tomar, Ankur P. Parikh, Nicolas Papernot, and Mohit Iyyer. 2020. "Thieves on Sesame Street! Model Extraction of BERT-Based APIs." *International Conference on Learning Representations (ICLR)*.

Krishnamoorthi, Raghuraman. 2018. "Quantizing Deep Convolutional Networks for Efficient Inference: A Whitepaper." *arXiv Preprint arXiv:1806.08342* abs/1806.08342.

Krizhevsky, Alex, Ilya Sutskever, and Geoffrey E. Hinton. 2012. "ImageNet Classification with Deep Convolutional Neural Networks." *Advances in Neural Information Processing Systems (NeurIPS)* 25.

Kung, H. T. 1982. "Why Systolic Architectures?" *Computer* 15 (1): 37–46. https://doi.org/10.1109/mc.1982.1653825.

Kung, Hsiang Tsung, and Charles E Leiserson. 1979. "Systolic Arrays (for VLSI)." *Sparse Matrix Proceedings 1978* 1: 256–82.

Kurakin, Alexey, Ian Goodfellow, and Samy Bengio. 2017. "Adversarial Examples in the Physical World." *International Conference on Learning Representations (ICLR), Workshop Track*, 99–112. https://doi.org/10.1201/9781351251389-8.

Kusner, Matt J., Joshua Loftus, Chris Russell, and Ricardo Silva. 2017. "Counterfactual Fairness." *Advances in Neural Information Processing Systems* 30: 4066–76.

Kwon, Woosuk, Zhuohan Li, Siyuan Zhuang, Ying Sheng, Lianmin Zheng, Cody Hao Yu, Joseph Gonzalez, Hao Zhang, and Ion Stoica. 2023. "Efficient Memory Management for Large Language Model Serving with PagedAttention." *Proceedings of the 29th Symposium on Operating Systems Principles*, 611–26. https://doi.org/10.1145/3600006.3613165.

Kwon, Y. D., R. Li, S. I. Venieris, J. Chauhan, and N. D. Lane. 2024. "TinyTrain: Resource-Aware Task-Adaptive Sparse Training of DNNs at the Data-Scarce Edge." *Proceedings of the 41st International Conference on Machine Learning (ICML)*.

Kwon, Youngeun, and Minsoo Rhu. 2018. "TensorDIMM: A Practical Near-Memory Processing Architecture for Embeddings and Tensor Operations in Deep Learning." *Proceedings of the 52nd Annual IEEE/ACM International Symposium on Microarchitecture*, 740–53. https://doi.org/10.1145/3352460.3358284.

Lacoste, Alexandre, Alexandra Luccioni, Victor Schmidt, and Thomas Dandres. 2019. "Quantifying the Carbon Emissions of Machine Learning." *arXiv Preprint arXiv:1910.09700*.

Lai, Liangzhen, Naveen Suda, and Vikas Chandra. 2018. "CMSIS-NN: Efficient Neural Network Kernels for Arm Cortex-M CPUs." *ArXiv Preprint* abs/1801.06601.

Lakshminarayanan, Balaji, Alexander Pritzel, and Charles Blundell. 2017. "Simple and Scalable Predictive Uncertainty Estimation Using Deep Ensembles." *Advances in Neural Information Processing Systems (NeurIPS)* 30.

Lamport, Leslie, Robert Shostak, and Marshall Pease. 1982. "The Byzantine Generals Problem." *ACM Transactions on Programming Languages and Systems* 4 (3): 382–401. https://doi.org/10.1145/357172.357176.

Langston, Jennifer. 2020. *Microsoft Announces New Supercomputer, Lays Out Vision for Future AI Work*. Microsoft Source.

Lannelongue, Loïc, Jason Grealey, and Michael Inouye. 2021. "Green Algorithms: Quantifying the Carbon Footprint of Computation." *Advanced Science* 8 (12): 2100707. https://doi.org/10.1002/advs.202100707.

Lazer, David, Ryan Kennedy, Gary King, and Alessandro Vespignani. 2014. "The Parable of Google Flu: Traps in Big Data Analysis." *Science* 343 (6176): 1203–5. https://doi.org/10.1126/science.1248506.

Lee, Peter. 2016. *Learning from Tay's Introduction*. The Official Microsoft Blog.

Lei, Jing, Max G'Sell, Alessandro Rinaldo, Ryan J. Tibshirani, and Larry Wasserman. 2018. "Distribution-Free Predictive Inference for Regression." *Journal of the American Statistical Association* 113 (523): 1094–111. https://doi.org/10.1080/01621459.2017.1307116.

Leiserson, Charles E. 1985. "Fat-Trees: Universal Networks for Hardware-Efficient Supercomputing." *IEEE Transactions on Computers* C-34 (10): 892–901. https://doi.org/10.1109/tc.1985.6312192.

Lepikhin, Dmitry, HyoukJoong Lee, Yuanzhong Xu, Dehao Chen, Orhan Firat, Yanping Huang, Maxim Krikun, Noam Shazeer, and Zhifeng Chen. 2021. "GShard: Scaling Giant Models with Conditional Computation and Automatic Sharding." *International Conference on Learning Representations (ICLR)*.

Leviathan, Yaniv, Matan Kalman, and Yossi Matias. 2023. "Fast Inference from Transformers via Speculative Decoding." *International Conference on Machine Learning (ICML)*, 19274–86.

Lewis, Patrick, Ethan Perez, Aleksandra Piktus, Fabio Petroni, Vladimir Karpukhin, Naman Goyal, Heinrich Küttler, et al. 2020. "Retrieval-Augmented Generation for Knowledge-Intensive NLP Tasks." *Advances in Neural Information Processing Systems* 33: 9459–74.

Li, Chengwei. 2020. *Estimating the Training Cost of GPT-3*.

Li, Jie, George Michelogiannakis, Brandon Cook, Dulanya Cooray, and Yong Chen. 2023. "Analyzing Resource Utilization in an HPC System: A Case Study of NERSC's Perlmutter." *Lect. Notes Comput. Sci.*, Lecture notes in computer science, vol. 13948: 297–316. https://doi.org/10.1007/978-3-031-32041-5_16.

Li, M., D. G. Andersen, J. W. Park, A. J. Smola, A. Ahmed, V. Josifovski, J. Long, E. J. Shekita, and B.-Y. Su. 2014. "Scaling Distributed Machine Learning with the Parameter Server." *Proceedings of the 2014 International Conference on Big Data Science and Computing*, 583–98. https://doi.org/10.1145/2640087.2644155.

Li, Shen, Yanli Zhao, Rohan Varma, Omkar Salpekar, Pieter Noordhuis, Teng Li, Adam Paszke, et al. 2020. "PyTorch Distributed: Experiences on Accelerating Data Parallel Training." *Proceedings of the VLDB Endowment* 13 (12): 3005–18. https://doi.org/10.14778/3415478.3415530.

Li, Tian, Anit Kumar Sahu, Ameet Talwalkar, and Virginia Smith. 2020. "Federated Learning: Challenges, Methods, and Future Directions." *IEEE Signal Processing Magazine* 37 (3): 50–60. https://doi.org/10.1109/msp.2020.2975749.

Li, Yuliang, Rui Miao, Hongqiang Harry Liu, Yan Zhuang, Fei Feng, Lingbo Tang, Zheng Cao, et al. 2019. "HPCC: High Precision Congestion Control." *Proceedings of the ACM Special Interest Group on Data Communication (SIGCOMM)*, 44–58. https://doi.org/10.1145/3341302.3342085.

Lifka, David A. 1995. "The ANL/IBM SP Scheduling System." In *Job Scheduling Strategies for Parallel Processing*, edited by Dror G. Feitelson and Larry Rudolph, vol. 949. Lecture Notes in Computer Science. Springer. https://doi.org/10.1007/3-540-60153-8_35.

Lin, Ji, Jiaming Tang, Haotian Tang, Shang Yang, Wei-Ming Chen, Wei-Chen Wang, Guangxuan Xiao, Xingyu Dang, Chuang Gan, and Song Han. 2024. "AWQ: Activation-Aware Weight Quantization for on-Device LLM Compression and Acceleration." *Proceedings of Machine Learning and Systems* 6: 87–100.

Lin, Yujun, Song Han, Huizi Mao, Yu Wang, and William J Dally. 2018. "Deep Gradient Compression: Reducing the Communication Bandwidth for Distributed Training." *International Conference on Learning Representations (ICLR)*.

Linux man-pages project. 2026. *Perfquery(8): Query InfiniBand Port Counters on a Single Port*.

linux-rdma project. 2026. *perftest: InfiniBand Verbs Performance Tests*.

Lipp, M., M. Schwarz, D. Gruss, T. Prescher, W. Haas, J. Horn, S. Mangard, et al. 2018. "Meltdown: Reading Kernel Memory from User Space." *Proceedings of the 27th USENIX Security Symposium (USENIX Security)*, 973–90.

Lipton, Zachary, Yu-Xiang Wang, and Alexander Smola. 2018. "Detecting and Correcting for Label Shift with Black Box Predictors." *International Conference on Machine Learning (ICML)*, 3122–30.

Little, John D. C. 1961. "A Proof for the Queuing Formula: $L = \lambda W$." *Operations Research* 9 (3): 383–87. https://doi.org/10.1287/opre.9.3.383.

Liu, Hao, Matei Zaharia, and Pieter Abbeel. 2023. "Ring Attention with Blockwise Transformers for Near-Infinite Context." *arXiv Preprint arXiv:2310.01889*, ahead of print. https://doi.org/10.48550/arXiv.2310.01889.

Liu, W., Y. Xi, J. Qin, F. Sun, B. Chen, W. Zhang, R. Zhang, and R. Tang. 2022. "Neural Re-Ranking in Multi-Stage Recommender Systems: A Review." *Proceedings of the Thirty-First International Joint Conference on Artificial Intelligence*, 5512–20. https://doi.org/10.24963/ijcai.2022/771.

Luccioni, Alexandra Sasha, Sylvain Viguier, and Anne-Laure Ligozat. 2023. "Estimating the Carbon Footprint of BLOOM, a 176B Parameter Language Model." *Journal of Machine Learning Research* 24 (253): 1–15.

Lundberg, Scott M., and Su-In Lee. 2017. "A Unified Approach to Interpreting Model Predictions." *Advances in Neural Information Processing Systems (NeurIPS)* 30: 4765–74.

Lustre Wiki. 2017. *lfs setstripe: Set Striping Pattern of a File*. Lustre Wiki manual page.

Lustre Wiki. 2019. *Configuring Lustre File Striping*. Lustre Wiki.

Ma, Jeffrey, Hengzhi Pei, Leonard Lausen, and George Karypis. 2025. *Understanding Silent Data Corruption in LLM Training*. https://doi.org/10.48550/arXiv.2502.12340.

Ma, Jeffrey, Alan Tu, Yiling Chen, and Vijay Janapa Reddi. 2024. "FedStaleWeight: Buffered Asynchronous Federated Learning with Fair Aggregation via Staleness Reweighting." *arXiv Preprint arXiv:2406.02877*.

Ma, Xiaoyu, and David Patterson. 2026. *Challenges and Research Directions for Large Language Model Inference Hardware*. No. 5. Vol. 59. https://doi.org/10.1109/mc.2026.3652916.

Madry, Aleksander, Aleksandar Makelov, Ludwig Schmidt, Dimitris Tsipras, and Adrian Vladu. 2018. "Towards Deep Learning Models Resistant to Adversarial Attacks." *International Conference on Learning Representations (ICLR)*.

Mahajan, Kshiteej, Arjun Balasubramanian, Arjun Singhvi, Shivaram Venkataraman, Aditya Akella, Amar Phanishayee, and Shuchi Chawla. 2020. "Themis: Fair and Efficient GPU Cluster Scheduling." *17th USENIX Symposium on Networked Systems Design and Implementation (NSDI 20)*, 289–304.

Mahmoud, A., N. Aggarwal, A. Nobbe, J. R. S. Vicarte, S. V. Adve, C. W. Fletcher, I. Frosio, and S. K. S. Hari. 2020. "PyTorchFI: A Runtime Perturbation Tool for DNNs." *2020 50th Annual IEEE/IFIP International Conference on Dependable Systems and Networks Workshops (DSN-w)*, 25–31. https://doi.org/10.1109/dsn-w50199.2020.00014.

Malkov, Yury A., and Dmitry A. Yashunin. 2020. "Efficient and Robust Approximate Nearest Neighbor Search Using Hierarchical Navigable Small World Graphs." *IEEE Transactions on Pattern Analysis and Machine Intelligence* 42 (4): 824–36. https://doi.org/10.1109/TPAMI.2018.2889473.

Marulli, Fiammetta, Stefano Marrone, and Laura Verde. 2022. "Sensitivity of Machine Learning Approaches to Fake and Untrusted Data in Healthcare Domain." *Journal of Sensor and Actuator Networks* 11 (2): 21. https://doi.org/10.3390/jsan11020021.

Masanet, Eric, Arman Shehabi, Nuoa Lei, Sarah Smith, and Jonathan Koomey. 2020. "Recalibrating Global Data Center Energy-Use Estimates." *Science* 367 (6481): 984–86. https://doi.org/10.1126/science.aba3758.

Mattson, Peter, Christine Cheng, Cody Coleman, Greg Diamos, Paulius Micikevicius, David Patterson, Hanlin Tang, et al. 2020. "MLPerf Training Benchmark." *Proceedings of Machine Learning and Systems (MLSys)* 2: 336–49.

McCandlish, Sam, Jared Kaplan, Dario Amodei, and OpenAI Dota Team. 2018. "An Empirical Model of Large-Batch Training." *arXiv Preprint arXiv:1812.06162*, ahead of print. https://doi.org/10.48550/arXiv.1812.06162.

McCarthy, J. 1981. "Epistemological Problems of Artificial Intelligence." In *Readings in Artificial Intelligence*. Elsevier. https://doi.org/10.1016/b978-0-934613-03-3.50035-0.

McMahan, Brendan, Eider Moore, Daniel Ramage, Seth Hampson, and Blaise Agüera y Arcas. 2017. "Communication-Efficient Learning of Deep Networks from Decentralized Data." *International Conference on Artificial Intelligence and Statistics (AISTATS)*, Proceedings of machine learning research, vol. 54: 1273–82.

Message Passing Interface Forum. 1993. "MPI: A Message Passing Interface." *Proceedings of the 1993 ACM/IEEE Conference on Supercomputing - Supercomputing '93*, 878–83. https://doi.org/10.1145/169627.169855.

Message Passing Interface Forum. 2015. *MPI: A Message-Passing Interface Standard, Version 3.1*.

Meta AI Research. 2022. *OPT-175B Training Logbook*. Companion repository to the OPT-175B model release.

Meta Engineering. 2024. *Building Meta's GenAI Infrastructure*. Engineering at Meta Blog.

Micikevicius, Paulius, Dusan Stosic, Neil Burgess, Marius Cornea, Pradeep Dubey, Richard Grisenthwaite, Sangwon Ha, et al. 2022. "FP8 Formats for Deep Learning." *arXiv Preprint arXiv:2209.05433*.

Microsoft. 2025. *Inside the World's Most Powerful AI Datacenter*. The Official Microsoft Blog.

Miller, C. 2019. "Lessons Learned from Hacking a Car." *IEEE Design & Test* 36 (6): 7–9. https://doi.org/10.1109/mdat.2018.2863106.

Miller, Charlie, and Chris Valasek. 2015. *Remote Exploitation of an Unaltered Passenger Vehicle*. Black Hat USA 2015 Whitepaper.

Mironov, I. 2017. "Rényi Differential Privacy." *2017 IEEE 30th Computer Security Foundations Symposium (CSF)*, 263–75. https://doi.org/10.1109/csf.2017.11.

Mitchell, Margaret, Simone Wu, Andrew Zaldivar, Parker Barnes, Lucy Vasserman, Ben Hutchinson, Elena Spitzer, Inioluwa Deborah Raji, and Timnit Gebru. 2019. "Model Cards for Model Reporting." *Proceedings of the Conference on Fairness, Accountability, and Transparency*, 220–29. https://doi.org/10.1145/3287560.3287596.

Mittal, Radhika, Alexander Shpiner, Aurojit Panda, Eitan Zahavi, Arvind Krishnamurthy, Sylvia Ratnasamy, and Scott Shenker. 2018. "Revisiting Network Support for RDMA." *Proceedings of the 2018 Conference of the ACM Special Interest Group on Data Communication*, 313–26. https://doi.org/10.1145/3230543.3230557.

Mitzenmacher, M. 2001. "The Power of Two Choices in Randomized Load Balancing." *IEEE Transactions on Parallel and Distributed Systems* 12 (10): 1094–104. https://doi.org/10.1109/71.963420.

ML.ENERGY Initiative, Jae-Won Chung, Jiachen Gu, Zhewei Yan, Tony Lo, Yejin Park, and Mosharaf Chowdhury. 2023. *The ML.ENERGY Leaderboard*. SymbioticLab, University of Michigan.

Mnih, Volodymyr, Koray Kavukcuoglu, David Silver, Andrei A. Rusu, Joel Veness, Marc G. Bellemare, Alex Graves, et al. 2015. "Human-Level Control Through Deep Reinforcement Learning." *Nature* 518 (7540): 529–33. https://doi.org/10.1038/nature14236.

Mohanram, K., and N. A. Touba. 2003. "Partial Error Masking to Reduce Soft Error Failure Rate in Logic Circuits." *Proceedings. 18th IEEE International Symposium on Defect and Fault Tolerance in VLSI Systems*, 433–40. https://doi.org/10.1109/dftvs.2003.1250141.

Monyei, C. G., and Kirsten E. H. Jenkins. 2018. "Electrons Have No Identity: Setting Right Misrepresentations in Google and Apple's Clean Energy Purchasing." *Energy Research & Social Science* 46: 48–51. https://doi.org/10.1016/j.erss.2018.06.015.

Moosavi-Dezfooli, Seyed-Mohsen, Alhussein Fawzi, and Pascal Frossard. 2015. "DeepFool: A Simple and Accurate Method to Fool Deep Neural Networks." *2016 IEEE Conference on Computer Vision and Pattern Recognition (CVPR)* 2016: 2574–82. https://doi.org/10.1109/cvpr.2016.282.

Mu, Norman, and Justin Gilmer. 2019. *MNIST-C: A Robustness Benchmark for Computer Vision*.

Mukherjee, S. S., J. Emer, and S. K. Reinhardt. 2005. "The Soft Error Problem: An Architectural Perspective." *11th International Symposium on High-Performance Computer Architecture*, 243–47. https://doi.org/10.1109/hpca.2005.37.

Nabi, Razieh, and Ilya Shpitser. 2018. "Fair Inference on Outcomes." *Proceedings of the AAAI Conference on Artificial Intelligence* 32. https://doi.org/10.1609/aaai.v32i1.11553.

Narayanan, Arvind, and Vitaly Shmatikov. 2006. "How to Break Anonymity of the Netflix Prize Dataset." In *CoRR*, abs/cs/0610105.

Narayanan, Arvind, and Vitaly Shmatikov. 2008. "Robust de-Anonymization of Large Sparse Datasets." *2008 IEEE Symposium on Security and Privacy (SP 2008)*, 111–25. https://doi.org/10.1109/sp.2008.33.

Narayanan, Deepak, Aaron Harlap, Amar Phanishayee, Vivek Seshadri, Nikhil R. Devanur, Gregory R. Ganger, Phillip B. Gibbons, and Matei Zaharia. 2019. "PipeDream: Generalized Pipeline Parallelism for DNN Training." *Proceedings of the 27th ACM Symposium on Operating Systems Principles*, 1–15. https://doi.org/10.1145/3341301.3359646.

Narayanan, Deepak, Mohammad Shoeybi, Jared Casper, Patrick LeGresley, Mostofa Patwary, Vijay Korthikanti, Dmitri Vainbrand, et al. 2021. "Efficient Large-Scale Language Model Training on GPU Clusters Using Megatron-LM." *Proceedings of the International Conference for High Performance Computing, Networking, Storage and Analysis*, 1–15. https://doi.org/10.1145/3458817.3476209.

NASA Mars Program Independent Assessment Team. 2000. *Report on the Loss of the Mars Polar Lander and Deep Space 2 Missions*. National Aeronautics; Space Administration.

Nasr, Milad, Reza Shokri, and Amir Houmansadr. 2019. "Comprehensive Privacy Analysis of Deep Learning: Passive and Active White-Box Inference Attacks Against Centralized and Federated Learning." *2019 IEEE Symposium on Security and Privacy (SP)*, 739–53. https://doi.org/10.1109/sp.2019.00065.

National Transportation Safety Board. 2017. *Collision Between a Car Operating with Automated Vehicle Control Systems and a Tractor-Semitrailer Truck Near Williston, Florida, May 7, 2016*. HAR-17/02. National Transportation Safety Board.

National Transportation Safety Board. 2019. *Collision Between Vehicle Controlled by Developmental Automated Driving System and Pedestrian, Tempe, Arizona, March 18, 2018*. HAR-19/03. National Transportation Safety Board.

Naumov, Maxim, Dheevatsa Mudigere, Hao-Jun Michael Shi, Jianyu Huang, Narayanan Sundaraman, Jongsoo Park, Xiaodong Wang, et al. 2019. "Deep Learning Recommendation Model for Personalization and Recommendation Systems." *arXiv Preprint arXiv:1906.00091*.

Netflix Technology Blog. 2017. *Innovating Faster on Personalization Algorithms at Netflix Using Interleaving*. Netflix Tech Blog.

Neumann, John von. 1928. "Zur Theorie Der Gesellschaftsspiele." *Mathematische Annalen* 100 (1): 295–320. https://doi.org/10.1007/bf01448847.

New York State Department of Financial Services. 2021. *Report on Apple Card Investigation*. New York State Department of Financial Services.

Ngo, Richard, Lawrence Chan, and Sören Mindermann. 2022. "The Alignment Problem from a Deep Learning Perspective." *ArXiv Preprint* abs/2209.00626.

Nguyen, John, Kshitiz Malik, Hongyuan Zhan, Ashkan Yousefpour, Michael Rabbat, Mani Malek, and Dzmitry Huba. 2021. "Federated Learning with Buffered Asynchronous Aggregation." *Proceedings of Machine Learning Research (AISTATS)* 164.

NVIDIA. 2023. *NVIDIA DGX SuperPOD: Next Generation Scalable Infrastructure for AI Leadership*. RA-11333-001 V11. NVIDIA.

NVIDIA. 2026a. *GPUDirect RDMA*.

NVIDIA. 2026b. *NCCL User Guide*.

NVIDIA. 2026c. *NVIDIA CUDA Multi-Process Service*.

NVIDIA. 2026d. *NVIDIA Multi-Instance GPU User Guide*.

NVIDIA. 2026e. *NVIDIA Quantum-X800 InfiniBand Platform*. NVIDIA product documentation.

NVIDIA Corporation. 2017. *NVIDIA Tesla V100 GPU Architecture*. NVIDIA Whitepaper.

NVIDIA Corporation. 2020. *NVIDIA A100 Tensor Core GPU Architecture*. NVIDIA Whitepaper, V1.0.

NVIDIA Corporation. 2025. *Product Carbon Footprint Summary for NVIDIA HGX H100*. NVIDIA Datasheet.

NVIDIA Corporation. 2026. *CUDA Graphs: CUDA Programming Guide*.

Nygard, Michael T. 2007. *Release It!: Design and Deploy Production-Ready Software*. Pragmatic Bookshelf.

Obermeyer, Ziad, Brian Powers, Christine Vogeli, and Sendhil Mullainathan. 2019. "Dissecting Racial Bias in an Algorithm Used to Manage the Health of Populations." *Science* 366 (6464): 447–53. https://doi.org/10.1126/science.aax2342.

Ofqual. 2020. *Awarding GCSE, AS, A Level, Advanced Extension Awards and Extended Project Qualifications in Summer 2020: Interim Report*. Office of Qualifications; Examinations Regulation.

Olah, C., N. Cammarata, L. Schubert, G. Goh, M. Petrov, and S. Carter. 2020. "Zoom in: An Introduction to Circuits." *Distill* 5 (3): e00024–001. https://doi.org/10.23915/distill.00024.001.

Oliynyk, Daryna, Rudolf Mayer, and Andreas Rauber. 2023. "I Know What You Trained Last Summer: A Survey on Stealing Machine Learning Models and Defences." *ACM Computing Surveys* 55 (14s): 1–41. https://doi.org/10.1145/3595292.

Olston, Christopher, Noah Fiedel, Kiril Gorovoy, Jeremiah Harmsen, Li Lao, Fangwei Li, Vinu Rajashekhar, Sukriti Ramesh, and Jordan Soyke. 2017. "TensorFlow-Serving: Flexible, High-Performance ML Serving." *CoRR* abs/1712.06139. https://doi.org/10.48550/arXiv.1712.06139.

OpenAI. 2023. *March 20 ChatGPT Outage: Here's What Happened*. OpenAI incident report.

OpenAI, Josh Achiam, Steven Adler, Sandhini Agarwal, Lama Ahmad, Ilge Akkaya, Florencia Leoni Aleman, et al. 2023. "GPT-4 Technical Report." *arXiv Preprint arXiv:2303.08774*, ahead of print. https://doi.org/10.48550/arXiv.2303.08774.

Oprea, Alina, Anoop Singhal, and Apostol Vassilev. 2022. "Poisoning Attacks Against Machine Learning: Can Machine Learning Be Trustworthy?" *Computer* 55 (11): 94–99. https://doi.org/10.1109/mc.2022.3190787.

Orekondy, Tribhuvanesh, Bernt Schiele, and Mario Fritz. 2019. "Knockoff Nets: Stealing Functionality of Black-Box Models." *2019 IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, 4949–58. https://doi.org/10.1109/cvpr.2019.00509.

Organisation for Economic Co-operation and Development. 2024. *Recommendation of the Council on Artificial Intelligence*. OECD Legal Instruments.

Ousterhout, John K. 1982. "Scheduling Techniques for Concurrent Systems." *Proceedings of the 3rd International Conference on Distributed Computing Systems (ICDCS)*, 22–30.

Ouyang, L., J. Wu, X. Jiang, D. Almeida, C. L. Wainwright, P. Mishkin, C. Zhang, et al. 2022. "Training Language Models to Follow Instructions with Human Feedback." *Advances in Neural Information Processing Systems (NeurIPS)* 35: 27730–44. https://doi.org/10.52202/068431-2011.

OVHcloud. 2021. *Strasbourg Datacentre: Latest Information*. OVHcloud incident update.

Pan, Sinno Jialin, and Qiang Yang. 2010. "A Survey on Transfer Learning." *IEEE Transactions on Knowledge and Data Engineering* 22 (10): 1345–59. https://doi.org/10.1109/tkde.2009.191.

Papadimitriou, George, and Dimitris Gizopoulos. 2021. "Demystifying the System Vulnerability Stack: Transient Fault Effects Across the Layers." *2021 ACM/IEEE 48th Annual International Symposium on Computer Architecture (ISCA)*, 902–15. https://doi.org/10.1109/isca52012.2021.00075.

Papernot, Nicolas, Patrick McDaniel, and Ian Goodfellow. 2016. "Transferability in Machine Learning: From Phenomena to Black-Box Attacks Using Adversarial Samples." *arXiv Preprint arXiv:1605.07277*.

Papernot, Nicolas, Patrick McDaniel, Xi Wu, Somesh Jha, and Ananthram Swami. 2016. "Distillation as a Defense to Adversarial Perturbations Against Deep Neural Networks." *2016 IEEE Symposium on Security and Privacy (SP)*, 582–97. https://doi.org/10.1109/sp.2016.41.

Papernot, N., P. McDaniel, S. Jha, M. Fredrikson, Z. Berkay Celik, and A. Swami. 2016. "The Limitations of Deep Learning in Adversarial Settings." *2016 IEEE European Symposium on Security and Privacy (EuroS&P)*, 372–87. https://doi.org/10.1109/eurosp.2016.36.

Parrish, Alicia, Hannah Rose Kirk, Jessica Quaye, Charvi Rastogi, Max Bartolo, Oana Inel, Juan Ciro, et al. 2023. "Adversarial Nibbler: A Data-Centric Challenge for Improving the Safety of Text-to-Image Models." *ArXiv Preprint* abs/2305.14384.

Patarasuk, Pitch, and Xin Yuan. 2009. "Bandwidth Optimal All-Reduce Algorithms for Clusters of Workstations." *Journal of Parallel and Distributed Computing* 69 (2): 117–24. https://doi.org/10.1016/j.jpdc.2008.09.002.

Patel, Dylan, and Gerald Wong. 2023. *GPT-4 Architecture, Infrastructure, Training Dataset, Costs, Vision, MoE*. SemiAnalysis Blog.

Patel, Pratyush, Esha Choukse, Chaojie Zhang, Aashaka Shah, Íñigo Goiri, Saeed Maleki, and Ricardo Bianchini. 2024. "Splitwise: Efficient Generative LLM Inference Using Phase Splitting." *2024 ACM/IEEE 51st Annual International Symposium on Computer Architecture (ISCA)*, 118–32. https://doi.org/10.1109/isca59077.2024.00019.

Patterson, David A., Garth Gibson, and Randy H. Katz. 1988. "A Case for Redundant Arrays of Inexpensive Disks (RAID)." *Proceedings of the 1988 ACM SIGMOD International Conference on Management of Data*, 109–16. https://doi.org/10.1145/50202.50214.

Patterson, David, Joseph Gonzalez, Urs Holzle, Quoc Le, Chen Liang, Lluis-Miquel Munguia, Daniel Rothchild, David R. So, Maud Texier, and Jeff Dean. 2022. "The Carbon Footprint of Machine Learning Training Will Plateau, Then Shrink." *Computer* 55 (7): 18–28. https://doi.org/10.1109/mc.2022.3148714.

Patterson, David, Joseph Gonzalez, Quoc Le, Chen Liang, Lluis-Miquel Munguia, Daniel Rothchild, David So, Maud Texier, and Jeff Dean. 2021. "Carbon Emissions and Large Neural Network Training." *arXiv Preprint arXiv:2104.10350*.

Perez, Fábio, and Ian Ribeiro. 2022. "Ignore Previous Prompt: Attack Techniques for Language Models." *arXiv Preprint arXiv:2211.09527*.

Personal Information Protection Commission, Japan. 2023. *Act on the Protection of Personal Information*. Personal Information Protection Commission, Japan.

Peters, D., R. A. Calvo, and R. M. Ryan. 2018. "Designing for Motivation, Engagement and Wellbeing in Digital Experience." *Frontiers in Psychology* 9: 797. https://doi.org/10.3389/fpsyg.2018.00797.

Peterson, W. W., and D. T. Brown. 1961. "Cyclic Codes for Error Detection." *Proceedings of the IRE* 49 (1): 228–35. https://doi.org/10.1109/jrproc.1961.287814.

Plank, James S. 1997. "A Tutorial on Reed-Solomon Coding for Fault-Tolerance in RAID-Like Systems." *Software: Practice and Experience* 27 (9): 995–1012. https://doi.org/10.1002/(SICI)1097-024X(199709)27:9<995::AID-SPE111>3.0.CO;2-6.

Polyzotis, Neoklis, Sudip Roy, Steven Euijong Whang, and Martin Zinkevich. 2017. "Data Management Challenges in Production Machine Learning." *Proceedings of the 2017 ACM International Conference on Management of Data*, 1723–26. https://doi.org/10.1145/3035918.3054782.

Pont, Michael J, and Royan HL Ong. 2002. "Using Watchdog Timers to Improve the Reliability of Single-Processor Embedded Systems: Seven New Patterns and a Case Study." *Proceedings of the First Nordic Conference on Pattern Languages of Programs*, 159–200.

Pope, Reiner, Sholto Douglas, Aakanksha Chowdhery, Jacob Devlin, James Bradbury, Jonathan Heek, Kefan Xiao, Shivani Agrawal, and Jeff Dean. 2023. "Efficiently Scaling Transformer Inference." *Proceedings of Machine Learning and Systems (MLSys)* 5: 606–24.

Prakash, Shvetank, Matthew Stewart, Colby Banbury, Mark Mazumder, Pete Warden, Brian Plancher, and Vijay Janapa Reddi. 2023. "Is TinyML Sustainable? Assessing the Environmental Impacts of Machine Learning on Microcontrollers." *ArXiv Preprint* abs/2301.11899.

Present, Elaina, Pieter Gagnon, Eric J. H. Wilson, Noel Merket, Philip R. White, and Scott Horowitz. 2024. *Choosing the Best Carbon Factor for the Job: Exploring Available Carbon Emissions Factors and the Impact of Factor Selection*. NREL/CP-5500-86682. National Renewable Energy Laboratory.

PyTorch Contributors. 2026a. *Distributed Checkpoint: Torch.distributed.checkpoint*.

PyTorch Contributors. 2026b. *Torch Distributed Elastic Rendezvous*. PyTorch documentation.

PyTorch Contributors. 2026c. *Torchrun (Elastic Launch)*. PyTorch documentation.

Qiao, Aurick, Sang Keun Choe, Suhas Jayaram Subramanya, Willie Neiswanger, Qirong Ho, Hao Zhang, Gregory R. Ganger, and Eric P. Xing. 2021. "Pollux: Co-Adaptive Cluster Scheduling for Goodput-Optimized Deep Learning." *15th USENIX Symposium on Operating Systems Design and Implementation (OSDI 21)*, 1–18.

Quaye, J., A. Parrish, O. Inel, C. Rastogi, H. R. Kirk, M. Kahng, E. Van Liemt, et al. 2024. "Adversarial Nibbler: An Open Red-Teaming Method for Identifying Diverse Harms in Text-to-Image Generation." *The 2024 ACM Conference on Fairness, Accountability, and Transparency*, 388–406. https://doi.org/10.1145/3630106.3658913.

Quiñonero-Candela, Joaquin, Masashi Sugiyama, Anton Schwaighofer, and Neil D. Lawrence, eds. 2009. *Dataset Shift in Machine Learning*. Neural Information Processing Series. The MIT Press.

Radovanovic, Ana, Ross Koningstein, Ian Schneider, Bokan Chen, Alexandre Duarte, Binz Roy, Diyue Xiao, et al. 2021. "Carbon-Aware Computing for Datacenters." *arXiv Preprint arXiv:2106.11750*, ahead of print. https://doi.org/10.48550/arXiv.2106.11750.

Rafailov, Rafael, Archit Sharma, Eric Mitchell, Stefano Ermon, Christopher D. Manning, and Chelsea Finn. 2023. "Direct Preference Optimization: Your Language Model Is Secretly a Reward Model." *Advances in Neural Information Processing Systems (NeurIPS)* 36: 53728–41. https://doi.org/10.52202/075280-2338.

Raffel, C., N. Shazeer, A. Roberts, K. Lee, S. Narang, M. Matena, Y. Zhou, W. Li, and P. J. Liu. 2020. "Exploring the Limits of Transfer Learning with a Unified Text-to-Text Transformer." *Journal of Machine Learning Research* 21 (140): 1–67.

Rajbhandari, Samyam, Jeff Rasley, Olatunji Ruwase, and Yuxiong He. 2020. "ZeRO: Memory Optimizations Toward Training Trillion Parameter Models." *SC20: International Conference for High Performance Computing, Networking, Storage and Analysis*, 1–16. https://doi.org/10.1109/sc41405.2020.00024.

Ramesh, A., M. Pavlov, G. Goh, S. Gray, C. Voss, A. Radford, M. Chen, and I. Sutskever. 2021. "Zero-Shot Text-to-Image Generation." In *Proceedings of the 38th International Conference on Machine Learning, ICML 2021, 18-24 July 2021, Virtual Event*, edited by Marina Meila and Tong Zhang, vol. 139. Proceedings of Machine Learning Research. PMLR.

Rashid, Layali, Karthik Pattabiraman, and Sathish Gopalakrishnan. 2015. "Characterizing the Impact of Intermittent Hardware Faults on Programs." *IEEE Transactions on Reliability* 64 (1): 297–310. https://doi.org/10.1109/tr.2014.2363152.

Rasley, Jeff, Samyam Rajbhandari, Olatunji Ruwase, and Yuxiong He. 2020. "DeepSpeed: System Optimizations Enable Training Deep Learning Models with over 100 Billion Parameters." *Proceedings of the 26th ACM SIGKDD International Conference on Knowledge Discovery & Data Mining*, 3505–6. https://doi.org/10.1145/3394486.3406703.

Ray Project. 2026. *Ray Train: Handling Failures and Node Preemption*. Ray documentation.

Reagen, B., U. Gupta, L. Pentecost, P. Whatmough, S. K. Lee, N. Mulholland, D. Brooks, and G.-Y. Wei. 2018. "Ares: A Framework for Quantifying the Resilience of Deep Neural Networks." *2018 55th ACM/ESDA/IEEE Design Automation Conference (DAC)*, 1–6. https://doi.org/10.1109/dac.2018.8465834.

Rebuffi, Sylvestre-Alvise, Hakan Bilen, and Andrea Vedaldi. 2017. "Learning Multiple Visual Domains with Residual Adapters." *Advances in Neural Information Processing Systems (NeurIPS)* 30.

Reddi, Vijay Janapa, Christine Cheng, David Kanter, Peter Mattson, Guenther Schmuelling, Carole-Jean Wu, Brian Anderson, et al. 2019. "MLPerf Inference Benchmark." *2020 ACM/IEEE 47th Annual International Symposium on Computer Architecture (ISCA)*, 446–59. https://doi.org/10.1109/isca45697.2020.00045.

Reddi, Vijay Janapa, and Meeta Sharma Gupta. 2013. *Resilient Architecture Design for Voltage Variation*. Synthesis Lectures on Computer Architecture. Springer International Publishing. https://doi.org/10.1007/978-3-031-01739-1.

Reed, I. S., and G. Solomon. 1960. "Polynomial Codes over Certain Finite Fields." *Journal of the Society for Industrial and Applied Mathematics* 8 (2): 300–304. https://doi.org/10.1137/0108018.

Regenscheid, Andrew. 2018. *Platform Firmware Resiliency Guidelines*. NIST SP 800-193. National Institute of Standards; Technology. https://doi.org/10.6028/NIST.SP.800-193.

Reuters. 2023. *Human-Machine Teams Driven by AI Are about to Reshape Warfare*. Reuters news article.

Rhodes, Christopher J. 2019. "Endangered Elements, Critical Raw Materials and Conflict Minerals." *Science Progress* 102 (4): 304–50. https://doi.org/10.1177/0036850419884873.

Ribeiro, M. H., R. Ottoni, R. West, V. A. F. Almeida, and Jr. Meira Wagner. 2020. "Auditing Radicalization Pathways on YouTube." *Proceedings of the 2020 Conference on Fairness, Accountability, and Transparency*, 131–41. https://doi.org/10.1145/3351095.3372879.

Ribeiro, Marco Tulio, Sameer Singh, and Carlos Guestrin. 2016. "Why Should I Trust You?: Explaining the Predictions of Any Classifier." *Proceedings of the 22nd ACM SIGKDD International Conference on Knowledge Discovery and Data Mining*, 1135–44. https://doi.org/10.1145/2939672.2939778.

Robertson, J., and M. Riley. 2018. *The Big Hack: How China Used a Tiny Chip to Infiltrate U.S. Companies - Bloomberg*.

Rodio, Angelo, and Giovanni Neglia. 2024. "FedStale: Leveraging Stale Client Updates in Federated Learning." *Frontiers in Artificial Intelligence and Applications (ECAI 2024)* 78. https://doi.org/10.3233/faia240849.

Rolnick, David, Arun Ahuja, Jonathan Schwarz, Timothy Lillicrap, and Greg Wayne. 2019. "Experience Replay for Continual Learning." *Advances in Neural Information Processing Systems (NeurIPS)*.

Rubin, Donald B. 1980. "Randomization Analysis of Experimental Data: The Fisher Randomization Test Comment." *Journal of the American Statistical Association* 75 (371): 591–93. https://doi.org/10.2307/2287650.

Rudin, C. 2019. "Stop Explaining Black Box Machine Learning Models for High Stakes Decisions and Use Interpretable Models Instead." *Nature Machine Intelligence* 1 (5): 206–15. https://doi.org/10.1038/s42256-019-0048-x.

Russell, Jon. 2018. "Strava Says It Will Simplify Privacy Settings and Review App Features After Exposing Military Bases." *TechCrunch*, January.

Russell, S. 2021. "Human-Compatible Artificial Intelligence." In *Human-Like Machine Intelligence*. Oxford University Press. https://doi.org/10.1093/oso/9780198862536.003.0001.

Rusu, A. A., N. C. Rabinowitz, G. Desjardins, H. Soyer, J. Kirkpatrick, K. Kavukcuoglu, R. Pascanu, and R. Hadsell. 2016. "Progressive Neural Networks." *arXiv Preprint arXiv:1606.04671*.

Ryan, R. M., and E. L. Deci. 2000. "Self-Determination Theory and the Facilitation of Intrinsic Motivation, Social Development, and Well-Being." *American Psychologist* 55 (1): 68–78. https://doi.org/10.1037/0003-066x.55.1.68.

Saltzer, J. H., and M. D. Schroeder. 1975. "The Protection of Information in Computer Systems." *Proceedings of the IEEE* 63 (9): 1278–308. https://doi.org/10.1109/proc.1975.9939.

Sandler, Mark, Andrew Howard, Menglong Zhu, Andrey Zhmoginov, and Liang-Chieh Chen. 2018. "MobileNetV2: Inverted Residuals and Linear Bottlenecks." *2018 IEEE/CVF Conference on Computer Vision and Pattern Recognition*, 4510–20. https://doi.org/10.1109/cvpr.2018.00474.

Sangchoolie, Behrooz, Karthik Pattabiraman, and Johan Karlsson. 2017. "One Bit Is (Not) Enough: An Empirical Study of the Impact of Single and Multiple Bit-Flip Errors." *2017 47th Annual IEEE/IFIP International Conference on Dependable Systems and Networks (DSN)*, 97–108. https://doi.org/10.1109/dsn.2017.30.

Sanh, Victor, Lysandre Debut, Julien Chaumond, and Thomas Wolf. 2019. "DistilBERT, a Distilled Version of BERT: Smaller, Faster, Cheaper and Lighter." *arXiv Preprint arXiv:1910.01108*, ahead of print. https://doi.org/10.48550/arXiv.1910.01108.

Schaeffer, Rylan, Brando Miranda, and Sanmi Koyejo. 2023. "Are Emergent Abilities of Large Language Models a Mirage?" *Advances in Neural Information Processing Systems (NeurIPS)*, 55565–81. https://doi.org/10.52202/075280-2425.

Schäfer, Mike S. 2023. "The Notorious GPT: Science Communication in the Age of Artificial Intelligence." *Journal of Science Communication* 22 (02): Y02. https://doi.org/10.22323/2.22020402.

Schmidt, Victor, Kamal Goyal, Aditya Joshi, Boris Feld, Liam Conell, Nikolas Laskaris, Doug Blank, Jonathan Wilson, Sorelle Friedler, and Sasha Luccioni. 2021. *CodeCarbon: Estimate and Track Carbon Emissions from Machine Learning Computing*. Zenodo software citation. https://doi.org/10.5281/zenodo.4658424.

Schmuck, Frank, and Roger Haskin. 2002. "GPFS: A Shared-Disk File System for Large Computing Clusters." *Proceedings of the USENIX Conference on File and Storage Technologies (FAST '02)*, 231–44.

Schneider Electric. 2024. *Schneider Electric Announces New Solutions to Address the Energy and Sustainability Challenges Spurred by AI*.

Schroeder, Bianca, Eduardo Pinheiro, and Wolf-Dietrich Weber. 2009. "DRAM Errors in the Wild: A Large-Scale Field Study." *ACM SIGMETRICS Performance Evaluation Review* 37 (1): 193–204. https://doi.org/10.1145/2492101.1555372.

Schulman, John, Filip Wolski, Prafulla Dhariwal, Alec Radford, and Oleg Klimov. 2017. "Proximal Policy Optimization Algorithms." *arXiv Preprint arXiv:1707.06347*, ahead of print. https://doi.org/10.48550/arXiv.1707.06347.

Schwan, P. 2003. "Lustre: Building a File System for 1,000-Node Clusters." *Proceedings of the 2003 Linux Symposium*, 380–86.

Schwartz, Roy, Jesse Dodge, Noah A. Smith, and Oren Etzioni. 2020. "Green AI." *Communications of the ACM* 63 (12): 54–63. https://doi.org/10.1145/3381831.

Sculley, D., Gary Holt, Daniel Golovin, Eugene Davydov, Todd Phillips, Dietmar Ebner, Vinay Chaudhary, Michael Young, Jean-François Crespo, and Dan Dennison. 2015. "Hidden Technical Debt in Machine Learning Systems." *Advances in Neural Information Processing Systems (NeurIPS)* 28: 2503–11.

Seide, Frank, Hao Fu, Jasha Droppo, Gang Li, and Dong Yu. 2014. "1-Bit Stochastic Gradient Descent and Its Application to Data-Parallel Distributed Training of Speech DNNs." *Interspeech 2014*, 1058–62. https://doi.org/10.21437/interspeech.2014-274.

Selvaraju, R. R., M. Cogswell, A. Das, R. Vedantam, D. Parikh, and D. Batra. 2017. "Grad-CAM: Visual Explanations from Deep Networks via Gradient-Based Localization." *2017 IEEE International Conference on Computer Vision (ICCV)*, 618–26. https://doi.org/10.1109/iccv.2017.74.

Seong, N. H., D. H. Woo, V. Srinivasan, J. A. Rivers, and H.-H. S. Lee. 2010. "SAFER: Stuck-at-Fault Error Recovery for Memories." *2010 43rd Annual IEEE/ACM International Symposium on Microarchitecture*, 115–24. https://doi.org/10.1109/micro.2010.46.

Sergeev, Alexander, and Mike Del Balso. 2018. "Horovod: Fast and Easy Distributed Deep Learning in TensorFlow." *CoRR* abs/1802.05799.

Sevilla, Jaime, Lennart Heim, Anson Ho, Tamay Besiroglu, Marius Hobbhahn, and Pablo Villalobos. 2022. "Compute Trends Across Three Eras of Machine Learning." *2022 International Joint Conference on Neural Networks (IJCNN)*, 1–8. https://doi.org/10.1109/ijcnn55064.2022.9891914.

Shafahi, Ali, W. Ronny Huang, Mahyar Najibi, Octavian Suciu, Christoph Studer, Tudor Dumitras, and Tom Goldstein. 2018. "Poison Frogs! Targeted Clean-Label Poisoning Attacks on Neural Networks." *Advances in Neural Information Processing Systems* 31.

Shafahi, Ali, Mahyar Najibi, Amin Ghiasi, Zheng Xu, John Dickerson, Christoph Studer, Larry S. Davis, Gavin Taylor, and Tom Goldstein. 2019. "Adversarial Training for Free!" *arXiv Preprint arXiv:1904.12843*, ahead of print. https://doi.org/10.48550/arXiv.1904.12843.

Shalev-Shwartz, S. 2012. "Online Learning and Online Convex Optimization." *Foundations and Trends in Machine Learning* 4 (2): 107–94. https://doi.org/10.1561/2200000018.

Shalev-Shwartz, Shai, Shaked Shammah, and Amnon Shashua. 2017. "On a Formal Model of Safe and Scalable Self-Driving Cars." *ArXiv Preprint* abs/1708.06374.

Shallue, Christopher J, Jaehoon Lee, Joseph Antognini, Jascha Sohl-Dickstein, Roy Frostig, and George E Dahl. 2019. "Measuring the Effects of Data Parallelism on Neural Network Training." *Journal of Machine Learning Research* 20: 1–49.

Shan, S., W. Ding, J. Passananti, S. Wu, H. Zheng, and B. Y. Zhao. 2023. "Nightshade: Prompt-Specific Poisoning Attacks on Text-to-Image Generative Models." *2024 IEEE Symposium on Security and Privacy (SP)* abs/2310.13828: 807–25. https://doi.org/10.1109/sp54263.2024.00207.

Shazeer, Noam, Azalia Mirhoseini, Krzysztof Maziarz, Andy Davis, Quoc Le, Geoffrey Hinton, and Jeff Dean. 2017. "Outrageously Large Neural Networks: The Sparsely-Gated Mixture-of-Experts Layer." *International Conference on Learning Representations (ICLR)*.

Sheaffer, J. W., D. P. Luebke, and K. Skadron. 2007. "A Hardware Redundancy and Recovery Mechanism for Reliable Scientific Computation on Graphics Processors." *Graphics Hardware* 2007: 55–64. https://doi.org/10.2312/eggh/eggh07/055-064.

Sheng, Ying, Shiyi Cao, Dacheng Li, Coleman Hooper, Shuo Chen, Daxin Jiang, Christopher Rodriguez, et al. 2024. "S-LoRA: Serving Thousands of Concurrent LoRA Adapters." *Proceedings of the 7th Conference on Machine Learning and Systems (MLSys)*.

Shewhart, Walter A. 1931. *Economic Control of Quality of Manufactured Product*. D. Van Nostrand Company.

Shneiderman, B. 2020. "Bridging the Gap Between Ethics and Practice: Guidelines for Reliable, Safe, and Trustworthy Human-Centered AI Systems." *ACM Transactions on Interactive Intelligent Systems* 10 (4): 1–31. https://doi.org/10.1145/3419764.

Shneiderman, B. 2022. *Human-Centered AI*. Oxford University Press. https://doi.org/10.1093/oso/9780192845290.001.0001.

Shoeybi, Mohammad, Mostofa Patwary, Raul Puri, Patrick LeGresley, Jared Casper, and Bryan Catanzaro. 2019. "Megatron-LM: Training Multi-Billion Parameter Language Models Using Model Parallelism." *arXiv Preprint arXiv:1909.08053*.

Shokri, Reza, Marco Stronati, Congzheng Song, and Vitaly Shmatikov. 2017. "Membership Inference Attacks Against Machine Learning Models." *2017 IEEE Symposium on Security and Privacy (SP)*, 3–18. https://doi.org/10.1109/SP.2017.41.

Shumailov, Ilia, Zakhar Shumaylov, Yiren Zhao, Nicolas Papernot, Ross Anderson, and Yarin Gal. 2024. "AI Models Collapse When Trained on Recursively Generated Data." *Nature* 631 (8022): 755–59. https://doi.org/10.1038/s41586-024-07566-y.

Sigelman, Benjamin H, Luiz André Barroso, Mike Burrows, Pat Stephenson, Manoj Plakal, Donald Beaver, Saul Jaspan, and Chandan Shanbhag. 2010. *Dapper, a Large-Scale Distributed Systems Tracing Infrastructure*. Dapper-2010-1. Google.

Sigler, Eric. 2021. *Scaling Kubernetes to 7,500 Nodes*. OpenAI Blog.

Singh, Narendra, and Oladele A. Ogunseitan. 2022. "Disentangling the Worldwide Web of e-Waste and Climate Change Co-Benefits." *Circular Economy* 1 (2): 100011. https://doi.org/10.1016/j.cec.2022.100011.

Skorobogatov, S. 2009. "Local Heating Attacks on Flash Memory Devices." *2009 IEEE International Workshop on Hardware-Oriented Security and Trust*, 1–6. https://doi.org/10.1109/hst.2009.5225028.

Skorobogatov, S. P., and R. J. Anderson. 2003. "Optical Fault Induction Attacks." In *Cryptographic Hardware and Embedded Systems - CHES 2002*. Springer Berlin Heidelberg. https://doi.org/10.1007/3-540-36400-5_2.

Slade, G. 2007. *Made to Break: Technology and Obsolescence in America*. Harvard University Press. https://doi.org/10.4159/9780674043756.

Song, Liwei, Reza Shokri, and Prateek Mittal. 2019. "Privacy Risks of Securing Machine Learning Models Against Adversarial Examples." *Proceedings of the 2019 ACM SIGSAC Conference on Computer and Communications Security*, 241–57. https://doi.org/10.1145/3319535.3354211.

Sridharan, V., N. DeBardeleben, S. Blanchard, K. B. Ferreira, J. Stearley, J. Shalf, and S. Gurumurthi. 2015. "Memory Errors in Modern Systems: The Good, the Bad, and the Ugly." *ACM SIGPLAN Notices* 50 (4): 297–310. https://doi.org/10.1145/2775054.2694348.

Stahel, Walter R. 2016. "The Circular Economy." *Nature* 531 (7595): 435–38. https://doi.org/10.1038/531435a.

Statista. 2022. *Number of Internet of Things (IoT) Connected Devices Worldwide from 2019 to 2030*.

Steck, Harald, Linas Baltrunas, Ehtsham Elahi, Dawen Liang, Yves Raimond, and Justin Basilico. 2021. "Deep Learning for Recommender Systems: A Netflix Case Study." *AI Magazine* 42 (3): 7–18. https://doi.org/10.1609/aimag.v42i3.18140.

Stich, S. U., J.-B. Cordonnier, and M. Jaggi. 2018. "Sparsified SGD with Memory." *Advances in Neural Information Processing Systems* 31.

Stich, Sebastian U. 2019. "Local SGD Converges Fast and Communicates Little." *International Conference on Learning Representations (ICLR)*.

Stoica, Ion, Dawn Song, Raluca Ada Popa, David Patterson, Michael W. Mahoney, Randy Katz, Anthony D. Joseph, et al. 2017. "A Berkeley View of Systems Challenges for AI." *arXiv Preprint arXiv:1712.05855*.

Strubell, Emma, Ananya Ganesh, and Andrew McCallum. 2019. "Energy and Policy Considerations for Deep Learning in NLP." *Proceedings of the 57th Annual Meeting of the Association for Computational Linguistics*, 3645–50. https://doi.org/10.18653/v1/p19-1355.

Subramanya, Suhas Jayaram, Fnu Devvrit, Harsha Vardhan Simhadri, Ravishankar Krishnawamy, and Rohan Kadekodi. 2019. "DiskANN: Fast Accurate Billion-Point Nearest Neighbor Search on a Single Node." *Advances in Neural Information Processing Systems (NeurIPS)* 32.

Sudhakar, Soumya, Vivienne Sze, and Sertac Karaman. 2023. "Data Centers on Wheels: Emissions from Computing Onboard Autonomous Vehicles." *IEEE Micro* 43 (1): 29–39. https://doi.org/10.1109/mm.2022.3219803.

Sundararajan, Mukund, Ankur Taly, and Qiqi Yan. 2017. "Axiomatic Attribution for Deep Networks." *International Conference on Machine Learning (ICML)*, Proceedings of machine learning research, vol. 70: 3319–28.

Sutton, Richard S. 2019. "The Bitter Lesson." *Incompleteideas.net* 43.

Sweeney, Latanya. 2002. "K-ANONYMITY: A MODEL for PROTECTING PRIVACY." *International Journal of Uncertainty, Fuzziness and Knowledge-Based Systems* 10 (05): 557–70. https://doi.org/10.1142/s0218488502001648.

Systems, Cerebras. 2021. "Wafer-Scale Deep Learning Acceleration with the Cerebras CS-2." *Cerebras Technical Paper* 2021.

Szegedy, Christian, Wojciech Zaremba, Ilya Sutskever, Joan Bruna, Dumitru Erhan, Ian Goodfellow, and Rob Fergus. 2013. "Intriguing Properties of Neural Networks." *arXiv Preprint arXiv:1312.6199*.

Tabassi, Elham. 2023. *Artificial Intelligence Risk Management Framework (AI RMF 1.0)*. NIST AI 100-1. National Institute of Standards; Technology. https://doi.org/10.6028/NIST.AI.100-1.

Tan, Mingxing, and Quoc V Le. 2019. "EfficientNet: Rethinking Model Scaling for Convolutional Neural Networks." *International Conference on Machine Learning (ICML)*, 6105–14.

Tang, Hanlin, Shaoduo Gan, Ammar Ahmad Awan, Samyam Rajbhandari, Conglong Li, Xiangru Lian, Ji Liu, Ce Zhang, and Yuxiong He. 2021. "1-Bit Adam: Communication Efficient Large-Scale Training with Adam's Convergence Speed." *Proceedings of the 38th International Conference on Machine Learning (ICML)*, Proceedings of machine learning research, vol. 139: 10118–29.

Thakur, Rajeev, Rolf Rabenseifner, and William Gropp. 2005. "Optimization of Collective Communication Operations in MPICH." *The International Journal of High Performance Computing Applications* 19 (1): 49–66. https://doi.org/10.1177/1094342005051521.

The Green Grid. 2007. *Green Grid Data Center Power Efficiency Metrics: PUE and DCIE*. The Green Grid.

The Green Grid. 2011. *Water Usage Effectiveness (WUE): A Green Grid Data Center Sustainability Metric*. White Paper 35. The Green Grid.

The New York Times. 2017. *Google's Self-Driving Car Company Sues Uber over Trade Secrets*. The New York Times.

Thompson, N. C., K. Greenewald, K. Lee, and G. F. Manso. 2021. "Deep Learning's Diminishing Returns: The Cost of Improvement Is Becoming Unsustainable." *IEEE Spectrum* 58 (10): 50–55. https://doi.org/10.1109/mspec.2021.9563954.

Tillet, Philippe, H. T. Kung, and David Cox. 2019. "Triton: An Intermediate Language and Compiler for Tiled Neural Network Computations." *Proceedings of the 3rd ACM SIGPLAN International Workshop on Machine Learning and Programming Languages*, 10–19. https://doi.org/10.1145/3315508.3329973.

Tiwari, Devesh, Saurabh Gupta, James Rogers, Don Maxwell, Paolo Rech, Sudharshan Vazhkudai, Daniel Oliveira, et al. 2015. "Understanding GPU Errors on Large-Scale HPC Systems and the Implications for System Design and Operation." *2015 IEEE 21st International Symposium on High Performance Computer Architecture (HPCA)*, 331–42. https://doi.org/10.1109/hpca.2015.7056044.

Touvron, Hugo, Louis Martin, Kevin Stone, Peter Albert, Amjad Almahairi, Yasmine Babaei, Nikolay Bashlykov, et al. 2023. "Llama 2: Open Foundation and Fine-Tuned Chat Models." *arXiv Preprint arXiv:2307.09288*.

Tramèr, Florian, Alexey Kurakin, Nicolas Papernot, Ian Goodfellow, Dan Boneh, and Patrick McDaniel. 2017. "Ensemble Adversarial Training: Attacks and Defenses." *International Conference on Learning Representations* abs/1705.07204.

Tramèr, Florian, Fan Zhang, Ari Juels, Michael K Reiter, and Thomas Ristenpart. 2016. "Stealing Machine Learning Models via Prediction APIs." *25th USENIX Security Symposium (USENIX Security 16)*, 601–18.

Tran, Brandon, Jerry Li, and Aleksander Madry. 2018. "Spectral Signatures in Backdoor Attacks." *Advances in Neural Information Processing Systems (NeurIPS)*.

Trusted Computing Group. 2018. *Hardware Requirements for a Device Identifier Composition Engine*. Family 2.0, Level 00, Revision 78. Trusted Computing Group.

Tsai, Min-Jen, Ping-Yi Lin, and Ming-En Lee. 2023. "Adversarial Attacks on Medical Image Classification." *Cancers* 15 (17): 4228. https://doi.org/10.3390/cancers15174228.

Tsai, Timothy, Siva Kumar Sastry Hari, Michael Sullivan, Oreste Villa, and Stephen W. Keckler. 2021. "NVBitFI: Dynamic Fault Injection for GPUs." *2021 51st Annual IEEE/IFIP International Conference on Dependable Systems and Networks (DSN)*, 284–91. https://doi.org/10.1109/dsn48987.2021.00041.

Uddin, Mueen, and Azizah Abdul Rahman. 2012. "Energy Efficiency and Low Carbon Enabler Green IT Framework for Data Centers Considering Green Metrics." *Renewable and Sustainable Energy Reviews* 16 (6): 4078–94. https://doi.org/10.1016/j.rser.2012.03.014.

Ultra Ethernet Consortium. 2025. *Ultra Ethernet Specification V1.0*. Ultra Ethernet Consortium.

UNESCO. 2022. *Recommendation on the Ethics of Artificial Intelligence*. UNESCO.

United States Congress. 2022. *CHIPS and Science Act of 2022 (Public Law 117-167)*. Public Law 117-167, 136 Stat. 1366.

Uptime Institute. 2022. *Uptime Institute Global Data Center Survey 2022*. Uptime Institute.

Uptime Institute. 2026. *Tier Classification System*. Uptime Institute web page.

U.S. Department of Health and Human Services. 2003. "Summary of the HIPAA Privacy Rule."

U.S. Department of Health and Human Services. 2005. "Summary of the HIPAA Security Rule."

U.S. Department of Health and Human Services. 2026. *The HIPAA Security Rule*. HHS.gov guidance.

Valiant, Leslie G. 1990. "A Bridging Model for Parallel Computation." *Communications of the ACM* 33 (8): 103–11. https://doi.org/10.1145/79173.79181.

Velazco, Raoul, Gilles Foucard, and Paul Peronnard. 2010. "Combining Results of Accelerated Radiation Tests and Fault Injections to Predict the Error Rate of an Application Implemented in SRAM-Based FPGAs." *IEEE Transactions on Nuclear Science* 57 (6): 3500–3505. https://doi.org/10.1109/tns.2010.2087355.

Villalobos, Pablo, Anson Ho, Jaime Sevilla, Tamay Besiroglu, Lennart Heim, and Marius Hobbhahn. 2024. "Will We Run Out of Data? Limits of LLM Scaling Based on Human-Generated Data." *arXiv Preprint arXiv:2211.04325*.

Vinuesa, Ricardo, Hossein Azizpour, Iolanda Leite, Madeline Balaam, Virginia Dignum, Sami Domisch, Anna Felländer, Simone Daniela Langhans, Max Tegmark, and Francesco Fuso Nerini. 2020. "The Role of Artificial Intelligence in Achieving the Sustainable Development Goals." *Nature Communications* 11 (1): 233. https://doi.org/10.1038/s41467-019-14108-y.

Vogels, Thijs, Sai Praneeth Karimireddy, and Martin Jaggi. 2019. "PowerSGD: Practical Low-Rank Gradient Compression for Distributed Optimization." *Advances in Neural Information Processing Systems (NeurIPS)* 32.

Wachter, Sandra, Brent Mittelstadt, and Chris Russell. 2017. "Counterfactual Explanations Without Opening the Black Box: Automated Decisions and the GDPR." *SSRN Electronic Journal* 31: 841. https://doi.org/10.2139/ssrn.3063289.

Wang, Jianyu, Zachary Charles, Zheng Xu, Gauri Joshi, H. Brendan McMahan, Blaise Aguera y Arcas, Maruan Al-Shedivat, et al. 2021. "A Field Guide to Federated Optimization." *arXiv Preprint arXiv:2107.06917*.

Wang, Y., Q. Yao, J. T. Kwok, and L. M. Ni. 2020. "Generalizing from a Few Examples: A Survey on Few-Shot Learning." *ACM Computing Surveys* 53 (3): 1–34. https://doi.org/10.1145/3386252.

Warden, Pete. 2018. "Speech Commands: A Dataset for Limited-Vocabulary Speech Recognition." *arXiv Preprint arXiv:1804.03209*, ahead of print. https://doi.org/10.48550/arXiv.1804.03209.

Warden, Pete, and Daniel Situnayake. 2020. *TinyML: Machine Learning with TensorFlow Lite on Arduino and Ultra-Low-Power Microcontrollers*. O'Reilly Media.

Wei, Jason, Yi Tay, Rishi Bommasani, Colin Raffel, Barret Zoph, Sebastian Borgeaud, Dani Yogatama, et al. 2022. "Emergent Abilities of Large Language Models." *Transactions on Machine Learning Research* 4. https://doi.org/10.48550/arXiv.2206.07682.

Widmer, Gerhard, and Miroslav Kubat. 1996. "Learning in the Presence of Concept Drift and Hidden Contexts." *Machine Learning* 23 (1): 69–101. https://doi.org/10.1023/a:1018046501280.

Wiener, N. 1960. "Some Moral and Technical Consequences of Automation: As Machines Learn They May Develop Unforeseen Strategies at Rates That Baffle Their Programmers." *Science* 131 (3410): 1355–58. https://doi.org/10.1126/science.131.3410.1355.

Williams, Samuel, Andrew Waterman, and David Patterson. 2009. "Roofline: An Insightful Visual Performance Model for Multicore Architectures." *Communications of the ACM* 52 (4): 65–76. https://doi.org/10.1145/1498765.1498785.

Wongpanich, A., T. Oguntebi, J. Baiocchi Paredes, Y. E. Wang, P. M. Phothilimthana, R. Mitra, Z. Zhou, N. Kumar, and V. J. Reddi. 2025. *Machine Learning Fleet Efficiency: Analyzing and Optimizing Large-Scale Google TPU Systems with ML Productivity Goodput*.

Work of the Future, MIT Task Force on the. 2020. *The Work of the Future: Building Better Jobs in an Age of Intelligent Machines*. Massachusetts Institute of Technology.

World Resources Institute, and World Business Council for Sustainable Development. 2023. *Greenhouse Gas Protocol: Corporate Standard*.

Wright, Peter, and Paul Greengrass. 1987. *Spycatcher: The Candid Autobiography of a Senior Intelligence Officer*. Viking Penguin.

Wu, Carole-Jean, Ramya Raghavendra, Udit Gupta, Bilge Acun, Newsha Ardalani, Kiwan Maeng, Gloria Chang, et al. 2022. "Sustainable AI: Environmental Implications, Challenges and Opportunities." *Proceedings of Machine Learning and Systems* 4: 795–813.

Wulf, Wm. A., and Sally A. McKee. 1995. "Hitting the Memory Wall: Implications of the Obvious." *ACM SIGARCH Computer Architecture News* 23 (1): 20–24. https://doi.org/10.1145/216585.216588.

Wynsberghe, Aimee van. 2021. "Sustainable AI: AI for Sustainability and the Sustainability of AI." *AI and Ethics* 1: 213–18. https://doi.org/10.1007/s43681-021-00043-6.

Xiao, Guangxuan, Ji Lin, Mickaël Seznec, Hao Wu, Julien Demouth, and Song Han. 2023. "SmoothQuant: Accurate and Efficient Post-Training Quantization for Large Language Models." *International Conference on Machine Learning (ICML)*, 38087–99.

Xiao, Wencong, Romil Bhardwaj, Ramachandran Ramjee, Muthian Sivathanu, Nipun Kwatra, Zhenhua Han, Prabal Patel, et al. 2018. "Gandiva: Introspective Cluster Scheduling for Deep Learning." *13th USENIX Symposium on Operating Systems Design and Implementation (OSDI 18)*, 595–610.

Xu, Dianlei, Tong Li, Yong Li, Xiang Su, Sasu Tarkoma, Tao Jiang, Jon Crowcroft, and Pan Hui. 2020. "Edge Intelligence: Architectures, Challenges, and Applications." *arXiv Preprint arXiv:2003.12172*.

Xu, Weilin, David Evans, and Yanjun Qi. 2018. "Feature Squeezing: Detecting Adversarial Examples in Deep Neural Networks." *Proceedings 2018 Network and Distributed System Security Symposium* 26. https://doi.org/10.14722/ndss.2018.23198.

Yao, Andrew C. 1982. "Protocols for Secure Computations." *23rd Annual Symposium on Foundations of Computer Science (Sfcs 1982)*, 160–64. https://doi.org/10.1109/sfcs.1982.38.

Yin, Dong, Yudong Chen, Kannan Ramchandran, and Peter Bartlett. 2018. "Byzantine-Robust Distributed Learning: Towards Optimal Statistical Rates." *International Conference on Machine Learning (ICML)*, 5650–59.

Yin, Shuang, Xiang Zhou, and Cedric Lam. 2022. *FEC Requirements for 800GbE/1.6TbE Optics: An Operator's Perspective*. IEEE 802.3df Task Force.

Yoo, A. B., M. A. Jette, and M. Grondona. 2003. "SLURM: Simple Linux Utility for Resource Management." In *Job Scheduling Strategies for Parallel Processing*. Springer Berlin Heidelberg. https://doi.org/10.1007/10968987_3.

You, Jie, Jae-Won Chung, and Mosharaf Chowdhury. 2023. "Zeus: Understanding and Optimizing GPU Energy Consumption of DNN Training." *20th USENIX Symposium on Networked Systems Design and Implementation (NSDI 23)*, 119–39.

You, Yang, Igor Gitman, and Boris Ginsburg. 2017. "Large Batch Training of Convolutional Networks." *arXiv Preprint arXiv:1708.03888*.

You, Y., J. Li, S. Reddi, J. Hseu, S. Kumar, S. Bhojanapalli, X. Song, J. Demmel, K. Keutzer, and C.-J. Hsieh. 2020. "Large Batch Optimization for Deep Learning: Training BERT in 76 Minutes." *International Conference on Learning Representations (ICLR)*.

Young, John W. 1974. "A First Order Approximation to the Optimum Checkpoint Interval." *Communications of the ACM* 17 (9): 530–31. https://doi.org/10.1145/361147.361115.

Yu, Gyeong-In, Joo Seong Jeong, Geon-Woo Kim, Soojeong Kim, and Byung-Gon Chun. 2022. "Orca: A Distributed Serving System for Transformer-Based Generative Models." *16th USENIX Symposium on Operating Systems Design and Implementation (OSDI 22)*, 521–38.

Yurdakul, Bilal, and Joshua Naranjo. 2020. "Statistical Properties of the Population Stability Index." *The Journal of Risk Model Validation* 52. https://doi.org/10.21314/jrmv.2020.227.

Zafrir, Ofir, Guy Boudoukh, Peter Izsak, and Moshe Wasserblat. 2019. "Q8BERT: Quantized 8Bit BERT." *2019 Fifth Workshop on Energy Efficient Machine Learning and Cognitive Computing - NeurIPS Edition (EMC2-NIPS)*, 36–39. https://doi.org/10.1109/emc2-nips53020.2019.00016.

Zaharia, Matei, Andrew Chen, Aaron Davidson, Ali Ghodsi, Sue Ann Hong, Andy Konwinski, Siddharth Murching, et al. 2018. "Accelerating the Machine Learning Lifecycle with MLflow." *IEEE Data Engineering Bulletin* 41 (4): 39–45.

Zaharia, M., R. S. Xin, P. Wendell, T. Das, M. Armbrust, A. Dave, X. Meng, et al. 2016. "Apache Spark: A Unified Engine for Big Data Processing." *Communications of the ACM* 59 (11): 56–65. https://doi.org/10.1145/2934664.

Zhang, Jeff, Kartheek Rangineni, Zahra Ghodsi, and Siddharth Garg. 2018. "ThUnderVolt: Enabling Aggressive Voltage Underscaling and Timing Error Resilience for Energy Efficient Deep Learning Accelerators." *2018 55th ACM/ESDA/IEEE Design Automation Conference (DAC)*, 1–6. https://doi.org/10.1109/dac.2018.8465918.

Zhang, Susan, Stephen Roller, Naman Goyal, Mikel Artetxe, Moya Chen, Shuohui Chen, Christopher Dewan, et al. 2022. *OPT: Open Pre-Trained Transformer Language Models*.

Zhao, M., and G. E. Suh. 2018. "FPGA-Based Remote Power Side-Channel Attacks." *2018 IEEE Symposium on Security and Privacy (SP)*, 229–44. https://doi.org/10.1109/sp.2018.00049.

Zhao, Yanli, Andrew Gu, Rohan Varma, Liang Luo, Chien-Chin Huang, Min Xu, Less Wright, et al. 2023. "PyTorch FSDP: Experiences on Scaling Fully Sharded Data Parallel." *Proceedings of the VLDB Endowment* 16 (12): 3848–60. https://doi.org/10.14778/3611540.3611569.

Zhao, Yue, Meng Li, Liangzhen Lai, Naveen Suda, Damon Civin, and Vikas Chandra. 2018. "Federated Learning with Non-IID Data." *CoRR* abs/1806.00582.

Zhong, Yinmin, Shengyu Liu, Junda Chen, Jianbo Hu, Yibo Zhu, Xuanzhe Liu, Xin Jin, and Hao Zhang. 2024. "DistServe: Disaggregating Prefill and Decoding for Goodput-Optimized Large Language Model Serving." *18th USENIX Symposium on Operating Systems Design and Implementation (OSDI 24)*, July, 193–210.

Zhu, Ligeng, Zhijian Liu, and Song Han. 2019. "Deep Leakage from Gradients." *Advances in Neural Information Processing Systems (NeurIPS)* 32: 14774–84.

Zhu, Y., H. Eran, D. Firestone, C. Guo, M. Lipshteyn, Y. Liron, J. Padhye, S. Raindel, M. H. Yahia, and M. Zhang. 2015. "Congestion Control for Large-Scale RDMA Deployments." *ACM SIGCOMM Computer Communication Review* 45 (4): 523–36. https://doi.org/10.1145/2829988.2787484.

Ziegler, J. F., H. W. Curtis, H. P. Muhlfeld, C. J. Montrose, B. Chin, M. Nicewicz, C. A. Russell, et al. 1996. "IBM Experiments in Soft Fails in Computer Electronics (1978–1994)." *IBM Journal of Research and Development* 40 (1): 3–18. https://doi.org/10.1147/rd.401.0003.

Zou, Andy, Zifan Wang, Nicholas Carlini, Milad Nasr, J. Zico Kolter, and Matt Fredrikson. 2023. *Universal and Transferable Adversarial Attacks on Aligned Language Models*.

Zu, Y., A. Ghaffarkhah, H.-V. Dang, B. Towles, S. Hand, S. Huda, A. Bello, et al. 2024. "Resiliency at Scale: Managing Google's TPUv4 Machine Learning Supercomputer." *21st USENIX Symposium on Networked Systems Design and Implementation (NSDI 24)*, 761–74.

Single-Machine Foundations

Every fleet is built from single machines, and this book assumes that the reader already reasons fluently about one of them. This appendix restates that single-machine foundation in reference form so that a reader who meets the prerequisites only loosely can work every calculation in the book without another text. It collects the Data, Algorithm, and Machine (D·A·M) diagnostic framework and the iron law it rests on, arithmetic intensity and the roofline bound, the accelerator memory hierarchy, the byte accounting of mixed-precision training, and the arithmetic of transformer training and inference. The chapters build the fleet-scale Compute, Communication, and Coordination (C^3) framework on this base.

Learning Objectives

- Classify single-machine bottlenecks by dominant Data, Algorithm, or Machine axis while recognizing mixed causes
- Map optimization techniques to their D·A·M intersection zone to understand which axes they span
- Apply the iron law equation to quantitatively diagnose performance problems
- Distinguish between memory-bound and compute-bound workloads using arithmetic intensity and the roofline bound
- Calculate the per-parameter memory of mixed-precision training and the FLOPs of transformer training and decoding
- Select appropriate profiling tools and optimization strategies for each Data, Algorithm, or Machine axis
- Evaluate system health using D·A·M scorecard metrics (I/O overhead, active parameters, MFU)

How to Use This Appendix

This appendix is a reference for single-node performance and for the single-machine quantities that fleet-scale arguments take as given. Start from the symptom or the missing quantity:

- **When a single accelerator is slow**: Use the iron law mapping (section 2) and the bottleneck diagnostic (section 3) to decide which term binds.
- **When deciding whether a kernel is memory bound or compute bound**: Use the roofline bound (section 3).
- **When a byte must cross a memory boundary**: Use the memory hierarchy (section 3) to see which tier sets its cost.
- **When sizing model state**: Use the training memory accounting (section 3) for bytes per parameter.
- **When estimating training compute or decode cost**: Use transformer arithmetic (section 3).

When training is slow on a single GPU, check utilization, data wait time, and model FLOPs utilization (MFU), then map each to its Data, Algorithm, or Machine axis. When serving misses a latency target, identify whether the regime is latency-bound (overhead), memory-bound (weight/KV movement), or compute-bound. When cost is exploding, use the D·A·M rubric to ensure that effort targets the dominant term, not a nonbottleneck.

The Data · Algorithm · Machine (D·A·M) taxonomy is the diagnostic framework for single-node ML systems engineering. It formalizes the interdependence between information flow, mathematical logic, and physical execution. When performance stalls or behavior degrades, the first diagnostic question is where the flow is blocked. This taxonomy helps practitioners decompose bottlenecks across three diagnostic axes,[1] while recognizing that real systems can involve mixed causes or interactions between axes.

Diagnostic Summary

The taxonomy maps directly to the iron law of ML systems, introduced in section 11. Table .235 summarizes the role, primary physical constraint, and core optimization pathway for each axis.

Table .235: D·A·M Axis Reference: Each axis maps to a distinct physical constraint and a high-leverage optimization strategy. Start diagnosis here: identify which constraint is binding, then follow the optimization lever.

Axis	Role	Physical Constraint	High-Leverage Optimization
Data (D)	**Information** (The Fuel)	Bandwidth (BW)	I/O Pipeline Optimization

[1] **MECE (Mutually Exclusive, Collectively Exhaustive)**: A classification principle from management consulting (popularized by McKinsey) requiring that categories do not overlap and together cover every possibility. Applied to systems engineering, it is useful as an idealized decomposition, but D·A·M bottlenecks often overlap in practice: a kernel can be simultaneously memory-bound, synchronization-heavy, and poorly matched to available hardware.

Axis	Role	Physical Constraint	High-Leverage Optimization
Algorithm (A)	**Logic** (The Blueprint)	Operations (O)	Model Compression
Machine (M)	**Physics** (The Engine)	Throughput (R_{peak})	Hardware Acceleration

Iron Law Mapping

With the three axes named, the next step is to connect them to time. The performance of any ML task is governed by the distribution of work across the D·A·M axes, and the iron law mapping reveals which component's variables dominate execution:

$$T = \underbrace{\frac{D_{\text{vol}}}{\text{BW}}}_{\text{Data (D)}} + \underbrace{\frac{O}{R_{\text{peak}} \cdot \eta_{\text{hw}}}}_{\text{Algorithm (A)/Machine (M)}} + \underbrace{L_{\text{lat}}}_{\text{Overhead}}$$

Algorithm and Machine share the compute term and are separated by which variable the engineer controls. Reducing the total operations (O) is an algorithm lever, while improving the hardware's peak throughput (R_{peak}) or utilization (η_{hw}) is a machine lever.

D·A·M coordination from sum to max

The additive iron law represents **Sequential Execution**, the worst case where Data, Algorithm, and Machine take turns. Overlap can move the sum toward a max, with perfect overlap defining the ideal lower bound:

$$T_{\text{sequential}} = \frac{D_{\text{vol}}}{\text{BW}} + \frac{O}{R_{\text{peak}} \cdot \eta_{\text{hw}}} + L_{\text{lat}} \xrightarrow{\text{overlap}} T_{\text{pipelined}} \geq \max\left(\frac{D_{\text{vol}}}{\text{BW}}, \frac{O}{R_{\text{peak}} \cdot \eta_{\text{hw}}}\right) + L_{\text{lat}}$$

The systems engineer's job is to make these components run in parallel, not in series. Table .236 summarizes key D·A·M coordination techniques:

Table .236: D·A·M Overlap Techniques: Each technique allows one D·A·M axis to execute while another is in flight, converting the iron law's additive terms into overlapped terms.

Technique	D·A·M Axes Overlapped	Implementation
Prefetching	D overlaps M	DataLoader with `prefetch_factor`, `pin_memory=True`
CUDA Streams	D overlaps M	Separate streams for H2D transfer and compute
Async Gradient Sync	M (communication) overlaps A	Overlap gradient AllReduce with remaining backward computation as gradient buckets become ready
Double Buffering	D overlaps M	Fill buffer $i+1$ while computing on buffer i

Arithmetic Intensity Boundary

This overlap view still leaves one practical question: whether a workload is waiting on bytes or on FLOPs. The boundary between Data (memory bound) and Machine (compute bound) is not arbitrary; it is defined mathematically by arithmetic intensity[2] (I) of the workload.

The symptoms below are screening signals, not diagnoses. A workload whose arithmetic intensity sits left of $R_{\text{peak}}/\text{BW}$ cannot keep the accelerator fed with enough useful work per byte, but raw utilization must be read alongside memory-bandwidth utilization, data-loader wait, kernel occupancy, and trace gaps.

- **Low GPU utilization** (< 80 percent): Screen for data, CPU, or launch starvation. Confirm with data-loader wait, host CPU saturation, memory-bandwidth counters, and timeline gaps.
- **High GPU utilization** (> 95 percent): Treat this as machine bound only if compute units are busy and memory bandwidth is not saturated. If memory bandwidth is saturated, the bottleneck is still on the Data/Machine boundary.

[2] **Arithmetic Intensity**: The ratio of floating-point operations to bytes transferred (FLOP/byte). It determines whether a workload is memory-bound or compute-bound by comparison against the hardware's *ridge point* ($R_{\text{peak}}/\text{BW}$).

- **If batch size is 1**: Treat this as a warning that latency or launch overhead may matter. For large language model (LLM) decode, batch-1 execution is often memory-bandwidth bound unless traces show dispatch gaps.
- **If arithmetic intensity is below the ridge point** (about 295.2 FLOP/byte on H100): The workload is likely memory bound (Data/Machine boundary).

The roofline bound

Arithmetic intensity is a property of the workload and its implementation, not of the hardware. A large matrix multiply reuses each weight it loads across many multiply-accumulates and so has high intensity; an element-wise operation, or the generation of a single token, uses each loaded value only once or twice. The ridge point belongs to a simple upper bound on single-device throughput, the roofline model (Williams et al. 2009). A kernel with arithmetic intensity I, running on a device with peak compute rate R_{peak} and memory bandwidth BW, can attain at most

$$R_{\text{attain}}(I) = \min\left(R_{\text{peak}},\ I \times \text{BW}\right) \tag{.98}$$

On log-log axes, the bound is a bandwidth roof of slope one ($I \times \text{BW}$) that meets a flat compute roof (R_{peak}) at the ridge point $I_{\text{ridge}} = R_{\text{peak}}/\text{BW}$. Left of the ridge, a kernel is memory bound, and only more bandwidth or fewer bytes per operation raises its ceiling. Right of the ridge, it is compute bound, and only a faster or better-utilized datapath helps. In D·A·M terms, the bandwidth roof belongs to the Data axis, the compute roof to the Machine axis, and the Algorithm axis decides where on the intensity axis the kernel sits. The roofline is a ceiling, not a prediction. A kernel far below both roofs is limited by something the model omits, such as launch overhead, synchronization, or low occupancy.

For an H100, the book's hardware constants give a dense FP16 peak of 989 TFLOP/s and a high-bandwidth memory (HBM) bandwidth of 3.35 TB/s, which places the ridge at about 295.2 FLOP/byte. Batch-1 decode of a 7-billion-parameter language model stored in 16-bit precision performs about two operations per parameter for each generated token (one multiply and one add) and must read every two-byte weight once, so its intensity is about 1 FLOP/byte. Equation .98 then caps attainable throughput at 3.35 TFLOP/s, roughly 0.3 percent of peak, however well the kernels are written. Serving B sequences in one decode step reuses each loaded weight B times and raises the intensity to roughly B FLOP/byte, until key-value cache traffic, which grows with batch size and context length, begins to dominate the bytes moved. That arithmetic is why batching is the first lever of every serving system. Section 4 carries the same reasoning to the network, where interconnect bandwidth takes the place of HBM bandwidth.

Bottleneck diagnostic

Once the bottleneck is identified, table .237 shows which optimizations help and which ones are wasted:

Table .237: What Works vs. What Is Wasted: Optimizing the wrong term yields limited improvement and poor cost efficiency. A memory-bound model will not speed up from more peak FLOP/s alone; it needs higher arithmetic intensity, less data movement, or a faster memory subsystem.

If the workload is…	Dominant Term	Optimization That Works	Optimization That is Wasted
Memory-Bound	D_{vol}/BW	Quantization, pruning, batching, kernel fusion, higher memory bandwidth	More peak FLOP/s alone
Compute-Bound	$O/(R_{\text{peak}} \cdot \eta_{\text{hw}})$	Better kernels, Tensor Cores, faster GPU, lower precision	More memory bandwidth (not binding)
Latency-Bound	L_{lat}	Batching requests, kernel fusion, async dispatch	Neither compute nor bandwidth (overhead dominates)

Accelerator Memory Hierarchy

An accelerator is a fast arithmetic engine surrounded by memories that trade bandwidth for capacity, and most performance arguments in this book reduce to the question of which boundary a byte

must cross. Registers and on-chip shared memory (SRAM) hold the operands of the kernel that is executing. A shared on-chip L2 cache (50 MB on an H100) sits behind them. HBM holds the model's working state, 80 GB at 3.35 TB/s on an H100. Host memory is reached over PCIe at 64 GB/s per direction, roughly 52× less than HBM, and local NVMe storage sits below host memory.

A kernel whose working set stays on chip runs near arithmetic speed; one that streams operands from HBM is bounded by the roofline above; one that must reach host memory or storage is slower still. The **memory wall**, the widening gap between arithmetic throughput and the bandwidth that feeds it, is the single-machine form of the constraint that reappears at fleet scale as the network wall. A multi-accelerator node adds a scale-up fabric between devices (NVLink, at 450 GB/s per direction on an H100), and the scale-out network adds tiers beyond the node; section 4 tabulates those tiers.

Numeric Precision and Training Memory

The notation conventions at the front of the book list the number formats used throughout and their byte widths. FP32 occupies 4 bytes, BF16 and FP16 occupy 2, and FP8 and INT8 occupy one. **Mixed-precision training** runs the forward and backward passes in a 16-bit format for speed and memory, while it keeps an FP32 master copy of the weights so that small updates are not lost to rounding. The Adaptive Moment Estimation (Adam) optimizer adds two FP32 moment estimates per parameter. Table .238 totals the resulting bytes per parameter.

Table .238: Mixed-Precision Adam Memory per Parameter: Persistent training state before activations, framework metadata, and communication buffers. The checkpoint omits gradients because a resumed run recomputes them in its first step.

State	Format	Bytes per Parameter	In a Resumable Checkpoint
Working weights	BF16	2	Yes
Gradients	BF16	2	No (recomputed on resume)
Master weights	FP32	4	Yes
Adam moments (two)	FP32	8	Yes
Total		16 (training state)	14 bytes

For Archetype A, the 175B-parameter dense model the chapters use as their running instance, the training state is 2.8 TB and a resumable checkpoint is 2.45 TB. A single H100 offers 80 GB of HBM (a binary nameplate, about 85.9 GB in decimal units), so the persistent state alone requires at least 33 devices before a single activation is stored. That floor is why the model state must be partitioned across devices, which chapter 15 develops. Serving the same model needs only the 16-bit weights, 350 GB, plus the key-value cache.

Activations are the other large consumer of training memory. The intermediate tensors that the backward pass needs grow with batch size, sequence length, hidden width, and depth, and for long sequences they can exceed the parameter state. **Activation checkpointing** stores only selected activations and recomputes the rest during the backward pass, trading additional compute for memory.

Transformer Arithmetic

Most worked examples in this book use decoder-only transformers, and three counting rules cover nearly all of their arithmetic. The symbols follow the book's deep learning notation, with P parameters, D training tokens, N_L layers, hidden dimension d, and sequence length S.

Each transformer layer holds four $d \times d$ attention projections and a feed-forward block that expands to $4d$ and back, about $12d^2$ weights in total, so a model has roughly $P \approx 12 N_L d^2$ parameters excluding embeddings. GPT-3 has $N_L = 96$ and $d = 12{,}288$, which gives 173.9B against its published 175B.

Every weight contributes one multiply and one add per token, so a forward pass costs about $2P$ FLOPs per token. The backward pass computes gradients with respect to both activations and weights and costs about twice the forward pass, so training costs about $6P$ FLOPs per token and

$$O_{\text{train}} \approx 6PD \tag{.99}$$

in total. For GPT-3, trained on 300 billion tokens, equation .99 gives 3.15×10^{23} FLOPs, within 1 percent of the reported 3.14×10^{23} FLOPs. The rule omits the attention-score products, which add at most about $S/(6d)$ to the weight FLOPs, or 2.8 percent for GPT-3 at $S = 2{,}048$. That fraction stays small while the context is short compared with the hidden width and grows with long contexts.

Serving an autoregressive model has two phases with different physics. *Prefill* processes the whole prompt at once as matrix-matrix products, so its arithmetic intensity is high and it tends to be compute bound. *Decode* generates one token per step for each sequence as matrix-vector products; at batch size 1 it reads every weight to perform two FLOPs per weight, the memory-bound regime that the roofline example above quantifies. To avoid recomputing attention over the whole prefix at every step, decode stores each layer's keys and values in a **key-value (KV) cache** of $2N_L d\, s_{\text{elem}}$ bytes per token for standard multihead attention, or 4.72 MB per token for GPT-3 in FP16. Section 4 sizes that cache against device memory.

Tooling Map

After the action table narrows the likely fix, the tooling map identifies the measurements needed to verify it. Use table .239 to select the right profiling tool when diagnosing a bottleneck along a particular D·A·M axis:

Table .239: D·A·M Tooling Map: Profiling utilities for diagnosing bottlenecks along each D·A·M axis.

Axis	Key Metric	Primary Tool	Secondary Tool
Data	Batch Load and Wait Time	Framework profiler trace	`iostat`, `pidstat` (I/O/CPU)
Algorithm	FLOPs, Model Depth	PyTorch Profiler	DeepSpeed Flops Profiler
Machine	GPU Utilization, SM Occupancy	Nsight Compute	DCGM, Nsight Systems

D·A·M Scorecard

The efficiency ratios in table .240 grade a system's performance against its theoretical limit. This report card is anchored by MFU,[3] the ratio of achieved model FLOP/s to the hardware's theoretical peak FLOP/s. The MFU grades are illustrative targets for compute-dominated training; memory-bound or latency-bound workloads must be judged against their attainable roofline and service-level objective (SLO) latency.

[3] **MFU (model FLOPs utilization)**: Counts only *useful* model computation in the numerator. Gradient synchronization, memory management, and other overhead within the measurement window remain in elapsed time and lower the reported ratio.

Table .240: The D·A·M Efficiency Rubric: Use these three numbers to characterize single-machine maturity.

Axis	Metric	Definition	Failing Grade	Passing Grade
Data	**I/O Overhead**	$\frac{\text{Data Wait Time}}{\text{Total Step Time}}$	$> 10\%$	$< 1\%$
Algorithm	**Compression/Sparsity Ratio**	$\frac{\text{Effective or active parameters}}{\text{Dense baseline parameters}}$	Workload-dependent	Workload-dependent
Machine	**MFU**	$\frac{\text{achieved model FLOP/s}}{\text{peak FLOP/s}}$	$< 30\%$	$> 50\%$

Scaling the Taxonomy from Node to Fleet

These single-node grades become most useful when they are carried forward into distributed design. The D·A·M taxonomy is the diagnostic baseline for a single machine, but as systems scale from a single node to the machine learning fleet, each axis undergoes a qualitative transformation. Understanding these connections is essential for transitioning from local optimization to fleet-scale engineering.

The evolution of constraints

Table .241 maps each axis from its node-level focus to its fleet-scale transformation:

Table .241: D·A·M Constraints from Node to Fleet: How each axis of the D·A·M taxonomy shifts when scaling from a single node to a multi-node fleet. The node-level focus (left) gives way to a qualitatively different fleet-scale constraint (right); the bottleneck migrates from local resource to global coordination cost.

Axis	Node-Level Focus (D·A·M)	Fleet-Scale Transformation
Data (D)	I/O Bandwidth (Disk/PCIe)	**The communication wall**: the bottleneck shifts from local storage to the bisection bandwidth of the network fabric.
Algorithm (A)	Model Depth/Ops Count	**The parallelism strategy**: the logic now includes how computation is partitioned across N devices (3D parallelism).
Machine (M)	Peak TFLOP/s, HBM	**The power and reliability wall**: the constraint is no longer just silicon speed, but watts per rack and cluster-wide MTBF.

Bridging to C^3

While D·A·M diagnoses the *components* of a single node, the C^3 taxonomy (Appendix 4) diagnoses the *interactions* of the fleet.

1. **Compute (C_1)** inherits the Algorithm and Machine axes, now evaluated per device after the work is partitioned across N devices.
2. **Communication (C_2)** inherits the Data axis, but is governed by network bandwidth, topology, and, over long distances, the speed of light rather than by local I/O alone.
3. **Coordination (C_3)** makes coordination costs explicit at fleet scale. Synchronization, checkpoints, and failure recovery also occur on one node, but distribution expands their scope and couples them to other machines.

This progression exposes cases where higher single-node MFU comes at the expense of scaling efficiency, so the complete fleet outcome can determine the choice. The node is optimized to serve the fleet.

Summary

The D·A·M taxonomy provides the diagnostic baseline for every ML systems analysis. By isolating the bottleneck to Data, Algorithm, or Machine, practitioners ensure that optimization efforts target the binding constraint. The memory hierarchy, the byte accounting of mixed-precision training, and the transformer counting rules supply the quantities that fleet-scale arguments take as given. This single-node discipline is the prerequisite for the fleet-scale engineering addressed throughout this book.

Key Takeaways: Single-machine diagnostic heuristics

- **Identify the dominant axis**: Decide whether Data, Algorithm, or Machine is the binding constraint before proposing any optimization.
- **Profile arithmetic intensity**: Arithmetic intensity, read against the roofline's ridge point, quantitatively distinguishes between Data-bound and Machine-bound regimes.
- **Use the iron law**: The iron law transforms vague symptoms into specific term-based bottlenecks.
- **Count bytes and FLOPs per parameter**: Mixed-precision Adam training holds 16 bytes per parameter (14 in a checkpoint), and dense transformer training costs about $6PD$ FLOPs. These two rules size most memory and compute budgets in the chapters.
- **Grade with the scorecard**: The Data-Algorithm-Machine scorecard standardizes "good" performance before moving to fleet scale.

The C^3 Taxonomy

In a distributed training cluster, "it is slow" is even less informative than on a single machine. A job can stall because accelerators are underutilized (Compute), gradient synchronization saturates interconnects (Communication), or checkpointing and recovery delay progress (Coordination). This appendix extends single-node diagnostics to fleet-scale infrastructure, providing the C^3 scorecard used throughout the book to isolate the binding bottleneck across distributed systems.

How to Use This Appendix

This appendix is designed as a reference. Start with the diagnostic summary table, form a hypothesis about which C^3 axis dominates, and then pick the tool that can confirm (or falsify) that hypothesis.

When training throughput is low, check model FLOPs utilization (MFU), communication fraction, and goodput ratio, then map each to its compute, communication, or coordination axis. When scaling efficiency drops below expectations, use the Fleet Law decomposition to identify which term grew. When cost is exploding, use the C^3 scorecard to ensure that effort targets the dominant term, not a nonbottleneck.

The **C^3 Taxonomy** is the diagnostic framework for fleet-scale ML systems engineering. Where the single-machine D·A·M framework (Appendix 5) diagnoses bottlenecks within a single node (data starvation, algorithmic overhead, or hardware saturation), the C^3 taxonomy diagnoses bottlenecks across the distributed fleet. Most fleet-scale performance problems can be diagnosed by identifying the dominant axis: Compute (are the accelerators doing useful math?), Communication (is the network moving data fast enough?), or Coordination (is the system spending too much time on synchronization, failure recovery, and scheduling?). Many production bottlenecks sit at intersections between these axes.

From D·A·M to C^3

The C^3 taxonomy does not replace D·A·M; it extends it. When a workload moves from one machine to a fleet, each D·A·M axis acquires new failure modes that the single-machine framework cannot capture. Table .242 shows how the transition works.

Table .242: Mapping D·A·M to C^3: How single-machine diagnostic concerns generalize to fleet-scale challenges.

D·A·M Axis	Single-Machine Concern	C^3 Extension	What Changes at Fleet Scale
Data	Host disk → GPU memory pipeline	Communication	Data movement crosses network fabrics; AllReduce, AllGather, and pipeline transfers dominate
Algorithm	Operator choice, autograd graph	Compute/Coordination	Workload must be partitioned (N-way sharding); communication-to-compute ratio determines scaling
Machine	SM occupancy, HBM bandwidth	Coordination	Single-device faults become cluster-wide stragglers; failure recovery, scheduling, and power density constrain N

The most important row in table .242 is the last one. On a single machine, the overhead term (L_{lat}) in the iron law is typically small, consisting of kernel launch latency, Python dispatch, and

synchronization barriers. At fleet scale, coordination becomes an axis in its own right: checkpoint writes, failure detection and recovery, pipeline bubble overhead, scheduler preemptions, and maintenance windows collectively consume a significant fraction of wall time. Coordination is the axis that single-machine diagnosis lacks, and much of this book is devoted to it.

Diagnostic Summary

With the mapping in place, diagnosis becomes a matter of matching symptoms to the axis that constrains the fleet. Table .243 provides the main reference table for fleet-scale diagnosis. Each C^3 axis maps to a physical constraint, observable symptoms, measurable metrics, and engineering levers.

Table .243: C^3 Diagnostic Summary: Each axis maps to a distinct physical constraint and a high-leverage optimization strategy. Start diagnosis here: identify which constraint binds, then follow the optimization pointer to the relevant chapter.

C^3 Axis	Physical Constraint	Symptoms	Key Metric	High-Leverage Optimization
Compute (C_1)	Arithmetic throughput ($R_{\text{peak}} \times \eta_{\text{hw}}$)	Low MFU, GPU utilization below 80%, poor per-GPU performance	MFU (Model FLOPs Utilization)	Kernel optimization, mixed precision, operator fusion (chapter 17)
Communication (C_2)	Network bandwidth ($\text{BW}_{\text{network}}$)	High AllReduce time, low scaling efficiency, communication > 30% of step	Scaling efficiency (η_{scaling}), communication fraction ($T_{\text{comm}}(N)/T_{\text{step}}(N)$)	Gradient compression, overlap compute/communication, topology optimization (chapter 8)
Coordination (C_3)	Synchronization overhead and failure recovery	Low goodput ratio, frequent restarts, large pipeline bubbles, scheduler churn	Goodput ratio ($T_{\text{useful}}/T_{\text{wall}}$)	Async checkpointing, elastic training, faster failure detection (chapter 12)

The Fleet Law

Under ideal partitioning of fixed work, the same classification can be written as a time budget for each distributed step. The Fleet Law, introduced in section 11, decomposes every distributed training step into the distributed-step time budget:

$$T_{\text{step}}(N) = \frac{T_{\text{compute}}}{N} + T_{\text{comm}}(N) + T_{\text{sync}}(N) - T_{\text{overlap}}$$

This equation is the fleet-scale counterpart of the iron law. Where the iron law decomposes single-machine execution into data movement, compute, and overhead, the Fleet Law decomposes distributed execution into local arithmetic, network data transfer, and synchronization logic. The diagnostic strategy is identical: measure each term, identify which dominates, and direct engineering effort at the dominant term.

Component decomposition

Each Fleet Law term maps to specific measurable activities:

- $T_{\textbf{compute}}/N$: Forward pass, backward pass, and optimizer step, all local arithmetic after distribution across N devices. Governed by MFU and per-GPU kernel efficiency. Improvements come from better kernels, mixed precision, and operator fusion.
- $T_{\textbf{comm}}(N)$: AllReduce of gradients, AllGather of parameters (in FSDP/ZeRO), activation transfers in tensor/pipeline parallelism. Governed by network bandwidth and collective algorithm choice. Improvements come from gradient compression, hierarchical collectives, and compute-communication overlap.
- $T_{\textbf{sync}}(N)$: Synchronization barriers, checkpoint writes, failure detection and recovery, pipeline bubble idle time, scheduler preemptions, and maintenance windows. Governed by cluster reliability and orchestration software. Improvements come from asynchronous checkpointing, elastic training, and faster failure detection.

- $T_{\textbf{overlap}}$: Communication or coordination time hidden behind useful arithmetic. Governed by scheduling and implementation overlap.

Operational events may be amortized into the step budget or accounted for separately in operational goodput. The same checkpoint or recovery delay must not appear in both. The compute-time fraction follows:

$$f_{\text{compute}} = \frac{T_{\text{compute}}/N}{T_{\text{step}}(N)}$$

When f_{compute} drops below 0.5, the fleet spends more time on communication and coordination than on useful arithmetic. This compute-time fraction is not total fleet efficiency; useful fleet efficiency also depends on MFU, scaling efficiency, and goodput. The C^3 taxonomy identifies which noncompute term is responsible.

Intersection Landscape

The tripartite Venn diagram in figure 0.13 establishes the co-design landscape of distributed execution across the node substrate (C_1), networking backbone (C_2), and orchestration layer (C_3). In production, bottlenecks rarely present as a single isolated axis; they arise at the pairwise and central boundaries where two or more of these dimensions compound. Diagnosing compound bottlenecks requires mapping observed symptoms back to the governing intersection before selecting an engineering intervention.

Table .244 expands the three pure dimensions, the three pairwise boundaries, and the central convergence into concrete engineering techniques and their primary book chapters.

Table .244: C^3 Intersection Reference: Each zone maps specific techniques to the axes they span and the chapters that cover them. The pairwise intersections require reasoning about two domains simultaneously; the center requires all three.

Zone	Name	Key Techniques	Book Coverage
Compute (C_1)	The Node Substrate	Operator fusion, mixed precision (FP8/BF16), MFU optimization, local NVMe staging	chapter 11, chapter 13, chapter 17
Communication (C_2)	The Networking Backbone	Rail-optimized Clos topologies, RoCEv2/InfiniBand fabrics, collective algorithms	chapter 11, chapter 8
Coordination (C_3)	The Orchestration Layer	Gang scheduling (Slurm, Kubernetes, Ray), state consensus, heartbeat failure detection	chapter 12, chapter 24, chapter 23
Compute ∩ Communication ($C_1 \cap C_2$)	Hiding Network Latency	1F1B pipelining, CUDA stream compute-comm overlap, comm-to-compute ratio (ρ) tuning, wire compression	chapter 15, chapter 8
Compute ∩ Coordination ($C_1 \cap C_3$)	Maximizing Fleet Goodput	Non-blocking async checkpointing, pipeline bubble reduction, in-memory recompute vs. rollback, fast node drain	chapter 12, chapter 24
Communication ∩ Coordination ($C_2 \cap C_3$)	Collective Synchronization	Straggler mitigation, hierarchical collectives (NVLink vs. IB), bounded staleness, topology-aware rank mapping	chapter 8, chapter 12
Compute ∩ Communication ∩ Coordination ($C_1 \cap C_2 \cap C_3$)	Fleet ML Systems Engineering	Fleet Law decomposition, 4D parallelism (DP+TP+PP+EP), memory sharding (FSDP2, ZeRO-3), Goodput metric	chapter 15, chapter 6, chapter 16

Compute ∩ communication

This intersection governs whether the system can hide communication behind computation. The communication-to-compute ratio ($\rho = T_{\text{comm}}(N)/(T_{\text{compute}}/N)$) is the key diagnostic metric (section 4). When $\rho < 1$, computation takes longer than communication and there is enough arithmetic duration to hide the transfer in principle; dependencies and resource contention determine whether

that overlap is achievable. When $\rho > 1$, GPUs complete their local work before the network delivers the next round of operands, and the system becomes communication-bound.

In a GPU trace, this bottleneck appears as exposed communication intervals where tensor cores sit idle awaiting collective completion (such as `ncclKernel_AllReduce` or `ncclKernel_AllGather`). Engineering at this intersection focuses on overlap and compression: launching AllReduce during the backward pass before all gradients are finalized, pipelining activation transfers in 1F1B schedules, increasing microbatch sizes or gradient accumulation steps to dilute communication frequency, and applying wire quantization to reduce payload bytes, while accounting for metadata, codec time, and numerical error (chapter 15, chapter 8).

Compute ∩ coordination

This intersection captures the idle compute caused by orchestration and resilience mechanisms. While compute engines should ideally remain saturated with arithmetic, coordination overhead repeatedly forces hardware into idle states.

Three distinct mechanisms govern this intersection:

1. **Pipeline bubbles**: In pipeline parallelism (PP), stages idle during pipeline fill (warmup) and drain (cooldown). For N_{PP} pipeline stages and m microbatches, the bubble fraction $b_{\text{pipe}} = (N_{\text{PP}} - 1)/(N_{\text{PP}} - 1 + m)$ (section 4) is accelerator time lost to idling; more microbatches or interleaved schedules shrink it.
2. **Checkpoint stalls**: Synchronous checkpoint writes that block the training loop to serialize terabytes of weights and optimizer states convert expensive compute time into storage wait time. Asynchronous checkpointing mitigates this by snapshotting host-pinned or local Non-Volatile Memory Express (NVMe) memory in milliseconds, delegating remote persistence to background I/O threads.
3. **Recovery rollback**: When a node fails in an N-device cluster, training halts and rolls back to the last valid checkpoint, squandering the arithmetic executed since that snapshot. Minimizing the failure blast radius through fast health heartbeats and dynamic node replacement bounds this compute loss (chapter 12, chapter 24).

Communication ∩ coordination

This intersection captures the synchronization cost embedded in network communication. A collective operation (AllReduce, AllGather, ReduceScatter) moves data over physical wires (C_2) while creating dependencies among its participating ranks (C_3). It need not impose a separate cluster-wide barrier, but a delayed contribution can prevent dependent outputs from becoming ready.

The governing failure mode is **straggler amplification**. If a single GPU or link experiences packet drops, thermal throttling, or ECC retry delays, every other GPU in the collective waits, transforming a localized degradation into a cluster-wide halt. At fleet scale ($N \geq 10{,}000$), tail latency dominates the barrier time: the probability of at least one node straggling approaches unity ($1 - (1 - p_{\text{straggle}})^N \to 1$).

Engineering at this intersection focuses on decoupling synchronization from raw communication: using hierarchical collectives that isolate high-bandwidth intra-node NVLink domains from inter-node InfiniBand fabrics, adopting bounded-staleness asynchronous training to absorb transient tail latency, and enforcing topology-aware gang scheduling to align collective communication rings with physical spine-leaf switch rails (chapter 8, chapter 12).

Fleet-scale ML systems engineering

At the center ($C_1 \cap C_2 \cap C_3$), all three constraints converge simultaneously. This is the discipline of **Fleet-Scale ML Systems Engineering**. Systems engineers at this center do not optimize a single accelerator or a single network switch; they manage the trade-offs of the distributed machine as an integrated whole.

The central engineering challenges encompass:

- **4D parallelism co-design**: Balancing Data Parallelism (DP), Tensor Parallelism (TP), Pipeline Parallelism (PP), and Expert Parallelism (EP) so that memory consumption fits within accelerator high-bandwidth memory (HBM) (C_1), high-frequency communications map to intra-node NVLink and low-frequency communications map to inter-node fabrics (C_2), and pipeline bubbles and barrier dependencies are minimized (C_3).

- **Memory sharding vs. communication volume**: Frameworks like PyTorch FSDP2 and DeepSpeed ZeRO-3 eliminate memory redundancy (C_1) by partitioning model states across workers, but pay a strict tax in repeated AllGather communication (C_2) and state coordination metadata (C_3).
- **Holistic goodput optimization**: Google's ML Productivity Goodput metric decomposes fleet productivity into program goodput (η_{program}), runtime goodput (η_{runtime}), and scheduling goodput ($\eta_{\text{scheduling}}$). These factors cut across the C^3 axes rather than mapping one to one onto them. Communication overlap improves program goodput, while checkpointing and recovery, which are Coordination costs, determine runtime goodput (section 11).

C^3 coordination and overlap

Just as single-node execution transforms the additive iron law into a maximum bounded by dependencies (section 2), overlap at fleet scale transforms the Fleet Law (equation 0.3) by maximizing T_{overlap}. Table .245 summarizes the primary overlap techniques across the C^3 dimensions.

Table .245: C^3 Overlap Techniques: System techniques that hide communication or coordination behind useful computation, maximizing T_{overlap} in the Fleet Law.

Technique	C^3 Overlap	Mechanism	Implementation
1F1B Pipeline Schedule	C_1 overlaps C_2	Interleaves forward and backward microbatches to overlap cross-stage activation transfer with arithmetic	Microbatch queue scheduling (chapter 15)
CUDA Stream Decoupling	C_1 overlaps C_2	Launches non-blocking AllGather or AllReduce on separate communication streams concurrently with GEMMs	Dedicated NCCL streams (chapter 8)
Async Checkpointing	C_1 overlaps C_3	Fast in-memory or local NVMe snapshot while GPU arithmetic resumes immediately	Background host thread flushes to storage (chapter 13, chapter 12)
Hierarchical Collectives	C_2 overlaps C_3	Partitions collective into local NVLink reduction and inter-node fabric transfer, isolating tail jitter	Hierarchical NCCL communicators (chapter 8)
Double-Buffered Data Streaming	C_1 overlaps C_2	Prefetches and decompresses next batch shard in pinned host memory while GPUs compute current batch	Host pinned memory + async D2D transfer (chapter 13)

Storage as the persistent substrate

A common diagnostic question is why Storage does not appear as a fourth explicit coordinate in the C^3 taxonomy or as an independent T_{storage} term in the Fleet Law.

The physical data center is procured around Compute, Network, and Storage (chapter 13). At runtime, however, storage devices execute no model arithmetic. Storage overhead therefore manifests dynamically through the three C^3 dimensions:

- **In Compute (C_1)**: High-throughput local NVMe drives function as the tier-3 extension of the accelerator memory hierarchy (below SRAM and HBM), serving parameter offloading (ZeRO-Offload) and activation spilling.
- **In Communication (C_2)**: Remote dataset streaming from parallel file systems (Lustre, GPFS) or object stores (S3, Ceph) shares cluster network bandwidth and network interface card (NIC) capacity with collective communication traffic.
- **In Coordination (C_3)**: Durable distributed storage provides the persistent state anchor required for checkpoint serialization, node failover, and job rescheduling.

When storage latency stalls a training run, profilers identify the symptom not as raw disk latency, but either as a network communication bottleneck (C_2, dataset starvation) or as a blocking coordination barrier (C_3, synchronous checkpoint flush). Storage is the persistent substrate supporting all three dimensions, rather than a separate term in the step execution budget.

Rules of Thumb

In the middle of a production incident, fast heuristics narrow the search space before a profiler is needed. These thresholds provide that first line of defense.

The C^3 traffic light

Table .246 provides threshold-based triage for each C^3 axis.

Table .246: C^3 Traffic Light: Quick triage thresholds for fleet-scale diagnosis. Green means the axis is healthy; yellow means it deserves investigation; red means it is the likely bottleneck. These thresholds assume well-optimized large-model training on current-generation hardware.

C^3 Axis	Green (Healthy)	Yellow (Investigate)	Red (Bottleneck)
Compute	MFU $>$ 50%	MFU 30%–50%	MFU $<$ 30%
Communication	Comm fraction $<$ 20%	Comm fraction 20–40%	Comm fraction $>$ 40%
Coordination	Goodput ratio $>$ 90%	Goodput ratio 75–90%	Goodput ratio $<$ 75%

The bottleneck diagnostic table

Once the bottleneck axis is identified, table .247 shows which optimizations help and which ones are wasted.

Table .247: What Works vs. What Is Wasted at Fleet Scale: Optimizing a nondominant C^3 axis yields limited improvement and often worsens cost efficiency. A communication-bound fleet will gain little from faster GPUs until AllReduce and other communication bottlenecks are addressed.

If the fleet is…	Dominant Term	Optimization That Works	Optimization That is Wasted
Compute-bound	T_{compute}/N	Better kernels, mixed precision, operator fusion, next-gen accelerators	More network bandwidth (GPUs are not waiting on the network)
Communication-bound	$T_{\text{comm}}(N)$	Gradient compression, compute-comm overlap, hierarchical collectives, InfiniBand upgrade	Faster GPUs (they will just idle faster while waiting for the network)
Coordination-bound	$T_{\text{sync}}(N)$	Async checkpointing, elastic training, faster failure detection, fewer pipeline stages	Faster arithmetic alone; faster networks help only transfer-related coordination costs

C^3 Case Studies

Theoretical constraints manifest as confusing symptoms in production. These scenarios illustrate how to apply the C^3 taxonomy to fleet-scale performance problems. Each case isolates one dominant axis before showing which optimization levers follow from that diagnosis.

Case 1 on the underutilized compute fleet

Symptom

An engineering team provisions 4,096 H100 GPUs for a large language model training run. The training loop runs without errors, but the PyTorch Profiler shows MFU of only 15 percent. The network profiler shows communication accounts for less than 10 percent of step time. The cluster is running but barely working.

Diagnosis

The **Compute** axis is the leading hypothesis to investigate. With 15 percent MFU, 85 percent of the fleet's peak capacity is not credited to useful model FLOPs. Low exposed communication makes local execution a useful starting point; kernel traces and host-side waits must distinguish inefficient arithmetic from data starvation or unobserved coordination gaps.

The fix

If traces confirm inefficient local execution, target the compute axis across 4,096 accelerators:

- **Mixed precision**: Ensure BF16/FP8 Tensor Cores are engaged. A common culprit is FP32 fallback in normalization layers or loss computation.
- **Operator fusion**: Use `torch.compile` or similar just-in-time (JIT) compilation to fuse element-wise operations and reduce kernel launch overhead.
- **Batch size tuning**: If per-GPU batch size is too small, the matrix multiplications have insufficient arithmetic intensity to saturate the Tensor Cores.

Raising MFU from 15 percent to 50 percent on the same hardware delivers 50 percent/15 percent = 3.3× more useful work, the equivalent of tripling the fleet without buying a single GPU.

Case 2 on the communication wall

Symptom

A 512-GPU data-parallel training run achieves 45 percent illustrative compute-phase efficiency during compute kernels on each GPU, which is good per-device kernel efficiency. Wall-clock MFU over the full step (including AllReduce) is only 20.2 percent because AllReduce consumes 55 percent of every training step. Scaling from 64 GPUs to 512 GPUs yields only 4× speedup instead of the expected 8×, or 50 percent scaling efficiency.

Diagnosis

The **Communication** axis dominates. Each GPU has healthy compute-phase efficiency, but more than half the step time is spent synchronizing gradients across the network. The system is **Communication-Bound**: adding more GPUs can worsen the exposed communication fraction. Under fixed-work scaling, local computation shrinks while the collective retains startup and transfer costs.

The fix

Target the communication axis without touching the per-GPU computation:

- **Compute-communication overlap**: Launch AllReduce during the backward pass rather than waiting until it completes. Modern frameworks (FSDP, DeepSpeed) support this natively.
- **Gradient compression**: Apply Top-k sparsification or quantization to reduce the bytes crossing the network by 10–100×.
- **Hierarchical collectives**: Use intra-node NVLink for the first reduction stage, then inter-node InfiniBand only for cross-node aggregation, reducing inter-node participants relative to a flat rank-level algorithm. Actual traffic savings depend on the collective layout, NIC allocation, and topology.

If communication were eliminated entirely, throughput would increase by 2.2× (Amdahl's Law applied to the 45 percent compute fraction). Realistically, reducing communication from 55 percent to 20 percent of step time would recover most of the lost scaling.

Case 3 on the coordination tax

Symptom

A 10,000-GPU training run shows 40 percent compute-phase model FLOPs utilization per device, measured only while kernels execute, and communication accounts for only 15 percent of step time. Both figures look healthy. This case uses a broad **Goodput Ratio** that includes both pipeline and operational losses relative to an ideal step rate; it is not the separate operational factor in the multiplicative capacity model. Its value is only 60 percent. The remaining 40 percent of wall time is consumed by checkpoint writes, failure recovery restarts, pipeline bubble idle time, scheduler preemptions (17 percent of wall time), and maintenance windows.

Diagnosis

The **Coordination** axis dominates. Per-GPU computation and inter-node communication are both efficient, but nonproductive overhead consumes 40 percent of wall time. Scheduler preemptions take 17 percent, failure recovery 10 percent (at 10,000 GPUs, GPU failures occur about every 5 hours), pipeline bubbles 5 percent, checkpoint writes 3 percent, and maintenance windows 5 percent. Faster arithmetic alone does not recover this lost time. Checkpoint bandwidth, recovery mechanisms, and scheduling must be evaluated against the specific overhead they can reduce.

The fix

Target the coordination axis:

- **Asynchronous checkpointing**: Overlap checkpoint writes with the next training step, reducing visible checkpoint overhead from 3 percent to near zero.
- **Elastic training**: When a node fails, shrink the job and continue rather than halting all 10,000 GPUs for recovery. This converts the 10 percent failure recovery cost into a smaller throughput reduction.
- **Pipeline schedule optimization**: Switch from GPipe to an interleaved 1F1B schedule to reduce bubble fraction, or increase microbatch count per pipeline flush.
- **Faster failure detection**: Reduce heartbeat timeout from 30 seconds to 5 seconds with hardware-level health monitoring, cutting the idle time between failure occurrence and recovery initiation.

Production Troubleshooting

Table .248 provides a diagnostic matrix for common fleet-scale failure modes.

Table .248: C^3 Troubleshooting Matrix: Root cause identification and remediation for common fleet-scale bottlenecks. Each row connects a user-visible symptom to the C^3 axis most likely responsible, reducing the search space before reaching for a profiler.

Symptom	C^3 Axis	Diagnostic Question	Measurement	Action
Low MFU despite fast network	**Compute**	Are Tensor Cores engaged? Is batch size sufficient for arithmetic intensity?	Per-GPU kernel trace (Nsight/PyTorch Profiler)	Enable mixed precision, increase per-GPU batch size
Throughput plateaus when adding GPUs	**Communication**	Does AllReduce time grow faster than computation shrinks?	NCCL trace, ρ ratio	Gradient compression, hierarchical collectives, overlap
Frequent job restarts	**Coordination**	What is the cluster MTBF? Is detection fast enough?	Failure logs, MTBF calculation	Elastic training, faster detection, smaller blast radius
High GPU-hours but slow progress	**Coordination**	What fraction of GPU-hours produce useful training steps?	Goodput ratio ($T_{\text{useful}}/T_{\text{wall}}$)	Async checkpointing, reduce pipeline stages, eliminate scheduler churn
Scaling efficiency drops with cluster size	**Comm/Coord**	Is the bottleneck network bandwidth or synchronization barriers?	Separate $T_{\text{comm}}(N)$ from $T_{\text{sync}}(N)$	If comm: compress or overlap. If coord: async methods
Stragglers slow entire job	**Comm ∩ Coord**	Is one node consistently last to reach the AllReduce barrier?	Per-node step time histogram	Straggler detection + replacement, bounded staleness, backup workers

Tooling Map

Engineers must measure abstract C^3 axes with concrete profiling tools. Table .249 maps each axis to the utilities that confirm or falsify a hypothesis.

Table .249: C^3 Tooling Map: Profiling utilities for diagnosing fleet-scale bottlenecks. Start with the primary tool for quick triage; use secondary tools for deep-dive analysis. Compute tools operate per-GPU; Communication tools operate at the network layer; Coordination tools operate at the cluster/job level.

C^3 Axis	Key Metric	Primary Tool	Secondary Tool
Compute	MFU, kernel utilization	PyTorch Profiler (TensorBoard plugin)	Nsight Compute (per-kernel roofline analysis)
Communication	AllReduce time, ρ ratio	NCCL debug logs (`NCCL_DEBUG=INFO`)	Nsight Systems (timeline), `ibstat`/`perfquery` (IB)
Coordination	Goodput ratio, restart count	Cluster scheduler logs (Slurm, K8s event logs)	Custom goodput dashboards (for example, Google ML Goodput)

C^3 Scorecard

The C^3 Scorecard grades fleet efficiency against known thresholds, extending the single-machine scorecard (Appendix 5) to the distributed environment. Table .250 defines the three metrics that characterize fleet health.

Table .250: The C^3 Efficiency Rubric: Use these three numbers to characterize fleet health. The MFU denominator uses aggregate fleet peak, written as NR_{peak} when R_{peak} is a per-device value. These illustrative thresholds guide investigation; passing all three does not prove that inexpensive optimizations are exhausted.

C^3 Axis	Metric	Definition	Failing Grade	Passing Grade
Compute	**MFU**	$\frac{O_{\text{useful}}}{NR_{\text{peak}} \times T_{\text{step}}}$	$< 30\%$	$> 50\%$
Communication	**Scaling Efficiency** (η_{scaling})	$\frac{T_1}{N \times T_N}$	$< 56\%$	$> 87\%$
Coordination	**Goodput Ratio**	$\frac{T_{\text{useful}}}{T_{\text{wall}}}$ or $\frac{\text{useful steps/sec}}{\text{ideal or allocated steps/sec}}$	$< 75\%$	$> 90\%$

C^3 Infrastructure Diagnostic Decision Tree and Fleet D·A·M Scorecard

To bridge hardware-level telemetry and architectural optimization, cluster operations teams require a systematic procedure for mapping low-level hardware signals to the binding C^3 bottleneck wall.


Telemetry signal mapping to C^3 walls

Modern GPU clusters generate dense telemetry across silicon, PCIe buses, thermal sensors, and network switches:

- **MFU Drops**: Sudden or sustained drops in model FLOPs utilization below expected baselines.
- **PCIe AER (Advanced Error Reporting) Retries**: Non-fatal bus errors causing packet retries, link downgrades (e.g., PCIe Gen 5 $\rightarrow$ Gen 3), or host-to-device direct memory access (DMA) throttling.
- **Thermal Throttling**: GPU SM clock downclocking (e.g., 1.9 GHz $\rightarrow$ 1.1 GHz) triggered by junction thermal limits or cooling fan degradation.
- **InfiniBand Credit Stalls & PFC Pause Frames**: Priority flow control (PFC) pause frames, congestion notification packets (CNP), or switch buffer credit starvation.

Diagnostic decision tree

The hardware-first diagnostic tree below guides triage from initial telemetry signals to the underlying C^3 wall and remediation action.

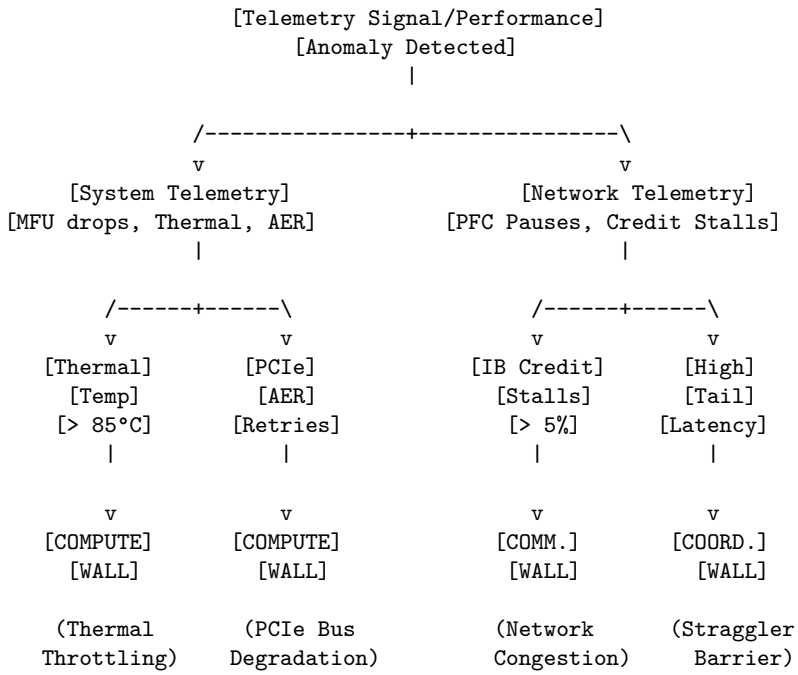

Structured diagnostic telemetry table

Table .251 maps hardware-level telemetry counters to root causes, C^3 bottleneck walls, and concrete operational remediations.

Table .251: C^3 Telemetry Diagnostic Mapping: Direct mapping from silicon-level telemetry signals to distributed bottleneck walls and remediation procedures.

Telemetry Signal	Hardware/OS Counter	Root Cause	C^3 Bottleneck Wall	Remediation Action
MFU Drop with High GPU Temp	`gpu_temperature > 85°C`, `clocks_throttle_reasons.sw_thermal`	Thermal throttling reduces GPU SM clock speed	**Compute Wall**	Check coolant flow, replace thermal interface material (TIM), adjust fan curves
MFU Drop with Low Host-GPU BW	`pcie_aer_correctable_errors`, `pcie_link_width < x16`	PCIe link degradation/retries due to signal noise	**Compute Wall**	Reseat GPU/PCIe riser card, clean PCIe edge connectors, replace cable
AllReduce Stalls with Pause Frames	`PFC_PAUSE_XOFF_FRAMES`, `infiniband_credit_stalls`	Network fabric congestion, IB buffer exhaustion	**Communication Wall**	Enable Adaptive Routing (AR), rebalance ECMP hashing, tune NCCL buffer size
NCCL Barrier Timeout/Hang	`NCCL_WARN=INFO` log `Unhandled CUDA error`, `heartbeat_miss`	Single-node straggler or silent kernel hang	**Coordination Wall**	Drain degraded node, isolate via node health check script, trigger fast restart
High Step Overhead with Idle GPU	`nvlink_throughput == 0`, `fs_write_latency > 1s`	Blocking synchronous checkpoint write to storage	**Coordination Wall**	Switch to asynchronous double-buffered checkpointing or host RAM staging

Fleet D·A·M scorecard

The **Fleet D·A·M Scorecard** in table .252 generalizes single-node Data, Algorithm, and Machine (D·A·M) diagnostics to fleet-scale C^3 bottlenecks.

Table .252: Fleet D·A·M Scorecard: Quantifies how single-node hardware telemetry maps into fleet-level C^3 execution constraints.

D·A·M Axis	Fleet Telemetry Signal	C^3 Bottleneck Wall	Target Efficiency Benchmark
Data (D)	Network fabric RX/TX saturation, storage write I/O wait times	**Communication/Coordination**	I/O wait time $< 2\%$ of step time; NCCL ring bandwidth $> 85\%$ of fabric peak
Algorithm (A)	Pipeline bubble idle fraction, partitioning imbalance across stages	**Compute/Coordination**	Pipeline bubble fraction $< 20\%$ under the balanced-stage model
Machine (M)	Model FLOPs utilization (MFU), PCIe AER errors, thermal and power throttling	**Compute**	MFU $> 50\%$; thermal throttle events $= 0$; PCIe link width held at maximum (Gen 5 x16)

Scaling Laws Through the C^3 Lens

Scaling laws are usually written in algorithmic FLOPs, but a training fleet delivers only the useful FLOPs that survive utilization, communication, and coordination losses. Scaling-law targets translate directly into C^3 terms: the hidden perfect-systems assumption abstracts away losses, while effective FLOP/s defines the usable throughput connecting model-quality forecasts to real cluster capacity.

The ideal-system assumption in scaling laws

Scaling laws (Kaplan, Chinchilla, and their successors) predict model quality as a function of algorithmic training compute. They usually abstract away systems efficiency: wall-clock time, accelerator peak FLOP/s, compute-phase efficiency, communication overhead, and scheduler losses enter later when teams provision hardware to deliver the target compute budget. In C^3 terms, scaling-law FLOPs must be converted into raw fleet capacity after compute-phase, distributed-step, and operational-goodput losses.

The gap between scaling-law predictions and observed training outcomes is, in large part, a C^3 gap. A team that budgets 10^{24} peak hardware FLOPs of capacity will deliver fewer useful model FLOPs after three multiplicative losses: per-GPU compute-phase efficiency, inter-node scaling efficiency (η_{scaling}), and operational goodput.

The effective FLOP/s concept

A fleet's **Effective FLOP/s** is the usable throughput after compounding three disjoint C^3 efficiency factors:

$$R_{\text{eff}} = (N R_{\text{peak}}) \times \underbrace{\text{MFU}}_{\text{Compute}} \times \underbrace{\eta_{\text{scaling}}}_{\text{Distributed step}} \times \underbrace{\eta_{\text{goodput}}}_{\text{Operational goodput}}$$

MFU, the single-device baseline, measures useful model arithmetic against peak throughput only while local computation is active. This compute-phase factor is not the step-averaged fleet MFU of table .250, whose T_{step} denominator already includes the in-step losses that η_{scaling} counts, so the product does not count them twice. Scaling efficiency captures communication and other distributed-step losses, including pipeline bubbles. Operational goodput captures time outside those measured steps, including checkpointing, failure recovery, scheduler preemptions, and maintenance. These disjoint measurement windows prevent the same loss from being counted twice.

A concrete estimate makes the multiplicative loss visible at fleet scale.

Systems Perspective B.1: The C^3 tax on a 100,000-GPU cluster

Consider a 100,000-GPU H100 cluster with 98,900 PFLOP/s of peak aggregate throughput. After the three disjoint C^3 efficiency factors:

$$\text{Effective} = 98,900 PFLOP/s \times 0.50 \times 0.56 \times 0.65 \approx 17999.8 PFLOP/s$$

The fleet delivers 18.2 percent of its peak capacity as useful training work. The **C^3 Tax**, the ratio of peak to effective compute, is 5.5×, so achieving a given effective compute budget requires 5.5× the raw hardware. The compute phase retains a 50 percent efficiency factor. The distributed step retains a 56 percent scaling factor, using the modeled 8,192-GPU tier as an illustrative proxy that includes pipeline losses. Operations retain a 65 percent goodput factor after checkpoints, failures, scheduler preemptions, and maintenance.

These losses reflect the physics of fleet-scale computation rather than a failure of engineering. The C^3 taxonomy quantifies where the losses occur so that optimization effort targets the dominant term.

Summary

The C^3 taxonomy provides a systematic framework for diagnosing fleet-scale bottlenecks. Each axis maps to a distinct physical constraint: arithmetic throughput and MFU bound compute; network bandwidth and collective algorithm efficiency bound communication; and synchronization overhead, failure recovery, and operational losses bound coordination. The Fleet Law quantifies these constraints, enabling systematic diagnosis. Use the C^3 traffic light for quick triage, the bottleneck diagnostic table to choose the right lever, and the C^3 scorecard to grade fleet health.

Key Takeaways: Where to look first at fleet scale

- **Every fleet-scale bottleneck has a dominant C^3 axis**: Compute, Communication, or Coordination, with many real bottlenecks spanning intersections. Identify the dominant axis before optimizing.
- **Measure the C^3 scorecard**: Compare MFU, scaling efficiency, and goodput with workload-specific baselines. The displayed thresholds screen for problems; traces must confirm the cause before selecting an optimization.
- **The C^3 tax is multiplicative**: Peak FLOP/s × compute-phase efficiency × scaling efficiency × operational goodput = effective FLOP/s. The illustrative 100,000-GPU case retains ~18.2 percent of peak.
- **Coordination is the new axis**: Single-node overhead remains relevant, while distribution adds cross-machine dependencies. The coordination case attributes 40 percent of its modeled budget to checkpoints, failures, pipeline bubbles, scheduling, and maintenance.
- **Optimizing the wrong C^3 axis yields limited improvement**: Faster GPUs cannot fix a communication-bound fleet by themselves; faster networks help coordination only where transfer time, such as checkpoint I/O, contributes to that overhead.

Fleet Foundations

Single-node performance engineering centers on memory hierarchy latencies and roofline ridge points. The moment a job spans multiple machines, network latency replaces cache latency, component failure becomes a statistical certainty, and interconnect bandwidth dictates scaling efficiency. This appendix gathers the fleet-scale constants, scaling laws, and thermal limits that underpin the book's multi-node chapters, giving readers the physical baselines needed to reason about cluster-scale infrastructure. In C^3 terms, these numbers define the physical scale on which compute capacity, communication bandwidth, and coordination overhead become measurable.

How to Use This Appendix

This appendix is designed as a reference when translating fleet-scale design questions into specific physical constraints and identifying available optimization levers.

- **When evaluating inter-node communication**: Consult section 4 for the bandwidth and latency hierarchy.
- **When sizing GPU allocations**: Consult section 4 to analyze why doubling accelerator counts does not halve training time.
- **When calculating cluster reliability**: Check section 4 for mean time between failures (MTBF) tables and failure probability models.
- **When evaluating power and cooling limits**: Consult section 4 for power density ceilings and cooling constraints.
- **When budgeting runtime overhead**: Use section 4 for the four overhead categories that erode goodput.

The Three System Paradigms

Machine learning infrastructure at scale inherits design DNA from two distinct computing lineages and then breaks the assumptions of both. Understanding where ML systems borrow from high-performance computing (HPC) and where they borrow from warehouse-scale computing (WSC) is essential for choosing the right design trade-offs. A system architect who treats ML training as "just HPC" will build infrastructure that cannot tolerate failures. One who treats it as "just web services" will build infrastructure that cannot sustain the tight coupling that synchronous training demands.

High-performance computing

HPC systems descend from the supercomputer tradition. Their design philosophy is to maximize FLOP/s on tightly coupled simulations such as weather modeling, molecular dynamics, and nuclear physics. Every node matters: they use specialized interconnects (InfiniBand), low-latency fabrics, and homogeneous hardware. Fault tolerance follows the **Checkpoint/Restart** model: if one node fails, the entire job stops, rolls back to the last checkpoint, and resumes from that saved state. Scheduling is batch-oriented (Slurm), with jobs requesting rigid resource shapes ("512 nodes for 24 hours"). Nodes are pets, individually important and individually tracked.

Warehouse-scale computing

WSC systems descend from the web services tradition. Their design philosophy is to maximize queries per second across loosely coupled services such as search, email, and social media. Hardware is commodity Ethernet, varying generations coexist, and nodes are heterogeneous. Fault tolerance follows the **Redundancy** model: if one node fails, the load balancer reroutes traffic to another replica. The user never notices. Scheduling is dynamic (Kubernetes, Borg), with elastic bin-packing. Nodes are cattle, interchangeable and expendable.

The ML fleet as hybrid architecture

ML systems require the computational throughput of HPC (to train massive models with synchronous gradient updates) but must operate at the scale and unreliability of WSC (thousands of accelerators running for weeks). This creates a hybrid that borrows selectively from both traditions.

Training workloads are synchronous and bandwidth-hungry like HPC, but long-running and failure-tolerant like WSC. Inference workloads are latency-sensitive like WSC, but computationally heavy like HPC. The network is a fusion: TCP/IP for control planes, InfiniBand or NVLink for data planes. Fault tolerance combines checkpoint/restart with **Elastic Training** strategies where supported. Jobs can change their resource allocation, but resharding, restoration, or worker restarts may still be necessary. Scheduling combines gang allocation (all-or-nothing for training) with dynamic preemption and replacement.

Table .253 summarizes the design trade-offs across the three paradigms. The key insight is that ML fleets cannot simply adopt either HPC or WSC patterns wholesale; they must selectively combine elements from each based on the workload phase.

Table .253: Three System Paradigms: ML fleets inherit design DNA from both HPC and WSC but break assumptions of each. Training resembles HPC (tight coupling), inference resembles WSC (elastic serving), and fault tolerance is a hybrid of both.

Dimension	HPC (Supercomputer)	WSC (Web Cloud)	ML Fleet (AI Cluster)
Philosophy	Maximize FLOP/s	Maximize QPS	Maximize Model Quality per Dollar/Watt
Coupling	Tight (MPI)	Loose (RPC/HTTP)	Hybrid (NCCL + RPC)
State	Stateful (RAM)	Stateless (DB-backed)	Semi-Stateful (Checkpoints + KV Cache)
Network	Latency-optimized	Bandwidth-optimized	Bisection-bandwidth critical
Bottleneck	Compute throughput (FLOP/s)	I/O (Disk/Net)	Fabric or HBM, by workload phase
Fault model	Checkpoint/Restart	Redundancy/Replicas	Checkpoint/restart + optional elasticity
Scheduling	Batch (Slurm)	Orchestration (K8s)	Gang + preemption
Node model	Pets (tracked)	Cattle (expendable)	Pets during job, cattle between jobs

Foundations recap

Five single-machine models reappear throughout the distributed chapters, each extended by a fleet-scale term. Appendix 5 states the single-machine forms; the list below records only what changes at scale.

- **Iron law** ($T \approx D_{\text{vol}}/\text{BW} + O/(R_{\text{peak}} \cdot \eta_{\text{hw}}) + L_{\text{lat}}$, section 2): At fleet scale, the data-movement term expands to include inter-node communication, and the Fleet Law replaces the single-machine sum.
- **Roofline model** (section 3): At fleet scale, a third ceiling appears. **Network-bound** workloads are limited by inter-node bandwidth, which the communication-computation ratio in section 4 measures.
- **Amdahl's Law**: Caps strong-scaling speedup at $1/r$ for serial fraction r (Amdahl 1967). At fleet scale, the serial fraction includes synchronization barriers, exposed collective communication, and pipeline bubbles (section 4).
- **Training state rule** (section 3): Mixed-precision training with the Adaptive Moment Estimation (Adam) optimizer holds about 16 bytes per parameter during training and about 14 bytes per

parameter in a resumable checkpoint, before activations and framework metadata. At fleet scale, this footprint determines how model state is partitioned across devices (ZeRO, tensor parallelism, pipeline parallelism).

- **Little's Law** ($Q_{\text{req}} = \lambda_{\text{arr}} T_{\text{lat}}$) (Little 1961): Relates in-flight requests to arrival rate and time in system. At fleet scale, it sizes the number of serving replicas behind a load balancer (section 4).

The transition from single-machine to fleet-scale reasoning requires extending these models with new dimensions: network topology, failure probability, and coordination overhead. The numbers in the next section provide the quantitative foundation for that extension.

Numbers Every Fleet Engineer Should Know

Just as single-machine analysis depends on a set of core numbers, fleet-scale engineering is governed by a set of predictable ratios and scaling behaviors. The single-machine numbers still apply within each node, but a new set of numbers governs the spaces between nodes. Hardware ratios vary with generation and provisioning; failure-rate scaling also depends on the assumed failure model. These reference values provide sanity checks while the stated models explain how to substitute different assumptions.

> **Systems Perspective C.1: Node-level numbers for fleet reasoning**
>
> Fleet reasoning depends on a few node-level numbers that directly affect fleet design: the training state rule of about 14 bytes per parameter for common Adam checkpoint state, with larger footprints when gradients, activations, metadata, or extra optimizer buffers are included; NVLink vs. high-bandwidth memory (HBM) bandwidth for intra-node parallelism placement; and peak FLOP/s and HBM capacity for model FLOPs utilization (MFU), effective FLOP/s, batch sizing, and model sharding. Table .254 and the communication numbers below give inter-node and current-generation values; the memory hierarchy and roofline ridge points within a node (section 3) provide the necessary baseline. Those node-level baselines make the fleet-level ratios easier to interpret.

> **Systems Perspective C.2: Three fleet numbers that matter most**
>
> - **Bandwidth gap**: NVLink per-direction bandwidth within a node is ~9× faster than an InfiniBand NDR port between nodes. This ratio determines where parallelism boundaries belong, with model parallelism within a node and data parallelism across nodes.
> - **MTBF scaling**: A cluster's mean time between failures is the single-component MTBF divided by the number of components ($1/N$ scaling). At 100,000 GPUs, expect a failure every 30 minutes.
> - **Effective utilization**: After MFU, scaling efficiency, and overhead losses compound, a cluster with 1,024 GPUs delivers roughly 34.0 percent of its peak FLOP/s as useful training work.

Table .254 condenses the fleet-scale numbers into one place. Use it for back-of-envelope checks; use the detailed tables in each subsection when designing or debugging.

Table .254: Numbers Every Fleet Engineer Should Know (Quick Reference): One-page summary of the fleet-scale reference numbers in this section. See table .255 and table .256 for communication, table .257 for compute, and table .258 for coordination.

Category	Number	Use
Communication	NVLink per-direction bandwidth ~9× IB NDR	Parallelism boundary (in-node vs. cross-node)
Communication	IB NDR ~50 GB/s, ~5 µs one-way	Inter-node bandwidth and latency
Compute	MFU 30–50%, η_{scaling} ~83% @ 1K, ~56% @ 8K	Effective FLOP/s and scaling sanity checks
Coordination	MTBF 8K: ~366.2 min; 100K: ~30 min	Failure expectation and checkpoint cadence
Coordination	175B checkpoint ~2,450 GB (14 B/param common Adam state)	Recovery and storage sizing
Coordination	Goodput ~77% after overheads	Wall-clock utilization
Power & sustainability	AI rack ~70 kW; air limit ~30 kW	Cooling feasibility for the installed configuration
Power & sustainability	PUE liquid ~1.06, typical ~1.55; H100 700 W -> 10,000 ≈ 7 MW GPU-only proxy × PUE	GPU-only proxy; add other IT loads before facility sizing (see section 4)

Invariant scaling ratios

These relationships expose architectural trade-offs and model assumptions; their numerical ratios must be re-evaluated for the target system.

Network hierarchy ratio

The bandwidth gap between intra-node and inter-node communication is an important architectural comparison. Chip-to-chip links (NVLink, ICI) connect through short, wide, dedicated paths on a shared substrate. Inter-node links (InfiniBand, Ethernet) must traverse cables, switches, and protocol stacks. These design differences often favor intra-node bandwidth, but lane counts, multiple network ports, and topology determine the actual ratio.

Currently, NVLink 4.0 provides 9× more per-direction bandwidth than an InfiniBand NDR port. The ratio compares one accelerator's aggregate intra-node connectivity with one network port; it is not a universal constant. Parallelism placement must compare the workload's traffic with the sustained bandwidth actually provisioned at each boundary.

Failure scaling law

For N independent components under a constant-failure-rate assumption, system MTBF (equation .100) scales inversely with component count:

$$\text{MTBF}_{\text{system}} = \frac{\text{MTTF}_{\text{component}}}{N} \tag{.100}$$

Under this model the relation is exact rather than approximate. Doubling the cluster size halves the time between failures. At 100,000 GPUs with a per-GPU mean time to failure (MTTF) of 50,000 hours, the cluster experiences a GPU failure every 30 minutes. No fault tolerance strategy can avoid this; the question is how quickly the system recovers.

AllReduce overhead scaling

The bandwidth-optimal Ring AllReduce algorithm transfers $2(N_{\text{GPU}} - 1)M/N_{\text{GPU}}$ bytes per participant, where M is the collective payload size and N_{GPU} is the number of participating GPUs

(Patarasuk and Yuan 2009). As N_{GPU} grows large, this approaches $2M$ per GPU, so the per-GPU bandwidth term is nearly independent of the number of GPUs; aggregate cluster traffic still grows with the number of participants. This is why Ring AllReduce scales well in the bandwidth term. The latency term, however, grows as $2(N_{\text{GPU}} - 1) \times \alpha$, making latency the bottleneck for small messages on large rings. This trade-off motivates hierarchical AllReduce strategies that use Ring AllReduce within nodes and Tree AllReduce across nodes.

Communication numbers

Communication defines the boundaries of parallelism. These tables quantify the bandwidth and latency at each tier of the network hierarchy, from the fastest intra-node links to the slowest wide-area connections. For any distributed ML operation, the relevant question is which network tier its communication crosses.

Table .255 lists the bandwidth tiers that determine where tensor, pipeline, and data-parallel traffic should stay local.

Table .255: Communication Bandwidth Hierarchy: Per-direction bandwidth drops by roughly 9× crossing from intra-node (NVLink) to inter-node (InfiniBand). This ratio compares the H100 NVLink one-way rate against one InfiniBand NDR port and determines parallelism placement.

Interconnect	Bandwidth	Typical Role
NVLink 4.0 (H100)	450 GB/s	Tensor/pipeline parallelism within a node
TPU v5p ICI	1,200 GB/s	Intra-pod model parallelism (Google)
PCIe Gen5 x16	64 GB/s	CPU-GPU data transfer, NIC attachment
IB GXDR (1.6 Tb/s)	200 GB/s	Next-gen inter-node (2026+)
IB XDR (800 Gb/s)	100 GB/s	Inter-node standard (2025+)
IB NDR (400 Gb/s)	50 GB/s	Current inter-node standard for AI clusters
IB HDR (200 Gb/s)	25 GB/s	Previous-gen inter-node
RoCE v2 (100 Gb/s)	12.5 GB/s	Budget clusters, inference fleets

One-way latency across interconnect tiers (table .256) determines whether synchronous collective operations are viable.

Table .256: Communication Latency Hierarchy: Latency determines whether synchronous training is feasible. TCP/IP is roughly 10× slower than InfiniBand NDR, raising synchronization cost in latency-sensitive configurations. The cross-data-center row is the speed-of-light floor for an illustrative 8,000 km fiber path.

Interconnect	One-Way Latency	Implication
InfiniBand NDR	~5 µs	Low enough for synchronous AllReduce
InfiniBand HDR	~7 µs	Adequate for most training topologies
RoCE v2	~10 µs	Acceptable for data parallelism
TCP/IP (Ethernet)	~50 µs	Higher overhead; workload-dependent viability
Cross-data-center	~40,000 µs (40 ms)	Distance-dependent floor; amortize synchronization

These latency differences favor low-latency fabrics for frequent synchronization. Cross-data-center training must amortize transfers, place pipeline boundaries carefully, or relax synchronization when its learning algorithm permits.

Compute numbers

Raw peak FLOP/s is a necessary but misleading metric for fleet capacity planning. Single-device execution losses and additional scaling losses reduce effective throughput. Multiplying the two is valid only when their measurement windows exclude overlapping costs. Understanding these losses transforms fleet sizing from guesswork into engineering.

MFU measures what fraction of peak FLOP/s a training workload actually achieves. Well-optimized large-model training on current hardware achieves 30–50 percent MFU. The gap comes from memory stalls, kernel launch overhead, pipeline bubbles, and suboptimal operator fusion. These are workload-dependent reference values. Fleet-step MFU already includes in-step communication and pipeline losses; a separate scaling factor applies only to a single-device baseline that excludes those losses.

Scaling efficiency (η_{scaling}) measures how much useful computation survives as accelerators are added. Modeled scaling efficiency for the 175B reference job (table .257) shows how per-GPU throughput erodes as cluster size grows at a fixed global batch.

Table .257: Scaling Efficiency by Cluster Size: Modeled for the 175B reference job (eight-way tensor and eight-way pipeline parallelism, HDR InfiniBand, fixed GPT-3 batch); the 32-GPU row is a book convention. These values are not a universal function of cluster size, since workload, parallelism, batch, fabric, and baseline measurement determine the observed loss.

Cluster Size	Scaling Efficiency (η_{scaling})	Implication
32 GPUs	~90%	Near-linear regime; book convention, not modeled
256 GPUs	~87%	Tensor-parallel communication is the main loss
1,024 GPUs	~83%	Pipeline fill and drain become visible
8,192 GPUs	~56%	Pipeline bubble dominates at a fixed batch

Past a few thousand GPUs the fixed per-step costs of pipeline fill and drain dominate, which is why production systems grow the global batch, interleave pipeline stages, and overlap collectives with compute. Systems built this way, such as MegaScale, report near-linear scaling on thousands of GPUs (Z. Jiang et al. 2024).

Coordination numbers

At fleet scale, coordination (failure recovery, checkpointing, and maintenance) consumes a measurable fraction of wall-clock time. These numbers quantify the costs of keeping a large cluster running.

Failure rates by cluster size

Cluster MTBF scaling (table .258, calculated for a per-GPU MTTF of 50,000 hours) dictates the required checkpoint frequency.

Table .258: MTBF and Failure Probability by Cluster Size: GPU-only failure model with per-GPU MTTF of 50,000 hours. Real clusters also experience NIC, PSU, cable, and switch failures, so these GPU-only intervals overstate the true cluster MTBF. The probability column uses $\Pr(\geq 1 \text{ failure}) = 1 - e^{-t/\text{MTBF}}$ for $t = 24$ hours.

Cluster Size	MTBF (GPU-only)	Minutes	Pr(failure) in 24 hours
256 GPUs	195.3 h	11,718.8 min	11.6%
2,048 GPUs	24.4 h	1,464.8 min	62.6%
8,192 GPUs	6.1 h	366.2 min	98%
100,000 GPUs	0.50 h	30 min	100%

Failure is no longer an edge case at 8,192 GPUs and above. GPU-only MTBF is about 366.2 min at 8,192 GPUs, and the probability of at least one GPU failure within 24 hours is 98 percent. Fault tolerance is not optional at fleet scale; it is a prerequisite for completing any long-running training job. Chapter 12 covers the mechanisms in detail.

Checkpoint sizes

Checkpointing is the primary recovery mechanism, and its cost depends on the model size. Table .259 shows checkpoint sizes for common mixed-precision Adam training checkpoints (14 bytes per parameter: 2 bytes for BF16 weights and 12 bytes for FP32 master weights, momentum, and variance). Gradients are normally transient and recomputed after restore rather than serialized as durable checkpoint state.

Table .259: Checkpoint Sizes by Model Scale: Uses 14 bytes/parameter for common mixed-precision Adam checkpoint state. Write time assumes 100 GB/s aggregate storage bandwidth. Asynchronous checkpointing (chapter 12) can overlap writes with training, reducing the visible overhead.

Model Size	Checkpoint Size	Write Time @ 100 GB/s
7B parameters	98 GB	0.98 s
70B parameters	980 GB	9.8 s
175B parameters	2,450 GB	24.5 s
1T parameters	14 TB	2.3 min

Overhead budgets

Failure recovery and checkpointing are only part of the wall-clock budget. At fleet scale, table .260 separates four recurring categories of overhead that consume time not spent on useful training:

Table .260: Overhead Budgets for Fleet-Scale Training: These are fractions of wall-clock time. At 10,000+ GPUs, failure recovery dominates. The compound effect is additive: total goodput ratio $\approx 1.0 - (0.05 + 0.03 + 0.10 + 0.05) = 0.77 \approx 77\%$.

Overhead Category	Typical Budget	Lever
Pipeline bubbles	~5%	Increase microbatches per pipeline stage
Checkpointing	~3%	Async checkpointing, faster storage
Failure recovery	~10%	Faster detection, elastic rescheduling
Maintenance windows	~5%	Rolling upgrades, live migration

Power and sustainability numbers

Fleet-scale capacity planning and sustainability reporting require a few power numbers that every fleet engineer should know. At fleet scale, the critical numbers are **Rack Power Density**, **power usage effectiveness (PUE)**, and the **Air-Cooling Limit**, which determine where construction is feasible and what the facility load will be. Table .261 collects these reference values:

Table .261: Power and Cooling Reference Numbers: Rack power densities, air-cooling limits, and PUE values that govern fleet-scale capacity planning and sustainability reporting. Each row pairs a typical value with the engineering decision it informs.

Quantity	Typical value	Use
Traditional rack	12 kW	Baseline for non-AI data centers
AI rack (current gen)	70 kW	Evaluate cooling capacity
AI rack (high-density)	100 kW	Direct-to-chip liquid
Air cooling limit	~30 kW per rack	Illustrative configuration limit; verify installed capacity
PUE (liquid-cooled AI)	~1.06	Best case: facility load ≈ IT load

Quantity	Typical value	Use
PUE (best air-cooled)	~1.12	Hyperscale best practice
PUE (industry average)	~1.55	Sanity check for cost/carbon
H100 TDP	700 W per GPU	GPU-only proxy: 10,000 × 700 W = 7 MW

A GPU-only power proxy (MW) = (number of GPUs × thermal design power (TDP) per GPU)/10^6 excludes host CPUs, memory, storage, and networking. Facility load = total IT load × PUE; applying PUE to the GPU-only proxy omits those other IT loads and is not a complete facility budget. A 10,000-GPU H100 cluster at 700 W each gives a 7 MW GPU-only proxy; multiplying by PUE 1.55 gives 10.8 MW before accounting for the other IT loads. For carbon and cost, see section 4 and chapter 20.

Current hardware reference (c. 2025–2026)

These numbers (table .262) are point-in-time hardware references for back-of-envelope calculations. Compute, memory capacity, and interconnect performance evolve at different rates.

Table .262: Fleet-Scale Hardware Reference (c. 2025–2026): Per-accelerator specifications for the 2025–2026 generations. The B200, MI300X, and TPU v6e (Trillium) represent the frontier of fleet-scale compute density and memory bandwidth. Intra-node link rates are bidirectional aggregates per accelerator. Google does not publish a per-chip TDP for the TPU v6e.

Spec	NVIDIA B200	AMD MI300X	Google TPU v6e
BF16/FP16 Peak	2,250 TFLOP/s	1,307 TFLOP/s	918 TFLOP/s
Memory Bandwidth	8 TB/s	5.30 TB/s	1.64 TB/s
HBM Capacity	180 GB	192 GB	32 GB
Intra-Node Link	1,800 GB/s (NVLink 5.0)	896 GB/s (Infinity Fabric) (AMD 2023)	800 GB/s (ICI) (Google Cloud 2026b)
TDP	1,000 W	750 W	Not published

For scale context, a DGX H100 SuperPOD scalable unit contains 32 DGX H100 nodes (256 H100 GPUs) (NVIDIA 2023). Meta announced two 24,576-H100 data-center-scale clusters built on the Grand Teton hardware platform (Meta Engineering 2024). Google's Tensor Processing Unit (TPU) v5p pods scale to 8,960 chips. The largest announced clusters (as of 2025) exceed 100,000 accelerators.

Scaling Physics

The numbers in the previous section describe what the hardware can do. Scaling physics describes what happens when more of it is brought to bear. Reasoning starts from the ceiling on a single accelerator (the roofline) and then asks what survives as devices are added, governed by three models: Amdahl's Law extended to fleet overhead, the communication-computation ratio, and weak scaling behavior.

From the accelerator roofline to the fleet

Fleet performance rests on per-accelerator performance. Section 3 states the single-accelerator roofline, $R_{\text{attain}} = \min(R_{\text{peak}}, I \times \text{BW})$, and its ridge point $I_{\text{ridge}} = R_{\text{peak}}/\text{BW}$, which is about 295.2 FLOP/byte for an H100. A kernel below the ridge is memory bound, and a kernel above it is compute bound.

The roofline is a single-accelerator law, but its logic is what scales. At fleet level the binding bandwidth is no longer HBM but the interconnect, and the bytes moved are the gradients and activations crossing the network. The ratio of network time to local arithmetic time is the communication-computation ratio (section 4), the roofline of the fleet and the lens the rest of this section applies.

A training job provisioned with 4,096 GPUs achieves only 2.5× the throughput of a 1,024-GPU run. That observation implies about 51.9 percent scaling efficiency at the larger size, so scaling physics provides the diagnostic tools to determine whether the system is performing as physics allows or whether there is an engineering problem to fix.

Amdahl's Law at fleet scale

Amdahl's Law establishes that the maximum speedup of a parallel system is limited by its serial fraction r. At fleet scale, the "serial fraction" includes more than sequential code. It covers every operation that forces all N GPUs to wait:

- **AllReduce synchronization**: All GPUs must complete their gradient computation before any can proceed.
- **Pipeline bubbles**: The warmup and cooldown phases of pipeline parallelism leave stages idle.
- **Checkpoint writes**: Even asynchronous checkpoints contend for storage bandwidth.
- **Python-level overhead**: Single-threaded operations in the training loop (data loading, metric logging).

To see the fleet-scale implications, consider a training workload where 10 percent of wall-clock time is spent in synchronization, communication, and other serial overhead. Amdahl's Law gives the following speedups:

- With 32 GPUs: 7.8× speedup (~24 percent scaling efficiency)
- With 256 GPUs: 9.7× speedup (diminishing returns begin)
- With 1,024 GPUs: 9.9× speedup (approaching the ceiling)
- With 8,192 GPUs: 10× speedup (nearly at the Amdahl limit)
- With $N \to \infty$: capped at 10×

With just 10 percent serial overhead, no amount of hardware can deliver more than 10× speedup on this fixed workload. This is why fleet-scale training does not simply add more GPUs to the same problem; it scales the problem (weak scaling) to keep the serial fraction small relative to the total work.

> **Systems Perspective C.3: The compound overhead trap**
>
> The 10 percent serial fraction above is optimistic. In practice, fleet-scale serial overhead accumulates from multiple sources: 5 percent pipeline bubbles + 3 percent checkpointing + 10 percent failure recovery + 5 percent maintenance. These are not all strictly serial in the Amdahl sense (some overlap with computation), but they illustrate how quickly small per-category overheads compound into significant throughput loss.

The communication-computation ratio

Any distributed training strategy must determine whether computation between synchronization points takes long enough to hide the communication. Equation .101 defines the **communication-computation ratio** (ρ) that answers this directly:

$$\rho = \frac{T_{\text{comm}}(N)}{T_{\text{compute}}/N} \tag{.101}$$

When $\rho < 1$, computation takes longer than communication; hiding that communication still requires independent work and sufficient resources. When $\rho > 1$, the system is **Communication-Bound**, and GPUs spend more time waiting for data than computing on it.

The ratio is the time-domain form of the **communication intensity** (CI) defined in section 10, the bytes a step moves across the network per FLOP it executes locally. If each device moves M bytes

across the network per step at effective network bandwidth $\text{BW}_{\text{network}}$ and executes its O local FLOPs at realized rate R, then in the bandwidth-dominated regime

$$\rho \approx \frac{M/\text{BW}_{\text{network}}}{O/R} = \text{CI} \times \frac{R}{\text{BW}_{\text{network}}}, \qquad \text{CI} = \frac{M}{O} \tag{.102}$$

Equation .102 shows that exposed communication begins when CI exceeds $\text{BW}_{\text{network}}/R$, the network counterpart of the roofline ridge point. Because a device executes far more FLOP/s than its network link moves bytes per second, that threshold is a small fraction of a byte per FLOP, and a faster accelerator lowers it further. An accelerator upgrade alone can therefore turn a compute-bound job into a communication-bound one.

Communication-to-computation ratios across representative scenarios (table .263) reveal why parallelism strategy must match the workload.

Table .263: Communication-Computation Ratio (ρ): When $\rho \ll 1$, communication can potentially be hidden if dependencies permit. When $\rho \gg 1$, the system is communication-bound and GPUs sit idle waiting for data. The NVLink row is a bandwidth-only point-to-point lower bound; a tensor-parallel collective also incurs topology, latency, and contention costs.

Scenario	$T_{\text{comm}}(N)$	T_{compute}/N	ρ
Data parallel, 7B model, 256 GPUs	560.4 ms (AllReduce over IB NDR)	~5 s (fwd+bwd)	0.11
Data parallel, 340M model, 256 GPUs	29.6 ms (AllReduce over IB NDR)	~10 ms (fwd+bwd)	3
Ideal one-way 16 MB transfer (NVLink)	~0.04 ms (bandwidth-only lower bound)	~1 ms (one layer)	0.036

The 7B model on 256 GPUs achieves $\rho = 0.11$, so communication takes about 11.2 percent as long as computation, which can be partially overlapped. The 340M model on the same cluster has $\rho = 3$. Communication dominates, which makes this configuration communication-bound. The solution is either to use fewer GPUs (reduce N in the AllReduce) or to increase the computation per step (larger batch size, gradient accumulation).

For the single 16 MB point-to-point payload, the ideal bandwidth-only lower bound is $\rho = 0.036$. This is not a tensor-parallel collective model and cannot by itself establish whether an implementation is compute-bound.

Weak scaling at fleet scale

Amdahl's Law paints a pessimistic picture because it assumes a fixed problem size. In practice, fleet-scale training often follows **Weak Scaling**: the problem size (tokens, data, model parameters) grows proportionally with the number of GPUs. Gustafson's Law captures this more optimistic view (Gustafson 1988).

The key insight for fleet-scale ML is that weak scaling reflects how fleets are actually used, not merely a mathematical convenience. Engineers do not use 8,192 GPUs to train a 7B model faster; they use them to train a 70B or 700B model in reasonable time. As models and training batches grow, engineers often increase the compute performed between synchronization points. For dense Transformers, compute is commonly estimated as about $6\times$ parameters $\times$ tokens, while gradient communication scales with parameter bytes, so the communication-computation ratio ρ depends on batch size, sequence length, accumulation, and parallelism layout rather than on parameter count alone.

Systems Perspective C.4: The compound loss of fleet utilization

A 1,024-GPU H100 cluster has a peak aggregate throughput of 1,012,736 TFLOP/s. This illustrative decomposition keeps the factors disjoint: MFU represents per-device kernel and memory efficiency, scaling efficiency represents distributed communication and pipeline losses, and operational goodput represents checkpointing, failure recovery, and maintenance. The effective throughput is:

$$R_{\text{eff}} = NR_{\text{peak}} \times \text{MFU} \times \eta_{\text{scaling}} \times \eta_{\text{goodput}}$$

$$= 1,012,736 TFLOP/s \times 0.50 \times 0.83 \times 0.82 \approx 344,634.1 \text{ TFLOP/s}$$

The cluster delivers 34.0 percent of its peak FLOP/s as useful training work. The remaining 66.0 percent is explained by retained factors of 50 percent MFU, 83 percent scaling efficiency, and 82 percent operational goodput.

These losses reflect the physics of fleet-scale computation rather than a failure of engineering. Additional GPUs can increase useful throughput while reducing efficiency, but the gain must be measured against smaller configurations. The goal is not to reach 100 percent utilization; the goal is to deliver trained models faster than any smaller configuration could.

Thermal and Power Physics

Compute performance ultimately converts to heat, and heat must be removed. At fleet scale, thermal and power constraints are primary concerns. They determine where construction is feasible, how densely accelerators can be packed, and what the operating costs will be. A cluster that is architecturally sound but thermally infeasible cannot be built.

A cluster design calling for 10,000 H100 GPUs at 700 W each (a 7 MW GPU-only power proxy) gives 10.8 MW after applying PUE 1.55. The complete facility budget must also include host, memory, storage, and network power inside the IT boundary before applying PUE. This is the electrical load of a small town. Before optimizing software, the physics of power delivery and heat removal must be feasible.

Power density wall

The shift from traditional data center workloads to AI training has created a **Power Density Crisis**. Table .264 quantifies the gap.

Table .264: Power Density: Traditional vs. AI Workloads: AI racks consume roughly 5.8× the power of traditional racks. The ~30 kW air-cooling value is a configuration reference, not a universal physical ceiling. Higher rack density requires checking the installed airflow, heat exchangers, and server cooling design.

Configuration	Power per Rack	Cooling Implication
Traditional data center	12 kW	Standard air cooling sufficient
AI cluster (current gen)	70 kW	Evaluate cooling capacity
AI cluster (high-density)	100 kW	Evaluate direct-to-chip cooling
Air cooling limit	~30 kW	Illustrative forced-air configuration limit

The 5.8× increase in rack power density between traditional and AI workloads is a fundamental constraint on facility design, not merely an engineering challenge. Existing data centers built for 12 kW racks cannot simply be "retrofitted" with AI hardware. The electrical distribution, cooling infrastructure, and floor loading must all be redesigned. This is why new AI-focused data centers are being built from the ground up with liquid cooling as the baseline assumption.

The energy hierarchy at scale

PUE measures facility energy overhead: total facility energy divided by IT equipment energy (The Green Grid 2007; Uptime Institute 2022). A PUE of 1.0 would mean all facility energy is delivered to IT equipment; values above 1.0 represent overhead for cooling, power conversion, lighting, and other facility systems.

Table .265 compares PUE across data center generations and cooling technologies.

Table .265: power usage effectiveness (PUE): Lower is better. The listed PUE values are facility scenarios. Direct liquid cooling can reduce heat-removal overhead, but PUE also depends on climate, heat rejection, power conversion, and load. The gap between legacy (1.58) and liquid-cooled (1.06) represents about a 32.9 percent reduction in total facility power at fixed IT load; the non-IT overhead drops from 0.58 MW to 0.06 MW per MW of IT load.

Data Center Type	PUE	Overhead per MW of IT Load
Liquid-cooled AI data center	1.06	60 kW cooling + infrastructure
Best-in-class air-cooled	1.12	120 kW overhead
Industry average (2022)	1.55	550 kW overhead
Legacy enterprise	1.58	580 kW overhead

For fleet-scale cost calculations, PUE directly multiplies the electricity bill. A 10 MW IT load in a legacy data center (PUE 1.58) requires 15.8 MW total, while the same load in a liquid-cooled facility (PUE 1.06) requires only 10.6 MW, a savings of 5.2 MW. At typical commercial electricity rates, this difference translates to millions of dollars per year. Chapter 20 covers the full sustainability implications.

Summary

Fleet scale changes every constraint a single machine imposes. ML fleets combine the tight coupling of high-performance computing for training with the elastic fault tolerance of warehouse-scale computing for serving, and they cannot adopt either tradition wholesale. NVLink provides about 9× more per-direction bandwidth than an InfiniBand NDR port, which is why bandwidth-hungry parallelism stays inside the node. Cluster MTBF scales as $1/N$, so at 8,192 GPUs a GPU fails about every 366.2 minutes, with 98 percent probability of at least one failure in 24 hours. After disjoint factors for MFU (about 50 percent), scaling efficiency (about 83 percent), and operational goodput (about 82 percent), a 1,024-GPU cluster delivers about 34.0 percent of peak FLOP/s as useful work.

Three considerations govern the design response. The communication-computation ratio ρ indicates the potential for overlap and the pressure from communication; dependencies and available resources determine how much communication can be hidden behind computation. Weak scaling, which grows the problem with the fleet, preserves useful work per device, while strong scaling remains the right choice when the goal is to finish fixed work sooner. Rack power density, about 5.8× the traditional reference for current AI racks, determines the cooling design, subject to the installed heat-removal capacity rather than a universal threshold.

Communication Foundations

Distributed training spends a substantial fraction of execution time synchronizing gradients, redistributing activations, and routing tokens across network fabrics. Rather than cluttering chapter text with step-by-step proofs, this appendix provides the quantitative communication cost models used throughout the book: point-to-point formulations (α-β and LogGP), collective execution bounds (AllReduce, AllGather, ReduceScatter, AllToAll), pipeline bubble math, and gradient compression thresholds.

How to Use This Appendix

This appendix is designed as a reference when translating a distributed training symptom ("AllReduce is slow," "pipeline bubbles are killing throughput," "should we compress gradients?") into a quantitative diagnosis.

Conventions used here follow the book-wide notation: α denotes per-message startup latency, β denotes link bandwidth in bytes per second, n denotes point-to-point message size, n^* denotes the α-β crossover point, N denotes the number of participating GPUs, and M denotes collective payload size in bytes.

- **When AllReduce is slow**: Use section 4 to compute the expected time and compare ring vs. tree costs.
- **When choosing ring vs. tree**: Use section 4 and the crossover analysis to match algorithm to message size.
- **When pipeline bubbles dominate**: Use section 4 to compute bubble fraction and determine the required microbatch count.
- **When gradient compression is proposed**: Use section 4 to run the break-even calculation before committing engineering effort.

The α-β Communication Model

> **Systems Perspective D.1: Why this matters**
>
> Estimating how long a gradient synchronization will take across 256 GPUs must happen before committing to a cluster topology. The α-β model is the "roofline for networks": it gives a first-order prediction of transfer time from just two hardware parameters and the message size.

Every point-to-point transfer on a network follows the same fundamental pattern: the sender pays a fixed startup cost to initiate the message, then transmits the payload at a rate determined by the link's bandwidth. This two-parameter model captures the essential physics of network communication.

The α-β **model** (equation .103) predicts the time to transfer a point-to-point message of n bytes:

$$T(n) = \alpha + \frac{n}{\beta} \tag{.103}$$

where:

- α is the **Startup Latency** (seconds), the fixed cost of initiating a message, including software overhead, network interface card (NIC) processing, and routing setup
- β is the **Link Bandwidth** (bytes/s), the sustained data rate after startup
- n is the **Message Size** (bytes)

The model decomposes every transfer into exactly two costs: a per-message tax (α) paid regardless of size, and a per-byte tax (n/β) that scales linearly with the payload. This decomposition drives all the algorithm selection decisions in section 4.

Parameterizing physical interconnects (table .266) provides the baseline α and β values for hardware commonly found in ML clusters:

Table .266: α-β Parameters by Interconnect: Startup latency and sustained bandwidth for interconnects used in ML clusters. The β column uses one-way or per-direction bandwidth, so the H100 NVLink entry is half of the 900 GB/s bidirectional aggregate specification. The InfiniBand NDR α is the per-message base latency of the α-β model, which is smaller than the fabric's end-to-end one-way latency; the other rows are end-to-end startup latencies, so compare NDR with them only loosely. NVLink and PCIe operate within a node; InfiniBand and RoCE operate between nodes. TCP latency is dominated by kernel software stack overhead.

Interconnect	α (Latency)	β (Bandwidth)	Typical Role
NVLink 4.0 (H100)	500 ns	450 GB/s	Intra-node GPU-to-GPU
PCIe Gen5	1000 ns	64 GB/s	CPU-GPU, NIC-GPU
InfiniBand NDR (400 Gb/s)	1.5 µs	50 GB/s	Inter-node (high-end clusters)
InfiniBand HDR (200 Gb/s)	7 µs	25 GB/s	Inter-node (previous generation)
RoCE v2 (100 Gb/s)	10 µs	12.5 GB/s	Inter-node (Ethernet clusters)
TCP/IP (Ethernet)	50 µs	Varies	Control plane, non-RDMA fallback

Latency-dominated vs. bandwidth-dominated regimes

The α-β model reveals two distinct operating regimes. For small messages, the startup latency α dominates, and the link spends most of its time starting transfers rather than sustaining them. For large messages, the bandwidth term n/β dominates, and the startup cost becomes negligible.

The **Crossover Message Size** n^*, defined by equation .104, is the point where both terms contribute equally:

$$n^* = \alpha \times \beta \tag{.104}$$

Below n^*, communication is **Latency-Dominated**: sending more small messages wastes time on repeated startups. Above n^*, communication is **Bandwidth-Dominated**: payload transfer dominates; reducing bytes or increasing effective bandwidth can lower its cost.

Napkin Math D.1: Worked example: Crossover on InfiniBand NDR

Setup: InfiniBand NDR has α = 1.5 µs and β = 50 GB/s.

Question: At what message size does the bandwidth term equal the latency term?

Math:

$n^* = \alpha \times \beta = 1.5\ \mu s \times 50\ GB/s = 75\ KB$

Analysis: Messages smaller than 75 KB are latency-dominated on IB NDR. Gradient tensors from a single layer of a large model are typically 10–100 MB, well above this threshold. Control messages, heartbeats, and barrier synchronizations, however, are well below it.

Systems insight: This is why NCCL and Gloo batch small gradient tensors into larger "buckets" before launching AllReduce. Sending each tensor individually would pay the 1.5 µs startup cost hundreds of times per iteration instead of a handful.

The LogGP model extension

The α-β model assumes a message is a single, atomic transfer. In practice, networks pipeline messages: a sender can inject a new packet before the previous one has been fully received. The **LogGP Model** (Alexandrov et al. 1995) extends LogP with a long-message gap parameter:

- g **(gap)**: The minimum interval between consecutive message injections at the sender. This models the NIC's injection rate limit.
- o_{send}, o_{recv} **(overhead)**: The CPU time consumed by the processor to initiate or complete a message, during which it cannot do useful compute.

For a long message of n bytes, LogGP models transfer time as approximately:

$$T_{\text{long}}(n) \approx o_{\text{send}} + L_{\text{LogGP}} + (n-1)G + o_{\text{recv}}$$

where L_{LogGP} is the network latency, o_{send} and o_{recv} are sender and receiver overheads, G is the gap per byte for long messages, and g controls the minimum interval between consecutive message injections. Informal alpha-beta-style approximations can be useful for ML profiling, but the standard LogGP model keeps these gap parameters distinct from a simple bandwidth term.

In most ML training scenarios, the α-β model is sufficient because gradient tensors are large enough that pipelining effects are secondary to raw bandwidth. The LogGP model becomes important when analyzing the overhead of many small control messages or when modeling the interaction between communication and computation overlap, situations that arise in fine-grained pipeline parallelism and asynchronous gradient updates.

The α-β model describes point-to-point transfers. Collective operations, in which all GPUs participate, compose multiple point-to-point transfers, and their cost formulas derive directly from the model above.

Collective Operation Complexity

Systems Perspective D.2: Why this matters

Every distributed training step ends with a collective synchronization. The cost of that collective, rather than the cost of the matrix multiplies, often determines whether scaling from 8 GPUs to 256 is feasible. Understanding the exact complexity of each collective reveals which parallelism strategy (data, tensor, pipeline, expert) will dominate wall time at a given scale.

Collective operations move data between all N GPUs simultaneously. Each collective has a characteristic bandwidth term (how much data flows) and latency term (how many sequential message steps are required). The formulas below use the **Bandwidth-Optimal Ring Algorithm** unless otherwise noted; section 4 discusses when other algorithms are preferable.

AllReduce

AllReduce is the workhorse of data-parallel training: every GPU starts with a local gradient tensor of size M bytes and ends with the globally reduced (summed) result. The ring algorithm decomposes AllReduce into a ReduceScatter phase followed by an AllGather phase. Ring AllReduce time is given by equation .105:

$$T_{\text{ring}} = 2 \cdot \frac{N-1}{N} \cdot \frac{M}{\beta} + 2(N-1) \cdot \alpha \tag{.105}$$

The factor $2(N-1)/N$ approaches 2 as N grows. Each rank sends that factor times M bytes and receives the same amount. With full-duplex links, sending and receiving overlap; β is the effective

bandwidth in one direction, so sent-plus-received bytes must not be divided by that one-direction rate. The latency term grows linearly with N, which makes the ring algorithm expensive in latency for large GPU counts.

Tree AllReduce trades that linear latency growth for logarithmic depth. Equation .106 charges both the bandwidth and the latency term once per tree level, $2\log_2 N$ times in total:

$$T_{\text{tree}} = 2\log_2 N \cdot \frac{M}{\beta} + 2\log_2 N \cdot \alpha \tag{.106}$$

This unsegmented tree algorithm trades bandwidth efficiency for latency efficiency: the latency term grows as $\log_2 N$ instead of N, but the bandwidth term sends the full message M at each tree level instead of M/N chunks.

Napkin Math D.2: Worked example: Ring vs. tree AllReduce

Setup: 256 H100 GPUs connected via InfiniBand NDR (α = 1.5 µs, β = 50 GB/s). The gradient tensor is 1 GB (a 500M-parameter model in FP16).

Question: How long does AllReduce take with ring vs. tree?

Ring AllReduce:

$T_{\text{ring}} \approx 40.6$ ms

Tree AllReduce:

$T_{\text{tree}} \approx 320$ ms

Analysis: For this 1 GB message, ring AllReduce takes 40.6 ms, and tree takes 320 ms. The ring is significantly faster because it distributes the bandwidth load across all links. The tree's logarithmic latency advantage is negligible compared to its bandwidth penalty for large messages.

Systems insight: For the large gradient tensors typical of data-parallel training, ring (or ring-based) algorithms dominate. This unsegmented tree model favors small messages. Production tree variants can pipeline or partition messages and must be evaluated with their own cost models.

AllGather

AllGather is the complement of ReduceScatter: each GPU starts with a M_{coll}/N-sized shard and ends with the complete M_{coll}-byte tensor. It is the core communication primitive in fully sharded data parallelism (FSDP) for reconstructing parameters before each forward pass, and in tensor parallelism for reassembling split activations.

Ring AllGather execution time (equation .107) requires half the transfer volume of AllReduce:

$$T_{\text{allgather}} = \frac{N-1}{N} \cdot \frac{M_{\text{coll}}}{\beta} + (N-1) \cdot \alpha \tag{.107}$$

For this comparison, the full gathered tensor has the same byte size as each rank's AllReduce input payload. In this model, AllGather takes half the communication time of AllReduce for that matched tensor size and link parameters: it uses one ring pass instead of two. Local reduction work and implementation overheads can change the measured ratio.

ReduceScatter

ReduceScatter is the dual of AllGather: each GPU starts with a full M_{coll}-byte tensor and ends with a M_{coll}/N-sized shard that contains the globally reduced values for that shard. It is the gradient synchronization primitive in FSDP and ZeRO, replacing the full AllReduce with a cheaper operation when each GPU only needs its own parameter shard's gradient.

Ring ReduceScatter execution time (equation .108) provides the gradient sharding primitive:

$$T_{\text{reducescatter}} = \frac{N-1}{N} \cdot \frac{M_{\text{coll}}}{\beta} + (N-1) \cdot \alpha \tag{.108}$$

The symmetry is not a coincidence: ring AllReduce decomposes into one ReduceScatter followed by one AllGather, and the costs add up exactly to equation .105.

AllToAll

AllToAll is the most general collective: each GPU sends a distinct M/N-sized chunk to every other GPU, and receives a distinct chunk from each. It is the routing primitive for mixture-of-experts (MoE) architectures, where tokens must be dispatched to the correct expert and the results gathered back.

Pairwise-exchange AllToAll execution time (equation .109) trades personalized data chunks across peers:

$$T_{\text{alltoall}} = \frac{N-1}{N} \cdot \frac{M}{\beta} + (N-1) \cdot \alpha \tag{.109}$$

Although the formula matches AllGather and ReduceScatter in form, the communication pattern is fundamentally different: AllToAll is a personalized exchange (each GPU sends different data to each peer), which makes it harder to overlap with computation and more sensitive to network congestion.

Broadcast

Broadcast sends a single M-byte tensor from one root GPU to all $N-1$ others. It is used for distributing initial model weights, updated learning rates, and configuration changes during training.

Tree Broadcast execution time (equation .110) scales logarithmically with the participating GPU count:

$$T_{\text{broadcast}} = \log_2 N \left(\alpha + \frac{M}{\beta} \right) \tag{.110}$$

Broadcast is inherently asymmetric (one sender, many receivers), which makes a tree topology natural. In an unsegmented tree broadcast, the full M-byte payload is forwarded at each tree level, so both the latency and bandwidth terms appear along the $\log_2 N$-level critical path. Segmented or scatter-allgather broadcast variants can reduce the bandwidth term, but they require a different algorithm-specific model.

Collective complexity summary

With the individual formulas in place, table .267 provides a compact reference for comparing the cost structure of each collective operation.

Table .267: Collective Operation Cost Summary: Bandwidth and latency terms for ring, tree, and pairwise-exchange algorithms. The bandwidth term determines cost for large messages (gradients, parameters); the latency term determines cost for small messages (scalars, barriers). N = GPU count, M = per-rank input payload in bytes, and M_{coll} = full tensor size in bytes for AllGather and ReduceScatter.

Operation	Bandwidth Term	Latency Term	Primary Use Case
AllReduce (Ring)	$2 \cdot \frac{N-1}{N} \cdot \frac{M}{\beta}$	$2(N-1) \cdot \alpha$	Data-parallel gradient sync
AllReduce (Tree)	$2\log_2 N \cdot \frac{M}{\beta}$	$2\log_2 N \cdot \alpha$	Small-message sync
AllGather (Ring)	$\frac{N-1}{N} \cdot \frac{M_{\text{coll}}}{\beta}$	$(N-1) \cdot \alpha$	FSDP parameter reconstruction
ReduceScatter (Ring)	$\frac{N-1}{N} \cdot \frac{M_{\text{coll}}}{\beta}$	$(N-1) \cdot \alpha$	FSDP/ZeRO gradient sharding
AllToAll (Pairwise)	$\frac{N-1}{N} \cdot \frac{M}{\beta}$	$(N-1) \cdot \alpha$	MoE expert routing
Broadcast (Tree)	$\log_2 N \cdot \frac{M}{\beta}$	$\log_2 N \cdot \alpha$	Weight distribution, config sync

Two patterns emerge from this table. First, the ring and pairwise-exchange models contain the $(N-1)/N$ factor, which approaches 1 for large N. Per-rank communication therefore approaches a constant multiple of the relevant size: about $2M$ for ring AllReduce, about M_{coll} for ring AllGather or ReduceScatter, and about M for pairwise AllToAll. Aggregate traffic still scales with the number of ranks. Second, the latency term grows linearly with N for ring algorithms but logarithmically for tree algorithms, creating the algorithm selection trade-off analyzed next.

Algorithm Selection

> Systems Perspective D.3: Why this matters
>
> NCCL automatically selects a collective algorithm based on message size and GPU topology, but understanding why it chooses ring for large messages and tree for small ones helps diagnose when the auto-selection is suboptimal and how to structure communication to stay in the efficient regime.

Ring vs. tree vs. recursive halving-doubling

The ring algorithm minimizes bandwidth usage but pays a latency cost that grows linearly with N. The tree algorithm minimizes latency but wastes bandwidth because it sends the full message at each level. Recursive halving-doubling splits the difference: it uses halving (like a tree) for the reduce phase and doubling for the gather phase, achieving near-optimal bandwidth with $\mathcal{O}(\log N)$ latency steps.

The decision boundary between ring and tree depends on both message size and participant count. For the power-of-two case modeled by equation .105 and equation .106, equating the two times gives the crossover in equation .111:

$$M_{\text{crossover}}(N) = n^* \times \frac{(N-1) - \log_2 N}{\log_2 N - (N-1)/N}, \qquad n^* = \alpha\beta \tag{.111}$$

- $M > M_{\textbf{crossover}}(N)$ (large gradients): The ring has the lower modeled cost because its smaller bandwidth coefficient outweighs its additional startup steps.
- $M < M_{\textbf{crossover}}(N)$ (barriers, scalars): The tree has the lower modeled cost because its logarithmic startup term outweighs its additional bandwidth cost.
- $M \approx M_{\textbf{crossover}}(N)$ (medium tensors): The two modeled costs are similar, so benchmark them alongside recursive halving-doubling on the target topology.

Table .268 provides guidance for choosing the right algorithm.

Table .268: Algorithm Selection Guide: Strengths and weaknesses of ring, tree, and recursive halving-doubling relative to the participant-dependent ring-tree crossover $M_{\text{crossover}}(N)$ in equation .111.

Regime	Ring	Tree	Recursive Halving-Doubling
$M > M_{\textbf{crossover}}(N)$	Lower cost under the displayed models	Higher bandwidth term	Candidate with near-optimal bandwidth and logarithmic steps
$M < M_{\textbf{crossover}}(N)$	Higher linear startup term	Lower cost under the displayed models	Candidate with logarithmic startup steps
$M \approx M_{\textbf{crossover}}(N)$	Benchmark on the target topology	Benchmark on the target topology	Benchmark on the target topology
Power-of-2 N	Works for any N	Matches the displayed $\log_2 N$ model	Requires $N = 2^m$

Hierarchical AllReduce

Modern clusters have a two-level topology: GPUs within a node are connected by NVLink (450 GB/s), while nodes are connected by InfiniBand (50 GB/s). Hierarchical AllReduce exploits this asymmetry in three phases:

1. **Intra-node reduce** (NVLink): Each node reduces its 8 local GPUs to a single result using NVLink's 450 GB/s bandwidth. This is fast because NVLink's per-direction rate is 9× that of an InfiniBand NDR port.
2. **Inter-node AllReduce** (InfiniBand): The per-node results are all-reduced across nodes. Only one representative per 8 local GPUs participates, so the inter-node ring has one-eighth as many participants as a flat GPU-level ring.
3. **Intra-node broadcast** (NVLink): Each node broadcasts the global result to its 8 local GPUs.

The hierarchical approach reduces the inter-node ring size from all GPUs to one representative per 8 local GPUs, cutting the latency-step term by about 8× while keeping local aggregation on fast intra-node links. The inter-node representative still exchanges the full reduced tensor; the gain is not a universal reduction of payload bytes by the number of local GPUs. NCCL selects among topology-aware algorithms such as Ring, Tree, CollNet variants, NVLS/NVLSTree, and PAT based on the collective, message size, topology, architecture, and version; hierarchical communication is common on multi-node systems but is not a universal default.

Understanding the cost structure of collectives enables reasoning about data-parallel overhead. Pipeline parallelism introduces a different kind of overhead: idle time caused by the sequential dependency between pipeline stages.

Pipeline Arithmetic

Systems Perspective D.4: Why this matters

Pipeline parallelism splits a model across multiple GPUs so that each GPU holds only a fraction of the layers. The trade-off is **Bubble Time**: idle cycles where GPUs wait for activations or gradients from upstream or downstream stages. Quantifying the bubble fraction reveals whether pipeline parallelism is worth the complexity at a given scale.

Bubble fraction

In a pipeline with N_{PP} stages and m microbatches, equation .112 defines the **Bubble Fraction** as the proportion of total GPU-time spent idle:

$$b_{\text{pipe}} = \frac{N_{\text{PP}} - 1}{N_{\text{PP}} - 1 + m} \tag{.112}$$

For balanced stages with negligible transfer overhead, this formula applies to both GPipe (where all forward passes complete before any backward pass begins) and 1F1B (one-forward-one-backward interleaving). The 1F1B schedule has the same asymptotic bubble fraction but uses less peak memory because it retires microbatches earlier.

The bubble fraction depends on the ratio of stages to microbatches. Adding more microbatches (for a fixed number of stages) amortizes the pipeline fill and drain across more useful work.

Rule of thumb: Keeping bubble overhead at or below 20 percent requires $m \geq 4(N_{\text{PP}} - 1)$; strictly below 20 percent requires $m > 4(N_{\text{PP}} - 1)$. The practical rule $m \geq 4N_{\text{PP}}$ is a convenient conservative target.

Pipeline depth and microbatch count (table .269) govern the effective bubble fraction.

Table .269: Pipeline Bubble Fraction: Percentage of GPU-time lost to pipeline bubbles for various stage counts and microbatch counts. The conservative choice $m \geq 4N_{\text{PP}}$ keeps the modeled fraction below 20 percent.

Pipeline Stages (N_{PP})	m **= 8**	m **= 16**	m **= 32**	m **= 64**
N_{PP} **= 4**	27.3%	15.8%	8.6%	4.5%
N_{PP} **= 8**	46.7%	30.4%	17.9%	9.9%

As the table demonstrates, scaling to deeper pipelines requires proportionally more microbatches to maintain high accelerator utilization. When activation memory bounds limit the microbatch count, systems must adopt alternative scheduling strategies to mitigate bubble overhead.

Interleaved scheduling

Interleaved scheduling (used in Megatron-LM) assigns V virtual stages to each physical GPU instead of one. Each GPU processes V nonconsecutive chunks of the model, which means the pipeline has $N_{\text{PP}} \times V$ virtual stages but the bubble overhead uses the original N_{PP}, as equation .113 shows:

$$b_{\text{interleaved}} = \frac{N_{\text{PP}} - 1}{N_{\text{PP}} - 1 + m \times V} \tag{.113}$$

The microbatch term in the denominator is multiplied by V compared to equation .112, so the bubble reduction approaches V when m dominates $N_{\text{PP}} - 1$. For $N_{\text{PP}} = 8$, $m = 16$, and $V = 4$, the bubble fraction drops from 30.4 percent to 9.9 percent, a 3.1× reduction that comes at the cost of more frequent, smaller communication between stages.

Interleaved scheduling highlights a recurring theme in distributed ML: communication granularity is a tunable knob. Smaller, more frequent transfers improve overlap and reduce idle time, but increase the aggregate latency overhead. The same trade-off governs gradient compression.

Compression Economics

> Systems Perspective D.5: Why this matters
>
> Gradient compression promises to reduce communication volume by 10–1000×, making AllReduce nearly free. Compression, however, has overhead (encoding and decoding time), and it only helps if that overhead is smaller than the communication time it saves. A quick break-even analysis prevents wasted effort on compression schemes that will not actually speed up training.

The compression equation

Gradient compression replaces the original M-byte gradient with a compressed representation of size M/r_{comp}, where r_{comp} is the compression ratio. Equation .114 expresses the total time with compression:

$$T_{\text{compressed}} = T_{\text{encode}} + T_{\text{transfer}}\left(\frac{M}{r_{\text{comp}}}\right) + T_{\text{decode}} \tag{.114}$$

Compression is beneficial when $T_{\text{compressed}} < T_{\text{transfer}}(M)$. Rearranging this inequality yields the break-even condition in equation .115:

$$T_{\text{encode}} + T_{\text{decode}} < T_{\text{transfer}}(M) - T_{\text{transfer}}\left(\frac{M}{r_{\text{comp}}}\right) \tag{.115}$$

In the bandwidth-dominated regime ($M \gg n^*$), the communication time scales linearly with message size, and the right-hand side simplifies to approximately $T_{\text{transfer}}(M) \times (1 - 1/r_{\text{comp}})$. For high compression ratios ($r_{\text{comp}} \gg 1$), this approaches $T_{\text{transfer}}(M)$, so compression is worthwhile as long as the codec overhead is less than the uncompressed communication time.

> Napkin Math D.3: Worked example: Is compression worth it?
>
> **Setup**: Ring AllReduce of a 1 GB gradient across 256 H100 GPUs on InfiniBand NDR, taking 40.6 ms uncompressed. Assume a collective-compatible compressed representation achieves 64× compression with 2 ms total encode + decode overhead.
>
> **Question**: Does compression reduce the total AllReduce time?
>
> **Math**:
>
> - Uncompressed AllReduce: 40.6 ms
> - Compressed communication: 1.4 ms
> - Total with compression: 3.4 ms

- Speedup: 12×

Result: Compression shortens communication time by 12×. The 2 ms codec overhead is a small fraction of the 40.6 ms uncompressed baseline.

Systems insight: Compression saves communication time under the assumed payload ratio, codec cost, and unchanged collective structure. Independent top-k selections do not generally preserve that structure: sparse indices, differing supports, and merge operations must also be modeled. Lossy compression can require more iterations to reach the same accuracy, negating a per-iteration gain.

Break-even codec overhead limits (table .270) scale with compression ratio and uncompressed AllReduce time. Higher compression ratios tolerate larger codec overheads, up to the bandwidth-dependent portion of the uncompressed collective.

Table .270: Compression Break-Even Thresholds: Maximum tolerable codec overhead (encode + decode) for compression to reduce total time, computed as the actual collective-time difference $T_{\text{transfer}}(M) - T_{\text{transfer}}(M/r_{\text{comp}})$. The shared startup latency cancels, so even at high compression ratios it is not part of the codec budget.

Compression Ratio (r_{comp})	AllReduce = 10 ms (Max Codec Overhead)	AllReduce = 40 ms (Max Codec Overhead)	AllReduce = 100 ms (Max Codec Overhead)
4×	6.9	29.4	74.4
16×	8.7	36.8	93.0
64×	9.1	38.6	97.7
256×	9.2	39.1	98.8

Ultimately, these break-even limits show that gradient compression delivers the highest net benefit on lower-bandwidth interconnects where transfer times dominate. On high-speed fabrics, the tolerable codec overhead budget is tightly constrained, requiring lightweight quantization or sparsification algorithms.

Summary

The communication models in this appendix rest on two hardware parameters, the startup latency α and the bandwidth β of the α-β model (principle 5), and on two workload parameters, the payload (n or M) and, for collectives, the participant count N. The crossover size $n^* = \alpha\beta$ separates latency-dominated from bandwidth-dominated transfers. Ring collectives carry a $(N-1)/N$ bandwidth factor and a latency term linear in N, while tree algorithms trade bandwidth for logarithmic latency, so message size relative to the crossover $M_{\text{crossover}}(N)$ selects the algorithm. Pipeline parallelism adds the bubble fraction $b_{\text{pipe}} = (N_{\text{PP}}-1)/(N_{\text{PP}}-1+m)$, which the rule $m \geq 4N_{\text{PP}}$ keeps below 20 percent, and gradient compression pays only when codec overhead is smaller than the communication time it saves and convergence is unaffected. Measuring α and β for a cluster therefore yields a first-order prediction of its communication overhead.

Reliability Foundations

Individual accelerators fail rarely, but scaling to thousands of nodes multiplies component failure rates until interruption becomes a continuous operating condition. At cluster scale, mean time between failures (MTBF) drops from years to hours, turning failure recovery into a core execution path. This appendix collects the quantitative reliability calculations behind the book's fault-tolerance chapters, deriving failure probabilities, Young-Daly optimal checkpoint intervals, and availability stacking models. In C^3 terms, it develops the coordination axis, where checkpointing, recovery, and availability determine how much of the fleet's compute and communication becomes useful work.

How to Use This Appendix

This appendix is designed as a reference, intended for moving from intuition ("failures happen more often at scale") to quantitative engineering decisions ("how often should one checkpoint?" or "how many spare nodes are needed?").

The worked examples in this appendix use a 10,000-GPU training fleet, a larger variation on the 1,024-GPU Archetype A reference cluster, unless noted otherwise.

- **"How often will something fail?"** Start with section 4 and the MTBF cascade in section 4.
- **"Where does the $1/N$ come from?"** The probability tools in section 4 derive it from independent exponential lifetimes.
- **"How often to checkpoint?"** Use the Young-Daly model in section 4 and the worked example in section 4.
- **"How much time is lost to recovery?"** See the recovery anatomy in section 4 and the goodput analysis in section 4.
- **"When to use redundancy vs. checkpointing?"** Compare strategies in section 4 and availability stacking in section 4.
- **"What if checkpoints are not cheap relative to MTBF?"** Use the higher-order interval in section 4.
- **"How can one flipped bit derail training?"** See the silent data corruption model in section 4.

Failure Probability at Scale

Consider a training run on a 10,000-GPU cluster running for 30 days. The probability that at least one modeled node component fails during that time is effectively 100 percent, and that answer determines whether the system needs fault tolerance as a core design requirement or merely a nice-to-have.

Individual hardware components are remarkably reliable. A data center-grade GPU operates for tens of thousands of hours before failing. The physics of large-scale systems, however, works against reliability: every additional component is another opportunity for failure, and the aggregate failure rate scales linearly with component count. Component-level failure rates aggregate systematically into cluster-wide failure predictions.

Probability tools for failure analysis

Four results from elementary probability carry nearly all of the failure arithmetic in this book. Each assumes that components fail independently; correlated failures, such as a shared power feed or a common software bug, violate that assumption and must be modeled separately.

The first is the product rule for independent events. If a job needs all N of its components and each is available with probability $A_{\text{component}}$, the job's components are all available with probability

$$A_{\text{all}} = A_{\text{component}}^{N} \approx e^{-N(1-A_{\text{component}})} \quad \text{for } A_{\text{component}} \text{ close to } 1 \tag{.116}$$

Equation .116 is the **reliability collapse** behind the reliability gap in section 10. A per-component availability that looks excellent in isolation decays exponentially in N.

The second is its complement, the probability that at least one of N independent events occurs when each has probability p:

$$\Pr(\text{at least one}) = 1-(1-p)^{N} \approx Np \quad \text{when } Np \ll 1 \tag{.117}$$

The linear approximation in equation .117 holds only while Np is small; as N grows, the probability approaches 1. This is the arithmetic of straggler amplification: a delay that strikes any one worker rarely strikes some worker of a large synchronous job on almost every step.

The third is the exponential lifetime model. A component with constant failure rate λ survives to time t with probability $e^{-\lambda t}$ and has mean time to failure $1/\lambda$. The model is memoryless. A component that has run for a year is no more likely to fail in the next hour than a new one, which is why it describes the useful-life phase and not burn-in or wear-out. The earliest of N independent exponential failures is itself exponential with rate $N\lambda$, so the time to the first failure among N identical components has mean $1/(N\lambda)$. That single fact is the origin of the $1/N$ scaling of system MTBF in equation .120.

The fourth is the Poisson count. Under the same model, the number of failures in an interval T is Poisson distributed with mean T/MTBF, so the probability of no failure is $e^{-T/\text{MTBF}}$. Equation .121 below is the complement of that event, and the expected number of failures per day in table .272 is the Poisson mean.

Component failure rates

Reliability engineers characterize components using two complementary metrics. The **Failure in Time (FIT)** rate counts failures per 10^9 device-hours of operation, a unit chosen because individual components fail so rarely that failures-per-hour would produce inconveniently small numbers. The reciprocal quantity, **Mean Time To Failure (MTTF)**, calculates average lifetime in hours (equation .118):

$$\text{MTTF} = \frac{10^9}{\text{FIT}} \tag{.118}$$

Reference FIT rates and MTTF values (table .271) characterize component reliability in typical GPU training nodes, grounded in large-fleet and warehouse-scale experience (Kokolis et al. 2025; Zu et al. 2024; Barroso et al. 2019). These values assume the steady-state "useful life" phase of the bathtub curve, where the failure rate is approximately constant, dominated neither by infant mortality (early life) nor by wear-out (end of life) (Klutke et al. 2003).

Table .271: Component Failure Rates: Order-of-magnitude reference FIT/MTTF in the steady-state useful-life phase. Informed by large-GPU research-cluster analysis (Kokolis et al. 2025), TPUv4 supercomputer resiliency and operations (Zu et al. 2024), and warehouse-scale machine design (Barroso et al. 2019).

Component	FIT Rate	MTTF	MTTF (years)	Typical Failure Mode
GPU	20,000	50,000 hours	5.7 years	Die defect, thermal fatigue
HBM	5,000	200,000 hours	22.8 years	Bit-flip accumulation, TSV
NIC	6,666.7	150,000 hours	17.1 years	Transceiver degradation
PSU	10,000	100,000 hours	11.4 years	Capacitor aging

Component	FIT Rate	MTTF	MTTF (years)	Typical Failure Mode
PCIe Switch	5,000	200,000 hours	22.8 years	Solder joint, ESD damage
Optical Cable	20,000	50,000 hours	5.7 years	Fiber bend, connector wear
ToR Switch	3,333.3	300,000 hours	34.2 years	ASIC failure, fan bearing

Each component in isolation appears highly reliable; a GPU lasts 5.7 years on average. The difficulty begins with how a node behaves when many such components operate simultaneously.

The MTBF cascade

The following model treats a compute node as a series system, in which any modeled component failure interrupts it. A component enters the sum only when its failure alone stops the node, so redundant power supplies, spare links, and recoverable device errors stay out of it. For independent components with constant failure rates, equation .119 sums the individual rates into the node-level failure rate:

$$\frac{1}{\text{MTBF}_{\text{node}}} = \frac{G_{\text{node}}}{\text{MTTF}_{\text{GPU}}} + \frac{n_{\text{nic}}}{\text{MTTF}_{\text{nic}}} + \frac{n_{\text{psu}}}{\text{MTTF}_{\text{psu}}} + \cdots \tag{.119}$$

Think of each component as a ticking clock counting down to failure. A DGX H100 node with 8 GPUs and 8 network interface cards (NICs) has 16 independent clocks, and the node fails when the first clock reaches zero. More clocks mean a shorter expected wait. The node's 6 power supply units (PSUs) add no clocks. They run as a 4+2 redundant set, so the node keeps full performance with 2 of them failed, and a failed unit is normally replaced long before enough others fail to stop the node.

For a cluster of N_{nodes} identical nodes, the same logic applies one level up, as equation .120 shows:

$$\text{MTBF}_{\text{system}} = \frac{\text{MTBF}_{\text{node}}}{N_{\text{nodes}}} \tag{.120}$$

This is the **MTBF Cascade**: reliability degrades linearly with component count at each level, and the levels compound. A node with 4,687.5 hours MTBF sounds reliable. A cluster of 1,250 such nodes has an MTBF of just 3.75 hours, so a failure every few hours is the expected steady state. Table .272 carries that arithmetic across fleet sizes, with aggregate MTBF falling in inverse proportion to GPU count.

Table .272: Cluster MTBF by Scale: As cluster size grows, the aggregate MTBF shrinks proportionally. At 10,000 GPUs, failures occur every few hours; at 100,000 GPUs, they occur continuously. Node configuration (DGX H100): 8 GPUs and 8 NICs per node in the series sum; its 6 PSUs are 4+2 redundant and add no term.

Cluster GPUs	Nodes	Cluster MTBF	Expected Failures/Day
256	32	146.5 hours	0.2
1,024	128	36.6 hours	0.7
2,048	256	18.3 hours	1.3
8,192	1,024	4.6 hours	5.2
10,000	1,250	3.8 hours	6.4
100,000	12,500	22.5 minutes	64

The transition from hundreds of GPUs to tens of thousands is a qualitative regime shift. At 256 GPUs, about 6.1 days pass between failures. At 10,000 GPUs, the cluster expects multiple failures per shift. At 100,000 GPUs, failures are a continuous background condition, and the system is never fully healthy.

Probability of failure during a job

The MTBF determines the average time between failures, but training jobs have fixed durations. Practitioners ask for the probability that their job will be interrupted at least once.

Under the exponential failure model (constant failure rate), equation .121 gives the probability of at least one failure during a job of duration T_{job}:

$$\Pr(\geq 1 \text{ failure}) = 1 - e^{-T_{\text{job}}/\text{MTBF}} \tag{.121}$$

When $T_{\text{job}} \gg \text{MTBF}$, this probability approaches 1 rapidly. Table .273 shows the concrete numbers for various cluster sizes and job durations.

Table .273: Probability of At Least One Failure: For large clusters and multi-day jobs, failure is a near-certainty. Any system operating in the bottom-right region of this table must treat fault tolerance as a core design requirement, not an optimization.

Cluster GPUs	1 Day (24 h)	1 Week (168 h)	30 Days (720 h)
256	15.1%	68.2%	99.3%
1,024	48.1%	99.0%	> 99.9%
2,048	73.0%	> 99.9%	> 99.9%
8,192	99.5%	> 99.9%	> 99.9%
10,000	99.8%	> 99.9%	> 99.9%
100,000	> 99.9%	> 99.9%	> 99.9%

For any cluster above a few thousand GPUs running jobs longer than a day, the probability of experiencing at least one failure is effectively 100 percent. This is why chapter 12 treats fault tolerance not as a defensive measure but as a fundamental architectural requirement.

The exponential failure model assumes a constant failure rate, which holds during the steady-state useful-life phase. During burn-in (first few hundred hours) and wear-out (approaching end-of-life), failure rates are higher. In practice, fleet operators observe that newly deployed nodes exhibit 2–3× higher failure rates in their first week, making burn-in testing essential before admitting nodes to production clusters.

The inevitability of failure during long training jobs raises a practical question: given that failures will interrupt execution, how is the lost progress minimized?

Checkpoint Optimization

Every checkpoint saves progress but costs time. Checkpoint too rarely and a failure destroys hours of training. Checkpoint too frequently and the overhead of writing checkpoints itself becomes the bottleneck. The Young-Daly formula gives the first-order optimal balance point, and it depends on just two measurable quantities: how long a checkpoint takes to write and how often failures occur (Young 1974; Daly 2006).

The Young-Daly model

The optimal checkpoint interval balances two competing costs. Writing a checkpoint takes time T_{write} (the **checkpoint cost**), during which no useful training occurs. The longer the interval between checkpoints, however, the more work is lost when a failure strikes, on average half the interval. Equation .122 states the **Young-Daly formula** that minimizes the expected total overhead:

$$T^*_{\text{ckpt}} = \sqrt{2 \times T_{\text{write}} \times \text{MTBF}_{\text{system}}} \tag{.122}$$

where T_{write} is the checkpoint write time in seconds and $\text{MTBF}_{\text{system}}$ is the cluster or job-level system MTBF in seconds.

The intuition behind equation .122 is geometric-mean-like. When checkpoints are cheap relative to the MTBF ($T_{\text{write}} \ll \text{MTBF}_{\text{system}}$, the common case), the optimal interval sits between the two time

scales. If checkpoints took zero time, the optimal cadence is every step. If the system never failed, no checkpoints would be required. The square root interpolates between these extremes.

The formula assumes that failures follow an exponential distribution (memoryless property) and that checkpoint cost T_{write} is small compared to $\text{MTBF}_{\text{system}}$. The examples below adopt these assumptions. Correlated outages, changing hazard rates, long writes, and asynchronous persistence can require a more detailed model.

Checkpoint sizing

Checkpoint size determines the write time T_{write} that feeds into the Young-Daly formula. For common mixed-precision training checkpoints with the adaptive moment estimation (Adam) optimizer, each parameter requires approximately 14 bytes of persistent state:

- 2 bytes for BF16 model weights
- 4 bytes for FP32 master weights
- 4 bytes for FP32 first moment (Adam m)
- 4 bytes for FP32 second moment (Adam v)

Equation .123 aggregates these per-parameter costs into the total checkpoint footprint:

$$\text{Checkpoint Size} = P \times 14 \text{ bytes/parameter} \tag{.123}$$

Here, P is the number of trainable model parameters whose persistent optimizer and weight state must be serialized.

Mixed-precision Adam checkpoint sizing (table .274) demonstrates how state scales from manageable gigabytes to frontier-scale terabytes:

Table .274: Checkpoint Sizes for Mixed-Precision Adam Training: Each parameter requires about 14 bytes of persistent checkpoint state (model weights, FP32 master weights, and optimizer moments); gradients are normally transient and recomputed after restore rather than serialized as durable checkpoint state. Write times assume 100 GB/s aggregate storage bandwidth.

Model Size	Checkpoint Size	Write Time at 100 GB/s
7B	98 GB	0.98 s
13B	182 GB	2 s
70B	980 GB	10 s
175B	2,450 GB	24 s
1T	14,000 GB	140 s

At frontier scale (175B+ parameters), these sizes reach the terabyte range. This makes checkpoint write time a significant cost that directly affects the Young-Daly optimal interval. The checkpoint strategies in chapter 12 discuss techniques for reducing T_{write} (asynchronous checkpointing, incremental deltas, and distributed storage), all of which improve the Young-Daly result by shrinking the T_{write} factor under the square root.

Calculating the optimal checkpoint interval

Combining the checkpoint write time with the 10,000-GPU MTBF gives a concrete checkpoint cadence.

> Napkin Math E.1: Young-Daly: 175B model on a 10,000-GPU cluster
>
> **Setup**: Consider training a 175B-parameter model on a 10,000-GPU cluster. The cluster MTBF is 3.75 hours (table .272). The checkpoint size is 2,450 GB, and the parallel storage system writes at 100 GB/s.

Step 1: Checkpoint write time (T_{write}).

$$T_{\text{write}} = \frac{\text{Checkpoint Size}}{\text{Write Bandwidth}} = \frac{2{,}450\ \text{GB}}{100\ \text{GB/s}} = 24.5\ \text{s}$$

Step 2: Apply the Young-Daly formula (equation .122).

$$T^*_{\text{ckpt}} = \sqrt{2 \times T_{\text{write}} \times \text{MTBF}_{\text{system}}} = \sqrt{2 \times 24.5\ \text{s} \times 3.75\ \text{h} \times 3{,}600\ \text{s/h}} = 13.6\ \text{min}$$

Interpretation: The optimal checkpoint interval is approximately 14 minutes. The overhead from checkpointing alone is $T_{\text{write}}/T^*_{\text{ckpt}} \approx 3.0$ percent of training time.

Systems insight: If the cluster were doubled to 20,000 GPUs, the MTBF would halve, and the optimal interval would shrink to 9.6 minutes, so the system checkpoints more frequently because failures happen more often. This illustrates the fundamental tension at scale: larger clusters are faster but demand more frequent interruption to protect progress.

The boundary conditions of the Young-Daly formula merit attention. When T_{write} approaches $\text{MTBF}_{\text{system}}$ (checkpoint cost approaches MTBF), checkpoint and rework overheads become so large that checkpoint/restart alone may fail to maintain useful forward progress. In such cases, redundancy or elastic training becomes necessary, as discussed in section 4.

Recovery Budgets

When a failure occurs, the system does not instantly resume training. Detection, rescheduling, reloading state, and replaying lost work each consume time. Understanding this recovery anatomy reveals which phase dominates and where to invest engineering effort.

The anatomy of recovery time

Recovery is not a single event but a pipeline of phases, each with its own time budget. Equation .124 sums them into total recovery time:

$$T_{\text{recovery}} = T_{\text{detect}} + T_{\text{restart}} + T_{\text{load}} + T_{\text{replay}} \tag{.124}$$

The terms are all durations: failure detection, replacement scheduling, checkpoint reload, and replay of lost training work since the last checkpoint. Their sum is the wall-clock time before the job returns to productive training.

Table .275 breaks recovery into the phases that determine how long the cluster remains below full productivity after a failure.

Table .275: Recovery Time Breakdown: Each phase contributes to the total time between failure and full-speed resumption. For the 10,000-GPU, 175B-model scenario, replay dominates because it recomputes work lost since the last checkpoint.

Phase	Typical Duration	What Happens
T_{detect}	30 s	Heartbeat timeout expires; worker declared failed (confirmation adds to the budget in chapter 12)
T_{restart}	60 s	Replacement node allocated from spare pool
T_{load}	24.5 s	Checkpoint read from storage into GPU memory
T_{replay}	~6.8 min	Recompute training steps since last checkpoint
Total T_{recovery}	~9 min	System fully productive again

Decomposing this sequence shows that replay time T_{replay} typically dominates, controlled directly by the checkpoint interval: on average, half the interval must be replayed. This creates a reinforcing

loop with the Young-Daly formula. Shorter intervals mean less replay but more checkpoint overhead, and the formula finds the minimum of this sum.

The other phases offer engineering optimization targets. T_{detect} can be reduced with more aggressive heartbeat intervals (at the cost of false positives). T_{restart} depends on having hot spare nodes preallocated, a fleet orchestration decision covered in chapter 24. T_{load} scales with checkpoint size and storage bandwidth, motivating the checkpoint compression and sharding techniques discussed in chapter 12.

Goodput vs. rawput

Not all time spent on a training cluster produces useful progress. **Rawput** is the step rate the configured cluster could sustain without checkpoint or recovery interruptions. **Goodput** is the rate of committed training steps that contribute to the final model:

$$\text{Goodput Ratio} = \frac{\text{Committed Useful-Step Rate}}{\text{Fault-Free Step Rate}} \approx \frac{T_{\text{useful}}}{T_{\text{wall}}}$$

The modeled gap between rawput and goodput comes from two sources:

1. **Checkpoint overhead** ($\sim$ 3.0 percent): Training pauses during each checkpoint write.
2. **Recovery and rework overhead** ($\sim$ 3.9 percent): Time lost to detection, rescheduling, reloading, and replaying work discarded after each failure.

At 10,000-GPU scale, failures and checkpointing together can consume a substantial fraction of wall time. If they consume a fraction f_{overhead}, a fixed amount of useful work takes $1/(1 - f_{\text{overhead}})$ times its fault-free duration, not merely that duration plus f_{overhead} of it. The fleet orchestration strategies in chapter 24 and chapter 23 focus on narrowing this gap, because every percentage point of overhead recovered translates directly to dollars saved and training time shortened.

> **Systems Perspective E.1: The hidden cost of scale**
>
> A common misconception is that doubling cluster size halves training time. In practice, doubling from 5,000 to 10,000 GPUs halves the MTBF and increases failure-related overhead. The effective speedup is less than 2×, and at extreme scale, adding more GPUs can actually increase wall-clock time if the fault tolerance mechanisms cannot keep pace. This is the reliability analogue of Amdahl's Law: the serial overhead of recovery bounds the benefit of parallelism.

Strategy Selection

Checkpoint/restart is not the only fault tolerance strategy. For serving workloads where downtime is measured in lost revenue, redundancy provides a fundamentally different trade-off. Elastic training can resume on a smaller allocation when valid state and a feasible parallel decomposition remain available. Choosing the right strategy depends on the workload's tolerance for latency, cost, and complexity.

Checkpoint/restart vs. redundancy vs. elastic training

The three canonical strategies represent different points in the trade-off space between cost, complexity, and recovery speed.

Checkpoint/restart periodically saves full system state and rolls back to the last checkpoint after failure. It is the workhorse of large-scale training: conceptually simple, well-understood, and effective when MTBF is much larger than checkpoint cost. The weakness is that recovery requires stopping all workers and replaying lost computation.

Redundancy maintains alternate copies of state or computation. A surviving serving replica can take over only when routing, readiness, capacity, and the required request state meet the latency budget. Dedicated duplicate or triplicate execution costs 2–3× the compute resources; active-active serving instead shares normal traffic across replicas while reserving failover headroom. The justified overhead depends on the workload and recovery contract.

Elastic training allows a job to resume with fewer workers when the smaller allocation can hold its state and support its parallel decomposition. Membership changes can still require a coordinated restart and checkpoint reload; TorchElastic restarts the worker group. Workers may be added back when capacity becomes available. The recovery path must restore missing shards, preserve data coverage, and either preserve the effective batch size or validate a changed optimization policy. Elasticity can reduce waiting for replacement capacity, but does not guarantee a shorter interruption. Table .276 summarizes the trade-offs.

Table .276: Fault Tolerance Strategy Comparison: The latency and overhead ranges are illustrative, not guarantees; elasticity does not inherently require spare capacity. Real-world systems often combine strategies: checkpoint/restart for training with redundancy for the metadata service and checkpoint storage layer.

Criterion	Checkpoint/Restart	Redundancy	Elastic Training
Recovery latency	Minutes (replay)	Milliseconds (failover)	Restart and resize dependent
Resource overhead	~3–13% (storage + IO)	100–200% (replicas)	Resize and standby policy dependent
Workload fit	Training (batch)	Serving (online)	Training (long-running)
Implementation	Simple	Moderate	Complex
State management	Periodic snapshots	Continuous replication	Distributed with resharding
Failure mode	Job pauses, replays	Transparent to user	Pause, restore, then resume

The availability stacking formula

For serving workloads, availability is typically expressed as a percentage: 99 percent ("two nines"), 99.9 percent ("three nines"), and so on. Redundancy improves availability by running k independent replicas. Under an idealized model with reliable routing and enough capacity on any surviving replica, the system is unavailable only when all replicas are simultaneously down, which equation .125 captures:

$$A_{\text{system}} = 1 - (1 - A_{\text{single}})^k \tag{.125}$$

where A_{single} is the availability of a single replica and k is the number of replicas.

Evaluating availability stacking with independent replicas (table .277) quantifies the gain from adding serving capacity.

Table .277: Availability Stacking with Independent Replicas: Starting from a single-replica availability of 99 percent, each additional replica dramatically reduces expected downtime. Assumes replica failures are independent.

Replicas k	System Availability	Nines	Downtime per Year
1	99.00%	2.0	87.6 hours
2	99.9900%	4.0	52.6 minutes
3	99.9999%	6.0	31.5 seconds

Stacking independent redundant replicas achieves dramatic availability gains: two 99-percent-available replicas yield 99.99 percent availability, reducing annual downtime from roughly 87 hours to under an hour. This is why inference serving systems almost universally deploy multiple replicas behind a load balancer. The cost of an extra replica is small compared to the business value of four-nines availability.

The independence assumption is critical, however. Correlated failures, such as power outages affecting an entire rack, software bugs triggered by a specific input, or network partitions isolating a failure domain, defeat availability stacking. This is why chapter 12 emphasizes failure domain isolation: replicas must be placed in different racks, different power zones, and ideally different data centers to reduce shared failure modes. Placement alone does not eliminate common software, control-plane, or regional dependencies.

Checkpoint Intervals Beyond the First-Order Approximation

Young's approximation is most accurate when checkpoint time is small relative to the failure interval. Daly's analysis develops higher-order checkpoint models (Daly 2006). The simplified renewal model below shows why finite checkpoint time changes the optimum without claiming to reproduce Daly's full recovery model.

Renewal model and small-cost expansion

Let T_{ckpt} be useful compute time between completed checkpoints. Assume Poisson failures with rate $1/\text{MTBF}_{\text{system}}$, identical failure exposure during computation and writing, and zero detection, restart, or reload delay. A failed attempt loses its partial progress and repeats the interval. The expected elapsed time to complete one uninterrupted compute-plus-checkpoint attempt is:

$$\mathbb{E}[T_{\text{total}}] = \text{MTBF}_{\text{system}} \left(e^{\frac{T_{\text{ckpt}} + T_{\text{write}}}{\text{MTBF}_{\text{system}}}} - 1 \right) \tag{.126}$$

Writing $T_{\text{att}} = T_{\text{ckpt}} + T_{\text{write}}$ for the attempt duration, the renewal equation is $\mathbb{E}[T_{\text{total}}] = \mathbb{E}[\min(F, T_{\text{att}})] + \Pr(F < T_{\text{att}})\mathbb{E}[T_{\text{total}}]$, where F is an exponential failure time. Since $\mathbb{E}[\min(F, T_{\text{att}})] = \text{MTBF}_{\text{system}}(1 - e^{-T_{\text{att}}/\text{MTBF}_{\text{system}}})$, solving the equation gives equation .126.

Expanding the exponential through its quadratic term gives the wasted time per completed interval:

$$\mathbb{E}[T_{\text{total}}] - T_{\text{ckpt}} \approx T_{\text{write}} + \frac{(T_{\text{ckpt}} + T_{\text{write}})^2}{2 \cdot \text{MTBF}_{\text{system}}} \tag{.127}$$

When $T_{\text{write}}/\text{MTBF}_{\text{system}}$ is small, dividing equation .127 by T_{ckpt} leaves the leading terms $T_{\text{write}}/T_{\text{ckpt}} + T_{\text{ckpt}}/(2 \cdot \text{MTBF}_{\text{system}})$ of the wasted-time fraction. Minimizing those terms recovers Young's interval $\sqrt{2 \cdot T_{\text{write}} \cdot \text{MTBF}_{\text{system}}}$. For finite checkpoint costs, differentiate the unexpanded elapsed time per unit useful work, $\mathbb{E}[T_{\text{total}}]/T_{\text{ckpt}}$, instead. Its stationary point satisfies:

$$e^{(T^*_{\text{ckpt}} + T_{\text{write}})/\text{MTBF}_{\text{system}}} \left(1 - \frac{T^*_{\text{ckpt}}}{\text{MTBF}_{\text{system}}} \right) = 1, \qquad 0 < T^*_{\text{ckpt}} < \text{MTBF}_{\text{system}} \tag{.128}$$

For positive checkpoint cost, the equivalent derivative numerator $e^{(T_{\text{ckpt}} + T_{\text{write}})/\text{MTBF}_{\text{system}}}(T_{\text{ckpt}}/\text{MTBF}_{\text{system}} - 1) + 1$ increases from a negative value at zero to a positive value at $\text{MTBF}_{\text{system}}$. A one-dimensional root search on equation .128 therefore finds the unique optimum of this simplified model.

Choosing the appropriate approximation

The first-order formula is a useful planning estimate when writes are short compared with MTBF. When that condition fails, use a model that includes the deployment's checkpoint semantics, recovery delays, and failure exposure. The numerical condition above covers only the stated zero-restart-delay renewal model; asynchronous writes and correlated failures require different assumptions.

Silent Data Corruption in Attention

Not all hardware faults manifest as explicit system crashes, ECC double-bit errors, or kernel traps. **Silent Data Corruption (SDC)** occurs when single-bit errors or arithmetic logic unit (ALU) faults slip past parity checks, corrupting tensor values in SRAM, high-bandwidth memory (HBM), or register files without triggering an exception. In deep learning workloads, SDC is particularly dangerous because single corrupted floating-point values propagate through non-linear operations, destabilizing fleet-wide training (Dixit et al. 2021).

Exponent bit flip model in FP16

Consider an IEEE 754 half-precision floating-point (FP16) tensor element representing a query entry q_{im}, activation value, or weight matrix entry. FP16 allocates 16 total bits: 1 sign bit (s), 5 exponent bits (e), and 10 mantissa bits (m).

For a finite normal value, with exponent field $1 \le e \le 30$, the scalar x represented by the bitstring (s, e, m) is given by:

$$x = (-1)^s \times 2^{e-15} \times \left(1 + \frac{m}{1024}\right)$$

Suppose a cosmic ray, voltage drop, or SRAM failure causes a single bit flip in the most significant exponent bit (bit 14). The exponent value changes from e to $e' = e \pm 16$:

$$x_{\text{corrupt}} = (-1)^s \times 2^{(e\pm16)-15} \times \left(1 + \frac{m}{1024}\right) = x \times 2^{\pm16}$$

If both the original and corrupted exponent fields encode finite normal values, the magnitude increases by a factor of $2^{16} = 65{,}536$ or decreases by its reciprocal. Exponent fields of zero or all ones instead invoke the subnormal, zero, infinity, or NaN encodings, so the displayed normal-value formula does not apply.

Softmax saturation and error propagation

For one attention head, let $\mathbf{S} = \mathbf{Q}\mathbf{K}^T/\sqrt{d_{\text{head}}} \in \mathbb{R}^{S\times S}$ be the pre-softmax score matrix for sequence length S and head dimension d_{head}. Suppose an SDC event corrupts one element of token row i of the query matrix $\mathbf{Q}$, and write the resulting perturbation as $\Delta\mathbf{Q}$, with only that element nonzero:

$$\mathbf{S}_{\text{corrupt}} = \frac{(\mathbf{Q} + \Delta\mathbf{Q})\mathbf{K}^T}{\sqrt{d_{\text{head}}}} = \mathbf{S} + \Delta\mathbf{S}$$

where $\Delta\mathbf{S}$ is nonzero only in row i, with entries $\Delta S_{ij} = \Delta\mathbf{q}_i \cdot \mathbf{k}_j/\sqrt{d_{\text{head}}}$ for the corrupted query row $\Delta\mathbf{q}_i$ and key row $\mathbf{k}_j$.

The attention probability perturbation for token row i is:

$$\Delta\mathbf{a}_i = \text{softmax}\left(\mathbf{S}_{i,\cdot} + \Delta\mathbf{S}_{i,\cdot}\right) - \text{softmax}\left(\mathbf{S}_{i,\cdot}\right)$$

A large corrupted query component can strongly change several attention logits, with the signs and magnitudes determined by the corresponding key components. If one resulting logit exceeds every other logit by an increasingly large margin, the attention distribution approaches a one-hot vector:

$$\text{softmax}(\mathbf{S}_{i,\cdot} + \Delta\mathbf{S}_{i,\cdot})_j \to 1, \qquad \text{softmax}(\mathbf{S}_{i,\cdot} + \Delta\mathbf{S}_{i,\cdot})_{k\neq j} \to 0$$

This is a conditional saturation limit, not an inevitable consequence of a bit flip. The selected key depends on the corrupted logits; a corrupted query element does not identify one corrupted key. The softmax derivative is $\partial p_j/\partial S_{ik} = p_j(\delta_{jk} - p_k)$, which tends toward zero under saturation rather than diverging. Other paths through the computation can still produce large or nonfinite activations and gradients. If invalid state enters the optimizer or a collective, it can propagate across ranks; detection and recovery must therefore verify state before resuming from a clean checkpoint.

Summary

Failure is a physical constraint of scale. Under independent, constant component failure rates, a single GPU's mean lifetime is 5.7 years, yet the modeled 10,000-GPU cluster fails on average every 3.75 hours, because node failure rates sum across components and cluster MTBF divides by node count. The probability that a job is interrupted grows with its duration relative to that interval, so long runs on large clusters must plan for recovery rather than hope to avoid it.

Recovery has four modeled phases (detection, rescheduling, reloading, and replay), and replay is controlled by the checkpoint interval. The Young-Daly formula $T^{*}_{\text{ckpt}} = \sqrt{2T_{\text{write}}\,\text{MTBF}_{\text{system}}}$ (principle 12) balances write overhead against expected rework when writes are short compared with the MTBF, and section 4 examines finite-cost effects under a simplified renewal model. Checkpoint/restart suits batch training, redundancy suits latency-sensitive serving, and elastic training sits between them. Independent replicas reduce unavailability multiplicatively, to $(1 - A_{\text{single}})^{k}$ for k replicas, but only to the extent that failure-domain isolation keeps their failures independent.

Inference Foundations

Serving a model at scale is governed by the mathematics of waiting lines and the physics of the key-value cache. This appendix develops the analytical serving models that the book's inference and operations chapters draw on, establishing how queuing dynamics and attention-cache memory arithmetic combine into a single serving constraint under strict latency service-level objectives (SLOs). In C^3 terms, inference turns compute capacity, communication with memory and clients, and coordination across queues into one serving constraint.

How to Use This Appendix

This appendix is a quantitative reference for serving systems. Use the queuing surrogate to screen batch sizes and estimate mean delay under its stated assumptions, then validate tail latency with measurements or simulation; use the key-value cache arithmetic to size memory or determine when the cache, rather than compute, caps throughput.

- **When a serving tier misses its latency target under load**: Use the queuing model in section 4 to separate waiting, batch-formation, and service time.
- **When choosing a batch size**: Use the worked example in section 4 and the decision framework in section 4.
- **When memory, not compute, caps concurrency**: Use the KV-cache sizing in section 4.

Serving Performance Analysis

SERVING performance analysis has two coupled layers. The queue determines how requests wait, batch, and shed under stochastic arrivals; the key-value cache determines how much live state the accelerator can hold while meeting the latency budget. The subsections that follow derive the queuing model first, then connect that model to memory-capacity limits in the worked serving examples.

Queuing theory for batched inference

The batching efficiency curve provides intuition about throughput-latency trade-offs, but production systems require rigorous analysis to determine optimal batch sizes under stochastic arrival patterns. Queuing theory provides the mathematical framework to derive these optimal operating points and to understand why certain batch sizes outperform others under specific conditions.

Queuing notation and the M/G/1 batch surrogate

The **M/G/c/K notation** names four characteristics that a production GPU-serving model may need to represent:

- **M (Markov arrivals)**: Requests arrive according to a Poisson process with rate λ_{arr}. This models the memoryless property of user requests, where arrival of one request does not predict the timing of the next.
- **G (General service distribution)**: Service times follow a general distribution, not restricted to exponential. GPU inference times depend on batch size and exhibit deterministic components (compute) mixed with stochastic variation (memory contention, kernel scheduling).
- **c (Number of servers)**: The system has c parallel GPU workers, each capable of serving requests independently.

- **K (System capacity)**: At most K requests may be present, including those in service. Requests arriving to a full system are rejected (load shedding).

The notation comes from the same systems-performance lineage that sized telephone networks before it was applied to GPU clusters.

> Systems Perspective F.1: Queuing theory and performance
>
> Queuing theory, developed by Agner Krarup Erlang in 1909 for telephone network analysis, remains foundational to systems performance engineering (Erlang 1909). The same mathematical framework that sized telephone exchanges now informs GPU cluster capacity. Standard systems texts develop the component queuing models and approximations on which this notation builds (Jain 1991; Kleinrock 1975).

For a batched inference system with batch size B, service time becomes a function of batch size. Let $T_{\text{svc}}(B)$ denote the time to process a batch of B requests. From the physics of batching (section 5), equation .129 models this as:

$$T_{\text{svc}}(B) = T_{\text{fixed}} + t_{\text{req}} \cdot B \tag{.129}$$

where T_{fixed} represents fixed service overhead (kernel launch, weight loading from high-bandwidth memory (HBM)) and t_{req} represents marginal per-request computation time. This linear model captures the first-order behavior observed in production systems, though actual service times may exhibit slight sublinearity due to memory bandwidth saturation at large batch sizes.

The **Effective Service Rate** for batched processing is:

$$\mu_{\text{eff}}(B) = \frac{B}{T_{\text{svc}}(B)} = \frac{B}{T_{\text{fixed}} + t_{\text{req}} \cdot B}$$

The effective rate increases with batch size, approaching the asymptotic limit $1/t_{\text{req}}$ as $B \to \infty$.

Response time analysis

The total response time t for a request consists of three components:

$$\mathbb{E}[t] = \mathbb{E}[W_q] + \mathbb{E}[L_{\text{lat,form}}] + \mathbb{E}[T_{\text{svc}}]$$

where:

- $\mathbb{E}[W_q]$ is the expected waiting time in queue before joining a batch
- $\mathbb{E}[L_{\text{lat,form}}]$ is the expected per-request batch-accumulation delay before dispatch
- $\mathbb{E}[T_{\text{svc}}]$ is the expected inference time once the batch executes

For dynamic batching with maximum wait time T_{window} and maximum batch size $B_{\max}$, the first request triggers the batching window. Let $Q_{\text{arr}} \sim \text{Poisson}(\lambda_{\text{arr}} T_{\text{window}})$ count subsequent arrivals during that window and let $k = B_{\max} - 1$. For $B_{\max} > 1$, the realized batch size is $B = \min(B_{\max}, 1 + Q_{\text{arr}})$, including the trigger request, so:

$$\mathbb{E}[B] = \sum_{n=0}^{k-1} (n+1) \Pr(Q_{\text{arr}} = n) + B_{\max} \Pr(Q_{\text{arr}} \geq k)$$

Let τ_k be the Erlang-distributed time of the kth subsequent arrival. A full batch closes when $\tau_k \leq T_{\text{window}}$, while a timeout batch closes at T_{window} with $Q_{\text{arr}} = n < k$. The mean per-request accumulation delay within each realized batch is:

$$\mathbb{E}[L_{\text{lat,form}} \mid \text{full}] = \frac{1}{2} \mathbb{E}[\tau_k \mid \tau_k \leq T_{\text{window}}]$$

$$\mathbb{E}[L_{\text{lat,form}} \mid Q_{\text{arr}} = n, \text{ timeout}] = \frac{T_{\text{window}}}{2} \left(1 + \frac{1}{n+1}\right), \qquad 0 \leq n < k$$

Weighting each batch outcome by its realized request count gives the mean delay of a randomly selected request:

$$\mathbb{E}[L_{\text{lat,form}}] = \frac{B_{\max}\Pr(Q_{\text{arr}} \geq k)\mathbb{E}[\tau_k/2 \mid \tau_k \leq T_{\text{window}}] + \sum_{n=0}^{k-1}(n+1)\Pr(Q_{\text{arr}} = n)\mathbb{E}[L_{\text{lat,form}} \mid Q_{\text{arr}} = n,\ \text{timeout}]}{\mathbb{E}[B]}$$

When batches reliably fill before timeout, this expression approaches $\mathbb{E}[\tau_k]/2 = (B_{\max} - 1)/(2\lambda_{\text{arr}})$. For $B_{\max} = 1$, the batch contains only its trigger request and accumulation delay is zero.

Optimal batch size derivation

The optimal batch size B minimizes expected response time subject to throughput requirements:

$$B = \arg\min_B \mathbb{E}[t(B)] \quad \text{subject to} \quad \mu_{\text{eff}}(B) > \lambda_{\text{arr}}$$

The constraint ensures system stability (service rate exceeds arrival rate).

For a high-traffic regime in which batches of size B reliably fill before timeout, substituting the response time components gives:

$$\mathbb{E}[t(B)] = \mathbb{E}[W_q(B)] + \frac{B-1}{2\lambda_{\text{arr}}} + T_{\text{svc}}(B)$$

For a tractable waiting-time estimate, use an M/G/1 surrogate that treats batches as Poisson "super-requests." If the request arrival rate is λ_{arr} and the average batch size is B, this surrogate uses batch arrival rate $\lambda_{\text{batch}} = \lambda_{\text{arr}}/B$. This is not the exact process produced by grouping Poisson request arrivals, because fixed-size grouping yields Erlang inter-batch times; finite K or $c > 1$ requires a bulk-service model or simulation. Within the explicit surrogate, the Pollaczek-Khinchine formula gives:

$$\mathbb{E}[W_q] = \frac{\lambda_{\text{batch}} \cdot \mathbb{E}[T_{\text{svc}}^2]}{2(1-\rho_{\text{serv}})}$$

where $\rho_{\text{serv}} = \lambda_{\text{batch}} \cdot \mathbb{E}[T_{\text{svc}}] = \lambda_{\text{arr}} \cdot \mathbb{E}[T_{\text{svc}}]/B$ is the server utilization. The second moment $\mathbb{E}[T_{\text{svc}}^2]$ captures service time variability.

For the linear service time model with deterministic service in this surrogate:

$$\mathbb{E}[W_q(B)] = \frac{\lambda_{\text{arr}} \cdot T_{\text{svc}}(B)^2}{2B(1-\lambda_{\text{arr}} \cdot T_{\text{svc}}(B)/B)}$$

For production sizing, teams often first enforce a utilization headroom target rather than solving the full latency minimization problem. With $T_{\text{svc}}(B) = T_{\text{fixed}} + t_{\text{req}}B$, the constraint $\rho_{\text{serv}} = \lambda_{\text{arr}}T_{\text{svc}}(B)/B \leq \rho_{\text{target}}$ yields the target-utilization batch bound (equation .130):

$$B_{\text{util}}(\rho_{\text{target}}) = \frac{\lambda_{\text{arr}}T_{\text{fixed}}}{\rho_{\text{target}} - \lambda_{\text{arr}}t_{\text{req}}} \tag{.130}$$

where ρ_{target} is the target utilization (typically 0.7–0.8 for production systems to maintain latency headroom) and $\rho_{\text{target}} > \lambda_{\text{arr}}t_{\text{req}}$.

> Systems Perspective F.2: Target-utilization batch sizing
>
> The target-utilization batch bound (equation .130) reveals a fundamental insight: *minimum utilization-feasible batch size grows with fixed overhead and arrival rate*. This means:
>
> 1. **Higher traffic** (λ_{arr}): Required batch size increases.
> 2. **Higher fixed overhead** (T_{fixed}): Required batch size increases to amortize overhead.
> 3. **Higher target utilization** (ρ_{target}): Required batch size decreases, but with less latency headroom.

This utilization-constrained sizing explains why large language models (LLMs) (high T_{fixed} from weight loading) benefit from larger batches than vision models (low T_{fixed}), even at the same arrival rate.

GPT-3 serving at 100 QPS

Consider a hypothetical prefill-stage sizing exercise for a GPT-3 class model (175B parameters). The following assumed service-time coefficients illustrate the queuing calculation; they are not a measured GPT-3 benchmark:

- Arrival rate: $\lambda_{\text{arr}} = 100$ requests/second
- Hardware: 8× A100 GPUs (one DGX A100 node) with tensor parallelism
- Fixed prefill-stage service overhead: $T_{\text{fixed}} = 50$ ms
- Marginal prefill-stage service time: $t_{\text{req}} = 0.5$ ms per request
- Target utilization: $\rho_{\text{target}} = 0.75$

For the prefill phase (processing input prompt), service time follows equation .129:

$$T_{\text{svc}}(B) = 50 + 0.5 \cdot B \text{ ms}$$

Applying equation .130 to compute the minimum batch size that meets the 75 percent target utilization (leaving 25 percent headroom):

$$B_{\text{util}} \approx \frac{100 \times 0.05}{0.75 - 100 \times 0.0005} = \frac{5}{0.70} \approx 7.14$$

Rounding up gives $B = 8$ as the smallest batch size that meets the target utilization headroom. Evaluating the surrogate response-time expression under the full-batch assumption then shows how larger batches reduce utilization but add batch-accumulation delay:

Evaluating GPT-3 serving performance across batch sizes (table .278) exposes the trade-off between queuing delay and server utilization:

Table .278: Batch Size Impact on GPT-3 Serving Performance: Batch sizes of 5 or fewer cannot sustain 100 QPS (utilization exceeds 100 percent); $B = 6$ is the smallest stable batch and $B = 8$ the smallest that meets the 75 percent utilization target. Among the tabulated sizes, $B = 8$ has the lowest mean latency, and evaluating every integer batch size places the minimum of this model near $B = 10$. $B = 16$ has similar mean latency with lower utilization, while $B = 32$ leaves more headroom but pays a large accumulation-delay penalty.

Size B	$T_{\text{svc}}(B)$ (ms)	req/s	ρ_{serv}	$\mathbb{E}[W_q]$ (ms)	$(B-1)/(2\lambda_{\text{arr}})$ (ms)	$\mathbb{E}[t]$ (ms)
1	50.5	19.8	505% (unstable)	∞	0	∞
4	52	76.9	130% (unstable)	∞	15	∞
8	54	148.1	67.5%	56.1	35	145.1
16	58	275.9	36.3%	16.5	75	149.5
32	66	484.8	20.6%	8.6	155	229.6

Four operational regimes emerge across these batch sizes:

1. **Unstable regime (batch sizes 1 to 5)**: Utilization exceeds 100 percent, so the system cannot keep up with arrivals and queues grow without bound. The stability boundary of equation .131, $B_{\text{min}} \approx 5.3$, falls inside this range.
2. **Utilization-target threshold (batch size 8)**: At 67.5 percent utilization, the system meets the 75 percent target, but queuing delay still contributes substantially to latency (56.1 ms). The steep occupancy trajectory charted in figure .249 isolates why: batch sizes between the stability boundary and this threshold push utilization past the $\rho_{\text{serv}} \approx 0.80$ hockey-stick knee into the caution band, where queuing delay surges nonlinearly as the curve approaches saturation.

3. **Latency knee (batch sizes 8 to 16)**: Mean latency is lowest in this range, with the model's minimum near $B = 10$. Batch size 16 trades a few milliseconds of additional total latency for lower utilization and queue wait time (16.5 ms vs. 56.1 ms), while $B = 32$ leaves still more utilization headroom but pays too much batch-accumulation delay.
4. **Diminishing returns (batch sizes beyond 32)**: Further batch size increases reduce utilization in this surrogate but increase accumulation delay. The separate KV-cache example below supplies a decode-memory bound; it is not part of this prefill-time calculation.

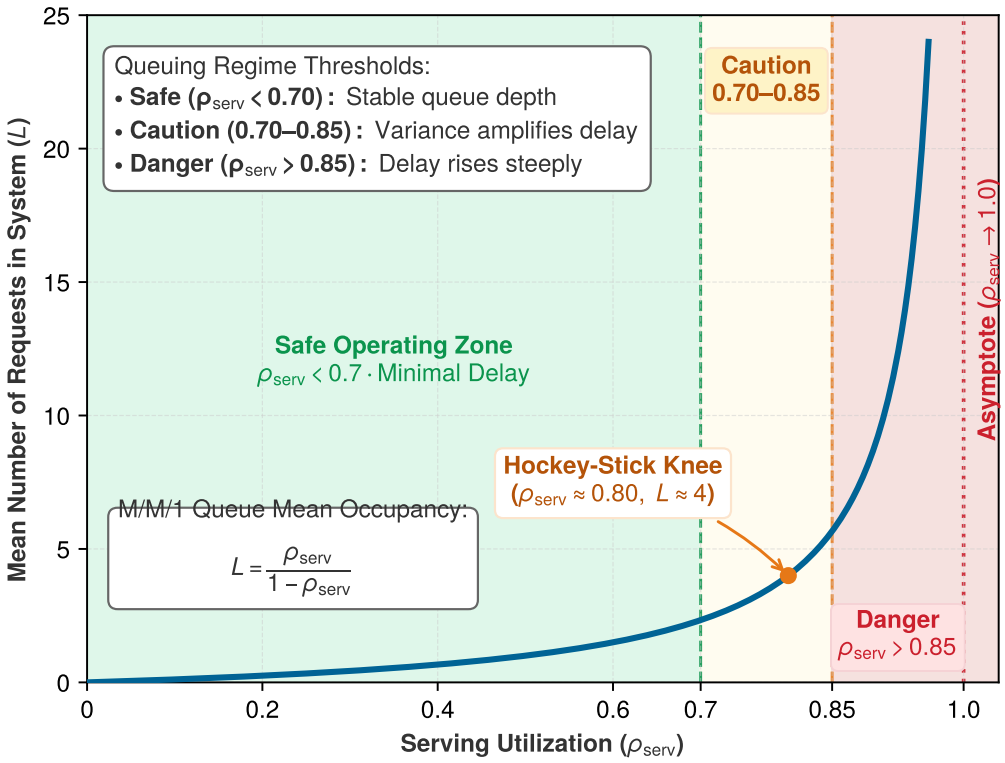


Figure .249: The queuing hockey stick: For an M/M/1 queue, $\rho_{\text{serv}}/(1-\rho_{\text{serv}})$ is the expected number of requests in the system, including the request in service. Its hyperbolic rise near saturation explains why production systems retain utilization headroom; the shaded operating bands are illustrative rather than universal thresholds.

Applying Little's Law provides an internal consistency check for these results.

Napkin Math F.1: Applying Little's Law to verify

Verification: By Little's Law (Little 1961), $Q_{\text{req}} = \lambda_{\text{arr}} \cdot T_{\text{lat}}$:
At $B = 16$ with $\lambda_{\text{arr}} = 100$ req/s and $\mathbb{E}[t] = 149.5$ ms:
$Q_{\text{req}} = 100 \times 0.1495$ s = 14.95 requests in system
With batch size 16 and utilization 36.3 percent:

- Expected requests in service: $16 \times 0.363 = 5.8$
- Expected requests in queue: 14.95 - 5.8 = 9.15

This matches the response-time decomposition: roughly 6 requests are in service and roughly 9 are waiting or accumulating into batches on average.

Batch size selection framework given an SLA

Production systems must select batch size to meet Service Level Objectives (SLOs), typically specified as latency percentiles (for example, p99 latency < 200 ms). The following framework systematizes this decision:

Step 1 characterize service time Measure T_{fixed} and t_{req} empirically by profiling inference at batch sizes 1, 8, and 32. Fit the linear model $T_{\text{svc}}(B) = T_{\text{fixed}} + t_{\text{req}} B$.

Step 2 compute stability threshold Find minimum batch size B_{min} such that $\mu_{\text{eff}}(B_{\text{min}}) > \lambda_{\text{arr}}$:

$$B_{\text{min}} = \frac{T_{\text{fixed}} \lambda_{\text{arr}}}{1 - t_{\text{req}} \lambda_{\text{arr}}} \tag{.131}$$

Choose an integer batch size strictly above this boundary, assuming $\lambda_{\text{arr}} t_{\text{req}} < 1$. Equality leaves no stability margin; if the denominator is nonpositive, batching alone cannot sustain the arrival rate.

Step 3 compute latency at candidate batch sizes Under the same Poisson-super-request surrogate and full-batch assumption, for each candidate $B \in \{B_{\text{min}}, 2B_{\text{min}}, \ldots, B_{\text{max}}\}$, compute:

$$\mathbb{E}[t(B)] = \frac{\lambda_{\text{arr}} \cdot T_{\text{svc}}(B)^2}{2B(1 - \lambda_{\text{arr}} T_{\text{svc}}(B)/B)} + \frac{B-1}{2\lambda_{\text{arr}}} + T_{\text{svc}}(B)$$

Step 4 account for tail latency If measured response times are approximately Gaussian, their p99 can be estimated as:

$$T_{\text{lat,p99}} \approx \mathbb{E}[t] + 2.33 \cdot \sigma_t$$

where σ_t is the standard deviation of response time. This Gaussian rule is not a general heavy-traffic approximation because queuing response times are commonly skewed. For exponential response times, p99 is $-\ln(0.01)\mathbb{E}[t] \approx 4.6 \cdot \mathbb{E}[t]$; use measured percentiles for production sizing.

Step 5 select optimal batch size When the objective is maximum throughput under the increasing service-rate model, choose the largest stable, memory-feasible integer batch size whose p99 latency meets the SLO:

$$B = \max\{B : T_{\text{lat,p99}}(B) \leq \text{SLO}\}$$

Operating rules for batch size selection (table .279) balance stability, latency SLOs, and cost efficiency:

Table .279: Batch Size Decision Framework: Systematic approach to selecting batch size based on stability, latency SLO, and utilization targets.

Condition	Recommended Action	Rationale
$B < B_{\text{min}}$	Increase batch size or add replicas	System is unstable
$T_{\text{lat,p99}} > \text{SLO}$	Re-evaluate stable batch sizes or add replicas	Latency exceeds target
$\rho_{\text{serv}} < 0.5$	Consider reducing replicas to save cost	System is overprovisioned
$\rho_{\text{serv}} > 0.85$	Add replicas for headroom	Approaching instability

These rules generate candidate configurations; load tests must verify their latency, capacity, and cost under the actual request distribution.

Trade-off curves for visualizing the operating region

Figure .250 charts the competing pressures of batch execution by plotting normalized throughput against batch service time across batch sizes $B \in [1, 128]$ on a logarithmic scale. While throughput climbs with diminishing returns as fixed overheads are amortized, batch service time expands steadily, defining the envelope where latency budgets constrain throughput gains.

The trade-off curve demonstrates several key insights:

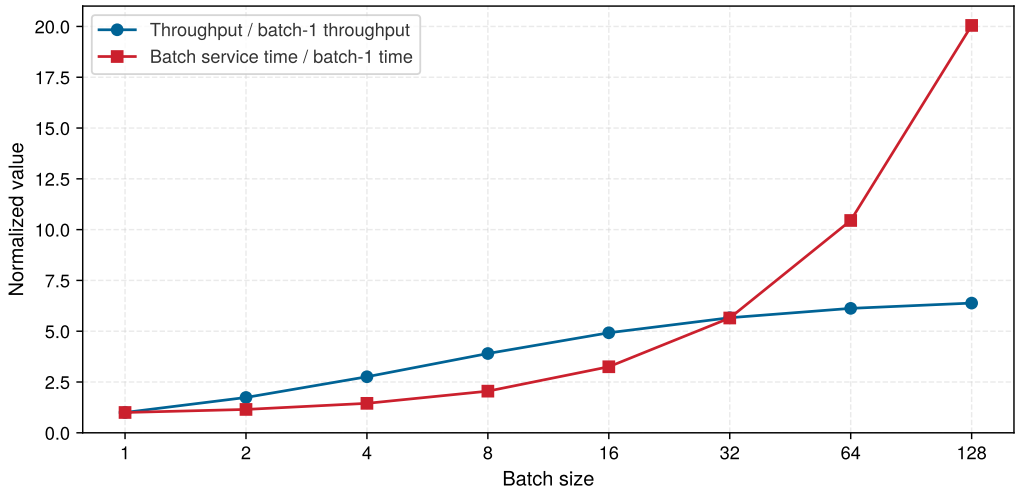


Figure .250: Batch Size Trade-Off Curves: Dimensionless schematic with batch service time t(B) = 1 + 0.15(B − 1) and throughput B/t(B), each normalized to its batch-1 value. Larger batches amortize fixed work but take longer to complete. These hypothetical curves are not a benchmark, exclude queuing and batch-formation delay, and establish neither a memory-capacity boundary nor an optimal batch size.

1. **Pareto Frontier**: An operating point is Pareto efficient when no other candidate provides at least as much throughput and no more latency, with a strict improvement in at least one objective. The frontier is the set of these nondominated points.
2. **Knee of the Curve**: A knee marks diminishing throughput gains relative to increasing service time; it does not by itself select the best operating point.
3. **SLO-Constrained Optimum**: The best feasible batch size depends on the optimization objective and measured end-to-end latency, including queuing and batch formation. An SLO boundary can constrain that choice without guaranteeing an intersection or a unique optimum.
4. **Diminishing Returns**: In the schematic, fixed work becomes a smaller fraction of each batch, so successive batch-size increases yield smaller throughput gains.

The queuing-theoretic framework provides the mathematical foundation for the batching strategies introduced in section 5. Where intuition might suggest "larger batches are better for throughput," stability constraints, latency targets, and diminishing returns create a well-defined optimal operating region that varies by model type and deployment requirements.

KV cache fundamentals

Section 5 defines the KV cache and the paged allocation that manages it, and section 3 gives its per-token size. This section expands the sizing math behind that definition: why the cache reduces per-token compute, why its memory grows with sequence length and batch size, and why unmanaged allocation can fragment HBM (Kwon et al. 2023).

For a standard attention implementation at fixed model width, autoregressive generation without caching requires $\mathcal{O}(S^2)$ computation per token because each transformer layer recomputes the full prefix, including attention among its tokens. The KV cache stores previously computed key and value vectors, allowing each new token to attend to the prefix in $\mathcal{O}(S)$ computation. For serving at scale, this compute saving creates a critical memory-management challenge since KV cache memory can exceed model weights for long contexts.

The cache size grows with context as calculated by equation .132:

$$M_{\text{KV}} = 2 \times N_L \times d \times S \times B \times s_{\text{elem}} \tag{.132}$$

For standard multihead attention, where the aggregate KV width equals the hidden width, N_L is the number of layers, d is the hidden dimension, S is sequence length, B is batch size, s_{elem} is storage

size per element in bytes, and the factor of 2 accounts for both keys and values. Grouped-query or multiquery attention instead uses the aggregate KV-head width in place of d.

For the 175B GPT-3 model ($N_L = 96$, $d = 12{,}288$, FP16 $s_{\text{elem}} = 2$ bytes) at its training context length $S = 2{,}048$, each request requires:

$$M_{\text{KV/req}} = 2 \times 96 \times 12288 \times 2048 \times 2 \text{ B} \approx 9.66 \text{ GB/request}$$

Across 8× A100 80-GB GPUs (687.2 GB total HBM), storing model weights in FP16 consumes 350 GB, leaving 337.2 GB for activation and KV cache memory. Dividing that residual capacity by the per-request cache gives a capacity-only upper bound of 34 concurrent requests. This bound assumes balanced sharding and reserves no memory for activations, workspaces, runtime state, or allocator losses; an implementable batch must be smaller. Device nameplate capacities are converted to decimal GB before subtracting the decimal model footprint.

Summary

Serving performance is bounded by queues and by memory. As utilization ρ_{serv} approaches 1, queue depth and latency grow without bound, so production systems retain headroom suited to their workload and SLO. Larger batches raise throughput but add batch-accumulation delay, which produces a latency knee rather than monotonic improvement; the best batch size depends on whether the objective is minimum mean latency, maximum SLO-compliant throughput, or cost. Little's Law, $Q_{\text{req}} = \lambda_{\text{arr}} T_{\text{lat}}$, gives a one-line consistency check on any serving measurement. The KV cache grows with sequence length, batch size, and KV-head width and can exceed the model weights (principle 15); paging reduces fragmentation and reservation losses without removing the underlying footprint.

System Assumptions

Every quantitative example in this book, from cluster failure rates to collective-communication costs to carbon footprint estimates, uses a specific set of assumed numbers: canonical cluster sizes, fabric bandwidths, accelerator reliability, power usage effectiveness, regional carbon intensity, and model utilization ranges. This appendix collects those fleet-scale assumptions in one place so the book's arithmetic can be audited, checked against chapter napkin math, or substituted into worked examples.

How to Use This Appendix

Use this appendix to verify a fleet-scale estimate, swap in an alternative assumption (for example, NDR vs. HDR fabric, Quebec vs. Poland carbon intensity, or a different model FLOPs utilization (MFU)), or identify which numerical constants a chapter calculation depends on. Locate the relevant section, read the `Value` and `Unit` columns, and substitute those values into target arithmetic.

A short napkin-math callout at the start shows how several assumptions combine (failure rate, AllReduce time, carbon footprint). Hardware and link bandwidths are ceilings unless a chapter states an effective-bandwidth discount. Treat the tables as this edition's shared assumption sheet, not immutable physical laws.

Napkin Math G.1: Quick calculations with these assumptions

These tables support quick distributed-systems napkin math. Three examples show how several assumptions combine.

Problem: Estimate how many GPU failures a cluster should expect per day.

Variables: Use a cluster of 8,192 GPUs and an individual GPU mean time to failure (MTTF) of 50,000 hours.

Math: The GPU failure rate is 8,192 GPUs/50,000 hours $\approx$ 0.16 failures/hour, or roughly 3.9 failures/day.

Result: This estimate excludes network interface card (NIC), PSU, and cable failures. At 100,000 GPUs, the GPU-only rate is approximately 48 failures/day; adding NIC, PSU, and cable failures can roughly double the operational incident stream.

Systems insight: At fleet scale, failure becomes a continuous background process rather than an exceptional event.

Problem: Estimate how long an AllReduce takes for a 70B model.

Variables: Use BF16 parameters and InfiniBand NDR with a nominal byte rate of 50 GB/s per port.

Math: The gradient payload is $70 \times 10^9 \times 2$ bytes = 140 GB. The ring AllReduce napkin estimate is 2×140 GB/50 GB/s $\approx$ 5.6 s.

Result: The collective can consume a significant fraction of a training step.

Systems insight: Pipeline and tensor parallelism exist partly to shrink the gradient volume each rank must communicate.

Problem: Estimate the carbon footprint of a 10,000-GPU training run.

Variables: Each H100 draws 700 W at thermal design power (TDP). Use power usage effectiveness (PUE) 1.12, Quebec grid intensity 20 g/kWh, and Poland grid intensity 820 g/kWh.

Math: A GPU-only facility-power proxy is 10,000 GPUs $\times$ 700 W $\times$ 1.12 = 7.84 MW. In Quebec, 7.84 MW $\times$ 720 h/month $\times$ 20 g/kWh = 112.9 t CO_2 per month.

Result: The same run in Poland emits 4,628.7 t, a 41× difference.

Systems insight: Grid carbon intensity can dominate the emissions difference for the same hardware, model, and training duration. This proxy excludes host, memory, network, and storage power; total IT power must include those loads before applying PUE for a complete facility estimate.

Foundational Hardware Recap

Distributed-systems reasoning in this book builds on single-node performance bounds. Table .280 recaps the H100 assumptions used as the primary accelerator reference in this book.

Table .280: Single-Node H100 Assumptions: Peak specs from (Choquette 2023) and NVIDIA H100 documentation. Provide R_{peak} and BW baselines for iron-law calculations.

Category	Assumption	Value
Compute	H100 FP16 peak throughput	989 TFLOP/s
Compute	H100 FP8 peak throughput	1,979 TFLOP/s
Memory	HBM3 bandwidth	3.35 TB/s
Memory	HBM3 capacity	80 GB
Thermal	TDP	700 W

Appendix 5 derives the single-machine quantities built on these specifications, including the ridge point, the memory hierarchy, and the per-parameter memory of training.

Reference Workload

WHERE a chapter needs a concrete training job, it uses the Archetype A running instance that section 11 fixes. Table .281 restates it so that any calculation built on it can be audited or rerun with a different model or cluster. A chapter that studies a different model or cluster size says so explicitly.

Table .281: Archetype A Running Instance: Mixed-precision training with the Adam optimizer (BF16 weights and gradients, FP32 master weights, two FP32 Adam moments); the checkpoint omits gradients. Section 3 derives the per-parameter bytes. The reference cluster is the book's 1,024-GPU training cluster; the canonical cluster tiers below illustrate how behavior changes as scale departs from it.

Assumption	Value
Model parameters (dense transformer)	175B
Training state per parameter	16 bytes
Total training state	2.8 TB
Resumable checkpoint per parameter	14 bytes
Resumable checkpoint size	2.45 TB
Reference cluster	1,024 H100 GPUs (128 nodes of 8)

Cluster Reference Configurations

This book uses four **Canonical Cluster Tiers** (256, 2,048, 8,192, and 100,000 GPUs) to illustrate how system behavior changes across scale. They are editorial reference points aligned with common research-lab, production, large-training, and hyperscale fleets, not measurements from a single deployment. Table .282 defines GPU counts; chapters derive node counts, failure rates, and network requirements from these baselines and the assumptions in subsequent tables.

Table .282: Canonical Cluster Sizes: Book-convention tier sizes for fleet-scale examples. At 8 per node: 32 nodes, 256 nodes, 1,024 nodes, and 12,500 nodes. Failure handling shifts from exception to steady state between the 256- and 8,192-GPU tiers (Kokolis et al. 2025).

Assumption	Value	Unit
Small cluster GPU count (256 tier)	256	GPUs
Medium cluster GPU count (2,048 tier)	2,048	GPUs
Large cluster GPU count (8,192 tier)	8,192	GPUs
Mega cluster GPU count (100,000 tier)	100,000	GPUs

The relationship between cluster size and system behavior is not linear. A 256-GPU cluster might go days between failures; a 100,000-GPU cluster experiences multiple failures per hour. This nonlinearity is why the chapters on fault tolerance (chapter 12) and fleet orchestration (chapter 24) treat failure as a continuous background process rather than an exceptional event.

The network fabric determines whether gradient synchronization takes milliseconds or seconds, and whether pipeline parallelism is viable across node boundaries.

Network and Interconnect Specifications

Distributed training and inference are bottlenecked by data movement between machines as often as by computation within them. **Network Assumptions** fix bandwidth and latency for every interconnect tier, from NVLink/PCIe within a node (NVIDIA Corporation 2017, 2020; Choquette 2023), through InfiniBand, remote direct memory access (RDMA), and Ethernet fabrics (InfiniBand Trade Association 2000; Gangidi et al. 2024; NVIDIA 2026e; Ethernet Alliance 2025), to the speed-of-light WAN floor (physics identity).

Intra-node interconnects

Within a single node, GPUs communicate over NVLink or PCIe. These bandwidths (table .283) determine whether tensor parallelism (which requires high-bandwidth, low-latency communication) is viable within the node boundary. These values are collected here for convenience and reused throughout the fleet-scale chapters.

Table .283: Intra-Node Interconnect Bandwidth and Latency: NVLink/PCIe peaks from vendor documentation (NVIDIA Corporation 2017, 2020; Choquette 2023). The displayed NVLink rates are bidirectional aggregates; PCIe rates are per direction. Comparing like-for-like per-direction rates gives an NVLink/PCIe ratio of 7–10×, informing placement of communication-intensive tensor parallelism.

Assumption	Value	Unit
NVLink bandwidth (V100)	300	GB/s
NVLink bandwidth (A100)	600	GB/s
NVLink bandwidth (H100)	900	GB/s
PCIe Gen3 bandwidth (V100 host)	15.75	GB/s

Assumption	Value	Unit
PCIe Gen4 bandwidth (A100 host)	32	GB/s
PCIe Gen5 bandwidth (H100 host)	64	GB/s
NVLink one-way latency	500	ns
PCIe Gen5 one-way latency	1000	ns

Inter-node interconnects

Once data crosses the node boundary, bandwidth drops by an order of magnitude and latency increases by 5–10×. This cliff shapes every decision about parallelism strategy: operations that require frequent, fine-grained communication (tensor parallelism) stay within the node, while operations with coarser communication patterns (data parallelism, pipeline parallelism) span nodes. To accommodate the different conventions used across chapters, table .284 catalogs both the bit-rate and byte-rate forms of each fabric.

Table .284: Inter-Node Network Bandwidth and Latency: Fabric link rates from (InfiniBand Trade Association 2000) and product-line specifications. The 9× NVLink-vs-NDR gap explains topology-aware parallelism (chapter 8, chapter 15).

Assumption	Value	Unit
InfiniBand HDR link bandwidth (bit rate)	200	Gb/s
InfiniBand HDR bandwidth (byte rate)	25	GB/s
InfiniBand NDR link bandwidth (bit rate)	400	Gb/s
InfiniBand NDR bandwidth (byte rate)	50	GB/s
InfiniBand XDR bandwidth (byte rate)	100	GB/s
400 GbE bandwidth (byte rate)	50	GB/s
800 GbE bandwidth (byte rate)	100	GB/s
100 GbE RoCE bandwidth (byte rate)	12.5	GB/s
InfiniBand one-way latency	5000	ns

Wide-area network

Cross-region communication introduces latency floors set by the speed of light in optical fiber. For a 5,000 km link (roughly New York to London), the minimum one-way latency is 5,000 km/200,000 km/s = 25 ms, orders of magnitude higher than intra-data-center latency. This physical constraint is why geo-distributed training uses asynchronous methods or careful placement of pipeline stages, and why federated learning (chapter 16) tolerates stale gradients.

Network specifications define how fast data moves, but they say nothing about how often the machines sending that data fail. The next section quantifies the reliability of individual components, the building blocks from which cluster-level failure rates are derived.

Reliability Assumptions

At fleet scale, component failures are not exceptional events but statistical certainties. **Reliability Assumptions** here fix MTTF for each major component class in a data-center GPU node and the time to detect and recover from failures. These values drive analysis in chapter 12 and scheduling in chapter 24; deeper failure modeling appears in Appendix 4.

Component MTTF

Table .285 lists the MTTF for each component class. These are steady-state values that exclude the "infant mortality" period (first 30–90 days) and the "wear-out" period (beyond rated lifetime). Sources include large-GPU research-cluster analysis Kokolis et al. (2025), TPUv4 supercomputer resiliency and operations Zu et al. (2024), and warehouse-scale machine design Barroso et al. (2019).

Table .285: Component Mean Time To Failure: Steady-state MTTF anchors from (Kokolis et al. 2025; Zu et al. 2024; Barroso et al. 2019). Combined DGX H100 node MTBF ≈ 4,687.5 h (195.3 d) for 8 GPUs and 8 NICs in series, the same node composition as the MTBF cascade in section 4. The node's 6 PSUs run 4+2 redundant, so no single PSU failure stops it and they add no term. The PCIe switch and HBM rows are node components that series model leaves out, and the top-of-rack switch and cable rows are network failures outside the node. Counting any of them would shorten the interval between interruptions a job sees.

Assumption	Value	Unit
GPU MTTF	50,000	hours
NIC MTTF	150,000	hours
PSU MTTF	100,000	hours
PCIe switch MTTF	200,000	hours
HBM MTTF	200,000	hours
Top-of-rack switch MTTF	300,000	hours
Optical cable and transceiver MTTF	50,000	hours

Recovery time assumptions

Failure detection and recovery introduce downtime that compounds with cluster size. Table .286 lists the assumptions used in checkpoint interval optimization (the Young-Daly formula in section 13) and effective throughput calculations throughout this book.

Table .286: Recovery Time Parameters: Design assumptions for heartbeat, reschedule, and checkpoint-write bandwidth (Young-Daly context (Young 1974; Daly 2006)). Recovery before replay ≈ detect + reschedule + checkpoint size divided by storage bandwidth; for a 70B-parameter model with a 14-byte-per-parameter checkpoint, about 99.8 s per failure.

Assumption	Value	Unit
Failure detection timeout (heartbeat)	30	seconds
Job reschedule delay	60	seconds
Checkpoint write bandwidth (aggregate)	100	GB/s

Reliability constants quantify how often failures occur and how long recovery takes. Productive training steps also incur recurring communication overhead; the following parameters determine its cost.

Communication Model Parameters

This book models communication cost using the α-β framework: $T(n) = \alpha + n/\beta$, where α is startup latency and β is sustained bandwidth (Hockney 1994). Table .287 lists values from fabric specifications, vendor product documentation, and large-cluster training studies (InfiniBand Trade Association 2000; Gangidi et al. 2024; NVIDIA 2026e; Ethernet Alliance 2025; Z. Jiang et al. 2024). They feed collective-communication models in chapter 8 and parallelism comparisons in chapter 15.

Table .287: Communication Model Parameters (α-β): α (startup) and β (bandwidth) from fabric specifications and measured cluster studies (InfiniBand Trade Association 2000; Z. Jiang et al. 2024). The InfiniBand NDR α is the per-message base latency used in the book's collective models, which is smaller than the fabric's end-to-end one-way latency in table .284; the other rows are end-to-end startup latencies. The 33× NDR-vs-TCP gap explains why RDMA fabrics dominate synchronous training.

Assumption	Value	Unit
InfiniBand NDR startup latency (α)	1.5	us
InfiniBand NDR sustained bandwidth (β)	50	GB/s
InfiniBand HDR startup latency (α)	7	us
InfiniBand HDR sustained bandwidth (β)	25	GB/s
RoCE startup latency (α)	10	us
RoCE sustained bandwidth (β)	12.5	GB/s
TCP startup latency (α)	50	us

AllReduce cost model

The ring AllReduce (the most common collective for gradient synchronization) transmits $2(N-1)M/N$ bytes per rank, where N is the number of ranks and M is the collective payload size. For large N, this approaches $2M$ bytes per rank. Table .288 lists the constants used in AllReduce cost estimation.

Table .288: AllReduce Cost Parameters: Ring AllReduce factor of 2 from the standard ring algorithm (Gibiansky 2017). The DGX H100 node (8 GPUs per node) sets the intra-node versus inter-node boundary in hierarchical collectives.

Assumption	Value	Unit
Ring AllReduce bandwidth factor	2	(dimensionless)
GPUs per node	8	GPUs/node

Communication models quantify the overhead of coordination. The sustainability cost of that coordination (the power drawn, the water consumed, the carbon emitted) requires separate assumptions for the physical infrastructure surrounding the compute.

Sustainability Assumptions

The environmental impact of fleet-scale ML depends on three factors: how much power the facility draws beyond the IT equipment (PUE), how much water the cooling system consumes (water usage effectiveness (WUE)), and how much carbon the local grid emits per kilowatt-hour. **Sustainability Assumptions** here support chapter 20 and total-cost-of-ownership estimates in chapter 23.

Power usage effectiveness

PUE is the ratio of total facility power to IT equipment power. A PUE of 1.0 would mean no facility energy beyond the IT equipment. The following values are illustrative facility scenarios, not universal bounds or guarantees of a cooling technology. Table .289 lists the reference PUE values used throughout this book.

Table .289: power usage effectiveness (PUE): Illustrative PUE tiers from hyperscale surveys and Green Grid definitions (Uptime Institute 2022; The Green Grid 2007). Legacy vs. liquid-cooled gap: 49.1 percent more facility power for the same IT load.

Assumption	Value	Unit
PUE (liquid-cooled, best in class)	1.06	(ratio)

Assumption	Value	Unit
PUE (best air-cooled)	1.12	(ratio)
PUE (industry average, 2022)	1.55	(ratio)
PUE (legacy air-cooled)	1.58	(ratio)

Water usage effectiveness

WUE measures liters of water consumed per kilowatt-hour of IT energy (The Green Grid 2011). Evaporative cooling towers achieve excellent PUE but consume significant water; a closed liquid loop can limit water consumption at the rack, but facility water use still depends on the heat-rejection system outside that loop. Table .290 lists the reference WUE values.

Table .290: water usage effectiveness (WUE): Illustrative WUE tiers for cooling-class comparisons (The Green Grid 2011; Uptime Institute 2022). Evaporative example at 10 MW IT load: 432,000 L/day.

Assumption	Value	Unit
WUE (air-cooled)	1.8	L/kWh
WUE (evaporative cooling)	1.8	L/kWh
WUE (closed-loop liquid)	0	L/kWh

Regional carbon intensity

The same training run emits vastly different amounts of CO_2 depending on the grid that supplies its electricity. Table .291 lists regional grid carbon intensities from IEA and Canadian government emissions-factor data (International Energy Agency 2024b; Environment and Climate Change Canada 2026), rounded for napkin math. These values are central to location-aware scheduling in chapter 20.

Table .291: Regional Grid Carbon Intensity: Grid carbon intensity in gCO_2/kWh, anchored to emissions-factor data (International Energy Agency 2024b; Environment and Climate Change Canada 2026) and ordered from low (Norway) to high (Poland). Location alone changes carbon intensity by 82×, often more than algorithmic tweaks.

Assumption	Value	Unit
Grid carbon intensity (Norway)	10	gCO2/kWh
Grid carbon intensity (Quebec)	20	gCO2/kWh
Grid carbon intensity (France)	50	gCO2/kWh
Grid carbon intensity (EU average)	270	gCO2/kWh
Grid carbon intensity (US average)	429	gCO2/kWh
Grid carbon intensity (Poland)	820	gCO2/kWh

Power density

Dense AI accelerator racks can draw substantially more power than conventional racks. Whether liquid cooling is required depends on the installed heat-removal capacity, airflow, and server design, rather than a universal rack-power threshold. Table .292 lists the reference rack power levels used in chapter 11 and chapter 20, anchored to current AI power-and-cooling product disclosures (Dell Technologies 2026; Schneider Electric 2024).

Table .292: Rack Power Density: Illustrative rack-power tiers and air-cooling limit (Uptime Institute 2022; Dell Technologies 2026; Schneider Electric 2024). The listed AI rack scenarios (70 kW–100 kW) exceed the illustrative 30 kW air-cooling reference; the feasible limit depends on the installed system.

Assumption	Value	Unit
Rack power (traditional enterprise)	12	kW
Rack power (AI, typical)	70	kW
Rack power (AI, high density)	100	kW
Air-cooling practical limit per rack	30	kW

Sustainability constants capture the physical and environmental costs of running a fleet. The economic constants in the next section translate those physical costs into dollar values, completing the total-cost-of-ownership picture.

Economic Assumptions

Fleet-scale cost estimates depend on GPU rental rates, electricity pricing, and data transfer charges. These are illustrative hyperscaler-order rates (2024–2025 magnitude) for ratio analysis, not quotes for a specific contract. Table .293 supports chapter 23 and chapter 6 total cost of ownership (TCO) napkin math.

Table .293: Fleet-Scale Economic Parameters: Illustrative cloud GPU, electricity, and egress rates for TCO examples (substitute contract pricing for absolute budgets).

Assumption	Value	Unit
Cloud GPU training rental rate	4	dollar/h
Cloud GPU inference rental rate	2.5	dollar/h
Cloud electricity price	0.12	dollar/kWh
Cloud egress price per GB	0.09	dollar/GB

Economic constants set the price per unit of resource. Capacity planning instead asks what fraction of each resource unit does useful work. Capacity planning constants quantify the gap between peak capability and achievable throughput.

Capacity Planning Assumptions

Capacity-Planning Assumptions quantify two related phenomena: (1) the fraction of peak hardware performance that real workloads achieve (model FLOPs utilization), and (2) how efficiently that performance scales as more machines are added (scaling efficiency). Together they determine the effective compute available for a given cluster size and budget, which is the number that matters for project planning.

The planning equation is multiplicative:

$$R_{\text{eff}} = NR_{\text{peak}} \times \text{MFU} \times \eta_{\text{scaling}} \times (1 - f_{\text{overhead}})$$

Here R_{eff} is effective fleet throughput, NR_{peak} is nominal cluster peak throughput, MFU is the single-device baseline measured over productive steps, η_{scaling} captures the additional in-step losses from distribution, including communication and pipeline bubbles, and f_{overhead} removes only out-of-step checkpoint, recovery, and maintenance time. These windows must be disjoint: measured fleet-step MFU already includes scaling losses, so it must not be multiplied by scaling efficiency again. The three subsections that follow fix those factors in order.

Model FLOPs utilization

MFU measures useful model FLOP/s divided by hardware peak FLOP/s over a stated measurement window. Synchronization and idle time within that window lower MFU even though they contribute no model FLOPs. An MFU of 0.50 means the workload achieves half the peak FLOP/s. Table .294 lists the reference MFU ranges used in training time and cost estimates throughout this book.

Table .294: model FLOPs utilization (MFU) ranges: Training MFU 0.3–0.5 from large-model training reports (Chowdhery et al. 2022; Narayanan et al. 2021); inference batch-1 MFU 5 percent from (Pope et al. 2023) (memory-bound decode).

Assumption	Value	Unit
Training MFU (low end)	0.3	(fraction)
Training MFU (high end)	0.5	(fraction)
Inference MFU (batch size 1)	0.05	(fraction)
Inference MFU (batched)	0.4	(fraction)

Scaling efficiency

Scaling efficiency $\eta_{\text{scaling}} = T_1/(N \times T_N)$ measures how much of the added compute actually reduces training time. Table .295 lists the tiers the book plans with. From 256 GPUs up, these values match MLSysIM's modeled efficiency curve for the 175B reference job at a fixed GPT-3 global batch—extending the multi-GPU scaling sweep charted in chapter 24 (figure 0.103) out to 8,192 accelerators—while the 32-GPU tier is a book convention, since one tensor- and pipeline-parallel replica of that job needs 64 GPUs. Production systems retain more at scale by training with a larger global batch and, where they pipeline, by interleaving stages. Published large language model (LLM) training runs built this way report near-linear scaling on thousands of accelerators (Z. Jiang et al. 2024; Chowdhery et al. 2022).

Table .295: Scaling Efficiency by Cluster Size: Planning η_{scaling} tiers. The 256- to 8,192-GPU values are MLSysIM's model of the 175B reference job at a fixed global batch, and the 32-GPU value is a book convention. At 8,192 GPUs, 4,587.5 effective GPUs of 8,192 nominal.

Assumption	Value	Unit
Scaling efficiency (32 GPUs)	0.9	(fraction)
Scaling efficiency (256 GPUs)	0.87	(fraction)
Scaling efficiency (1,024 GPUs)	0.83	(fraction)
Scaling efficiency (8,192 GPUs)	0.56	(fraction)

Overhead budgets

Real training jobs spend a fraction of wall time on noncompute activities: pipeline bubble idle time, checkpoint writes, failure recovery, and scheduled maintenance. Table .296 lists the overhead budgets assumed throughout this book. When measured as nonoverlapping fractions of the same wall-time window, these fractions are additive: total overhead at fleet scale is approximately 5 percent + 3 percent + 10 percent + 5 percent = 23 percent, leaving 77 percent outside these listed overhead categories. This combined budget includes pipeline bubbles; the planning equation above excludes them from its operational factor because scaling efficiency already accounts for them.

Table .296: Overhead Budgets (Fraction of Wall Time): Book-convention wall-time fractions for pipeline bubbles, checkpointing, failure recovery, and maintenance, engineering targets, not physical constants. Combined 23 percent overhead ⇒ 23.1 days of effective work in a 30-day run.

Assumption	Value	Unit
Wall-time overhead (pipeline bubbles)	0.05	(fraction)
Wall-time overhead (checkpointing)	0.03	(fraction)
Wall-time overhead (failure recovery)	0.1	(fraction)
Wall-time overhead (scheduled maintenance)	0.05	(fraction)

The tables above use the unit conventions in table .297, decimal data prefixes (KB $= 10^3$ bytes), separate work (FLOPs) from throughput (FLOP/s), and the aliases below.

Unit Conventions

Table .297 fixes the unit conventions used in every quantitative example in this book. Each row gives the multiplier k in `1 alias` $= k$ `base`. Data prefixes use decimal SI (KB $= 10^3$ bytes, not 1024). Throughput quantities (FLOP/s, GB/s) combine these aliases with time; adding incompatible dimensions (bytes to FLOP/s) is a category error in napkin math, not a unit conversion.

Hardware capacity labels are the one deliberate exception. Reference tables may retain vendor nameplate numbers and labels; the byte budgets used in calculations follow the device assumptions stored in the book's hardware registry. For example, the book models an 80 GB accelerator with 80×2^{30} bytes, so a node of eight such devices holds 640×2^{30} bytes rather than 640×10^9. These are modeled capacity assumptions, not universal guarantees inferred from the labels. Every other data quantity, including model footprints, KV-cache sizes, checkpoint volumes, and collective payloads, uses the decimal prefixes above. Where a worked example subtracts a computed footprint from a device capacity, the stored capacity byte budget is converted to decimal units alongside the footprint so that the arithmetic printed on the page is the arithmetic a reader can reproduce.

Table .297: Unit Conventions: Decimal SI aliases and scale factors (book convention). Throughput forms (FLOP/s, GB/s) divide work or data by time using the same conventions.

Alias	Multiplier	Base unit
`byte`	1	byte
`KB`	1000	byte
`MB`	1e+06	byte
`GB`	1e+09	byte
`TB`	1e+12	byte
`PB`	1e+15	byte
`flop`	1	flop
`GFLOPs`	1e+09	flop
`TFLOPs`	1e+12	flop
`ZFLOPs`	1e+21	flop
`param`	1	param
`Mparam`	1e+06	param
`Gbps`	1e+09	bit/s
`NS`	1e-09	second
`US`	1e-06	second
`MS`	0.001	second

Alias	Multiplier	Base unit
`second`	1	second
`hour`	3600	second
`day`	86400	second
`joule`	1	joule
`watt`	1	watt
`meter`	1	meter

Two fleet-scale conventions deserve emphasis beyond the table:

- Network bandwidth appears in both bit-rate (Gbps) and byte-rate (GB/s). Divide by 8 to convert Gbps to GB/s (for example, 400 Gb/s = 50 GB/s for InfiniBand NDR). Chapters use whichever form fits the calculation; byte-rate is usually easier for transfer-time estimates.
- Carbon intensity uses gCO_2/kWh (grams of CO_2 per kilowatt-hour). Multiply total energy (kWh) by regional carbon intensity to get emissions in grams, then divide by 10^6 for tonnes.

Assumption Provenance

The catalog below maps each appendix section to its source category and primary literature references, providing a transparent audit trail for the book's numerical constants. See table .298 for the full table.

Table .298: Fleet Assumption Provenance Catalog: Quick map from appendix section to source class and bibliography.

Appendix section	Source type	Primary references
H100 recap	Vendor datasheet peak	(Choquette 2023)
Reference workload (Archetype A)	Book convention	GPT-3-class dense model; byte widths from the notation conventions
Cluster tiers	Book convention	(Kokolis et al. 2025) (scale context)
Network fabrics	Vendor specs; InfiniBand standard	(NVIDIA Corporation 2017, 2020; Choquette 2023; InfiniBand Trade Association 2000)
Reliability (MTTF)	Fleet studies	(Kokolis et al. 2025; Zu et al. 2024; Barroso et al. 2019)
Recovery times	Design assumptions	(Young 1974; Daly 2006)
Communication (α-β)	Fabric specs; training at scale	(InfiniBand Trade Association 2000; Z. Jiang et al. 2024)
AllReduce model	Algorithm identity	(Gibiansky 2017)
Sustainability (PUE/WUE/rack power)	Industry surveys	(Uptime Institute 2022; The Green Grid 2007)
Carbon intensity	Grid statistics	(International Energy Agency 2024b; Environment and Climate Change Canada 2026)
Cloud economics	Illustrative rates	Editorial (2024–2025 order of magnitude)
MFU	Published LLM training	(Chowdhery et al. 2022; Narayanan et al. 2021; Pope et al. 2023)
Scaling efficiency	MLSysIM model; book convention	Context: (Z. Jiang et al. 2024; Chowdhery et al. 2022)
Overhead budgets	Book convention	Editorial engineering targets
Unit conventions	Decimal SI; book notation	Editorial

Summary

This appendix is the book's shared fleet-scale assumption sheet. Every napkin-math estimate in the chapters should trace to a row in the tables above, and table .298 records whether that row comes from a datasheet, a fleet study, an MLSysIM model, an illustrative rate, or a book convention.

Reliability rows set the failure clock, with failure a steady-state condition at 10,000 or more GPUs (Appendix 4 models it in depth). Communication rows decide whether synchronous training is viable, and the 33× startup-latency gap between InfiniBand NDR and TCP explains why training clusters favor RDMA fabrics. Sustainability rows expose location as a lever, since grid carbon intensity differs by 82× between Norway and Poland. Capacity rows bridge peak hardware to useful throughput. At 8,192 GPUs, about 56 percent of ideal scaling is realized for the reference job at a fixed batch, and the listed overheads consume about 23 percent of wall time. When a deployment differs in fabric, region, MFU, or cluster size, substitute its values and re-evaluate the corresponding formulas.

Glossary

This glossary defines key terms used throughout this book. Terms are organized alphabetically.

1

1F1B scheduling One-Forward-One-Backward scheduling, a synchronous pipeline scheduling algorithm that alternates forward and backward passes for in-flight microbatches, capping peak activation memory to $\mathcal{O}(N_{\text{PP}})$ where N_{PP} is pipeline depth.

2

2.5D/3D chiplet packaging Advanced semiconductor packaging methodologies (such as TSMC CoWoS or Intel EMIB) that interconnect modular silicon dies across high-density interposers or direct vertical bonds, overcoming single-die reticle limits.

3

3D parallelism The composition of data parallelism, pipeline parallelism, and tensor parallelism across orthogonal axes of a cluster mesh to match physical bandwidth tiers (intra-node NVLink, inter-node fabric, cluster spine).

A

accountability The mechanisms by which individuals or organizations are held responsible for the outcomes of AI systems, involving traceability, documentation, auditing, and the ability to remedy harms.

activation checkpointing A memory-saving training technique that stores only selected activations and recomputes others during backpropagation, trading extra compute for lower memory use.

active optical cable (AOC) A fiber-optic cable assembly with integrated electro-optical transceivers at both ends that converts high-speed electrical signals to optical pulses, providing reaches up to 100 meters across server racks.

adapter modules Small trainable neural network components inserted between frozen layers of a pretrained model to enable lightweight adaptation without modifying the base architecture.

adaptive routing A routing mechanism that selects among available paths using current network conditions, such as queue occupancy, to avoid hot spots while preserving the transport's ordering requirements.

advanced packaging Semiconductor integration techniques, such as 2.5D interposers, chiplets, and 3D stacking, that connect multiple dies with shorter, denser links than a conventional circuit board can provide.

adversarial attack A type of attack where carefully crafted inputs are designed to cause machine learning models to make incorrect predictions while remaining nearly indistinguishable from legitimate data to humans.

adversarial example A maliciously modified input that is designed to fool a machine learning model into making an incorrect prediction, often created by adding small, imperceptible perturbations to legitimate data.

adversarial training A defense technique that involves training models on adversarial examples to improve their robustness and ability to correctly classify adversarial inputs.

algorithmic fairness The principle and mathematical formulation that algorithmic decisions should not disproportionately or unjustly disadvantage individuals or protected groups based on sensitive demographic attributes.

alignment tax The measured degradation in general task performance, training throughput, or inference latency incurred as a byproduct of applying safety and alignment interventions.

AllGather A collective communication operation that gathers each rank's shard and makes the combined result available to every rank.

AllReduce A collective communication operation that reduces values across ranks and returns the reduced result to every rank, commonly used for gradient synchronization.

AllToAll A collective communication operation where each rank sends distinct data to every other rank and receives distinct data from each rank.

alpha-beta model A communication cost model that separates fixed startup latency from message-size-dependent transfer time to estimate the cost of moving data.

Amdahl's Law The bound on the speedup of fixed work across N processors when a fraction r of it is serial, $1/(r + (1 - r)/N)$, which can never exceed $1/r$. At fleet scale, the serial fraction includes exposed communication, synchronization, and pipeline bubbles.

anomaly detection The identification of patterns in data that do not conform to expected behavior, often used to detect outliers, faults, or malicious activities in systems.

anonymization The process of removing or modifying personally identifiable information from datasets to protect individual privacy, though often insufficient against sophisticated re-identification attacks.

Archetype A (GPT-4/Llama-3) The book's recurring large dense language-model workload, used to probe communication-heavy distributed training and memory-bandwidth-bound serving. Its running instance is a 175B-parameter dense transformer trained with mixed precision and the Adam optimizer on 1,024 H100 GPUs.

Archetype B (DLRM at Scale) The book's recurring recommendation workload, a deep learning recommendation model whose large embedding tables are sharded across many nodes. It probes sparse feature routing, all-to-all communication, and tail latency.

Archetype C (Federated MobileNet) The book's recurring edge workload, an efficient convolutional network trained by federated learning across phone-class devices with sustained power budgets of a few watts. It probes the per-device compute envelope and the coordination of unreliable participants.

arithmetic intensity The amount of computation performed per byte of data moved, usually measured in FLOP/byte.

artificial intelligence A broad field of computer science focused on creating systems that can perform tasks typically requiring human intelligence, including learning, reasoning, and decision-making.

asynchronous checkpointing A fault-tolerance mechanism that snapshots model state into local staging memory before asynchronously streaming bytes to persistent storage in the background, minimizing training stall time.

attained service scheduling A duration-agnostic priority queueing discipline where job priority decreases monotonically as cumulative resource consumption increases, approximating shortest remaining processing time without requiring runtime estimates.

autoencoder A neural network architecture that learns compressed data representations by minimizing reconstruction error, commonly used for anomaly detection and dimensionality reduction.

automation bias The tendency for humans to over-rely on automated system outputs even when clear errors are present, potentially compromising human oversight.

AutoML Automated machine learning that uses algorithms to automate the process of applying machine learning to real-world problems, including feature engineering, model selection, and hyperparameter tuning.

availability The property that a storage service responds when a client needs it; it is distinct from whether acknowledged data survives failures or whether a read returns the newest committed version.

availability attack A type of data poisoning attack that aims to degrade the overall performance of a machine learning model by introducing noise or corrupting training data across multiple classes.

B

backdoor attack A malicious machine learning attack where a model is trained or poisoned to perform normally on standard inputs but produce adversary-selected behaviors whenever a specific secret trigger pattern is present.

backfill scheduling An optimization policy that schedules smaller, shorter queued jobs out of order onto currently idle resources, provided they do not delay the planned start time of higher-priority gang-scheduled jobs.

backpressure A control response that slows admission or bounds in-flight work when a downstream stage cannot sustain the upstream arrival rate.

backpropagation The algorithm for computing gradients in neural networks by propagating error signals backward through layers, essential for training but computationally expensive on resource-constrained devices.

bandwidth hierarchy The ordered set of data-movement tiers within and between computing systems, from on-chip memory through device, node, rack, and pod interconnects, whose bandwidth generally decreases as physical distance increases.

batched gather-matrix-vector (BGMV) A GPU kernel operation that batches matrix-vector products across heterogeneous adapters, gathering adapter-specific weights according to each token's adapter index.

Bayesian neural networks Neural networks that incorporate probability distributions over their weights, enabling uncertainty quantification in predictions and more robust decision-making.

bias detection Systematic methods for identifying unfair discrimination or disparate treatment across different demographic groups in machine learning system outputs.

bias mitigation Techniques and interventions designed to reduce unfair discrimination in machine learning systems, applied during data collection, model training, or postprocessing stages.

bias-only adaptation A lightweight training strategy that freezes all model weights and updates only scalar bias terms, drastically reducing memory requirements and computational overhead for on-device learning.

bin packing The assignment of jobs with resource demands into fixed-capacity nodes or clusters; in ML fleets this often spans GPUs, memory, CPUs, network locality, and topology.

bisection bandwidth The minimum aggregate link capacity crossing any cut that splits a network into two equal halves, bounding worst-case throughput for global communication.

bit flip A hardware fault where a single bit in memory or a register unexpectedly changes its value from 0 to 1 or vice versa, potentially corrupting data or computations.

black-box attack An adversarial attack where the attacker has no knowledge of the model's internal architecture, parameters, or training data, and must rely solely on querying the model and observing outputs.

block-wise quantization A quantization method that partitions tensors into independent sub-blocks with individual scaling factors, confining extreme outlier values to single blocks.

built-in self-test (BIST) Hardware testing mechanisms that allow components to test themselves for faults using dedicated circuitry and predefined test patterns.

bulk synchronous parallel (BSP) A parallel execution model in which workers perform local computation, communicate, and then wait at a global barrier before the next step.

C

C³ taxonomy The book's diagnostic framework for distributed execution, which divides wall-clock time and bottlenecks into Compute (C_1, local arithmetic and memory on each node), Communication (C_2, data movement between devices), and Coordination (C_3, synchronization, scheduling, and recovery). The Fleet Law assigns one term to each dimension.

canary deployment A rollout pattern that sends a small slice of traffic to a new model or service version, monitors behavior, and then expands or rolls back.

CAP theorem A distributed-systems result stating that, under a network partition, a system must choose between strict consistency and availability.

carbon-aware scheduling A workload scheduling strategy that shifts compute tasks geographically or temporally to match periods of high renewable energy availability and low grid carbon intensity.

carbon footprint The total amount of greenhouse gas emissions produced directly and indirectly by an individual, organization, event, or product, typically measured in CO_2-equivalent.

carbon intensity The greenhouse gas emissions associated with a unit of electricity, commonly measured in grams of CO_2-equivalent per kilowatt-hour.

carbon usage effectiveness (CUE) A datacenter sustainability metric defined as the ratio of total carbon dioxide equivalent emissions produced by datacenter operations to total IT equipment energy consumption.

catastrophic forgetting The tendency of a neural network to abruptly lose proficiency on previously learned tasks or historical distributions when sequentially trained on new data without rehearsal or regularization.

certified robustness A formal guarantee that a model prediction remains unchanged for all allowed perturbations within a specified radius or norm bound.

checkpoint and restart mechanisms Techniques that periodically save a program's state so it can resume from the last saved state after a failure, improving system resilience.

checkpoint storm A synchronized surge of massive network and storage write traffic that occurs when all nodes in a distributed training fleet flush model parameters and optimizer states simultaneously at periodic intervals.

chunked prefill A prompt ingestion strategy that divides long input contexts into fixed-size token chunks co-scheduled alongside single-token decode steps, preventing compute-intensive prefill passes from causing head-of-line latency spikes on decode streams.

circular economy An industrial economic model aimed at eliminating waste through the continual use, refurbishment, remanufacturing, and recycling of physical assets.

client drift The divergence of local model updates from the global optimal trajectory during federated learning, caused by multiple local optimization steps on heterogeneous, non-IID data distributions.

client scheduling The process of selecting which devices participate in federated learning rounds based on availability, data quality, and resource constraints to ensure representative model updates.

clock gating A circuit technique that suppresses the clock signal to inactive logic blocks, reducing dynamic power without changing the supply voltage or clock frequency of active blocks.

cloud ML Machine learning systems that use cloud computing infrastructure to provide scalable computational resources for training and inference, typically offering high-bandwidth connectivity and substantial processing power.

communication-computation ratio The ratio $\rho = T_{\text{comm}}(N)/(T_{\text{compute}}/N)$ of per-step communication time to local computation time. Values near or above 1 indicate substantial communication pressure; achievable overlap depends on independent work and available resources. The ratio is the time-domain form of communication intensity.

co-packaged optics (CPO) An advanced packaging architecture that co-locates silicon photonics transceivers directly on the same substrate as the network switch ASIC, shortening electrical trace lengths to millimeters to drastically lower interconnect energy per bit.

collective operation A group communication pattern in which all ranks participate to aggregate, broadcast, or redistribute data.

combinational logic Digital logic circuits where the output depends only on the current input states, not any past states or memory elements.

communication-computation overlap The concurrent execution of data transfer and useful computation whose dependencies are already satisfied. Only communication that fits within the available independent work can be hidden; any remaining transfer tail stays on the critical path.

communication intensity (CI) The ratio of bytes transferred across a network to local floating-point operations performed. It extends arithmetic-intensity reasoning from a device's memory hierarchy to a distributed system's network fabric.

compound AI systems AI architectures that combine multiple specialized models, tools, and components to achieve complex capabilities through systematic integration rather than relying on a single monolithic model.

compute express link (CXL) An open industry-standard interconnect protocol built on the PCIe physical layer that provides high-bandwidth, low-latency, cache-coherent shared memory access and pooling across heterogeneous processors and memory expanders.

concept bottleneck models Neural network architectures that first predict interpretable intermediate concepts before making final predictions, combining deep learning power with transparency.

concept drift A statistical change in the relationship between input features and target labels over time ($p(y \mid x)$), causing trained model predictions to degrade even if input data distributions remain unchanged.

confidential computing A security technology that protects data in use by performing computation inside hardware-isolated, cryptographically attestation-backed Trusted Execution Environments (TEEs).

conformal prediction A framework that uses held-out calibration data to construct prediction sets or intervals with finite-sample marginal coverage at a specified level under exchangeability.

congestion control Mechanisms that regulate traffic injection or routing in response to load, preventing persistent queues, packet

loss, and tail-latency amplification in a shared fabric.

consistency The contract that determines which version a read may observe when writes overlap or replicas disagree.

consistent hashing A hash-based routing method that keeps keys or sessions mapped to stable replicas while minimizing remapping when replicas are added or removed.

constitutional AI A training method where models learn to improve their own outputs by critiquing responses against a set of principles, enabling iterative self-refinement and reducing harmful content while maintaining helpfulness.

contestability The architectural property and operational mechanism enabling end users or auditors to interrogate, challenge, and seek redress or recourse against algorithmic decisions.

context parallelism An attention-level distributed execution technique that partitions long sequence lengths across dedicated process groups using point-to-point ring communication or sequence-head transposes.

continual learning The ability of machine learning systems to learn continuously from a stream of data while retaining previously acquired knowledge, addressing the challenge of catastrophic forgetting in neural networks.

continuous batching An inference scheduling architecture that groups and schedules active requests at each autoregressive token generation iteration rather than waiting for an entire batch to complete, eliminating padding waste.

controller pattern An asynchronous, declarative control loop (standardized in Kubernetes) that continuously observes the actual state of cluster resources and drives mutations to converge toward the desired declared state.

cooling effectiveness The efficiency with which a data center cooling system removes heat from computing equipment, typically measured as the ratio of heat removed to energy consumed for cooling.

coordinated checkpointing A distributed fault-tolerance protocol where all participating worker ranks synchronize at a common execution step to capture a globally consistent snapshot of application state.

counterfactual explanation An interpretability mechanism specifying the minimal input perturbation required to flip a model's output prediction or decision.

covariate drift A shift in the distribution of input features ($p(x)$) between training and production environments while the true conditional probability distribution of targets ($p(y \mid x)$) remains unchanged.

covariate shift A type of distribution shift where the input distribution changes while the conditional relationship between inputs and outputs remains stable.

critical batch size A workload-dependent crossover beyond which increasing the batch yields diminishing reductions in the optimization steps needed to reach a target quality. The gradient noise scale can provide a proxy; the crossover is not necessarily a hardware-throughput or training-time optimum.

critical message size The operational crossover payload size ($n^* = \alpha \cdot \beta$) in the α-β model below which communication is dominated by startup latency and above which transfer time is dominated by link bandwidth.

CUDA graphs A GPU execution model that captures a sequence of kernel launches and memory dependencies into a static graph, amortizing CPU dispatch overhead through single-request replay.

D

D·A·M taxonomy A single-node systems framework decomposing workloads into Data (dataset volume and pipeline throughput), Algorithm (computational complexity and arithmetic intensity), and Machine (compute capabilities and memory hierarchy), projected onto distributed fleets via the C^3 taxonomy.

dark launching A deployment strategy where newly updated model versions process production traffic in the background without exposing outputs to end users, measuring system performance and stability under real load.

data center A facility housing computer systems and associated components such as telecommunications and storage systems, typically including redundant power supplies, cooling systems, and network connections.

data compression Techniques for reducing the size and complexity of training data through encoding, quantization, or feature extraction to enable efficient storage and processing on memory-constrained devices.

data contract A formal agreement between data producers and downstream consumers defining schema definitions, semantic constraints, and freshness expectations for ML feature pipelines.

data parallelism A training strategy where each worker holds a full model replica, processes a different data shard, and synchronizes gradients before applying the same update.

data poisoning An adversarial attack where malicious or corrupted data is deliberately injected into training datasets to degrade overall model accuracy or introduce specific vulnerabilities.

data provenance An immutable, auditable record tracking the origin, lineage, licensing, filtering criteria, and preprocessing transformations applied to training data throughout its lifecycle.

data sanitization The process of deliberately and permanently removing or destroying data stored on memory devices to make it unrecoverable, ensuring data security.

data stall ratio A diagnostic efficiency metric measuring the fraction of total training step duration during which accelerators sit idle waiting for input data from storage or preprocessing pipelines.

datasheets for datasets A standardized documentation framework that records the provenance, composition, collection methodology, and intended use cases of machine learning datasets.

decode phase The autoregressive generation phase in LLM inference that emits tokens one step at a time using the KV cache, often limited by memory bandwidth.

decode piggybacking A co-scheduling optimization in chunked prefill systems where memory-bandwidth-bound decode token generation executes concurrently with compute-bound prefill matrix multiplications, increasing GPU arithmetic intensity.

deep learning A subset of machine learning using neural networks with multiple hidden layers to automatically learn hierarchical representations from data.

defensive distillation A technique that trains a student model to mimic a teacher model's behavior using soft labels, reducing sensitivity to adversarial perturbations.

demographic parity A group fairness criterion requiring that the likelihood of receiving a positive algorithmic prediction or outcome is identical across all protected demographic subgroups.

Dennard scaling The historical observation that as transistors become smaller, their power density remains approximately constant, allowing for more transistors without proportional increases in power consumption.

depthwise separable convolutions A computational technique that decomposes standard convolutions into depthwise and pointwise operations, reducing parameters and computation by roughly 8–9$\times$ for typical 3×3 high-channel mobile layers.

differential privacy A mathematical guarantee bounding how much a randomized algorithm's output distribution can change between neighboring datasets. The parameters ϵ and δ limit individual influence under the stated adjacency relation; they do not promise that an observer learns nothing about a person.

differentially private SGD (DP-SGD) A training algorithm that clips per-example gradients and adds calibrated noise, with privacy accounting for sampling and repeated updates under a stated adjacency relation.

direct attach copper (DAC) A passive, shielded twinaxial copper cable assembly with fixed transceiver terminations used for short in-rack interconnections, introducing negligible transmission latency and zero active transceiver power consumption.

direct-to-chip liquid cooling A thermal management architecture that circulates liquid coolant through sealed cold plates mounted directly on high-power processors, capturing heat far more efficiently than air cooling.

disaggregated serving An inference serving architecture that physically separates prompt processing (prefill) and token generation (decode) onto dedicated, independently scaled hardware pools.

disparate impact ratio A quantitative fairness measure defined as the ratio of the positive selection rate for an underprivileged protected group to the positive selection rate for the privileged group, traditionally assessed against the four-fifths rule.

displacement of overhead The principle that reducing one distributed-systems cost often moves pressure to another part of the system rather than eliminating it. For example, fewer synchronization barriers can reduce coordination time while increasing staleness or recovery complexity.

distributed checkpointing A checkpointing pattern where workers write their own portions of training state in parallel under a coordinated protocol.

distributed tracing An observability technique that follows a request across multiple services or components using propagated trace context.

distributed training The practice of training machine learning models across multiple computing nodes or devices to reduce training time and enable larger model architectures.

distribution shift The phenomenon where data encountered during model deployment differs from the training distribution, potentially degrading model performance.

domain adaptation Machine learning techniques that enable models trained on one domain to perform well on a different but related domain, addressing distribution mismatch challenges.

dominant resource fairness (DRF) A multi-resource fair-sharing algorithm that equal-

izes the maximum share of any resource type (such as GPU, CPU, memory, or network bandwidth) allocated to competing users or workloads.

double binary tree AllReduce An AllReduce algorithm implemented in NCCL that routes communication across two complementary spanning trees simultaneously, achieving $\mathcal{O}(\log N)$ latency while sustaining near-optimal bandwidth utilization.

double modular redundancy (DMR) A fault-tolerance technique that duplicates a computation across two independent systems and compares their outputs. A disagreement detects a fault but cannot identify or correct the faulty result without another mechanism.

dual-use dilemma The challenge of mitigating misuse of technology that has both positive and negative potential applications, particularly relevant in AI security.

duck curve A daily electrical load profile graph showing a pronounced midday dip in net demand caused by peak solar energy generation, followed by a steep evening ramp when solar generation ceases.

durability The property that acknowledged data remains recoverable after the failures covered by the storage contract.

dynamic batching A serving technique that briefly aggregates incoming requests into batches to improve throughput while controlling added latency.

dynamic voltage and frequency scaling (DVFS) A power-management technique that adjusts a processor's supply voltage and clock frequency to trade execution speed for energy use and thermal headroom.

E

edge AI The deployment of artificial intelligence algorithms directly on edge devices like smartphones, IoT sensors, and embedded systems, enabling real-time processing without cloud connectivity.

edge computing A distributed computing paradigm that brings computation and data storage closer to data sources, enabling real-time processing with reduced latency and lower bandwidth requirements.

edge intelligence The paradigm of deploying machine learning inference, continuous adaptation, and distributed coordination directly on edge devices and near-edge systems under local power, memory, and connectivity constraints.

edge ML Machine learning systems that perform inference and sometimes training at the edge of networks, typically on resource-constrained devices like smartphones or embedded systems with limited computational power.

edge training The process of training or fine-tuning machine learning models directly on edge devices, enabling personalization and adaptation without requiring data transmission to cloud servers.

effective FLOP/s The useful throughput of a fleet after its peak FLOP/s is reduced by single-device efficiency (MFU), scaling efficiency, and operational goodput, with each loss counted in exactly one factor.

efficiency frontier The Pareto-optimal trade-off curve across latency, throughput, cost, memory, and model accuracy beyond which no metric can improve without degrading another.

elastic training Training that can continue as workers join, leave, fail, or are replaced by resizing process groups and redistributing state or data.

elastic weight consolidation (EWC) A continual learning regularization algorithm that slows learning on parameters critical to previously mastered tasks by penalizing changes weighted by their Fisher information matrix values.

electromigration The movement of metal atoms in a conductor under the influence of an electric field, potentially causing permanent hardware faults over time.

elephant flow A persistent, high-throughput network flow, such as a large gradient AllReduce or checkpoint transfer, that sustains near line-rate transmission and creates structural bottleneck risks under hash-based routing.

embodied carbon The cumulative greenhouse gas emissions generated during the raw material extraction, manufacturing, transportation, and construction of hardware and physical datacenter infrastructure.

energy efficiency The ratio of useful output to energy input, measuring how effectively a system converts energy into desired computational work.

energy roofline model An analytical model relating computational intensity and data movement to energy use under specified operation costs and accounting boundaries.

energy-scale invariant The requirement to evaluate useful computation against the total energy consumed by compute, cooling, and network movement. It complements the Fleet Law's time decomposition with an energy-side measure of distributed efficiency.

ensemble methods Machine learning approaches that combine predictions from multiple models to improve accuracy, robustness, and reliability compared to individual models.

environmental monitoring The systematic collection and analysis of environmental data using sensor networks and machine learning to track ecosystem health, pollution levels, and climate change impacts.

equal-cost multi-path (ECMP) A routing method that hashes flows across multiple paths with equal routing cost; persistent large flows can collide on one path even when other paths remain underused.

equal opportunity difference The difference in true positive rates between protected demographic groups for a binary classification decision.

equality of opportunity A fairness criterion focused on ensuring equal true positive rates across groups, guaranteeing that qualified individuals are treated equally regardless of group membership.

equalized odds A group fairness metric requiring that a predictor achieves identical true positive rates and identical false positive rates across all protected demographic groups.

erasure coding A mathematical data durability scheme that divides objects into d data and m parity fragments distributed across separate failure domains, providing extreme fault tolerance at lower capacity overhead than full replication.

error-correcting codes Methods used in data storage and transmission to detect and correct errors, improving system reliability and data integrity.

error feedback A distributed optimization technique for biased gradient compression (such as Top-k sparsification or 1-bit quantization) that stores compression residuals in local memory and adds them to subsequent updates, preserving convergence guarantees.

ESP32 A low-cost microcontroller unit widely used in IoT applications, featuring a 240 MHz processor and 520 KB SRAM, commonly deployed in resource-constrained social impact applications.

evaluation contract A specification defining quantitative performance thresholds, test suites, and regression checks that a machine learning model must satisfy before promotion to production.

event time The time at which an event occurred at its source, as distinct from the processing time at which a system handled it.

exact model theft An attack that aims to extract the precise internal structure, parameters, and architecture of a machine learning model, allowing complete reproduction of the original model.

exactly-once outcome An application-level result in which replay cannot lose or duplicate an effect, typically enforced with stable identifiers and idempotent or transactional writes rather than transport delivery alone.

expected calibration error (ECE) A scalar metric that measures the discrepancy between predicted confidence probabilities and actual empirical accuracies across partitioned confidence bins.

experience replay A memory-based technique that stores past training examples in a buffer to prevent catastrophic forgetting and stabilize learning in streaming or continual adaptation scenarios.

expert collapse A training pathology in mixture of experts models where only a few experts receive significant training signal, causing other experts to become underutilized and reducing the model's effective capacity.

expert parallelism A distributed strategy for Mixture of Experts (MoE) architectures where different experts are assigned to different accelerators, requiring All-to-All collective routing to dispatch tokens to their assigned experts and combine results.

explainability The ability of stakeholders to understand how a machine learning model produces its outputs through post-hoc explanation techniques.

explicit congestion notification (ECN) A network-layer protocol extension that marks congestion indicators in IP packet headers when switch buffer queues exceed a preset threshold, triggering sender rate reductions without packet drops.

external memory Mechanisms that allow neural networks to access and manipulate external storage systems, extending their working memory beyond parameter storage to enable more complex reasoning and information retrieval.

F

fail-stop failure A failure mode where a computing component halts operation completely and visibly upon encountering a fault, ceasing all communication and computation.

failure in time (FIT) A reliability unit equal to one failure per 10^9 device-hours. A component's mean time to failure in hours is 10^9 divided by its FIT rate.

fairness constraints Technical and policy restrictions designed to ensure equitable treatment across demographic groups in machine learning systems.

fast gradient sign method (FGSM) A gradient-based adversarial attack that generates adversarial examples by adding small perturbations in the direction of the gradient.

fat-tree topology A Clos-style hierarchical network topology whose aggregate capacity increases toward the spine to provide high bisection bandwidth and multipath routing.

fault injection attack A physical attack that deliberately disrupts hardware operations through techniques like voltage manipulation or electromagnetic interference to induce computational errors and compromise system integrity.

fault tolerance The ability of a system to continue operating correctly even when some of its components fail or encounter errors.

feature store A centralized operational data management system that automates the ingestion, transformation, storage, and retrieval of curated features for both offline training and low-latency online inference.

federated averaging The standard algorithm for federated learning where client model updates are aggregated using weighted averaging based on local dataset sizes to produce a global model.

federated learning A machine learning approach that trains across decentralized data sources without centralizing raw training records. Updates and released models can still reveal information, so privacy guarantees require additional mechanisms and explicit assumptions.

few-shot learning A machine learning paradigm that enables models to adapt to new tasks using only a small number of labeled examples, critical for data-sparse on-device scenarios.

FinOps A cloud financial management discipline and cultural practice that enables organizations to maximize business value by helping engineering, finance, and technology teams collaborate on data-driven spending decisions.

FlashAttention An exact, memory-efficient attention algorithm that computes softmax tiling in on-chip SRAM to eliminate quadratic intermediate writes to HBM.

Fleet Law The master equation of distributed step time, $T_{\text{step}}(N) = T_{\text{compute}}/N + T_{\text{comm}}(N) + T_{\text{sync}}(N) - T_{\text{overlap}}$, which decomposes an idealized fixed-work training step on N devices into the Compute, Communication, and Coordination terms of the C^3 taxonomy minus the time hidden by overlap. It is the distributed counterpart of the iron law.

fleet stack The book's layered model of a machine learning fleet, with eight rows (Facility & Accelerators, Fabric & Storage, Distributed Execution, Reliability & Control, Runtime & Serving, Operations, Assurance, and Governance & Sustainability) grouped into four bands (Infrastructure, Distribution, Serving, and Governance), one band per part of the book. Constraints at lower rows bound the choices available above them.

FLOP/s Floating-point operations per second, a throughput measure of how many floating-point arithmetic operations a system performs per second.

flowlet switching An adaptive routing scheme that divides network flows into discrete packet bursts (flowlets) separated by idle gaps longer than path delay skew, rerouting flowlets across alternative links without triggering packet reordering.

forward error correction (FEC) A digital channel-coding technique that transmits structured parity symbols alongside payload data, enabling the receiver to detect and correct bit transmission errors without requesting retransmissions.

foundation models Large-scale pretrained models like GPT and BERT that can be adapted for a wide variety of downstream tasks, serving as a foundation for multiple applications.

fully sharded data parallel (FSDP) A native PyTorch implementation of ZeRO-3 that shards model parameters, gradients, and optimizer states across ranks, using AllGather before layer computation and ReduceScatter during the backward pass.

G

gang scheduling A co-scheduling discipline that atomically allocates all required compute and network resources for a distributed job simultaneously, preventing hold-and-wait deadlocks in barrier synchronization.

GDPR The General Data Protection Regulation, a European Union law that imposes strict requirements on personal data processing and significantly influences privacy-preserving machine learning design.

generality tax The area, power, and control overhead a general-purpose processor spends supporting diverse workloads rather than accelerating the operations dominant in a specialized workload.

generative adversarial networks A class of machine learning systems where two neural networks compete against each other, with one generating fake data and the other trying to detect it, leading to highly realistic synthetic data generation.

glitches Momentary deviations in voltage, current, or signal that can cause incorrect operation in digital systems and circuits.

goodput The rate of useful, retained progress over a stated wall-clock interval and resource allocation. Training goodput can account for statistical efficiency, replay, and recovery, so high arithmetic utilization alone does not establish high goodput.

governance frameworks Structured approaches for managing responsible AI development including policies, procedures, oversight mechanisms, and accountability structures.

governance layer The architectural tier within fleet ML systems that enforces regulatory compliance, policy verification, audit logging, and safety constraints across model training, deployment, and inference.

GPU Graphics Processing Unit, a specialized electronic circuit designed to rapidly manipulate and alter memory to accelerate the creation of images and parallel processing tasks like AI training.

GPUDirect RDMA A direct data path that lets RDMA-capable network adapters transfer data to or from GPU memory without staging through host memory.

GPUDirect Storage (GDS) An NVIDIA technology enabling a direct DMA data path between NVMe storage devices and GPU high-bandwidth memory, bypassing CPU host DRAM bounce buffers and reducing per-transfer latency.

graceful degradation The ability of a distributed system to continue operating in a reduced capacity rather than failing completely when one or more components become unavailable.

gradient accumulation A technique that accumulates gradients over multiple micro-batches before an optimizer step or synchronization.

gradient descent An optimization algorithm that iteratively updates model parameters by moving in the direction opposite to the gradient of the loss function, fundamental to neural network training.

gradient inversion attack An attack that reconstructs sensitive training examples or features from shared gradients or model updates.

gradient staleness The delay, measured in updates or steps, between when a gradient is computed and when it is applied.

graph break A fallback event in tracing JIT compilers where unsupported dynamic Python constructs force the compiler to terminate graph capture and return execution to the standard Python interpreter.

gray-box attack An adversarial attack where the attacker has partial knowledge about the model, such as knowing the architecture but not the specific parameters or training data.

gray failure A subtle, degraded operational failure where a component continues running and reporting healthy status while experiencing severe performance degradation or producing intermittent corruptions.

group distributionally robust optimization (GDRO) An optimization formulation that minimizes the worst-case training loss across predefined demographic or contextual subgroups rather than average empirical loss.

grouped-query attention (GQA) An attention mechanism where multiple query attention heads share a single key-value head, drastically diminishing the KV cache memory footprint per decoding step relative to Multi-Head Attention.

Gustafson's Law The observation that when problem size grows with processor count, the scaled speedup grows nearly linearly, as $N - s(N-1)$ for serial fraction s of the scaled run. It describes weak scaling.

H

hallucination A generative model failure where output is fluent and confident but unsupported, fabricated, or factually wrong.

hardware redundancy The duplication of critical hardware components to provide backup functionality and improve system reliability through voting mechanisms.

hardware-software co-design The coordinated, simultaneous optimization of hardware microarchitecture, system software, and model algorithms to achieve performance and efficiency unattainable through independent component design.

hardware trojan A malicious modification embedded in hardware components during manufacturing that can remain dormant under normal conditions but trigger harmful behavior when specific conditions are met.

heartbeat mechanisms Periodic signals sent between system components to monitor health and detect failures, enabling timely fault detection and recovery.

hierarchical AllReduce A multi-phase collective reduction that exploits the cluster bandwidth gap by performing local reductions over fast intra-node interconnects before routing aggregated node shards across slower inter-node fabrics, finishing with intra-node result distribution.

high-bandwidth memory (HBM) A 3D-stacked DRAM architecture where vertically bonded memory dies connect to host processors via thousands of through-silicon vias (TSVs) across a silicon interposer, delivering terabytes-per-second memory bandwidth.

Hockney model Another name for the alpha-beta model of point-to-point communication, $T(n) = \alpha + n/\beta$, after the author who applied it to parallel computers.

homomorphic encryption A cryptographic technique that allows computations to

be performed directly on encrypted data without decrypting it first, enabling privacy-preserving machine learning inference.

hot spares Backup components kept ready to instantaneously replace failing components without disrupting system operation, providing redundancy.

Huber loss A robust loss function used in regression that is less sensitive to outliers compared to squared error loss, improving training stability.

human-AI collaboration The synergistic partnership between humans and AI systems where each contributes their unique strengths to solve complex problems more effectively than either could alone.

human oversight The principle that human judgment should supervise, correct, or halt automated decisions, maintaining meaningful human control over AI systems.

hyperparameter optimization The process of finding the optimal configuration of hyperparameters (learning rate, batch size, network architecture parameters) that control the machine learning training process.

I

I/O wall The widening performance disparity where storage media bandwidth and host bus interfaces cannot keep pace with accelerator consumption rates, resulting in low device utilization and idle compute cycles.

idempotent write A write whose repeated execution with the same stable identifier produces the same stored result as one execution, making replay safe after uncertain failures.

immersion cooling A liquid cooling technique where entire server blades and electronic components are submerged directly in a thermally conductive, electrically dielectric fluid bath.

impact assessment frameworks Structured methodologies for evaluating the potential social, economic, and environmental effects of AI deployments in humanitarian and development contexts.

in-network reduction (SHARP) A hardware-assisted collective communication mechanism that offloads associative reduction operations directly to switch ASICs at line rate, eliminating intermediate host-memory round trips.

incast A many-to-one traffic burst in which simultaneous senders overwhelm one destination egress or receiver, rapidly filling shared buffers and increasing tail latency.

inference The phase in machine learning where a trained model is used to make predictions or generate outputs on new, previously unseen data.

InfiniBand A high-performance, low-latency interconnect widely used for HPC and ML training clusters, with native RDMA and credit-based flow control.

inherently interpretable model A model architecture whose internal decision logic is directly inspectable, transparent, and understandable by design without requiring post-hoc explanation techniques.

intermittent faults Hardware faults that occur sporadically and unpredictably, appearing and disappearing without consistent patterns, making diagnosis challenging.

interpretability The degree to which humans can understand the reasoning behind a machine learning model's predictions, often referring to inherently transparent models.

IoT sensors Internet of Things devices that collect and transmit environmental or behavioral data, often operating on limited power budgets and using low-bandwidth communication protocols.

iron law The single-machine performance equation $T = D_{\text{vol}}/\text{BW} + O/(R_{\text{peak}}\eta_{\text{hw}}) + L_{\text{lat}}$, which divides execution time into data movement, computation, and fixed overhead. The Fleet Law is its distributed counterpart.

J

jailbreak attack A prompt manipulation technique designed to bypass safety filters, alignment guardrails, and system guidelines of large language models to elicit restricted or harmful outputs.

K

k-anonymity A privacy guarantee where each released record is indistinguishable from at least $k_{\text{anon}} - 1$ others after generalizing or suppressing quasi-identifiers.

knowledge distillation A technique where a large, complex "teacher" model transfers its learned knowledge to a smaller, more efficient "student" model, maintaining performance while reducing computational requirements.

Kueue A Kubernetes-native job queueing controller that manages multi-tenant job admission, resource quotas, and cross-cluster queue borrowing before pods are created on worker nodes.

KV cache A memory buffer that stores previously computed transformer key and value tensors so autoregressive generation does not recompute attention history for every token.

KV cache wall The operational bottleneck in large-scale inference where accelerator high-bandwidth memory capacity and interconnect transfer bandwidth become saturated by dynamic key-value states across long contexts, rather than by model parameter weights.

L

label shift A type of distribution shift in which the target-label distribution $p(y)$ changes while the class-conditional feature distribution $p(x \mid y)$ remains fixed.

large language models (LLMs) Neural networks with billions or trillions of parameters trained on vast text corpora, capable of understanding and generating human-like text across diverse domains and tasks.

life cycle assessment (LCA) A standardized, comprehensive cradle-to-grave accounting methodology (governed by ISO 14040/14044) for evaluating the environmental impacts of a product or service across design, manufacturing, operational use, and end-of-life disposal.

lighthouse archetype One of the three recurring workloads (Archetypes A, B, and C) that the book uses to expose a particular systems constraint across chapters. An archetype preserves continuity while allowing each chapter to examine the same workload through a different engineering lens.

Little's Law The queuing identity $Q_{\text{req}} = \lambda_{\text{arr}} T_{\text{lat}}$, which relates the average number of requests in a stable system to their arrival rate and average time in the system.

load balancing Techniques in mixture of experts models to ensure that computational load and training signal are distributed evenly across experts, preventing expert collapse and maintaining model efficiency.

LogGP model An extension of the LogP communication model incorporating a gap-per-byte parameter (G) for large messages to accurately capture streaming and network pipelining effects in bulk data transfers.

logic wall The computational regime shift in complex reasoning and agentic models where inference execution expands dynamically through extended test-time search, chain-of-thought, or verification sampling, transforming inference economics from fixed per-prompt costs into variable compute-bound execution.

LogP model An abstract parallel network performance model characterizing transfers using network latency (L_{LogGP}), processor injection overhead (o), message injection gap (g), and rank count (N).

lookup table A data structure that replaces runtime computation with simpler array indexing operations, commonly used for performance optimization.

LoRa A low-power, wide-area physical-layer radio modulation. LoRaWAN is the networking protocol that uses LoRa radios; achievable range depends on the frequency plan, transmit power, antennas, terrain, interference, and link budget.

low-rank adaptation A parameter-efficient fine-tuning method that approximates weight updates using low-rank matrices, reducing trainable parameters while maintaining adaptation capability.

M

machine learning A subset of artificial intelligence that enables computers to learn and make decisions from data without being explicitly programmed for each specific task.

machine learning fleet A distributed system of accelerators, storage, network fabrics, and control software engineered to operate as one coherent computational machine.

machine learning lifecycle The complete process of developing, deploying, and maintaining ML systems, from data collection through model retirement.

machine learning operations (MLOps) The practice of deploying and maintaining machine learning models in production reliably and efficiently through automated pipelines.

machine learning security The protection of data, models, and infrastructure from unauthorized access, manipulation, or disruption throughout the entire machine learning lifecycle.

machine unlearning Methods for removing or reducing the influence of specified training records from a model. The claimed guarantee must be evaluated against a stated reference training procedure; an approximate update does not automatically establish complete removal.

marginal emissions The emissions caused by an incremental increase in electricity demand, often from the generator dispatched next on the grid.

mean time between failures (MTBF) The average operating time between consecutive failures of a repairable component or system. For N independent components with constant failure rates, system MTBF is the component value divided by N.

mean time to failure (MTTF) The average operating time before a component fails. Under a constant failure rate λ, it equals $1/\lambda$.

mean time to repair (MTTR) The average time required to diagnose, repair or replace, and restore a failed system component to full operational status.

megawatt-hour A unit of energy equal to one megawatt of power used for one hour, commonly used to measure electricity consumption in large facilities like data centers.

membership inference attack An adversarial privacy attack where an adversary queries a trained model to determine whether a specific individual's record was part of the model's training dataset.

meta-learning The process of learning how to learn, where models are trained to quickly adapt to new tasks with minimal data, particularly useful for personalization in on-device systems.

mice flow A transient, low-volume network flow, such as an RPC barrier or heartbeat message, whose primary performance constraint is tail latency and queuing delay rather than raw bandwidth.

microcontroller A compact integrated circuit designed to govern specific operations in embedded systems, typically featuring limited processing power and memory but optimized for low power consumption and real-time applications.

minimax A decision-making strategy used in game theory that attempts to minimize the maximum possible loss in adversarial scenarios.

mixed precision training A technique that uses different numerical precisions for different parts of neural network training, typically combining 16-bit and 32-bit floating-point arithmetic to reduce memory usage and increase training speed.

mixture of experts An architectural approach that uses multiple specialized sub-models (experts) with a gating mechanism to route inputs to the most relevant experts, enabling efficient scaling while maintaining sparsity.

mobile ML Machine learning systems optimized for mobile devices like smartphones and tablets, balancing computational efficiency with inference accuracy for on-device processing.

MobileNet A family of efficient neural network architectures designed for mobile devices using depthwise separable convolutions to achieve significant reductions in model size and computation.

mode collapse A failure mode in generative models where the model produces only a limited variety of outputs, ignoring the diversity present in the training data and failing to capture the full distribution.

model card Standardized, short documentation reports that disclose the intended usage, performance benchmarks across subgroups, limitations, and ethical considerations of machine learning models.

model compression Techniques to reduce the size and computational requirements of machine learning models through methods like quantization, pruning, and knowledge distillation to enable deployment on resource-constrained devices.

model extraction An attack where an adversary reconstructs or clones the proprietary architecture, weights, or capabilities of a target model by systematically querying its public API.

model FLOPs utilization (MFU) The fraction of hardware peak FLOP/s spent on useful model computation over wall-clock time, used to measure sustained training or serving efficiency.

model inversion attack A privacy attack that reconstructs representative features or private training data samples by analyzing model outputs and confidence scores.

model pruning The process of removing unnecessary weights, neurons, or connections from a trained neural network to reduce its size and computational requirements.

model quantization A technique that reduces the precision of model parameters (typically from 32-bit to 8-bit or lower) to decrease model size and computational requirements while maintaining acceptable accuracy.

model registry A central catalog for model artifacts, versions, metadata, lineage, dependencies, and lifecycle state.

model uncertainty The inadequacy of a machine learning model to capture the full complexity of the underlying data-generating process, leading to prediction uncertainty.

model watermarking A technique for embedding verifiable ownership signatures into machine learning models that can be used to detect unauthorized use or prove intellectual property theft.

Monte Carlo dropout A technique that uses multiple forward passes with different dropout masks at inference time to estimate prediction uncertainty.

Moore's Law The observation that the number of transistors on a microchip doubles approximately every two years, reducing cost per transistor under historical scaling assumptions.

multi-instance GPU (MIG) NVIDIA's hardware-level partitioning architecture that slices a physical GPU into up to seven fully isolated GPU instances, each with dedicated memory, SMs, and crossbar bandwidth.

multi-process service (MPS) NVIDIA's runtime multiplexing layer that allows multiple CUDA processes to execute concurrently on a single GPU by sharing execution engines, compute contexts, and memory bandwidth.

multicalibration A fairness technique ensuring that model predictions remain calibrated across intersecting subgroups, addressing complex demographic interactions.

multimodal AI AI systems that can process and understand multiple types of data simultaneously, such as text, images, audio, and video, enabling more comprehensive understanding and interaction.

N

NCCL NVIDIA Collective Communications Library, a GPU communication library for topology-aware collective operations.

network fabric The links, switches, routing, and transport mechanisms that connect compute nodes and determine the bandwidth, latency, and failure behavior of distributed communication.

neural architecture search Automated methods for designing optimal neural network architectures, using algorithms to explore the space of possible network designs and find the best performing structures.

neural engine Specialized hardware accelerators designed for machine learning inference and training, such as Apple's Neural Engine or Google's Edge TPU, optimized for on-device AI workloads.

neural network A computational model inspired by biological neural networks, consisting of interconnected nodes (neurons) organized in layers that can learn complex patterns from data.

neural processing unit (NPU) A dedicated domain-specific hardware accelerator optimized for tensor arithmetic, low-precision operations, and high energy efficiency in mobile and edge devices.

neuromorphic computing Computing architectures inspired by the structure and function of biological neural networks, designed to process information more efficiently than traditional digital computers.

non-IID data Training or evaluation data across distributed devices whose local distributions are not independent and identically distributed, inducing client drift and slowing convergence in federated learning.

Non-Volatile Memory Express (NVMe) A high-performance protocol for SSDs attached over PCIe, often used as a local cache or checkpoint staging tier in ML storage hierarchies.

nonblocking fabric A network whose internal capacity allows any feasible permutation of endpoint pairs to communicate at full line rate without contention inside the fabric.

NVLink A high-bandwidth NVIDIA interconnect for GPU-to-GPU communication within a node.

NVMe over Fabrics (NVMe-oF) A storage networking protocol that extends NVMe command sets and queue parallelism across low-latency RDMA or TCP fabrics, enabling remote cluster storage access at near-local solid-state latency.

O

object storage A storage model that manages data as objects with metadata and network API access, commonly used for durable lower-cost capacity.

on-device adaptation The local training or fine-tuning of a subset of parameters of a pre-trained model directly on edge silicon without transmitting private training examples off-device.

on-device learning The local adaptation or training of machine learning models directly on deployed hardware devices without reliance on continuous connectivity to centralized servers.

online softmax A numerically stable, incremental softmax algorithm that updates running maximum and sum statistics across tiles, eliminating the need to materialize global attention matrices.

operational carbon The greenhouse gas emissions produced directly and indirectly by the consumption of electrical energy to run computing systems and facility infrastructure during their operational lifespan.

operator fusion An optimization that combines adjacent operations into fewer kernels so intermediate values stay on chip and memory traffic or launch overhead falls.

optical circuit switching (OCS) A physical networking architecture that redirects optical signals directly between fiber ports using micro-electromechanical mirror (MEMS) arrays without intermediate optical-electrical-optical conversions.

orchestration The coordination of fleet resources and workloads, including scheduling, placement, scaling, sequencing, recovery, and resource allocation across distributed infrastructure.

out-of-distribution (OOD) detection The algorithmic task of identifying whether a given input sample originates from a different data distribution than the dataset on which the model was trained.

over-selection A federated client scheduling strategy where the coordinator selects more clients than required for a training round and aggregates the first responding cohort to mitigate stragglers.

oversubscription A topology design in which aggregate downstream capacity exceeds upstream capacity, reducing switch cost while creating a shared bandwidth bottleneck under simultaneous traffic.

oxide breakdown The failure of an oxide layer in transistors due to excessive electric field stress, causing permanent hardware faults.

P

packet spraying A dynamic multipath routing technique that disperses individual packets belonging to the same transport flow across multiple equal-cost network paths simultaneously, maximizing bisection bandwidth utilization.

PagedAttention An attention computation algorithm and dynamic memory manager inspired by operating system virtual memory paging that partitions key-value cache tensors into non-contiguous physical page blocks linked via page tables.

PAM4 Pulse Amplitude Modulation 4-Level, a multilevel signaling scheme that encodes two bits per baud across four distinct electrical voltage levels, doubling channel throughput over traditional NRZ encoding.

parallel file system (PFS) A distributed file system (such as Lustre or GPFS) that decouples metadata operations from striped data blocks across multiple storage nodes to aggregate high concurrent bandwidth.

parameter A learnable variable in a machine learning model, such as weights and biases in neural networks, that are adjusted during training to optimize performance.

parameter-efficient fine-tuning (PEFT) Adaptation methods that update only a small subset of parameters or added modules while keeping most pretrained weights frozen.

partition skew An uneven distribution of records or keys that leaves one distributed-pipeline partition with disproportionate work and makes it determine stage completion time.

permanent faults Hardware defects that persist irreversibly until repair or component replacement, consistently affecting system behavior.

personalization layers Model components, typically the final classification layers, that are adapted locally to user-specific data while keeping shared backbone layers frozen.

PFC deadlock A permanent buffer starvation condition in a multi-hop lossless Ethernet network where cyclical priority flow control PAUSE-frame dependencies among switch queues halt packet forwarding indefinitely.

PFC storm A cascading congestion phenomenon in lossless fabrics where buffer saturation at a single slow-draining endpoint causes priority flow control PAUSE frames to propagate upstream across multiple tiers, freezing unrelated victim flows.

physical attack Direct manipulation or tampering with computing hardware to compromise the security and integrity of machine learning systems, bypassing traditional software defenses.

pipeline bubble Idle accelerator time in pipeline parallelism while stages wait for the pipeline to fill or drain. For N_{PP} balanced stages and m microbatches, the bubble fraction is $(N_{\mathrm{PP}}-1)/(N_{\mathrm{PP}}-1+m)$.

pipeline parallelism A distributed training strategy that partitions layers into sequential stages and uses microbatches to overlap work across devices.

placement group A scheduler abstraction that enforces spatial or topological co-location constraints across multiple workers, minimizing cross-switch communication latency in distributed model training.

pluggable optics Modular, field-replaceable optical transceiver units (such as QSFP and OSFP form factors) mounted to switch and NIC faceplates that interface SerDes electrical traces with optical fibers.

point-in-time correctness The requirement in feature computation that training datasets reflect the exact feature values available at the precise historical timestamp of the prediction event, preventing data leakage.

point-in-time join A join that retrieves feature values valid for a historical prediction and available at that prediction time, preventing future or late-arriving information from leaking into training.

post-hoc explanations Explanation methods applied after model training that treat the model as a black box and infer reasoning patterns from input-output behavior.

power delivery network (PDN) The physical electrical distribution hierarchy, spanning rack-scale busbars, board power planes, voltage regulator modules, and package decoupling capacitors, that supplies stable sub-volt, kilo-ampere current to low-voltage silicon gates.

power usage effectiveness (PUE) The ratio of total data-center facility energy to the energy delivered to IT equipment. A value of 1.0 would mean no energy spent on cooling, power conversion, or other facility overhead.

predictive parity A fairness criterion requiring that the positive predictive value of a classifier is equal across different protected demographic subgroups.

preemption cascade A systemic failure mode where preempting one job causes cascading resource evictions across dependent or lower-priority jobs, incurring compounding checkpointing and cold-start overheads.

preemption tax The cumulative unproductive overhead incurred by preempting and restarting a distributed training job, comprising time spent checkpointing, reloading weights, reconstructing communication groups, and recomputing lost iterations.

prefetch buffer A host DRAM queue that stages and holds pre-decoded, augmented training batches ahead of accelerator execution to absorb storage access jitter and tail latency spikes.

prefill-decode disaggregation A distributed serving architecture that physically decouples prompt prefill processing onto compute-dense GPU nodes from token decoding onto memory-bandwidth-optimized GPU nodes, transferring intermediate KV cache activations across network fabrics.

prefill phase The initial LLM inference phase that processes the prompt and populates the KV cache, often dominated by compute.

prefix caching A KV cache optimization that detects and retains precomputed attention activations for shared prompt prefixes (such as system instructions or few-shot exemplars), bypassing redundant prefill computation across sessions.

principle of least privilege A security concept where users are given the minimum access levels necessary to complete their job functions, reducing security risks.

priority flow control (PFC) An IEEE 802.1Qbb link-layer flow-control standard for lossless Ethernet that pauses upstream senders via PAUSE frames on a designated traffic class before switch ingress buffers saturate.

privacy budget The differential-privacy parameters governing the permitted change in output distributions on neighboring inputs. The parameter ϵ controls a multiplicative bound of e^{ϵ}, δ allows additive slack, and privacy accounting tracks how guarantees compose across releases.

privacy-preserving techniques Methods intended to protect privacy at specified boundaries, including differential privacy and cryptographic protocols. Federated learning and local processing reduce raw-data movement but do not alone guarantee that updates or outputs reveal no private information.

privacy-utility trade-off The fundamental tension between preserving individual privacy and maintaining the utility of data for machine learning, requiring careful balance through techniques like differential privacy.

program goodput In the ML Productivity Goodput decomposition, the efficiency of execution during productive work, such as the fraction of peak throughput a training program achieves while it runs.

projected gradient descent (PGD) An iterative gradient-based adversarial attack that repeatedly perturbs an input and projects it back into an allowed norm ball.

prompt engineering The practice of designing and optimizing text prompts to effectively communicate with large language models and achieve desired outputs from AI systems.

prompt injection An attack against large language models where untrusted input content overrides system instructions and directs the model to perform unauthorized actions.

pruning A model compression technique that removes unnecessary connections or neurons from neural networks to reduce model size and computational requirements without significantly impacting performance.

Q

quantization The process of reducing the precision of model weights and activations from floating-point to lower-bit representations to decrease memory usage and accelerate computation on edge devices.

quantization-aware training (QAT) Training that simulates low-precision arithmetic so a model remains accurate after deployment with quantized weights or activations.

quota governance The organizational policies and control mechanisms (such as guaranteed vs. burst allocations, review cycles, and utilization-based reclamation) that regulate multi-tenant capacity reservation.

R

rail-optimized routing A communication mapping that aligns corresponding model shards with the same local GPU and network rail across nodes. It can distribute traffic across available NICs, but shared links, placement, and competing traffic still determine contention.

rail-optimized topology A cluster network topology tailored for multi-accelerator servers where identical GPU ranks across nodes are connected to separate, dedicated leaf-switch fabrics, minimizing switch traversals for data-parallel collectives.

randomized smoothing A certified-defense method that classifies noisy versions of an input to obtain probabilistic robustness guarantees.

RDMA over Converged Ethernet (RoCE) A protocol that carries remote direct memory access semantics over Ethernet, relying on carefully managed low-loss or lossless behavior.

recursive halving-doubling A collective reduction algorithm that pairs ranks at exponentially increasing distances across $\log_2 N$ rounds, achieving both logarithmic latency and bandwidth optimality for power-of-two participant counts.

red teaming A structured adversarial testing exercise where security and safety experts deliberately probe ML systems, interfaces, and serving pipelines for safety vulnerabilities, security flaws, and compliance failures.

ReduceScatter A collective communication operation that reduces inputs across ranks and scatters distinct shards of the reduced result back to ranks.

regularization Methods used in machine learning to prevent overfitting by adding penalty terms to the loss function, constraining model complexity.

reliability collapse The exponential decline, $A_{\text{component}}^{N}$, in the probability that all N required components of a tightly coupled job are available, even when each component's availability $A_{\text{component}}$ is high.

reliability gap The difference between component reliability and the much lower probability that every component required by a large, tightly coupled job remains available. The gap widens as fleet size and job duration increase.

remote direct memory access (RDMA) A networking mechanism that lets one machine read or write another machine's memory without kernel-mediated copies on the data path.

renewable energy Energy collected from renewable resources that are naturally replenished, including solar, wind, hydroelectric, geothermal, and biomass sources.

resource-constrained environments Deployment contexts with limited computational power, network bandwidth, or power availability, typically requiring specialized system design and optimization techniques.

responsible AI The practice of developing and deploying AI systems in ways that are ethical, fair, transparent, and beneficial to society while minimizing potential harms and biases.

reward hacking The phenomenon where AI systems exploit unintended aspects of reward functions to maximize scores while violating the intended objectives.

ridge point The operational arithmetic intensity on a roofline model where the memory bandwidth ceiling meets the peak computational ceiling, delineating the boundary between memory-bound and compute-bound operational regimes.

ring AllReduce A bandwidth-optimal collective communication algorithm that organizes participants into a logical ring, executing sequential ReduceScatter and AllGather neighbor transfers so each node communicates a constant volume of data independent of rank count.

RLHF Reinforcement Learning from Human Feedback - a training method that uses human preferences to guide model behavior, enabling AI systems to better align with human values and intentions.

robust AI The ability of artificial intelligence systems to maintain performance and reliability despite internal errors, external perturbations, and environmental changes.

robustness A model's ability to maintain stable and consistent performance under input variations, environmental changes, or adversarial conditions.

robustness margin The minimum distance or perturbation magnitude required to alter a model's prediction on a given input sample under defined perturbation norms.

robustness metrics Quantitative measures for evaluating model stability under various perturbations, including adversarial accuracy, certified robustness bounds, and performance under distribution shift.

roofline model A performance model that compares arithmetic intensity with peak compute and memory bandwidth to identify compute-bound and bandwidth-bound regimes.

runtime goodput In the ML Productivity Goodput decomposition, the fraction of allocated time that yields retained training progress after runtime overheads such as checkpointing, failure recovery, and lost work.

S

scale moment A critical threshold where an ML workload outgrows the memory capacity, arithmetic throughput, or reliability envelope of a single node, necessitating distributed execution and exposing systems to the network wall, energy wall, and reliability collapse.

scaling efficiency The ratio of actual distributed training throughput to ideal linear speedup ($\eta_{\text{scaling}} = T_1/(N \cdot T_N)$), quantifying capacity loss from communication, synchronization barriers, and idle pipeline bubbles.

scaling laws Empirical power-law relationships between model loss and training compute, parameter count, or dataset size, of the form $\mathcal{L}(X) = A_{\mathcal{L}} X^{-\alpha_{\text{scale}}} + C_{\mathcal{L}}$, valid within the regime in which they were fitted. They explain why each further gain in model quality requires multiplicatively more resources.

scheduling goodput In the ML Productivity Goodput decomposition, the fraction of time a workload has all of the resources it requires available together.

scope 1 emissions Direct greenhouse gas emissions from sources that are owned or controlled by an organization, such as on-site diesel backup generators and company facilities.

scope 2 emissions Indirect greenhouse gas emissions associated with the generation of purchased electricity, steam, heating, or cooling consumed by an organization.

scope 3 emissions All other indirect greenhouse gas emissions that occur throughout an organization's upstream and downstream value chain, including hardware manufacturing and supply chain logistics.

secure aggregation A cryptographic protocol that lets a coordinator recover an aggregate of participating clients' updates without seeing individual unmasked updates, under stated participation and collusion assumptions. It does not by itself bound information revealed by the aggregate or final model.

secure boot A hardware-backed startup process that cryptographically verifies firmware and software before execution.

secure computation Cryptographic protocols that enable multiple parties to jointly compute functions over private inputs without revealing those inputs to each other.

secure multi-party computation A cryptographic method that allows multiple parties to jointly compute a function over their private inputs without revealing those inputs to each other.

self-supervised learning A machine learning paradigm where models learn representations from unlabeled data by predicting parts of the input from other parts, reducing dependence on manually labeled datasets.

sequence parallelism A distributed technique that shards activations along the token sequence dimension across tensor-parallel ranks during non-GEMM operations (LayerNorm, Dropout) using ReduceScatter and AllGather without increasing total communication volume.

service level objective (SLO) A measurable target for service behavior such as latency, freshness, availability, or model quality.

shadow deployment A deployment mechanism where production traffic is duplicated and routed to a candidate model alongside the active production model to validate performance and latency without affecting user experience.

SHAP SHapley Additive exPlanations, a feature-attribution framework based on Shapley values from cooperative game theory.

sharded checkpointing A checkpointing approach where each worker saves only its assigned model, gradient, or optimizer shard.

sharded data parallelism A distributed training strategy (exemplified by ZeRO and FSDP) that partitions model parameters, gradients, and optimizer states across data-parallel ranks, reconstructing full layers on demand via collective communication.

side-channel attack An attack that exploits information leaked through the physical implementation of computing systems, such as power consumption, electromagnetic emissions, or timing variations.

silent data corruption (SDC) A hardware error in compute units, memory, or data paths that changes a stored or computed value without raising any detectable error, so the corrupted result propagates silently into training or inference.

single instruction, multiple threads (SIMT) A parallel execution model where multiple independent threads execute the same instruction stream in lockstep across vector execution units, hiding high memory latency through hardware warp scheduling over large thread pools.

small file problem A data-loading bottleneck where accessing millions of individual sample files exhausts storage metadata server request capacity long before physical data transfer bandwidth saturates.

software fault Unintended behavior in software systems resulting from defects, bugs, or design oversights that can impair performance or compromise security.

sparse training A training approach that maintains sparsity in neural network weights throughout the training process, reducing computational requirements and memory usage.

sparse updates A training strategy that selectively updates only a subset of model parameters based on their importance or contribution to performance, reducing computational and memory overhead.

specification gaming When AI systems find unexpected ways to achieve high rewards that technically satisfy the objective function but violate the intended purpose.

speculative decoding An inference acceleration mechanism where a compact, lightweight

draft model speculatively generates multiple candidate tokens in parallel that are subsequently verified in a single forward pass by the large target model.

speculative execution A performance optimization in processors that executes instructions before confirming they are needed, which can inadvertently expose sensitive data through microarchitectural side channels.

split learning A distributed learning paradigm and model partitioning technique where a neural network is divided between an edge client and a central server, with intermediate activations and gradients exchanged at a cut layer.

stale synchronous parallel (SSP) A synchronization model that lets faster workers advance a bounded number of steps ahead of the slowest worker.

straggler A correct but slow worker that delays synchronous progress for the rest of a distributed job.

straggler amplification The slowdown of a synchronous job to the pace of its slowest required participant. Because the probability that at least one of N workers is delayed, $1-(1-p)^N$, approaches 1 as N grows, a delay that is rare for any one worker becomes nearly certain on every step at fleet scale.

strong scaling Adding processors to a fixed problem to finish it sooner. Its speedup is bounded by Amdahl's Law.

stuck-at fault A permanent hardware fault where a signal line becomes fixed at a logical 0 or 1 regardless of input, causing incorrect computations.

supply chain attack An attack that compromises hardware or software components during the manufacturing, distribution, or integration process, potentially affecting multiple downstream systems.

sustainable AI The practice of developing and deploying artificial intelligence systems that minimize environmental impact while maintaining effectiveness and accessibility.

switch radix The number of ports on a network switch, which constrains endpoint fan-out, topology depth, and the number of switching tiers needed at a given cluster scale.

symbol rate The number of signaling symbols transmitted per second on a link; multilevel modulation carries multiple bits per symbol without increasing this physical transition rate proportionally.

synchronous tight coupling A distributed execution dependency where all participating nodes must complete local computation and synchronize states at global barriers before any worker can proceed, coupling cluster progress to the slowest device.

synthetic data generation The creation of artificial datasets that approximate the statistical properties of real data while reducing privacy risks and avoiding direct exposure of sensitive information.

systolic array A specialized grid of tightly coupled processing elements that rhythmically computes and streams matrix data directly between neighbor cells without writing intermediate partial sums back to register files or memory.

T

tail latency High-percentile request latency, such as p99, that captures rare slow responses affecting distributed service reliability.

targeted attack A type of data poisoning attack that aims to cause misclassification of specific inputs or classes while leaving the model's general performance largely intact.

tensor core A specialized accelerator execution unit designed to perform mixed-precision fused matrix multiply-accumulate operations ($\mathbf{D} = \mathbf{A} \cdot \mathbf{B} + \mathbf{C}$) on matrix tiles as a single hardware instruction.

tensor parallelism An intra-layer model parallelism technique that shards individual weight matrices and operations (such as column- and row-parallel linear layers in multi-head attention and MLPs) across accelerators connected via high-bandwidth interconnects.

thermal design power (TDP) The vendor-specified maximum sustained rate of heat energy in watts that a cooling subsystem must dissipate under maximum expected operating workloads to maintain silicon below its critical junction temperature.

thermal stress Hardware degradation caused by repeated cycling through high and low temperatures, leading to material fatigue and potential failures.

threat modeling A structured security analysis that identifies assets, adversary capabilities, attack paths, and defensive priorities for a system.

tiered storage A hierarchical data placement architecture spanning hot local NVMe, warm parallel file systems, cold object storage, and deep archive tiers to optimize throughput against capacity economics.

time per output token (TPOT) The average wall-clock time required to generate each subsequent token during autoregressive decoding, governed primarily by accelerator memory bandwidth.

time to first token (TTFT) The latency elapsed between submitting an inference request and receiving its initial generated token, reflecting the duration of the compute-bound prefill phase and serving as a primary interactive responsiveness metric.

time-travel query A database or feature store capability that reconstructs the exact state of feature data as it existed at any historical point in time.

TinyML Machine learning architectures, runtimes, and optimization techniques engineered to execute inference and ultra-lightweight adaptation on microcontrollers operating under milliwatt power and sub-megabyte memory limits.

topology-aware scheduling Placement that accounts for GPU and interconnect locality such as NVLink domains, racks, rails, or switch hierarchy.

TorchDynamo A Python frame evaluation hook that intercepts CPython bytecode to dynamically extract computation graphs into FX intermediate representation while installing validation guards.

TorchInductor The default deep learning compiler backend for `torch.compile` that lowers captured computation graphs into optimized Triton GPU kernels or C++ CPU loops.

total cost of ownership (TCO) A comprehensive financial assessment of the complete direct and indirect costs associated with designing, deploying, and maintaining machine learning infrastructure throughout its operational lifecycle.

TPU Tensor Processing Unit, a specialized AI accelerator chip developed by Google specifically designed for machine learning workloads, particularly neural network computations.

trackable resource (TRES) A fine-grained accounting and scheduling abstraction (standardized in Slurm) that treats individual accelerators, licenses, memory, and interconnect rails as distinct consumable scheduling units.

training The process of teaching a machine learning model to make predictions by showing it examples and adjusting its parameters based on performance feedback.

training-serving skew A discrepancy in performance between training and production environments caused by differences in data processing pipelines, feature definitions, or serving runtime environments.

transfer learning A machine learning technique that uses knowledge from a pretrained model on one task to improve learning on a related task, enabling efficient adaptation with limited data.

transformer A neural network architecture that uses self-attention mechanisms to process sequential data, forming the foundation for many modern language models.

transient faults Temporary hardware faults that do not persist or cause permanent damage but can lead to incorrect computations if not handled properly.

transient voltage droop A rapid drop in core supply voltage caused by the product of parasitic loop inductance and high current slew rates ($\Delta V = L_{\text{parasitic}} \frac{di}{dt}$) when thousands of execution cores abruptly transition between idle barriers and dense computation.

transparency Openness about how AI systems are built, trained, validated, and deployed, including disclosure of data sources, design assumptions, and limitations.

tree AllReduce A latency-oriented collective algorithm that reduces data up a spanning tree to a root before broadcasting results down, achieving $\mathcal{O}(\log N)$ round-trip latency at the expense of higher link bandwidth consumption on large payloads.

triple modular redundancy (TMR) A fault-tolerance technique that runs three replicas of a computation and uses majority voting to mask one independent faulty result; it does not guarantee correctness under multiple or common-mode faults.

Triton A domain-specific language and compiler for tiled neural network programming that abstracts thread scheduling and memory coalescing while exposing block-level memory hierarchy management.

two-phase commit (2PC) A coordination protocol with prepare and commit phases that ensures participants commit atomically or abort.

U

uncoordinated checkpointing A checkpointing scheme where distributed nodes record local state independently without cross-node synchronization, risking domino-effect rollbacks during recovery.

V

value alignment The principle that AI systems should pursue goals consistent with human intent and ethical norms, addressing the challenge of encoding human values in machine objectives.

value-sensitive design A methodology for incorporating human values into technology design through systematic stakeholder engagement and ethical consideration of system impacts.

Volcano A cloud-native batch scheduling system for Kubernetes designed for distributed

ML and big-data workloads, providing gang scheduling, fair-share queuing, and resource reservation primitives.

W

wafer-scale engine (WSE) An accelerator architecture that integrates compute, memory, and communication across most or all of a silicon wafer to reduce the bandwidth and latency costs of crossing separate package boundaries.

wake-word detection An always-on keyword spotting workload executed on low-power edge processors that detects specific acoustic trigger phrases with minimal latency and sub-milliwatt power draw.

warehouse-scale computer (WSC) A building-scale computing system operated as one coherent machine, with the network fabric and storage hierarchy treated as system-level resources.

watchdog timer A hardware component that monitors system execution and triggers recovery actions if the system becomes unresponsive or stuck.

water usage effectiveness (WUE) The liters of water a data center consumes per kilowatt-hour of IT energy, determined largely by its cooling and heat-rejection design.

watermark A streaming-system estimate that event time has advanced far enough to close a window, subject to an explicit policy for arrivals that appear later.

weak scaling Growing the problem in proportion to the number of processors so that work per processor stays roughly constant. Gustafson's Law describes its speedup.

WebDataset A high-throughput sequential data loading format that packages dataset samples inside standard POSIX tar archives, enabling direct linear streaming over object storage without per-file filesystem overhead.

weight freezing A technique that fixes most model parameters during training while allowing only specific layers or components to be updated, reducing computational requirements for on-device adaptation.

white-box attack An adversarial attack where the attacker has complete knowledge of the model's architecture, parameters, training data, and internal workings, enabling highly effective attack strategies.

Y

Young-Daly formula The first-order optimal checkpoint interval $T^*_{\text{ckpt}} = \sqrt{2T_{\text{write}}\,\text{MTBF}_{\text{system}}}$, which balances checkpoint write time against expected rework after failures. It is accurate when writes are short compared with the system MTBF.

Z

ZeRO (Zero Redundancy Optimizer) A memory-optimization paradigm that progressively eliminates redundant state across data-parallel workers by partitioning optimizer states (ZeRO-1), gradients (ZeRO-2), and model parameters (ZeRO-3).

zero-bubble pipeline parallelism An advanced pipeline scheduling strategy that decouples backward passes into activation gradient computation (B) and deferred weight gradient computation (W), using the W kernels to fill startup, turnaround, and drain bubbles.

zero-day vulnerability A previously unknown security flaw in software or hardware that can be exploited by attackers before developers have had a chance to create and distribute a patch.

Index

1-bit Adam, 306
  variance freeze, 306
1-bit Quantization
  edge quantization, 480
1-bit SGD, 302
1F1B scheduling
  memory efficiency, 243
  peak activation bound, 243
  steady-state execution, 243
2.5D interposer
  CoWoS, 95
24/7 Carbon-Free Energy
  definition, 940
3D integration
  bandwidth density, 1036
3D parallelism
  accelerator allocation, 209
  collective primitives, 273
  communication intensity reduction, 21
  definition, 209
  grid decomposition, 252
  traffic patterns, 125
  training loop, 253
48 V DC Distribution
  definition, 916

A/B Testing
  power, 700
  statistical power, 700
A100, 207
Abstention
  safety mechanism, 991
Accelerator
  selection, 89
  topology, 1026
Access pattern
  sequential vs. random, 149
Accountability
  governance mechanisms, 956
Activation checkpointing
  appendix refresher, 1073
  edge memory, 605
  memory footprint, 74
  memory reduction, 214
  recomputation overhead, 214
  traffic cost, 612
Activation outliers
  quantization degradation, 549
Active optical cable, *see* AOC
Adam
  distributed update, 218
Adam optimizer
  checkpoint memory, 343
  checkpoint state size, 182
  state, 343
Adaptation strategy
  trade-offs, 623
Adapter Approach
  definition, 619
Adapter Switching
  definition, 619
Adaptive batching
  request-aware grouping, 532
  SLO-adaptive feedback, 532
  traffic-adaptive window, 532
Adaptive Ensemble
  concept drift response, 858
Adaptive Evaluation
  gradient masking pitfalls, 873
Adaptive routing
  queue-depth selection, 132
Admission Control
  edge adaptation, 612
  overload shedding, 571
Admission control
  definition, 389
Advanced packaging
  reticle limit, 95
  stacking yield, 55
Adversarial Attack
  autonomous driving stop sign, 863
  definition, 861
  input-space manipulation, 839
  prompt evasion, 814
Adversarial Defense
  four-layer workflow, 869
Adversarial Examples
  discovery, 776
Adversarial Patch
  physical road sign attack, 880
  physical-world attack, 863
Adversarial Perturbation
  decision boundary geometry, 860
Adversarial Training
  accuracy cost, 870
  definition, 869
  free gradient reuse, 870
  PGD batch augmentation, 869
Adversarial Transferability
  black-box, 786
AES
  AES-256, 820
  side-channel vulnerability, 797
Agentic AI
  fleet macro-efficiency, 1035
Aggregation
  small-file mitigation, 164
Aggressive Sharing
  definition, 429
AI Compute Growth
  doubling time, 890
AI Compute Growth Rate
  definition, 890
AI Hardware E-waste
  definition, 890
Air-cooling limit, 1095
Air-Gapped
  isolation, 771
Aleatoric Uncertainty
  distinction from epistemic, 843
Alert fatigue
  monitoring thresholds, 709
AlexNet
  two-GPU training, 5
Algorithm
  D·A·M taxonomy, 22
Algorithm Aversion
  human-AI interaction, 1005
Algorithmic bias
  historical data, 961
  proxy variable selection, 961
  reproduction in training, 961
Algorithmic Fairness
  definition, 960
Algorithmic stability
  large-batch dynamics, 209
Alignment regression testing
  guardrail validation, 993
Alignment tax
  capability trade-off, 993
All-pairs bandwidth matrix
  definition, 138
All-to-All
  bipartite exchange, 300
  combine phase, 299
  dispatch phase, 299
  embedding communication, 56
  expert parallelism, 250, 559
  hierarchical exchange, 301
  injection bound, 282
  mixture-of-experts dispatch, 1037
  pairwise exchange schedule, 301
  reception bound, 282
  routing matrix, 299
  variable-size AllToAllv, 299
AllGather, 281
  decomposition, 281
  definition, 105
  FSDP parameter prefetch, 223
  parameter reconstruction, 214
  ring topology, 285
Allocation Shape
  definition, 400
AllReduce, 226, 280, 491
  algorithm selection, 314
  asynchronous execution, 308
  bandwidth lower bound, 284
  convergence guarantee, 271
  data-parallel gradient averaging, 212
  decentralized gradient synchronization, 214
  decentralized scaling, 209
  definition, 105
  etymology, 271
  gradient exchange volume, 208
  gradient synchronization, 1037
  hierarchical, 214
  inter-node, 295
  overlap with backward pass, 309
  pipelined communication, 493
  recursive doubling, 288
  ring algorithm, 226, 284
  scaling ceiling, 218
  tensor parallelism synchronization, 555
AllToAll, 281
  definition, 105
  schedule selection, 301
Alpha-Beta Model
  crossover message size, 1102
  link bandwidth, 1102
  message size, 1102
  message transfer time, 115
  startup latency, 1102
Amazon S3
  key-value namespace, 165
Amdahl's Law, 227

Amdahl's law
  optimization target, 466
  parallel scaling limit, 97
Amdahl, Gene, *see also* Amdahl's Law
Anderson-Darling Test, 872
Anomaly detection
  percentage change, 748
  percentage change threshold, 748
  Z-score, 747
  Z-score threshold, 748
AOC
  definition, 112
AOTAutograd
  backward graph construction, 484
Apache Arrow
  in-memory format, 160
Apache Parquet
  columnar storage, 160
API, 271
API Keys
  credential leakage, 812
Apple Neural Engine
  definition, 609
Application monitoring
  definition, 137
Application Programming Interface, *see* API
Application-Specific Integrated Circuit, *see* ASIC
Approximate Behavioral Theft
  definition, 778
Archetype
  A (GPT-4/Llama-3), 10
  A (GPT-4/Llama-3), compute infrastructure, 56
  B (DLRM at Scale), compute infrastructure, 56
  B (DLRM at Scale), pod design, 88
  C (Federated MobileNet), compute infrastructure, 51
Archetype B
  DLRM scaling, 224, 250
Architectural debt
  delayed governance, 1038
Architecture
  disaggregated, 140
Arduino
  memory constraint, 607
Arduino Nano 33 BLE Sense
  definition, 607
Arithmetic Intensity
  algorithmic, 455
  measured, 455
  performance engineering, 455
Arithmetic intensity
  decode phase, 529
  definition, 52
  FLOP-to-byte ratio, 59
  single-device vs fleet, 209
  vs. communication intensity, 21
Arm Cortex
  device heterogeneity, 651
ARM TrustZone
  adoption, 805
ASIC, 297
ASP, *see* Asynchronous SGD
Assumptions
  capacity planning, 1138
  cluster tiers, 1133
  nameplate capacity, 1140
  network, 1133
  reliability, 1134
  sustainability, 1136
Assurance lifecycle
  evidence requirements, 954
Asynchronous checkpointing, *see* Checkpointing
Asynchronous collective
  overlap limits, 314
Asynchronous coordination
  federated learning, 642
Asynchronous execution
  CUDA stream concurrency, 493
  non-blocking communication, 493
Asynchronous SGD
  staleness penalty, 216
Attack
  deployment-time, 774
  inference-time, 774
  postdeployment, 774
  training-time, 774
Attained Service Scheduling
  queueing discipline, 424
  two-dimensional, 424
Attention
  maps in security monitoring, 813
  quadratic I/O complexity, 474
Audit trail
  decision justification, 1019
  user-level provenance, 982
Auditability
  definition, 22
Auditable autonomy
  compliance, 644
Automation
  automation cost, 671
Automation bias
  human-AI interaction, 1005
AutoML
  hyperparameter optimization, 754
Automotive Recalls
  cybersecurity, 771
Automotive Safety Integrity Level
  ML certification, 843
Autopilot
  perception failure, 841
Autoregressive bottleneck
  memory bandwidth bound, 519
Autoregressive generation
  variable sequence length, 510
Autoscaling
  capacity control, 576
  hysteresis, 576
  predictive scaling, 577
Auxiliary load balancing loss
  router skew, 250
Auxiliary Loss, 559
Availability
  definition, 21
  MTBF and MTTR, 321
  storage, 166
Average absolute odds difference
  audit metric, 967
AWQ, 479
  activation-aware scaling, 479
  salient weight protection, 479, 549
AWS S3 Outage
  cascade failure, 841
AWS Trainium
  accelerator fabric, 45

Backdoor Attack
  BadNets, 785
  trigger pattern, 865
  trigger patterns, 786
Backfill Scheduling
  conservative backfilling, 396
  reservation, 396
Backpressure
  data pipelines, 177
  propagation, 571
Bad Placement
  definition, 411
Balls-into-bins
  queue length bound, 565
Bandwidth
  bound, 275
  effective, 295
  lower bound, 284
  network, 225
  operating regime, 277
  optimality, 284
  per-node PFS, 183
  storage hierarchy, 152
Bandwidth hierarchy
  distance scaling, 67
Bandwidth-delay product
  buffer distinction, 134
Bandwidth-distance product
  optical reach, 271
Bandwidth-dominated communication, 1102
Barrier synchronization
  slowest worker dependence, 10
Batch Size
  maximum, 495
Batch size
  computation-to-communication ratio, 225
Batched Gather-Matrix-Vector multiplication
  definition, 547
Batching
  arithmetic intensity effect, 457
  diminishing returns, 1127
  efficiency curve, 516
  knee of the curve, 516
  latency knee, 1127
  max batch size, 532
  padding waste, 519
  preferred batch size, 532
  stability threshold, 1126
  timeout parameter, 532
  utilization headroom, 1126
Bathtub curve
  infant mortality, 329
  useful life, 329
  wear-out, 329
Battery Impact
  definition, 611
Bayesian Neural Networks
  uncertainty estimation, 872
Benchmarking
  end-to-end measurement, 494
  placement context, 315
BERT
  gradient communication, 226
  TPU cluster training, 5
BF16
  dynamic range, 64
  mixed-precision training, 64
BGMV
  definition, 547
  kernel launch, 547
Bias
  amplification feedback loop, 1003
  automation, human-AI interaction, 1005
Bias-Only Adaptation
  definition, 614
Bin Packing
  multi-dimensional, 393
  scheduling, 393
Binary Neural Network
  edge quantization, 480
Binding constraint
  cross-layer analysis, 1038
Biofilm
  definition, 922
Bisection bandwidth
  All-to-All communication, 282
  definition, 120
  etymology, 4
  in communication axis, 24
  network fabric, 1028
  scaling ceiling, 1028
Bisection bandwidth wall
  definition, 8
Block Quantization, 302
  block scale factor, 302
Block table
  logical to physical mapping, 539
  virtual memory mapping, 511
Block-wise Quantization
  definition, 478
  storage overhead, 479
Blue-Green Deployment
  blue-green exposure, 691
  ML serving, 676
Bonferroni Correction
  multiple comparison control, 855

Bottleneck
  displacement, 497
Boundary Attack
  decision-based black-box, 863
Broadcast, 280
  tree topology, 281
BSP
  synchronization, 216
Bucket Fusion, 309
  size tuning, 309
  trade-off, 309
Budget
  burn rate, 747
Buffered asynchronous aggregation mechanism, 642
Build vs. buy
  storage economics, 189
Build-vs.-buy decision
  utilization threshold, 729
Bulk Synchronous Parallel
  definition, 109
  origin, 108
Bulk synchronous parallel, *see* BSP
Bulkhead Pattern
  isolation, 575
Burn Rate
  definition, 712
Burn-in testing
  reliability screening, 329
Busbar
  48V DC distribution, 82
Butterfly Algorithm, 288
Byte-pair encoding
  subword tokenization, 13
Byzantine failure
  classification, 325
Byzantine Fault Tolerance
  gradient aggregation, 844
Byzantine fault tolerance
  Krum algorithm, 326
  ML overhead, 326
  trimmed mean, 326
Byzantine Fault Tolerance in FL
  definition, 655
Byzantine-resilient ML
  algorithmic overhead, 326

Cache
  effective service time, 154
Cache eviction
  least recently used (LRU), 545
Calibration
  expected calibration error, 859
  fairness trade-off, 962
  group-specific, 960
  score, 967
  selective prediction, 859
  temperature scaling, 859
Canary Deployment
  canary, exposure, 691
  gradual rollout, 691
  risk mitigation, 753
  safety validation, 998
Canary deployment
  global rollout, 582
CAP theorem
  definition, 21
  scheduling, 389
Capacity Factor, 559
Capacity factor
  expert routing, 300
  mixture of experts, 250
Capacity Planning, 518
Capacity planning
  bottom-up sizing, 736
  infrastructure requirements, 735
  peak load vs. average load, 591
CapEx
  cluster breakdown, 728
  facility capex, 731
  hardware, 731
  network, 731
Capital Expenditure
  definition, 728
Carbon Accounting
  attributional, 896
  consequential, 896
Carbon Border Adjustment Mechanism
  definition, 944
Carbon Budget
  fleet constraint, 1030
Carbon budget
  absolute limits, 935
Carbon emissions
  grid intensity, 18
Carbon Footprint
  benchmarks, 914
  tracking, 897
  training emissions, 888
Carbon Intensity
  by energy source, 900
  regional grid variance, 918
Carbon Intensity Variance
  definition, 897
Carbon Usage Effectiveness
  datacenter metric, 892
Carbon-Aware Scheduling
  definition, 897
  grid intensity APIs, 940
  load shifting, 940
  marginal vs. average emissions, 940
  results, 940
Carbon-aware scheduling
  fleet placement, 1030
Carbon-Aware Scheduling at Scale
  definition, 940
Carlini-Wagner Attack
  defense evaluation, 863
  optimization formulation, 863
Catastrophic Forgetting
  definition, 625
Causal effect
  path-specific, fairness, 966
  total, fairness, 966
CCPA
  data deletion, 979
Certified Robustness
  definition, 871
  limits of post-hoc filtering, 839
  mathematical guarantee, 871
Channel Pipelining, 310
Chaos engineering
  serving resilience, 377
Checkpoint consistency
  in-flight gradients, 380
  partial writes, 380
  rank desynchronization, 380
Checkpoint Storm
  definition, 182
  fan-out read comparison, 151
  write bursts, 150
Checkpoint/Restart, 1089
Checkpointing
  async PFS copy, 183
  asynchronous, 346
  asynchronous, pipeline overhead, 346
  automated recovery, 9
  bounded asynchronous, 350
  cadence and recovery, 1029
  checkpoint tax, 735
  consistency cut, 350
  coordinated, 348
  definition, 342
  eventual consistency, 350
  format optimization, 186
  frequency tuning, 735
  in-memory replication, 378
  in-memory staging, 346
  incremental, 362
  local checkpoint staging, 159
  manifest publication, 184
  overhead, 183
  overhead trade-off, 1029
  restore validation, 186
  retention policy, 184
  sharded, 351
  sharded I/O parallelism, 351
  shared namespace coordination, 164
  storage architecture, 182
  strict synchronous, 350
  synchronous, 346
  training pause, 183
  uncoordinated, 347, 348
  Young-Daly formula, 1031
  zero-redundancy, 187
Checksum
  object storage verification, 167
Chi-Square Goodness-of-Fit Test
  definition, 855
Chiplet
  architecture, 47
  CoWoS packaging, 95
  die-to-die interconnect, 47
  dual-die packaging, 48
  manufacturing yield, 47
Chunked Prefill
  prefill-decode disaggregation, 512
Chunked prefill
  definition, 527
CI/CD
  continuous integration, 686
  patterns by model type, 706
Circuit Breaker
  circuit breaker pattern, 571
  safety mechanism, 998
Circuit breaker
  serving resilience, 370
Circular Economy
  definition, 935
  extended support cycles, 935
  hardware lifespan extension, 935
  modular design, 935
  right-to-repair, 935
  secondary-use programs, 935
Clean-Label Poisoning
  definition, 867
  low-dose attacks, 881
  public data sources, 881
Client Drift
  federated learning, 632
Client Scheduling
  federated learning, 634
Clock gating
  definition, 80
Clos network, *see* Fat-tree
Closed-loop governance
  feedback loop dynamics, 1003
Closed-loop load generation
  concurrency-bounded dispatch, 469
Cloud Computing
  ML infrastructure, 734
Cloud-Lite fallacy
  definition, 33
Cluster
  geometry, 113
  MTBF scaling, 322
Cluster design
  gradient bus integration, 135
Cluster management
  pre-flight checks, 708
Cluster orchestration
  distributed training, 209
Cluster Utilization
  communication bottleneck, 438
  data starvation, 438
  memory fragmentation, 439
  zombie jobs, 437
Clustered federated learning
  client grouping, 638
CMOS power equation
  digital circuit foundation, 897
Co-packaged optics
  architecture, 140
  bandwidth hierarchy flattening, 140
  link budget effects, 140
  power savings, 140
  thermal sensitivity, 140
CodeCarbon
  definition, 945
Coefficient of Variation
  definition, 392
Cold restart

recovery trade-offs, 354
Cold start
LLM replica loading, 577
recommendation system, 753
Cold-Start Problem
definition, 645
personalization, 645
Collective communication
AllToAll schedules, 301
Collective Operation
definition, 279
Columnar format
feature selection, 160
Communication
event timeline, 464
Communication efficiency
accuracy per byte, 651
client participation rate, 641
edge fleets, 641
gradient compression, 636
Communication intensity
appendix refresher, 1097
definition, 20
fleet scaling, 206
Communication overhead
gradient synchronization, 208
interconnect bandwidth, 563
Communication overlap
collective hiding, 1028
Communication wall
gradient bus, 105
Communication-Bound
optimization path, 494
Communication-bound regime
efficiency drop, 228
Communication-bound workload, 1083, 1097
Communication-computation overlap
boundary effects, 309
definition, 104
energy efficiency, 228
incast mitigation, 134
latency hiding, 135, 217
LogP analysis, 278
memory overhead, 309
pipelining, 308
Communication-computation ratio
definition, 206
COMPAS
algorithmic bias, 985
Compiler
cost model limitations, 498
operator fusion pass, 483
Compound AI Systems
compositional scaling, 1035
Computational storage
SSD offload, 194
Compute Express Link
memory expansion, 193
Compute-Bound, 455
optimization path, 494
Compute-limited regime
resource allocation, 15
Compute-optimal training
resource allocation, 13
Concept Drift
definition, 851
detection algorithms, 851
ground-truth feedback, 851
remediation cost, 851
Concept drift
distribution change, 713
monitoring, 1034
Confidence Calibration
drift detection, 648
Confidence Rounding
definition, 782
Confidential Computing
hardware isolation, 793
Conformal Prediction
exchangeability requirement, 860
guaranteed coverage, 860
routing and fallback, 882
Conformal prediction
finite-sample coverage, 859
Congestion control
PFC and ECN counters, 138
Congestion spreading
definition, 129
Consistency
definition, 21
read-after-write, 167
storage, 166
Consistent Hashing
cache locality, 568
KV cache, 568
stateful routing, 568
Constitutional AI
alignment, 993
Container Isolation
ML serving, 814
Contestability
system accountability, 989
Contestability Stack
appeal routing, 990
decision provenance, 990
explanation generation, 990
outcome tracking, 990
Contestability stack
architecture, 990
Context eviction
KV cache pressure, 572
Context Filtering
safety mechanism, 993
Context parallelism
all-to-all transpose, 248
definition, 247
Continual learning
edge devices, 644
Continuous Batching
definition, 519
iteration-level scheduling, 519
slot reuse, 520
Continuous batching
iteration-level scheduling, 93
Continuous integration
ML systems, 686
Contrastive Learning
definition, 643
Contribution Analysis
layer selection, 621
Control Plane
definition, 22
Control plane
fleet management, 660
Controller Pattern
Kubernetes, 402
Coolant Distribution Unit
cooling loop isolation, 919
N+1 redundancy, 922
Cooling
capacity constraint, 1034
immersion, 919
junction temperature, 81
liquid flow rate, 80
rack-scale heat dissipation, 77
Cooling Energy Density
definition, 940
Coordinated checkpointing, *see* Checkpointing
Coordinated omission
latency underestimation, 469
Coordination overhead
collective latency, 228
Copy-on-write
prefix caching, 540
Corporate Sustainability Reporting Directive
definition, 944
value chain reporting, 944
Correlated failure
cooling system, 326
failure domain protection, 326
network switch, 326
operator error, 326
power supply, 326
shared power domain, 379
shared software, 379
shared switch, 379
software bug, 326
thermal correlation, 379
Coscheduling
Kubernetes scheduling, 403
Cost
annual cost, 732
anomaly root cause categories, 748
per active user, 747
quality trade-off analysis, 749
Cost allocation
equal split, 747
marginal cost, 747
proportional, 747
Cost efficiency
scheduling objective, 390
Cost Per Inference
definition, 747
Cost per token
metric, 92
Cost Policy
definition, 423
Counterfactual explanation
model interpretability, 986
recourse, 988
Counterfactual fairness
definition, 965
observational limitations, 966
Counterfeit Hardware
provenance, 799
Covariate Drift
importance weighting, 851
Covariate Shift
day-night illumination, 851
definition, 713
importance weighting, 851
CPO, *see* Co-packaged optics
CPU offloading
optimizer state, 74
CPU-GPU Synchronization, 464
CRC
gradient validation, 334
Credit-based flow control
definition, 114
Critical batch size
data-parallel ceiling, 218
definition, 232
scaling regimes, 232
Critical Materials
AI hardware, 932
definition, 932
Critical Message Size, 275
Critical message size
algorithm crossover, 291
crossover, 313
Crossbar switch, 71
NVSwitch, 71
Crossover arithmetic intensity
compute and memory balance, 902
Crowdsourcing
poisoning risk, 784
Cryptographic hash
validation cost, 177
CSRD, *see* Corporate Sustainability Reporting Directive
CUDA, 839
programming model, 44
streams, 493
CUDA Graphs
definition, 473
kernel replay, 473
launch overhead elimination, 473
CUDA Time-Slicing
definition, 428
CUE, *see* Carbon Usage Effectiveness
Curriculum learning
data locality, 150
Custom accelerator
cloud options, 734
CXL, *see* Compute Express Link
coherent interconnect, 95
definition, 95
memory pooling, 95
Cybersecurity Regulations
ML compliance, 799
Cyclic buffer dependency
definition, 129
C^3 Taxonomy

appendix refresher, 1077
communication, 1083
compute, 1082
coordination, 1084
tax, 1088
C³ taxonomy
binding constraints, 1032
communication, 23
compute, 23
coordination, 24
definition, 23
operational dimensions, 22
pairwise intersections, 24
projection from D·A·M, 24
workload archetypes, 1032

DAC
definition, 112
signal attenuation loss, 113
DALI, *see* NVIDIA Data Loading Library
Daly formula, *see* Young-Daly formula
D·A·M taxonomy
single-node foundation, 1026
Dark launching
shadow traffic, 753
Data
data freshness, 685
limited regime, 15
Data Augmentation
techniques, 878
Data augmentation
workspace memory, 157
Data Center
environmental justice, 957
industrial electricity demand, 890
Data center
construction critical path, 737
Tier III concurrent maintainability, 85
Tier IV fault tolerance, 85
Data Center Emissions Scale
definition, 913
Data Center Industrial Scale
definition, 890
Data Contract
definition, 685
Data contract
continuous validation, 685
Data Drift, 851
Data drift
incident classification, 718
Data efficiency
edge constraints, 613
scaling saturation mitigation, 18
Data format
compression integration, 160
index trade-offs, 160
Data gravity
placement economics, 176
Data Leakage
feature store risk, 681
Data Lineage
poisoning rollback, 877
Data loader
multi-worker throughput, 174
object storage streaming, 167
pinned memory, 157
pipeline architecture, 157
Data loading
pipeline, 76
Data Locality, 1037
Data locality
privacy feature, 597
Data movement
energy cost, 90
Data Nutrition Project
dataset documentation, 1013
Data Parallelism, 273
synchronous SGD, 271
trade-offs, 1031
Data parallelism
batch loop transformation, 209
communication cost, 267
definition, 211
inter-node, 68
network hierarchy, 135
pure, 74
rail-optimized topology, 124
Data pipeline
throughput equation, 169
Data placement
dynamic on-demand, 175
static allocation, 175
Data Poisoning
availability attack, 785, 865
backdoor attack, 786
bilevel optimization, 784
concept poisoning, 868
definition, 784
efficiency, 776
online feedback manipulation, 865
subpopulation attack, 786
support-vector machines, 865
targeted attack, 785
targeted class compromise, 865
training integrity, 784
Data poisoning
preview, 22
Data Provenance
ML pipelines, 877
Data provenance
regulatory compliance, 168
Data quality
production validation, 684
Data shuffling
quality vs. I/O efficiency, 175
shard-level, 175
Data staging
on-demand staging, 191
prestaging, 191
streaming, 191
Data Stall Ratio
definition, 170
Data stall ratio
diagnostic metric, 170
Data transfer cost
cloud egress, 188
Data Wall
definition, 193
DataLoader
worker allocation heuristic, 175
Dataset scale
storage limit, 207
Dataset versioning
cryptographic snapshotting, 177
Datasheets for datasets
operating envelope, 999
training data documentation, 999
DCQCN
congestion control, 132
definition, 132
DDoS
ML inference, 772
DDP
comparison with FSDP, 223
gradient bucketing, 209
Deadlock
Coffman conditions, 396
hold-and-wait, 396
pipeline parallelism, 339
Debug Port
JTAG vulnerability, 799
Decentralized SGD
neighbor communication, 237
Declarative Model
definition, 401
Decode
inference phase, 93
Decode Bottleneck, 1029
Decode Phase
memory bandwidth bottleneck, 459
Decode phase
memory bandwidth bound, 514
memory bandwidth saturation, 592
Decode piggybacking
definition, 529
weight loading amortization, 529
Deep Ensemble
uncertainty estimation, 872
Deep Gradient Compression
gradient sparsification, 236
Deep Leakage from Gradients, 818
DeepFool
minimal perturbation, 863
DeepSpeed
1-bit Adam, 306
checkpointing fault tolerance, 378
Ulysses context parallelism, 248
DeepSpeed Ulysses, *see* DeepSpeed
Defense in Depth
definition, 774
layered architecture, 803
Defense Selection Framework
deployment contexts, 832
Defense-in-Depth
ML lifecycle integration, 848
Defensive Distillation
definition, 873
Defragmentation
definition, 394
Deionized Water
definition, 922
Delta encoding
dataset snapshot, 195
Demographic Parity
definition, 962
final prediction, 962
Denial of Wallet
availability abuse, 789
Dennard Scaling
sustainability, 891
Dennard scaling
power wall, 79
voltage limits, 79
Dense layer
compute intensity, 89
Deployment
automation payback period, 671
consistency models for multi-region, 695
dark launching, 753
patterns by scale, 676
risk mitigation, 691
risk-based rollout, 692
shadow mode, 697
staged ensemble, 675
Deployment tier
cloud ML, 957
edge ML, 957
mobile ML, 957
TinyML, 957
Depreciation
accelerator hardware, 732
Depthwise Separable Convolution
definition, 607
parameter reduction, 607
Determinism
violation, 325
Device Plugin
definition, 402
DGX
H100 baseboard, 71
Die-to-die interconnect
bandwidth, 48
Differential Privacy
advanced composition, 828
central, 818
composition with secure aggregation, 640
data sensitivity distribution, 829
definition, 822
edge devices, 639
effective sample size, 829
federated learning, 597
gaussian mechanism, 825
laplace mechanism, 825
local, 818
mean-estimation noise, 769
moments accountant, 826
noise injection, 639
privacy budget epsilon, 823
privacy ledger and accounting, 639

privacy loss random variable, 826
Rényi differential privacy, 828
simple composition, 828
task complexity, 829
Dimension-Ordered Reduction, 295
Diminishing Returns, 1129
Direct attach copper, *see* DAC
Direct preference optimization
memory budget, 259
Direct-to-Chip Liquid Cooling
cold plate mechanism, 919
Disaggregated Serving
prefill-decode disaggregation, 460
DiskANN
SSD-backed vector index, 192
Disparate impact ratio
threshold analysis, 967
Displacement of overhead
cross-layer optimization, 1038
cross-layer trade-offs, 1032
definition, 27
parallelism trade-offs, 267
DistBelief
distributed training, 209
Distributed Checkpoint
manifest publication, 184
rank-sharded data, 187
Distributed ML
governing principles, 1026
Distributed ML engineering
fleet stack shift, 1026
Distributed Scheduling
challenges, 441
Distributed Tracing
ML pipelines, 715
Distributed tracing
context propagation, 373
observability, 373
span, 373
trace, 373
Distributed training
definition, 207
DistributedDataParallel, *see* DDP, 308
gradient hooks, 308
Distribution band
fleet stack, 206
Distribution Shift
clinical imaging, 850
definition, 850
sensor noise, 838
District Heating
definition, 892
municipal heat networks, 921
DLRM
AllToAll, 273
coordination bottleneck, 1033
embedding scale, 224
lighthouse archetype, 30
scale, 504
DMR
fleet contrast, 338
Domain Shift, 850
Dominant Resource Fairness
multi-resource allocation, 390
progressive filling, 393
worked allocation, 392
Double Binary Tree, 289
complementary trees, 289
DP-SGD
lot, 827
training cost, 981
training overhead, 824
DPO, *see* Direct preference optimization
DPU
infrastructure offload, 72
Dragonfly
topology origin, 126
Dragonfly topology
definition, 126
DRAM
data pipeline staging, 156
energy cost, 901
DRF, *see* Dominant Resource Fairness
Drift Detection
on-device models, 648
Drift detection
sample requirements, 714
Dropout
MC, inference cost, 872
Dual-Store Architecture
definition, 678
Dual-Use Dilemma
ML security, 869
Duck Curve
definition, 933
training pause during peak ramp, 934
Durability
eleven nines, 165
storage, 166
Duty cycle
edge inference power, 905
DVFS
accelerator power management, 80
Dynamic Batching, 514
Dynamic batching
sequence length variance, 261
Dynamic Compute Allocation
definition, 535
Dynamic Power
definition, 897
Dynamic Random-Access Memory, *see* DRAM
Dynamic scaling
FP8 dynamic range, 237
Dynamic Sharing
definition, 430
D·A·M taxonomy
algorithm, 22
data, 22
definition, 22
machine, 22
workload projection, 24

E4M3
weights and activations, 237
E5M2
scaled gradients, 237
ECC
end-to-end limitation, 381
error detection and correction, 334
ECC error
uncorrectable, 355
ECMP
elephant flow limitations, 109
hash collision, 132
hash polarization, 109
static flow hashing, 132
ECN
CNP feedback loop, 132
congestion signaling, 114
marking threshold, 132
reaction window, 134
tuning sensitivity, 132
Edge AI
power budget categories, 926
Edge AI Energy Paradox
definition, 906
Edge caching
central inference, 582
Edge Computing
energy paradox, 906
selective hardening, 840
Edge inference
vs. on-device learning, 596
Edge Intelligence
definition, 596
Edge Learning
paradigm, 629
Edge learning
integration controls, 645
Edge power measurement
instrument comparison, 904
EDP, *see* Energy-delay product
Effective Cost
definition, 420
Effective FLOP/s, 1087
Effective Service Rate, 1124
Efficiency
distributed, 27
energy dimension, 27
facility, 898
interconnect, 1037
power, 733
program, 726
runtime, 726
scheduling, 726
Efficiency Frontier
definition, 452
Pareto optimality, 452
Egress fee
cloud storage, 188
Elastic Net Attack to DNNs
definition, 863
sparse perturbation, 863
Elastic Scheduling
definition, 415
elastic range, 414
transition cost, 415
Elastic Training
definition, 358
dynamic membership, 1029
fleet fault tolerance, 1090
Elastic training
resilience, 382
Elastic Weight Consolidation
catastrophic forgetting, 858
definition, 644
Electrical Interconnect
energy per bit, 1037
Electricity
annual electricity, 731
Electromigration
wear-out mechanism, 329
Electronic waste
AI hardware obsolescence, 934
Element-wise operation
memory-bound bottleneck, 456
Elephant and mice flows
definition, 109
Elephant flow
ECMP collisions, 132
gradient AllReduce, 109
network traffic, 109
Embedded AI
definition, 934
Embedding sharding
column-wise, 560
definition, 6
hybrid, 560
parameter server, 224
row-wise, 560
Embedding table
host DRAM capacity, 157
hybrid sharding, 585
recommendation scale, 560
sparse feature lookup, 530
Embodied Carbon
amortization formula, 909
hardware lifecycle, 897
hardware manufacturing, 897
Embodied carbon
hardware lifecycle, 1030
Emissions trading
compute cap, 944
Emissions trading for compute
definition, 944
Emissions trading systems
definition, 944
Encrypted Inference
homomorphic encryption, 819
latency overhead, 820
Energy
fleet consumption metric, 27
privacy trade-off, 958
Energy Buffering
definition, 892
transient smoothing, 917
Energy consumption
data movement hierarchy, 272
Energy cost
HBM data movement, 228
InfiniBand network, 228
NVLink transfer, 228

Energy efficiency
  joules per useful task, 1035
Energy Harvesting
  power budgets, 928
Energy Reuse Effectiveness
  heat export, 921
Energy Roofline Model
  crossover arithmetic intensity, 902
  definition, 902
Energy tax
  communication overhead, 228
Energy Wall, 1037
Energy wall
  thermodynamic limit, 4
Energy-delay product
  energy-latency trade-off, 939
Energy-scale invariant
  definition, 28
Energy-to-communication ratio
  local vs. cloud offloading, 927
Engineering practices
  fleet scale, 29
Enhanced transmission selection
  definition, 137
Ensemble
  price sensitivity model, 677
  product embedding model, 677
  ranking model, 677
  staged deployment, 675
  user embedding model, 677
Environmental Justice in Data Center Siting
  definition, 945
Epistemic Uncertainty
  robustness, 843
Equal opportunity difference
  audit metric, 967
Equal-cost multi-path, *see* ECMP
Equality of opportunity
  true-positive rate, 962
Equalized odds
  error-rate parity, 962
Erasure Coding
  definition, 166
  Reed-Solomon codes, 165
Error correction code, *see* ECC
Error Feedback
  definition, 304
  residual accumulator, 304
  telescoping sum, 305
Error model
  propagation, 340
ESP32
  definition, 608
EU AI Act
  auditability requirement, 22
  energy reporting, 944
  high-impact FLOP threshold, 944
  risk-based classification, 997
  transparency and oversight, 999
EUV Lithography Energy Cost
  definition, 906
Evaluation contract
  definition, 705
  production release, 1034
Event time
  data pipelines, 178
Event-driven Computing
  definition, 894
Exact Artifact Theft
  definition, 778
Exclusive Access
  definition, 429
Executive Order 14110
  safety reporting thresholds, 997
Experience Replay
  device tiers, 645
Expert Buffering, 560
Expert collapse
  routing failure, 560
Expert Parallelism, 558
Expert parallelism
  conditional computation, 249
  definition, 250
Explainability
  system evidence, 956
Explicit congestion notification, *see* ECN

Fabric behavior
  definition, 128
Fail-Safe Defaults
  definition, 774
Fail-stop failure
  characteristics, 325
  detection and recovery, 325
Failsafe Mechanism
  ML serving, 843
Failure
  inevitability at scale, 382
Failure detection
  heartbeat protocol, 351
Failure domain
  atomic unit of failure, 378
  coupling patterns, 10
  definition, 121
  ML infrastructure, 326
Failure modes
  gray failure, 708
Failure Rate
  daily, 9
  per training run, 9
Failure rate
  FITs, 319
  fleet scale, 8
Failure-domain-aware placement
  replica distribution, 164
Fair-Share Scheduling
  decay half-life, 400
  definition, 400
Fairness
  gerrymandering, 966
  impossibility theorems, 964
  incompatibility, 961
  scheduling objective, 390
  stability constraint, 956
  tax, 961
  validation in ml, 690
  validation, impossibility trade-off, 690
Fairness impossibility theorem, 1030
Fake Profile Injection
  definition, 865
  sybil network, 866
Fallback Redundancy
  definition, 842
  edge constraints, 842
  ensemble switching, 847
  toxicity guards, 841
Fallback routing
  graceful degradation, 572
Fast Gradient Sign Method
  adversarial training, 862
  definition, 862
  single-step formulation, 862
Fat-tree
  bisection bandwidth, 122
  Clos origin, 122
  definition, 121
Fault Diagnosis
  cross-layer correlation, 880
  fixed-input replay, 880
Fault injection
  abstraction gap, 340
  software-based, 340
  testing discipline, 340
  tools and frameworks, 340
Fault Injection Attack
  activation manipulation, 796
Fault model
  abstraction, 340
Fault Tolerance
  definition, 318
  resource overhead, 840
Fault tolerance
  cluster MTBF, 208
  detection speed, 378
  spectrum, 378
FBLearner Flow
  DAG orchestration, 753
Feature Interaction, 530
Feature interaction
  recommendation systems, 530
Feature Squeezing
  adversarial defense, 872
  bit-depth reduction, 872
  definition, 872
Feature Store
  definition, 660
Feature store
  feature complexity, 744
  feature staleness, 718
  freshness requirements, 679
  point-in-time correctness, 176, 681
  recommendation systems, 508
  training-serving skew, 678
Feature-Parallel Batching, 510
FEC
  definition, 111
  latency tax, 112
  optical latency budget, 112
FedAvg
  coordination cycle, 631
  definition, 630
Federated A/B testing
  client cohort validation, 650
Federated Analytics
  privacy-preserving telemetry, 648
Federated analytics
  edge fleet, 707
Federated coordination
  edge constraints, 613
Federated Learning, 827
  compute-to-data paradigm, 597
  definition, 597
  fairness constraint, 972
  fleet heterogeneity, 597
  introduction, 30
  non-IID data challenges, 629
Federated learning
  edge constraints, 263
FedProx
  proximal regularization, 632
Fidelity
  fault injection framework, 340
Field-Programmable Gate Array, *see* FPGA
Filter bubble
  recommendation system, 754
Fine-Tuning
  selective, on-device, 621
FinOps
  definition, 745
FIPS 140-2
  security levels, 809
First-Come-First-Served Scheduling, 511
Five-level model
  definition, 104
FlashAttention, 474
  activation memory reduction, 247
  I/O-aware design, 474
  library substitution, 495
  SRAM tiling, 65, 474
  tiled softmax, 474
FlashAttention-2
  parallelism across sequence length, 475
FlashAttention-3
  Hopper architecture features, 475
Fleet Baseline Comparison, 470
Fleet economics
  build vs. buy, 729
Fleet energy productivity
  definition, 28
Fleet law
  C^3 taxonomy mapping, 1027
  definition, 25
  distributed step time, 1027
  responsible AI stability, 952
Fleet maintenance
  proactive strategy, 668
Fleet orchestrator
  as operating system, 11
Fleet Stack

Assurance row, 766
definition, 28
Distribution band, 1026
Governance band, 952, 1026
layered architecture, 1027
Serving band, 1026
textbook structure, 31
working discipline, 1027
Fleet-level property
safety engineering, 998
Fleet-scale ML systems engineering
definition, 1080
FLOP/s
energy distinction, 937
work vs. throughput, 14
FLOP/s vs. FLOPs, 14
definition, 937
Flowlet switching
definition, 133
Forward Error Correction
channel limit, 112
definition, 111
Reed-Solomon RS(544,514), 111
Four-fifths rule
screening threshold, 967
FP16
definition, 302
loss scaling, 64
mixed-precision training, 64
FP32
master weights, 64
FP8
E4M3 format, 64
E5M2 format, 64
mixed-precision training, 238
training pitfalls, 497
Fragmentation
scheduling, 394
Fragmentation Index
definition, 434
Fraud detection
operational requirements, 663
Free cooling
site selection, 738
Frontier model
collective communication, 1033
fleet infrastructure, 1026
FSDP
AllGather latency sensitivity, 283
efficiency trade-offs, 265
memory reduction, 220
memory trade-off, 281
parameter sharding, 222
prefetch tuning, 309
trade-offs with DDP, 223
Full Fine-Tuning
definition, 619
Fully Sharded Data Parallel, *see* FSDP

Galvanic Corrosion
definition, 922
Gandiva
definition, 424
Gang Scheduling
all-or-nothing requirement, 387
atomic allocation, 395
backfilling, 396
deadlock prevention, 441
definition, 396
heterogeneous workloads, 398
origins, 387
Gboard
definition, 601
GCS, *see* Google Cloud Storage
GDPR
Article 22, 985
ML systems, 775
on-device learning, 600
GDS, *see* GPUDirect Storage
GELU
kernel, 471
GEMM
arithmetic intensity, 456
kernel, 471
Generality tax
accelerator design, 43
Generalization
vs. robustness, 839
Generation API
serving case, 586
GHG Protocol, *see* Greenhouse Gas Protocol
Global batch
definition, 212
Global explanation
behavioral patterns, 986
Global load balancing
regional replicas, 582
Gloo, 312
shared-memory transport, 312
TCP transport, 312
Glue code
model debt, 668
Go-Back-N
definition, 115
Good Placement
definition, 411
Goodput, 1117
agentic closed loop, 1035
cluster-wide, 425
definition, 24
ML productivity metric, 27
productivity decomposition, 27
SLO-constrained, 512
useful throughput, 1038
Goodput Ratio, 1083
Google
Vertex AI, 754
Google Cloud Storage
key-value namespace, 165
Google Sustainability Framework
machine, 943
map, 943
mechanization, 943
model, 943
Google Tensor SoC
definition, 609
Governance
fleet constraints, 1031
operating path integration, 1039
GPFS
distributed metadata, 163
GPipe
bubble overhead, 244
pipeline parallelism, 243
GPT-2
training data memorization, 978
GPT-3, 207, 844
training compute, 5
unlearning cost baseline, 983
GPT-4
training compute scenario, 5
GPTQ, 479
layer-by-layer quantization, 549
second-order error compensation, 479
GPU, 270
hardware failure, 325
MTBF variation, 320
power monitoring, 904
procurement, 737
programmability, 44
GPU Manufacturing Embodied Carbon
definition, 890
GPU Utilization
efficiency, 747
GPU utilization
check, 138
storage bandwidth limit, 171
training vs. serving, 93
GPUDirect RDMA
accelerator memory, 114
gradient synchronization, 72
latency reduction, 272
zero-copy, 114
GPUDirect Storage
checkpoint write, 180
cuFile direct DMA, 179
data path, 180
definition, 178
GPUDirect family, 178
NVMe DMA, 76
GQA
KV cache memory reduction, 481
Graceful Degradation, 844
definition, 368
Graceful degradation
admission control, 370
edge adaptation, 645
primary model, 369
secondary model, 369
service availability, 1029
static fallback, 369
tertiary model, 369
triggers, 370
Graceful Preemption
definition, 416
GradCAM
visual explanation, 987
Gradient
bus, 105
Gradient accumulation
communication frequency, 107
communication overhead, 220
numerical stability, 266
resident buffer, 266
single-device equivalence, 212
Gradient bucketing
communication overlap, 264
overlap with backward pass, 253
Gradient Compression, 277
break-even condition, 306
divergence risk, 314
trade-offs, 306
Gradient compression
bandwidth reduction, 236
Gradient Hook, 308
Gradient Inversion Attack
training data reconstruction, 818
Gradient noise scale
critical batch size, 232
Gradient Quantization
definition, 636
Gradient Sparsification
definition, 636
Gradient staleness
asynchronous convergence, 227
BSP zero staleness, 230
definition, 229
optimization disruption, 216
SSP bounded staleness, 230
Gradient Synchronization
definition, 271
Gradient synchronization
communication bottleneck, 1028
Graph Break
causes and remedies, 484
definition, 484
Graph Capture
intermediate representation, 482
Graph Compilation
graph-level optimization, 483
pipeline stages, 482
Graphics Processing Unit, *see* GPU
Gray failure
performance degradation, 708
silent degradation, 356
straggler cause, 356
Gray Failure Detection, 470
Greenhouse Gas Protocol
definition, 906
three-scope accounting, 906
Greenwashing
definition, 945
Greenwashing in AI
definition, 945
Grid Carbon
marginal emissions, 940
Group Distributionally Robust Optimization
definition, 852
worst-case group loss, 852
Grouped-query attention
KV cache reduction, 249, 542
Grow-Shrink Elasticity
definition, 424
GShard
expert parallelism, 250

GSPMD
automatic graph partitioning, 485

H100, 207
cluster reliability, 322
memory hierarchy, 454
Hallucination
generative AI, 873
token entropy limitations, 874
Hamming code
ECC origin, 334
Hardware
unreliable substrate, 333
Hardware Fault
propagation in training, 841
Hardware heterogeneity
fleet load balancing, 1031
Hardware placement
bandwidth hierarchy, 210
Hardware Security
threat landscape, 794
Hardware Security Mechanisms, 804
Hardware Security Module
certification, 809
key custody, 808
performance trade-off, 808
Hardware specialization
GPU-CPU hybrid, 585
Hardware Utilization, 469
vs. MFU, 469
Hardware utilization
edge constraints, 604
Hardware-in-the-loop
edge fleet, 707
Hardware-software co-design
AI for systems, 1037
engineering practice, 29
storage and communication, 1031
HBM, 272, 310
bandwidth wall, 51
bus width, 54
cost-bandwidth trade-off, 55
decode bandwidth, 1029
definition, 53
energy efficiency, 54
HBM3 bandwidth, 52
memory hierarchy, 454
origin, 51
storage hierarchy, 155
HBM3
bandwidth, 503
HDD
random IOPS bottleneck, 160
Head-of-line blocking
FCFS scheduling, 511
Headroom
facility design, 737
Health check
inference correctness probe, 365
liveness vs. readiness, 365
orchestration layer, 352
serving failover, 363
trade-offs and thresholds, 365
Health checking
failover detection, 571
Healthcare Algorithm
proxy bias, 961
scale, 961
Healthcare ML
FDA compliance, 814
regulatory compliance, 814
Heartbeat protocol
failure detection, 351
liveness signal, 351
Heat Rejection
definition, 921
Hedged requests
tail latency mitigation, 164
Heisenbug
distributed debugging, 371
Hexagon DSP
training runtime support, 613
Hierarchical AllReduce, 294
bandwidth hierarchy, 314
bandwidth multiplier, 295
three-phase decomposition, 294
Hierarchical capability matching
device tiers, 645
Hierarchical Network, 293
Hierarchical Placement
definition, 410
Hierarchical Profiling
system metrics, 467
Hierarchy-aware parallelism
definition, 253
interconnect tiers, 253
High-Bandwidth Memory, *see* HBM
High-bandwidth memory, *see* HBM
HIPAA
enforcement, 795
ML compliance, 795
ML requirements, 815
on-device learning, 600
HNSW
in-memory graph index, 192
Hoarding Problem
definition, 435
Hockney Model
latency and bandwidth, 275
Holistic preemption
definition, 398
Homomorphic Encryption
encrypted inference, 819
etymology, 819
FHE, 820
Hop count
definition, 111
fat-tree tiers, 123
Horizontal scaling
inference replicas, 504
Horovod
collective communication, 12
gradient all-reduce, 209
Host Networking
definition, 404
HPCC
congestion control, 132
definition, 132
Huber Loss
gradient capping, 878
poisoning defense, 878
Human oversight
supervisory control, 956
Human vs. Machine Perception
definition, 861
Human-in-the-Loop
systems overhead, 956
Hybrid Architecture
definition, 405
Hybrid Parallelism
systems support, 1031
Hybrid parallelism
decision criteria, 262
definition, 251
Hybrid sharding
TP and PP combination, 562
Hyperscale Data Center Footprint
definition, 913

i.i.d. assumption
test-set fallacy, 881
violation in production, 839
I/O bottleneck
data loading, 76
I/O jitter
sources and pipeline impact, 172
I/O Wall
compute-storage divergence, 149
definition, 148
hardware trend, 149
NVMe-to-HBM gap, 158
IB, *see* InfiniBand, *see* InfiniBand
Idempotent writes
data pipelines, 177
Idle compute
accelerator cost, 188
economic cost of data stalls, 171
IEEE 754
bit-flip vulnerability, 332
Illinois Artificial Intelligence Video Interview Act
transparency requirements, 999
ImageNet
bottleneck analysis, 160
data parallel training, 211
one-hour training, 231
Immersion Cooling
dense accelerator clusters, 941
dielectric fluid, 919
single-phase, 919
two-phase, 919
In-memory computing
definition, 946
In-network computing
switch aggregation, 297
In-network telemetry
HPCC, 132
In-Processing Approaches
fairness, 974
Incast
algorithm selection mitigation, 134
definition, 133
layer-staggering mitigation, 134
Incast problem
parameter server, 224
Incident classification
data drift, 718
feature staleness, 718
model decay, 718
upstream model change, 718
Incident response
data contract, 685
Incremental checkpointing, *see* Checkpointing
delta state, 185
Industrial Coupling
definition, 892
Inference
decode phase, 925
infrastructure, 92
prefill phase, 925
risks, 768
static power waste, 925
throughput per dollar, 92
InfiniBand, 209
credit-based flow control, 114, 115
origin, 115
RDMA, 9
subnet manager, 115
virtual lane, 115
Influence Functions
data sanitization, 877
inverse-Hessian computation, 877
Infrastructure
rates and physical limits, 1026
Inherently interpretable model
transparency by design, 987
Input Validation
runtime defense, 812
Instance pricing
on-demand, 734
preemptible, 734
reserved, 734
spot, 734
Institutional deference
automation bias, 1005
InstructGPT
alignment pipeline, 993
INT8
definition, 302
quantization, 64
Integrated Gradients
attribution method, 986
Intel SGX
memory constraints, 805
Inter-Token Latency, 463
Interconnect
topology, 270
Interconnect fabric
cloud provisioning, 734
Interference
GPU sharing, 429

Interim Measures for Generative AI
algorithm filing, 997
Interleaved pipeline scheduling
bubble reduction, 243
Interleaving Experiments
sample efficiency, 699
Intermediate tensor
materialization overhead, 471
Intermittent fault
fleet response, 334
Interposer
area scaling, 55
silicon substrate, 54
Intra-layer parallelism
fine-grained distribution, 244
Invariant
responsible AI, 22
IOPS
charges, 188
ML irrelevance, 148
IoT
device growth, 934
security vulnerabilities, 798
Iron law
performance decomposition, 451
vs. fleet law, 1027
Iron law of ML systems
on-device learning, 596
Iron law of scale, *see* Fleet law
ISO/IEC 42001
management standard, 955
IsoFLOP curve
optimal model size, 13
IT power
cluster cooling calculation, 920

Jacobian-Based Saliency Map Attack
definition, 862
feature saliency, 862
Jailbreak
detection, 715
Jailbreak Attack
adversarial prompts, 789
alignment bypass, 789
Jensen-Shannon Divergence
bounded property, 854
definition, 854
Jevons Paradox
definition, 935
efficiency rebound, 935
rebound effect, 1030
Job Preemption
checkpoint trade-off, 724
Joule
definition, 886
Joules per token
generative serving, 939

k-Anonymity
privacy technique, 982
Kernel
timeline, 464
Kernel Autotuning
hardware benchmarking, 485
Kernel Fusion
bandwidth scaling, 471
memory bandwidth reduction, 471
Kernel fusion
HBM traffic reduction, 65
Kernel Launch
launch-bound regime, 472
Key-Value Cache, *see* KV Cache
Knee of the Curve, 1129
Knowledge Distillation
sustainability, 938
Knowledge transfer
pretrained representations, 601
Kolmogorov-Smirnov Test
adversarial detection, 872
univariate drift limitation, 858
Kubeflow
orchestration, 687
Kubernetes
device plugins, 402
gpu allocation, 402
preemption, 403
priority classes, 403
training operators, 404
Kubernetes-over-Slurm
definition, 405
Kueue
ClusterQueue borrowing, 403
Kubernetes job queueing, 403
Kubernetes scheduling, 403
Kullback-Leibler Divergence
asymmetry, 854
closed-form Gaussian, 856
drift detection, 853
KV Cache
capacity wall, 536
compression, 495
definition, 511
hierarchical tiering, 545
INT8 quantization, 542
memory footprint, 536
migration, 570
offload working set, 192
paged memory allocation, 511
preallocated memory, 511
prefix caching, 367
prompt caching, 367
quantization, 481, 542
roofline placement, 60
serving fault tolerance, 367
tensor parallel sharding, 569
KV cache
appendix refresher, 1074
generation phase, 259

L1 cache
energy cost, 901
L2 cache
energy cost, 901
Label Shift
confusion matrix inversion, 852
LAMB
layer-wise adaptive moments, 230
Large Language Model, *see* LLM
LARS
layer-wise learning rate, 230
Laser Fault Injection, 796
Last-mile problem
definition, 135
Latency, 453
bandwidth hierarchy, 68
bound, 275
compute time, 58
compute trade-off, 166
detection, 714
dominated regime, 117
fan-out cost, 753
gate thresholds by model type, 689
memory time, 58
operating regime, 277
standard, 125
storage hierarchy, 152
Latency-dominated communication, 1102
Layer-wise partitioning
model parallelism, 241
LayerNorm
kernel, 471
LCA, *see* Life Cycle Assessment
Leaf Switch Domain
definition, 407
Leakage current
transistor states, 897
Learning rate warmup, 231
gradual warmup, 231
Lease-based resource
definition, 398
Least Privilege
ML pipeline security, 876
Least-connections load balancing, 567
Life Cycle Assessment
AI system lifecycle, 930
definition, 929
design and architecture phase, 930
disposal and e-waste, 934
ISO 14040 standard, 929
manufacturing and fabrication, 933
operational use phase, 933
Lifecycle Assessment, 1030
Lifecycle carbon calculation
implementation, 911
Lifecycle policy
storage tier transitions, 168
storage tiering, 168
Lighthouse archetype
at scale, 29
definition, 6
Lightweight Transformers
definition, 609
LIME
explainability overhead, 986
Lineage
model metrics, 685
pipeline tracking, 685
Lineage tracking
provenance, 685
Linear scaling fallacy
compute budget vs. wall-clock time, 33
Linear scaling regime
efficiency, 228
Linear scaling rule
learning rate, 230
Link Aggregation, 277
Link Budget
definition, 113
Link Contention, 278
LinkDownedCounter
definition, 137
Lipschitz Constant
certified radius trade-off, 871
definition, 871
Lipschitz Continuity
robustness, 871
Liquid Cooling
direct-to-chip, 919
reliability and failure modes, 922
thermal design space, 941
thermal runaway, 922
Little's Law, 1127
capacity planning, 517
serving concurrency, 517
Liveness probe
container orchestration, 352
Llama 3
failure cadence, 1029
MFU scaling tax, 256
tensor-parallel scaling, 246
Llama Guard, 814
Llama-3
failure report, 323
inference memory footprint, 57
lighthouse archetype, 31
training failure cadence, 9
LLM, 276
autoregressive decoding bottleneck, 456
inference, memory bottleneck, 58
latency budget, 689
Load Balancing
inference, 502
Load balancing
serving fault tolerance, 363
work signals, 566
Load Shifting
software, 940
Local batch
definition, 212
Local Data Sampling
definition, 630
Local explanation
prediction attribution, 986
Local learning
sample efficiency, 894
Local SGD
communication frequency, 236
Local Training
definition, 630
Locality

operator fusion, 499
temporal, 150
Locality Cost
definition, 408
Locality-aware scheduling
cache exploitation, 176
Log
observability, 376
LogGP Model
large message transfer, 278
LogGP model, 1103
Logic Wall, 533
LogP Model
definition, 278
nonoverlappable overhead, 278
overhead parameter, 278
overlappable latency, 278
processor overhead, 278
Lookahead Decoding, 544
LoRA
adapter locality, 546
definition, 617
multi-tenant serving, 546
weight folding, 620
Loss spike
failure anomaly, 352
LRU
ML failure mode, 150
Lustre
etymology, 162

M/G/c/K Queues, 1123
MAC
energy cost, 91
Machine Learning, *see* ML
Machine Learning Fleet
definition, 7
Machine Unlearning
privacy cost, 978
Mahalanobis Distance
latent representation filtering, 876
Maintenance
burn-in testing, 709
predictive diagnostics, 709
rolling maintenance window, 709
MAML
definition, 638
Manufacturing variance
silicon margin, 335
MapReduce
definition, 10
Marginal vs. Average Emissions
definition, 940
Masked Autoencoder
representation robustness, 878
Masked Language Modeling
definition, 878
Materialization
definition, 679
Matrix Multiply Unit
TPU, 62
Max-min fairness
token allocation, 574
Maximum Mean Discrepancy
drift detection, 847
MDS, *see* Metadata Server
Mean time to failure, *see* MTTF
Mean time to recovery, *see* MTTR
Mechanistic Interpretability
research field, 988
Medical Device
ML security, 798
Medusa, 544
MegaScale
large-scale training, 246
Megatron-LM
column-row pairing, 245
hybrid scaling, 267
model parallelism, 12
sequence parallelism, 247
tensor parallelism, 245
Mel-Frequency Cepstral Coefficients
definition, 627
Meltdown/Spectre
ML impact, 794
Membership Inference
privacy risk, 639
Membership Inference Attack
definition, 639
threat model, 775
training set membership, 775
Memory
bit flip, 324
timeline, 464
Memory bandwidth
training amplification, 604
Memory exhaustion
capacity limit, 207
Memory footprint
on-device training, 604
peak activation, 214
Memory fragmentation
external fragmentation, 538
internal fragmentation, 538
Memory Hierarchy
energy costs, 901
Memory hierarchy
L2 cache, 52
Memory Management
compilation planning, 483
Memory management
dynamic memory manager, 520
Memory Wall, 1029
bandwidth bottleneck, 455
bytes per FLOP, 499
Memory wall
appendix refresher, 1073
data parallelism, 218
in compute axis, 23
intra-node bound, 10
model parallelism, 240
scaling gap, 51
Memory-Bound, 455
inference pitfall, 497
optimization path, 494
Memory-boundedness
inference, 58
Message fusion
startup latency amortization, 275
Meta
FBLearner Flow, 753
Metadata Server
namespace management, 162
Metric
observability, 376
system vs. algorithmic, 461
METUX Model
user experience, 997
MFU
derivation and measurement, 469
economic impact, 469
fleet scaling tax, 470
useful FLOP metric, 469
Mice flow
network traffic, 109
Michelangelo
architecture, 752
Microcontroller
compute and energy constraints, 608
memory constraints, 607
power budget and duty cycling, 649
Microcontroller Power Budget
definition, 649
MIG
A100 profiles, 402
GPU isolation, 402
GPU partitioning, 47
orchestration, 402
Minimal Attack Surface
definition, 774
Minimax
adversarial training, 878
robust optimization formulation, 878
Minimum Viable Scale
definition, 417
Mirai Botnet
scale, 772
Mixed-Precision Quantization
layer-wise calibration, 485
Mixed-Precision Training
definition, 609
Mixed-precision training
appendix refresher, 1073
memory footprint, 207
numerical fault tolerance, 374
numerical issues, 374
numerical stability, 64
Mixtral 8x7B
top-2 routing, 250
Mixture of experts, *see* MoE
Mixture-of-Experts, *see* MoE
ML, 284
ML API
attack surface, 777
ML CO 2 Impact
definition, 945
ML framework
single-node stack, 10
ML Networking
data-center workload inversion, 108
ML Platform
cost breakdown, 746
ML Productivity Goodput
fleet operations, 726
MLCommons
definition, 945
MLOps
definition, 647
production lifecycle, 1035
responsible AI tension, 1015
MLPerf, 470
MLPerf Tiny
benchmark suite, 939
MobileNet
definition, 607
edge power envelope, 1033
efficiency, 607
lighthouse archetype, 31
Mode Collapse, 821
Model Aggregation
definition, 630
Model architecture
TCO impact, 744
Model Bandwidth Utilization, 463
Model card
documentation, 999
reporting standards, 999
Model Collapse
definition, 193
Model Compression
vs. performance engineering, 451
Model decay
incident classification, 718
Model dependency
upstream changes, 718
Model Distillation
theft, 780
Model Extraction
definition, 778
Model extraction
preview, 22
Model FLOPs Utilization
definition, 23
distributed training, 256
fleet diagnostic, 1033
fleet performance, 469
fleet-scale behavior, 469
local node baseline, 469
Model FLOPs utilization
capacity planning, 66
Model Initialization
definition, 630
Model Inversion
federated attack, 639
Model Inversion Attack
confidence scores, 779
definition, 639
training data reconstruction, 779
Model loading
latency, 191
Model Memorization

privacy risk, 978
Model parallelism
definition, 238
multi-node partitioning, 6
Model partitioning
edge-cloud split, 636
on-device feasibility, 607
personalization layers, 638
Model Registry
least-privilege access control, 876
Model replication
serving replicas, 93
Model Repository, 777
supply chain, 777
Model Rollback
incident recovery, 815
Model rollout
storage bandwidth, 151
Model Serialization
security, 777
Model sharding
latency reduction, 504
Model Size
scaling, 743
Model Theft
strategies, 778
Model Update
definition, 630
Model Watermarking
IP protection, 816
Model weights, 74
MoE
all-to-all communication, 490
all-to-all routing, 1036
communication, 274
conditional computation, 490
expert load imbalance, 490
expert parallelism, 490
infrastructure challenge, 89
mixture-of-experts architecture, 558
performance engineering, 490
routing, 249
serving, 560
token routing, 273
Monitoring
correlation analysis, 708
false positive rate, 709
fleet, 708
multi-tier robustness telemetry, 847
network, 137
parameters by model type, 714
Monte Carlo Dropout
approximate Bayesian inference, 872
definition, 872
Montréal Carbon Pledge
definition, 945
Mosaic Streaming
object storage streaming, 166
MPI
communicator, 274
CUDA-aware, 311
legacy, 311
MPS
GPU sharing, 428
MTBF
cascade, 8
cluster scaling, 208
component vs. system, 319
GPU field variation, 320
system, 9
system failure rate, 319
MTBF Cascade, 1113
MTTF
cluster scale degradation, 88
failure cadence, 1034
per-component failure rate, 319
vs. MTBF, 319
MTTR
availability impact, 321
recovery interval, 321
recovery time budget, 354
Multi-head attention
KV cache overhead, 542
Multi-path routing, *see* ECMP
Multi-tenancy
noisy neighbor problem, 573
Multicalibration
intersectional fairness, 975
Multiply-Accumulate
energy conversion, 893
Mutual TLS
ML serving, 812

Namespace isolation
striping configuration, 165
NaN propagation
training corruption, 373
NCCL
algorithm selection, 292
channel allocation, 310
collective primitives, 209
communication collectives, 493
debug logging, 311
debug logs, 138
double binary tree, 289
environment variables, 311
GPUDirect RDMA, 310
kernel fusion, 310
performance, 310
timeout, 352
timeout trade-off, 352
topology, 209
topology detection, 298
Near-Memory Computing
definition, 610
Netflix
deanonymization, 779
recommendation architecture, 753
Network fabric
as system bus, 11
rail alignment, 709
Network partition
distributed training, 1030
fault tolerance, 325
federated learning, 641
Network requirements
training vs. serving, 93
Network slice
definition, 137
Network topology
definition, 119
full mesh, 66
ring, 66
Network virtualization
multi-tenancy, 136
Network wall
bisection bandwidth bound, 4
Network-bound workload, 1090
Networking
inter-instance bandwidth, 735
Neural Architecture Search
carbon cost, 914
Neural architecture search
AutoML, 754
Neural Engine
on-device training, 609
Neural processing unit
silicon dividend, 598
Neuromorphic computing
definition, 946
event-driven substrates, 1036
NHTSA
cybersecurity guidance, 771
NIC
contention, 299
NIST AI RMF
core functions, 955
risk management, 955
Node
accelerator aggregation, 66
crash, 325
definition, 67
Noisy Neighbor
GPU multi-tenancy, 727
isolation, 402
Noisy neighbor problem
PFS interference, 165
Non-Blocking Collective, 311
Non-blocking fabric
definition, 120
Non-IID Data
definition, 603
Non-IID data
convergence impact, 632
Non-Uniform Memory Access, *see* NUMA
Non-von Neumann computing
neuromorphic substrates, 1036
Non-von Neumann computing architectures
definition, 946
Normative pluralism
value conflicts, 1008
Nsight Compute, 461
kernel roofline, 466
Nsight Systems, 464
decode trace breakdown, 496
timeline analysis, 465
NUMA
aware allocation, 158
GPU data loading, 71
inference latency, 428
Numerical debugging
NaN detection, 373
Numerical Instability
masquerade as adversarial attack, 879
Numerical instability
Byzantine failure, 325
Numerical reproducibility
reduction order, 281
NVIDIA
H100, 322
H200 memory bandwidth, 58
NVIDIA Data Loading Library
GPU augmentation, 157
NVLink
distributed training, 209
fifth-generation, 48
fourth-generation, 48
lane configuration, 71
tensor-parallel overhead, 564
third-generation, 47
topology-aware scheduling, 407
NVMe
ML storage tier, 158
offloading, 74
queue parallelism, 158
NVMe over Fabrics, *see* NVMe-oF
NVMe-oF
RDMA-attached storage, 178
remote fabric data path, 180
NVSwitch
crossbar topology, 66
fully connected topology, 311
inter-node connectivity, 48
intra-node algorithm selection, 314
intra-node bandwidth, 228
non-blocking fabric, 71

OAuth
ML API authentication, 812
Object Classification Stability
Uber pedestrian crash, 842
Object Storage
cloud storage tier, 165
Object Storage Server
data block striping, 162
PFS disambiguation, 162
Object Tracking
trajectory prediction failure, 842
Observability
hardware substrate, 708
Observability Stack
definition, 404
OCS
reconfigurable topology, 96
Offensive ML
use cases, 800
Offline Store
definition, 678
On-call rotation
tiered structure, 721

On-Demand Capacity
cost comparison, 422
On-Device Adaptation
definition, 596
On-device adaptation
embedded vision, 602
hardware acceleration, 598
multi-context switching, 619
parameter-efficient strategies, 614
On-Device Learning
challenge, 654
definition, 596
trade-offs, 628
training cost, 927
On-device learning
constraint-solution mapping, 613
On-device prediction
inference strategies, 601
One Federated Uplink Round
definition, 629
One-Round Uplink Reduction
definition, 629
One-Sided Communication, 311
oneCCL, 312
oneAPI architecture, 312
Online Softmax
FlashAttention, 474
numerical stability, 474
running statistics, 474
Online Store
definition, 679
ONNX Runtime
portable inference, 651
ONNX Runtime Mobile
definition, 651
OOM, *see* Out-of-memory
Open-loop load generation
uncoordinated arrival schedule, 469
Operational Complexity
definition, 661
Operational Expenditure
definition, 728
Operator Fusion
case study, 496
element-wise, 472
intermediate memory reduction, 471
operator-specific, 473
reduction, 473
OpEx
cluster breakdown, 728
Opportunistic Scheduling
definition, 611
Optical Circuit Switching
definition, 96
Optical circuit switching
fault isolation, 96
MEMS mirror array, 96
topology reconfiguration, 96
TPU v4 pod, 49
Optical Interconnect
co-packaged optics, 1036
energy per bit, 1037
fabric-efficiency lever, 1037
optical I/O, 1036
Optical interconnect
co-packaged optics, 140
reach and latency, 113
Optical-electrical-optical conversion
power overhead, 96
Optimal regime
Chinchilla frontier, 15
Optimization
ctr, proxy misalignment, 994
systematic ordering, 494
Optimizer
state lag, 380
Optimizer Memory as Energy Cost
definition, 897
Orca
iteration-level scheduling, 520
Orchestration
efficiency gains, 1038
layer, 1035
Organizational pattern
centralized platform, 750
decision factors, 752
embedded engineers, 751
hybrid model, 751
OSS, *see* Object Storage Server
Out-of-Distribution Detection
energy-based scores, 859
Out-of-distribution detection
per-request, 859
Out-of-distribution robustness
testing, 1034
Out-of-memory
allocation failure, 221
Outlier Feature
activation magnitude, 477
quantization challenge, 477
Output Guardrail
definition, 874
policy enforcement, 874
Output Monitoring
runtime containment, 813
Over-Selection
definition, 635
Over-subscription
definition, 394
Oversubscription
definition, 110

P99
definition, 108
Packaging
3D SoIC, 95
Packet spraying
deadlock prevention, 132
InfiniBand adaptive routing, 132
load balancing, 132
Ultra Ethernet Transport, 139
Paged Memory Management, 511
PagedAttention
block size trade-off, 539
block table, 539
definition, 539
memory allocation, 459
virtual memory mapping, 536
PaLM
MFU efficiency, 256
TPU scale, 5
PAM4, *see* PAM4 signaling
PAM4 modulation, *see* PAM4 signaling
PAM4 signaling
definition, 111
noise margin trade-off, 111
symbol rate, 111
voltage levels, 111
Parallel File System
definition, 161
ML infrastructure, 161
Parallel system
redundancy calculation, 321
Parallelism
communication costs, 210
infrastructure interaction, 226
Parallelism Energy Overhead
definition, 923
Parameter server
architecture, 223
bandwidth bottleneck, 214
centralized synchronization, 209
DLRM embedding, 263
incast bottleneck, 224
push-pull model, 264
Parameter-Efficient Fine-Tuning
on-device energy savings, 927
Pareto Frontier, 1129
Pareto frontier
time-energy trade-off, 28
Participation Bias
federated learning, 635
Partition skew
data pipelines, 177
Partition tolerance
definition, 21
Paved road
model orchestration, 754
PCIe, 275
root complex contention, 70
PCIe Gen5
node hierarchy, 70
Penetration Testing
ML limitations, 801
Per-Context Efficiency
definition, 619
Perception Gap
adversarial vulnerability, 861
Performance Engineering
discipline definition, 450
hardware-software efficiency gap, 499
Performance modeling
collective calibration, 313
Perftest
point-to-point bandwidth tests, 138
Peripheral Component Interconnect Express, *see* PCIe
Permanent fault
fleet response, 333
Persistent Collective, 311
Persistent memory
checkpoint acceleration, 194
Personalization
trade-offs, 638
Personalization layer
trade-offs, 638
Personalized federated learning
objective, 637
Perspective API
evasion, 786
Perturbation Budget
norm-bounded, 861
Perturbation Set
norm-bounded, 839
PFC, *see* Priority flow control
PFC deadlock
definition, 129
PFC storm
cascading pause, 141
definition, 131
PFC watchdog
definition, 132
PFS, *see* Parallel File System
Phased deployment
data centers, 738
Phishing
AI-generated, 777
Physical layer
validation, 138
Physical monitoring
definition, 137
Physical substrate
hardware limits, 1026
Physical Unclonable Function
arbiter PUF, 810
device authentication, 809
hardware fingerprint, 809
SRAM PUF, 810
Pinned memory
DMA transfer, 157
PipeDream
asynchronous pipelining, 243
Pipeline
balance, 65
bubble fraction, 1107
bubble time, 1107
parameterization, 687
Pipeline bubble
dependency stall, 65
utilization trade-off, 241
Pipeline Parallelism, 273
bubble overhead, 313, 556
throughput scaling, 557
trade-offs, 1031
Pipeline parallelism
activation handoff, 240
coordination cost, 267
definition, 242
interleaved schedule, 243
microbatch scheduling, 264
multi-node partitioning, 6
network hierarchy, 135

pipelined loop transformation, 209
selection criteria, 262
Pipeline stress test
throughput benchmarking, 171
Pipeline Validation
software fault prevention, 881
Pipelined Execution, 278
Pipelining
data loading, 171
Placement
definition, 389
Placement Group
topology, 387
topology-aware scheduling, 387
Platform economics
ROI ratio, 666
Platform Engineering
definition, 722
Platform engineering
abstraction level, 722
paved road, 754
Platform operations
vs. single-model, 662
Pluggable optics
definition, 112
power cost, 140
rack exit requirement, 113
reach and cost, 113
transceiver power, 113
Pod
fat-tree domain, 121
interconnect scaling, 85
Kubernetes scheduling unit, 401
PodGroup
definition, 403
Point-in-time correctness
feature stores, 176
Point-in-Time Join
definition, 681
Point-to-point communication
pipeline stages, 240
Poisson process
failure modeling, 319
Policy model
RLHF role, 258
Pollux
definition, 425
Population Stability Index
binning sensitivity, 852
drift detection, 714
smoothing constant, 853
PortRcvData
definition, 137
PortXmitData
definition, 137
PortXmitDiscards
definition, 137
Positive predictive value
precision parity, 967
POSIX
permissions and ACLs, 168
Post-hoc explainability
methods taxonomy, 986
Post-incident review
platform learning, 720
Post-Training Quantization
calibration, 480
Postprocessing Methods
fairness, 974
Power alley
site selection, 738
Power delivery
rack-scale, 77
Power Delivery Network
definition, 83
Power delivery network
current slew rate, 82
loop inductance, 83
Power Density
crisis, 1099
rack, 1095
Power Distribution
distribution losses, 916
Power distribution
48V DC rack-level, 82
Power Distribution Unit
conversion losses, 916
Power of Two Choices
routing, 566
Power Traces, 801
Power Usage Effectiveness
datacenter efficiency metric, 892
definition, 898
industry average, 899
overhead metric, 898
Power wall
facility constraint, 78
Power-law relationship
scaling empirical basis, 18
PowerSGD
low-rank gradient compression, 236
PPO, *see* Proximal policy optimization
Pre-flight check
node health, 708
Preallocated Memory Management, 511
Precision Engineering
bandwidth multiplication, 477
Predicate pushdown
column pruning, 160
Predictive parity
equal positive predictive value, 968
score calibration, 971
Preemptible VMs
definition, 419
Preemption
victim policy, 512
Preemption Budgets
definition, 433
Preemption Cascade
definition, 433
Preemption Tax
definition, 433
Preemptive Scheduling, 511
Prefetch buffer
absorption of I/O variance, 157
depth calculation, 173
Prefetching, 283
Prefill
inference phase, 93
Prefill Phase
compute intensity, 459
Prefill phase
quadratic attention scaling, 591
Prefix Caching
prompt sharing, 540
Preprocessing Methods
fairness, 974
Principle of Least Privilege
definition, 876
Priority class
batch and research, 433
interactive and debug, 433
production serving, 433
production training, 433
Priority flow control
cascading PAUSE frames, 129
definition, 128
link-layer backpressure, 114
lossless mode, 128
Priority Inversion
active blockage, 397
definition, 397
Priority scheduling
multi-tenant isolation, 574
Priority-Aware Scheduling, 512
Privacy
accuracy trade-offs, 827
definition, 768
preserving machine learning pipeline, 978
utility tension, 827
utility trade-off, 768, 818
utility, trade-off, 827
Privacy budget
differential privacy, 1034
Process Group, 274
Process groups
PyTorch distributed, 264
Processing semantics
at-least-once, 177
at-most-once, 177
exactly-once, 177
Processing time
data pipelines, 178
Profiling
iterative discipline, 500
Nsight Compute, 463
Nsight Systems, 464
observer effect, 461
Program Goodput
definition, 27
Progress monitoring
definition, 398
Projected Gradient Descent Attack
definition, 862
iterative projection, 862
multi-step training overhead, 870
Prometheus
monitoring, 724
Prompt Injection
control-data entanglement, 789
LLM security, 789
robustness failure, 874
system prompt override, 789
Prompt-decode interference
head-of-line blocking, 527
Provenance Chain
definition, 193
Provisioning
granularity, 734
Proximal policy optimization
model asymmetry, 257
Pruning Energy Impact
definition, 938
PUE, 1095
facility load, 1096
financial savings, 899
hyperscale efficiency gap, 939
IT load, 1096
overhead reduction, 899
PUE Gap
definition, 939
Punica
multi-tenant LoRA, 547
PyTorch, 209, 839
torch.distributed backends, 312
PyTorch Elastic
worker failure detection, 361
PyTorch Profiler, 464
PyTorchFI
fault injection, 340

QSGD
quantized gradients, 236
Quality of Service
definition, 649
Quality of service
definition, 137
priority traffic, 134
Quantization
bandwidth multiplication, 499
bandwidth relief, 611
block-wise, 478
FP8 formats, 481
hardware-software co-design, 551
INT8 representation, 480
per-tensor, 478
quality trade-offs, 498
robustness trade-off, 847
rotation-based, 550
serving economics, 90
weight-only, 481
Quantization Energy Savings
definition, 938
Quantization-Aware Training
definition, 608
simulated rounding error, 480
QuaRot
Hadamard rotation, 551
rotation-based quantization, 551
Queries per joule
latency-sensitive serving, 939
Quota

utilization-based reclamation, 435
Quota Governance
definition, 435
Quota Review Cycle
definition, 435

Rack
definition, 77
power density, 77
Radix
definition, 121
RAID
ML storage, 147
Rail alignment
network isolation, 709
Rail-optimized network
hybrid parallelism, 253
Rail-optimized routing
DGX architecture, 298
Rail-Optimized Topology
definition, 412
Rail-optimized topology
cabling architecture, 124
definition, 124
DGX SuperPOD implementation, 135
hop count reduction, 125
parallel rail fabrics, 125
Random assignment
load balancing, 565
Random-access IOPS
vector search bottleneck, 192
Random-k Sparsification, 303
Randomized Smoothing
certified radius bound, 871
definition, 871
Gaussian smoothing, 871
inference latency overhead, 872
Rank assignment
topology alignment, 315
Ranking Head, 530
Ranking head
recommendation systems, 530
Raw Data Upload
definition, 629
Rawput, 1117
Ray
actor placement, 406
distributed scheduler, 406
RBAC
ML pipeline, 812
RCCL, 312
ROCm stack, 312
RDMA
definition, 113
kernel bypass, 272
Readiness probe
container orchestration, 352
Rebound Effect
definition, 935
Recommendation model
embedding capacity, 89
Recommendation System, 282
Recommendation system
embedding lookup bottleneck, 514
embedding tables, 224
embedding-heavy serving case, 585
fan-out cost, 753
freshness fault tolerance, 331
inference traffic volume, 507
multimodal serving case, 589
Reconciliation
definition, 389
Recourse
counterfactual actionability, 989
Recovery automation
action selector, 355
failure classifier, 355
health monitoring daemon, 355
validation stage, 355
Recovery procedure
job restart, 353
job scheduling delay, 380
job termination, 353
resource reclamation, 353
state synchronization, 353
training resumption, 353
Recursive Halving-Doubling, 288
nonneighbor communication, 289
Red Team
ML security, 801
Red Team Exercises, 801
Red teaming
adversarial audit, 1008
etymology, 1008
safety evaluation, 715
Reduce, 280
ReduceScatter, 281
bandwidth bound, 285
decomposition, 281
FSDP gradient reduction, 223
gradient aggregation, 214
Redundancy
fault tolerance model, 1090
Reference model
RLHF role, 258
Register
register pressure in fusion, 472
spill to local memory, 472
Register File, 454
register spilling, 454
Register file
accelerator hierarchy, 52
Reinforcement Learning from Human Feedback
alignment technique, 993
Reinforcement learning from human feedback
multi-model coordination, 257
Reliability
engineering, ml extension, 845
exponential survival decay, 208
parallel system, 321
series system, 320
Reliability collapse
appendix refresher, 1112
in coordination axis, 24
Reliability Engineering
exponential failure law, 845
Reliability gap
definition, 19
routine failure, 1029
Remote Attestation
fleet admission, 793
trusted execution environments, 805
Remote direct memory access, *see* RDMA
Rendezvous
elastic training, 353
Replay buffer
circular ring design, 626
Replication
redundant replicas, 363
Representativeness gap
preference modeling, 993
Residual Adapter
parameter efficient finetuning, 616
residual bottleneck, 616
Resilience
fleet-scale objective, 20
ResNet
data parallelism, 211
ResNet-50, 218, 870
image classification bandwidth, 171
Resource contention
GPU memory, 573
Resource quota
fair sharing, 573
Responsibility-Sensitive Safety
framework, 996
Responsible AI
at scale, 22
definition, 953
engineering constraints, 1030
lifecycle, 956
measurement baselines, 960
performance impact, 959
Reticle limit
photolithography ceiling, 47
Retraining
frequency, 744
Retraining Decision Framework
performance correlation, 857
three-level hierarchy, 857
Retrieval fee
archive storage, 188
Retrieval Noise
definition, 874
Retrieval-Augmented Generation
alignment, 993
definition, 744
retrieval noise, 874
Reward Hacking
value misalignment, 994
Reward hacking
safety risk, 1030
Reward model
RLHF role, 258
Ridge point
definition, 59
Right-to-Repair
hardware lifespan extension, 935
Rigid Scheduling
queue delay, 415
Ring algorithm
bandwidth optimal, 1103
Ring AllReduce
AllGather phase, 285
bandwidth, 292
bandwidth optimality, 284, 1028
bandwidth scaling, 1034
bandwidth utilization, 226
latency, 292
origin, 271
parameter synchronization, 28
pipelining, 284
scatter-reduce phase, 285
sequential steps, 286
Ring Attention, 476
causal masking, 248
inter-node scaling, 249
systolic point-to-point, 248
RLHF, *see* Reinforcement learning from human feedback
Robust AI
definition, 839
Robust Loss Function
outlier down-weighting, 878
Robustness Margin
definition, 845
quantization impact, 845
Robustness Tax
clean-accuracy trade-off, 870
Robustness-Privacy Trade-Off
adversarial training, 802
RoCE
definition, 115
RoCEv2
congestion control, 115
Rollback
automated configuration, 693
Rollout strategy
risk tiers, 692
Roofline Model
algorithmic shift, 500
compute ceiling, 455
memory bandwidth ceiling, 455
operational intensity, 455
performance engineering, 455
profiling verification, 463
ridge point, 455
single-machine recap, 1072
Roofline model
arithmetic intensity, 59
compute vs. memory bound, 20
compute-bound regime, 59
peak throughput, 59
Round-robin load balancing, 565
Router
mixture of experts, 490
Row-oriented format

per-sample metadata overhead, 160
Runbook
diagnostic order, 719
Running Average Power Limit
definition, 904
Runtime Goodput
definition, 27
Rényi Differential Privacy
composition tracking, 828

S-box, 801
S-LoRA
multi-tenant LoRA, 547
S3, *see* Amazon S3
Saliency Map
explainability, 986
Samples per joule
batch inference, 939
Sarathi-Serve
chunked prefill, 528
Savings
annual, 661
net, 668
weekly, 671
SCAFFOLD
control variates, 632
Scale Moment
canonical triad, 4
definition, 4
emergent phenomena, 1030
failure certainty, 4
output-to-impact shift, 4
processor-to-network shift, 4
production behavior, 1030
qualitative change, 1026
Scaling
breakdown type, 18
regression, 470
user, 743
Scaling Efficiency
elastic scheduling, 415
operating regimes, 416
Scaling efficiency
definition, 225
fleet evaluation, 27
mathematical definition, 224
problem size dependence, 225
Scaling Laws
loss curves, 15
model, 893
saturation, 18
Scaling laws
power-law formulation, 12
Scaling tax
communication and coordination, 228
communication overhead, 227
Scaling wall
definition, 228
fleet growth, 1031
hardware ceiling, 266
Scheduling
ML-specific policies, 442
topology awareness, 442
Scheduling Goodput
definition, 27
Scheduling Policy
infrastructure coupling, 442
Scope 1 emissions
backup generators and refrigerants, 906
direct emissions, 906
direct operational emissions, 906
Scope 2 emissions
grid energy mix, 906
indirect energy emissions, 906
purchased electricity, 906
Scope 3 emissions
accelerator embodied carbon, 906
hardware manufacturing and supply chain, 906
procurement and value chain, 944
semiconductor fabrication, 893
value chain emissions, 906
SDC, *see* Silent Data Corruption
Search ranking
illustrative cascade, 587
Secure Aggregation
Byzantine resilience conflict, 639
definition, 639
federated learning, 818
pairwise masking, 818
secret sharing protocol, 639
Secure Boot
chain of trust, 807
sequence, 807
Secure Enclave
architecture, 805
Secure Multiparty Computation
collaborative inference, 819
collaborative training, 820
performance overhead, 820
Security
definition, 767
privacy distinctions, 769
Selective layer updating
execution, 622
Selective Prediction
risk-coverage curve, 859
Selective prediction
risk-coverage, 859
Self-Consistency
definition, 874
reasoning path sampling, 874
Self-Determination Theory
autonomy, 997
Self-Speculative Decoding, 544
Self-Supervised Learning
pretext task robustness, 878
robustness, 878
sensor data, 643
Semantic Caching
trade-off, 583
Semantic saturation
definition, 18
Semiconductor Fabrication
water consumption, 931
Semiconductor Water Scale
definition, 931
Sensitivity
global sensitivity, 825
Sequence packing
padding elimination, 261
Sequence parallelism
AllReduce decomposition, 247
definition, 247
Sequential execution
D·A·M coordination, 1071
Sequential read bandwidth
vector search trade-off, 192
SerDes
definition, 113
Serialization
zero-copy, 505
Serializer/Deserializer, *see* SerDes
Series system
reliability calculation, 320
Service contract
useful capacity, 1029
Serving
cost metric, 93
hierarchy, 508
Serving Cost
annual serving cost, 506
cost per request, 506
Serving cost
upfront vs. recurring expense, 506
Serving Cost Dominance, 506
Serving framework
runtime contract, 552
Serving tax
budgeting, 1034
latency breakdown, 506
Session affinity
stateful failover, 366
Session caching
conversation history, 512
SEU
error rate, 324
mechanism, 335
SGD
data parallelism, 212
shuffle requirement, 149
SHA-256, 814
Shadow deployment
traffic mirroring, 697
Shadow Model
evaluation, 649
Shapley Value
explainability, 987
Shard contention
collision probability, 149
Sharded data parallelism
definition, 220
sharding granularity, 223
Shared memory
accelerator SRAM, 52
SHARP
in-network reduction, 297
memory traffic reduction, 297
ShieldGemma, 814
Side-Channel Attack
ML, 780
power consumption jump, 797
power profile, 797
power signature divergence, 797
Silent Data Corruption
bit flips and degradation, 167
cluster-scale probability, 845
distributed querying, 841
training run rollback, 841
Silent data corruption
detection methods, 337
mechanism, 325
network validation, 314
Silent degradation
definition, 137
Silent Failure Mode
autonomous perception, 838
definition, 838
distribution drift, 838
high-confidence degradation, 881
production detection, 882
Silent waste
definition, 137
Silicon lottery
fleet consistency, 65
SIMT
definition, 44
warp divergence, 44
Single-event upset, *see* SEU
Site Reliability Engineering
ML extension, 721
SLA
service-level objective, 505
Slice-Level Evaluation
high-risk failure modes, 841
SLO
batch size trade-off, 516
constrained optimum, 1129
headroom for recovery, 1031
inference latency bounds, 505
reliability target, 679
Slowdown
definition, 391
Slurm
consumable resources, 400
generic resources (GRES), 400
heterogeneous jobs, 401
imperative model, 399
job arrays, 401
preemption, 400
prolog and epilog scripts, 401
scheduling, 399
trackable resources (TRES), 401
vs. Kubernetes, 405
workload manager, 399
Slurm-alongside-Kubernetes
definition, 406
SM Partitioning
resource contention, 493
Small File Problem
definition, 163

format packaging, 163
metadata bottleneck, 163
Small-Scale Canaries, 470
SmoothQuant, 480
activation-to-weight scaling, 550
activation-weight migration, 480
per-channel scaling, 480
Sociotechnical Dynamics
definition, 953
Sociotechnical system
etymology, 953
Software Fault
masquerade as covariate shift, 879
Software timeout
resource contention, 324
Sparse Feature Lookup, 530
Sparse pull
parameter server, 224
Sparse push
parameter server, 224
Sparsification, 303
systematic bias, 303
Specification Gaming
objective design, 994
Spectral Signature, 866
data sanitization, 877
singular value decomposition, 877
Speculative Decoding
acceptance rate, 543
bandwidth optimization, 489
candidate verification, 489
deployment complexity, 495
draft model, 543
draft model verification, 489
SLA trade-offs, 544
speculation tax, 544
verification step, 543
Speculative Execution
side channel, 794
Speech Activity Detector, 813
Speed of Light
latency bound, 271
Spiking Neural Networks
definition, 894
neuromorphic efficiency, 894
Spine Switch
definition, 407
Split learning
model partitioning, 636
personalization layers, 638
Spot
definition, 422
Spot instance
checkpoint tax, 735
fallback strategy, 735
instance diversification, 735
Spot Instance Economics, 579
Spot Instances
cost optimization, 419
inference, 579
Spotify
personalization architecture, 754
Spurious Correlation
background shortcut, 852
definition, 852
Square root scaling rule
batch size, 231
SR-IOV
definition, 136
SRAM, 454
energy efficiency, 52
SSD endurance
checkpoint write volume, 159
SSP, *see* Stale synchronous parallel
Stability
responsible AI, 952
Stability-plasticity trade-off
continual learning, 643
Staffing
annual staffing, 732
Staged rollout
risk mitigation, 691
Stakeholder engagement
governance integration, 953
value deliberation, 982
Stale synchronous parallel
bounded staleness, 216
State management
session state in inference, 505
State reconciliation
offline clients, 642
Stateful serving
KV cache lifetime, 512
Stateless serving
horizontal scaling, 512
Static Batching, 510
Static batching
waste function, 521
Static Partitioning
definition, 430
Static Power
decode phase idleness, 925
definition, 897
leakage current, 897
Statistical efficiency
distributed training, 229
Statistical parity difference
audit metric, 967
Statistical Process Control
ML monitoring, 712
Statistical Profiling
kernel time distribution, 468
Statistical Significance
drift alerting, 855
Sticky routing
session affinity, 512
STM32F4
compute constraints, 608
STM32F4 Microcontroller
definition, 608
Stochastic Gradient Descent
definition, 609
Storage
distributed, 11
failure, 325
total data movement, 187
workload inversion, 147
Storage economics
cost components, 187
Storage hierarchy
extended memory hierarchy, 152
Storage refresh cycle
SSD density, 190
Storage Savings
definition, 619
Straggler
backup worker, 356
barrier latency, 1028
bounded staleness, 356
definition, 356
dynamic load balancing, 356
expert skew, 300
federated learning, 642
gray failure cause, 356
mitigation strategies, 356
proactive replacement, 356
synchronization delay, 7, 216
system jitter cause, 356
thermal throttling, 8
throughput impact, 1030
timing instrumentation, 374
Straggler amplification
definition, 24, 1080
Straggler mitigation, *see* Straggler
Straggler Problem
definition, 642
Straight-Through Estimator
quantization, 480
Streaming adaptation
continuous updates, 624
Streaming format
sequential access, 160
Streaming inference
incremental processing, 531
Stress Testing
empirical corruption benchmarks, 839
evaluation matrix, 848
Striped token partitioning
causal attention, 248
Striping
data distribution, 164
stripe count, 163
stripe size, 163
Strong scaling
data parallelism, 218
Structural causal model
fairness, 965
Structured logging
JSON format, 372
Stuxnet, 771
Subpopulation Poisoning
fairness impact, 865
Supply chain
GPU concentration, 737
Sustainability
definition, 886
Sustainability Measurement Contract
definition, 896
Sustainability Paradox
definition, 886
Sustainable AI
definition, 887
Sustainable infrastructure
carbon footprint, 1030
first-order cost, 1030
SUTVA
definition, 703
Switch radix
port density, 122
Switch Transformer
expert scale, 250
Switching Activity Factor
definition, 897
Symbol rate
definition, 111
SymbolErrorCounter
definition, 137
Synchronization
multi-node latency overhead, 505
Synchronous tight coupling
definition, 10
ML fleet distinction, 7
Synchronous Transients
sustainability consequence, 917
Synthetic Data
generation, 820
privacy trade-off, 820
provenance overhead, 193
raw payload, 193
verification factor, 193
System Integrity
runtime checks, 814
System Prompt
governance, 993
Systemic Vulnerability
ML pipelines, 839
Systolic array
definition, 44
etymology, 44
matrix multiply unit, 63

Tail latency
definition, 108
fan-out probability, 1029
storage shard contention, 149
Taints and Tolerations
GPU isolation, 413
Kubernetes scheduling, 413
Targeted Attack, 866
Targeted Profiling
windowed trace analysis, 468
TBT
time between tokens, 504
TCO
financial framework, 728
lifecycle framework, 738
TDP
thermal constraint, 78
Technical debt
data debt, 728
Telemetry
paradigms at scale, 716
Temporal multiplexing
RLHF phases, 259
Tensor Core

definition, 63
evolution, 62
FP8 arithmetic, 475
matrix units, 62
Tensor Memory Accelerator
asynchronous data movement, 475
Tensor Parallelism, 273
collective communication, 1036
column-row partitioning, 555
inference, 555
trade-offs, 1031
Tensor parallelism
bandwidth requirement, 210
column-parallel linear layer, 245
critical-path communication, 267
definition, 245
intra-node, 68
row-parallel linear layer, 245
SIMD loop transformation, 209
Tensor Processing Unit, *see* TPU, *see* TPU
Tensor processing unit, *see* TPU
TensorFlow, 284
TensorFlow Lite
definition, 651
TensorRT
inference engine optimization, 485
TensorRT-LLM
continuous batching, 526
quantization support, 552
Test-Time Compute, 533
Text Generation Inference
continuous batching, 526
TF32
Tensor Core acceleration, 64
TFRecord
sequential container, 163
sequential format, 160
TFX
data validation, 723
Themis
definition, 425
Thermal design power
definition, 79
hardware limits, 1028
heat flux, 80
scaling trajectory, 80
Thermal interface material
degradation, 81
Thermal throttling
performance degradation, 324
Threat Model
black-box access, 774
definition, 773
gray-box access, 774
white-box access, 774
Threat Modeling
ML systems, 773
Threat Prioritization
high-likelihood high-impact, 775
high-likelihood low-impact, 775
low-likelihood high-impact, 775
Three Pillars Framework
definition, 839
Through-silicon via
HBM stacking, 54
Throughput, 453
loss, 792
Tiered staging
two-phase checkpoint, 184
Tiered storage
archive tier, 190
cold tier, 190
hierarchy, 152
hot tier, 190
local NVMe cache, 76
warm tier, 190
Tiering strategy
storage hierarchy, 190
Tiling, 474
on-chip SRAM blocks, 474
Tensor Core operand reuse, 52
Time Between Tokens
definition, 504
prefill interference, 528
Time Per Output Token, 504
Time to First Token, 463, 504
Time value of compute
definition, 738
Time-travel query
data leakage prevention, 681
TinyML
definition, 926
experience replay, 626
on-device adaptation, 607
TinyTL
memory optimization, 615
Tiresias
definition, 424
TMR
fleet contrast, 338
Token
vocabulary size trade-off, 13
Token dropping
capacity factor, 300
capacity factor overflow, 560
Top-k Sparsification, 303
index overhead, 303
Top-k Truncation
definition, 782
Top-of-rack switch
failure domain, 121
rail optimization, 82
Topology Detection, 298
Topology Discovery
definition, 413
Topology-aware routing
graph search, 298
rank assignment, 299
Topology-Aware Scheduling
rail-aware, 412
ToR switch, *see* Top-of-rack switch
torch.compile
bottleneck remediation, 495
mode selection, 487
TorchDynamo
bytecode interception, 484
bytecode tracing, 484
graph capture, 484
TorchInductor
code generation, 484
Triton kernel generation, 484
TorchRec
embedding sharding, 224
Torus
definition, 126
Torus Topology, 295
dimension-ordered reduction, 296
Total cost of data delivery
cost components, 187
Total Cost of Ownership
break-even, 732
definition, 727
framework, 738
hardware, 728
maintenance overhead, 728
TPOT
time per output token SLO, 504
TPU, 243, 295
definition, 5
inference, 588
pod-scale design, 49
systolic array, 5
torus interconnect, 295
v4 supercomputer, 329
v5p, 49
Trace
observability, 376
Trackable Resource
definition, 401
Traditional I/O
data path, 180
host bounce buffer, 178, 179
Traffic class
definition, 137
Traffic matrix
collective communication, 282
Traffic Throttling
rate limiting, 815
Training
carbon intensity, 18
centralized, 597
compute evolution, 5
elastic, 358
energy consumption, 888
image, 154
slowdown, 871
text, 154
vs. inference requirements, 504
vs. serving infrastructure, 591
Training Communication Overhead
definition, 893
Training Cost, 506
Training Data Extraction
memorized sequences, 789
Training duration
wall-clock limit, 207
Training Operator Ecosystem
definition, 404
Training pipeline
candidate evaluation, 686
data validation, 686
feature engineering, 686
model registration, 686
training execution, 686
Training state rule, 1091
Training time
total FLOPs, 87
Training-serving gap
computational context, 677
Training-Serving Skew
platform invariant, 660
Training-serving skew
feature store invariant, 678
Transferability
definition, 863
surrogate model training, 863
Transformer
tensor-parallel block, 246
Transformer Engine
FP8 precision, 47
Transient fault
fleet response, 333
network packet loss, 324
Transient Voltage Droop
definition, 83
Transient voltage droop
barrier trigger, 83
decoupling capacitor hierarchy, 83
over-voltage overshoot, 83
software power smoothing, 84
under-voltage failure, 83
voltage collapse, 83
Transparency
lifecycle documentation, 955
Transport monitoring
definition, 137
Tree AllReduce, 287
bandwidth, 292
broadcast phase, 288
latency, 292
latency bound, 226
reduce phase, 287
TRES, *see* Trackable Resource
Triton
block-level programming, 486
definition, 486
kernel programming, 486
tile abstraction, 486
Triton Inference Server
adaptive batching, 532
Trust
calibration gap, 1006
Trusted Execution Environment
ML constraints, 805
performance overhead, 795
trust boundary, 805
TSV
3D stacking, 54
TTFT
time to first token SLO, 504
Two-phase commit
checkpoint atomicity, 350
Two-Tier Checkpointing
definition, 421

Two-Tower Architecture
offline embedding cache, 589
serving, 589

Uber
Michelangelo platform, 752
UEC, *see* Ultra Ethernet Consortium
Ultra Ethernet Consortium
transport architecture, 139
Uncertainty Estimation
Monte Carlo dropout, 872
Uncoordinated checkpointing, *see* Checkpointing
Unfused Execution, 471
Uniform parallelism, 253
Uninterruptible Power Supply
conversion losses, 916
Universal scaling law
resource requirements, 12
Unstructured sparsity
energy impact, 938
Update Transmission
definition, 630
Utilization
allocated, 434
compute, 434
distributed training overhead, 15
productive, 434

Validation
definition, 1002
performance, 645
Validation Gate
performance, 688
Value Alignment
AI safety, 956
Value alignment
objective specification, 956
Value model
RLHF role, 258
Value-Sensitive Design
methodology, 994
Vector index
trade-offs, 192
Verbs API
definition, 115
Vertex AI
managed control plane, 754
Victim flow
definition, 129
PFC cascade, 131
Virtual Function
definition, 136
Virtual lane
traffic isolation, 137
Vision model
serving characteristics, 507
Vision Models, 514
vLLM
paged KV cache, 510
PagedAttention integration, 539
Volcano
Kubernetes scheduling, 403
Voltage regulator module
transient response, 80

Von Neumann
bottleneck energy cost, 946
Von Neumann bottleneck
definition, 946

Wafer-scale engine
definition, 11
on-wafer interconnect, 46
Wafer-scale integration
defect tolerance, 46
physical constraints, 46
weight streaming, 95
Wait-for graph
deadlock detection, 397
Wake-Word Detection
definition, 601
Wake-word detection
always-on energy budget, 601
experience replay, 627
few-shot adaptation, 624
latency requirements, 602
Warehouse-scale computer
Barroso, 11
definition, 11
pod scale, 87
Warm cache
local NVMe cache, 159
local NVMe staging, 158
remote-read baseline, 159
Warm pool
replica management, 578
Warm replica
inference cold start, 191
Warm restart
survivor preservation, 354
Warmup
recovery overhead, 380
Warmup schedule
convergence stability, 209
Warp scheduling
divergence penalty, 44
latency hiding, 44
Waste Heat Reuse
definition, 921
Waste Ratio, 521
Wasted-token rate
definition, 571
Water consumption
definition, 931
Water Usage Effectiveness
accounting limitations, 931
datacenter metric, 892
definition, 899
units and typical ranges, 899
Water withdrawal
definition, 931
Watermark
stream processing, 178
Weak scaling
data parallelism, 218
fleet scale, 1098
WebDataset
object storage streaming, 166
streaming format, 160
tar archive format, 160
Weight stashing
PipeDream, 243
White-Box Attack
robustness bound, 862
Whole-Program Compilation
global optimization, 485
Wireless Upload Asymmetry
definition, 636
Working set size
full-corpus training, 150
Workload characterization
capacity planning, 735
Worst-Case Evaluation
vs. average accuracy, 881
Write pattern
bursty writes, 150
WSC
data center scale, 87

XLA
Accelerated Linear Algebra, 484
whole-program compilation, 484

Young-Daly formula
constant write time assumption, 345
exponential failure assumption, 344
history, 342
infinite horizon assumption, 345
optimal interval, 342, 1031
recovery time assumption, 345
single failure assumption, 345
square-root trade-off, 342

ZeRO
definition, 220
memory optimization, 220
memory redundancy reduction, 12
parameter sharding, 281
stage 3, 74
Zero Redundancy Optimizer, *see* ZeRO
ZeRO-1
optimizer state sharding, 222
ZeRO-2
gradient sharding, 222
ZeRO-3
parameter sharding, 222
Zero-bubble pipeline scheduling
1F1B comparison, 244
activation-weight split, 244
B and W kernels, 244
memory overhead, 244
Zero-Copy
serialization, 505
Zero-Copy Communication
RDMA, 272
Zero-Day, 771
Zero-Day Exploit, 771
ZeRO-Offload
CPU memory extension, 266
Zombie Models
deprecation, 676
Zombie work
cancelled request drain, 571